



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2013**

SAR EVALUATION REPORT

For
GSM/WCDMA Phone with WiFi/BT
Model: GT-S6293T
FCC ID: A3LGTS6293T

Report Number: 13I16645-5A
Issue Date: 12/18/2013

Prepared for
Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu
Suwon-City, Gyeonggi-Do 443-742, South Korea

Prepared by
UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

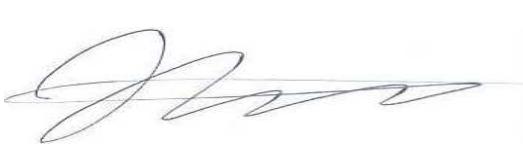
<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
	12/16/2013	Initial Issue	--
A	12/18/2013	Section 9: Removed GSM850, 1900 Edge (EGPRS) from the power table since this mode doesn't supported	Hung Thai

Table of Contents

1. Attestation of Test Results.....	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	7
4.1. <i>Measuring Instrument Calibration</i>	7
4.2. <i>Measurement Uncertainty.....</i>	7
5. Measurement System Description and Setup.....	8
6. SAR Measurement Procedure.....	9
6.1. <i>Normal SAR Measurement Procedure.....</i>	9
6.2. <i>Volume Scan Procedures</i>	11
7. Device Under Test.....	12
7.1. <i>General Information</i>	12
7.2. <i>Wireless Technologies.....</i>	13
7.3. <i>Output Power Tune-up Tolerance.....</i>	14
7.4. <i>Simultaneous Transmission Condition</i>	15
8. RF Exposure Conditions	16
8.1. <i>Head Exposure Conditions</i>	16
8.2. <i>Body-worn Accessory Exposure Conditions.....</i>	16
8.3. <i>Hotspot Exposure Conditions.....</i>	16
8.4. <i>Hotspot Exposure Conditions.....</i>	16
9. RF Output Power Measurement.....	17
9.1. <i>GSM 850</i>	17
9.2. <i>GSM 1900</i>	18
9.3. <i>W-CDMA</i>	19
9.4. <i>Wi-Fi (2.4 GHz Band).....</i>	23
9.5. <i>Bluetooth</i>	24
10. Tissue Dielectric Properties	25
10.1. <i>Composition of Ingredients for the Tissue Material Used in the SAR Tests</i>	26
10.2. <i>Tissue Dielectric Parameter Check Results.....</i>	27
11. System Performance Check	28
11.1. <i>System Performance Check Measurement Conditions.....</i>	28
11.2. <i>Reference SAR Values for System Performance Check.....</i>	28

11.3. <i>System Performance Check Results</i>	29
12. SAR Test Results	30
12.1. <i>GSM 850</i>	30
12.2. <i>GSM 1900</i>	31
12.3. <i>W-CDMA Band V</i>	32
12.4. <i>Wi-Fi (DTS Bands)</i>	33
12.4.1. <i>2.4 GHz Band</i>	33
12.5. <i>Bluetooth</i>	34
12.5.1. <i>Standalone SAR Test Exclusion Considerations</i>	34
12.5.2. <i>Estimated SAR</i>	34
13. SAR Measurement Variability.....	35
13.1. <i>The Highest Measured SAR Configuration in Each Frequency Band</i>	35
13.2. <i>Repeated Measurement Results</i>	35
14. Simultaneous Transmission SAR Analysis.....	36
14.1. <i>Sum of the SAR for GSM 850, Wi-Fi, and BT</i>	37
14.2. <i>Sum of the SAR for GSM 1900, Wi-Fi, and BT</i>	37
14.3. <i>Sum of the SAR for W-CDMA Band V, Wi-Fi, and BT</i>	38
15. Appendixes	39
15.1. <i>Photos and Antenna Locations</i>	39
15.2. <i>System Performance Check Plots</i>	39
15.3. <i>Highest SAR Test Plots</i>	39
15.4. <i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3929</i>	39
15.5. <i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3936</i>	39
15.6. <i>Calibration Certificate for D835V2- SN 4d117</i>	39
15.7. <i>Calibration Certificate for D1900V2- SN 5d163</i>	39
15.8. <i>Calibration Certificate for D2450V2 - SN 706</i>	39

1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.							
DUT description	GSM/WCDMA Phone with WiFi/BT							
Model	GT-S6293T							
Test device is	An identical prototype							
Device category	Portable							
Exposure category	General Population/Uncontrolled Exposure							
Date tested	12/09/2013 – 12/13/2013							
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII				
	Head	1.115 W/kg	0.382 W/kg	N/A				
	Body-worn Accessory	0.757 W/kg	0.286 W/kg	N/A				
	Wireless Router (Hotspot)	0.994 W/kg	0.286 W/kg	N/A				
	Simultaneous Transmission	1.497 W/kg	1.497 W/kg	N/A				
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Std 1528-2013							
Test Results	Pass							
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.								
<p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>								
Approved & Released By:		Prepared By:						
								
Bobby Bayani WiSE Engineer UL Verification Services Inc.		Hung Thai WiSE Laboratory Engineer UL Verification Services Inc.						

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- o 447498 D01 General RF Exposure Guidance v05r01
- o 648474 D04 Handset SAR v01r01
- o 941225 D01 SAR test for 3G devices v02
- o 941225 D02 HSPA and 1x Advanced v02r02
- o 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- o 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- o 941225 D06 Hot Spot SAR v01r01
- o 248227 D01 SAR Meas for 802.11abg v01r02
- o 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01
- o 865664 D02 SAR Reporting v01r01
- o 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 & 47266 Benicia Street, Fremont, California, USA.

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40000980	2/20/2014
Dielectric Probe kit	SPEAG	DAK-3.5	1103	5/2/2014
Dielectric Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529162	9/19/2014

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3744A01084	5/7/2014
Power Meter	HP	437B	3125U12345	7/29/2014
Power Sensor	HP	8481A	1926A27048	7/29/2014
Power Meter	HP	437B	3125U11364	8/26/2014
Power Sensor	HP	8481A	2702A76223	9/17/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1620606	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	Ametek	XT 20-3	1318A00530	N/A
Data Acquisition Electronics	SPEAG	DAE4	1259	2/7/2014
Data Acquisition Electronics	SPEAG	DAE4	1380	7/15/2014
E-Field Probe	SPEAG	EX3DV4	3929	6/24/2014
E-Field Probe	SPEAG	EX3DV4	3936	7/22/2014
System Validation Dipole	SPEAG	D835V2	4d117	5/28/2014
System Validation Dipole	SPEAG	D1900V2	5d163	9/17/2014
System Validation Dipole	SPEAG	D2450V2	706	5/29/2014

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040016	4/4/2014
Power Sensor	Agilent	N1921A	MY52020011	5/13/2014
Base Station Simulator	R & S	CMW500	132909	2/20/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01 Section 2.8.1., when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

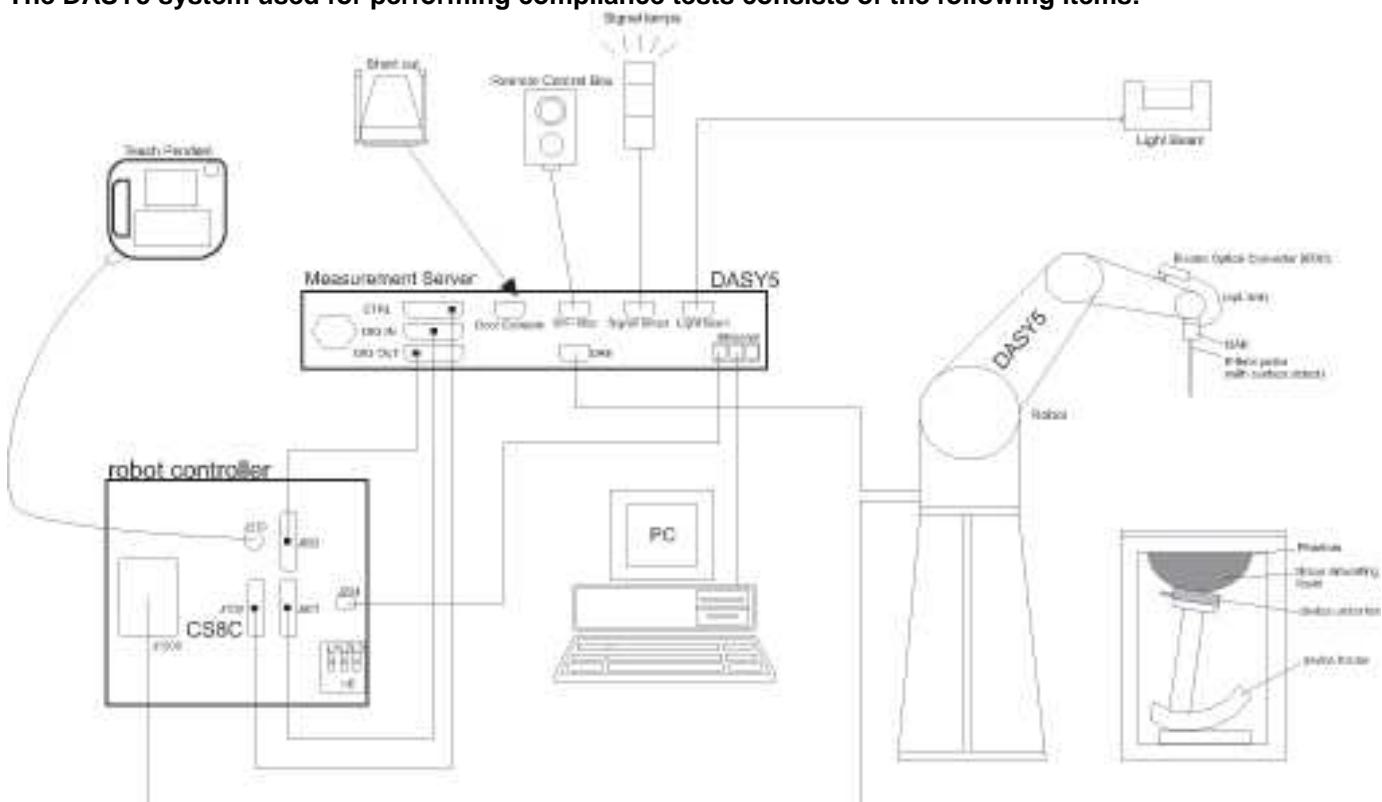

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$ graded grid	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface $\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 4 mm $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the area scan based *1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, <u>Body-worn (Voice call, included VoIP mode)</u>
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)
Device dimensions	Overall (Length x Width): 109 mm x 59 mm Overall Diagonal: 115 mm Display Diagonal: 84 mm
Back Cover	<input type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover <input checked="" type="checkbox"/> Normal Battery Cover with NFC
Accessory	<input checked="" type="checkbox"/> Headset
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.7 Vdc, 4.81 Wh <input type="checkbox"/> Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850/1900 W-CDMA Band: V Wi-Fi 802.11b/g/n, 2.4 GHz Bluetooth: 2.4 GHz.
Mode	<p>GSM</p> <ul style="list-style-type: none">- <input checked="" type="checkbox"/> Voice (GMSK)- <input checked="" type="checkbox"/> GPRS (GMSK)- <input type="checkbox"/> EGPRS (8PSK) <p>W-CDMA</p> <ul style="list-style-type: none">- <input checked="" type="checkbox"/> UMTS Rel. 99- <input checked="" type="checkbox"/> HSDPA (Rel. 5)- <input checked="" type="checkbox"/> HSUPA (Rel. 6)- <input type="checkbox"/> DC-HSDPA (Rel. 8)- <input type="checkbox"/> HSPA+ (Rel.) <p>Wi-Fi 2.4GHz (802.11b/g/n)</p> <ul style="list-style-type: none">- <input checked="" type="checkbox"/> 802.11b- <input checked="" type="checkbox"/> 802.11g- <input checked="" type="checkbox"/> 802.11n (20MHz)- <input type="checkbox"/> 802.11n (40MHz)- <input type="checkbox"/> 802.11ac <p>Bluetooth Ver. 4.0 (LE)</p>
Duty Cycle (used for SAR testing)	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, W-CDMA: 100% Wi-Fi 802.11a/b/g/n: 100%
GPRS Multi-Slot Class	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input checked="" type="checkbox"/> Class 33 - Four Up
DTM (Dual Transfer Mode)	<input type="checkbox"/> Supported
VoIP (GPRS)	<input checked="" type="checkbox"/> Supported
SV-LTE & SV-DO	<input type="checkbox"/> Supported

7.3. Output Power Tune-up Tolerance

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
		1 Slot	2 Slot	3 Slot	4 Slot	1 Slot	2 Slot	3 Slot	4 Slot
GSM850	Voice	32.5				33.0			
	GPRS	32.5	29.7	28.7	26.7	33.0	30.2	29.2	27.2
GSM1900	Voice	29.7				30.2			
	GPRS	29.7	26.7	25.7	23.7	30.2	27.2	26.2	24.2

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)			
RF Air interface	Mode	Target		Max. tune-up tolerance limit	
W-CDMA Band V	Rel. 99	22.0		22.5	
	HSDPA	22.0		22.5	
	HSUPA	22.0		22.5	
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)			
RF Air interface	Mode	Target		Max. tune-up tolerance limit	
Wi-Fi 2.4 GHz	802.11b	17.0		17.5	
	802.11g	14.0		14.5	
	802.11n (HT20)	13.0		13.5	
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)			
RF Air interface		Target		Max. tune-up tolerance limit	
Bluetooth		12.0		12.5	
Bluetooth LE		12.0		12.5	

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	<ol style="list-style-type: none">1. GSM 850/1900 Voice + Wi-Fi 2.4 GHz2. GSM 850/1900 GPRS (GMSK) + Wi-Fi 2.4GHz (VoIP)3. W-CDMA Band V + Wi-Fi 2.4 GHz
Body-worn Accessory	<ol style="list-style-type: none">1. GSM 850/1900 Voice + Wi-Fi 2.4 GHz2. GSM 850/1900 Voice + BT3. GSM 850/1900 GPRS (GMSK) + Wi-Fi 2.4 GHz (VoIP)4. GSM 850/1900 GPRS (GMSK) + BT5. W-CDMA Band V + Wi-Fi 2.4 GHz6. W-CDMA Band V + BT
Wireless Router (Hotspot) & Wi-Fi Direct	<ol style="list-style-type: none">1. GSM 850/1900 GPRS (GMSK) + Wi-Fi 2.4 GHz2. W-CDMA Band V + Wi-Fi 2.4 GHz
Notes:	
<ol style="list-style-type: none">1. Wi-Fi 2.4 GHz supports Hotspot.2. GPRS and W-CDMA support Hotspot.	

8. RF Exposure Conditions

Refer to Appendix "Antenna Locations and Separation Distances" for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

For WWAN and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For GSM 850/1900, W-CDMA Band V

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

For Wi-Fi, BT

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

8.3. Hotspot Exposure Conditions

For GSM 850/1900, W-CDMA Band V

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1 (Top)	93mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 2 (Right)	15 mm	Yes	
Edge 3 (Bottom)	3 mm	Yes	
Edge 4 (Left)	3 mm	Yes	

8.4. Hotspot Exposure Conditions

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1 (Top)	9 mm	Yes	
Edge 2 (Right)	2 mm	Yes	
Edge 3 (Bottom)	81 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	52 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01

9. RF Output Power Measurement

9.1. GSM 850

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	32.2
	190	836.6	32.2
	251	848.8	32.2

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	32.2	23.2	29.1	23.1	28.7	24.4	26.2	23.2
	190	836.6	32.2	23.2	29.1	23.1	28.7	24.4	26.1	23.1
	251	848.8	32.2	23.2	29.1	23.1	28.6	24.3	26.1	23.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above

9.2. GSM 1900

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)	
1900	512	1850.2	29.7	
	661	1880.0	29.7	
	810	1909.8	29.7	

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	29.1	20.1	26.9	20.9	26.1	21.8	24.0	21.0
	661	1880.0	29.0	20.0	26.8	20.8	26.1	21.8	24.0	21.0
	810	1909.8	29.0	20.0	26.8	20.8	26.1	21.8	24.0	21.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above

9.3. W-CDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
W-CDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	21.7
		4183	836.6	21.7
		4233	846.6	21.4

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D _{ACK}	8			
	D _{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	Ahs= β_{hs}/β_c	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	21.2
		4183	836.6	20.6
		4233	846.6	20.5
	Subtest 2	4132	826.4	20.5
		4183	836.6	20.6
		4233	846.6	20.5
	Subtest 3	4132	826.4	20.6
		4183	836.6	20.8
		4233	846.6	20.6
	Subtest 4	4132	826.4	20.8
		4183	836.6	20.7
		4233	846.6	20.6

Maximum output power levels that are possible for all subtests reported.

Note(s):

KDB 941225 D01 – Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than 1/4 dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is < 75% of the SAR limit.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
W-CDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
HSUPA Specific Settings	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	21.0
		4183	836.6	21.2
		4233	846.6	21.0
	Subtest 2	4132	826.4	20.9
		4183	836.6	20.5
		4233	846.6	20.5
	Subtest 3	4132	826.4	20.6
		4183	836.6	20.5
		4233	846.6	20.7
	Subtest 4	4132	826.4	20.6
		4183	836.6	20.7
		4233	846.6	20.6
	Subtest 5	4132	826.4	21.0
		4183	836.6	21.1
		4233	846.6	21.1

Note(s):

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is \leq 75% of the SAR limit.

9.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	“Default Test Channels”	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	✓	▽
		2.437	6	✓	▽
		2.462	11 [#]	✓	▽

Notes:
 ✓ = “default test channels”
 ▽ = possible 802.11g channels with maximum average output ¼ dB ≥ the “default test channels”
 # = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1	2412	17.0	Yes
		6	2437	17.1	
		11	2462	17.0	
	802.11g	1	2412	14.0	No
		6	2437	14.0	
		11	2462	14.0	
	802.11n (HT20)	1	2412	13.0	No
		6	2437	13.0	
		11	2462	13.0	

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	17.0	Yes
			2 Mbps	16.9	No
			5.5 Mbps	16.8	No
			11 Mbps	16.8	No

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

9.5. Bluetooth

Maximum tune-up tolerance limit is 12.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Std 1528-2013

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab 1

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit \pm (%)	
12/9/2013	Body 835	e'	53.4300	Relative Permittivity (ϵ_r):	53.43	55.20	-3.21	5
		e"	21.8000	Conductivity (σ):	1.01	0.97	4.34	5
	Body 820	e'	53.7100	Relative Permittivity (ϵ_r):	53.71	55.28	-2.83	5
		e"	21.7700	Conductivity (σ):	0.99	0.97	2.49	5
	Body 850	e'	53.2400	Relative Permittivity (ϵ_r):	53.24	55.16	-3.48	5
		e"	21.6900	Conductivity (σ):	1.03	0.99	3.85	5
12/10/2013	Head 835	e'	40.9700	Relative Permittivity (ϵ_r):	40.97	41.50	-1.28	5
		e"	19.1300	Conductivity (σ):	0.89	0.90	-1.31	5
	Head 820	e'	40.1600	Relative Permittivity (ϵ_r):	40.16	41.60	-3.47	5
		e"	19.1500	Conductivity (σ):	0.87	0.90	-2.82	5
	Head 850	e'	40.7700	Relative Permittivity (ϵ_r):	40.77	41.50	-1.76	5
		e"	19.0500	Conductivity (σ):	0.90	0.92	-1.60	5
12/13/2013	Body 1900	e'	51.7400	Relative Permittivity (ϵ_r):	51.74	53.30	-2.93	5
		e"	14.7900	Conductivity (σ):	1.56	1.52	2.80	5
	Body 1850	e'	51.9300	Relative Permittivity (ϵ_r):	51.93	53.30	-2.57	5
		e"	14.6200	Conductivity (σ):	1.50	1.52	-1.06	5
	Body 1910	e'	51.7100	Relative Permittivity (ϵ_r):	51.71	53.30	-2.98	5
		e"	14.7900	Conductivity (σ):	1.57	1.52	3.34	5
12/13/2013	Head 1900	e'	38.6500	Relative Permittivity (ϵ_r):	38.65	40.00	-3.38	5
		e"	13.8100	Conductivity (σ):	1.46	1.40	4.21	5
	Head 1850	e'	38.8700	Relative Permittivity (ϵ_r):	38.87	40.00	-2.83	5
		e"	13.6700	Conductivity (σ):	1.41	1.40	0.44	5
	Head 1910	e'	38.6100	Relative Permittivity (ϵ_r):	38.61	40.00	-3.48	5
		e"	13.8300	Conductivity (σ):	1.47	1.40	4.91	5

SAR Lab 4

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit \pm (%)	
12/10/2013	Head 2450	e'	39.0800	Relative Permittivity (ϵ_r):	39.08	39.20	-0.31	5
		e"	13.2900	Conductivity (σ):	1.81	1.80	0.58	5
	Head 2410	e'	39.2100	Relative Permittivity (ϵ_r):	39.21	39.28	-0.18	5
		e"	13.1400	Conductivity (σ):	1.76	1.76	0.02	5
	Head 2475	e'	38.9600	Relative Permittivity (ϵ_r):	38.96	39.17	-0.53	5
		e"	13.3300	Conductivity (σ):	1.83	1.83	0.41	5
12/10/2013	Body 2450	e'	53.7500	Relative Permittivity (ϵ_r):	53.75	52.70	1.99	5
		e"	14.8400	Conductivity (σ):	2.02	1.95	3.67	5
	Body 2410	e'	53.8700	Relative Permittivity (ϵ_r):	53.87	52.76	2.11	5
		e"	14.6500	Conductivity (σ):	1.96	1.91	2.92	5
	Body 2475	e'	53.6200	Relative Permittivity (ϵ_r):	53.62	52.67	1.81	5
		e"	14.9000	Conductivity (σ):	2.05	1.99	3.29	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d117	05/28/13	835	1g	9.54	9.40
				10g	6.21	6.16
D1900V2	5d163	09/17/2013	1900	1g	40.9	40.1
				10g	21.2	21.2
D2450V2	706	05/29/13	2450	1g	53.7	49.9
				10g	25.0	23.3

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	L _{st,7200} m Ratio +2 %	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
12/9/2013	D835V2	4d117	Body	1g	1.04	0.94	9.44	9.40	0.43	9.23
				10g	0.69	0.62	6.20	6.16	0.65	
12/10/2013	D835V2	4d117	Head	1g	1.00	0.98	9.78	9.54	2.52	2.20
				10g	0.68	0.64	6.39	6.21	2.90	
12/13/2013	D1900V2	5d163	Body	1g	3.88	3.83	38.3	40.1	-4.49	1.29
				10g	1.95	2.00	20.0	21.2	-5.66	
12/13/2013	D1900V2	5d163	Head	1g	4.23	4.08	40.8	40.9	-0.24	3.55
				10g	2.17	2.08	20.8	21.2	-1.89	

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	L _{st,7200} m Ratio +2 %	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
12/10/2013	D2450V2	706	Body	1g	5.12	5.00	50.0	49.9	0.20	2.34
				10g	2.22	2.28	22.8	23.3	-2.15	
12/10/2013	D2450V2	706	Head	1g	4.93	5.30	53.0	53.7	-1.30	-7.51
				10g	2.16	2.40	24.0	25.0	-4.00	

12. SAR Test Results

12.1. GSM 850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.0	32.2	0.428	0.515	
			Left Tilt	190	836.6	33.0	32.2	0.238	0.286	
			Right Touch	190	836.6	33.0	32.2	0.339	0.408	
			Right Tilt	190	836.6	33.0	32.2	0.235	0.283	
Head	GPRS 3 Slots	0	Left Touch	190	836.6	29.2	28.7	0.636	0.714	1
			Left Tilt	190	836.6	29.2	28.7	0.349	0.392	
			Right Touch	190	836.6	29.2	28.7	0.504	0.565	
			Right Tilt	190	836.6	29.2	28.7	0.355	0.398	
Body-worn	Voice	10	Rear	190	836.6	33.0	32.2	0.630	0.757	2
			Front	190	836.6	33.0	32.2	0.375	0.451	
Hotspot	GPRS 3 Slots	10	Rear	128	824.2	29.2	28.7	0.824	0.925	
				190	836.6	29.2	28.7	0.839	0.941	
				251	848.8	29.2	28.6	0.866	0.994	3
			Front	190	836.6	29.2	28.7	0.515	0.578	
			Edge 2	190	836.6	29.2	28.7	0.109	0.122	
			Edge 3	190	836.6	29.2	28.7	0.109	0.122	
			Edge 4	190	836.6	29.2	28.7	0.556	0.624	

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$
 - $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$
2. With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.2. GSM 1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	512	1850.2	30.2	29.7	0.825	0.926	
				661	1880.0	30.2	29.7	0.835	0.937	
				810	1909.8	30.2	29.7	0.819	0.919	
			Left Tilt	661	1880.0	30.2	29.7	0.246	0.276	
			Right Touch	661	1880.0	30.2	29.7	0.471	0.528	
			Right Tilt	661	1880.0	30.2	29.7	0.238	0.267	
Head	GPRS 3 Slots	0	Left Touch	512	1850.2	26.2	26.1	1.080	1.105	
				661	1880.0	26.2	26.1	1.090	1.115	4
				810	1909.8	26.2	26.1	1.040	1.064	
			Left Tilt	661	1880.0	26.2	26.1	0.340	0.348	
			Right Touch	661	1880.0	26.2	26.1	0.735	0.752	
			Right Tilt	661	1880.0	26.2	26.1	0.329	0.337	
Body-worn	Voice	10	Rear	661	1880.0	30.2	29.7	0.492	0.552	5
			Front	661	1880.0	30.2	29.7	0.311	0.349	
Hotspot	GPRS 3 Slots	10	Rear	661	1880.0	26.2	26.1	0.762	0.780	6
			Front	661	1880.0	26.2	26.1	0.534	0.546	
			Edge 2	661	1880.0	26.2	26.1	0.217	0.222	
			Edge 3	661	1880.0	26.2	26.1	0.564	0.577	
			Edge 4	661	1880.0	26.2	26.1	0.244	0.250	

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
2. With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	22.5	21.7	0.352	0.423	7
			Left Tilt	4183	836.6	22.5	21.7	0.172	0.207	
			Right Touch	4183	836.6	22.5	21.7	0.284	0.341	
			Right Tilt	4183	836.6	22.5	21.7	0.188	0.226	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	4183	836.6	22.5	21.7	0.553	0.665	8
			Front	4183	836.6	22.5	21.7	0.311	0.374	
Hotspot	Rel 99 RMC	10	Edge 2	4183	836.6	22.5	21.7	0.209	0.251	
			Edge 3	4183	836.6	22.5	21.7	0.068	0.082	
			Edge 4	4183	836.6	22.5	21.7	0.329	0.396	

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
2. With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.4. Wi-Fi (DTS Bands)

12.4.1. 2.4 GHz Band

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11b	0	Left Touch	6	2437	17.5	17.1	0.348	0.382	9
			Left Tilt	6	2437	17.5	17.1	0.198	0.217	
			Right Touch	6	2437	17.5	17.1	0.194	0.213	
			Right Tilt	6	2437	17.5	17.1	0.198	0.217	
Body-worn & Hotspot	802.11b	10	Rear	6	2437	17.5	17.1	0.261	0.286	10
			Front	6	2437	17.5	17.1	0.109	0.120	
Hotspot	802.11b	10	Edge 1	6	2437	17.5	17.1	0.054	0.059	
			Edge 2	6	2437	17.5	17.1	0.137	0.150	

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
2. With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.5. Bluetooth

12.5.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
12.5	18	10	2.480	2.8

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.5.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	18	10	2.480	0.378

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Hotspot (W/kg)
850	GSM 850	<0.8 W/kg	<0.8 W/kg	0.866 W/kg
1900	GSM 1900	1.090 W/kg	<0.8 W/kg	<0.8 W/kg
2400	Wi-Fi 802.11b/g/n	<0.8 W/kg	<0.8 W/kg	<0.8 W/kg

13.2. Repeated Measurement Results

Head Exposure Condition

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
					Original	Repeated	
Left Touch	GPRS 3 Slots	0	661	1880.0	1.090	1.040	1.05

Body-worn Accessory Exposure Condition

Not Applicable.

Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
					Original	Repeated	
Rear	GPRS 3 Slots	10	251	848.8	0.866	0.860	1.01

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / \text{Ri}$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(\text{SAR}_1 + \text{SAR}_2)^{1.5} / \text{Ri} < 0.04$$

14.1. Sum of the SAR for GSM 850, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM 850	WiFi DTS Band	Bluetooth		
Head	Left Touch	0.714	0.382		1.096	No
	Left Tilt	0.392	0.217		0.609	No
	Right Touch	0.565	0.213		0.778	No
	Right Tilt	0.398	0.217		0.615	No
Body-worn	Rear	0.757	0.286		1.043	No
		0.757		0.378	1.135	No
	Front	0.451	0.120		0.571	No
		0.451		0.378	0.829	No
Hotspot	Rear	0.994			0.994	No
	Front	0.578			0.578	No
	Edge 2	0.122	0.150		0.272	No
	Edge 3	0.122			0.122	No
	Edge 4	0.624			0.624	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM 1900, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM 1900	WiFi DTS Band	Bluetooth		
Head	Left Touch	1.115	0.382		1.497	No
	Left Tilt	0.348	0.217		0.565	No
	Right Touch	0.752	0.213		0.965	No
	Right Tilt	0.337	0.217		0.554	No
Body-worn	Rear	0.552	0.286		0.838	No
		0.552		0.378	0.930	No
	Front	0.349	0.120		0.469	No
		0.349		0.378	0.727	No
Hotspot	Rear	0.780			0.780	No
	Front	0.546			0.546	No
	Edge 2	0.222	0.150		0.372	No
	Edge 3	0.577			0.577	No
	Edge 4	0.250			0.250	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.3. Sum of the SAR for W-CDMA Band V, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		W-CDMA Band V	WiFi DTS Band	Bluetooth		
Head	Left Touch	0.423	0.382		0.805	No
	Left Tilt	0.207	0.217		0.424	No
	Right Touch	0.341	0.213		0.554	No
	Right Tilt	0.226	0.217		0.443	No
Body-worn Accessory & Hotspot	Rear	0.665	0.286		0.951	No
		0.665		0.378	1.043	No
	Front	0.374	0.120		0.494	No
		0.374		0.378	0.752	No
Hotspot	Edge 2	0.251	0.150		0.401	No
	Edge 3	0.082			0.082	No
	Edge 4	0.396			0.396	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendices

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations
- 15.2. System Performance Check Plots
- 15.3. Highest SAR Test Plots
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3936
- 15.6. Calibration Certificate for D835V2- SN 4d117
- 15.7. Calibration Certificate for D1900V2- SN 5d163
- 15.8. Calibration Certificate for D2450V2 - SN 706

END OF REPORT