



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center

416, Maetan-3dong,
Yeongtong-gu, Suwon-si,
Gyeonggi-do, Korea 443-742

TEST REPORT ON SAR

Model Tested: GT-S7500
FCC ID (Requested): A3LGTS7500
Job No: FI-317
Report No: FI-317-S1

- Abstract -

This document reports on SAR Tests carried out in accordance with FCC/OET Bulletin 65, Supplement C(June 2001).

Prepared By

JO LEE - Test Engineer

Authorized By

JD JANG - Technical Manager

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	1 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Contents

1. GENERAL INFORMATION	3
2. DESCRIPTION OF DEVICE	3
3. DESCRIPTION OF TEST EQUIPMENT	4
3.1 SAR Measurement Setup	4
3.2 E-field Probe	5
3.3 Phantom.....	7
3.4 Brain Simulating Mixture Characterization	9
3.5 Device Holder for Transmitters.....	9
3.6 Validation Dipole	10
3.7 Equipment Calibration.....	11
4. SAR MEASUREMENT PROCEDURE	12
5. DESCRIPTION OF TEST POSITION	13
5.1 SAM Phantom Shape.....	13
5.2 “cheek” Position	13
5.3 “tilted” Position	15
5.4 Body Configurations for Single TX SAR considerations.....	16
6. MEASUREMENT UNCERTAINTY	18
7. SYSTEM VERIFICATION.....	21
7.1 Tissue Verification	21
7.2 Test System Validation	21
8. SAR MEASUREMENT RESULTS.....	22
8.1 GSM850 Head SAR Results	29
8.2 GSM850 Body SAR Results	30
8.3 GSM1900 Head SAR Results	31
8.4 GSM1900 Body SAR Results	32
8.5 WLAN Head SAR Results.....	33
8.6 WLAN Body SAR Results	34
9. CONCLUSION	35
10. REFERENCES	36
APPENDIX A SAR Definition	38
APPENDIX B Probe Calibration Process	39
APPENDIX C ANSI/IEEE C95.1 – 2005 RF EXPOSURE LIMITS.....	40
APPENDIX D The Validation Measurements	41
APPENDIX E Plots of The SAR Measurements.....	48
APPENDIX F Probe Calibration	83
APPENDIX G Calibration of The Validation Dipole	84

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	2 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

1. GENERAL INFORMATION

Test Dates : Dec.13, 2011 ~ Dec.16, 2011
Manufacturer : SAMSUNG ELECTRONICS Co., Ltd.
Address : 416 Maetan3-Dong, Suwon City, Korea
Test Standard : §2.1093; FCC/OET Bulletin 65, Supplement C(June 2001)
FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)
Digital Transmitter System (DTS)
Tested for : FCC/TCB Certification

2. DESCRIPTION OF DEVICE

Test Sample : 850/1900 GSM/GPRS Mobile Phone with Bluetooth, WLAN
and EDGE Rx only
Model Number : GT-S7500
Serial Number : Identical prototype (S/N : # FI-317-A)
Tx Freq. Range : 824.2 ~ 848.8 MHz (GSM850)
1850.20 ~ 1909.80 MHz (GSM1900)
2412 ~ 2462 MHz (WLAN)
Rx Freq. Range : 869.2 ~ 893.8 MHz (GSM850)
1930.20 ~ 1989.80 MHz (GSM1900)
2412 ~ 2462 MHz (WLAN)
Antenna Manufacturer : Skycross
Model No.: GT-S7500
Antenna Dimensions : 59*13*4.5(mm)
Separation distance between
Main and Bluetooth antenna : 32mm

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	3 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR Measurement Setup

Robotic System

Measurements are performed using the DASY4 (or DASY5) automated dosimetric assessment system. Which is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, measurement server, Samsung computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

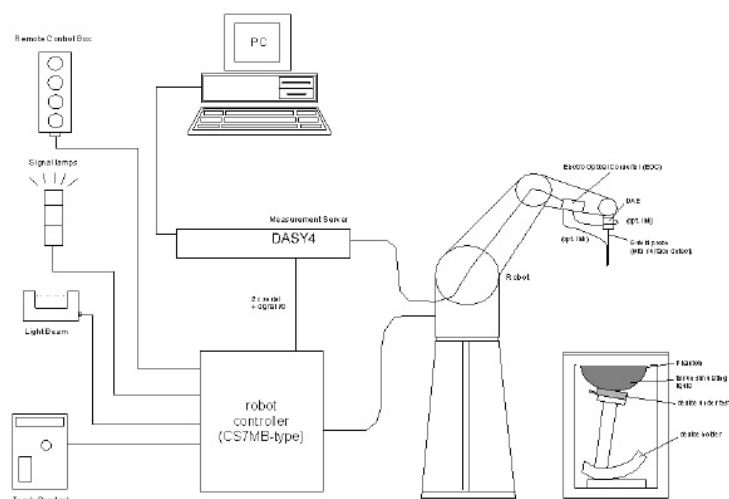


Figure 3.1 SAR Measurement System Setup

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control is used to drive the robot motors. The PC consists of the Samsung computer with Windows XP system and SAR Measurement Software DASY4 (or DASY5), LCD monitor, mouse and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	4 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

System Electronics

The DAE4(or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

3.2 E-field Probe



The SAR measurement were conducted with the dosimetric probe ES3DV2, ES3DV3, EX3DV4 and ET3DV6, designed in the classical triangular configuration (see Fig.3.3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.3.2). The approach is

Figure 3.2 DAE System stopped at reaching the maximum.

Probe Specifications

Construction Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration Basic Broad Band Calibration in air: 10-3000 MHz
 Conversion Factors (CF) for HSL 900 and HSL 1800

Additional CF for other liquids and frequencies upon request




Figure 3.3 Triangular Probe Configuration

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	5 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Frequency 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity **[ES3DV3], [ET3DV6]**
 ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.3 dB in tissue material (rotation normal to probe axis)
[EX3DV4]
 ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range **[ES3DV3], [ET3DV6]**
 $5\mu\text{W/g}$ to $> 100\text{mW/g}$; Linearity: $\pm 0.2\text{dB}$
[EX3DV4]
 $10\mu\text{W/g}$ to $> 100\text{ mW/g}$; Linearity: ± 0.2 dB

Dimensions **[ES3DV3], [ES3DV2]**
Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 3.9 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 2.1 mm
[EX3DV4]
Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm
[ET3DV6]
Overall length: 330mm
Tip length: 16mm
Body diameter: 12mm
Tip diameter: 6.8mm
Distance from probe tip to dipole centers: 2.7mm



[ES3DV3] ,[ES3DV2]



[EX3DV4]

Application **[ES3DV3], [ES3DV2]**

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	6 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

General dosimetry up to 5 GHz
 Dosimetry in strong gradient fields
 Compliance tests of mobile phones

[EX3DV4]

High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30 %.



[ET3DV6]

[ET3DV6]

General dosimetry up to 3 GHz
 Compliance tests of mobile phones
 Fast automatic scanning in arbitrary phantoms

Optical
 Surface
 Detection

[ET3DV6]

± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

3.3 Phantom

SAM Twin Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.5)



Figure3.5 SAM Twin Phantom

SAM Twin Phantom Specification

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 50361:2001 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.		
Shell Thickness	2 ± 0.2 mm		

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	7 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Filling Volume	Approx. 25 liters
Dimensions	Height: 810 mm; Length: 1000 mm; Width: 500 mm

Modular Flat Phantom

The Modular Flat Phantom V5.1 is constructed of a fiberglass shell integrated in a wooden table. Also It consists of three identical flat phantoms (modules) which can be installed and removed separately without emptying the liquid, as well as a wooden support.. It enables the dosimetric evaluation of body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.6)



Figure 3.6 Modular Flat Phantom

Modular Flat Phantom Specification

Construction	The shell corresponds to the specifications of IEEE 1528-2003. It enables the dosimetric evaluation of body mounted usage above 800 MHz at the flat phantom region. A cover prevents evaporation of the liquid		
Shell Thickness	2 ± 0.2 mm		
Filling Volume	Approx. 10 liters		
Dimension	Wooden support - Height: 810 mm; Length: 830 mm; Width: 500 mm Each Module - Height: 190 mm; Length: 200 mm; width: 300 mm		

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	8 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

3.4 Brain Simulating Mixture Characterization

The brain mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

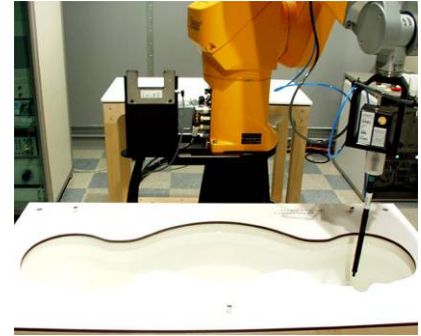


Figure 3.7 Simulated Tissue

Table 3.1 Composition of the Brain Tissue Equivalent Matter

INGREDIENTS	835MHz Brain	835MHz Muscle	1900MHz Brain	1900MHz Muscle	2450MHz Brain	2450MHz Muscle
WATER	40.29%	50.75%	55.24%	70.23%	62.7%	73.2%
SUGAR	57.90%	48.21%	-	-	-	-
SALT	1.38%	0.94%	0.24%	0.21%	-	0.04%
TWEEN20	-	-	44.52%	29.56%	37.3%	26.76%
BACTERIACIDE	0.18%	0.10%	-	-	-	-
HEC	0.25%	-	-	-	-	-
Dielectric Constant Target	41.50	55.20	40.00	53.30	39.2	52.7
Conductivity Target (S/m)	0.900	0.970	1.400	1.520	1.80	1.95

3.5 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0, the Mounting Device (see Fig. 3.7) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is




Figure 3.8 Device Holder

the ear opening. The devices can be easily, accurately and repeatedly be positioned according to the EN 50360:2001 and FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

*Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configuration. To produce worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	9 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

3.6 Validation Dipole

The reference dipole should have a return loss better than -20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

Frequency	835, 1900, 2450 MHz
Return Loss	< -20 dB at specified validation position
Dimensions	D835V2: dipole length: 161 mm; overall height: 330 mm D1900V2: dipole length: 68 mm; overall height: 300 mm D2450V2: dipole length: 51.8 mm; overall height: 300 mm

Note:

Usage of SAR dipoles calibrated less than 2 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibration in KDB 450824

D2450V2 S/N:807	Parameters			
Date of Cal	Return loss (dB)	Deviation (%)	Impedance (Ω)	Deviation (Ω)
2010.02.04	-26.8	0	54.4	0
2011.03.31	-26.6	0.75	50.1	-4.3

- End of page -

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	10 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

3.7 Equipment Calibration

Table 3.2 Test Equipment Calibration

Type	Calibration Due Date	Serial No.
SPEAG E-Field Probe EX3DV4	May.24, 2012	3537
SPEAG DAE4	Mar.18, 2012	686
SPEAG Validation Dipole D835V2	Feb.23, 2013	4d050
SPEAG Validation Dipole D1900V2	Feb.23, 2013	5d082
SPEAG Validation Dipole D2450V2	Feb.04, 2012	807
Stäubli Robot RX90BL	Not Required	F01/5N19A1/A/01
SPEAG SAM Twin Phantom V4.0	Not Required	TP-1247
SPEAG SAM Twin Phantom V4.0	Not Required	TP-1248
Modular Phantom	Not Required	MP-1003
E4421B Signal Generator	Oct.12, 2012	MY41000654
BBS3Q7ELU Power Amp	Oct.12, 2012	1007D/C0035
E4419B Power meter	Oct.12, 2012	GB41293847
E9300B Power sensor	Jan.28, 2012	MY41495533
HP-8753ES Network Analyzer	Apr.27, 2012	US39173712
HP85070C Dielectric Probe Kit	Not Required	US99360087
Digital thermo-hygrometer	Feb.09, 2012	1374
Digital thermo-hygrometer	Feb.09, 2012	1375
E4419B Power meter	Feb.25, 2012	MY45103291
E9300B Power sensor	Mar.04, 2012	MY41496209
E9300B Power sensor	Mar.04, 2012	MY41496085
DASY4 S/W (ver 4.7)	Not Required	-
8560E Spectrum Analyzer	Sep.16, 2012	3635A02452
778D Dual Directional Coupler	May.20, 2012	18862
777D Dual Directional Coupler	Feb.23, 2012	07523
Base Station Simulator	Feb.09, 2012	GB43460148
Spectrum Analyzer	Mar.08, 2012	MY46187454
11636B	Jul.05, 2012	51942
Communication test set	Dec.23,2011	GB42230535

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by Samsung Lab. before each test. (see § 7.2) The brain simulating material is calibrated by Samsung using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. (see § 7.1)

- End of page -

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	11 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure.

STEP 1

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

STEP 2

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm x 20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

STEP 3

Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

STEP 4

The SAR value at the same location as in step 1 was again measured.

(If the value changed by more than 5%, the evaluation is repeated.)

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	12 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

5. DESCRIPTION OF TEST POSITION

5.1 SAM Phantom Shape

Figure 5.1 shows the front, back and side views of SAM. The point “M” is the reference point for the center of mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.2.



Figure 5.1 Front, back and side view of SAM

The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines should be marked on the external phantom shell to facilitate handset positioning. Posterior to the N-F line, the thickness of the phantom shell with the shape of an ear is a flat surface 6 mm thick at the ERPs.

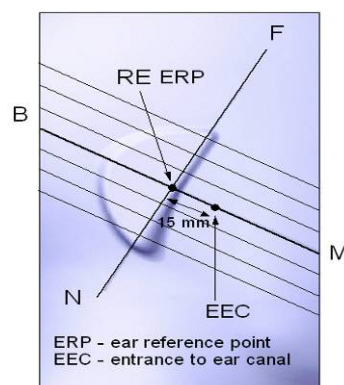


Figure 5.2 Close up side view

5.2 “cheek” Position

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 5.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its tip and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	13 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

phantoms on the ear reference point




Figure 5.4 Handset vertical and horizontal reference lines





Figure 5.3 Side view of the phantom showing relevant markings

Step 1

The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 5.5), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom

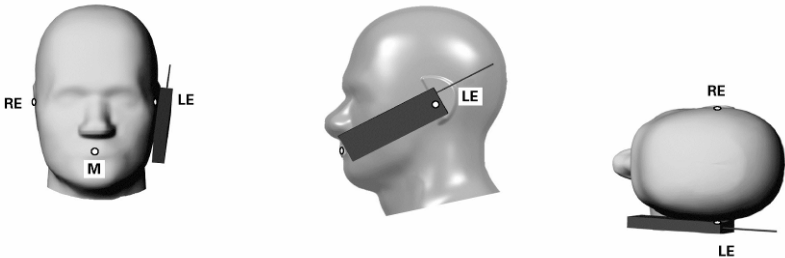


Figure 5.5 Front, Side and Top View of Cheek/Touch Position

Step 2

The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.

Step 3

While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).

Step 4

Rotate the handset around the vertical centerline until the phone (horizontal line) was

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	14 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

symmetrical was respect to the line NF.

Step 5

While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 5.2.

5.3 “tilted” Position

With the test device aligned in the “cheek” position :

Step 1

Repeat steps 1 to 5 of 5.2 to place the device in the “Cheek/Touch Position”

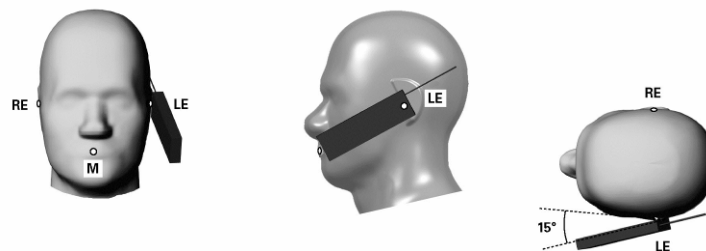


Figure 5.6 Front, side and Top View of Ear/Tilt 15° Position

Step 2

While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.

Step 3

The phone was then rotated around the horizontal line by 15 degree.

Step 4

While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	15 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

5.4 Body Configurations for Single TX SAR considerations

5.4.1 SAR Test Configurations

Mode	Back	Front	Left	Right	Top	Bottom
GPRS850	Yes	Yes	Yes	No	No	Yes
GPRS1900	Yes	Yes	Yes	No	No	Yes
WIFI	Yes	Yes	No	Yes	No	Yes

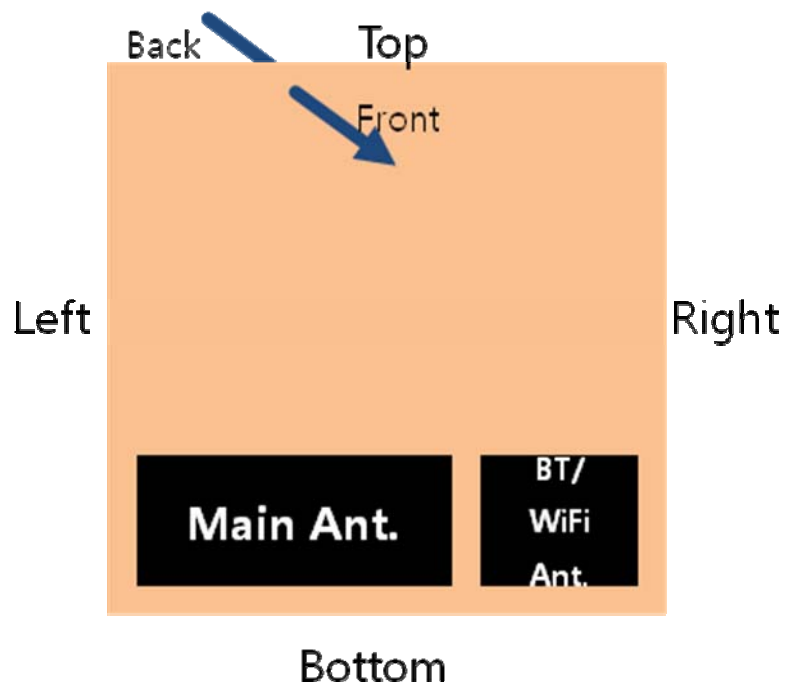


Figure 5.7 Identification of Sides for SAR Testing

Note : Per Oct 2010 TCB FCC Workshop, the edges with antennas within 2.5 cm are required to be evaluated for SAR. See Figure 5.8 distances of the actual device.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	16 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

5.4.2 Transmit Antenna Separation Distances

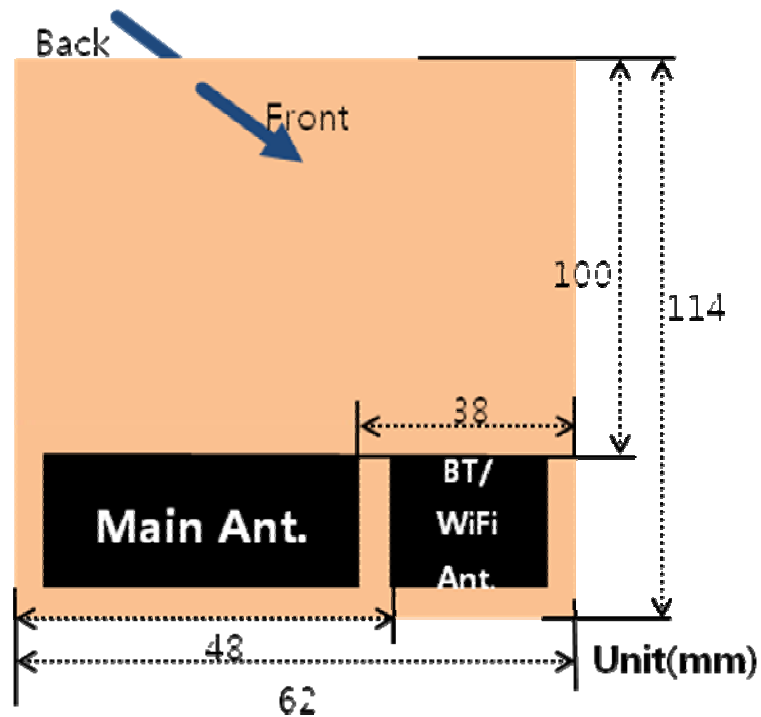


Figure 5.8 Antenna Locations, as viewed from back of device

- End of page -

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	17 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

6. MEASUREMENT UNCERTAINTY

Table 6.1 Uncertainty Budget at 835MHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	c _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	1.73	rectangular	1.732	1	1.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.12	normal	1.000	1	1.12	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	5.62	normal	1.000	1	5.62	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	0.38	normal	1.000	0.64	0.24	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	5.44	normal	1.000	0.6	3.26	∞
Combined Standard Uncertainty		Normal	-	-	11.84	172776
Extended Standard Uncertainty(K=2.00)					23.69	172776

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	18 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 6.2 Uncertainty Budget at 1900MHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.50	normal	1.000	1	1.50	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	6.02	normal	1.000	1	6.02	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	1.84	normal	1.000	0.64	1.18	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.54	normal	1.000	0.6	2.73	∞
Combined Standard Uncertainty		Normal	-	-	12.00	60176
Extended Standard Uncertainty(K=2.00)					24.00	60176

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	19 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 6.3 Uncertainty Budget at 2450MHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i	Standard uncertainty (±%)	v_i^2 or v_{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.00	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	4.22	normal	1.000	1	4.22	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	2.32	Normal	1.0001	1	2.32	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	2.04	normal	1.000	0.64	1.30	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.27	normal	1.000	0.6	2.56	∞
Combined Standard Uncertainty		Normal	-	-	11.32	728
Extended Standard Uncertainty(K=2.00)					22.64	728

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	20 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

7. SYSTEM VERIFICATION

7.1 Tissue Verification

Table 7.1 MEASURED TISSUE PARAMETERS

	835MHz Head		835MHz Body		1900MHz Head		1900MHz Body		2450MHz Head		2450MHz Body	
	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Date	Dec.14,2011		Dec.16,2011		Dec.13,2011		Dec.15,2011		Dec.15,2011		Dec.15,2011	
Liquid Temperature(°C)	222		224		219		223		221		221	
Dielectric Constant: ϵ'	415	416	552	537	40	405	53.3	52.1	392	392	52.7	522
Conductivity:	0.9	0.91	0.97	0.97	1.4	1.44	1.52	1.49	1.8	1.81	1.95	1.99
Tissue Batch Number	835DF1001W		835B1001T		1900F1002D		1900B2002J		2450MF1001F		2450B1001V	

The measured value must be within $\pm 5\%$ of the target value.

7.2 Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specification at 835MHz, 1900MHz and 2450MHz by using the system validation kit(s). (see Appendix D, Graphic Plot Attached)

Table 7.2 System Validation Results

System Validation Kit	Tissue	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Normalized SAR _{1g} (mW/g)	Deviation (%)	Date	Liquid Temperature(°C)	Ambient Temperature(°C)	Input Power (mW)
4d050	835MHz Brain	9.61	0.934	9.34	-0.028	Dec. 14, 2011	22.2	22.4	100
4d050	835MHz Body	10.0	0.966	9.66	-3.400	Dec. 16, 2011	22.4	22.6	100
5d082	1900MHz Brain	41.4	4.17	41.7	0.725	Dec. 13, 2011	21.9	22.3	100
5d082	1900MHz Body	40.7	4.11	41.1	0.983	Dec. 15, 2011	22.3	22.5	100
807	2450MHz Brain	54.4	5.68	56.8	4.412	Dec. 15, 2011	22.1	22.5	100
807	2450MHz Body	51.1	5.29	52.9	3.523	Dec. 15, 2011	22.1	22.6	100

*Validation was measured with input power 100 mW and normalized to 1W.

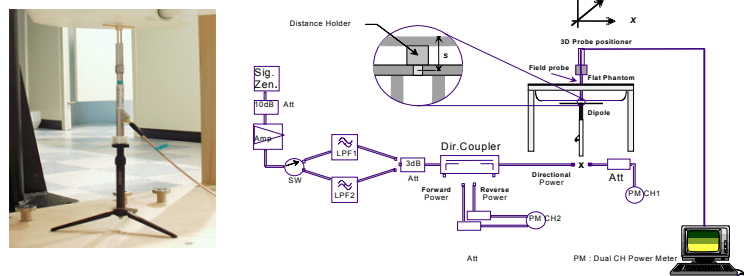


Figure 7.1 Dipole Validation Test Setup

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	21 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8. SAR MEASUREMENT RESULTS

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode using base station simulator. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes) should be tabulated in the test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified.

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated. And all Tx(1~4Tx) conducted power were also investigated for Body-Worn SAR Measurement

Table 8.1 GPRS Power Table for GT-SS7500

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850 [dBm]	128	32.59	32.57	32.51	30.04	28.02
	190	32.59	32.54	32.51	30.07	28.14
	251	32.56	32.52	32.47	30.15	28.13
1900 [dBm]	512	29.64	29.76	29.68	27.12	25.2
	661	29.59	29.65	29.63	27.02	25.06
	810	29.87	29.95	29.91	27.45	25.46

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	22 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 8.2 Calculated Frame-Averaged Output Power Table for GT-SS7500

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850 [dBm]	128	23.56	23.54	26.49	25.78	25.01
	190	23.56	23.51	26.49	25.81	25.13
	251	23.53	23.49	26.45	25.89	25.12
1900 [dBm]	512	20.61	20.73	23.66	22.86	22.19
	661	20.56	20.62	23.61	22.76	22.05
	810	20.84	20.92	23.89	23.19	22.45

Note:

Both burst-averaged and calculated frame-averaged powers are included. The bolded GPRS modes were selected according to the highest frame-averaged output power table per KDB Publication 941225 D03.

The GSM conducted powers are reported and measured by base station simulator E5515C.

GPRS (GMSK) output powers were measured with CS1

GSM Class : B

GPRS Multislot Class : 12 (max 4 Tx Uplink slots)

DTM Multislot Class : N/A

EDGE Multislot class : EDGE Rx Only

*The calculated frame averaged output powers are derived from GPRS power table with time averaging. To average output power, subtract $10 \cdot \log(\text{Num of Tx slot})$ from GPRS power.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	23 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 8.3 802.11b,g Conducted Output Power

Mode	Channel Frequency (MHz)	Channel	Data rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
DSSS (802.11b)	2 412	Low	1	20.65	17.67	<u>19.90</u>
			2		17.66	19.89
			5.5		17.79	19.88
			11		17.63	19.84
	2 437	Middle	1		17.93	<u>20.04</u>
			2		17.91	20.01
			5.5		18.08	19.99
			11		17.92	20.02
	2 462	High	1		18.26	<u>20.37</u>
			2		18.25	20.29
			5.5		18.45	20.29
			11		18.28	20.36
OFDM (802.11g)	2 412	Low	6	20.65	10.71	<u>19.85</u>
			9		10.66	19.31
			12		10.64	19.84
			18		10.66	19.57
			24		9.38	19.82
			36		9.25	19.78
			48		8.75	19.41
			54		8.68	19.35
	2 437	Middle	6		11.62	<u>20.52</u>
			9		11.54	20.38
			12		11.55	20.34
			18		11.55	20.10
			24		9.83	20.30
			36		9.73	20.11
			48		9.64	20.13
			54		9.60	20.46
	2 462	High	6		12.56	<u>21.13</u>
			9		12.51	21.01
			12		12.51	20.98
			18		12.53	20.78
			24		10.88	21.06
			36		10.74	21.12
			48		9.63	20.42
			54		9.58	20.36

Table 8.4 802.11n Conducted Output Power

Mode	Channel Frequency (MHz)	Channel	Data rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
OFDM (802.11n)	2 412	Low	MCS0	21.99	9.68	19.41
			MCS1		9.44	19.27
			MCS2		9.41	19.11
			MCS3		8.80	19.20
			MCS4		8.73	18.57
			MCS5		8.65	19.03
			MCS6		8.62	<u>19.93</u>
			MCS7		8.55	19.00
	2 437	Middle	MCS0		10.14	19.16
			MCS1		9.85	19.24
			MCS2		9.85	19.35
			MCS3		9.24	19.02
			MCS4		9.15	19.07
			MCS5		9.06	19.28
			MCS6		9.06	<u>20.17</u>
			MCS7		9.01	19.37
	2 462	High	MCS0		10.22	19.51
			MCS1		10.62	19.64
			MCS2		10.32	19.92
			MCS3		9.78	19.95
			MCS4		9.65	19.51
			MCS5		9.56	19.67
			MCS6		9.54	<u>20.77</u>
			MCS7		9.43	19.81

Simultaneous Transmission

Refer to the FCC OET document, 'SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas' (Feb 2008)

Table 8.5 Output Power Thresholds for Unlicensed Transmitters

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P Ref	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table				

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	25 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 8.6 Summary of SAR Evaluation Requirements for Cell phones with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> - o when stand-alone 1-g SAR is not required and antenna is > 5 cm from other antennas <u>Licensed & Unlicensed</u> - o when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas - o when SAR to antenna separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: <u>Licensed & Unlicensed</u> antenna pairs with SAR to antenna separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	When there is no simultaneous transmission – - o output < 60/f: SAR not required - o output $\geq 60/f$: stand-alone SAR required When there is simultaneous transmission – <u>Stand-alone SAR not required when</u> - o output $\leq 2.P_{Ref}$ and antenna is > 5.0 cm from other antennas - o output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas - o output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> When stand-alone SAR is required - o test SAR on highest output channel for each wireless mode and exposure condition - o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	26 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 8.7 Simultaneous Transmission Summation for Held to Ear Voice Call

Simult Tx	Configuration	GSM850 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	GSM1900 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Head SAR	Right Cheek	0.067	0.107	0.174	Head SAR	Right Cheek	0.359	0.107	0.466
	Right Tilt	0.051	0.016	0.067		Right Tilt	0.186	0.016	0.202
	Left Cheek	0.091	0.027	0.118		Left Cheek	0.494	0.027	0.521
	Left Tilt	0.057	0.019	0.076		Left Tilt	0.185	0.019	0.240

Table 8.8 Simultaneous Transmission Summation for 2G Data and WIFI(Body-Worn)

Configuration	Mode	2G SAR (W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Back	GPRS850 SAR(W/Kg)	0.378	0.072	0.450
	GPRS1900 SAR(W/Kg)	0.600	0.072	0.672

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	27 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Table 8.9 Simultaneous Transmission Summation for 2G Data and WIFI(Hotspot)

Simult Tx	Configuration	GPRS850 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	GPRS1900 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Body SAR	Back	0.378	0.072	0.450	Body SAR	Back	0.600	0.072	0.672
	Front	0.203	0.035	0.238		Front	0.560	0.035	0.595
	Left	0.276	-	0.276		Left	0.240	-	0.240
	Right	-	0.037	0.037		Right	-	0.037	0.037
	Top	-	-	-		Top	-	-	-
	Bottom	0.101	0.030	0.131		Bottom	0.493	0.030	0.523

Multiple Antenna/Transmission Information for GT-SS7500

The separation between the main antenna and the Bluetooth and WLAN antennas is 32mm.

RF Conducted Power of Bluetooth Tx is 8.05 dBm.

RF Conducted Power of WLAN is 18.45 dBm.

Conclusion

The above tables represent the worst-case simultaneous transmission scenarios possible with this device. The above numerical summed SAR was below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. Therefore, no volumetric SAR summation is required since the numerical sums are below the limit

Based on the output power, antenna separation distance, and Body SAR, a stand-alone BT SAR test is not required. The summation of BT SAR and Licensed Transmitter SAR is $0.600 + 0 = 0.600$, which is less than 1.6 W/Kg, therefore, a simultaneous SAR evaluation is not required.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	28 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8.1 GSM850 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End						
836.6	190	GSM850	32.56	32.53	Right	Cheek/Touch	Intenna	Standard	0.137	0.067
836.6	190	GSM850	32.54	32.58	Right	Ear/Tilt 15°	Intenna	Standard	-0.009	0.051
836.6	190	GSM850	32.59	32.53	Left	Cheek/Touch	Intenna	Standard	0.150	0.091
836.6	190	GSM850	32.61	32.57	Left	Ear/Tilt 15°	Intenna	Standard	0.106	0.057
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. Tissue parameters and temperatures are listed on the SAR plot.
3. Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
4. Battery is fully charged for all readings.
5. Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
6. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	29 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8.2 GSM850 Body SAR Results

Frequency		Mode	Conducted		Separation Distance	Test Position	Antenna Type	Battery	Tx GPRS Slots	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
836.6	190	GPRS850	32.50	32.53	1.0 cm	Back	Intenna	Standard	2	0.080	0.378
836.6	190	GPRS850	30.04	30.01	1.0 cm	Back	Intenna	Standard	3	0.013	0.292
836.6	190	GPRS850	28.12	28.16	1.0 cm	Back	Intenna	Standard	4	-0.110	0.241
836.6	190	GPRS850	32.55	32.51	1.0 cm	Front	Intenna	Standard	2	-0.199	0.203
836.6	190	GPRS850	32.58	32.57	1.0 cm	Left	Intenna	Standard	2	-0.168	0.276
836.6	190	GPRS850	32.54	32.52	1.0 cm	Bottom	Intenna	Standard	2	-0.077	0.101
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM850 mode. Hence, the GSM850 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'Right' and 'Top' were not tested because antenna distance was $>2.5\text{cm}$.
- Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode, it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance.
- During SAR Testing for the Wireless Router conditions per KDB 941225 D06, the actual Portable Hotspot operation (with actual simultaneous transmission with WIFI) was not activated.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	30 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8.3 GSM1900 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End						
1880	661	GSM1900	29.52	29.55	Right	Cheek/Touch	Intenna	Standard	0.175	0.359
1880	661	GSM1900	29.54	29.58	Right	Ear/Tilt 15°	Intenna	Standard	0.170	0.186
1880	661	GSM1900	29.56	29.52	Left	Cheek/Touch	Intenna	Standard	0.098	0.494
1880	661	GSM1900	29.58	29.57	Left	Ear/Tilt 15°	Intenna	Standard	-0.007	0.185
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. Tissue parameters and temperatures are listed on the SAR plot.
3. Liquid tissue depth is 15.2 ± 0.2cm
4. Battery is fully charged for all readings.
5. Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
6. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	31 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8.4 GSM1900 Body SAR Results

Frequency		Mode	Conducted		Separation Distance	Test Position	Antenna Type	Battery	Tx GPRS Slots	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
1880	661	GPRS1900	23.63	23.62	1.0 cm	Back	Intenna	Standard	2	-0.106	0.600
1880	661	GPRS1900	22.75	22.79	1.0 cm	Back	Intenna	Standard	3	-0.066	0.531
1880	661	GPRS1900	22.03	22.01	1.0 cm	Back	Intenna	Standard	4	0.051	0.455
1880	661	GPRS1900	23.62	23.68	1.0 cm	Front	Intenna	Standard	2	-0.008	0.560
1880	661	GPRS1900	23.65	23.61	1.0 cm	Left	Intenna	Standard	2	-0.069	0.240
1880	661	GPRS1900	23.63	23.66	1.0 cm	Bottom	Intenna	Standard	2	0.088	0.493
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM1900 mode. Hence, the GSM1900 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'Right' and 'Top' were not tested because antenna distance was $>2.5\text{cm}$.
- Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode, it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance.
- During SAR Testing for the Wireless Router conditions per KDB 941225 D06, the actual Portable Hotspot operation (with actual simultaneous transmission with WIFI) was not activated.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	32 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8.5 WLAN Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Data Rate (Mbps)	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
2462	11	WLAN	18.25	18.22	Right	Cheek/Touch	Intenna	Standard	1	0.137	0.107
2462	11	WLAN	18.23	18.27	Right	Ear/Tilt 15°	Intenna	Standard	1	-0.120	0.016
2462	11	WLAN	18.21	18.23	Left	Cheek/Touch	Intenna	Standard	1	0.022	0.027
2462	11	WLAN	18.27	18.29	Left	Ear/Tilt 15°	Intenna	Standard	1	0.0147	0.019
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Test Configuration ☒ Manu. Test Codes ☐ Base Station Simulator
- Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode..
- WLAN Transmission was verified using a spectrum analyzer.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	33 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

8.6 WLAN Body SAR Results

Frequency		Mode	Conducted		Separation Distance	Test Position	Antenna Type	Battery	Data Rate (Mbps)	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
2462	11	WLAN	18.23	18.24	1.0 cm	Back	Intenna	Standard	1	0.075	0.072
2462	11	WLAN	18.24	18.28	1.0 cm	Front	Intenna	Standard	1	-0.188	0.035
2462	11	WLAN	18.28	18.23	1.0 cm	Right	Intenna	Standard	1	-0.052	0.037
2462	11	WLAN	18.23	18.29	1.0 cm	Bottom	Intenna	Standard	1	-0.073	0.030
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Test Configuration ☒ Manu. Test Codes ☐ Base Station Simulator
- Justification for reduced test configurations for WIFI channels per KDB 941225 D06 : Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'Left' and 'Top' were not tested because antenna distance was $>2.5\text{cm}$.
- Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode..
- During SAR Testing for the Wireless Router conditions per KDB 248227 D06, the actual Portable Hotspot operation (with actual simultaneous transmission with WIFI) was not activated.
- WLAN Transmission was verified using a spectrum analyzer.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	34 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

9. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

The highest reported SAR values are as follows:

GSM850: Head: 0.091W/Kg : Body-worn: 0.378W/Kg : Hotspot : 0.378W/Kg

GSM1900: Head: 0.494W/Kg : Body-worn: 0.600W/Kg : Hotspot : 0.600W/Kg

WLAN: Head: 0.107W/Kg : Body-worn: 0.072W/Kg “ Hotspot : 0.072W/Kg

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	35 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

10. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	36 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011

Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.

- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Measurement Procedures for 3G Devices KDB 941225
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB 248227
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB 648474
- [29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB 450824
- [30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB 616217
- [31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB 865664
- [32] FCC Mobile Portable RF Exposure Procedure, KDB 447498
- [33] FCC SAR Procedures for Dongle Transmitters, KDB 447498
- [34] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225
- [36] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.
- [37] FCC Hot Spot SAR v01, KDB Publication 941225 D06.

FCC ID: A3LGTS7500	Report Number: FI-317-S1		Page :	37 of 37
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date :	Dec.21, 2011