



**FCC OET BULLETIN 65 SUPPLEMENT C 01-01  
IEEE Std 1528-2003 and IEEE Std 1528a-2005**

**SAR EVALUATION REPORT**

*For*  
**GSM/WCDMA Phone with WiFi/BT**

**Model: GT-S7710L  
FCC ID: A3LGTS7710L**

**Report Number: 12I14777-3A  
Issue Date: 2/6/2013**

*Prepared for*  
**Samsung Electronics Co., Ltd.  
416, Maetan 3-Dong, Yeongtong-Gu  
Suwon-City, Gyeonggi-Do 443-742, South Korea**

*Prepared by*  
**UL CCS  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	2/1/2013	Initial Issue	--
A	2/6/2013	Revision based on Reviewer's comments: <ol style="list-style-type: none"><li>1. Sec. 1: Updated Table with correct Highest Reported SAR per Frequency Range and Simultaneous Transmission.</li><li>2. Sec. 13.1 and 13.2: Updated Table.</li><li>3. Sec. 14.1: Updated Estimated SAR based on maximum tune up limit for Bluetooth.</li><li>4. Sec. 14.3: Updated Bluetooth SAR value from Sec. 14.1.</li></ol>	Bobby Bayani

**Table of Contents**

**1. Attestation of Test Results..... 6**

**2. Test Methodology ..... 7**

**3. Facilities and Accreditation ..... 7**

**4. Calibration and Uncertainty ..... 8**

    4.1. *Measuring Instrument Calibration ..... 8*

    4.2. *Measurement Uncertainty..... 9*

**5. Measurement System Description and Setup..... 10**

**6. SAR Measurement Procedure..... 11**

    6.1. *Normal SAR Measurement Procedure..... 11*

    6.2. *Volume Scan Procedures ..... 13*

**7. Device Under Test..... 14**

    7.1. *General Information ..... 14*

    7.2. *Band and Air Interfaces ..... 14*

    7.3. *Simultaneous Transmission Condition ..... 15*

**8. RF Exposure Conditions ..... 16**

    8.1. *Head Exposure Conditions ..... 16*

    8.2. *Body-worn Accessory Exposure Conditions..... 16*

    8.3. *Hotspot Mode Exposure Conditions..... 16*

**9. RF Output Power Measurement..... 17**

    9.1. *GSM850 ..... 17*

    9.2. *GSM1900 ..... 18*

    9.3. *W-CDMA Band V..... 19*

    9.4. *W-CDMA Band II ..... 23*

    9.5. *WiFi (2.4 GHz Band)..... 27*

    9.6. *Bluetooth ..... 28*

**10. Tissue Dielectric Properties ..... 29**

    10.1. *Composition of Ingredients for the Tissue Material Used in the SAR Tests ..... 30*

    10.2. *Tissue Dielectric Parameter Check Results..... 31*

**11. System Performance Check ..... 33**

    11.1. *System Performance Check Measurement Conditions..... 33*

    11.2. *Reference SAR Values for System Performance Check..... 33*

11.3. System Performance Check Results ..... 34

**12. SAR Test Results ..... 35**

12.1. GSM850..... 35

12.1.1. Head Exposure Conditions..... 35

12.1.2. Body-worn Accessory Exposure Conditions ..... 35

12.1.3. Hotspot Mode Exposure Conditions ..... 36

12.2. GSM1900..... 37

12.2.1. Head Exposure Conditions..... 37

12.2.2. Body-worn Accessory Exposure Conditions ..... 37

12.2.3. Hotspot Mode Exposure Conditions ..... 38

12.3. W-CDMA Band V ..... 39

12.3.1. Head Exposure Conditions..... 39

12.3.2. Body-worn Accessory & Hotspot Mode Exposure Conditions..... 39

12.4. W-CDMA Band II..... 40

12.4.1. Head Exposure Conditions..... 40

12.4.2. Body-worn Accessory & Hotspot Mode Exposure Conditions..... 40

12.5. Wi-Fi (2.4 GHz Band) ..... 41

12.5.1. Head Exposure Conditions..... 41

12.5.2. Body-worn Accessory Exposure Conditions ..... 41

12.5.3. Hotspot Mode Exposure Conditions ..... 42

**13. SAR Measurement Variability..... 43**

13.1. The Highest Measured SAR Configuration in Each Frequency Band ..... 43

13.2. Repeated Measurement Results ..... 43

**14. Simultaneous Transmission SAR Analysis..... 44**

14.1. Estimated SAR for Bluetooth..... 45

14.1.1. Standalone SAR Test Exclusion..... 45

14.1.2. Estimated SAR..... 45

14.2. Head Exposure Conditions..... 46

14.3. Body-worn Accessory Exposure Conditions ..... 47

14.4. Hotspot Mode Exposure Conditions ..... 48

**15. Appendixes..... 49**

15.1. System Performance Check Plots ..... 49

15.2. SAR Test Plots for GSM850..... 49


15.3. SAR Test Plots for GSM1900..... 49

15.4. SAR Test Plots for W-CDMA Band V ..... 49

---

15.5.	SAR Test Plots for W-CDMA Band II.....	49
15.6.	SAR Test Plots for WiFi 2.4 GHz Band.....	49
15.7.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3772.....	49
15.8.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3871.....	49
15.9.	Calibration Certificate for D835V2 - SN 4d002.....	49
15.10.	Calibration Certificate for D1900V2 - SN 5d043.....	49
15.11.	Calibration Certificate for D2450V2 - SN 748.....	49
<b>16.</b>	<b>External Photos.....</b>	<b>50</b>
<b>17.</b>	<b>Antenna Dimensions &amp; Separation Distances.....</b>	<b>51</b>
<b>18.</b>	<b>Setup Photos.....</b>	<b>52</b>

# 1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.		
DUT description	GSM/EDGE & WCDMA 850/1900MHz Phone with BT v4.0(LE), 802.11b/g/n and Hotspot		
Model	GT-S7710L		
Test device is	An identical prototype		
Device category	Portable		
Exposure category	General Population/Uncontrolled Exposure		
Date tested	1/17/2013 – 1/24/2013		
RF Exposure Rule	Freq. Range	Highest Reported SAR	Limit
22	824-849 MHz	Head: 0.206 W/kg; sum-SAR = 0.380 W/kg Body-worn: 0.500 W/kg; sum-SAR = 0.525 W/kg Hotspot: 0.781 W/kg; sum-SAR = 0.806 W/kg	1.6 W/kg
24	1850-1910 MHz	Head: 0.862 W/kg; sum-SAR = 1.036 W/kg Body-worn: 1.005 W/kg; sum-SAR = 1.030 W/kg Hotspot: 1.005 W/kg; sum-SAR = 1.030 W/kg	
15.247 (WiFi)	2412-2462 MHz	Head: 0.174 W/kg Body-worn: 0.025 W/kg Hotspot: 0.025 W/kg	
Simultaneous transmission		= 1.036 W/kg (highest SAR across exposure conditions)	
Applicable Standards			Test Results
FCC Published RF exposure KDB procedures, TCB workshop updates and OET Bulletin 65 Supplement C, IEEE Std 1528-2003 and IEEE Std 1528a-2005			Pass
<p>UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>			
Approved & Released For UL CCS By:		Prepared By:	
			
Sunny Shih Engineering Leader UL CCS		Bobby Bayani SAR Engineer UL CCS	

## 2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE STD 1528-2003, IEEE Std 1528a-2005 and the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance v05
- 648474 D04 SAR Handsets Multi Xmitter and Ant v01
- 941225 D01 SAR test for 3G devices v02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D06 Hot Spot SAR v01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01
- 865664 D02 SAR Reporting v01
- 690783 D01 SAR Listings on Grants v01r02

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. Calibration and Uncertainty

### 4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
S-Parameter Network Analyzer	Agilent	8753ES	MY40001647	6	27	2013
Dielectronic Probe kit	SPEAG	SM DAK 040 CA	1082	9	18	2013
ENA Series Network Analyzer	Agilent	E5071B	MY42100131	2	11	2013
Dielectronic Probe kit	HP	85070E	594	N/A		
Synthesized Signal Generator	HP	8665B	3438A00633	2	22	2013
Power Meter	HP	438A	3513U04320	9	17	2013
Power Sensor A	HP	8481A	2237A31744	8	17	2013
Power Sensor B	HP	8481A	3318A95392	8	17	2013
Amplifier	MITEQ	4D00400600-50-30P	1622052	N/A		
Directional coupler	Werlatone	C8060-102	2149	N/A		
Synthesized Signal Generator	HP	8665B	3744A01084	5	3	2013
Power Meter	HP	438A	2822A05684	10	7	2013
Power Sensor A	HP	8481A	2702A66876	8	1	2013
Power Sensor B	HP	8482A	2349A08568	4	14	2013
Amplifier	MITEQ	4D00400600-50-30P	1620606	N/A		
Directional coupler	Werlatone	C8060-102	2141	N/A		
Base Station Simulator	R & S	CMU200	106301	6	6	2013
Base Station Simulator	R & S	CMU200	118339	5	20	2013
Thermometer	TRACEABLE	4242	122529162	9	19	2013
E-Field Probe	SPEAG	EX3DV4	3772	2	16	2013
E-Field Probe	SPEAG	EX3DV4	3871	8	20	2013
Data Acquisition Electronics	SPEAG	DAE4	1258	2	13	2013
Data Acquisition Electronics	SPEAG	DAE4	1343	8	20	2013
System Validation Dipole	SPEAG	D835V2	4d002	10	24	2013
System Validation Dipole	SPEAG	D1900V2	5d043	11	6	2013
System Validation Dipole	SPEAG	D2450V2	748	2	7	2013
Power Meter	Agilent	N1912A	MY52310061	7	5	2013
Power Sensor Ch A	Agilent	N1921A	MY52260009	7	5	2013
Power Sensor Ch B	Agilent	N1921A	MY52270022	7	21	2013

## 4.2. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram (Head)


Component	Error, %	Distribution	Divisor	Sensitivity	U (Xi), %
<b>Measurement System</b>					
Probe Calibration (k=1)	6.00	Normal	1	1	6.00
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	1.00	Rectangular	1.732	1	0.58
<b>Test Sample Related</b>					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
<b>Phantom and Tissue Parameters</b>					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.64	1.85
Liquid Conductivity - measurement	-4.85	Normal	1	0.64	-3.10
Liquid Permittivity - deviation from target	5.00	Rectangular	1.732	0.6	1.73
Liquid Permittivity - measurement uncertainty	-4.94	Normal	1	0.6	-2.96
Combined Standard Uncertainty Uc(y) =					10.64
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				21.29 %	
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				1.68 dB	

Measurement uncertainty for 30 MHz to 6 GHz averaged over 1 gram (Body)

Component	Error, ±%	Prob Dist	Divisor	Sensitivity	U (Xi), %
<b>Measurement System</b>					
Probe Calibration (k=1)	6.00	Normal	1	1	6.00
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
Modulation Response	2.40	Rectangular	1.732	1	1.39
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner	0.80	Rectangular	1.732	1	0.46
Probe Positioning	6.70	Rectangular	1.732	1	3.87
Post-processing	4.00	Rectangular	1.732	1	2.31
<b>Test Sample Related</b>					
Device Holder	3.60	Normal	1	1	3.60
Test Sample Positioning	3.00	Normal	1	1	3.00
Power Scaling	1.00	Rectangular	1.732	1	0.58
Power Drift	5.00	Rectangular	1.732	1	2.89
<b>Phantom and Setup</b>					
Phantom Uncertainty	7.90	Rectangular	1.732	1	4.56
SAR Correction	1.90	Rectangular	1.732	1	1.10
Liquid Conductivity - measurement	4.20	Rectangular	1.732	0.78	1.89
Liquid Permittivity - measurement	4.23	Rectangular	1.732	0.26	0.63
Liquid Conductivity - temperature uncertainty	5.22	Rectangular	1.732	0.78	2.35
Liquid Permittivity - temperature uncertainty	0.84	Rectangular	1.732	0.23	0.11
Combined Standard Uncertainty Uc(y) =					11.56
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				23.12 %	
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				1.81 dB	

## 5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

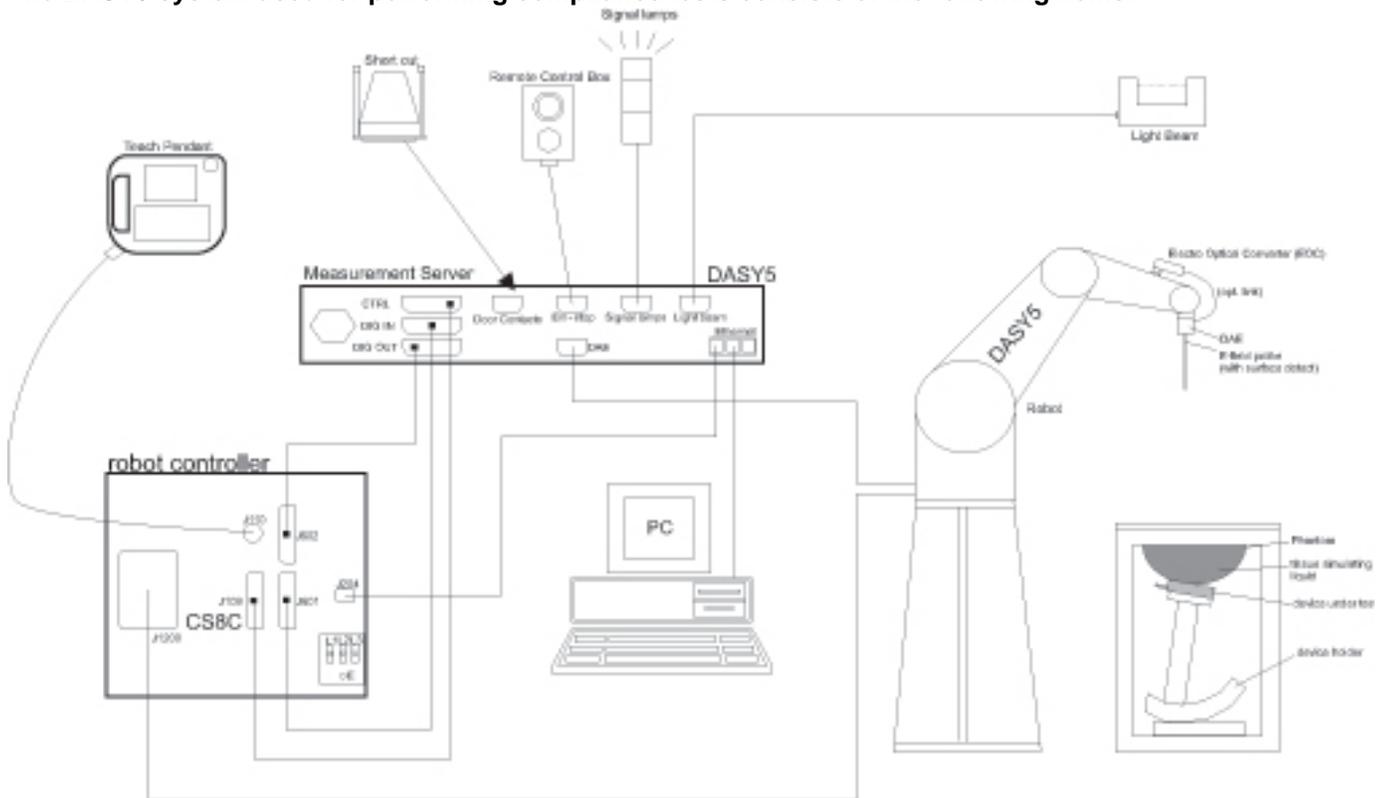

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 6. SAR Measurement Procedure

### 6.1. Normal SAR Measurement Procedure

#### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

---

## 6.2. Volume Scan Procedures

### Step 1: Repeat Step 1-4 in Section 6.1

### Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

### Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

## 7. Device Under Test

### 7.1. General Information

Model GT-S7710L GSM/EDGE & WCDMA 850/1900MHz Phone with BT v4.0(LE), 802.11b/g/n and Hotspot	
Operating Configuration(s)	Held to head, Body-worn (Voice call)
RF Exposure Condition(s)	Head, Body-worn Accessory, Hotspot (wireless router) - WiFi Hotspot mode permits the device to share its cellular data connection with other 2.4 GHz WiFi-enabled devices (channels 1 - 11).
Device dimension (L x W)	13.0 cm x 6.7 cm
Accessory	Headset

### 7.2. Band and Air Interfaces

Wireless Mode and Frequency Bands	GSM850/GSM1900, W-CDMA Band V/W-CDMA Band II, WiFi 802.11b/g/n, Bluetooth 2.4 GHz
Modulation	GSM (GMSK) / GPRS (GMSK) / EGPRS (8PSK), W-CDMA <ul style="list-style-type: none"> <li>- UMTS Rel. 99</li> <li>- HSDPA (Rel. 5, CAT 10)</li> <li>- HSUPA (Rel. 6, CAT 6)</li> </ul> WiFi 802.11b/g/n HT20, Bluetooth Ver. 4.0 LE
Duty Cycle	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%; 3 Slots: 37.5%; 4 Slots: 50% W-CDMA: 100% WiFi 802.11b/g/n: 100%
GPRS Multi-Slot Class	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input checked="" type="checkbox"/> Class 12 - Four Up
Mobile Phone Capability	<input type="checkbox"/> Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. <input checked="" type="checkbox"/> Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. <input type="checkbox"/> Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM (Dual Tx Mode) Class	Not Supported

### 7.3. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	GSM850/1900 MHz Voice + WiFi 2.4 GHz W-CDMA Band V/W-CDMA Band II + WiFi 2.4 GHz
Body-worn Accessory (Voice mode only)	GSM850/1900 MHz Voice + WiFi 2.4 GHz GSM850/1900 MHz Voice + BT W-CDMA Band V/W-CDMA Band II + WiFi 2.4 GHz W-CDMA Band V/W-CDMA Band II + BT
Hotspot (Data)	GPRS850/1900 MHz Data + WiFi 2.4 GHz W-CDMA Band V/Band II + WiFi 2.4 GHz
Note: WiFi 2.4 GHz and Bluetooth cannot transmit simultaneously.	

## 8. RF Exposure Conditions

Refer to Section 17 “Antenna Dimensions and Separation Distances” for the specific details of the antenna-to-antenna, antenna-to-edge(s) distances, and device orientation description.

### 8.1. Head Exposure Conditions

#### For WWAN and WiFi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

### 8.2. Body-worn Accessory Exposure Conditions

#### For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	6.43 mm	Yes	
Front	2.55 mm	Yes	

#### For WiFi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	9.23 mm	Yes	
Front	2.74 mm	Yes	

### 8.3. Hotspot Mode Exposure Conditions

#### For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	6.43 mm	Yes	
Front	2.55 mm	Yes	
Edge 1	110 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 2	40 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 3	4 mm	Yes	
Edge 4	5 mm	Yes	

#### For WiFi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	9.23 mm	Yes	
Front	2.74 mm	Yes	
Edge 1	9.9 mm	Yes	
Edge 2	3.5 mm	Yes	
Edge 3	105 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 4	57 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01

## 9. RF Output Power Measurement

### 9.1. GSM850

	Min	Max
<b>Tune-up Tolerance (dB):</b>	-1.5	+0.5

Output Power Tolerance	Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8PSK (dBm)			
	1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
Max	33.0	33.0	32.0	30.5	28.5	27.0	26.0	25.0	24.0
<b>Target</b>	<b>32.5</b>	<b>32.5</b>	<b>31.5</b>	<b>30.0</b>	<b>28.0</b>	<b>26.5</b>	<b>25.5</b>	<b>24.5</b>	<b>23.5</b>
Min	31.0	31.0	30.0	28.5	26.5	25.0	24.0	23.0	22.0

#### GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	32.7
	190	836.6	32.7
	251	848.8	32.7

#### GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	32.7	23.7	31.7	25.7	<b>30.2</b>	<b>25.9</b>	28.2	25.2
	190	836.6	32.8	23.8	31.8	25.8	<b>30.3</b>	<b>26.0</b>	28.3	25.3
	251	848.8	32.7	23.7	31.8	25.8	<b>30.3</b>	<b>26.0</b>	28.3	25.3

#### EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Power (dBm)				Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	27.0	18.0	26.0	20.0	24.9	20.6	23.5	20.5
	190	836.6	27.0	18.0	26.0	20.0	24.7	20.4	23.4	20.4
	251	848.8	26.7	17.7	25.8	19.8	24.5	20.2	22.8	19.8

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) Mode because its output power is less than that of GPRS Mode

## 9.2. GSM1900

	Min	Max
<b>Tune-up Tolerance (dB):</b>	-1.5	+0.5

Output Power Tolerance	Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8PSK (dBm)			
	1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
Max	30.0	30.0	29.0	27.5	26.0	26.5	25.5	24.5	23.5
<b>Target</b>	<b>29.5</b>	<b>29.5</b>	<b>28.5</b>	<b>27.0</b>	<b>25.5</b>	<b>26.0</b>	<b>25.0</b>	<b>24.0</b>	<b>23.0</b>
Min	28.0	28.0	27.0	25.5	24.0	24.5	23.5	22.5	21.5

### GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	29.5
	661	1880.0	29.3
	810	1909.8	29.4

### GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	29.5	20.5	28.5	22.5	<b>27.1</b>	<b>22.8</b>	25.2	22.2
	661	1880.0	29.3	20.3	28.4	22.4	<b>27.0</b>	<b>22.7</b>	25.0	22.0
	810	1909.8	29.4	20.4	28.5	22.5	<b>27.2</b>	<b>22.9</b>	25.2	22.2

### EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	25.0	16.0	23.5	17.5	23.2	18.9	21.0	18.0
	661	1880.0	26.5	17.5	25.0	19.0	23.6	19.3	22.0	19.0
	810	1909.8	26.4	17.4	24.7	18.7	23.1	18.8	21.5	18.5

### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) Mode because its output power is less than that of GPRS Mode

### 9.3. W-CDMA Band V

	Min	Max
<b>Tune-up Tolerance (dB):</b>	-1.5	+0.5

Output Power Tolerance	Rel. 99 (dBm)	HSDPA Rel. 5 (dBm)	HSUPA Rel. 6 (dBm)
Max	23.0	23.0	21.0
<b>Target</b>	<b>22.5</b>	<b>22.5</b>	<b>20.5</b>
Min	21.0	21.0	19.0

#### Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

#### Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.7
		4183	836.6	23.0
		4233	846.6	22.8

**HSDPA**

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	HSDPA	HSDPA	HSDPA	HSDPA
Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode			
	Test Mode 1			
	Rel99 RMC			
	12.2kbps RMC			
	HSDPA FRC			
	H-Set1			
	Power Control Algorithm			
	Algorithm 2			
	$\beta_c$	2/15	12/15	15/15
$\beta_d$	15/15	15/15	8/15	4/15
Bd (SF)				
64				
$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
$\beta_{hs}$	4/15	24/15	30/15	30/15
CM (dB)	0	1	1.5	1.5
HSDPA Specific Settings	$D_{ACK}$			
	8			
	$D_{NAK}$			
	8			
	DCQI			
	8			
	Ack-Nack repetition factor			
3				
CQI Feedback (Table 5.2B.4)				
4ms				
CQI Repetition Factor (Table 5.2B.4)				
2				
$A_{hs} = \beta_{hs}/\beta_c$				
30/15				

**Results**

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	22.3
		4183	836.6	22.4
		4233	846.6	21.9
	Subtest 2	4132	826.4	22.3
		4183	836.6	22.4
		4233	846.6	21.9
	Subtest 3	4132	826.4	22.3
		4183	836.6	22.4
		4233	846.6	21.9
	Subtest 4	4132	826.4	22.1
		4183	836.6	22.3
		4233	846.6	21.9

Maximum output power levels that are possible for all subtests reported.

**Note(s):**

KDB 941225 D01 – Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is < 75% of the SAR limit.

**HSPA (HSDPA & HSUPA)**

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	15/15
	$\beta_{ec}$	209/225	12/15	30/15	2/15	24/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	15/15
	$\beta_{hs}$	22/15	12/15	30/15	4/15	30/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	134/15
CM (dB)	1.0	3.0	2.0	3.0	1.0	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
Ahs = $\beta_{hs}/\beta_c$	30/15					
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

**Results**

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	21.0
		4183	836.6	21.0
		4233	846.6	21.0
	Subtest 2	4132	826.4	20.8
		4183	836.6	20.8
		4233	846.6	20.9
	Subtest 3	4132	826.4	20.9
		4183	836.6	20.9
		4233	846.6	20.9
	Subtest 4	4132	826.4	19.9
		4183	836.6	19.9
		4233	846.6	19.9
	Subtest 5	4132	826.4	19.9
		4183	836.6	19.9
		4233	846.6	19.9

**Note(s):**

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit.

### 9.4. W-CDMA Band II

	Min	Max
<b>Tune-up Tolerance (dB):</b>	-1.5	+0.5

Output Power Tolerance	Rel. 99 (dBm)	HSDPA Rel. 5 (dBm)	HSUPA Rel. 6 (dBm)
Max	23.0	23.0	21.0
<b>Target</b>	<b>22.5</b>	<b>22.5</b>	<b>20.5</b>
Min	21.0	21.0	19.0

#### Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

#### Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA (UMTS) Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.3
		9400	1880.0	22.3
		9538	1907.6	22.4

**HSDPA**

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
CM (dB)	0	1	1.5	1.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

**Results**

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	22.3
		9400	1880.0	22.3
		9538	1907.6	22.4
	Subtest 2	9262	1852.4	22.3
		9400	1880.0	22.3
		9538	1907.6	22.4
	Subtest 3	9262	1852.4	22.3
		9400	1880.0	22.3
		9538	1907.6	22.4
	Subtest 4	9262	1852.4	22.3
		9400	1880.0	22.3
		9538	1907.6	22.4

Maximum output power levels that are possible for all subtests reported.

**Note(s):**

KDB 941225 D01 – Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is < 75% of the SAR limit.

**HSPA (HSDPA & HSUPA)**

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	15/15
	$\beta_{ec}$	209/225	12/15	30/15	2/15	24/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	15/15
	$\beta_{hs}$	22/15	12/15	30/15	4/15	30/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = $\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

**Results**

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	20.4
		9400	1880.0	20.9
		9538	1907.6	20.9
	Subtest 2	9262	1852.4	20.4
		9400	1880.0	20.0
		9538	1907.6	20.0
	Subtest 3	9262	1852.4	20.4
		9400	1880.0	20.0
		9538	1907.6	20.5
	Subtest 4	9262	1852.4	20.2
		9400	1880.0	20.0
		9538	1907.6	20.0
	Subtest 5	9262	1852.4	19.9
		9400	1880.0	19.9
		9538	1907.6	19.9

**Note(s):**

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit.

### 9.5. WiFi (2.4 GHz Band)

	Min	Max
<b>Tune-up Tolerance (dB):</b>	-1.5	+0.5

Output Power Tolerance	IEEE 802.11 (dBm)		
	b	g	n (HT20)
Max	16.5	14.5	12.5
<b>Target</b>	<b>16.0</b>	<b>14.0</b>	<b>12.0</b>
Min	14.5	12.5	10.5

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	<b>2.412</b>	1 <sup>#</sup>	√	∇
		<b>2.437</b>	6	√	∇
		<b>2.462</b>	11 <sup>#</sup>	√	∇

**Notes:**  
 √ = "default test channels"  
 ∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"  
 # = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Band (MHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Note
2.4	802.11b	1	2412	16.5	
		6	2437	16.5	
		11	2462	16.4	
	802.11g	1	2412	13.8	
		6	2437	13.8	
		11	2462	13.7	
	802.11n (HT20)	1	2412	12.5	
		6	2437	12.4	
		11	2462	12.4	

**Note(s):**  
 Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

## 9.6. Bluetooth

### Tune-up Tolerance (dB):

Min	Max
-1.5	+0.5

Output Power Tolerance	Bluetooth (dBm)
Max	9.5
<b>Target</b>	<b>9.0</b>
Min	7.5

Mode	Channel #	Freq. (MHz)	Conducted Avg Power	
			(dBm)	(mW)
V3.0 + EDR, GFSK	0	2402	7.9	6.21
	39	2441	8.1	6.52
	78	2480	7.9	6.10
V3.0 + EDR, $\pi/4$ DQPSK	0	2402	4.5	2.80
	39	2441	4.7	2.94
	78	2480	4.5	2.79
V3.0 + EDR, 8-DPSK	0	2402	4.5	2.80
	39	2441	4.7	2.94
	78	2480	4.5	2.79
V4.0 LE, GFSK	0	2402	3.2	2.07
	19	2440	3.8	2.42
	39	2480	3.9	2.44

## 10. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	$\epsilon_r$	$\sigma$ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

### 10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

### 10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/17/2013	Head 1900	e'	40.4400	Relative Permittivity ( $\epsilon_r$ ):	40.44	40.00	1.10	5
		e"	13.6400	Conductivity ( $\sigma$ ):	1.44	1.40	2.93	5
	Head 1850	e'	40.6800	Relative Permittivity ( $\epsilon_r$ ):	40.68	40.00	1.70	5
		e"	13.5300	Conductivity ( $\sigma$ ):	1.39	1.40	-0.59	5
	Head 1910	e'	40.3900	Relative Permittivity ( $\epsilon_r$ ):	40.39	40.00	0.98	5
		e"	13.6800	Conductivity ( $\sigma$ ):	1.45	1.40	3.77	5
1/17/2013	Body 1900	e'	52.5000	Relative Permittivity ( $\epsilon_r$ ):	52.50	53.30	-1.50	5
		e"	14.2200	Conductivity ( $\sigma$ ):	1.50	1.52	-1.17	5
	Body 1850	e'	52.6700	Relative Permittivity ( $\epsilon_r$ ):	52.67	53.30	-1.18	5
		e"	14.0600	Conductivity ( $\sigma$ ):	1.45	1.52	<b>-4.85</b>	5
	Body 1910	e'	52.3300	Relative Permittivity ( $\epsilon_r$ ):	52.33	53.30	-1.82	5
		e"	14.2600	Conductivity ( $\sigma$ ):	1.51	1.52	-0.37	5
1/21/2013	Head 2450	e'	40.7800	Relative Permittivity ( $\epsilon_r$ ):	40.78	39.20	4.03	5
		e"	13.0200	Conductivity ( $\sigma$ ):	1.77	1.80	-1.46	5
	Head 2410	e'	40.9400	Relative Permittivity ( $\epsilon_r$ ):	40.94	39.28	<b>4.23</b>	5
		e"	12.9300	Conductivity ( $\sigma$ ):	1.73	1.76	-1.58	5
	Head 2475	e'	40.7200	Relative Permittivity ( $\epsilon_r$ ):	40.72	39.17	3.96	5
		e"	13.1000	Conductivity ( $\sigma$ ):	1.80	1.83	-1.33	5
1/21/2013	Body 2450	e'	51.9800	Relative Permittivity ( $\epsilon_r$ ):	51.98	52.70	-1.37	5
		e"	14.3400	Conductivity ( $\sigma$ ):	1.95	1.95	0.18	5
	Body 2410	e'	52.1300	Relative Permittivity ( $\epsilon_r$ ):	52.13	52.76	-1.19	5
		e"	14.2200	Conductivity ( $\sigma$ ):	1.91	1.91	-0.10	5
	Body 2475	e'	51.9200	Relative Permittivity ( $\epsilon_r$ ):	51.92	52.67	-1.42	5
		e"	14.4700	Conductivity ( $\sigma$ ):	1.99	1.99	0.31	5
1/23/2013	Head 835	e'	40.1048	Relative Permittivity ( $\epsilon_r$ ):	40.10	41.50	-3.36	5
		e"	20.1987	Conductivity ( $\sigma$ ):	0.94	0.90	<b>4.20</b>	5
	Head 820	e'	40.2608	Relative Permittivity ( $\epsilon_r$ ):	40.26	41.60	-3.23	5
		e"	20.2559	Conductivity ( $\sigma$ ):	0.92	0.90	2.79	5
	Head 850	e'	39.8897	Relative Permittivity ( $\epsilon_r$ ):	39.89	41.50	-3.88	5
		e"	20.1644	Conductivity ( $\sigma$ ):	0.95	0.92	4.16	5
1/23/2013	Body 900	e'	53.2900	Relative Permittivity ( $\epsilon_r$ ):	53.29	55.00	-3.11	5
		e"	21.5800	Conductivity ( $\sigma$ ):	1.08	1.05	2.85	5
	Body 880	e'	53.4200	Relative Permittivity ( $\epsilon_r$ ):	53.42	55.07	-3.00	5
		e"	21.6600	Conductivity ( $\sigma$ ):	1.06	1.02	3.76	5
	Body 915	e'	53.1400	Relative Permittivity ( $\epsilon_r$ ):	53.14	55.00	-3.38	5
		e"	21.5400	Conductivity ( $\sigma$ ):	1.10	1.06	3.39	5
1/23/2013	Head 1900	e'	38.8000	Relative Permittivity ( $\epsilon_r$ ):	38.80	40.00	-3.00	5
		e"	13.3000	Conductivity ( $\sigma$ ):	1.41	1.40	0.36	5
	Head 1850	e'	39.0000	Relative Permittivity ( $\epsilon_r$ ):	39.00	40.00	-2.50	5
		e"	13.2000	Conductivity ( $\sigma$ ):	1.36	1.40	-3.01	5
	Head 1910	e'	38.7700	Relative Permittivity ( $\epsilon_r$ ):	38.77	40.00	-3.07	5
		e"	13.2900	Conductivity ( $\sigma$ ):	1.41	1.40	0.82	5

**Tissue Dielectric Parameter (continued)**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/24/2013	Body 1900	e'	50.7085	Relative Permittivity ( $\epsilon_r$ ):	50.71	53.30	-4.86	5
		e"	14.1876	Conductivity ( $\sigma$ ):	1.50	1.52	-1.39	5
	Body 1850	e'	50.8440	Relative Permittivity ( $\epsilon_r$ ):	50.84	53.30	-4.61	5
		e"	14.0918	Conductivity ( $\sigma$ ):	1.45	1.52	-4.63	5
	Body 1910	e'	50.6692	Relative Permittivity ( $\epsilon_r$ ):	50.67	53.30	<b>-4.94</b>	5
		e"	14.1823	Conductivity ( $\sigma$ ):	1.51	1.52	-0.91	5

## 11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### 11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

### 11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d002	10/24/12	835	1g	9.58	9.48
				10g	6.28	6.26
D1900V2	5d043	11/6/12	1900	1g	39.9	40.9
				10g	20.9	21.6
D2450V2	748	2/7/12	2450	1g	52.7	49.9
				10g	24.6	23.4

### 11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
1/17/2013	D1900V2	5d043	Head	1g	4.06	3.91	39.1	39.9	-2.01	3.69	
				10g	2.08	2.05	20.5	20.9	-1.91		
1/17/2013	D1900V2	5d043	Body	1g	4.05	3.97	39.7	40.9	-2.93	1.98	
				10g	2.06	2.08	20.8	21.6	-3.70		
1/21/2013	D2450V2	748	Head	1g	5.18	5.13	51.3	52.7	-2.66	0.97	
				10g	2.30	2.33	23.3	24.6	-5.28		
1/21/2013	D2450V2	748	Body	1g	5.14	5.25	52.5	49.9	5.21	-2.14	
				10g	2.23	2.43	24.3	23.4	3.85		
1/23/2013	D835V2	4d002	Head	1g	1.05	1.02	10.20	9.58	<b>6.47</b>	2.86	1,2
				10g	0.71	0.67	6.66	6.28	6.05		
1/23/2013	D835V2	4d002	Body	1g	1.03	1.01	10.10	9.48	<b>6.54</b>	1.94	3,4
				10g	0.69	0.67	6.65	6.26	6.23		
1/23/2013	D1900V2	5d043	Head	1g	3.94	3.90	39.00	39.90	-2.26	1.02	
				10g	2.05	2.03	20.30	20.90	-2.87		
1/24/2013	D1900V2	5d043	Body	1g	4.01	4.00	40.0	40.9	-2.20	0.25	
				10g	2.08	2.08	20.8	21.6	-3.70		

## 12. SAR Test Results

### 12.1. GSM850

#### 12.1.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Voice	128	824.2	33.0	32.7				1
		190	836.6	33.0	32.7	0.192	0.206	1	
		251	848.8	33.0	32.7				1
Left Tilt (15°)	Voice	128	824.2	33.0	32.7				1
		190	836.6	33.0	32.7	0.122	0.131		
		251	848.8	33.0	32.7				1
Right Touch	Voice	128	824.2	33.0	32.7				1
		190	836.6	33.0	32.7	0.156	0.167		
		251	848.8	33.0	32.7				1
Right Tilt (15°)	Voice	128	824.2	33.0	32.7				1
		190	836.6	33.0	32.7	0.118	0.126		
		251	848.8	33.0	32.7				1

#### Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

#### 12.1.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Voice	10	128	824.2	33.0	32.7				1
			190	836.6	33.0	32.7	0.467	0.500	2	
			251	848.8	33.0	32.7				1
Front	Voice	10	128	824.2	33.0	32.7				1
			190	836.6	33.0	32.7	0.243	0.260		
			251	848.8	33.0	32.7				1

#### Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.1.3. Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GPRS 3 slots	10	128	824.2	30.5	30.2				1
			190	836.6	30.5	30.3	0.746	<b>0.781</b>	3	
			251	848.8	30.5	30.3				1
Front	GPRS 3 slots	10	128	824.2	30.5	30.2				1
			190	836.6	30.5	30.3	0.432	0.452		
			251	848.8	30.5	30.3				1
Edge 3	GPRS 3 slots	10	128	824.2	30.5	30.2				1
			190	836.6	30.5	30.3	0.080	0.084		
			251	848.8	30.5	30.3				1
Edge 4	GPRS 3 slots	10	128	824.2	30.5	30.2				1
			190	836.6	30.5	30.3	0.524	0.549		
			251	848.8	30.5	30.3				1

**Note(s):**

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

## 12.2. GSM1900

### 12.2.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Voice	512	1850.2	30.0	29.5				1
		661	1880.0	30.0	29.3	0.470	<b>0.552</b>	1	
		810	1909.8	30.0	29.4				1
Left Tilt (15°)	Voice	512	1850.2	30.0	29.5				1
		661	1880.0	30.0	29.3	0.058	0.068		
		810	1909.8	30.0	29.4				1
Right Touch	Voice	512	1850.2	30.0	29.5				1
		661	1880.0	30.0	29.3	0.224	0.263		
		810	1909.8	30.0	29.4				1
Right Tilt (15°)	Voice	512	1850.2	30.0	29.5				1
		661	1880.0	30.0	29.3	0.067	0.079		
		810	1909.8	30.0	29.4				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.2.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Voice	10	512	1850.2	30.0	27.8				1
			661	1880.0	30.0	28.4	0.418	<b>0.604</b>	2	
			810	1909.8	30.0	27.7				1
Front	Voice	10	512	1850.2	30.0	27.8				1
			661	1880.0	30.0	28.4	0.289	0.418		
			810	1909.8	30.0	27.7				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.2.3. Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GPRS 3 slots	10	512	1850.2	27.5	27.1				1
			661	1880.0	27.5	27.0	0.657	<b>0.737</b>	3	
			810	1909.8	27.5	27.2				1
Front	GPRS 3 slots	10	512	1850.2	27.5	27.1				1
			661	1880.0	27.5	27.0	0.486	0.545		
			810	1909.8	27.5	27.2				1
Edge 3	GPRS 3 slots	10	512	1850.2	27.5	27.1				1
			661	1880.0	27.5	27.0	0.441	0.495		
			810	1909.8	27.5	27.2				1
Edge 4	GPRS 3 slots	10	512	1850.2	27.5	27.1				1
			661	1880.0	27.5	27.0	0.198	0.222		
			810	1909.8	27.5	27.2				1

**Note(s):**

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.3. W-CDMA Band V

#### 12.3.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Rel 99 RMC 12.2kbps	4132	826.4	23.0	22.7				1
		4183	836.6	23.0	23.0	0.201	0.202	1	
		4233	846.6	23.0	22.8				1
Left Tilt (15°)	Rel 99 RMC 12.2kbps	4132	826.4	23.0	22.7				1
		4183	836.6	23.0	23.0	0.119	0.120		
		4233	846.6	23.0	22.8				1
Right Touch	Rel 99 RMC 12.2kbps	4132	826.4	23.0	22.7				1
		4183	836.6	23.0	23.0	0.167	0.168		
		4233	846.6	23.0	22.8				1
Right Tilt (15°)	Rel 99 RMC 12.2kbps	4132	826.4	23.0	22.7				1
		4183	836.6	23.0	23.0	0.122	0.123		
		4233	846.6	23.0	22.8				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

#### 12.3.2. Body-worn Accessory & Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Rel 99 RMC 12.2kbps	10	4132	826.4	23.0	22.7				1
			4183	836.6	23.0	23.0	0.422	0.424	2	
			4233	846.6	23.0	22.8				1
Front	Rel 99 RMC 12.2kbps	10	4132	826.4	23.0	22.7				1
			4183	836.6	23.0	23.0	0.233	0.234		
			4233	846.6	23.0	22.8				1
Edge 3	Rel 99 RMC 12.2kbps	10	4132	826.4	23.0	22.7				1
			4183	836.6	23.0	23.0	0.052	0.052		
			4233	846.6	23.0	22.8				1
Edge 4	Rel 99 RMC 12.2kbps	10	4132	826.4	23.0	22.7				1
			4183	836.6	23.0	23.0	0.148	0.149		
			4233	846.6	23.0	22.8				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

## 12.4. W-CDMA Band II

### 12.4.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Rel 99 RMC 12.2kbps	9262	1852.4	23.0	22.3	0.616	0.724	1	
		9400	1880.0	23.0	22.3	0.721	0.847		
		9538	1907.6	23.0	22.4	0.751	<b>0.862</b>		
Left Tilt (15°)	Rel 99 RMC 12.2kbps	9262	1852.4	23.0	22.3				1
		9400	1880.0	23.0	22.3	0.104	0.122		
		9538	1907.6	23.0	22.4				1
Right Touch	Rel 99 RMC 12.2kbps	9262	1852.4	23.0	22.3				1
		9400	1880.0	23.0	22.3	0.319	0.375		
		9538	1907.6	23.0	22.4				1
Right Tilt (15°)	Rel 99 RMC 12.2kbps	9262	1852.4	23.0	22.3				1
		9400	1880.0	23.0	22.3	0.124	0.146		
		9538	1907.6	23.0	22.4				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.4.2. Body-worn Accessory & Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.0	22.3	0.748	0.879		
			9400	1880.0	23.0	22.3	0.764	0.898		
			9538	1907.6	23.0	22.4	0.875	<b>1.005</b>	2	
Front	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.0	22.3				1
			9400	1880.0	23.0	22.3	0.599	0.704		
			9538	1907.6	23.0	22.4				1
Edge 3	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.0	22.3				1
			9400	1880.0	23.0	22.3	0.513	0.603		
			9538	1907.6	23.0	22.4				1
Edge 4	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.0	22.3				1
			9400	1880.0	23.0	22.3	0.224	0.263		
			9538	1907.6	23.0	22.4				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

## 12.5. Wi-Fi (2.4 GHz Band)

### 12.5.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	802.11b	1	2412	16.5	16.5				1
		6	2437	16.5	16.5	0.174	0.174	1	
		11	2462	16.5	16.4				1
Left Tilt (15°)	802.11b	1	2412	16.5	16.5				1
		6	2437	16.5	16.5	0.127	0.127		
		11	2462	16.5	16.4				1
Right Touch	802.11b	1	2412	16.5	16.5				1
		6	2437	16.5	16.5	0.117	0.117		
		11	2462	16.5	16.4				1
Right Tilt (15°)	802.11b	1	2412	16.5	16.5				1
		6	2437	16.5	16.5	0.104	0.104		
		11	2462	16.5	16.4				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.5.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	802.11b	10	1	2412	16.5	16.5				1
			6	2437	16.5	16.5	0.025	0.025	2	
			11	2462	16.5	16.4				1
Front	802.11b	10	1	2412	16.5	16.5				1
			6	2437	16.5	16.5	0.033	0.033		
			11	2462	16.5	16.4				1

**Note(s):**

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 12.5.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11b	10	1	2412	16.5	16.5				1
			6	2437	16.5	16.5	0.020	0.020		
			11	2462	16.5	16.4				1
Edge 2	802.11b	10	1	2412	16.5	16.5				1
			6	2437	16.5	16.5	0.012	0.012		
			11	2462	16.5	16.4				1

**Note(s):**

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.

### 13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

#### 13.1. The Highest Measured SAR Configuration in Each Frequency Band

##### Head Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

##### Body-worn Accessory Exposure Condition

Frequency band	Test Position	Mode	Ch. #	Freq. (MHz)	Measured 1g SAR (W/kg)
W-CDMA Band II	Rear	Rel. 99 RMC 12.2kbps	9538	1907.6	0.88

##### Note(s):

1. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
2. Repeated measurement was performed on the highest measured SAR configuration in each frequency band only.

#### 13.2. Repeated Measurement Results

##### Head Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

##### Body-worn Accessory Exposure Condition

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
W-CDMA Band II	Rear	Rel. 99 RMC 12.2kbps	9538	1907.6	0.875	0.817	1.07	1

##### Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

## 14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

**SAR<sub>1</sub>** is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**Ri** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

## 14.1. Estimated SAR for Bluetooth

### 14.1.1. Standalone SAR Test Exclusion

Based on the criteria for Standalone SAR test exclusion listed in Section 4.3.1. of KDB 447498 D01 General RF Exposure Guidance v05:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0, \text{ for 1-g SAR}$$

#### Body-worn Accessory Exposure Conditions

Max. Power of Channel		Min. Test Separation Distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
9.5	9	10	2.441	1.4

#### Conclusion:

The computed value is < 3; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

### 14.1.2. Estimated SAR

As SAR was not measured for Bluetooth, estimated Standalone SAR values were computed for Bluetooth for the purpose of Simultaneous Transmission SAR Analysis using the following formula:

$$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg,}$$

With x = 7.5 for 1-g SAR

This standalone SAR estimation was performed in accordance with the separation distances listed in Section 17. "Antenna Locations" and only at the applicable simultaneous transmission test positions. The estimated SAR results are as follow:

Test Position	Max. Power of Channel (mW)	Min. Test Separation Distance (mm)	Frequency (GHz)	Estimated 1-g SAR Values (W/kg)
Rear/Front	9	10	2.441	0.187

#### Note(s):

1. Power and distance are rounded to the nearest mW and mm before calculation
2. If the minimum test separation distance is <5mm then 5mm is used in the calculation

## 14.2. Head Exposure Conditions

### Sum of the SAR for GSM, W-CDMA, & WiFi 2.4 GHz Band

Test Position	Voice				Data	Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	WiFi 2.4 GHz	
Left Touch	0.206				0.174	<b>0.380</b>
		0.552			0.174	0.726
			0.202		0.174	0.376
				0.862	0.174	<b>1.036</b>
Left Tilt	0.131				0.127	0.258
		0.068			0.127	0.195
			0.120		0.127	0.247
				0.122	0.127	0.249
Right Touch	0.167				0.117	0.284
		0.263			0.117	0.380
			0.168		0.117	0.285
				0.375	0.117	0.492
Right Tilt	0.126				0.104	0.230
		0.079			0.104	0.183
			0.123		0.104	0.227
				0.146	0.104	0.250

#### Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

#### SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

#### **Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

### 14.3. Body-worn Accessory Exposure Conditions

#### Sum of the SAR for GSM, WiFi 2.4 GHz Band, and Bluetooth

Test Position	Voice				Data		Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	WiFi 2.4 GHz	Bluetooth 2.4 GHz	
Rear	0.500				0.025		<b>0.525</b>
		0.604			0.025		0.629
	0.500					0.187	0.687
		0.604				0.187	0.791
			0.424		0.025		0.449
				1.005	0.025		<b>1.030</b>
			0.424			0.187	0.611
				1.005		0.187	1.192
Front	0.260				0.033		0.293
		0.418			0.033		0.451
	0.260					0.187	0.447
		0.418				0.187	0.605
			0.234		0.033		0.267
				0.704	0.033		0.737
			0.234			0.187	0.421
				0.704		0.187	0.891

#### SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

### 14.4. Hotspot Mode Exposure Conditions

#### Sum of the SAR for GSM, W-CDMA, & WiFi 2.4 GHz Band

Test Position	Data				Data	Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	WiFi 2.4 GHz	
Rear	0.781				0.025	<b>0.806</b>
		0.737			0.025	0.762
			0.424		0.025	0.449
				1.005	0.025	<b>1.030</b>
Front	0.452				0.0330	0.485
		0.545			0.0330	0.578
			0.234		0.0330	0.267
				0.704	0.0330	0.737
Edge 1	0				0.0202	0.020
		0			0.0202	0.020
			0		0.0202	0.020
				0	0.0202	0.020
Edge 3	0.084				0	0.084
		0.495			0	0.495
			0.052		0	0.052
				0.603	0	0.603
Edge 4	0.549				0	0.549
		0.222			0	0.222
			0.149		0	0.149
				0.263	0	0.263

#### SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

## **15. Appendixes**

**Refer to separated files for the following appendixes.**

- 15.1. System Performance Check Plots**
- 15.2. SAR Test Plots for GSM850**
- 15.3. SAR Test Plots for GSM1900**
- 15.4. SAR Test Plots for W-CDMA Band V**
- 15.5. SAR Test Plots for W-CDMA Band II**
- 15.6. SAR Test Plots for WiFi 2.4 GHz Band**
- 15.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3772**
- 15.8. Calibration Certificate for E-Field Probe EX3DV4 - SN 3871**
- 15.9. Calibration Certificate for D835V2 - SN 4d002**
- 15.10. Calibration Certificate for D1900V2 - SN 5d043**
- 15.11. Calibration Certificate for D2450V2 - SN 748**