



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

BAR PHONE WITH 802.11b/g/n WLAN AND BLUETOOTH

MODEL NUMBER: GT-S7710L

FCC ID: A3LGTS7710L

REPORT NUMBER: 12114777-2

ISSUE DATE: JANUARY 25, 2013

Prepared for

SAMSUNG ELECTRONICS CO., LTD.

**416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

UL CCS

**47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.**

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	01/25/13	Initial Issue	Tim Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>7</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. ANTENNA PORT TEST RESULTS	12
7.1. <i>BASIC DATA RATE GFSK MODULATION.....</i>	<i>12</i>
7.1.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>12</i>
7.1.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>17</i>
7.1.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>19</i>
7.1.4. <i>AVERAGE TIME OF OCCUPANCY</i>	<i>23</i>
7.1.5. <i>OUTPUT POWER</i>	<i>30</i>
7.1.6. <i>AVERAGE POWER.....</i>	<i>34</i>
7.1.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>35</i>
7.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>41</i>
7.2.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>41</i>
7.2.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>46</i>
7.2.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>48</i>
7.2.4. <i>AVERAGE TIME OF OCCUPANCY</i>	<i>53</i>
7.2.5. <i>OUTPUT POWER</i>	<i>60</i>
7.2.6. <i>AVERAGE POWER.....</i>	<i>64</i>
7.2.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>65</i>
8. RADIATED TEST RESULTS.....	72
8.1. <i>LIMITS AND PROCEDURE</i>	<i>72</i>
8.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>73</i>
8.2.1. <i>BASIC DATA RATE GFSK MODULATION.....</i>	<i>73</i>
8.2.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>78</i>

8.3.	<i>WORST-CASE BELOW 1 GHz</i>	83
9.	AC POWER LINE CONDUCTED EMISSIONS	86
10.	SETUP PHOTOS	90
10.1.	<i>ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP</i>	90
10.2.	<i>RADIATED RF MEASUREMENT SETUP</i>	91
10.3.	<i>RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION</i>	93
10.4.	<i>POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP</i>	99

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO, 443-742, SOUTH KOREA

EUT DESCRIPTION: BAR PHONE WITH WLAN, 802.11b/g/n and Bluetooth

MODEL: GT-S7710L

SERIAL NUMBER: FJ-334-F and FJ-334-H (RADIATED and ANTENNA PORT CONDUCTED)

DATE TESTED: JANUARY 22 to 25, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



TIM LEE
WISE PROGRAM MANAGER

THANH NGUYEN
WISE ENGINEER

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a bar-style cell phone featuring 802.11b/g/n WLAN, Bluetooth, GPS and 2.4 GHz mobile hotspot capability.

The unit supports AFH mode. The manufacturer attested the following.

- It is in compliance with Bluetooth Specification 1.2 or later specification.
- The number of hopping channel in AFH mode is 20 channels.
- The output power do not transmit over than 125mW
- The channel separation is based upon 2/3 of 20 dB channel bandwidth.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	8.79	7.57
2402 - 2480	Enhanced 8PSK	8.41	6.93

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an F PCB antenna with a maximum gain of -3.54 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was REV1.0 and the software was S7710L.010.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X-orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X-orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung Electronics	ETA0U80EBE	SC1C401V8	DoC
Headset	Samsung Electronics	EHS61ASFWE	FJ334B	DoC
USB Cable	Samsung Electronics	ECC1DU4BBE	None	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	1.5m	N/A
2	Headset	1	Audio	Shielded	1.5m	N/A

TEST SETUP

The EUT is a stand-alone unit that was tested in the worst case orientation and configuration, where applicable, during the tests. Test software exercised the radio.

SETUP DIAGRAM FOR TESTS

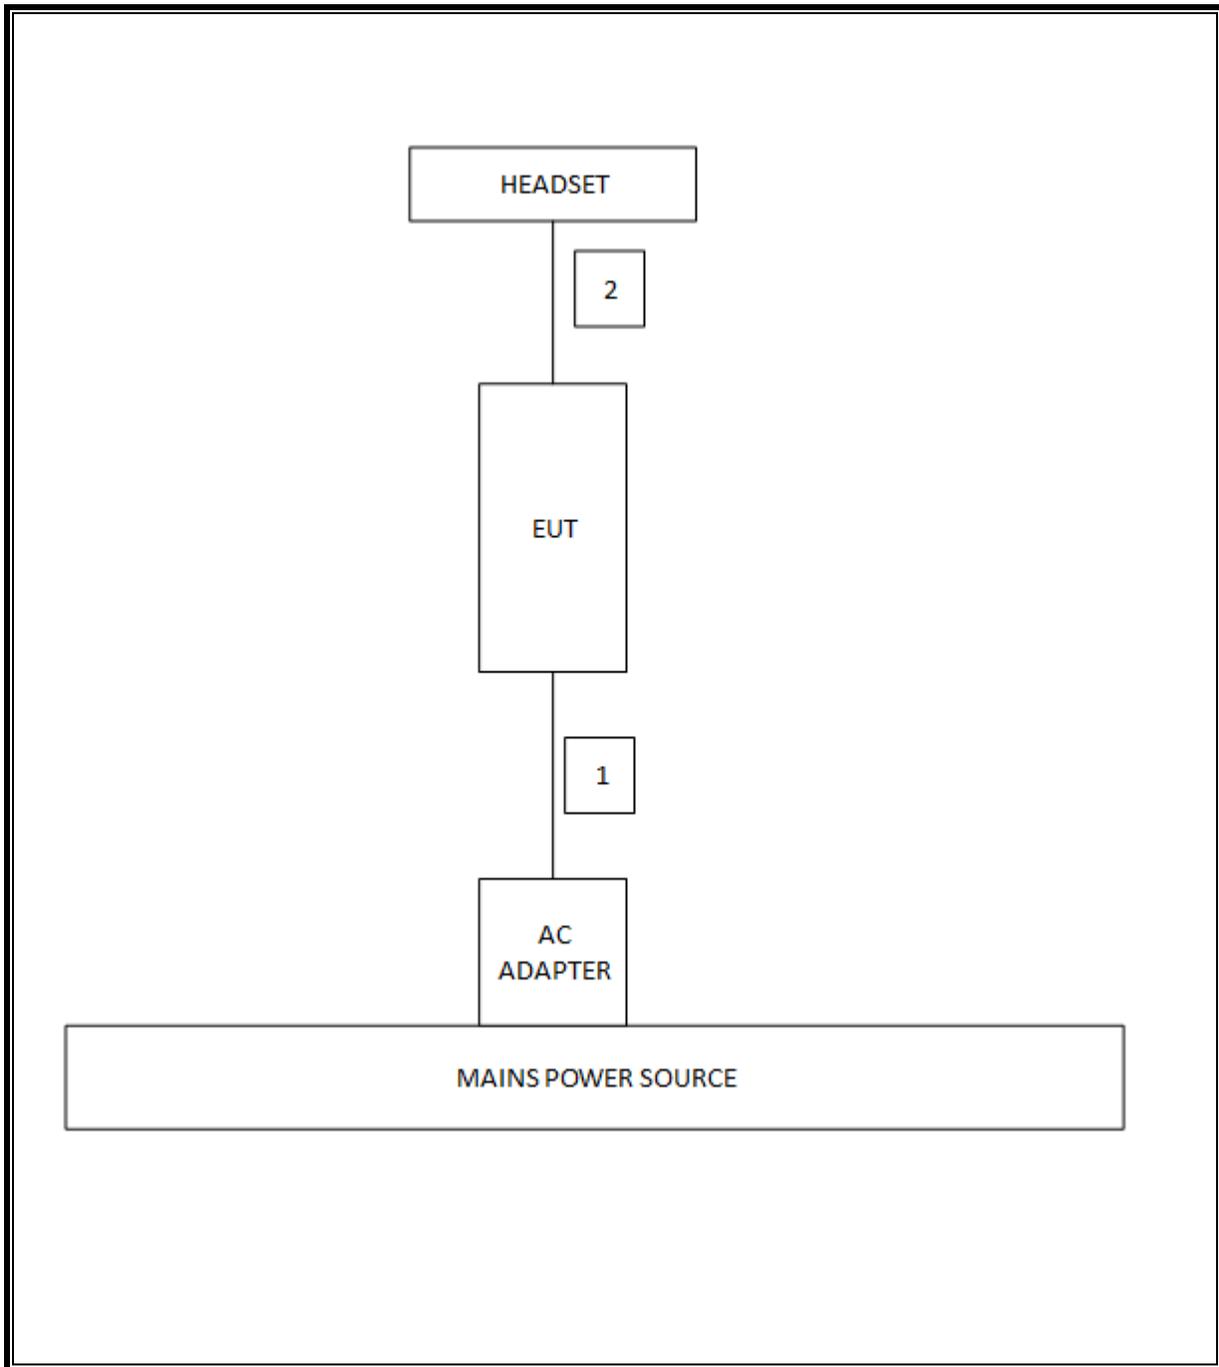

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00872	09/20/12	09/20/13
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	07/28/12	07/28/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	10/21/12	10/21/13
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	10/21/12	10/21/13
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	02/21/12	02/21/13
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRC13192	N02683	CNR	CNR
Bilog 30-2000MHz	Sunol	JB1	C01071	07/26/12	07/26/13
Power meter	HP	437B	T226	06/25/12	06/25/13
Power Sensor	HP	8481A	T233	06/26/12	06/26/13
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	01/14/13	01/14/14
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	03/07/12	03/07/13
Bluetooth Tester	R & S	1153.9000.35	C01119	05/15/12	05/15/13

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	923.242	864.4246
Middle	2441	923.158	847.6306
High	2480	922.632	893.0214


20 dB BANDWIDTH

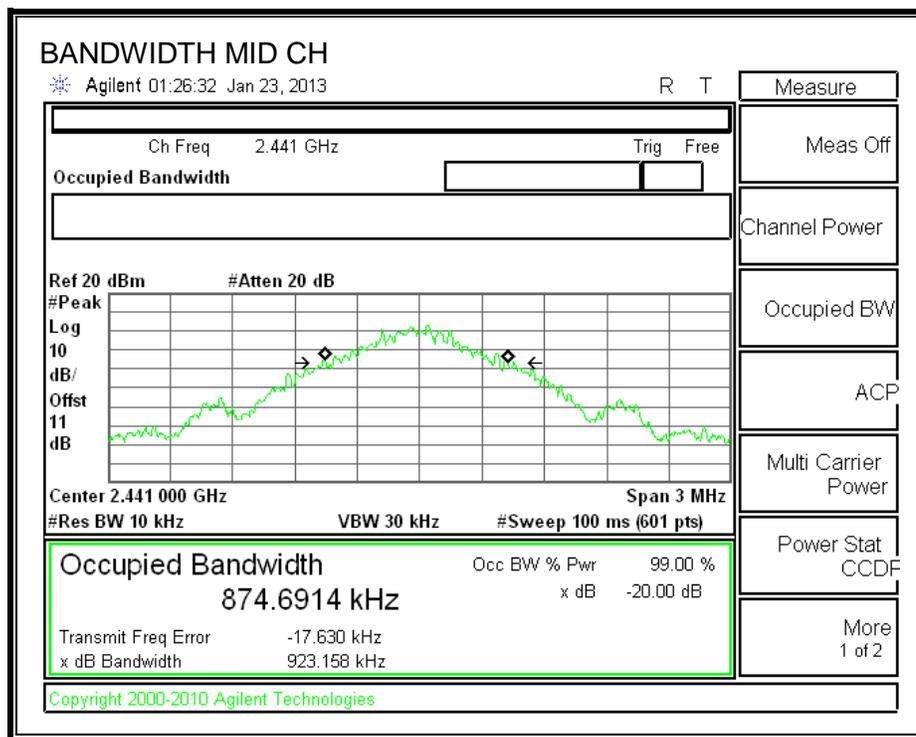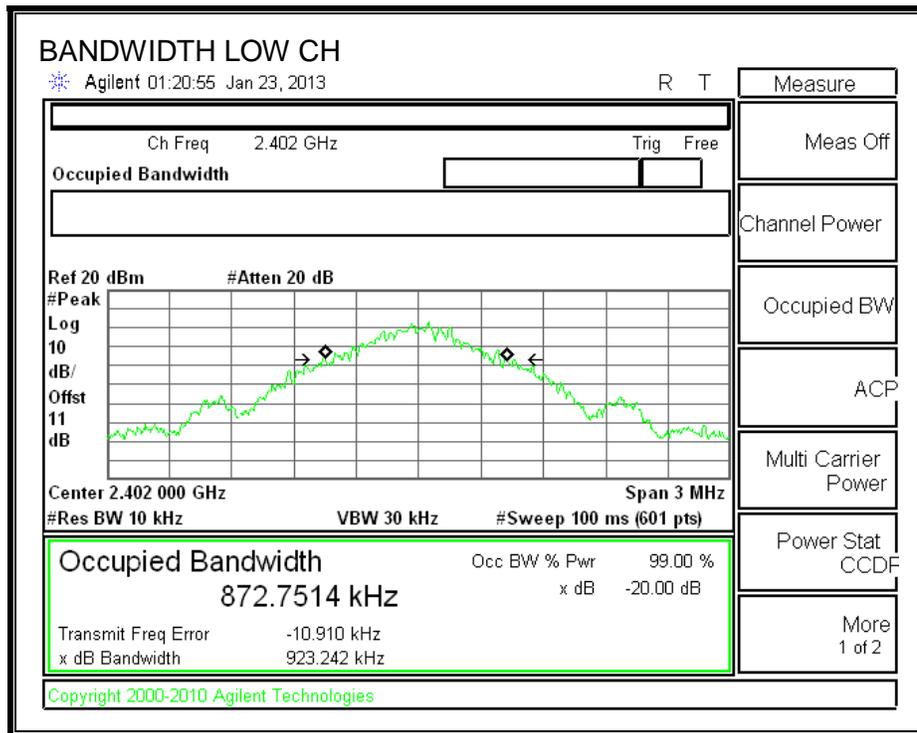

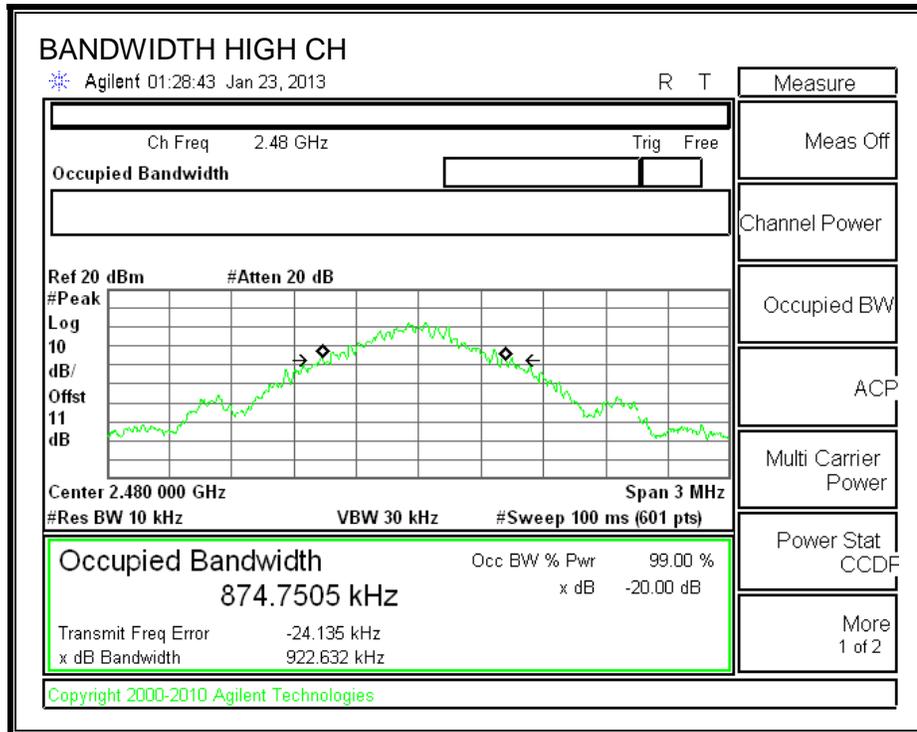

99% BANDWIDTH

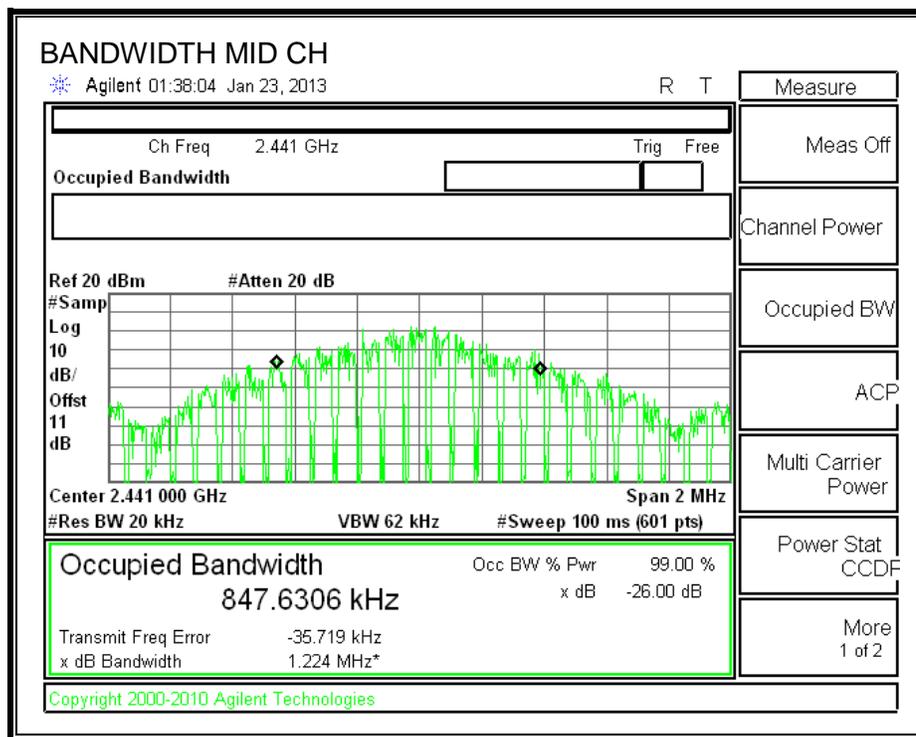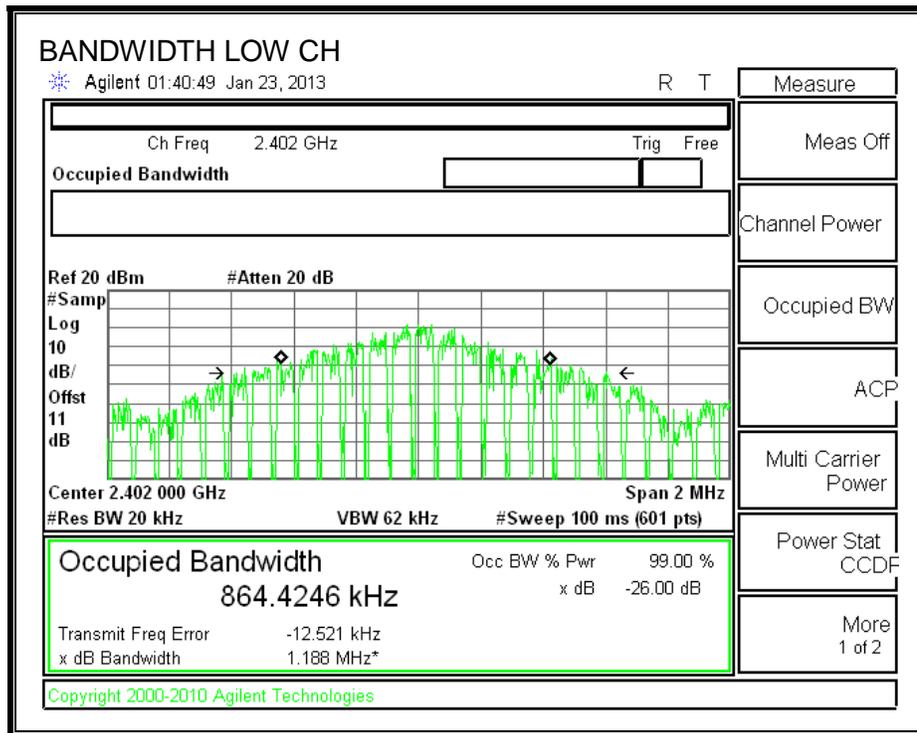

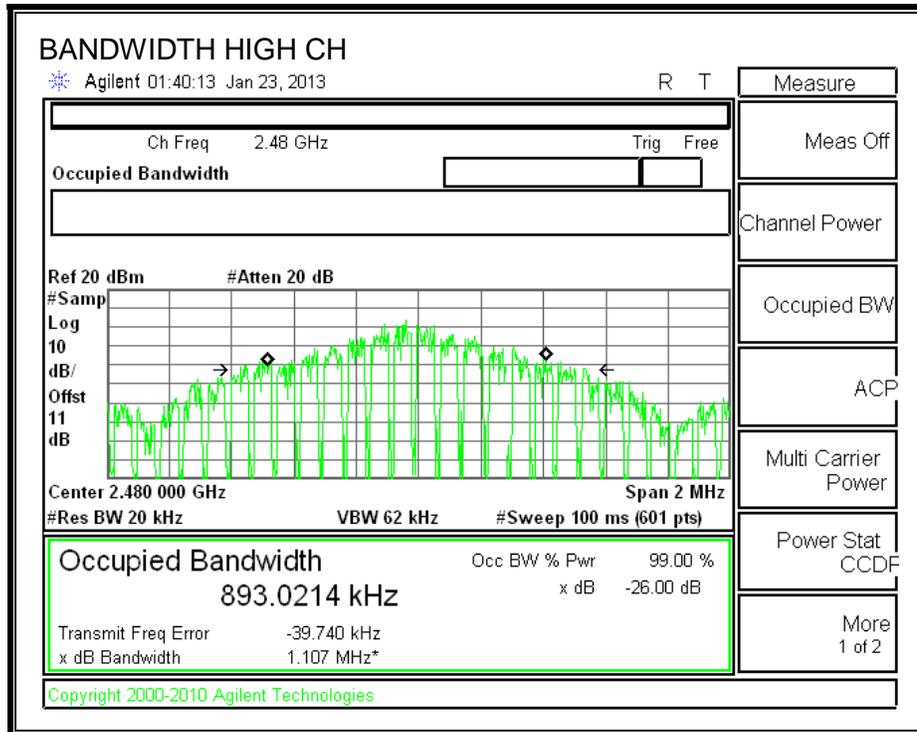

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

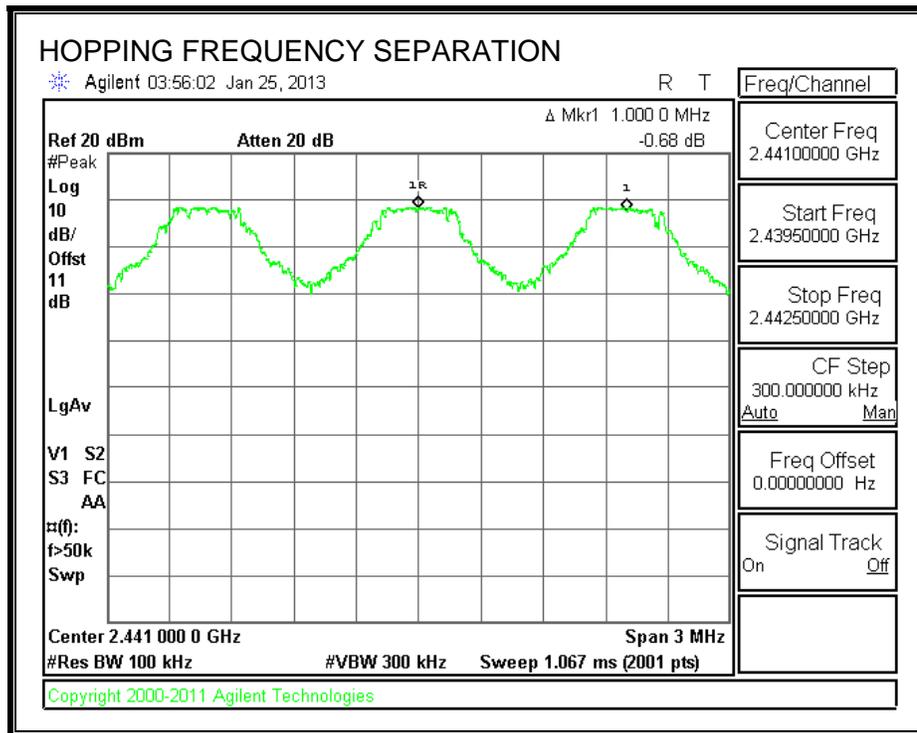

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

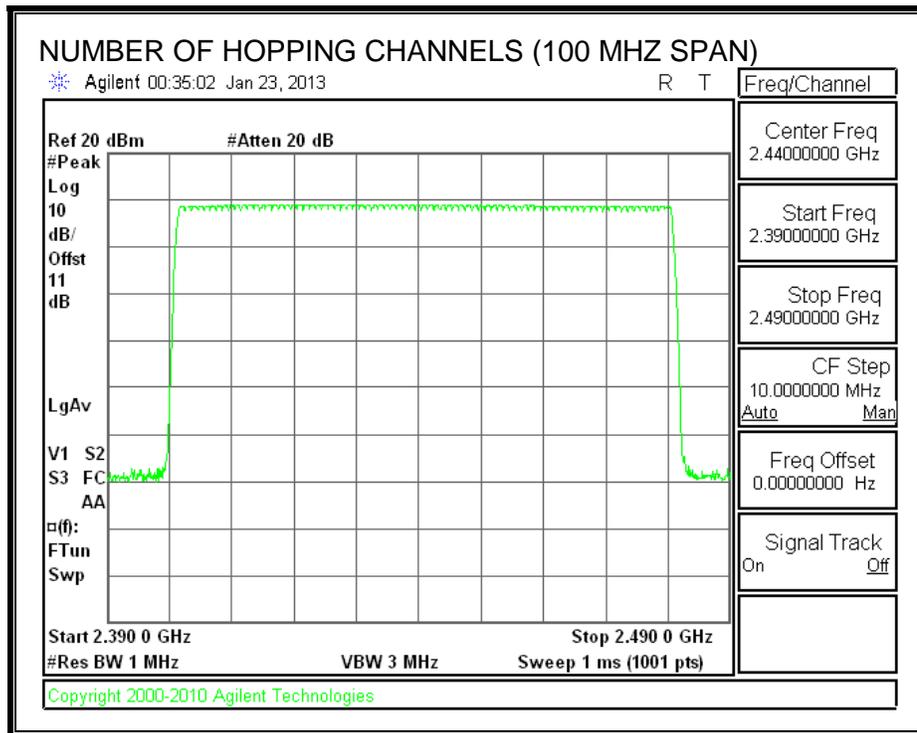

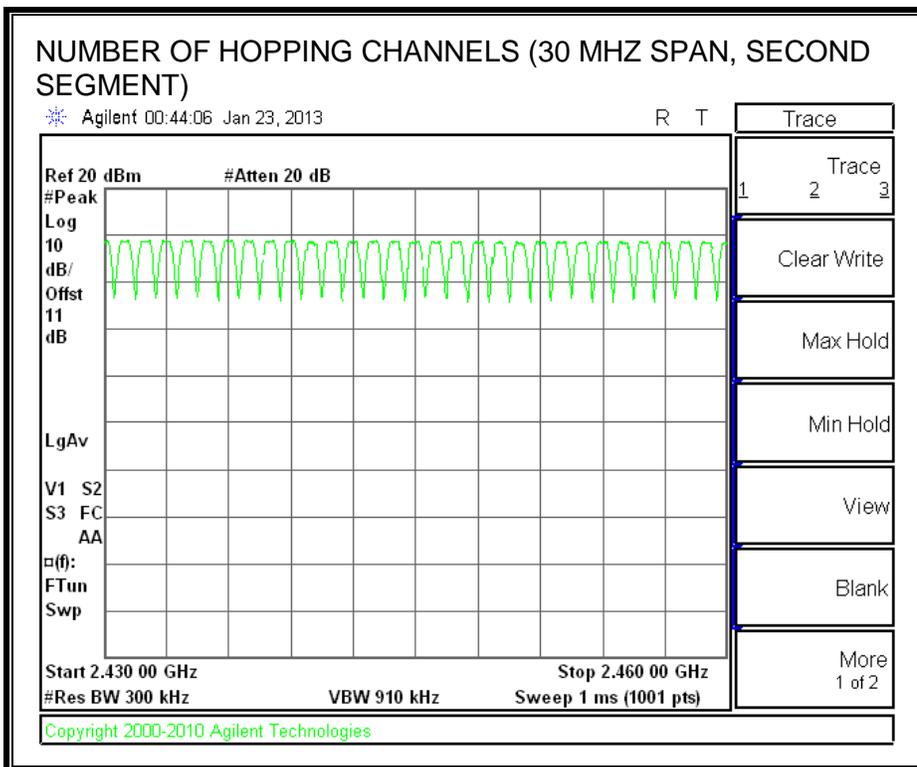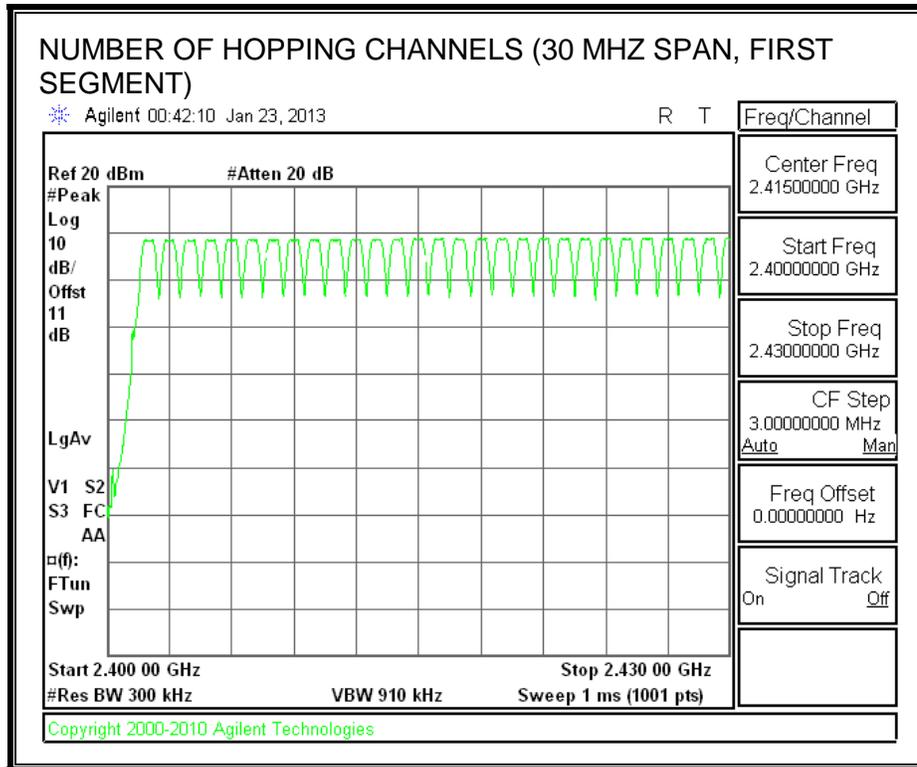

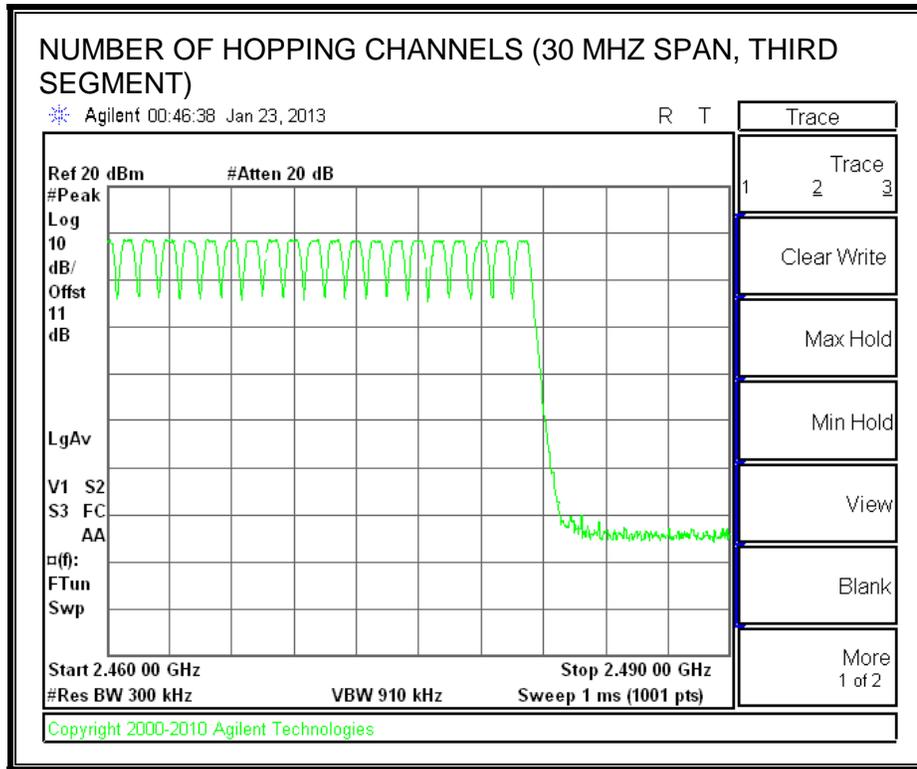

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.395	30	0.119	0.4	-0.282
DH3	1.67	15	0.251	0.4	-0.150
DH5	2.885	13	0.375	0.4	-0.025


PULSE WIDTH - DH1

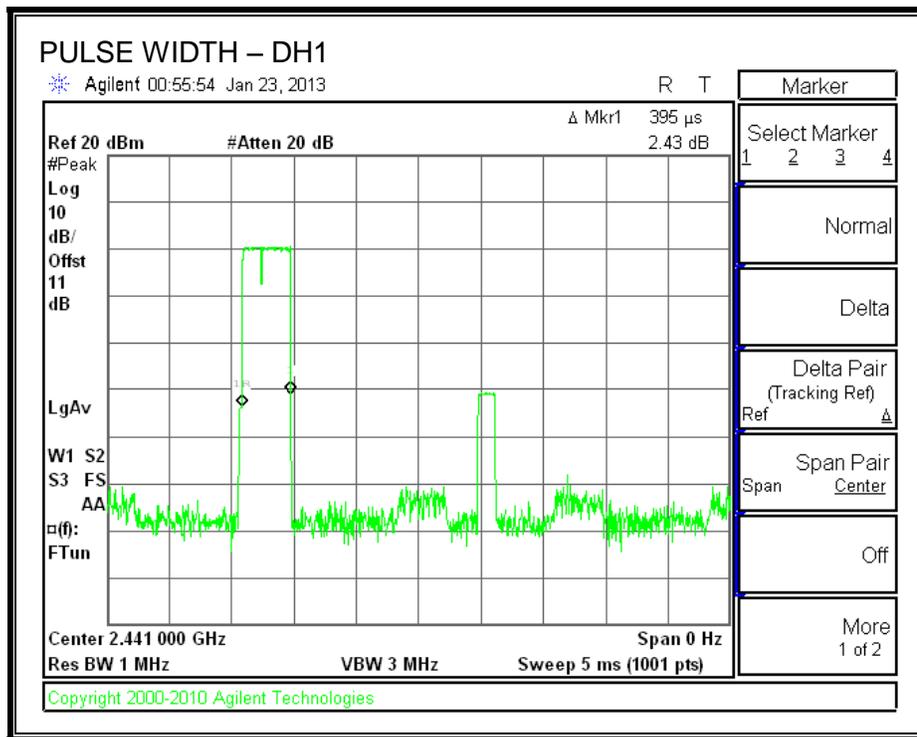


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

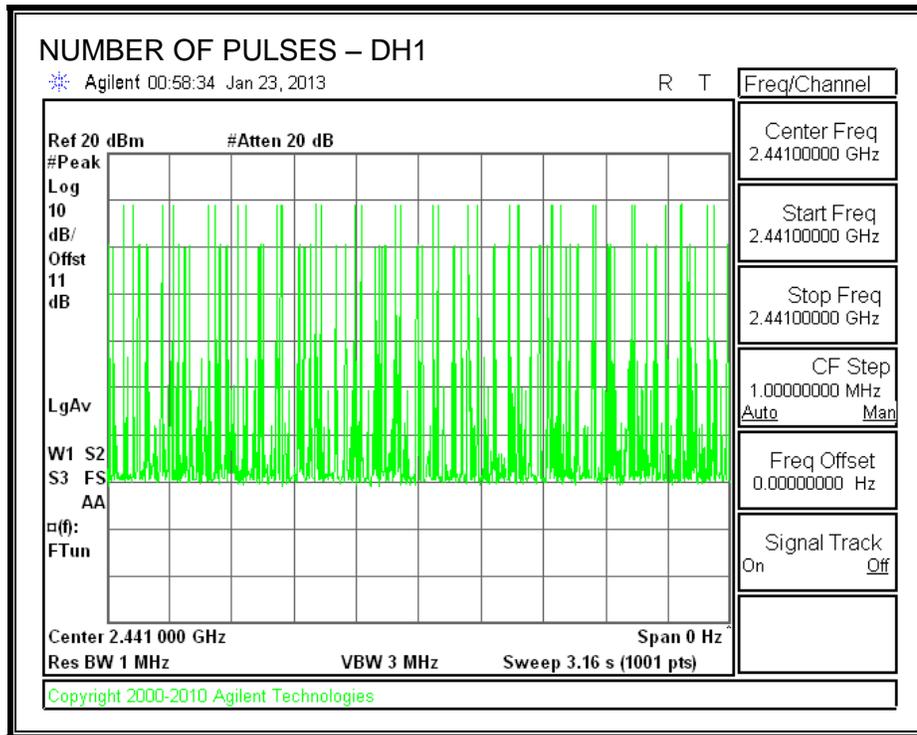


PULSE WIDTH – DH3

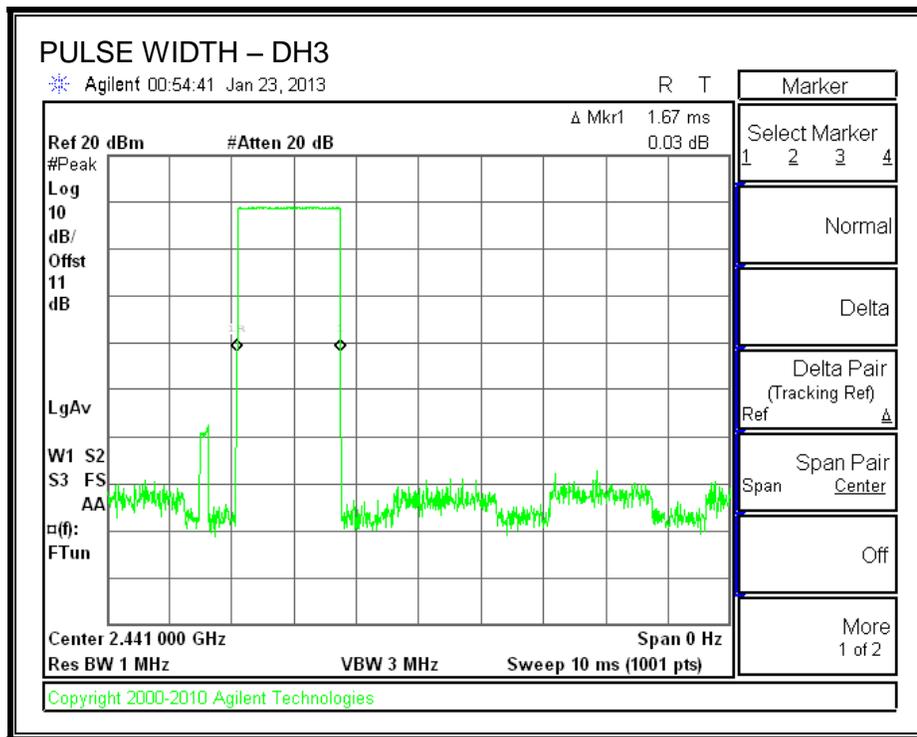


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

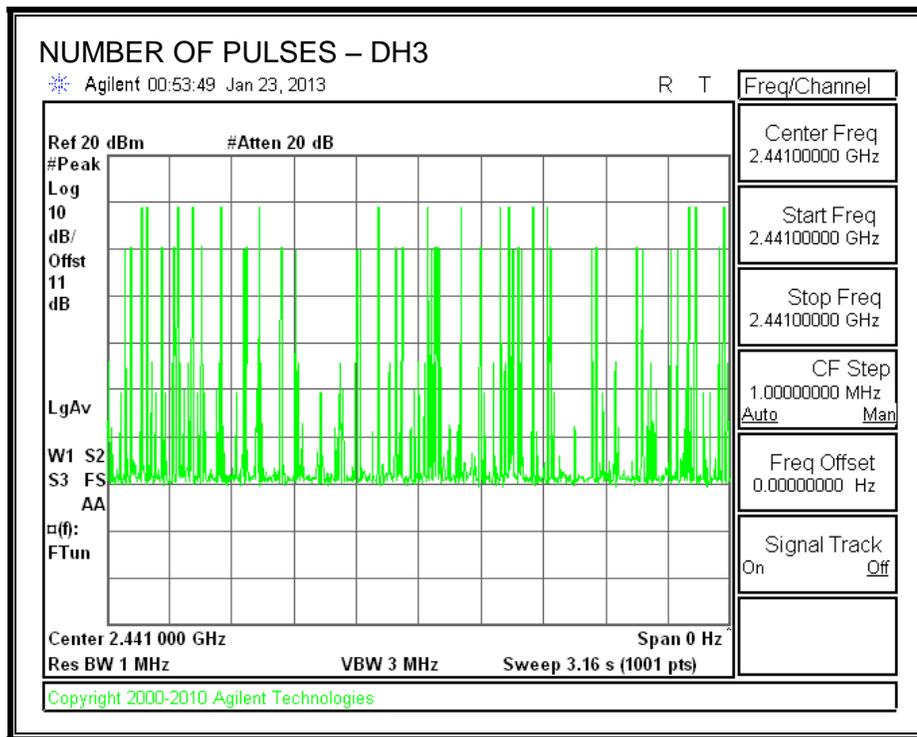

PULSE WIDTH – DH5

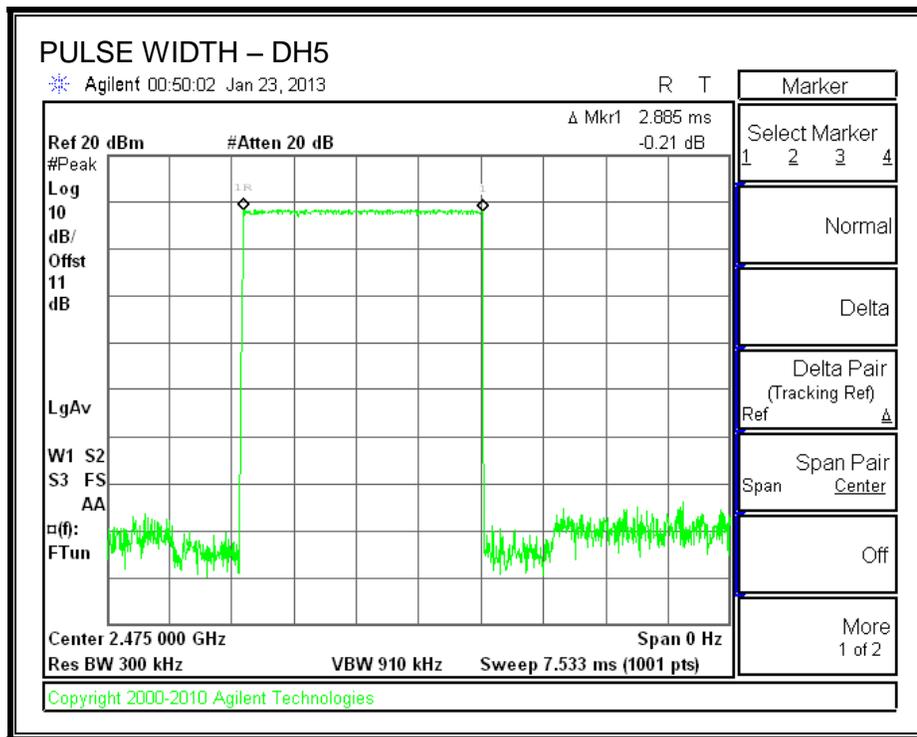

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

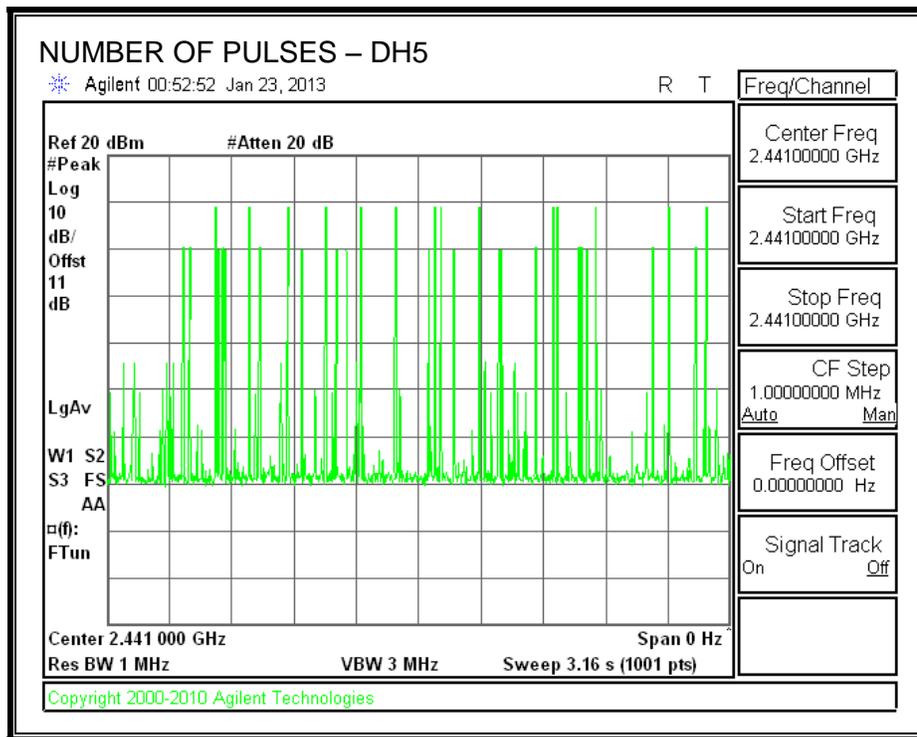

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.52	30	-21.48
Middle	2441	8.79	30	-21.21
High	2480	8.46	30	-21.54

OUTPUT POWER

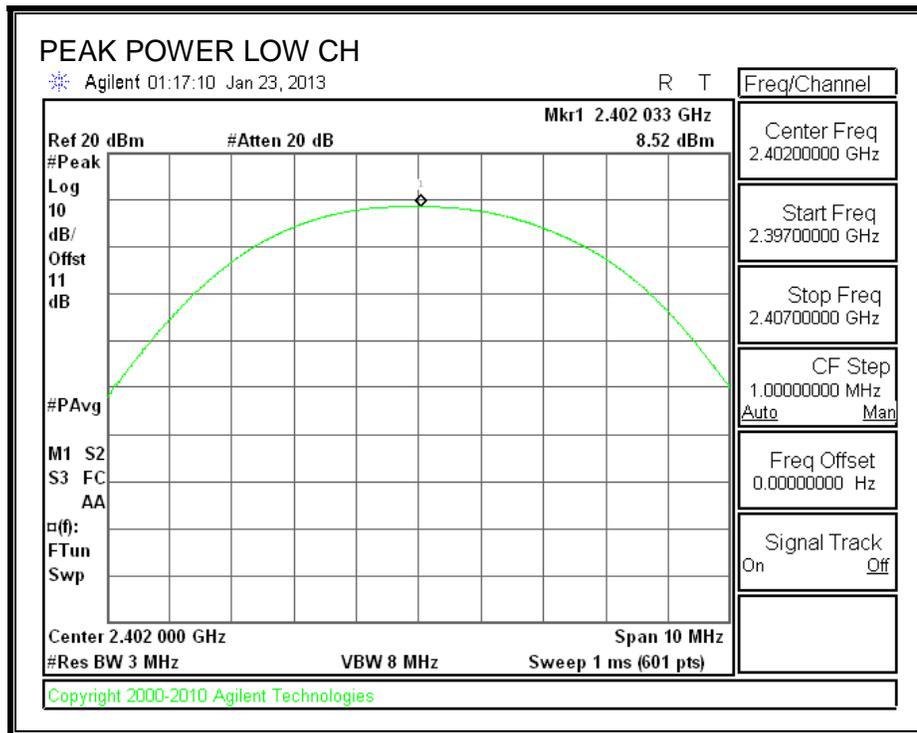

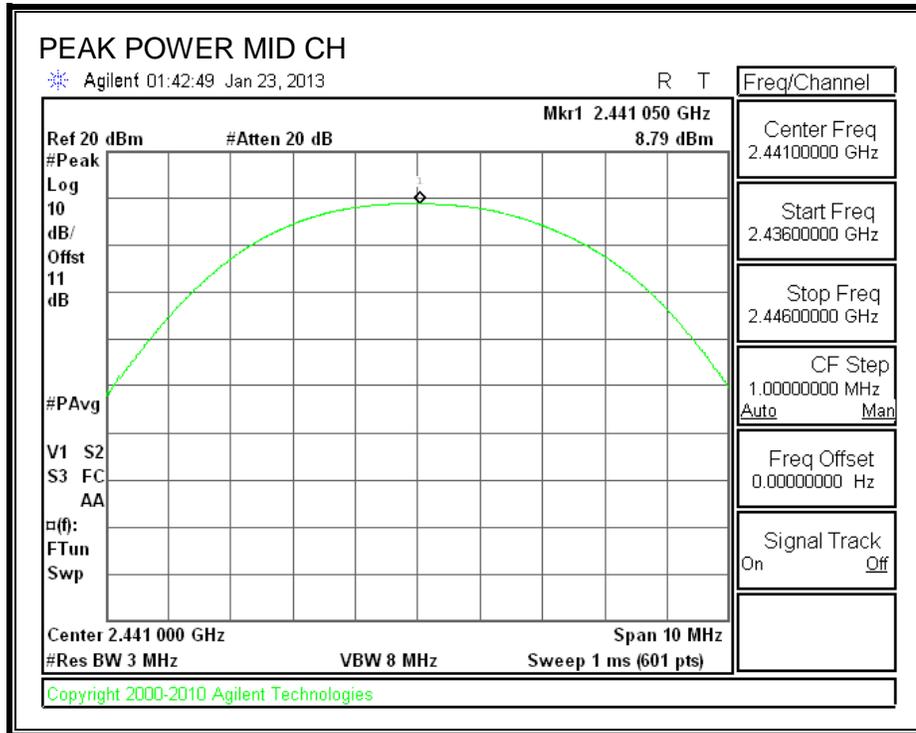

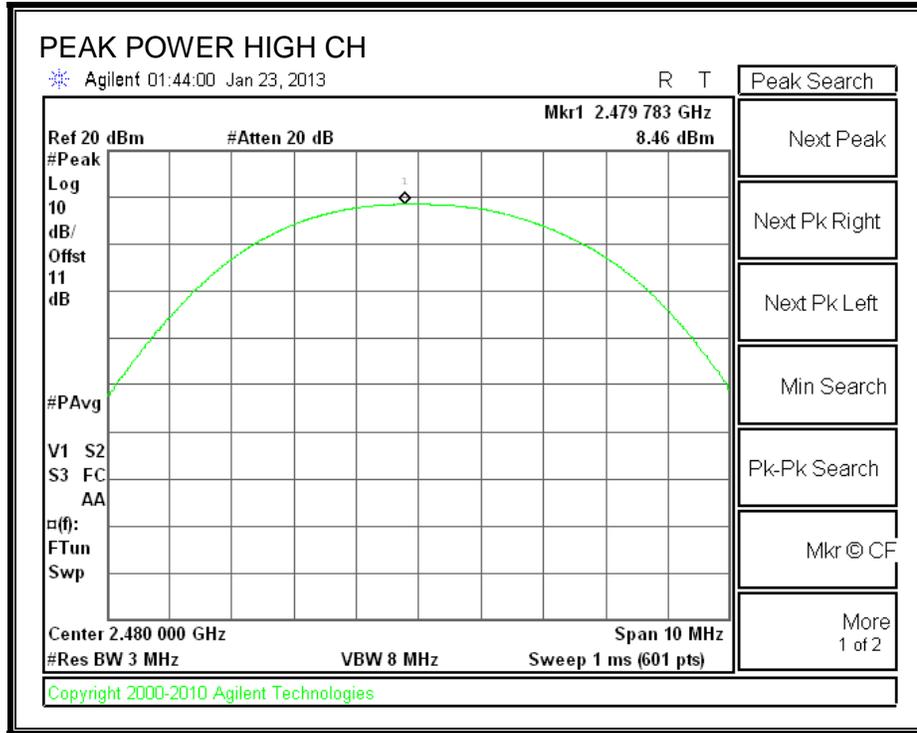

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.90
Middle	2441	8.10
High	2480	7.90

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

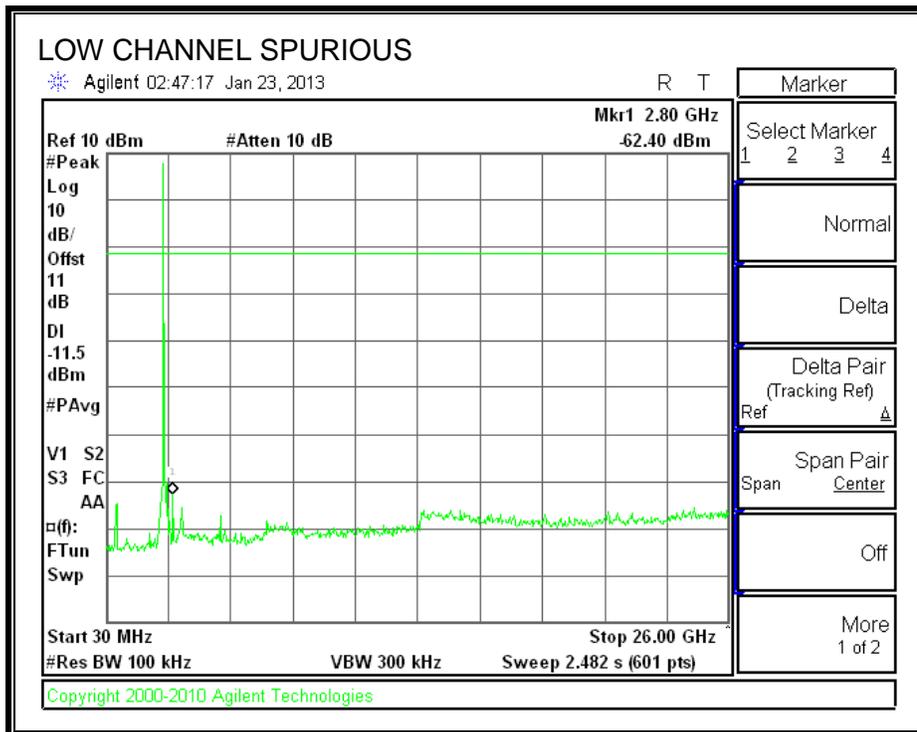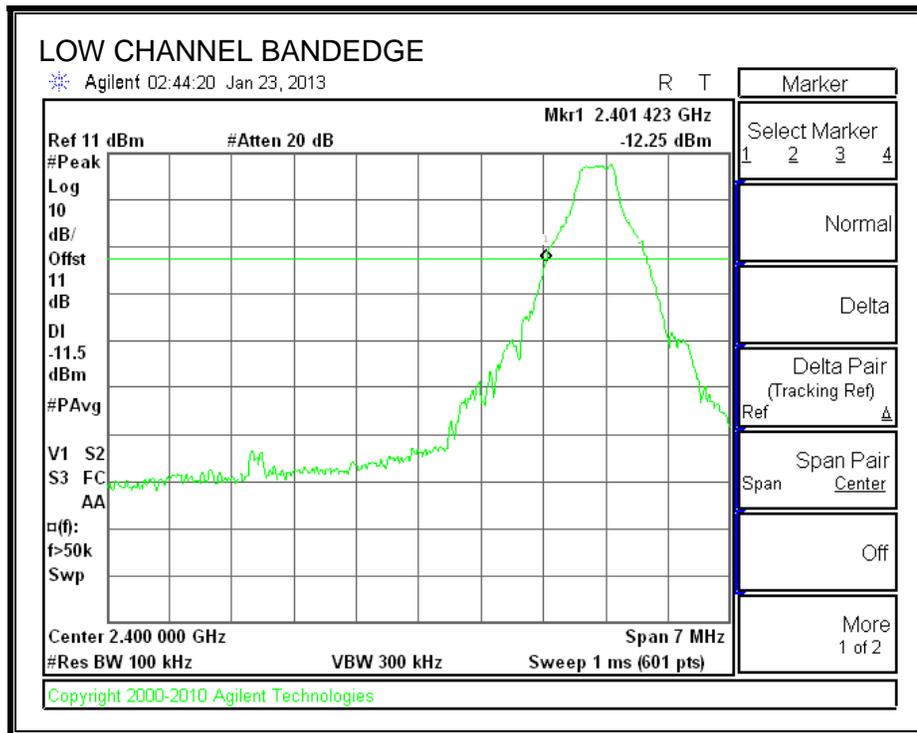


SPURIOUS EMISSIONS, MID CHANNEL

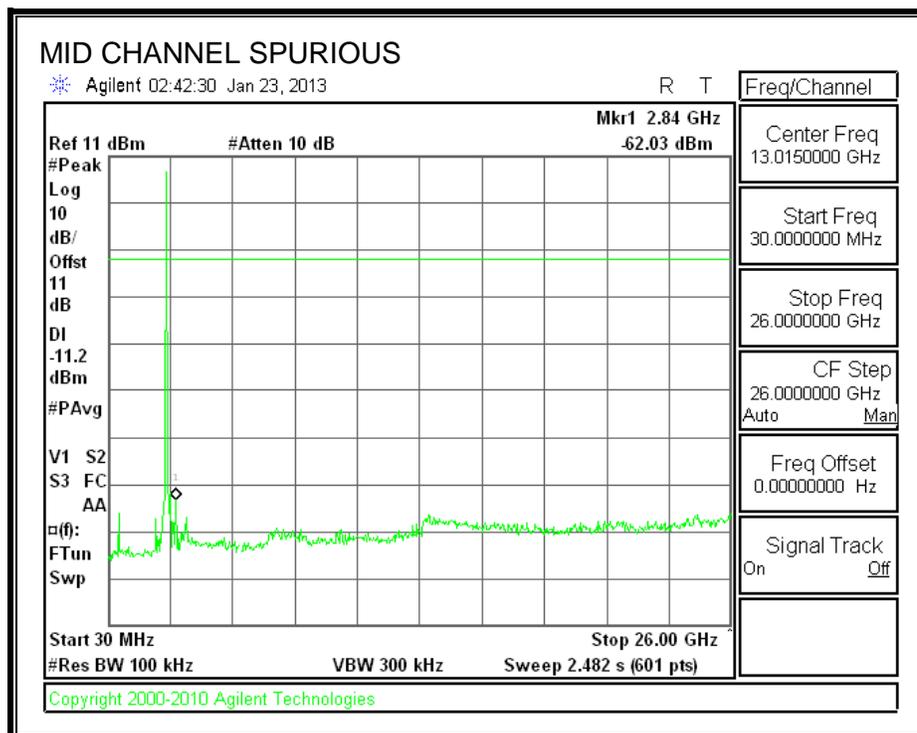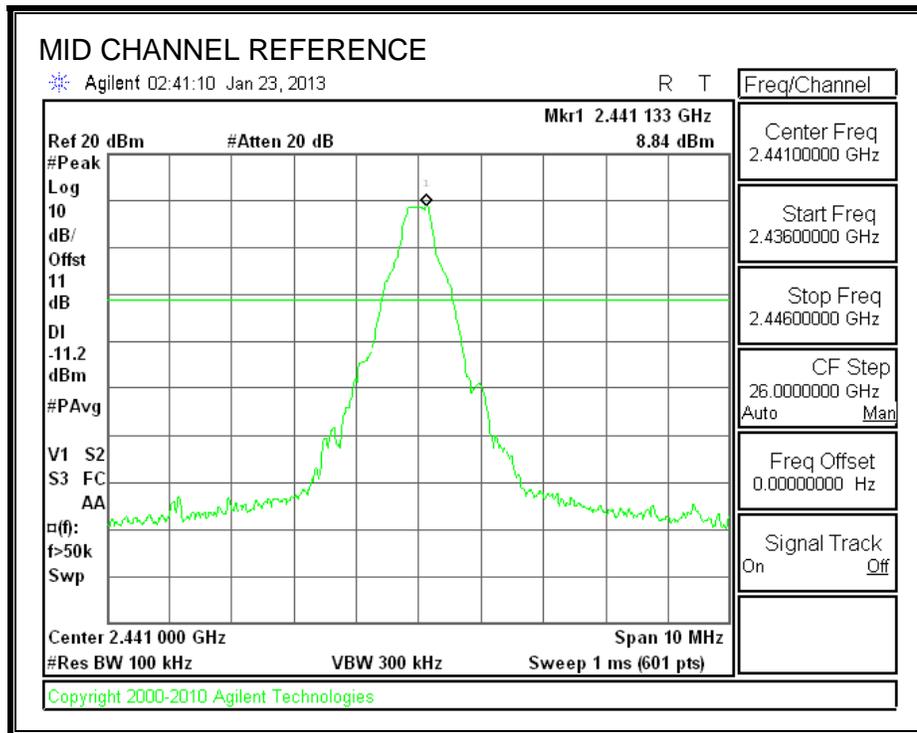


SPURIOUS EMISSIONS, HIGH CHANNEL

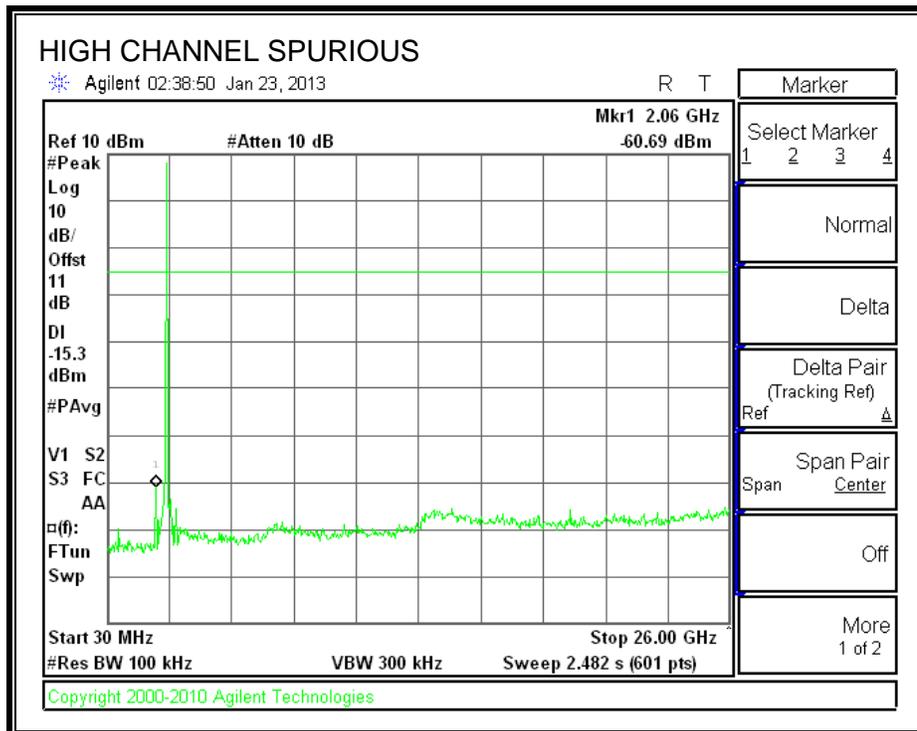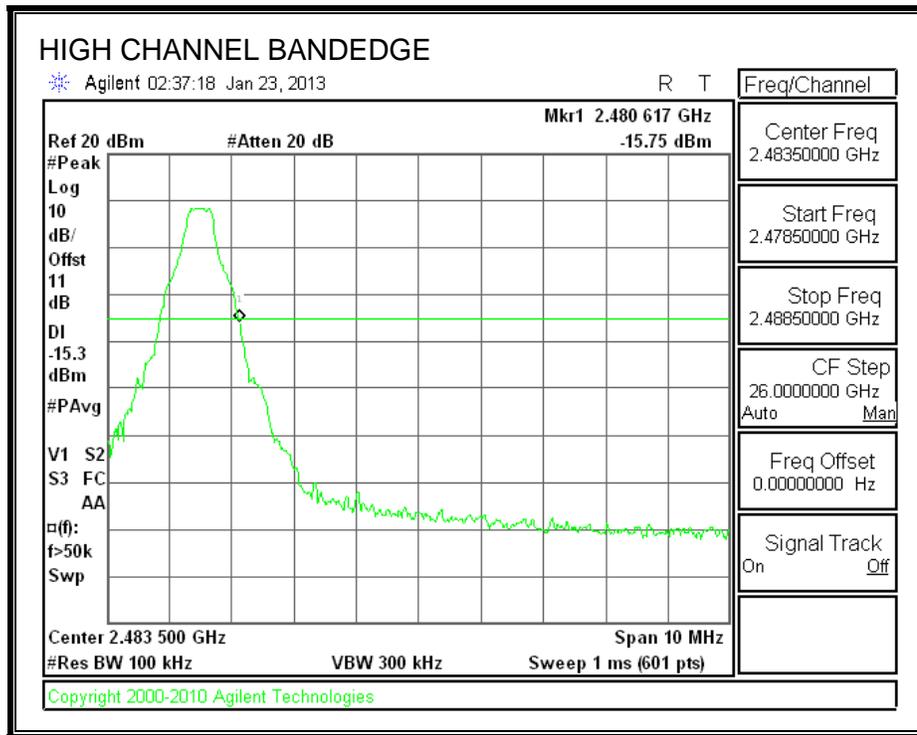

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

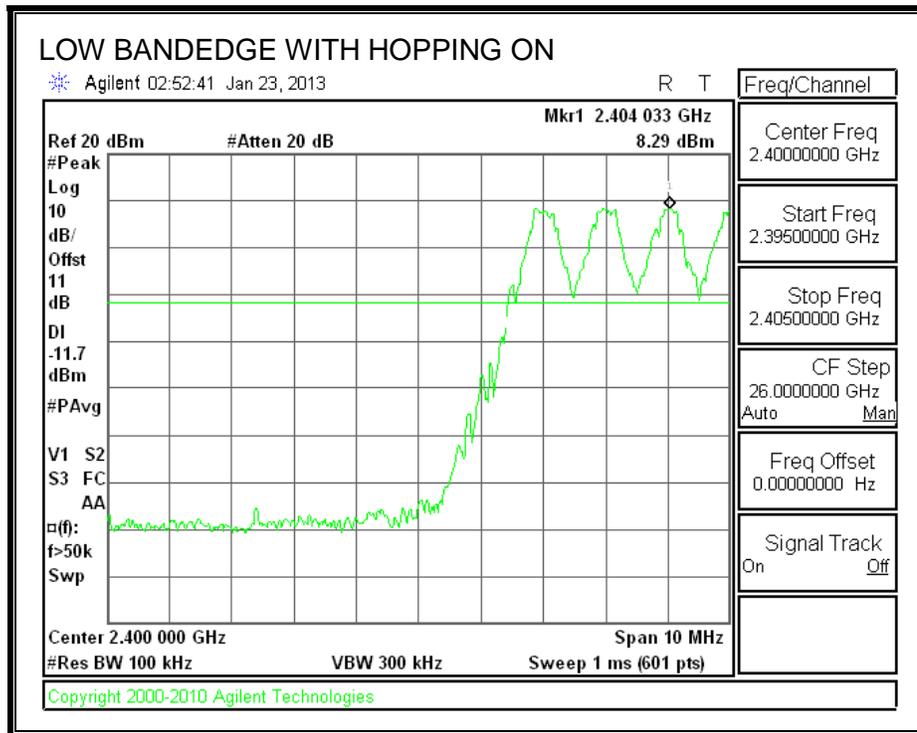

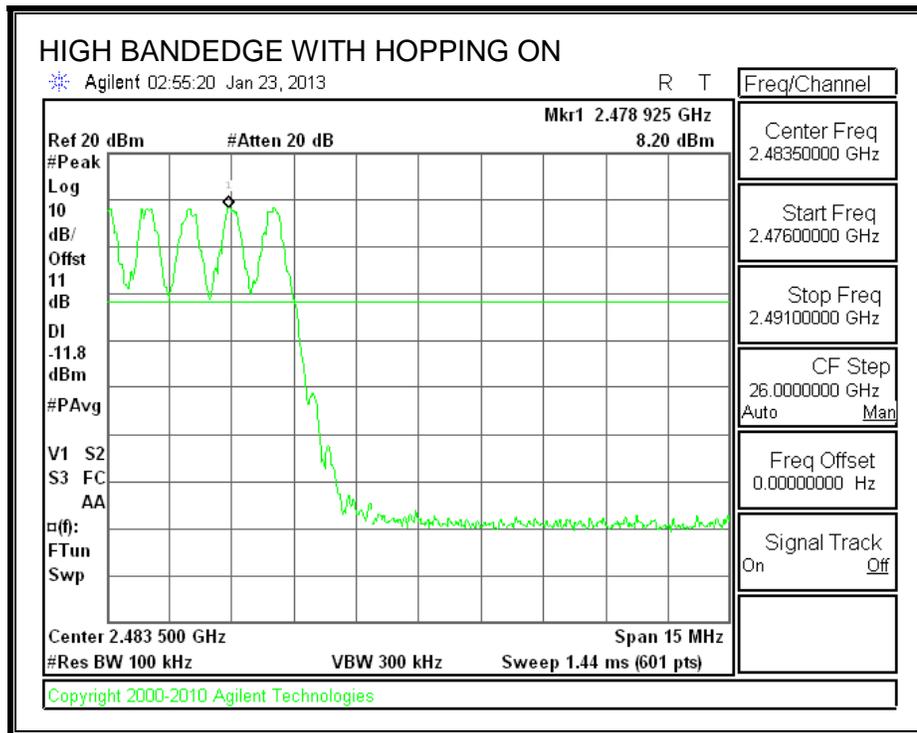

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1322	1233.8
Middle	2441	1323	1102.8
High	2480	1322	1241.8


20 dB BANDWIDTH

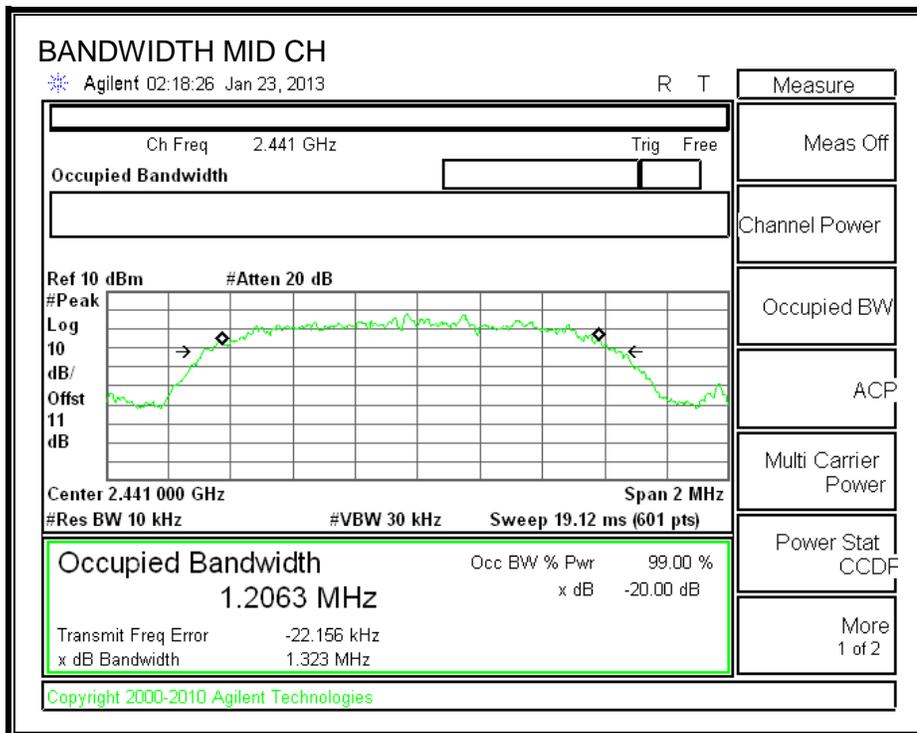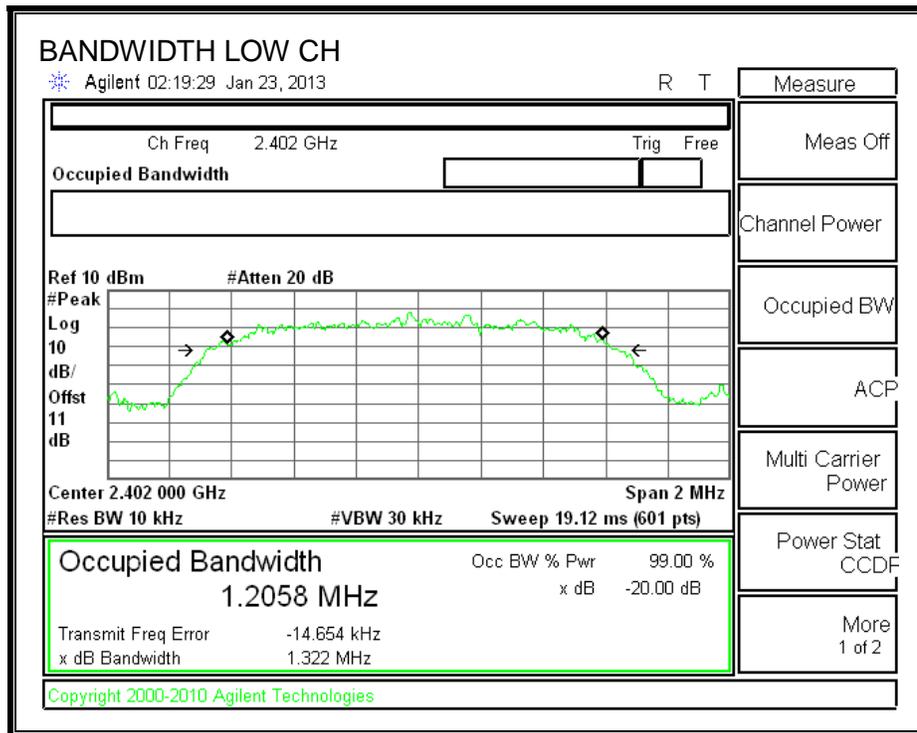

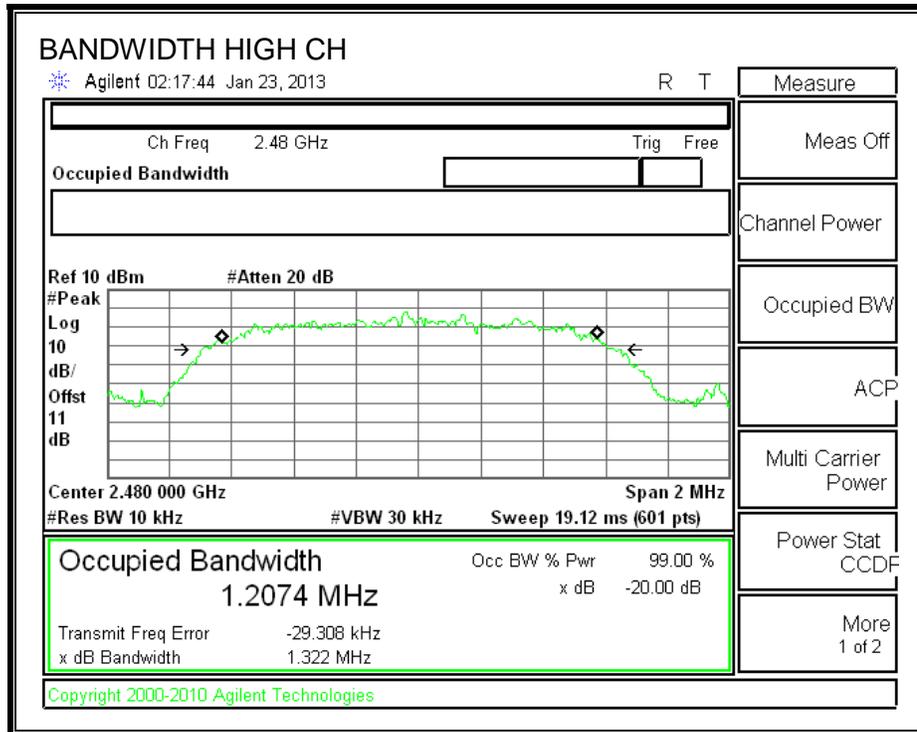

99% BANDWIDTH

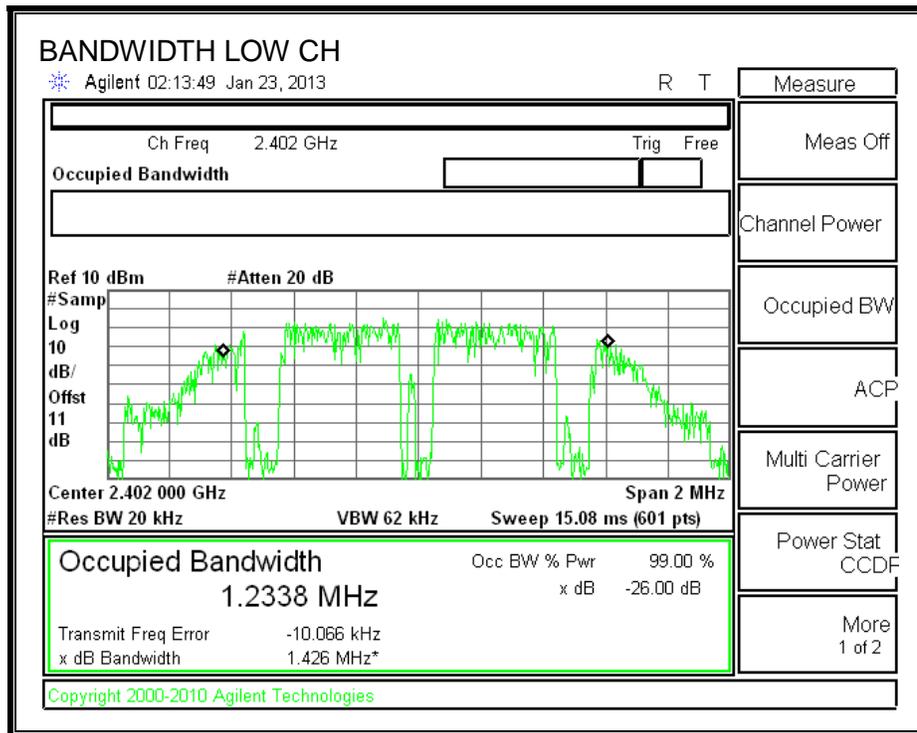

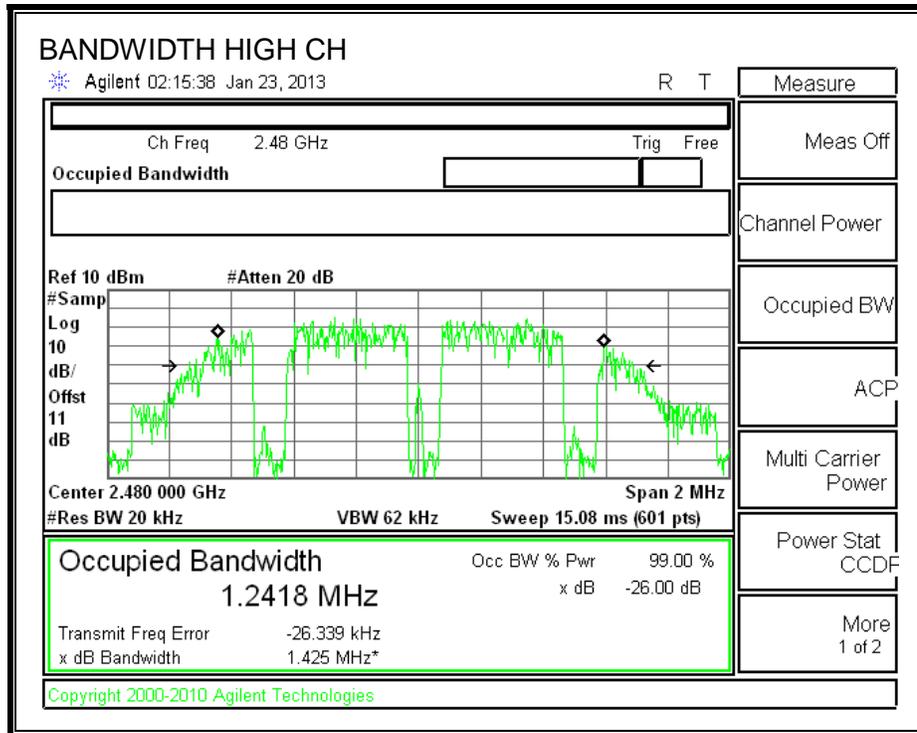

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

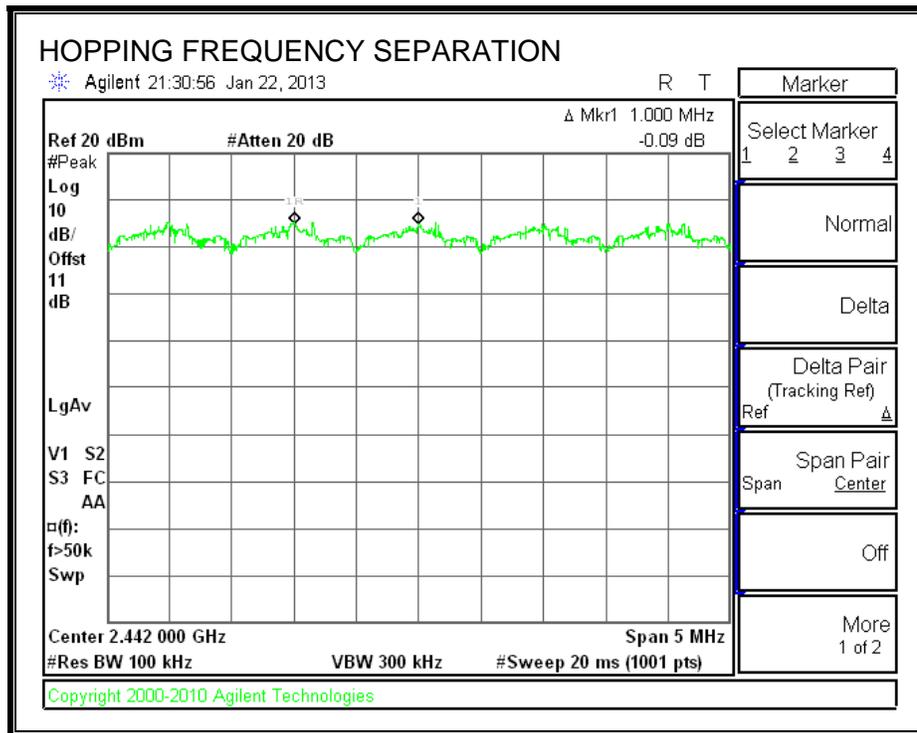

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

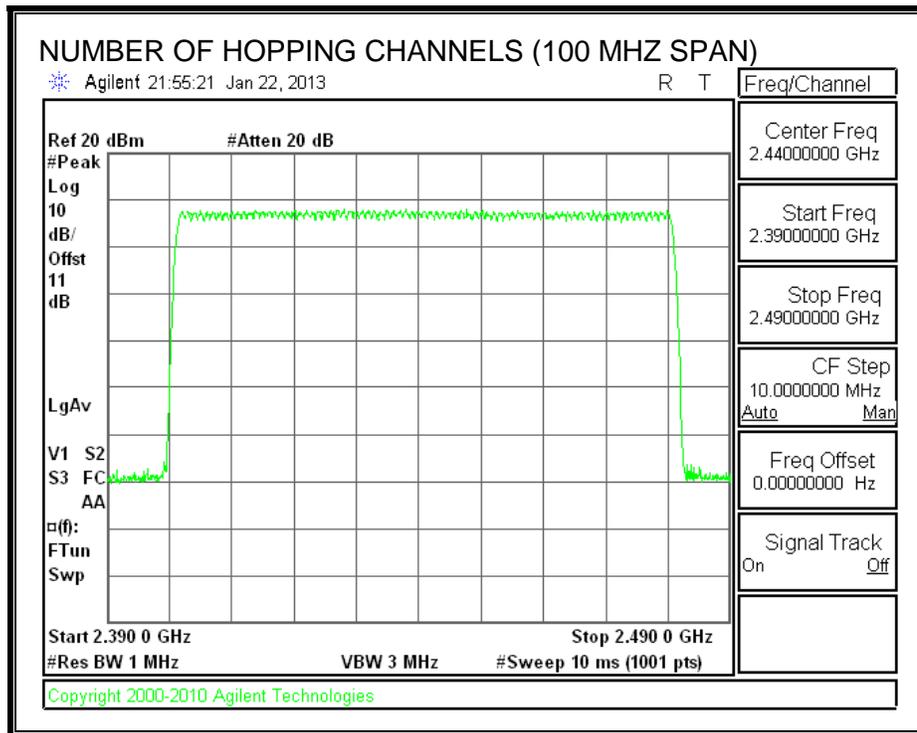

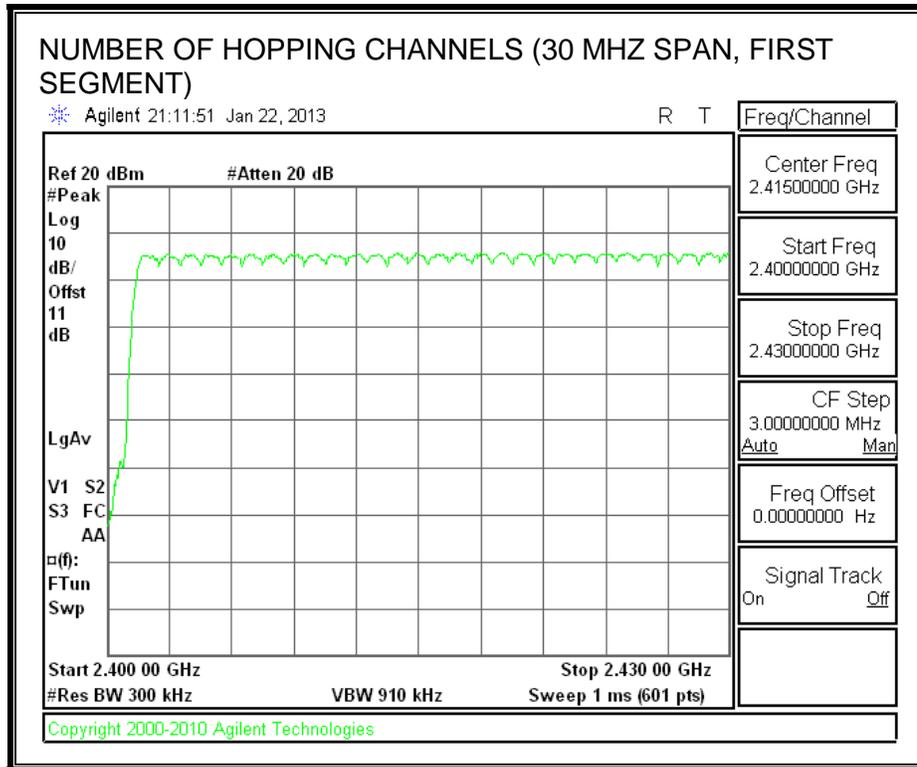

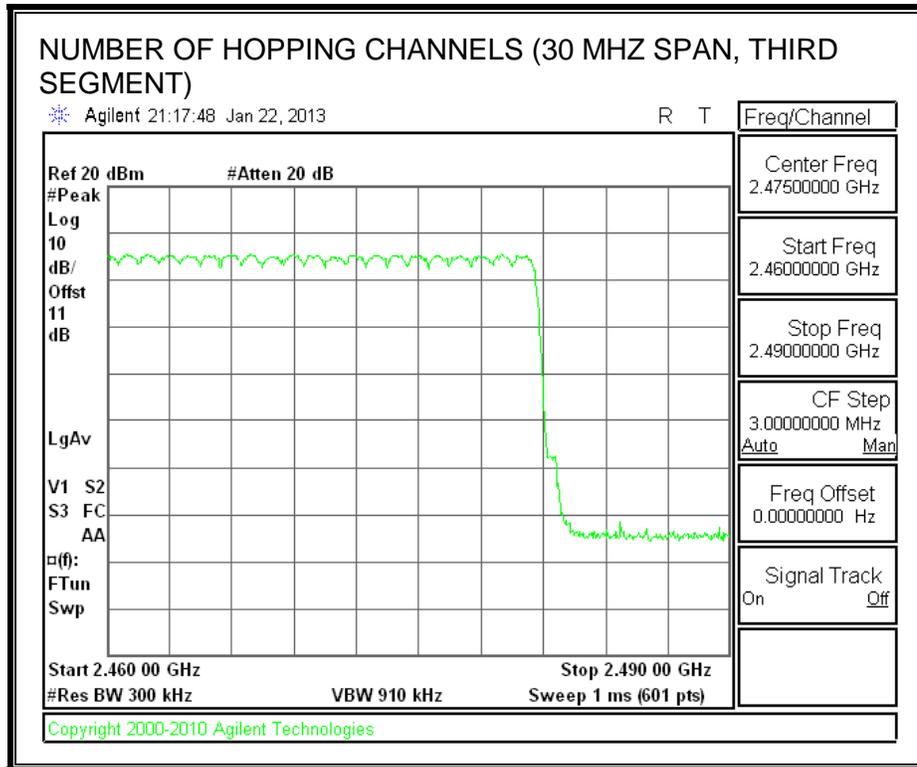

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$


8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.4	31	0.124	0.4	-0.276
DH3	1.665	14	0.233	0.4	-0.167
DH5	2.93	13	0.381	0.4	-0.019


PULSE WIDTH - DH1

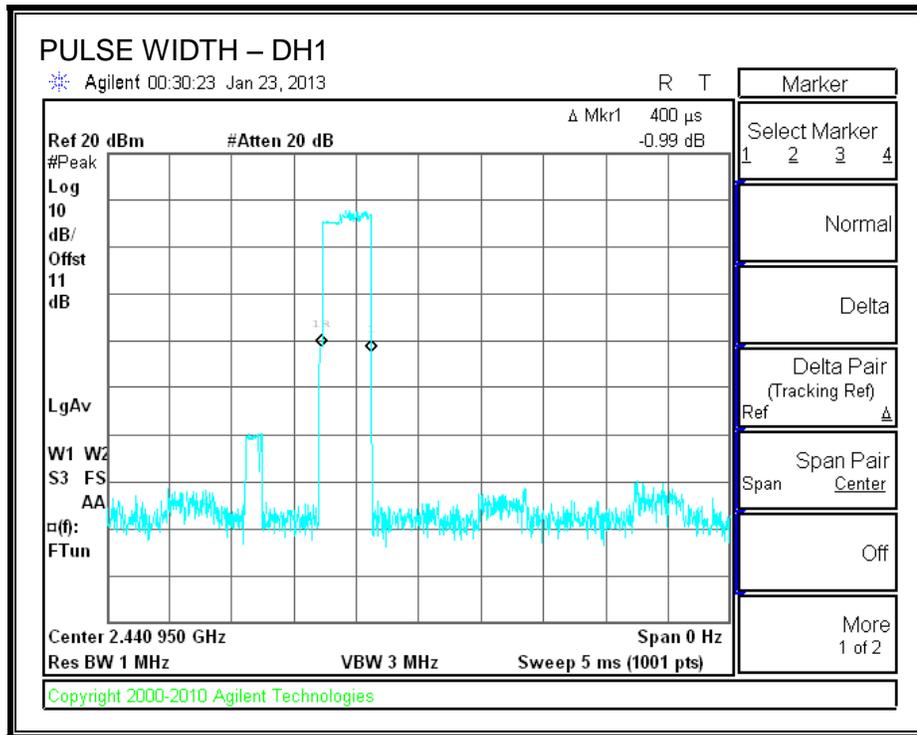


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

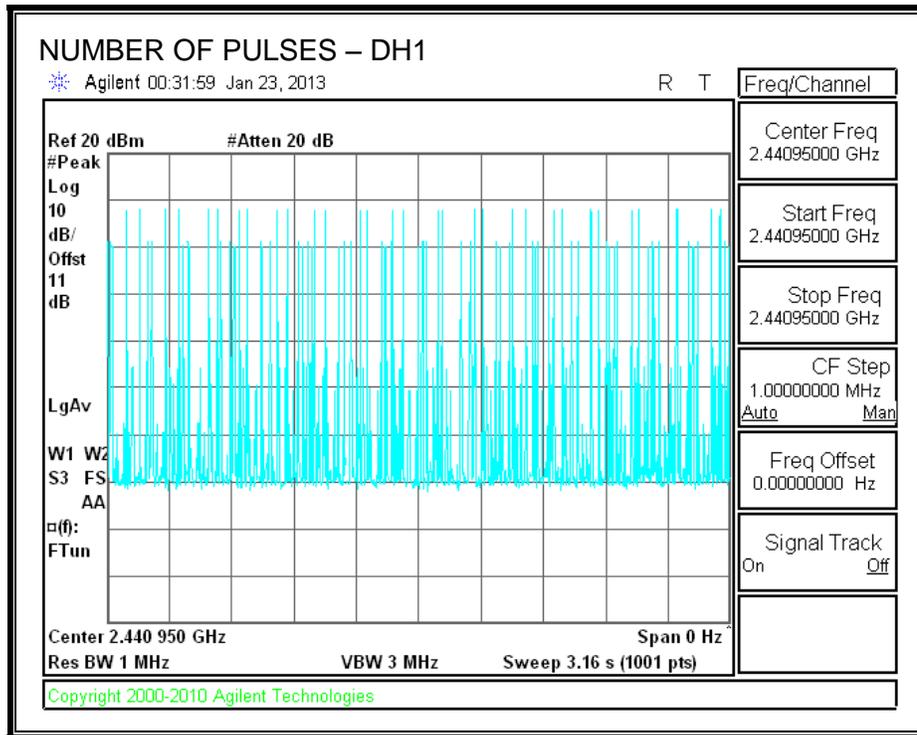


PULSE WIDTH – DH3

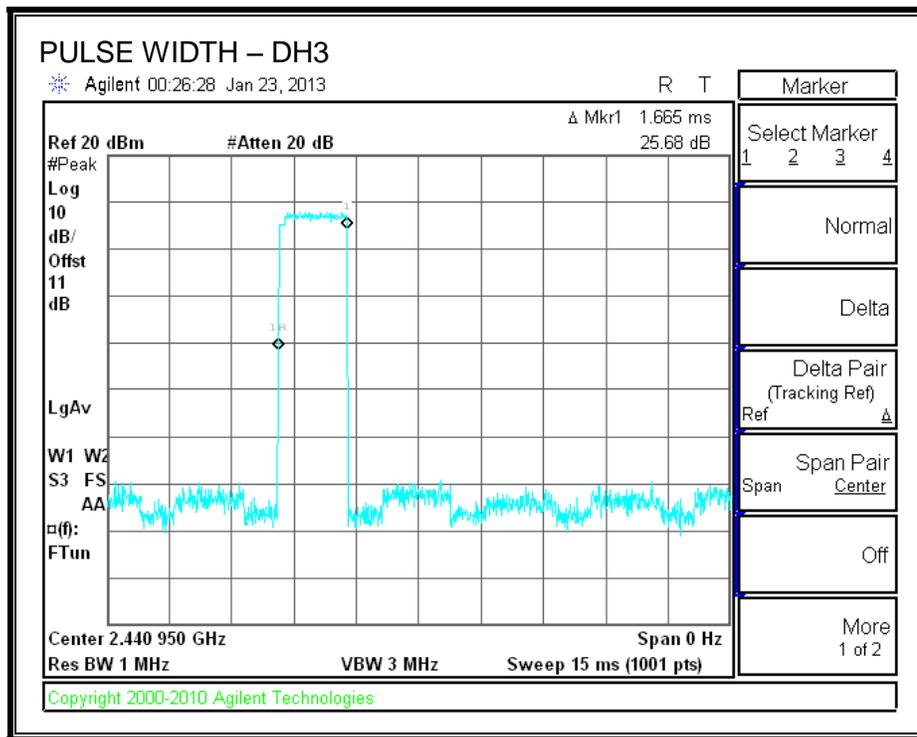


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

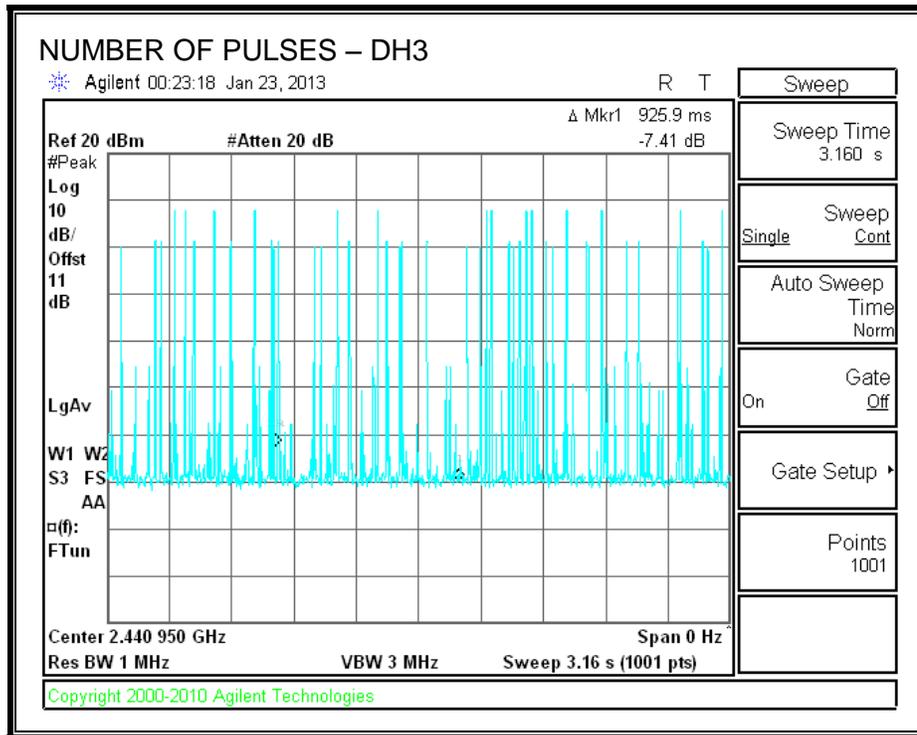

PULSE WIDTH – DH5

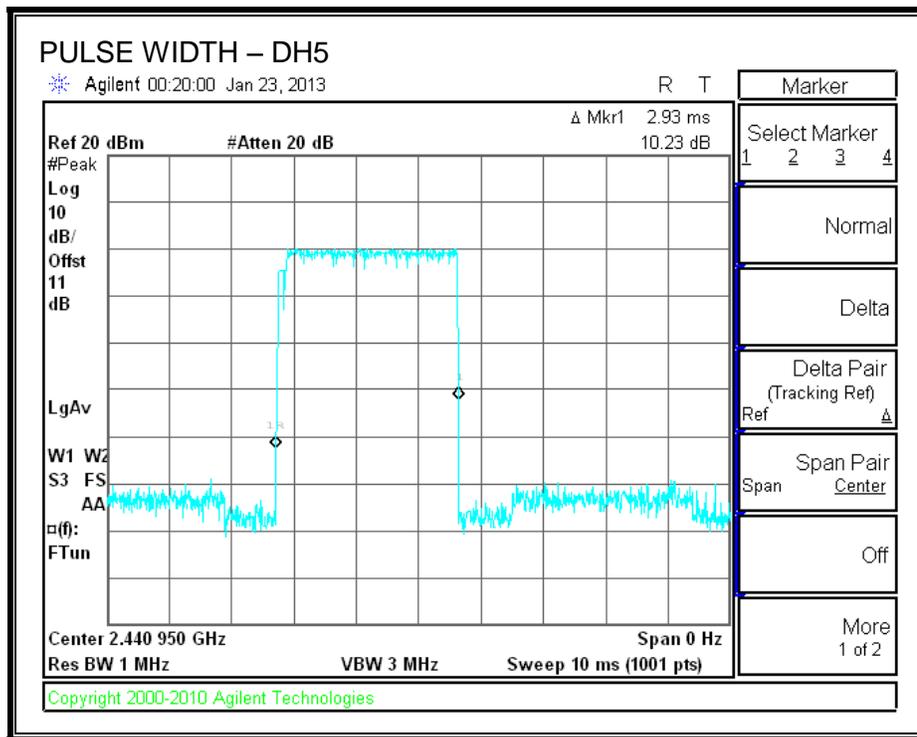

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

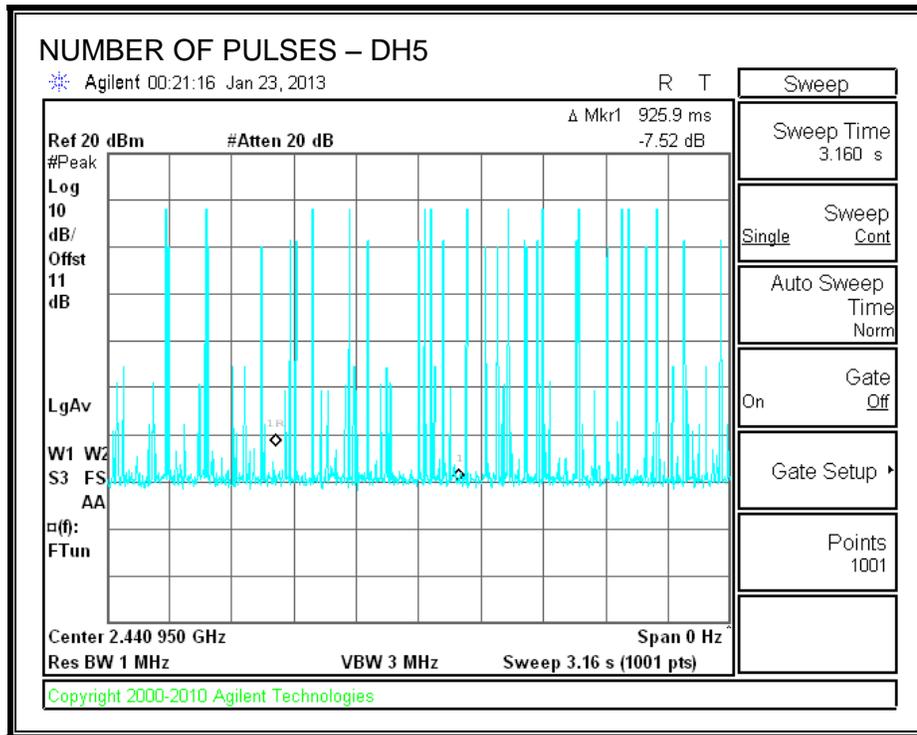

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.01	30	-21.99
Middle	2441	8.41	30	-21.59
High	2480	8.11	30	-21.89

OUTPUT POWER

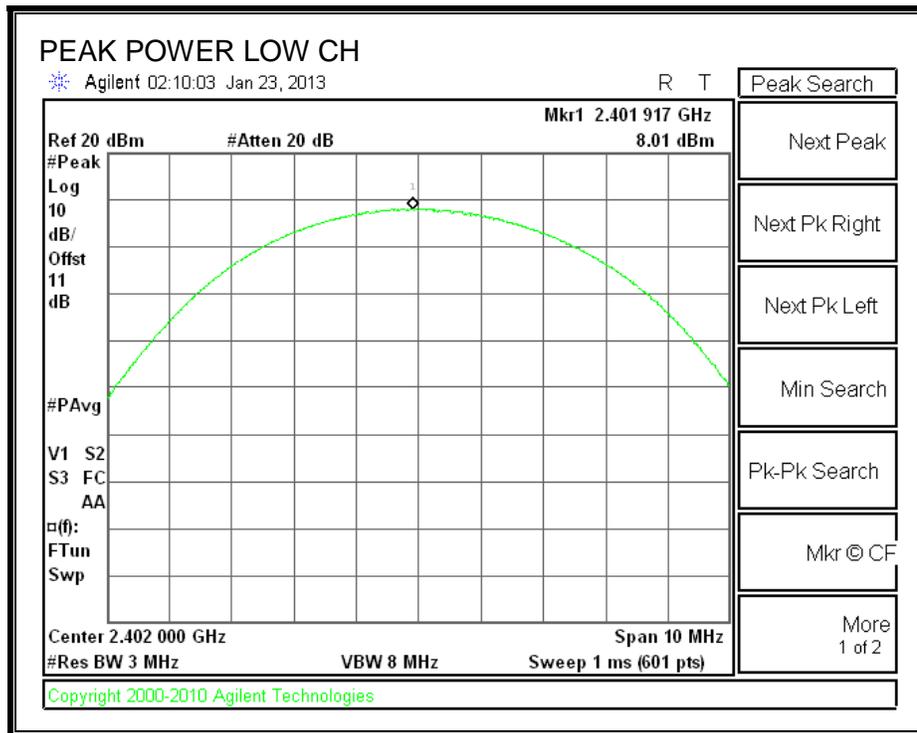

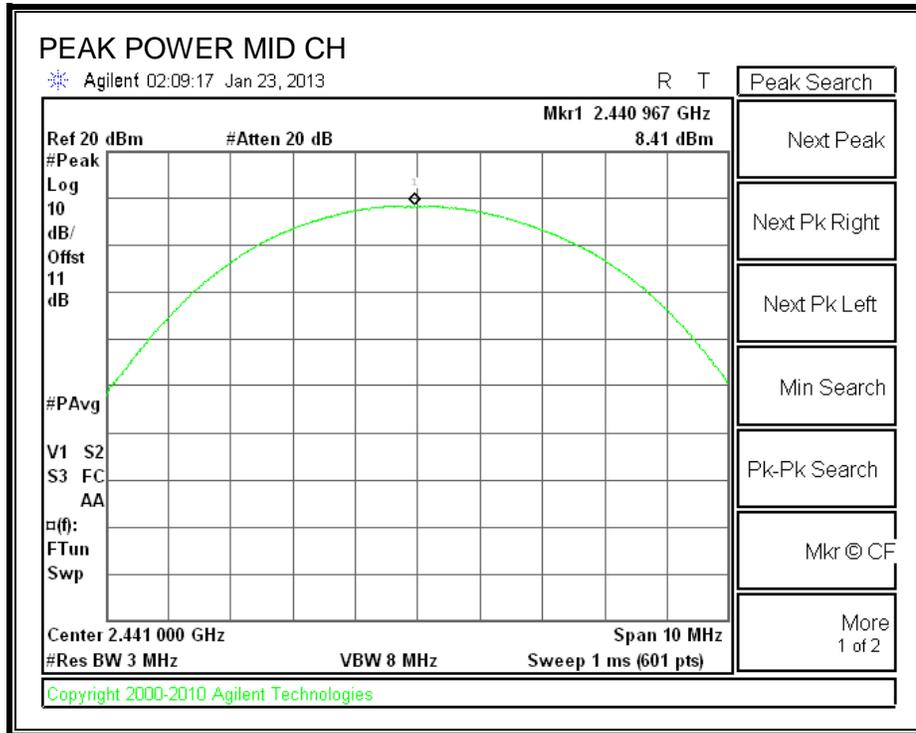

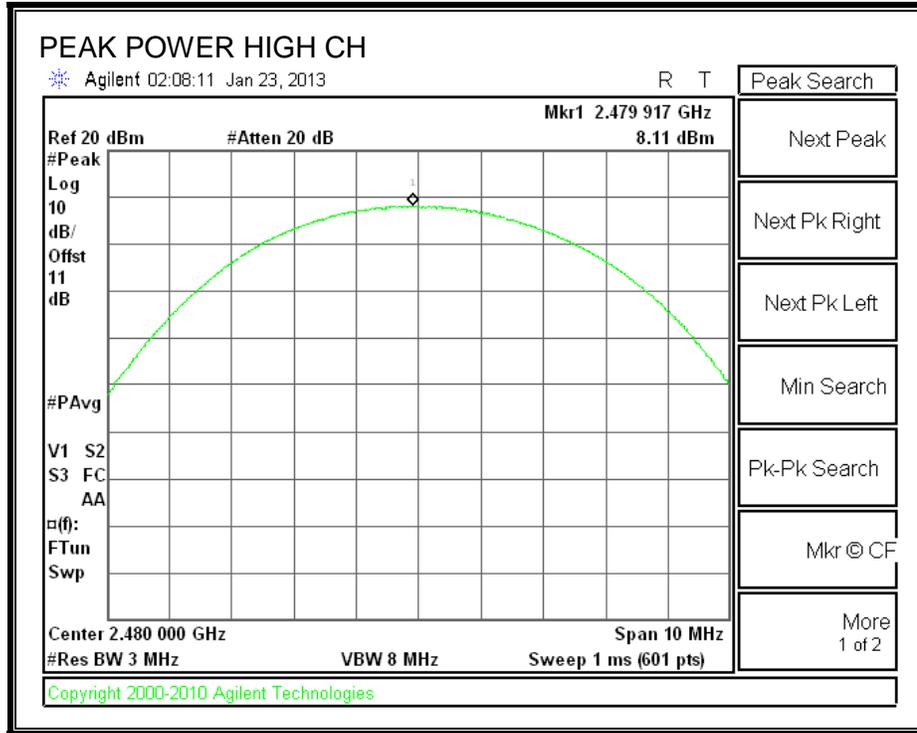

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	3.78
Middle	2441	4.19
High	2480	3.92

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

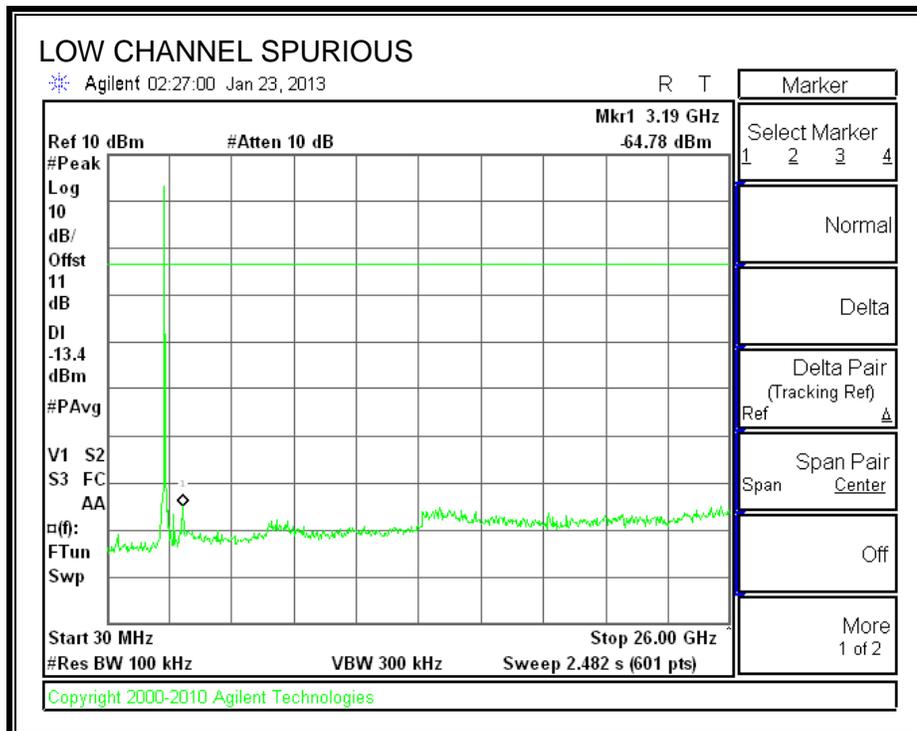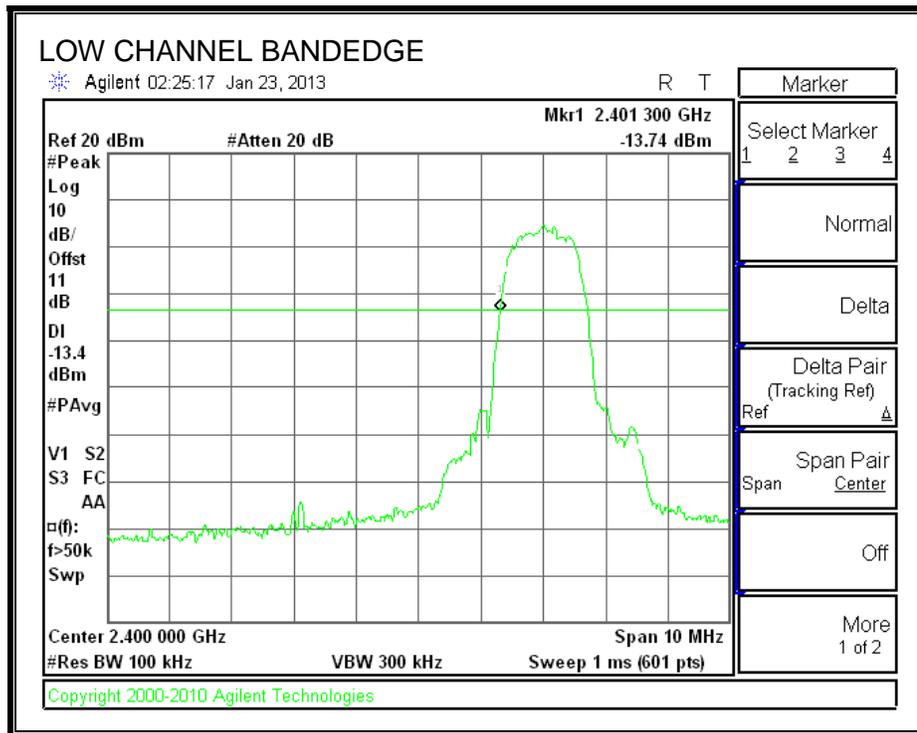


SPURIOUS EMISSIONS, MID CHANNEL

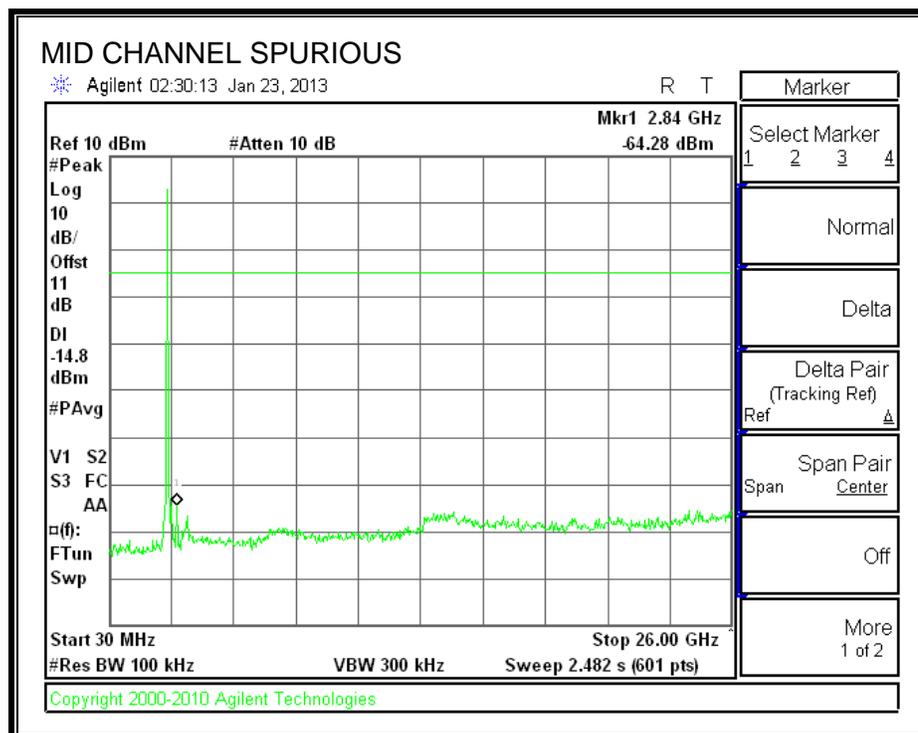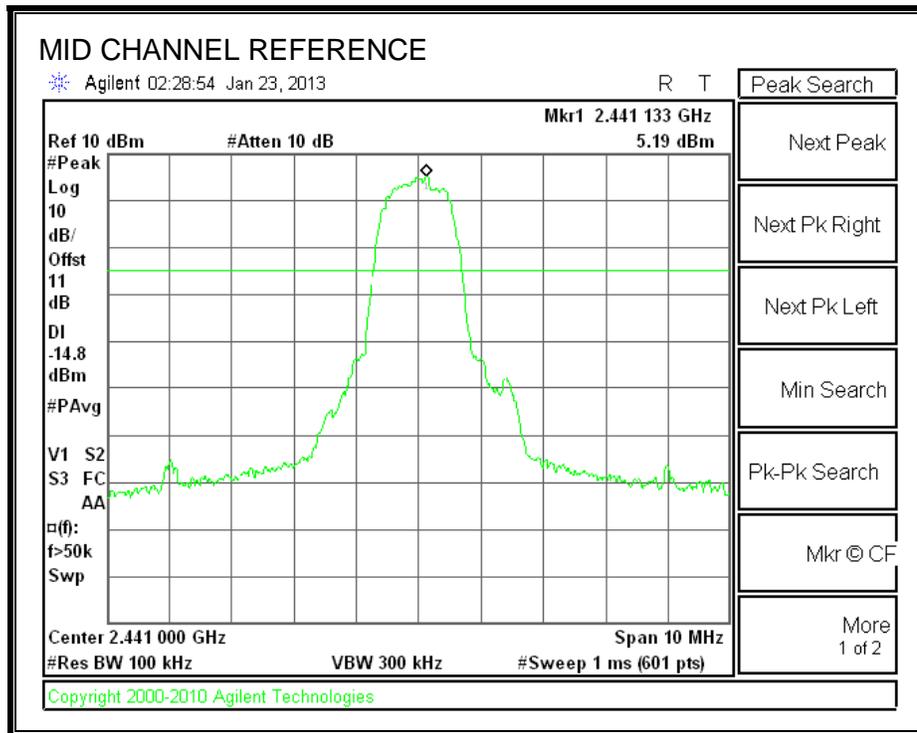


SPURIOUS EMISSIONS, HIGH CHANNEL

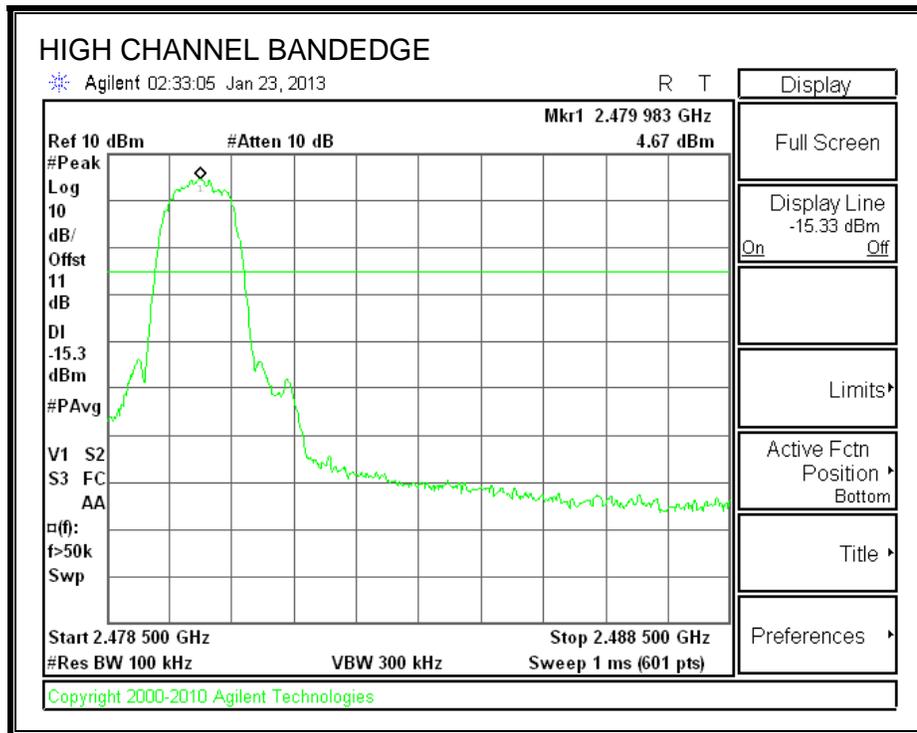

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

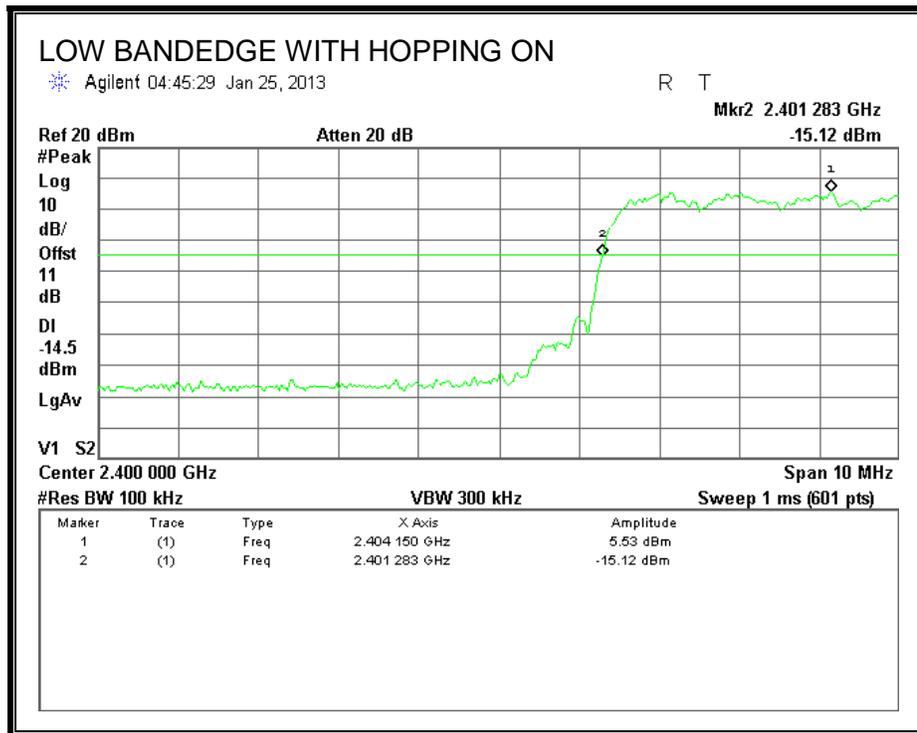

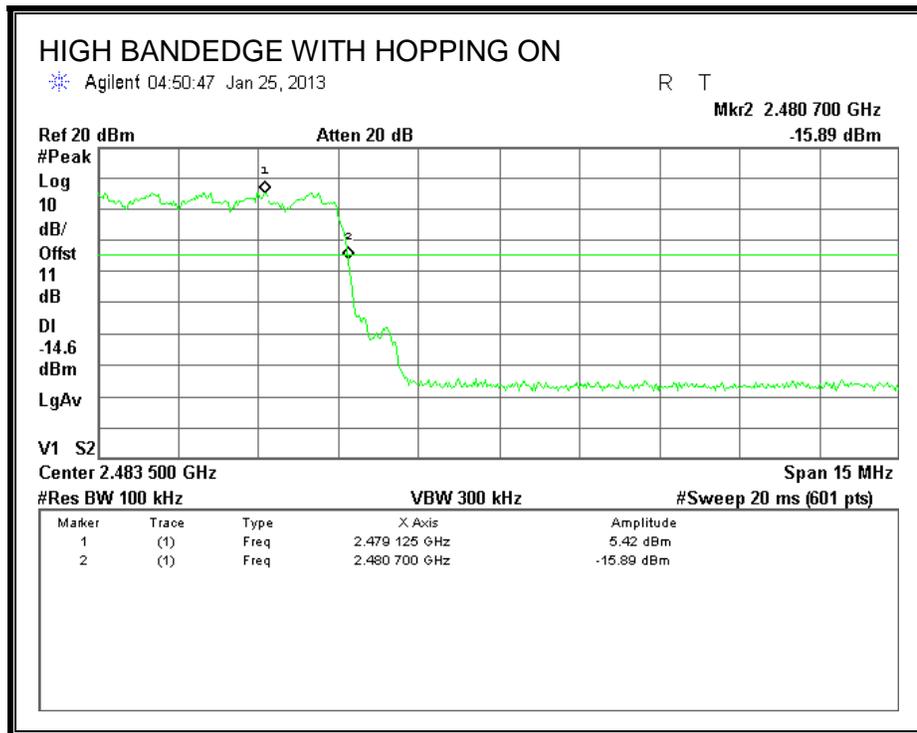

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

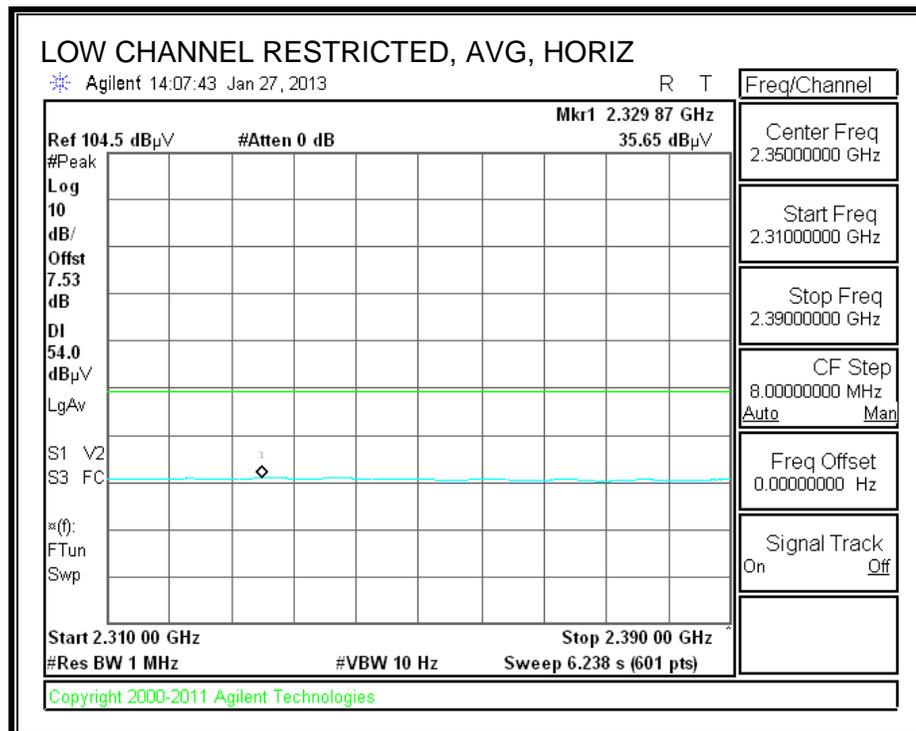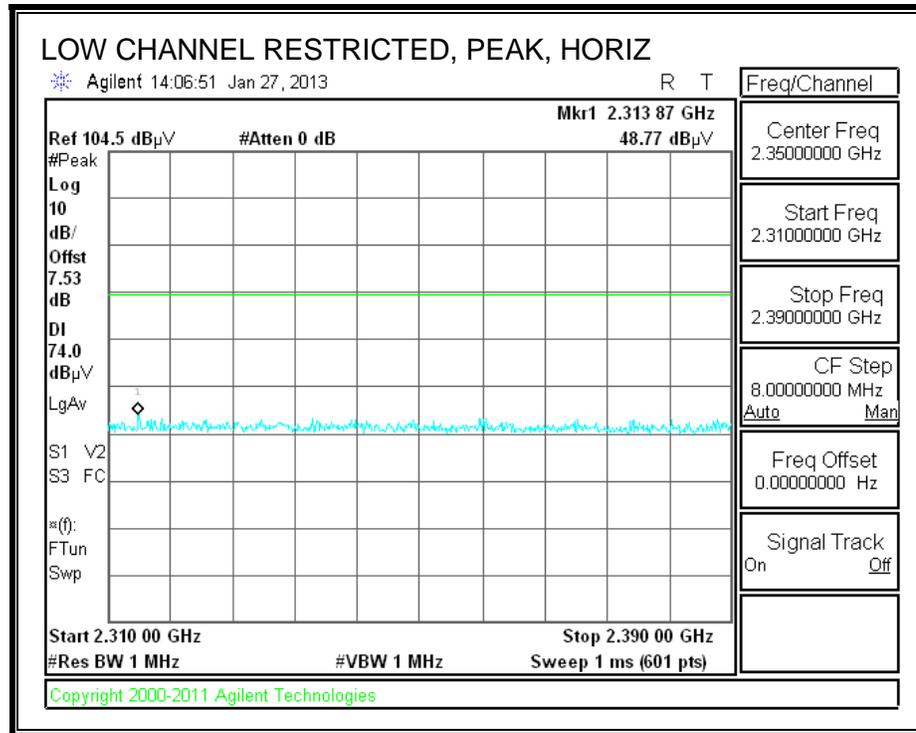



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

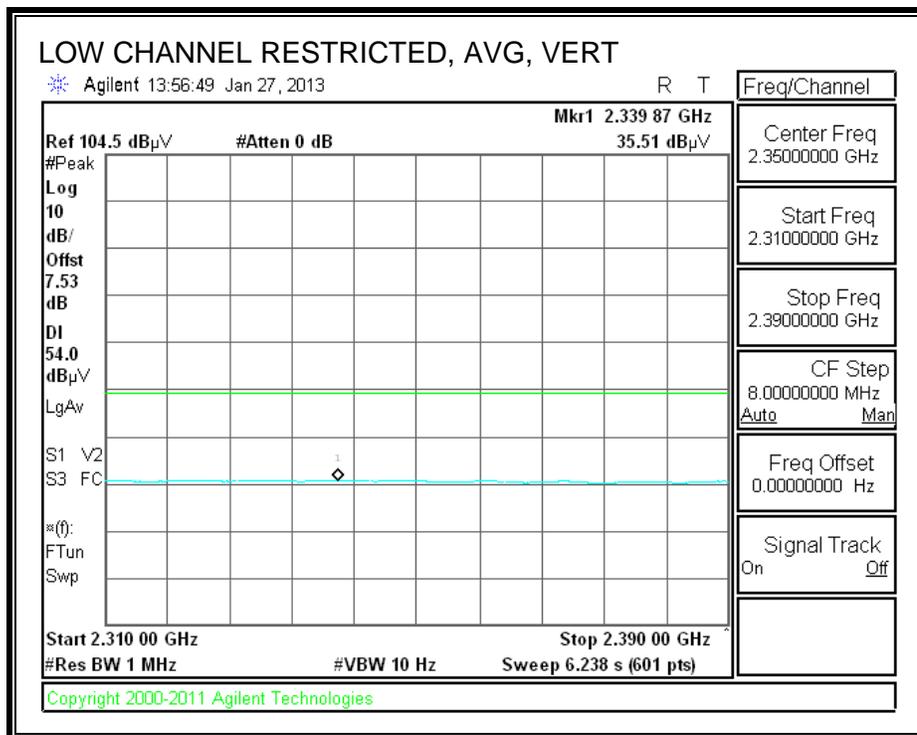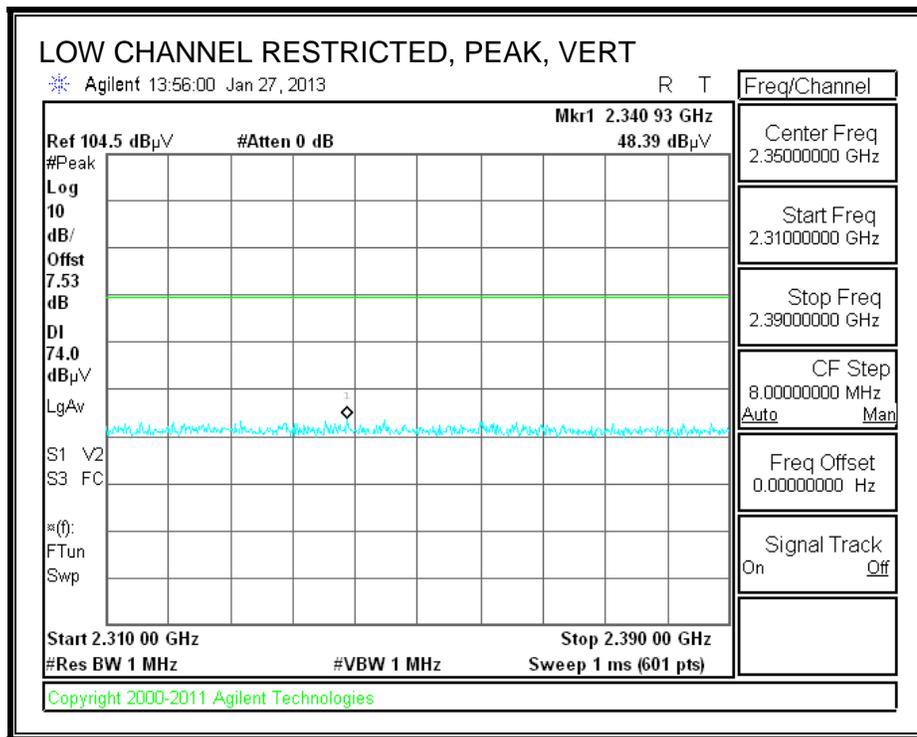

RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)

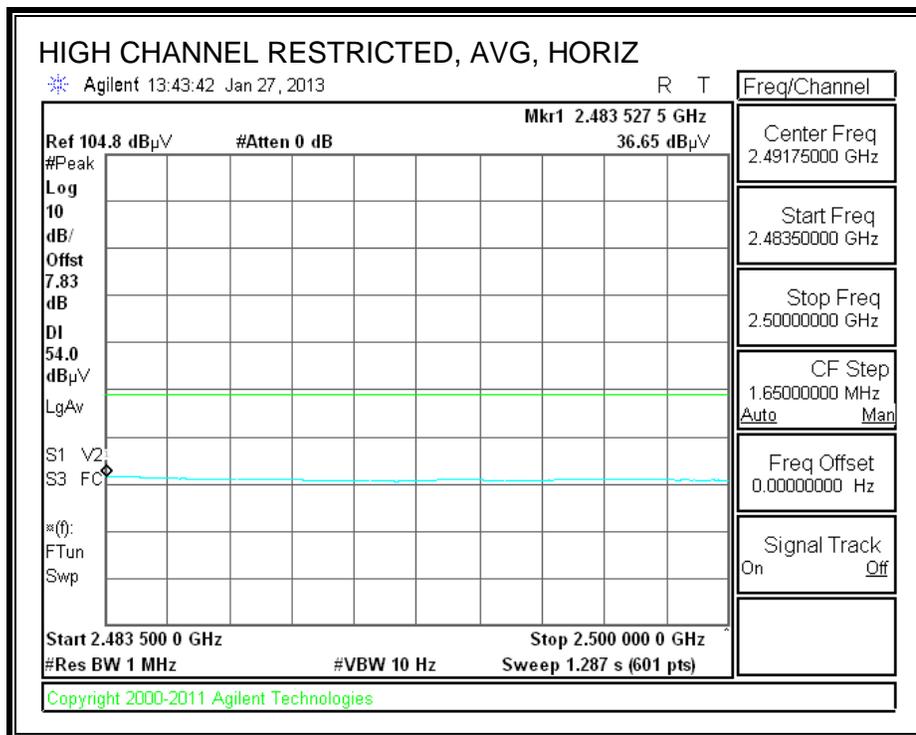
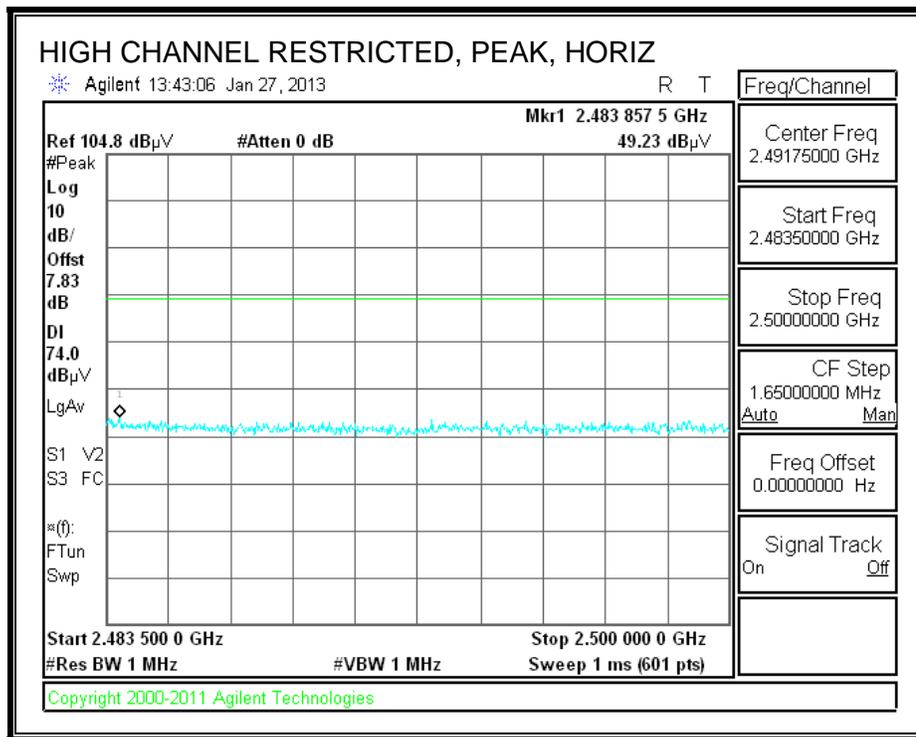


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

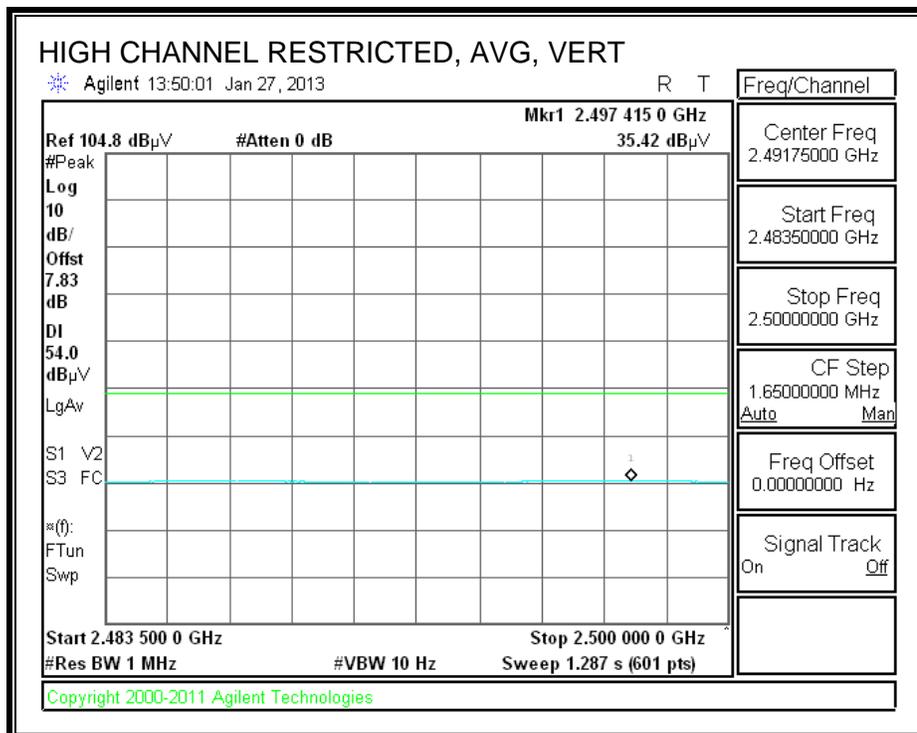
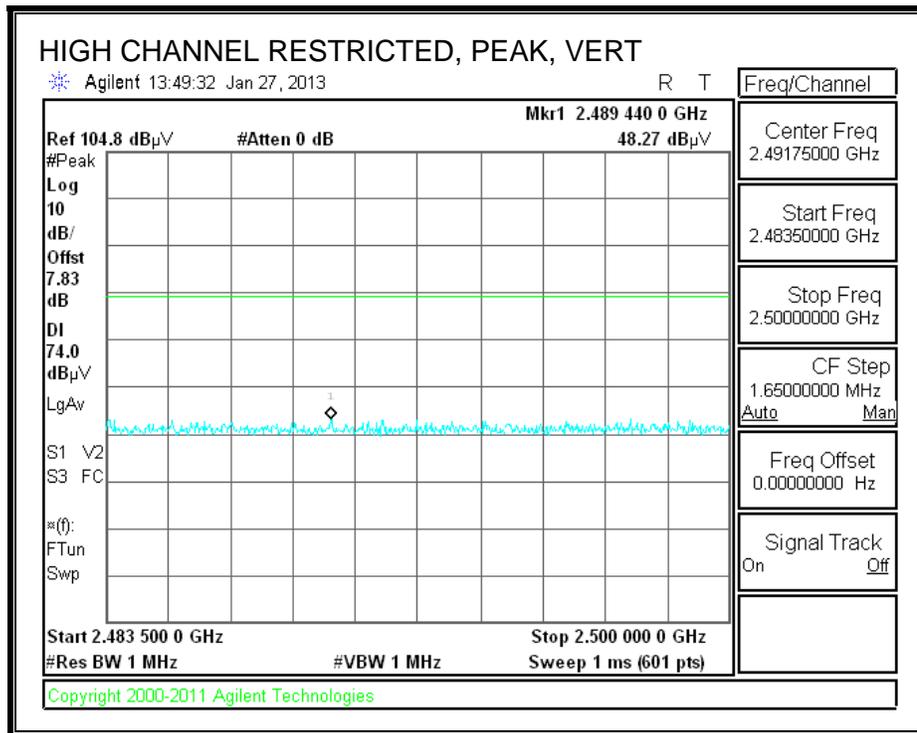


8.2.2. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

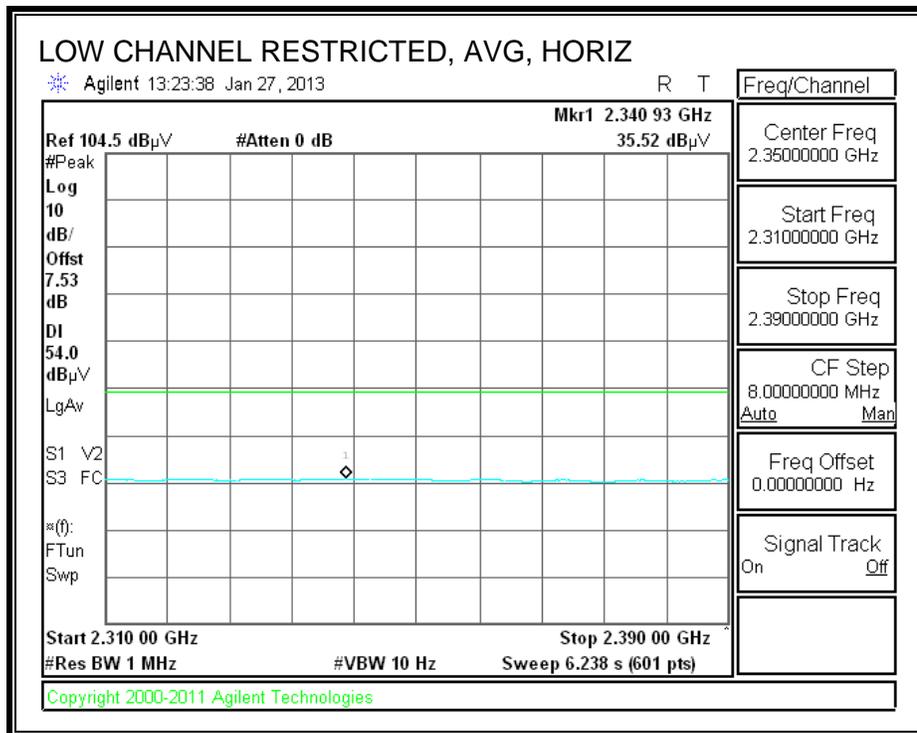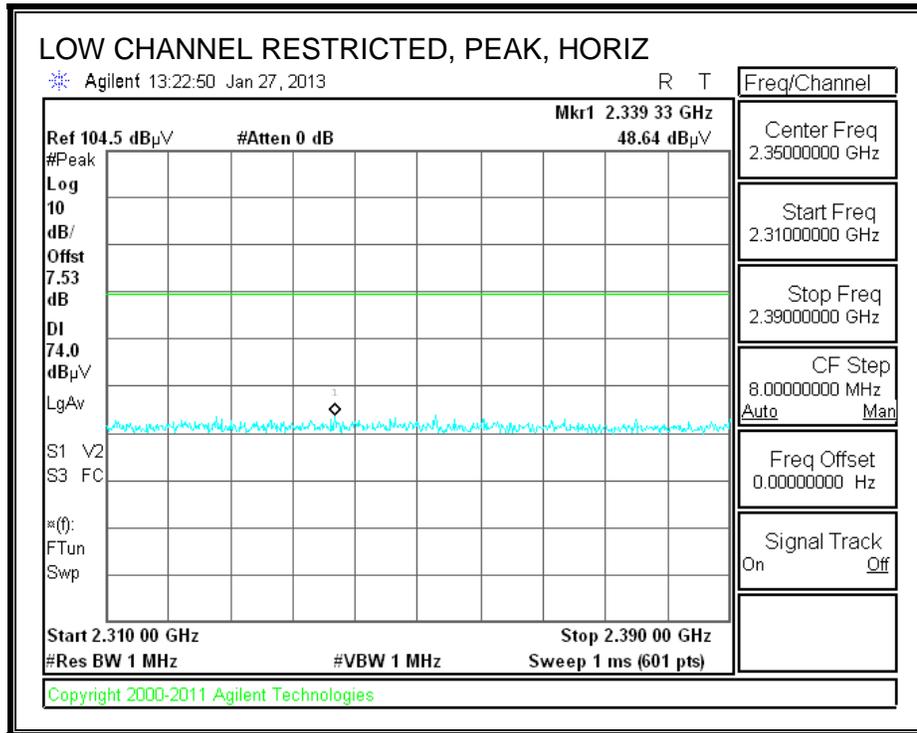



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

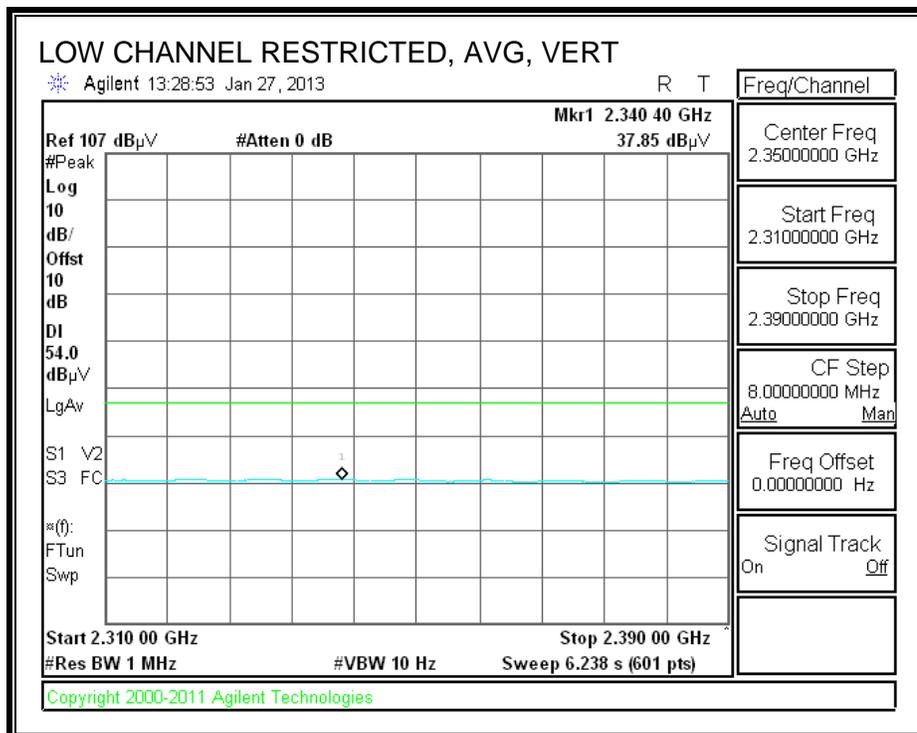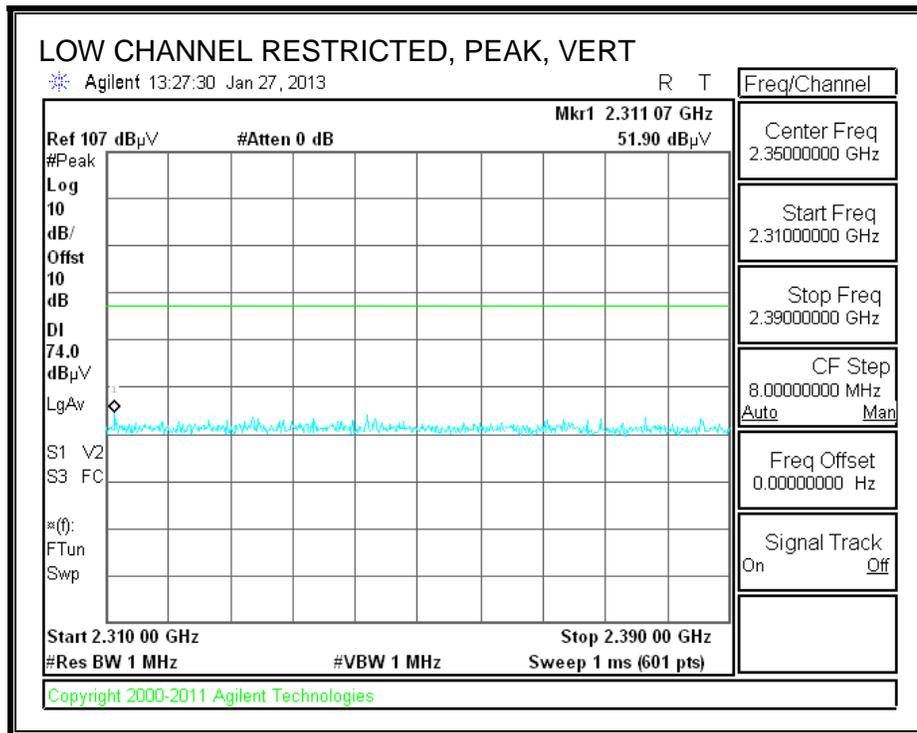

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

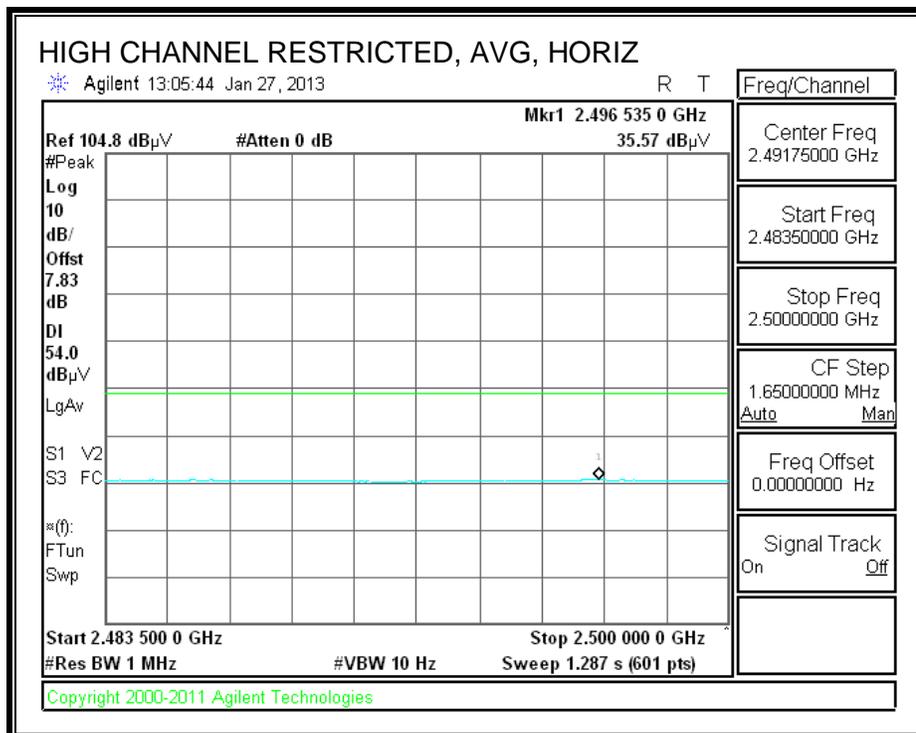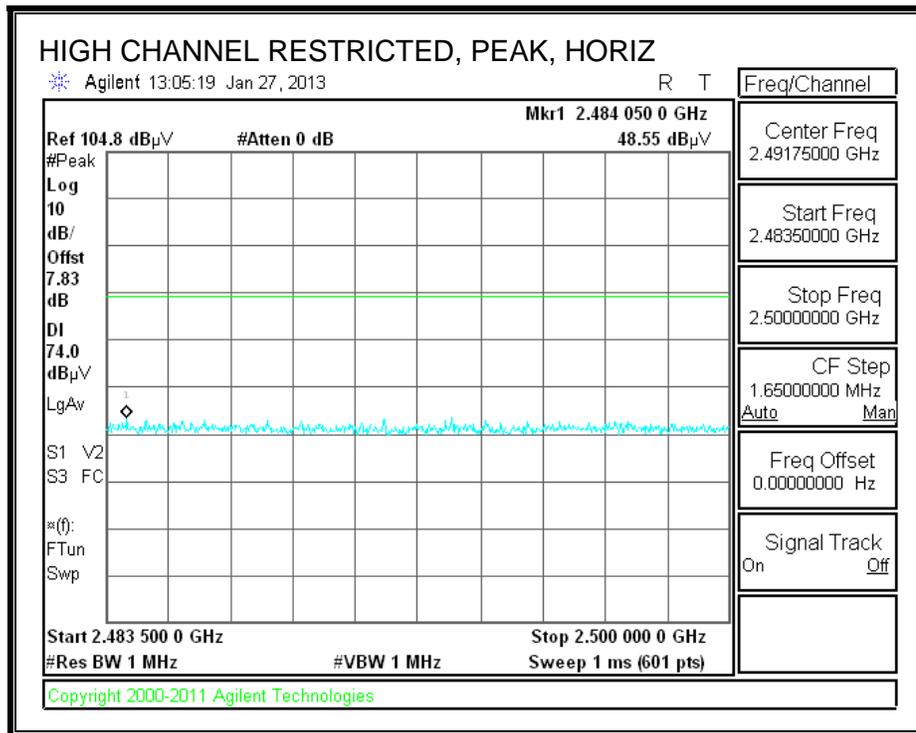

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

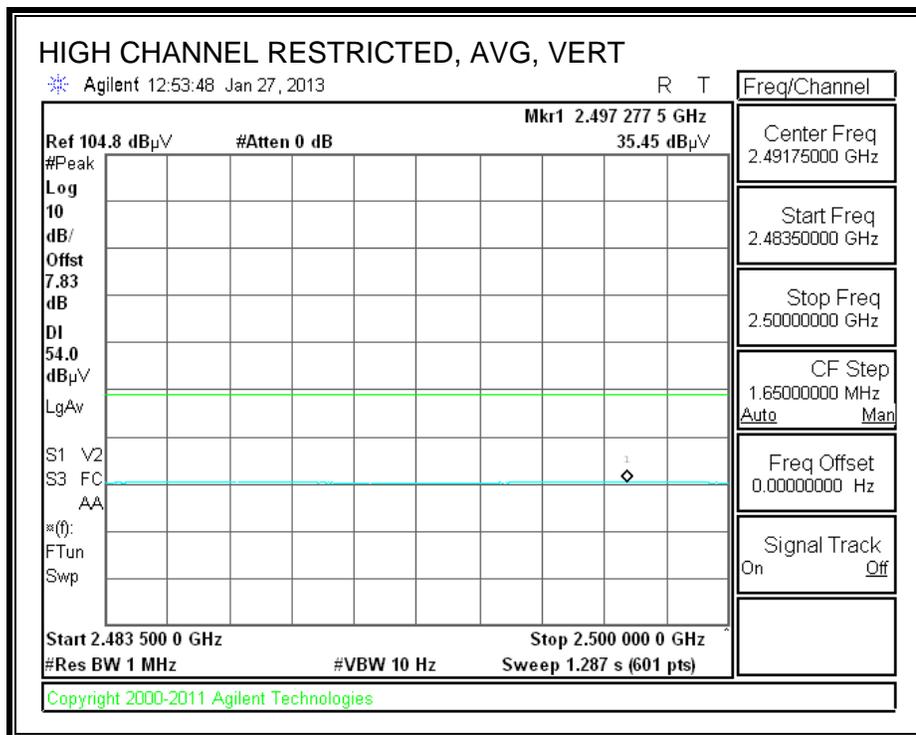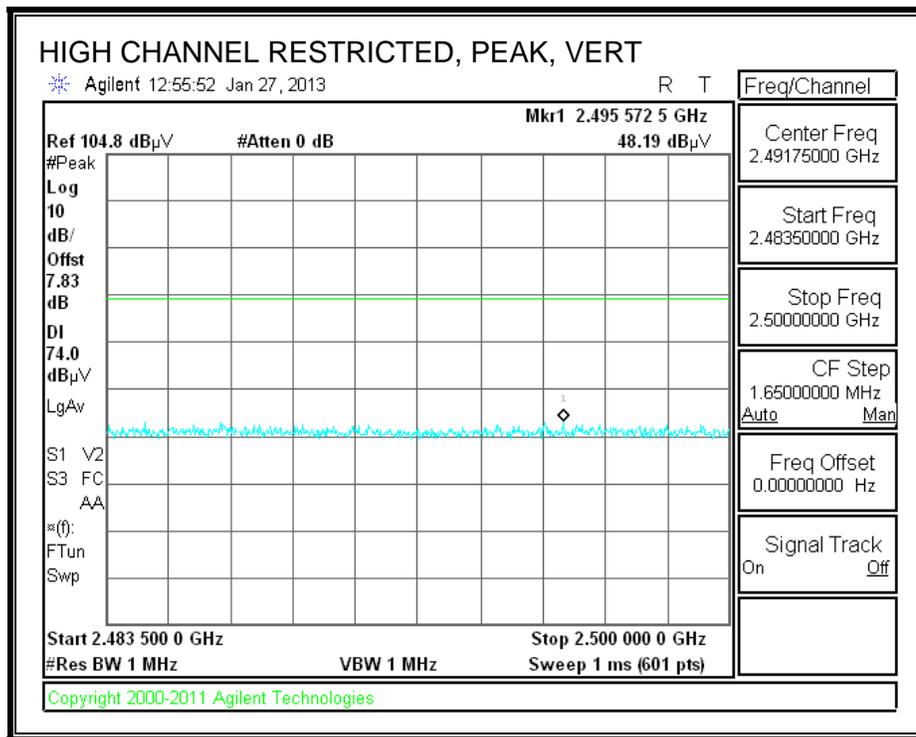


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber-A																		
Company:		SAMSUNG																
Project #:		12I14777																
Date:		1/27/2013																
Test Engineer:		Thanh Nguyen																
Configuration:		EUT, AC charger, Ear phone plug																
Mode:		Tx BT 8PSK																
Test Equipment:																		
Horn 1-18GHz			Pre-amplifer 1-26GHz			Pre-amplifer 26-40GHz			Horn > 18GHz			Limit						
T59; S/N: 3245 @3m			T145 Agilent 3008A0056						T39; ARA 18-26GHz; S/N:1013			FCC 15.209						
HI Frequency Cables																		
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz				
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001						
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)			
Low ch																		
4.804	3.0	47.8	44.7	33.1	6.8	-34.8	0.0	0.0	52.9	49.8	74	54	-21.1	-4.2	V			
7.206	3.0	30.8	22.7	35.6	8.4	-34.9	0.0	0.0	39.9	31.8	74	54	-34.1	-22.2	Noise floor			
4.804	3.0	47.0	44.1	33.1	6.8	-34.8	0.0	0.0	52.1	49.2	74	54	-21.9	-4.8	H			
7.206	3.0	29.9	22.7	35.6	8.4	-34.9	0.0	0.0	39.0	31.8	74	54	-35.0	-22.2	Noise floor			
Mid ch																		
4.880	3.0	45.10	42.4	33.1	6.8	-34.8	0.0	0.0	50.2	47.5	74	54	-23.8	-6.5	V			
7.320	3.0	30.9	23.3	35.8	8.4	-34.9	0.0	0.0	40.2	32.6	74	54	-33.8	-21.4	Noise floor			
4.880	3.0	46.4	42.4	33.1	6.8	-34.8	0.0	0.0	51.5	47.5	74	54	-22.5	-6.5	H			
7.320	3.0	30.6	22.6	35.8	8.4	-34.9	0.0	0.0	39.9	31.9	74	54	-34.1	-22.1	Noise floor			
High ch																		
4.960	3.0	45.7	42.9	33.2	6.3	-34.8	0.0	0.0	50.4	47.6	74	54	-23.6	-6.4	V			
7.440	3.0	30.8	23.6	36.0	8.4	-34.9	0.0	0.0	40.3	33.1	74	54	-33.7	-20.9	Noise floor			
4.960	3.0	46.7	42.3	33.2	6.3	-34.8	0.0	0.0	51.4	47.0	74	54	-22.6	-7.0	H			
7.440	3.0	33.6	26.1	36.0	8.4	-34.9	0.0	0.0	43.1	35.6	74	54	-30.9	-18.4	Noise floor			
Rev. 11.10.11																		
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit					
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit					
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit					
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit					
CL	Cable Loss					HPF	High Pass Filter											

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

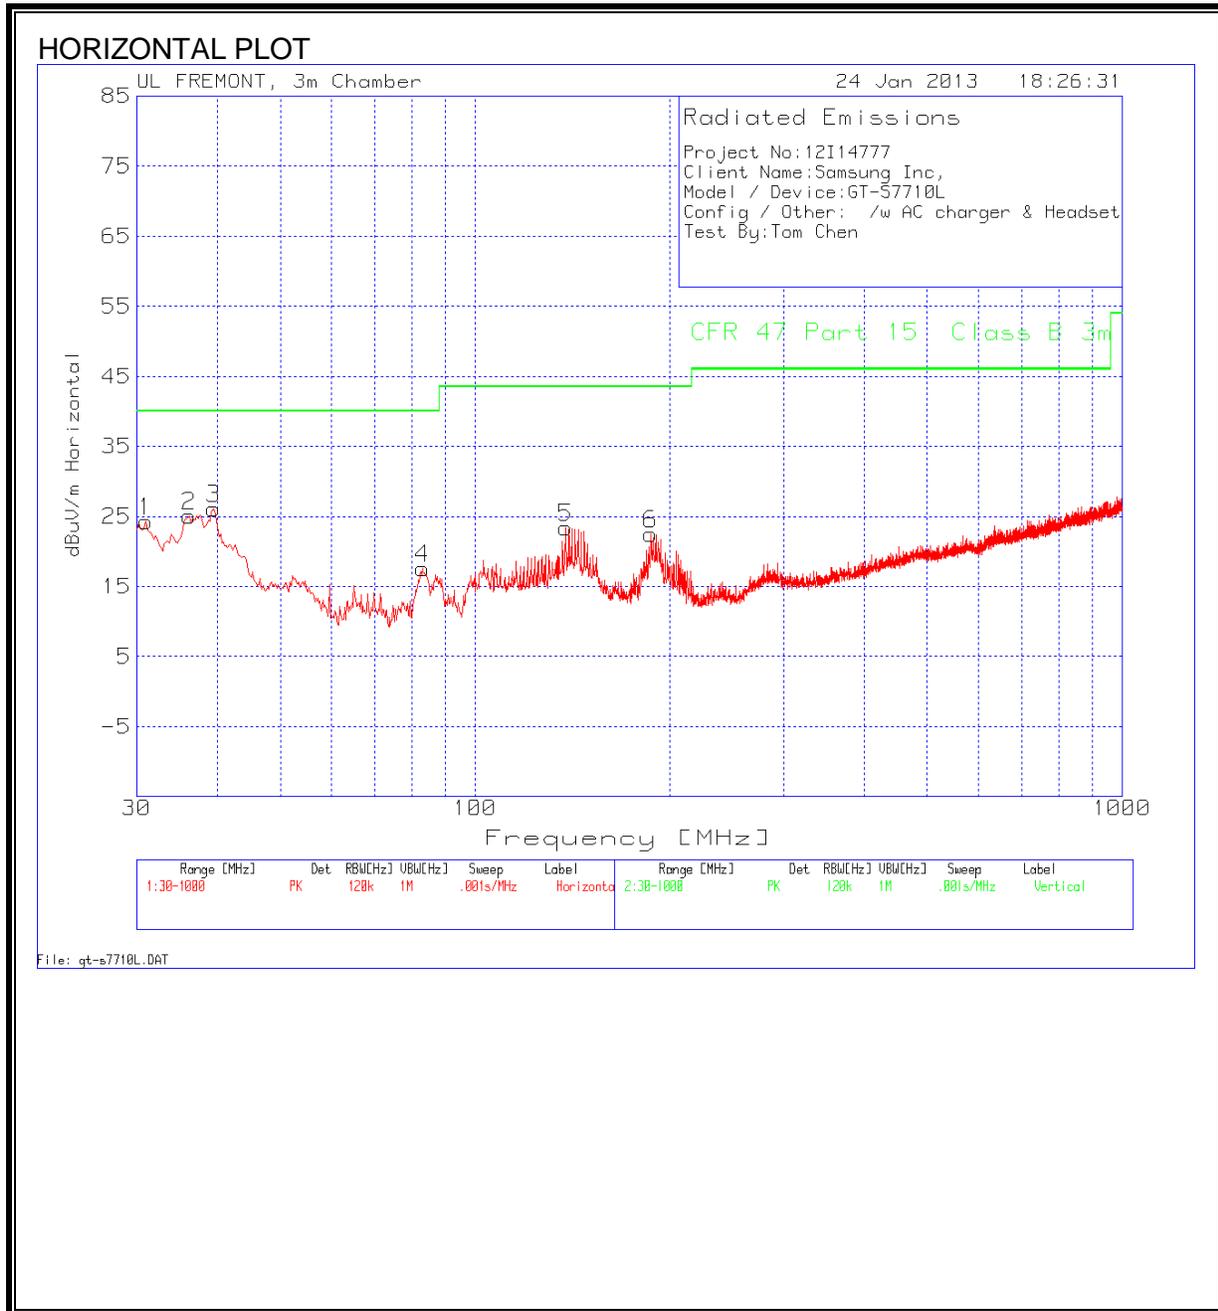

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

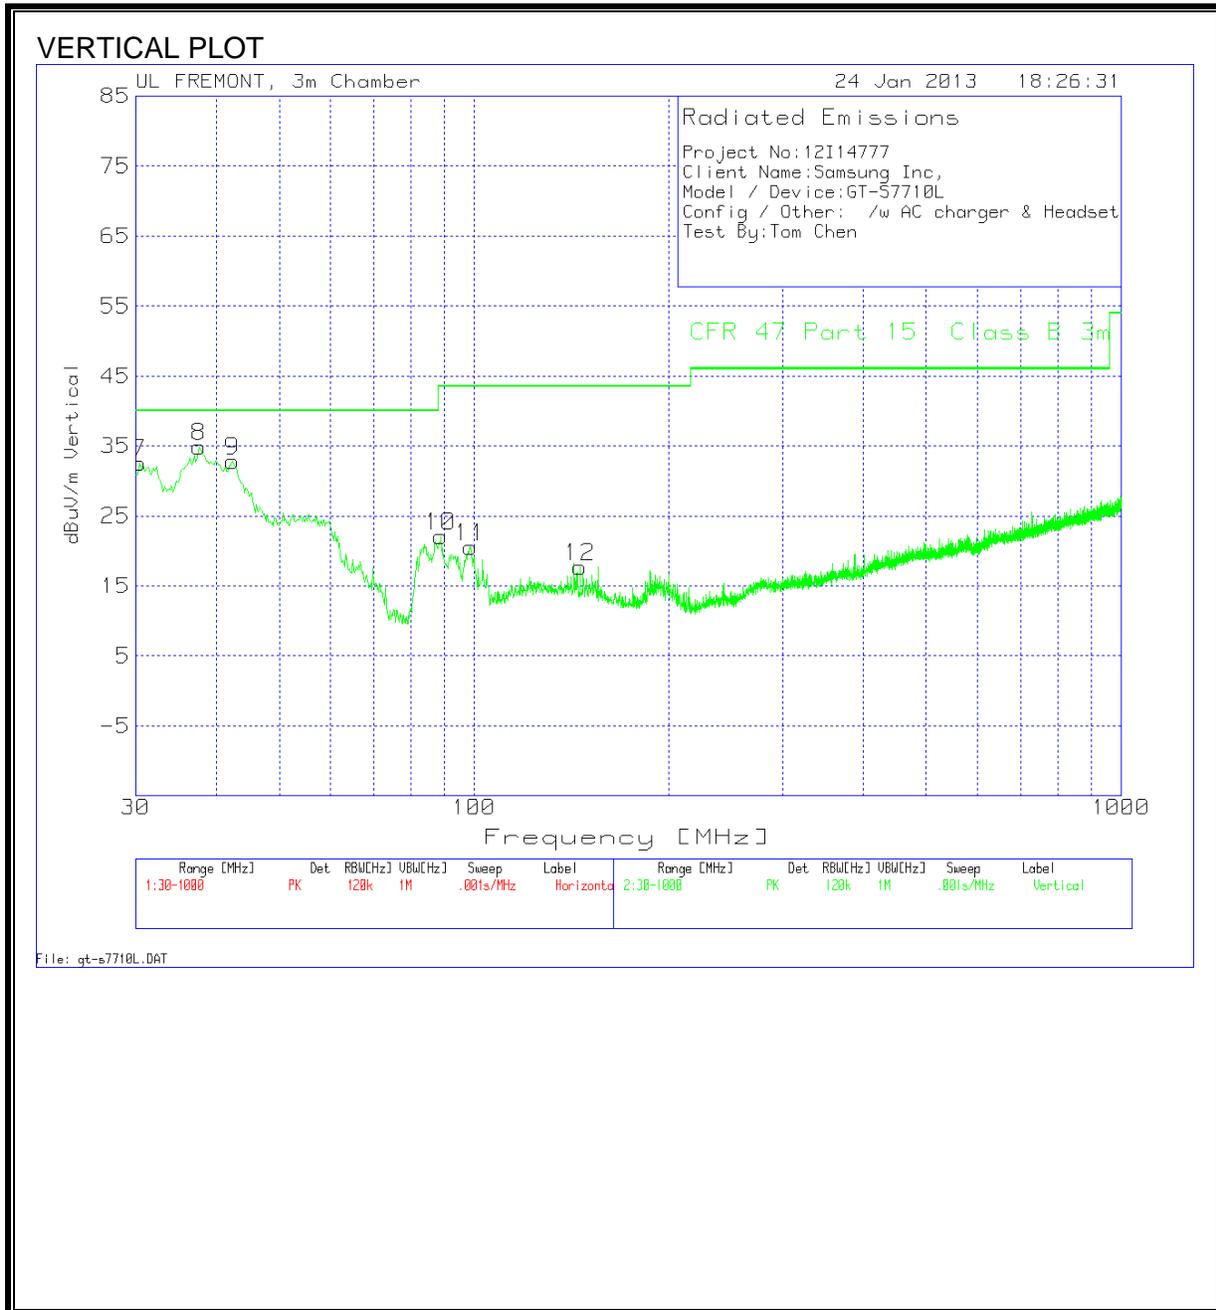

HORIZONTAL AND VERTICAL DATA

Project No:12I14777
 Client Name:Samsung Inc,
 Model / Device:GT-S7710L
 Config / Other: /w AC charger & Headset
 Test By:Tom Chen

Horizontal 30 - 1000MHz

Marker No.	Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Polarity
1	30.9692	31.31	PK	-27.5	20.5	24.31	40	-15.69	Horz
2	36.203	35.82	PK	-27.4	16.6	25.02	40	-14.98	Horz
3	39.4984	39.3	PK	-27.4	14.2	26.1	40	-13.9	Horz
4	82.9197	37.06	PK	-27	7.5	17.56	40	-22.44	Horz
5	137.9716	36.56	PK	-26.5	13.3	23.36	43.5	-20.14	Horz
6	187.2082	37.45	PK	-25.9	10.9	22.45	43.5	-21.05	Horz

Vertical 30 - 1000MHz

Marker No.	Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Polarity
7	30.3877	39.17	PK	-27.5	20.9	32.57	40	-7.43	Vert
8	37.56	46.74	PK	-27.4	15.6	34.94	40	-5.06	Vert
9	42.4061	48.26	PK	-27.4	12	32.86	40	-7.14	Vert
10	88.9289	41.61	PK	-27	7.5	22.11	43.5	-21.39	Vert
11	98.8149	37.92	PK	-26.9	9.5	20.52	43.5	-22.98	Vert
12	145.9193	31.67	PK	-26.4	12.5	17.77	43.5	-25.73	Vert

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Project No:12I14770										
Client Name: Samsung										
Model/Device:GT-S6312, 2.4G TX Worst case										
Test Volt/Freq:120 Vac / 60Hz										
Test By:Tom Chen										
Line-L1 .15 - 30MHz										
							Class B		Class B	
Test Freq.	Meter	Detector	LISN	Path	Corrected	Quasi-Peak	Quasi-Peak	Average	Average	
MHz	Reading	Type	Factor	Loss (dB)	Reading	Limit	Margin	Limit	Margin	
	dB(μV)		dB		dB(μV)	dB(μV)	dB	dB(μV)	dB	
0.618	49.31	PK	0.1	0	49.41	56	-6.59	-	-	
0.618	33.52	Av	0.1	0	33.62	-	-	46	-12.38	
2.634	53.16	PK	0.1	0.1	53.36	56	-2.64	-	-	
2.634	36.11	Av	0.1	0.1	36.31	-	-	46	-9.69	
2.6745	50.79	PK	0.1	0.1	50.99	56	-5.01	-	-	
2.6745	36.31	Av	0.1	0.1	36.51	-	-	46	-9.49	
Line-L2 .15 - 30MHz										
							Class B		Class B	
Test Freq.	Meter	Detector	LISN	Path	Corrected	Quasi-Peak	Quasi-Peak	Average	Average	
MHz	Reading	Type	Factor	Loss (dB)	Reading	Limit	Margin	Limit	Margin	
	dB(μV)		dB		dB(μV)	dB(μV)	dB	dB(μV)	dB	
2.2695	47.91	PK	0.1	0.1	48.11	56	-7.89	-	-	
2.2695	29.69	Av	0.1	0.1	29.89	-	-	46	-16.11	
2.6205	48.85	PK	0.1	0.1	49.05	56	-6.95	-	-	
2.6205	30.31	Av	0.1	0.1	30.51	-	-	46	-15.49	
4.596	48.07	PK	0.1	0.1	48.27	56	-7.73	-	-	
4.596	27.24	Av	0.1	0.1	27.44	-	-	46	-18.56	
PK - Peak detector										
QP - Quasi-Peak detector										
Av - Average detector										

LINE 1 RESULTS

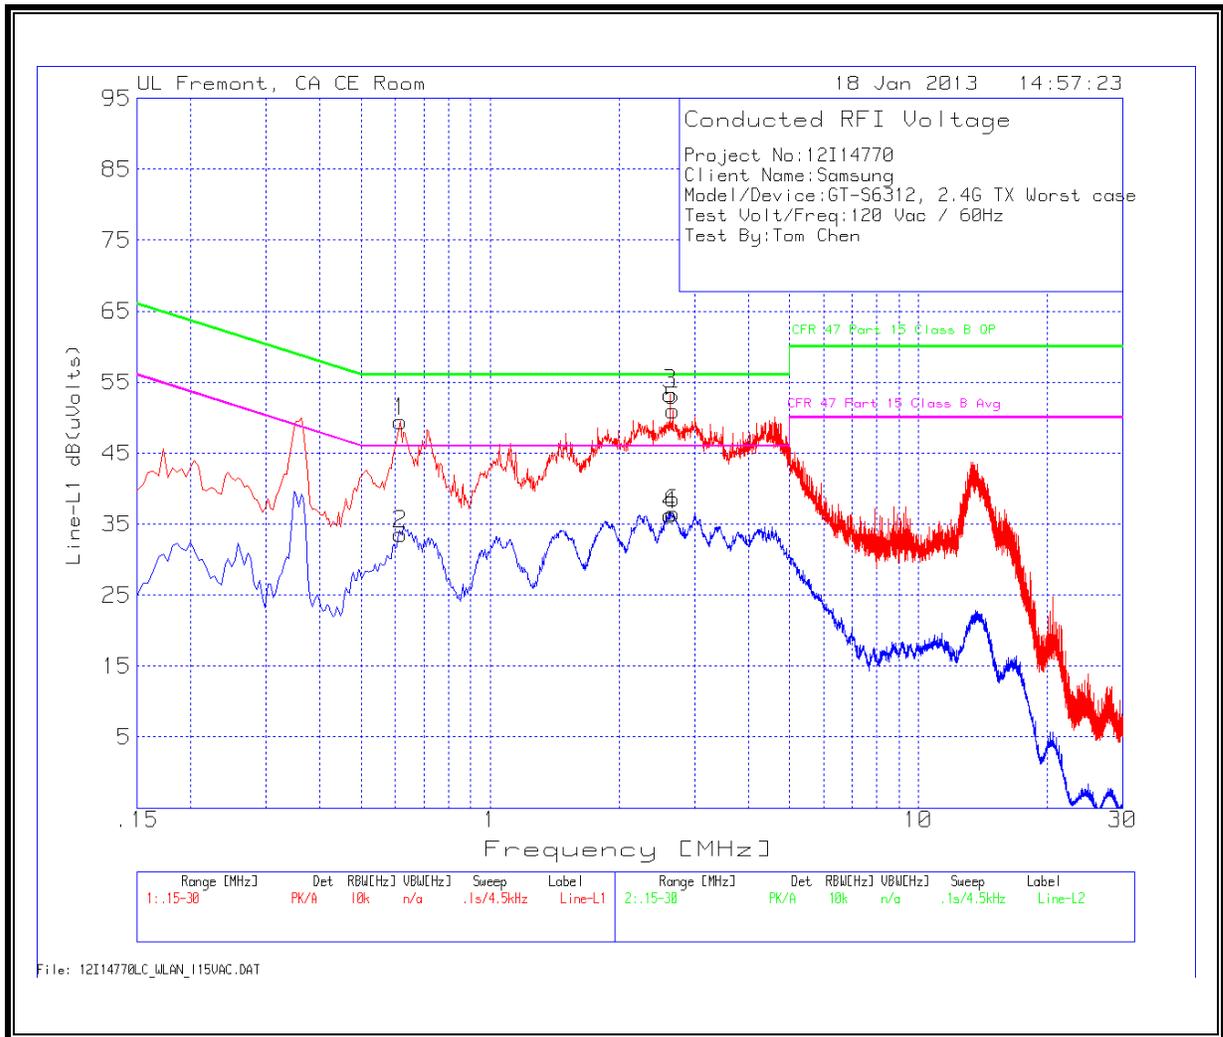

LINE 2 RESULTS

