



ELECTRONICS

Dates of Tests: Feb. 24 ~ Mar 4, 2009

Test Report S/N: LR500190903B

Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

A3LHTBD7200

APPLICANT

Samsung Electronics Co., Ltd.

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	Home Theater System
Manufacturer	:	P.T. Samsung Electronics Indonesia Co. (SEIN) Samsung Electronics Huizhou Co., Ltd. (SEHZ) Samsung Electronics Slovakia s.r.o (SESK) Tianjin Samsung Electronics Company (TSEC) Shin Heung Precision
Model name	:	HT-BD7200
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003 RSS-210 and ISSUE No.: 7 Date: 2007
Frequency Range	:	2402 ~ 2480MHz
RF power	:	Peak 9.24dBm - Conducted
Data of issue	:	March 6, 2009

This test report is issued under the authority of:

The test was supervised by:




Dong -Min JUNG, Technical Manager

Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S ----- 3

2. INFORMATION'S ABOUT TEST ITEM ----- 4

3. TEST REPORT ----- 5

 3.1 SUMMARY OF TESTS ----- 5

 3.2 TECHNICAL CHARACTERISTICS TEST ----- 6

 3.2.1 CARRIER FREQUENCY SEPARATION ----- 6

 3.2.2 NUMBER OF HOPPING FREQUENCIES ----- 8

 3.2.3 20 dB BANDWIDTH ----- 10

 3.2.4 TIME OF OCCUPANCY (Dwell Time) ----- 17

 3.2.5 TTANSMITTER OUTPUT POWER ----- 20

 3.2.6 BAND – EDGE & SPURIOUS ----- 24

 3.2.7 FIELD STRENGTH OF HARMONICS ----- 30

 3.2.8 AC CONDUCTED EMISSIONS ----- 33

APPENDIX

 APPENDIX TEST EQUIPMENT USED FOR TESTS ----- 36

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2009-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2009-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2010-05-03	IC filing

2. Information's about test item

2-1 Client

Company name : Samsung Electronics Co., Ltd.
 Address : 416, maetan-3Dong, Yeongtong-Gu, Suwon-City, Gyeonggi-Do, Korea
 443-742
 Tel / Fax : +82-31-277-6778 / +82-31-277-4008

2-2 Manufacturer

Company name : P.T. Samsung Electronics Indonesia Co. (SEIN)
 Address : Cikarang Industrial Estate JI, Jababeka Raya Blok F 29-33 Cikarang.
 Bekasi 17530, Indonesia
 Company name : Samsung Electronics Huizhou Co., Ltd. (SEHZ)
 Address : 516229, Industrial Complex, Chenjiang Town, Huizhou City, Guangdong
 Province, China
 Company name : Samsung Electronics Slovakia s.r.o (SESK)
 Address : Hviezdoslavova 807, 924 27 Galanta, Slovakia
 Company name : Tianjin Samsung Electronics Company (TSEC)
 Address : 300457, TSEC12, 4th Avenue, TEDA, Tianjin, China
 Company name : Shin Heung Precision
 Address : Komarnanska cesta 3, 940 61 Nove Zamky, Slovakia

2-3 Equipment Under Test (EUT)

Trade name : Home Theater System
 FCC ID : A3LHTBD7200
 Model name : HT-BD7200
 Serial number : Identical prototype
 Date of receipt : February 23, 2009
 EUT condition : Pre-production, not damaged
 Antenna type : Bluetooth chip antenna with Max. 2.01dBi gain
 Frequency Range : 2402 ~ 2480MHz
 RF output power : Peak 9.24dBm - Conducted
 Number of channels : 79
 Channel spacing : 1MHz
 Channel Access Protocol : Frequency Hopping Spread Spectrum (FHSS)
 Type of Modulation : Basic Mode(GFSK), EDR Mode(Pi/4 DQPSK, 8DPSK)
 Power Source : 120 Vac Main

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 250 mWatt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.109	Field Strength	-		C
15.207 / 15.107	AC Conducted Emissions	EN 55022	Line Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Carrier Frequency Separation

Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more) Sweep = auto

VBW = 10 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
1.005	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup

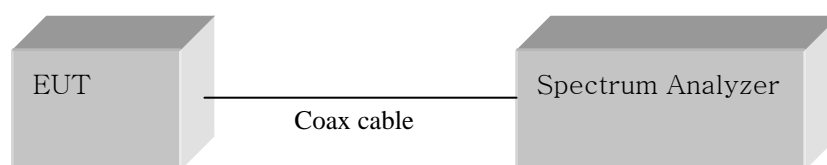



Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

Basic Mode




Ref 10 dBm *Att 10 dB *RBW 10 kHz Delta 2 [T1]
*VBW 10 kHz 0.03 dB
SWT 80 ms 1.000000000 MHz

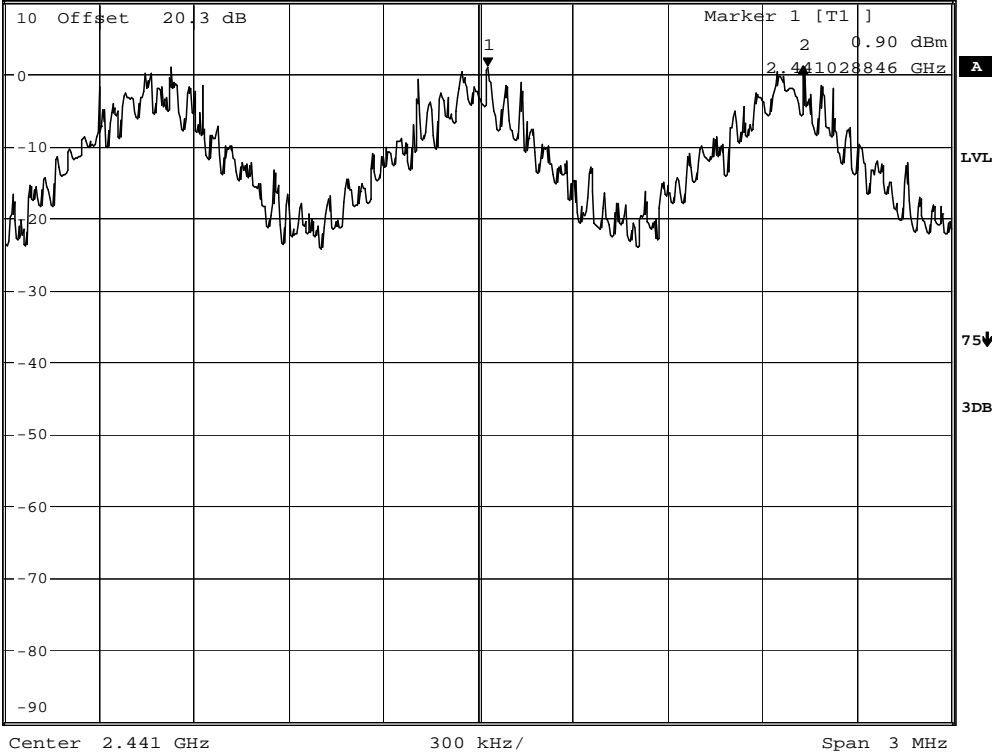



EDR Mode



Ref 10 dBm *Att 10 dB *RBW 30 kHz Delta 2 [T1]
*VBW 30 kHz -38.16 dB
SWT 15 ms -1.004807692 MHz

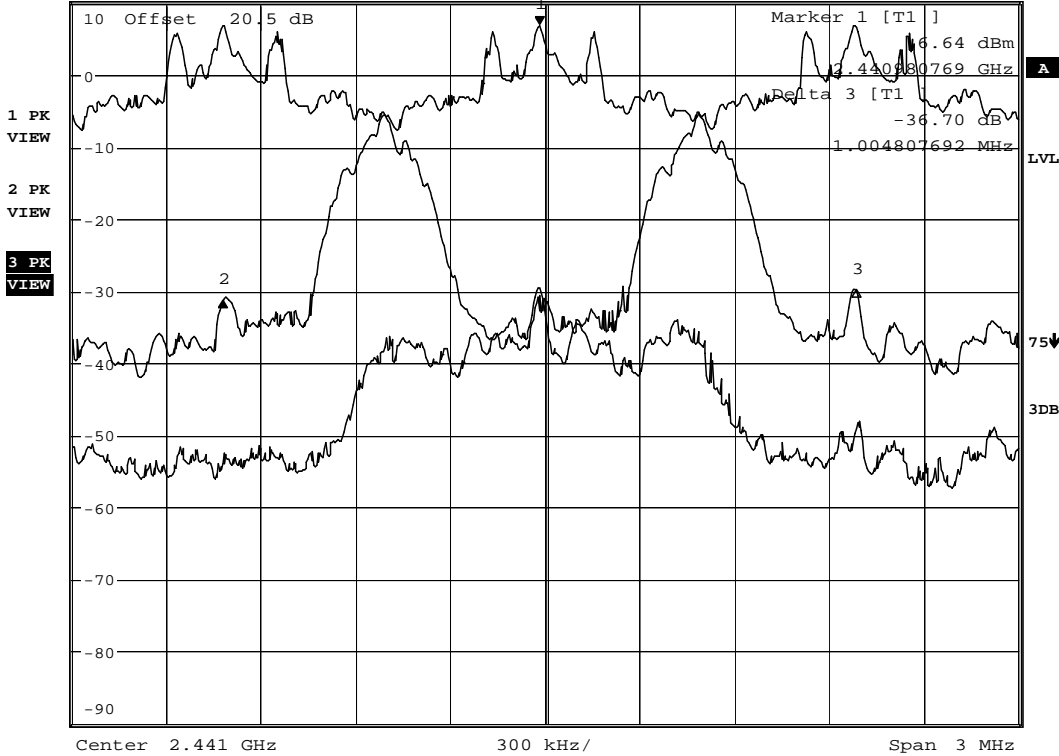

Number of Hopping Frequencies

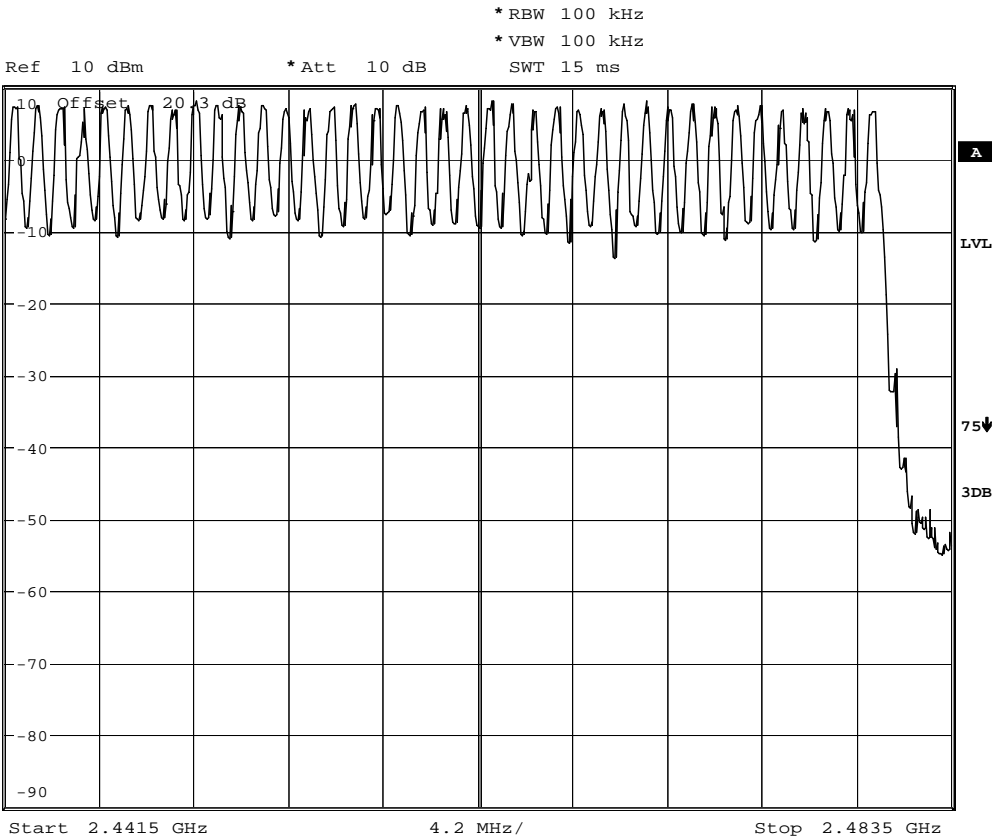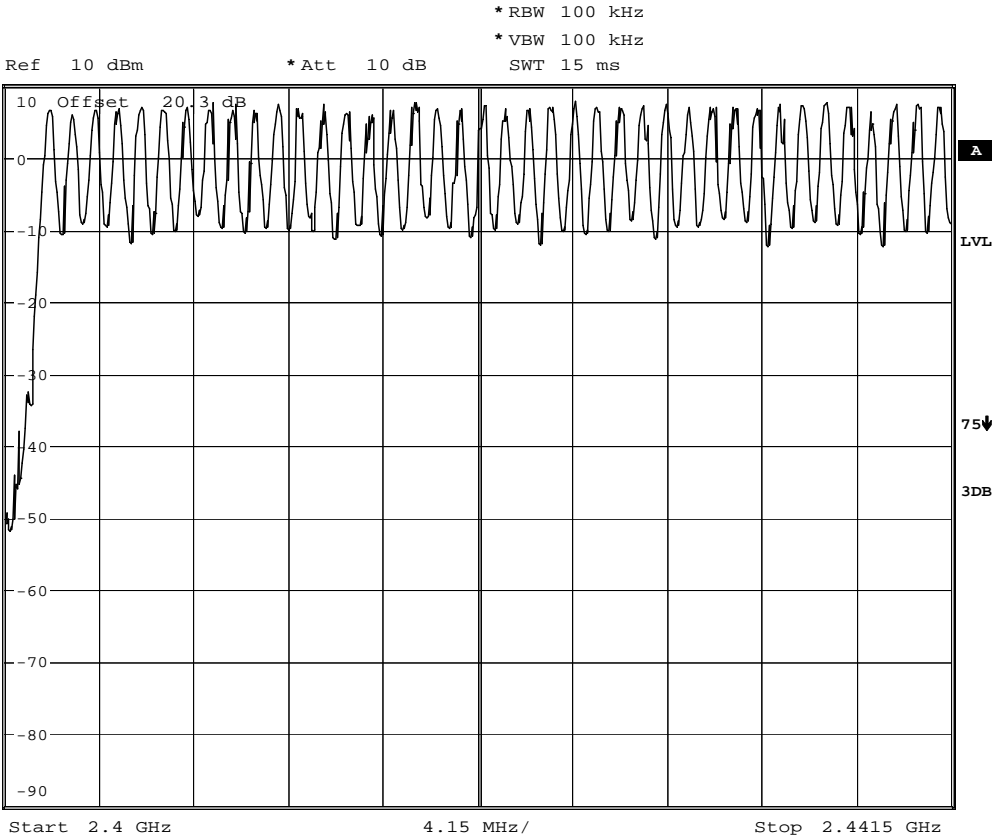

3.2.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

dB/Div = 5dB

Measurement Data: Basic Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	0.682	0.889
2441	39	0.688	0.889
2480	78	0.683	0.904

Measurement Data: EDR Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	1.211	1.144
2441	39	1.202	1.144
2480	78	1.207	1.144

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater. Therefore, limit of 20dB bandwidth is 1.5MHz.

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Channel 1 of basic mode

20 dB Bandwidth




*RBW 30 kHz Marker 1 [T1] 4.72 dBm
*VBW 30 kHz
Ref 10 dBm *Att 10 dB SWT 15 ms 2.401961538 GHz

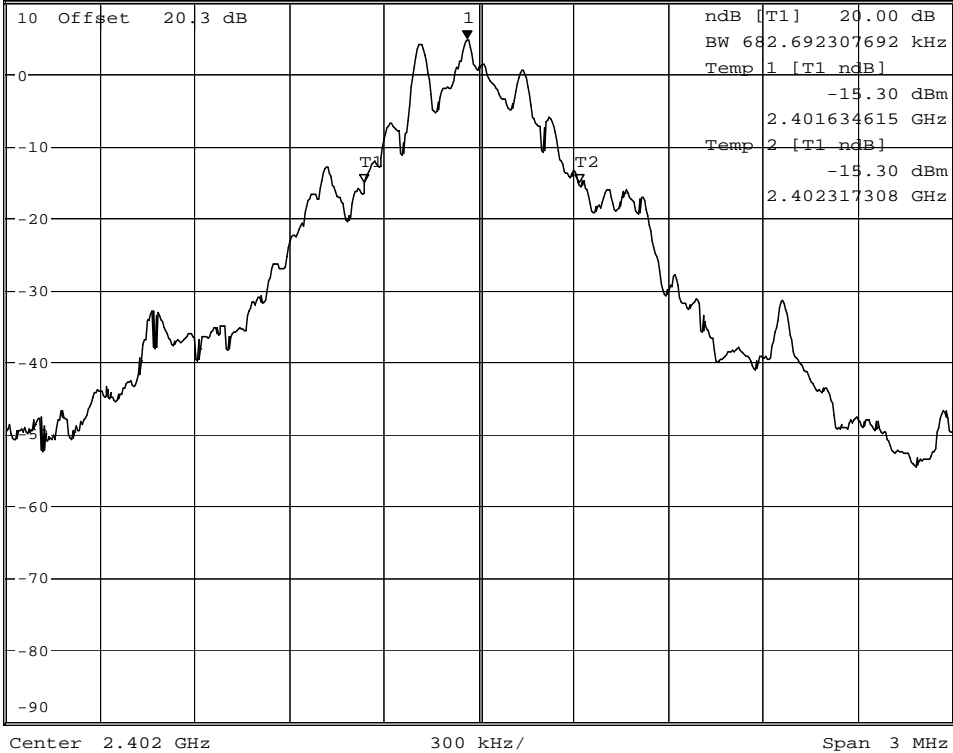

99% Bandwidth



*RBW 30 kHz Marker 1 [T1] 5.62 dBm
*VBW 30 kHz
Ref 10 dBm *Att 10 dB SWT 15 ms 2.401966346 GHz

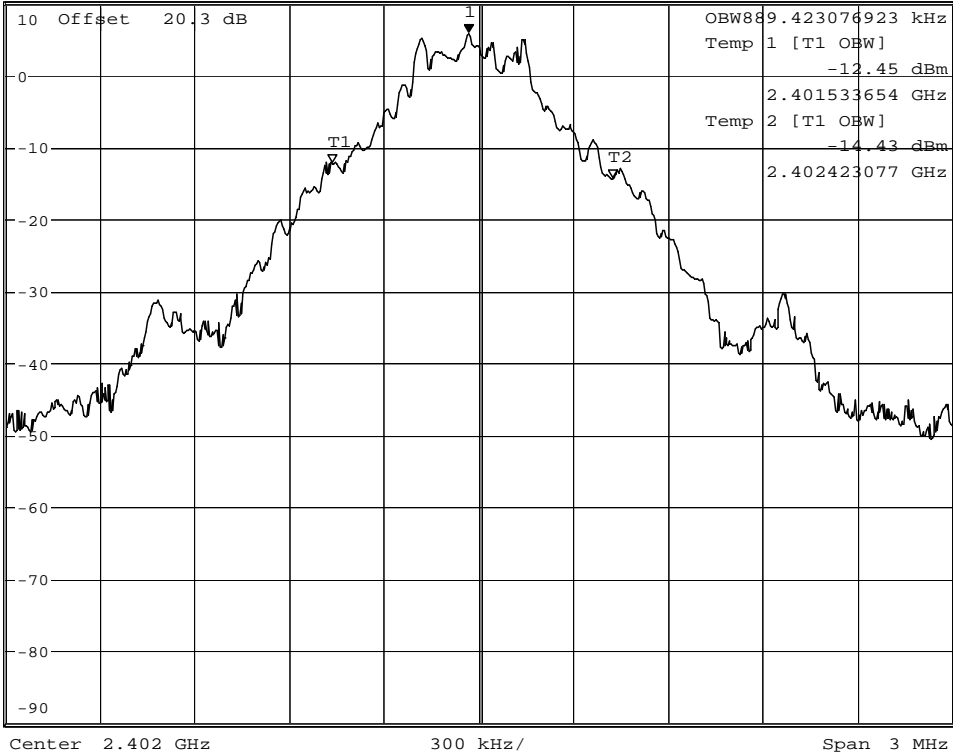


Channel 2 of basic mode

20 dB Bandwidth



*RBW 30 kHz Marker 1 [T1] 5.58 dBm
 *VBW 30 kHz
 Ref 10 dBm *Att 10 dB SWT 15 ms 2.440966346 GHz

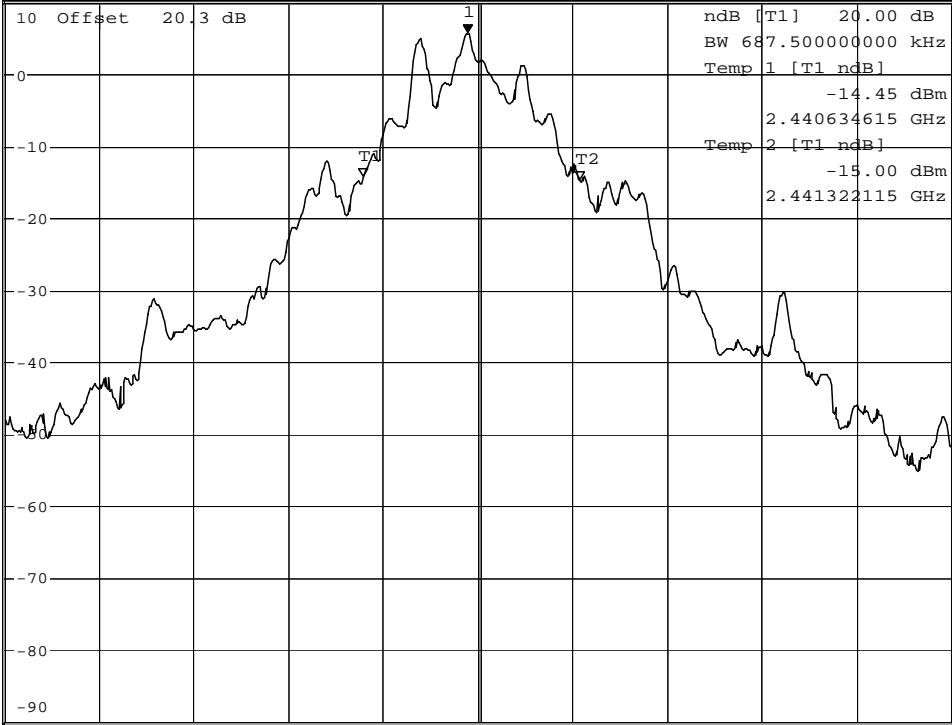


Center 2.441 GHz 300 kHz/ Span 3 MHz

99% Bandwidth




*RBW 30 kHz Marker 1 [T1] 6.56 dBm
 *VBW 30 kHz
 Ref 10 dBm *Att 10 dB SWT 15 ms 2.440966346 GHz

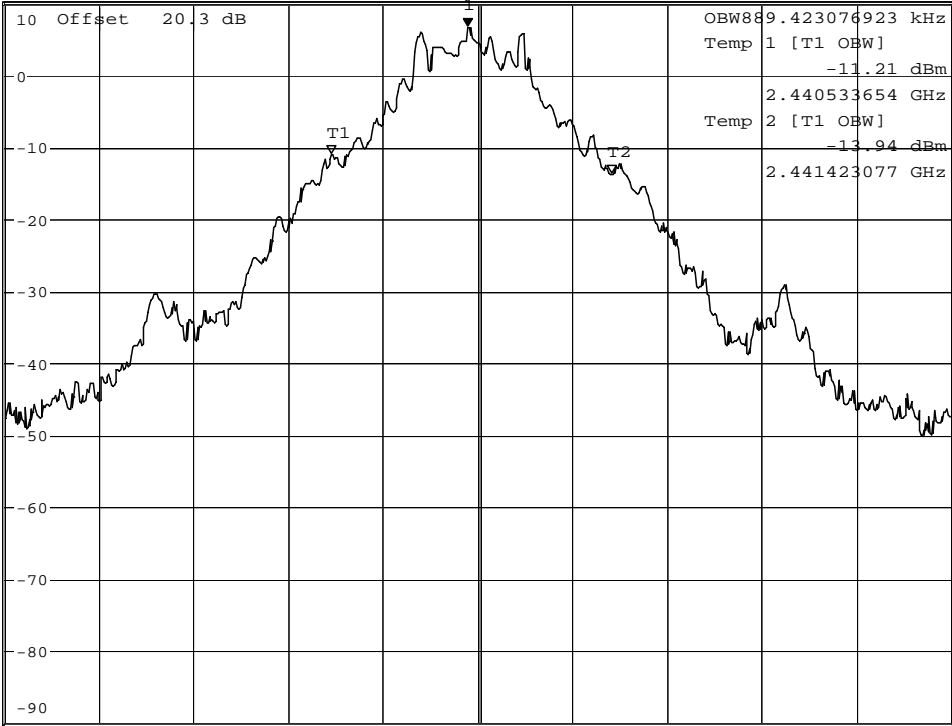


Center 2.441 GHz 300 kHz/ Span 3 MHz

Channel 3 of basic mode

20 dB Bandwidth

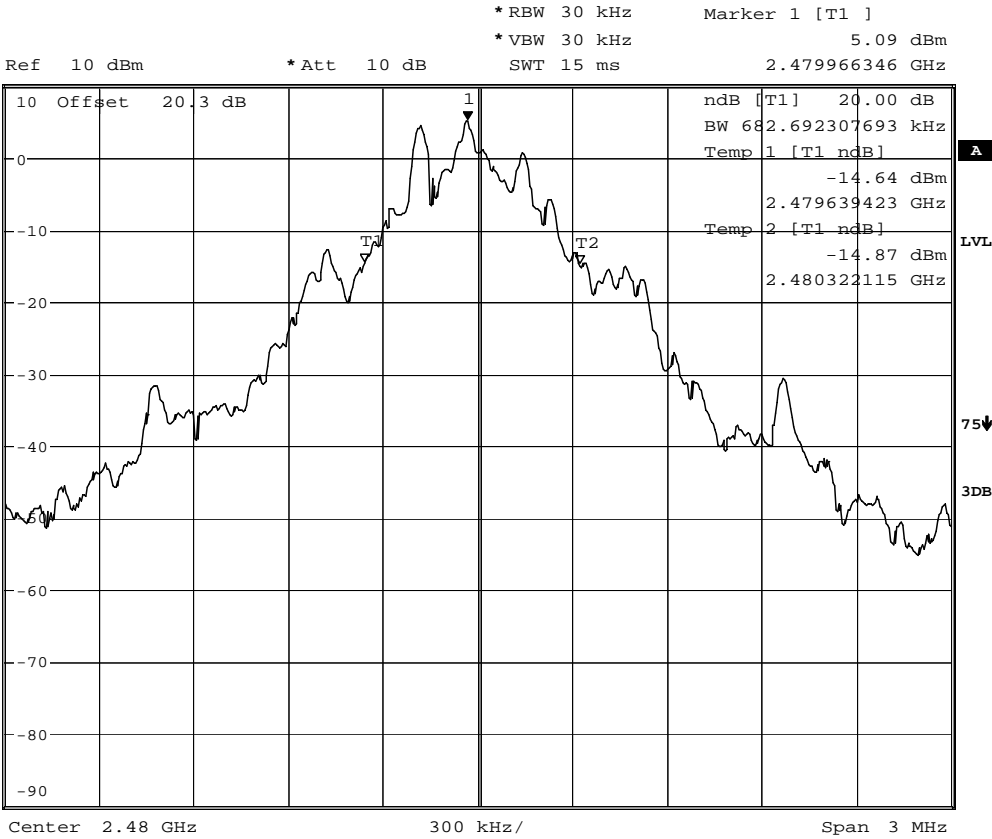

99% Bandwidth

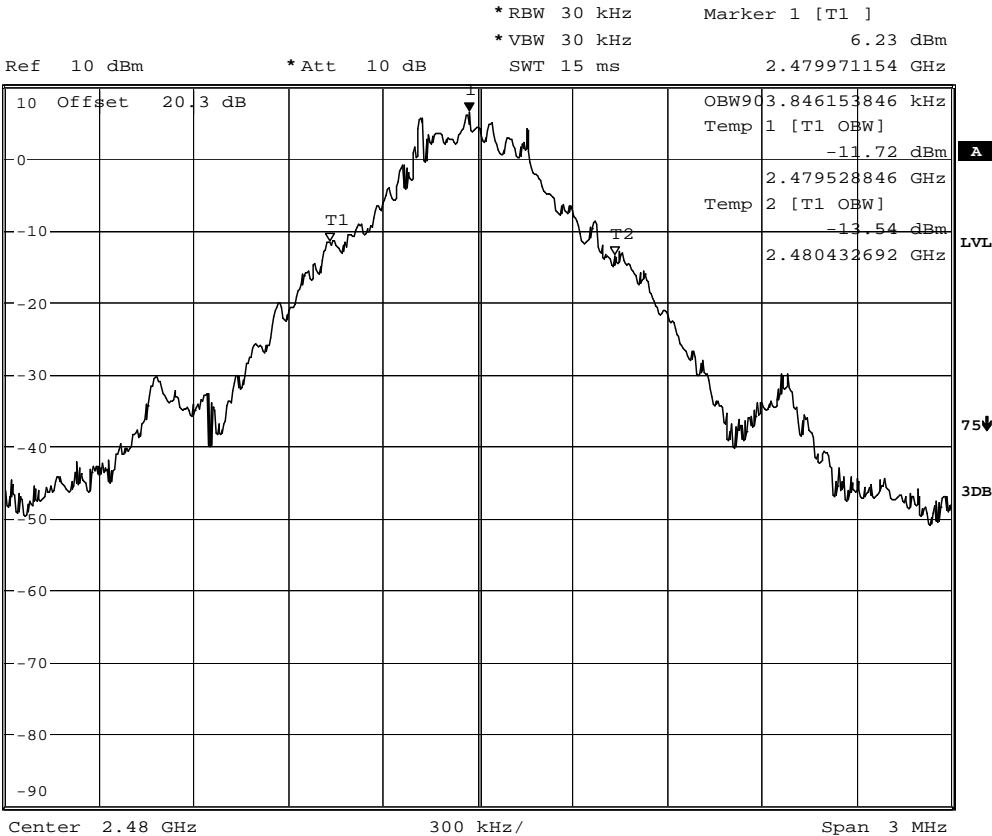


Channel 1 at EDR mode
20 dB Bandwidth



*RBW 30 kHz Marker 1 [T1]
*VBW 30 kHz 5.32 dBm
Ref 10 dBm *Att 10 dB SWT 15 ms 2.401966346 GHz

1 PK
MAXH

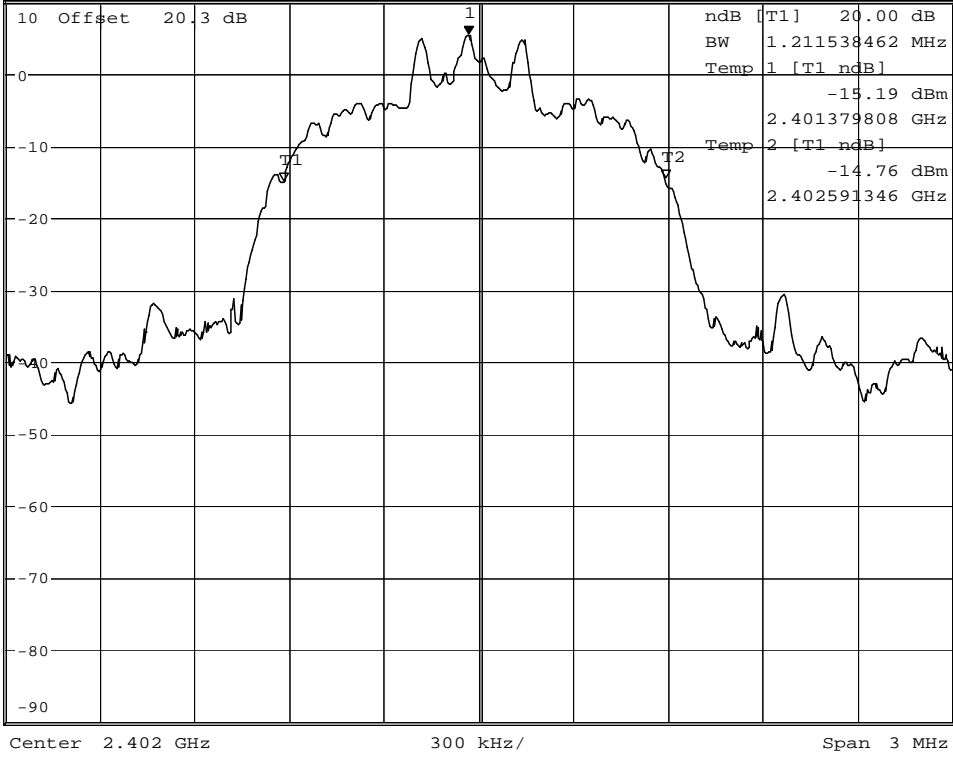


99% Bandwidth



*RBW 30 kHz Marker 1 [T1]
*VBW 30 kHz 5.04 dBm
Ref 10 dBm *Att 10 dB SWT 15 ms 2.401971154 GHz

1 PK
MAXH

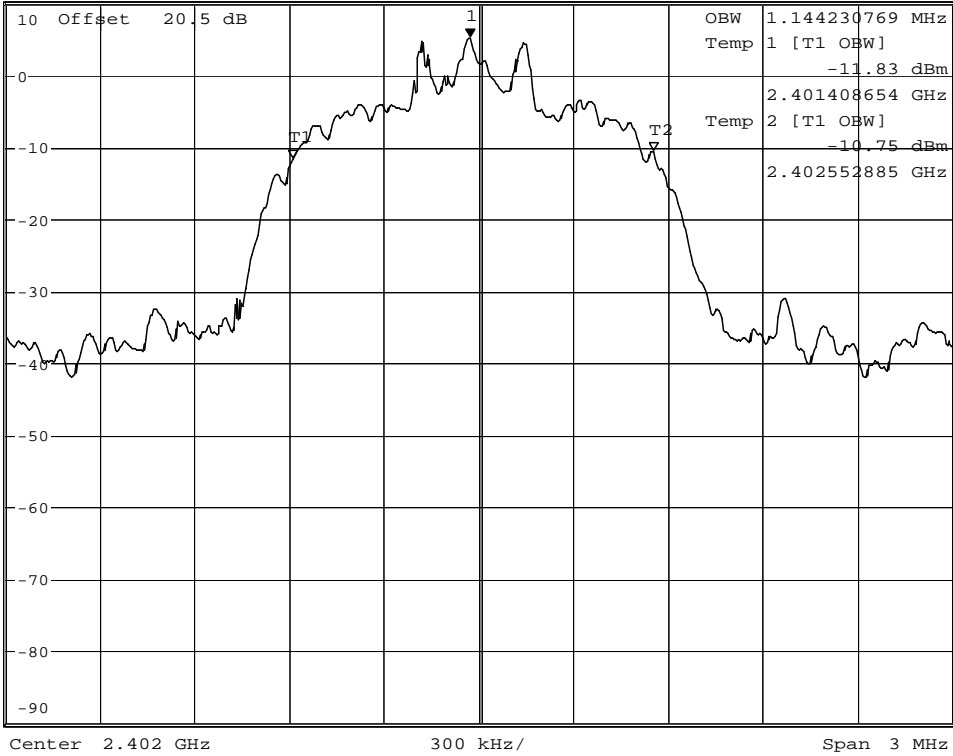


Channel 2 at EDR mode

20 dB Bandwidth



Ref 10 dBm *Att 10 dB *RBW 30 kHz *VBW 30 kHz SWT 15 ms Marker 1 [T1] 6.32 dBm 2.440966346 GHz

1 PK
MAXH

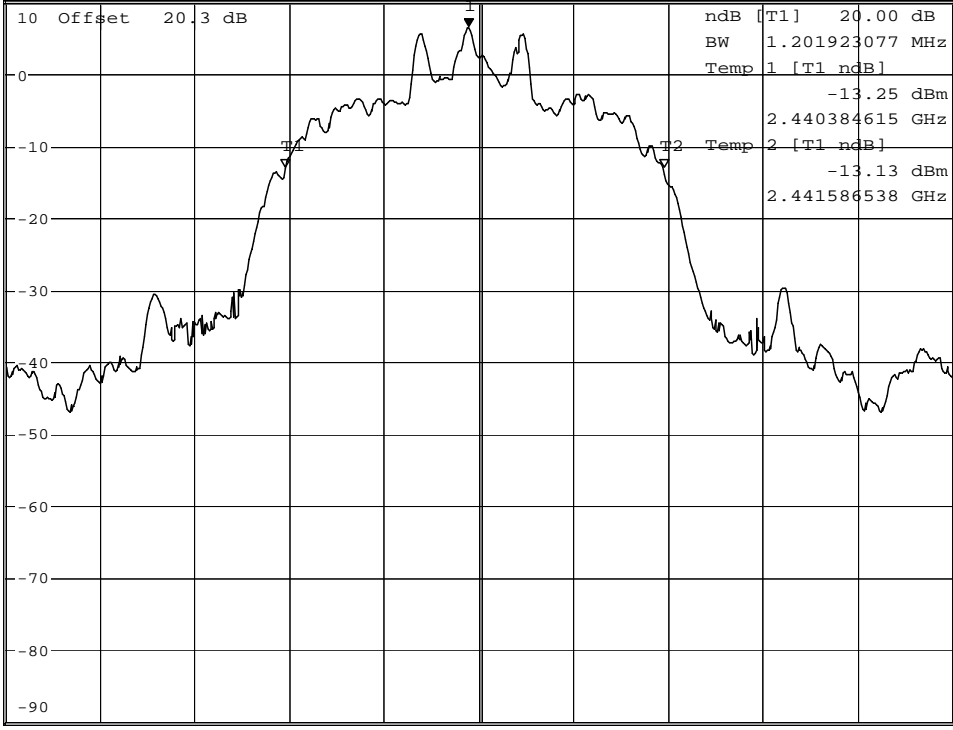


Center 2.441 GHz 300 kHz/ Span 3 MHz

99% Bandwidth



Ref 10 dBm *Att 10 dB *RBW 30 kHz *VBW 30 kHz SWT 15 ms Marker 1 [T1] 6.35 dBm 2.440971154 GHz

1 PK
MAXH

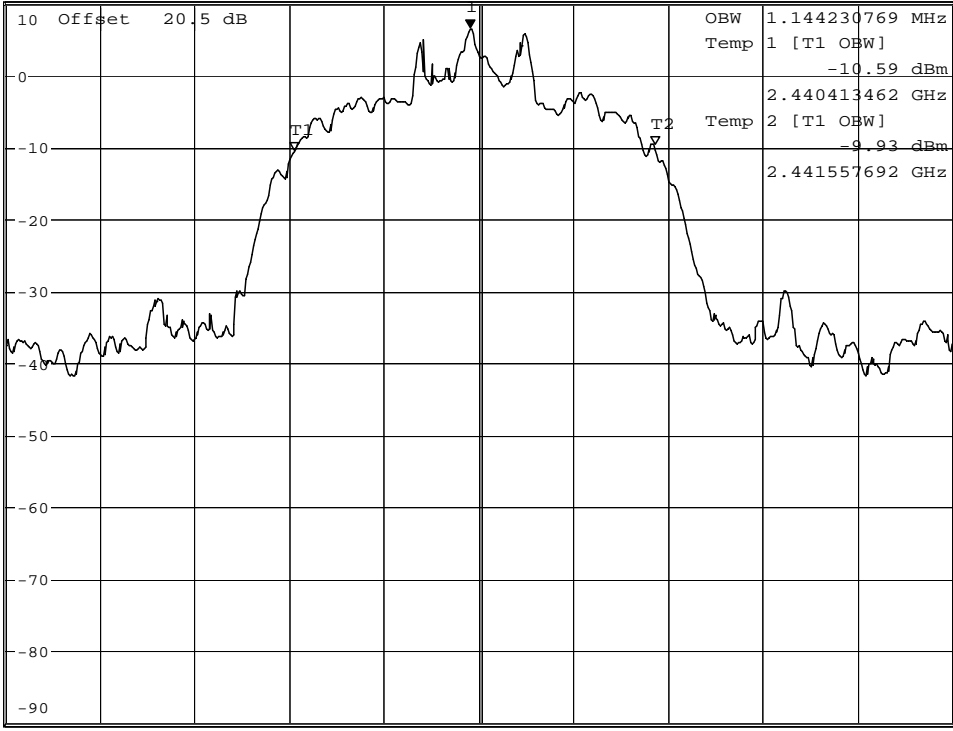


Center 2.441 GHz 300 kHz/ Span 3 MHz

Channel 3 at EDR mode
20 dB Bandwidth



*RBW 30 kHz Marker 1 [T1] 5.91 dBm
*VBW 30 kHz
Ref 10 dBm *Att 10 dB SWT 15 ms 2.479966346 GHz

1 PK
MAXH

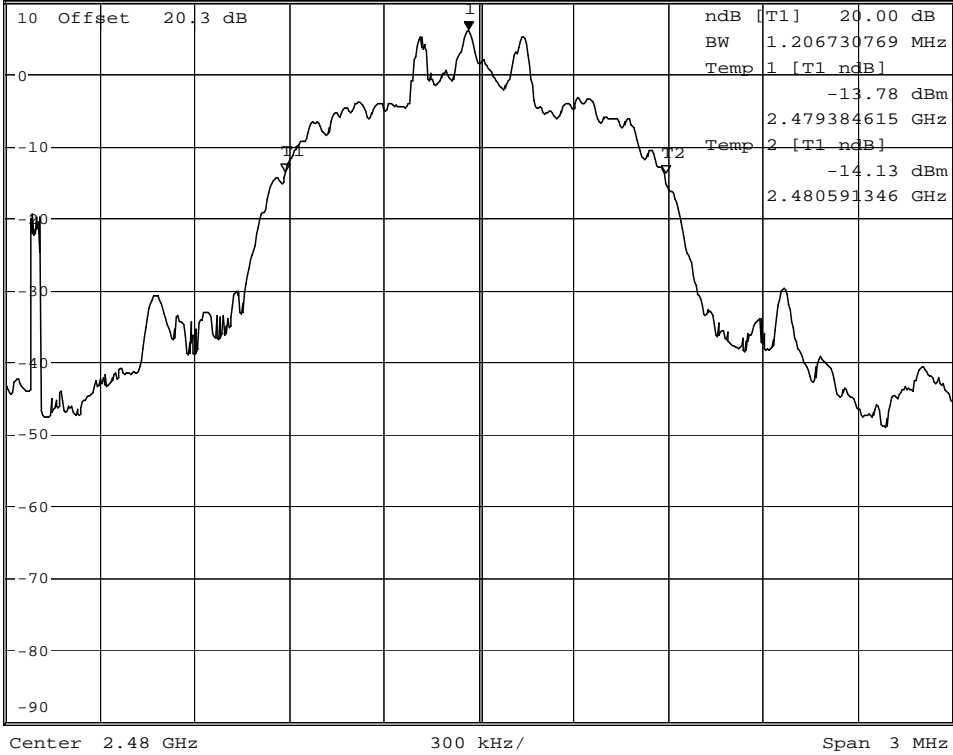


99% Bandwidth



*RBW 30 kHz Marker 1 [T1] 6.42 dBm
*VBW 30 kHz
Ref 10 dBm *Att 10 dB SWT 15 ms 2.479971154 GHz

1 PK
MAXH

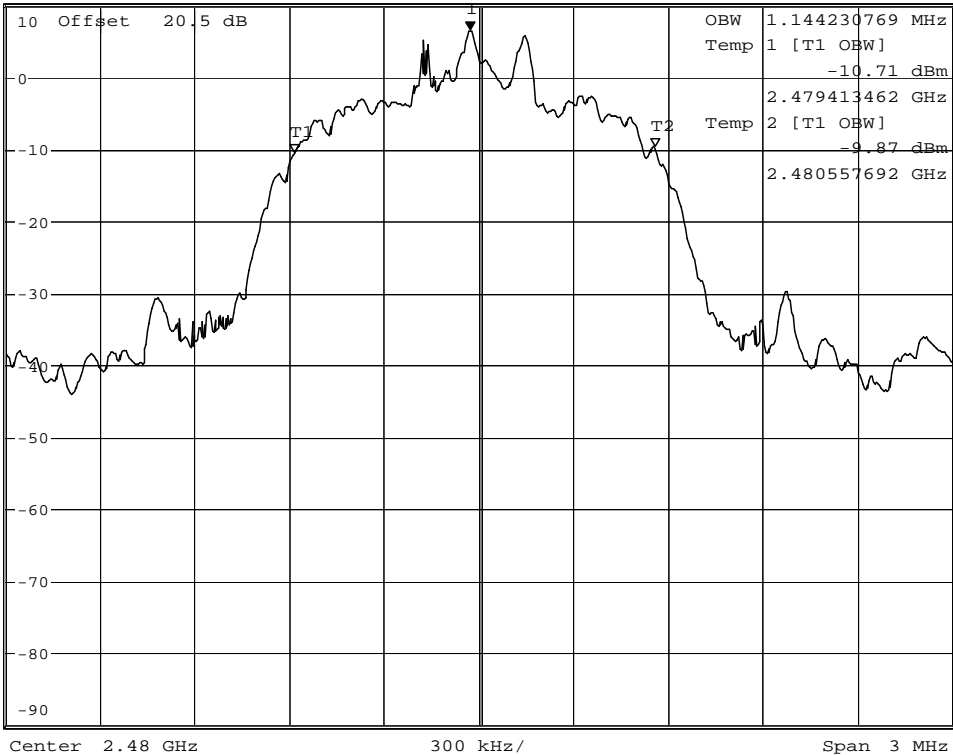

3.2.4 Time of Occupancy (Dwell Time)

Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW \geq RBW)

Trace = max hold

Detector function = peak

Measurement Data:

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results		
			Duration Time (ms)	Dwell Time (ms)	Result
39	2441	Basic DH 1	0.394	126.12	Complies
		Basic DH 3	1.657	267.04	Complies
		Basic DH 5	2.907	309.57	Complies
		EDR 3Mbps DH5	2.9125	310.63	Complies

- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms


Minimum Standard:

0.4 seconds within a 30 second period per any frequency


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


DH1 at basic mode

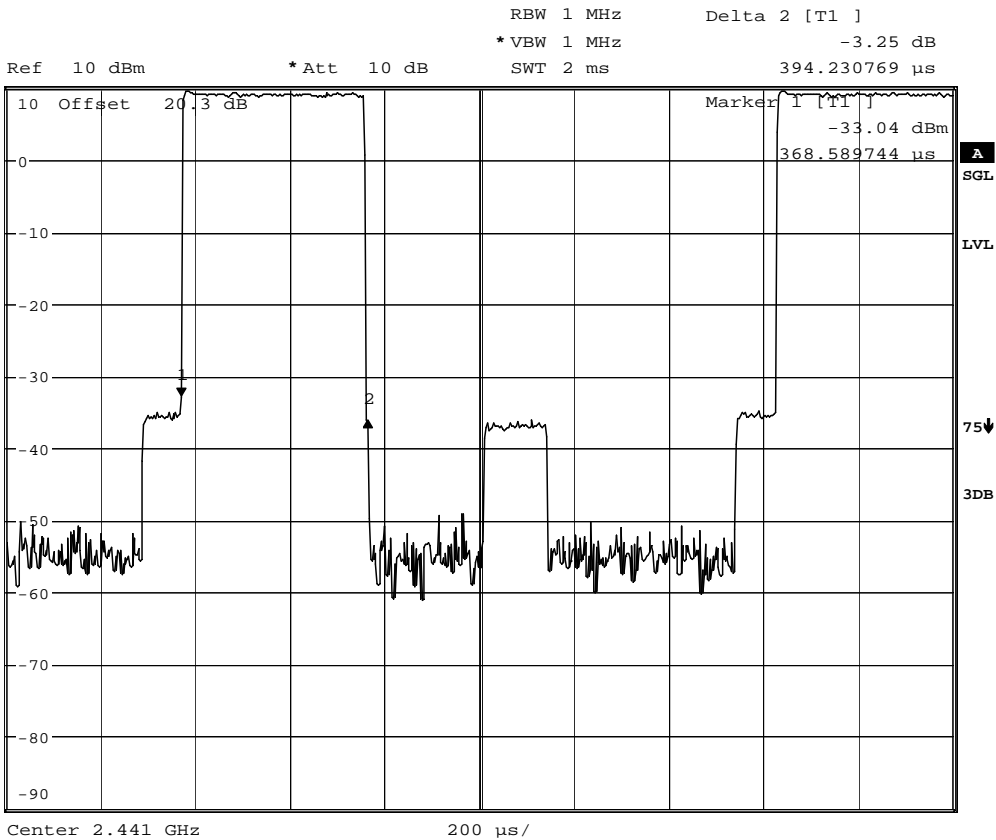


DH3 at basic mode

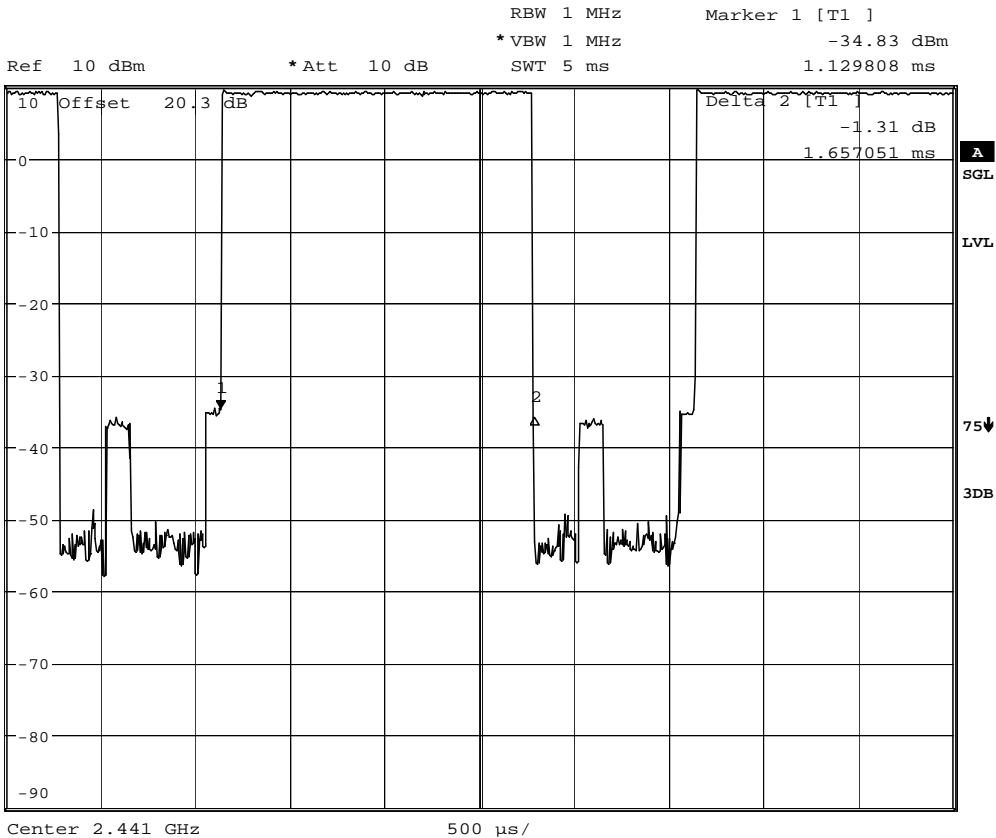

DH5 at basic mode

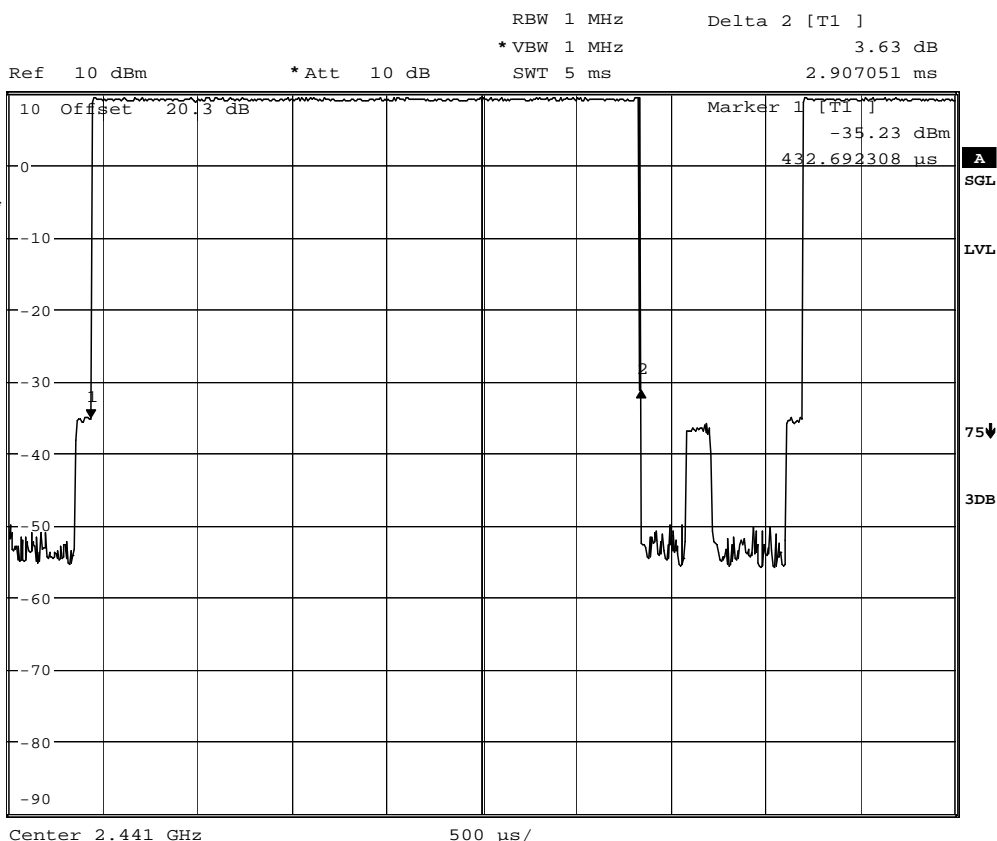

DH5 at EDR mode with 3Mbps

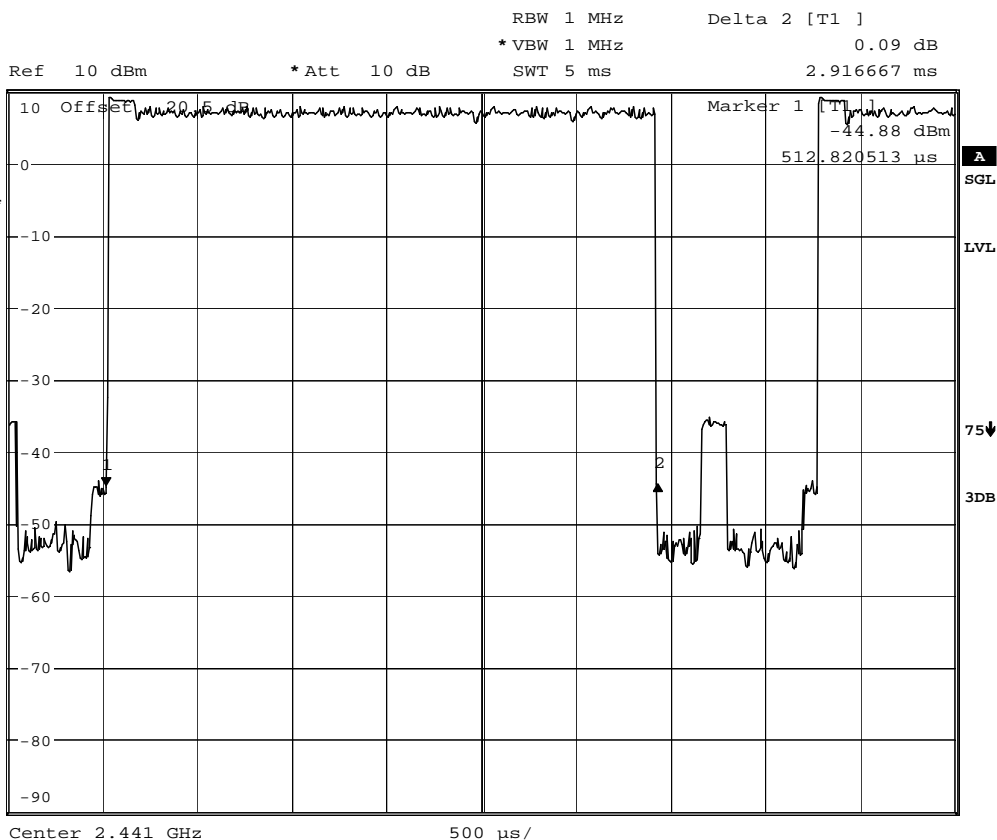

3.2.5 Transmitter Output Power

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 20 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Basic Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	W	Result
2402	0	8.35	0.00684	Complies
2441	39	9.24	0.00839	Complies
2480	78	8.67	0.00736	Complies

Measurement Data: EDR Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	W	Result
2402	0	7.69	0.00587	Complies
2441	39	8.75	0.00750	Complies
2480	78	8.74	0.00748	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:	< 250 mW
--------------------------	----------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Channel 1 Basic mode



Ref 10 dBm *Att 10 dB 1 Marker 1 [T1]
*RBW 3 MHz 8.35 dBm
*VBW 3 MHz
SWT 2.5 ms 2.401887821 GHz

1 PK
MAXH

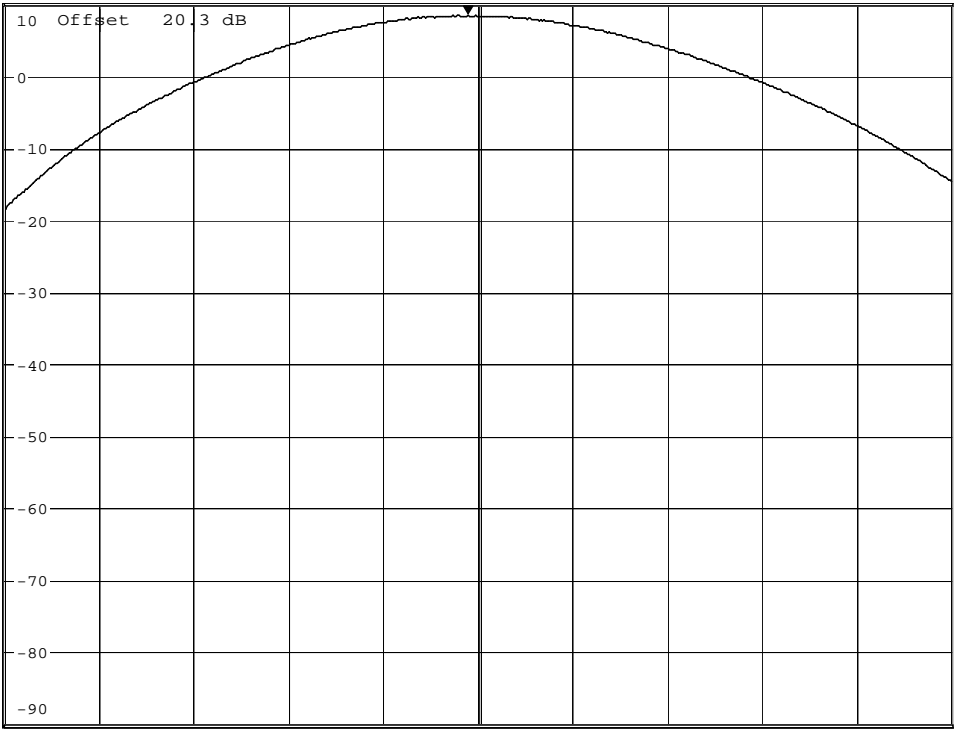


EDR mode



Ref 10 dBm *Att 10 dB 1 Marker 1 [T1]
*RBW 3 MHz 7.69 dBm
*VBW 3 MHz
SWT 2.5 ms 2.401951923 GHz

1 PK
MAXH

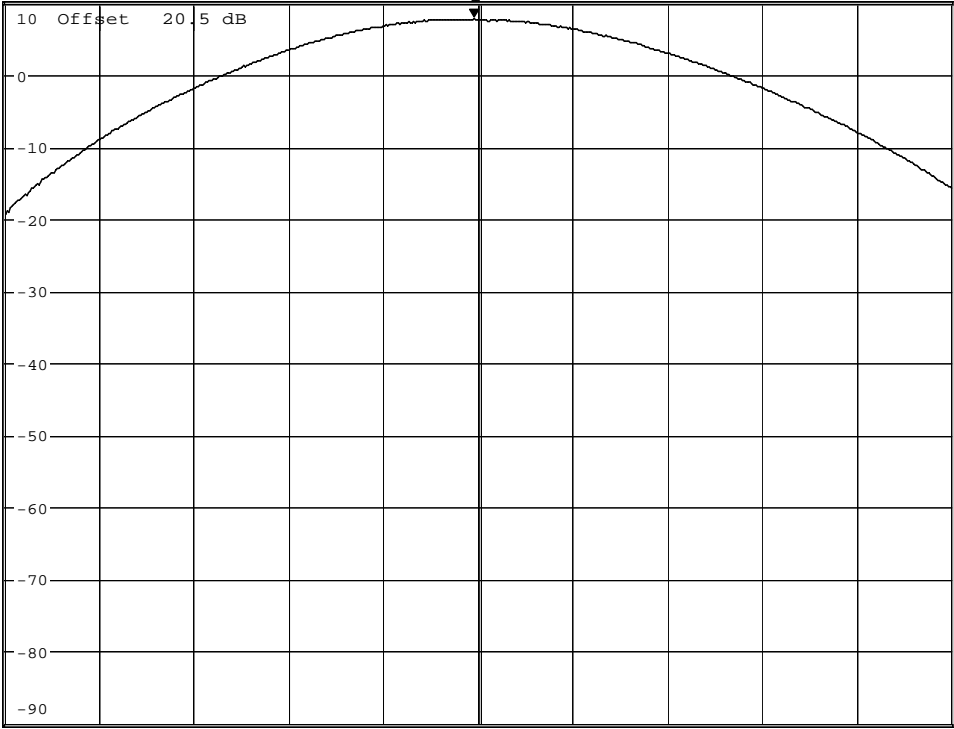

3.2.6 Band Edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 10 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Band-edges in the restricted band 2483.5 ~ 2500 MHz measurement**- Document DA 00-705 Marker Delta Method**

Frequency (MHz)	Detect mode	Pol.	Reading (dBUV/m)	T.F (dB)	Step 1 Data	delta	Step 3 Data	Limit
2483.5	PK	V	107.34	1.1	108.44	53.02	55.42	74
	AV	V	94.21	1.1	95.31	53.02	42.29	54

Note) Step 1 = Reading + T.F

(T.F = Ant.F + Cable loss – PreAmp Gain)


Step 3 = Step 1 – Delta Value

Unwanted Emission – Low channel

Frequency Range = 30 MHz ~ 26.5 GHz




Ref 10 dBm *Att 10 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz 4.88 dBm
SWT 2.7 s 2.365128205 GHz

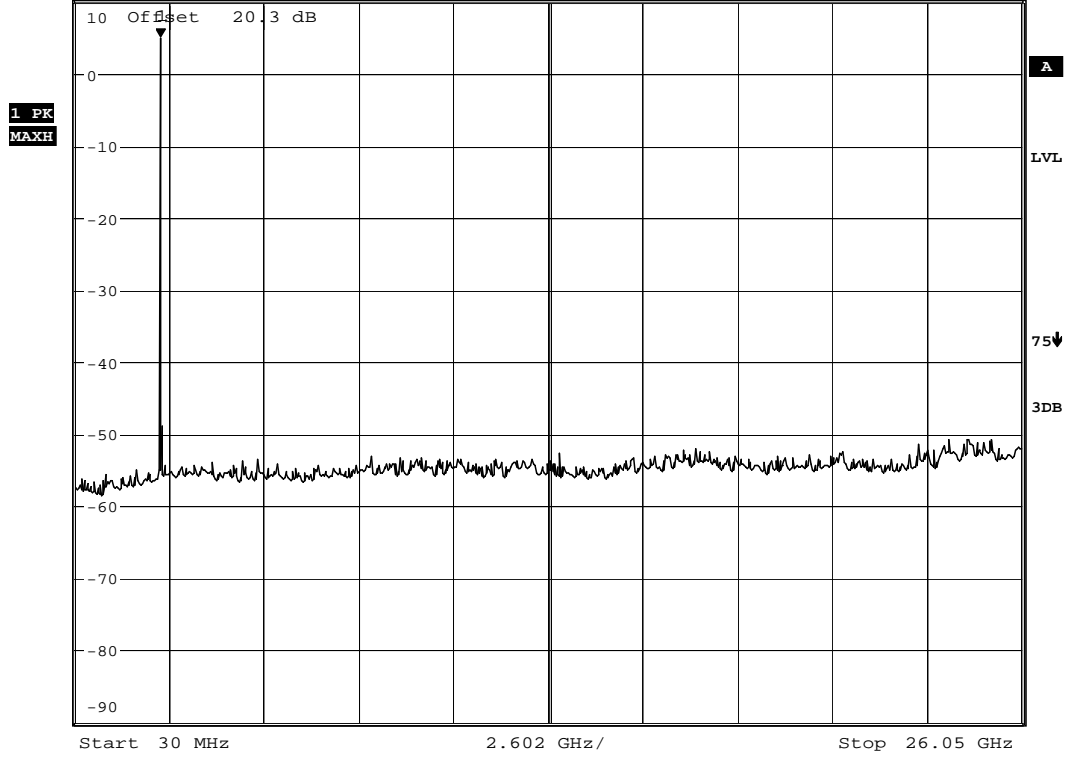

-49.42 dBm at 7.206 GHz




Ref 10 dBm *Att 10 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -49.42 dBm
SWT 20 ms 7.206432692 GHz

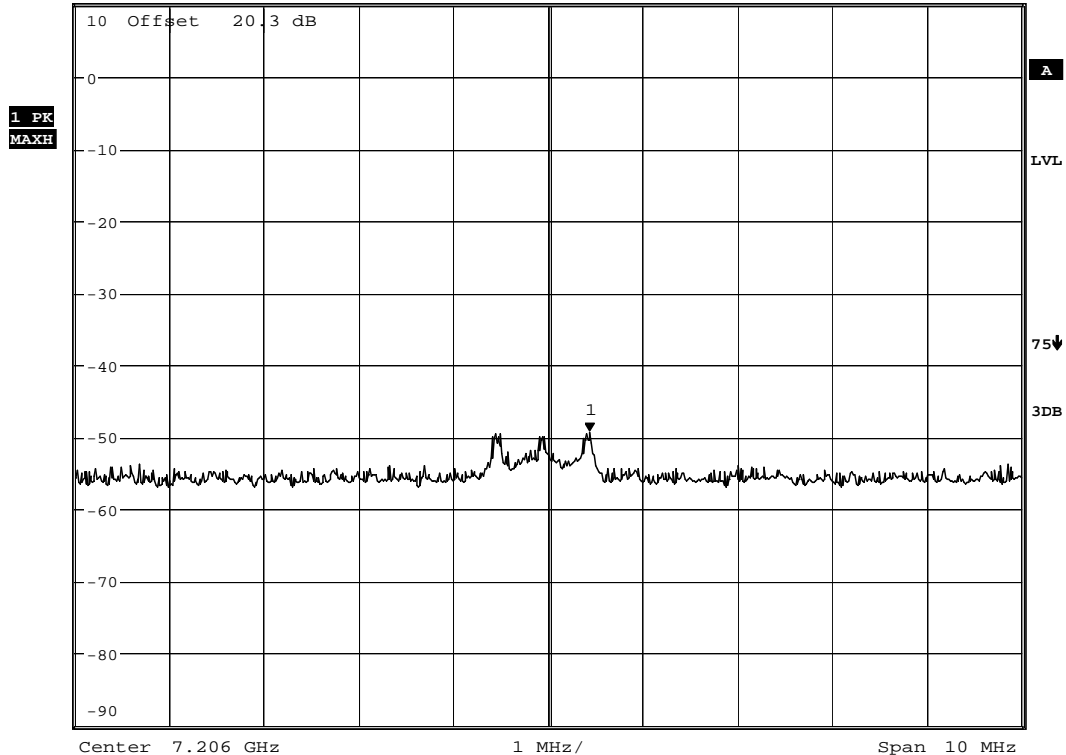

Unwanted Emission – High channel
Frequency Range = 30 MHz ~ 26.5 GHz




Ref 10 dBm *Att 10 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz 5.83 dBm
SWT 2.7 s 2.448525641 GHz

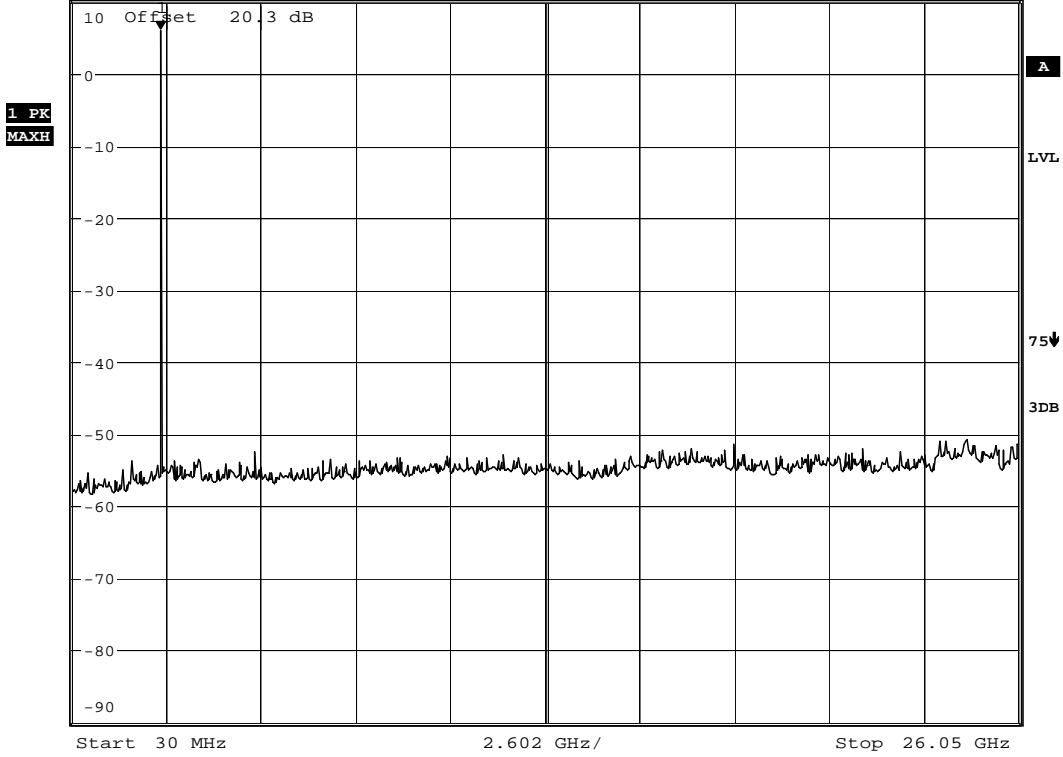

-51.22 dBm at 1.6533 GHz



Ref 10 dBm *Att 10 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -51.22 dBm
SWT 5 ms 1.653342949 GHz

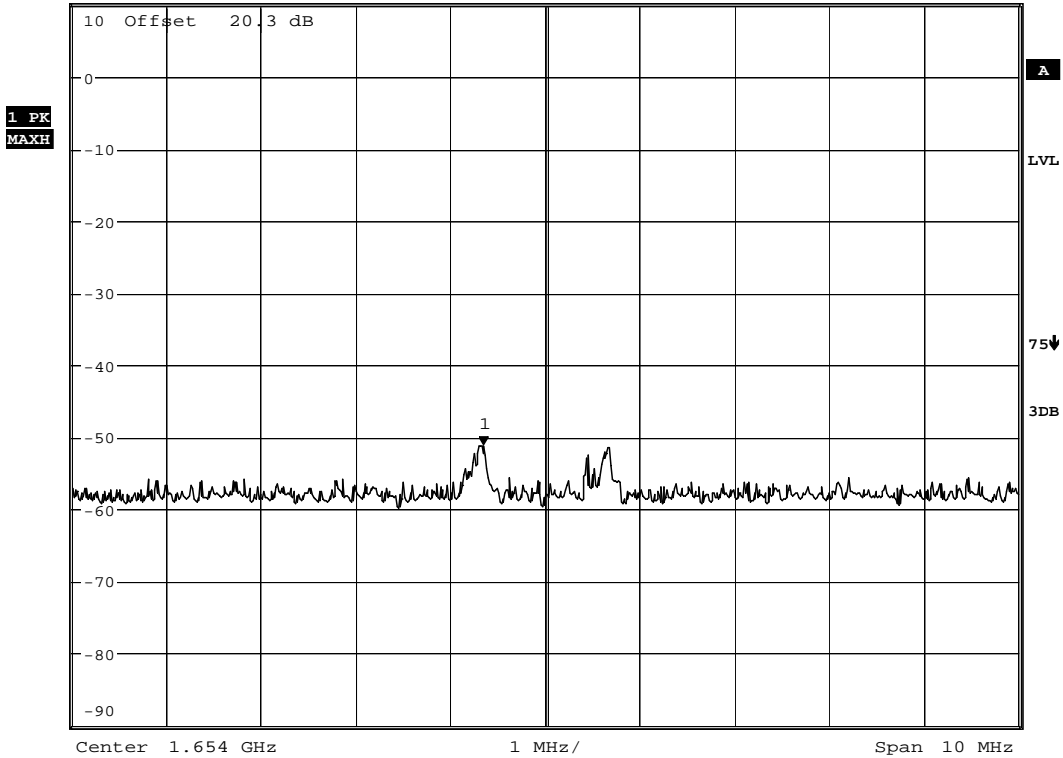

3.2.7 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Trace = max hold

Peak:VBW \geq RBW

Average:VBW=10Hz

Detector function = Peak and Average

Sweep = auto

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 10dB below limit.
- The three antennas were used with this EUT during the Testing.
- The used antenna is "R-AN2400-1901RS" and it gave the worse case emissions.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:**1. PEAK data**

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
-	-	-	-	-	-
No emissions were detected at a level greater than 20dB below limit.					
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			

2. AVERAGE data


Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
-	-	-	-	-	-
No emissions were detected at a level greater than 20dB below limit.					
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			

Normal operation mode



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: HT-BD7200 TEST MODE: E/T mode
Temp Humi : 3 / 34 Tested by: B.S.KIM

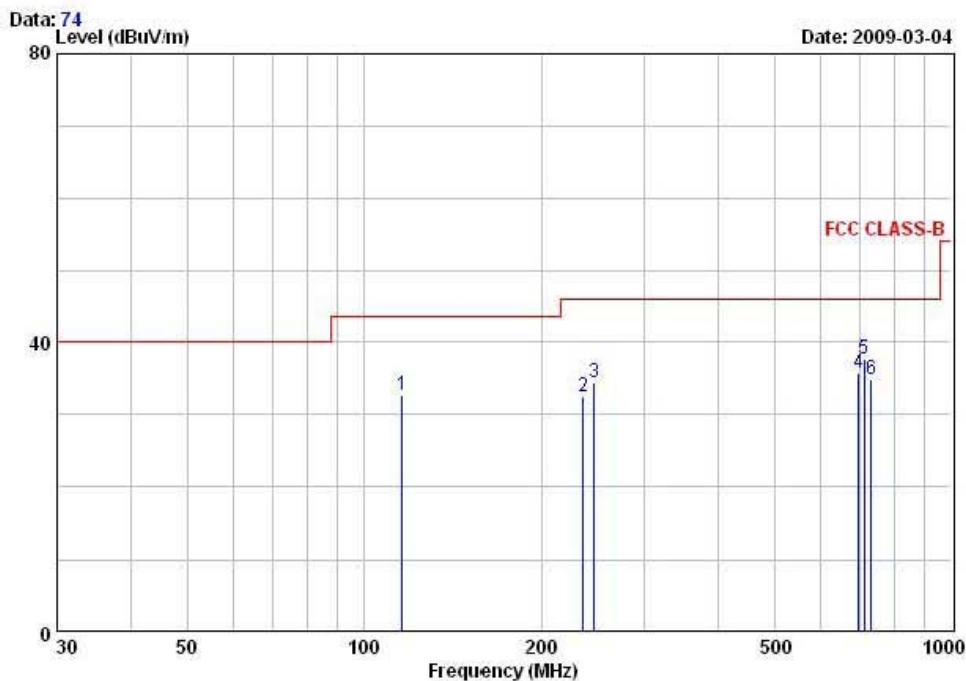

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	116.57	46.70	-13.94	32.76	43.50	10.74	100	52	HORIZONTAL
2	235.62	44.60	-12.12	32.48	46.00	13.52	147	59	VERTICAL
3	245.79	46.10	-11.64	34.46	46.00	11.54	158	73	VERTICAL
4	694.43	36.60	-0.90	35.70	46.00	10.30	100	134	VERTICAL
5	711.36	38.20	-0.39	37.81	46.00	8.19	100	109	VERTICAL
6	730.01	34.70	0.27	34.97	46.00	11.03	118	142	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.8 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.
- The used antenna is "R-AN2400-1901RS" and it gave the worse case emissions.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency


AC Conducted Emissions at normal operation mode – Line



243 Jbug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : HT-BD7200	Phase : LINE
Test Mode : B/T mode	Test Power : 120 / 60
Temp./Humi. : 14 / 29	Test Engineer : B.S.KIM

Data: 80 Level (dBuV) File: D:\Conducted Data\2009\LTA_Conduction_0903_1.EMI (245) Date: 2009-03-03

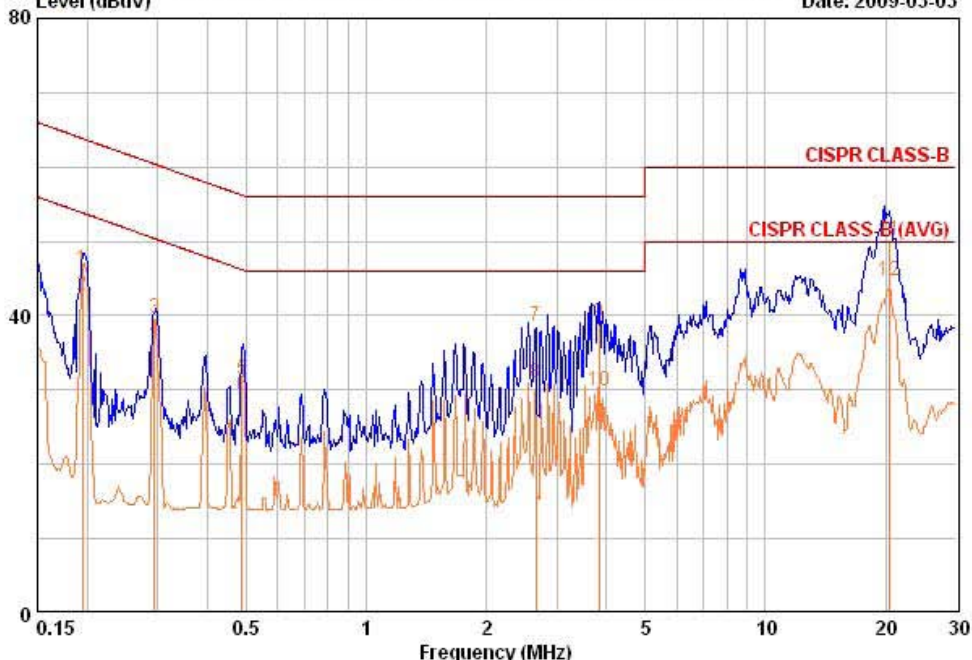

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.194	36.80	33.40	9.42	46.22	42.82	63.86	53.86	17.64	11.04
0.294	30.30	27.30	9.46	39.76	36.76	60.41	50.41	20.65	13.65
0.487	21.80	19.60	9.54	31.34	29.14	56.22	46.22	24.88	17.08
2.664	28.90	21.20	9.68	38.58	30.88	56.00	46.00	17.42	15.12
3.839	29.40	20.10	9.68	39.08	29.78	56.00	46.00	16.92	16.22
20.473	40.00	34.50	10.21	50.21	44.71	60.00	50.00	9.79	5.29

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions at normal operation mode – Neutral



243 Jbug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : HT-BD7200	Phase : NEUTRAL
Test Mode : B/T mode	Test Power : 120 / 60
Temp./Humi. : 14 / 29	Test Engineer : B.S.KIM

Data: 82 File: D:\Conducted Data\2009\LTA_Conduction_0903_1.EMI (112) Date: 2009-03-03

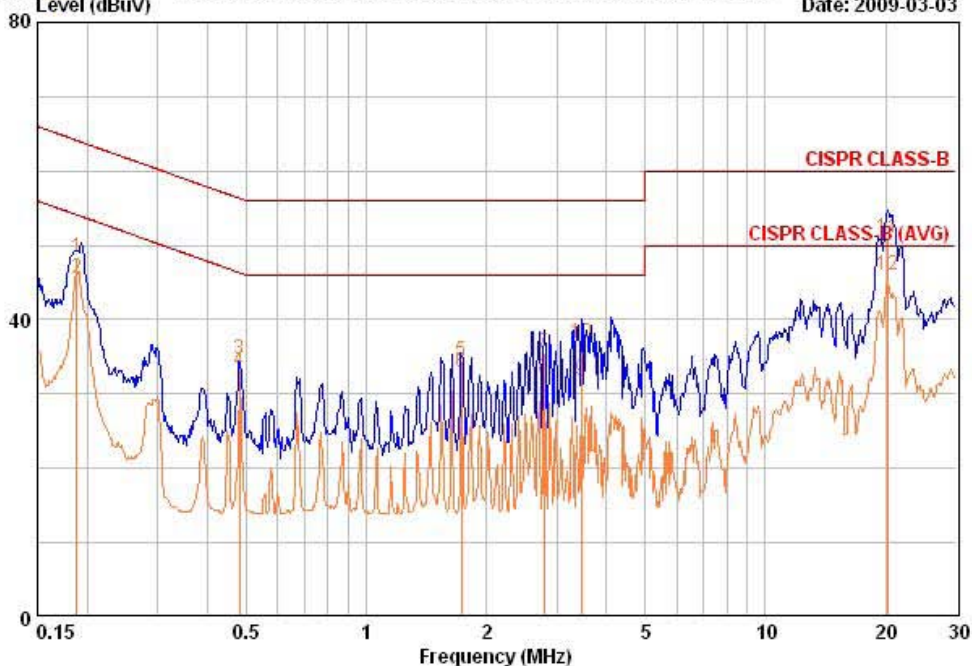

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.188	38.90	36.00	9.46	48.36	45.46	64.12	54.12	15.77	8.67
0.481	25.10	23.50	9.52	34.62	33.02	56.32	46.32	21.70	13.30
1.728	24.80	23.30	9.67	34.47	32.97	56.00	46.00	21.53	13.03
2.785	25.90	22.30	9.69	35.59	31.99	56.00	46.00	20.41	14.01
3.452	27.10	22.10	9.68	36.78	31.78	56.00	46.00	19.22	14.22
20.274	40.80	35.70	10.24	51.04	45.94	60.00	50.00	8.96	4.06

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Apr-09
2	Signal Generator	8648C	3623A02597	HP	Apr-09
3	Attenuator (3dB)	8491A	37822	HP	Oct-09
4	Attenuator (10dB)	8491A	63196	HP	Oct-09
5	EMI Test Receiver	ESVD	843748/001	R&S	Aug-09
6	LISN	ENV216	100408	R&S	Oct-09
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Oct-09
8	RF Amplifier	8447D	2944A07684	HP	Oct-09
9	RF Amplifier	8447D	2439A09058	HP	Oct-09
10	RF Amplifier	8449B	3008A02126	HP	Apr-09
11	Test Receiver	ESHS10	828404009	R&S	Aug-09
12	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Jul-09
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-09
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-09
15	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-09
16	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-09
17	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-09
18	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-09
19	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-09
20	Spectrum Analyzer	8591E	3649A05888	HP	Oct-09
21	Spectrum Analyzer	8563E	3425A02505	HP	Apr-09
22	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Apr-09
23	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-09
24	RF Switch	MP59B	6200414971	ANRITSU	Jun-09
25	RF Switch	MP59B	6200438565	ANRITSU	Jun-09
26	Power Divider	11636A	6243	HP	Oct-09
27	DC Power Supply	6622A	3448A03079	HP	Oct-09
28	Attenuator (30dB)	11636A	6243	HP	Oct-09
29	Frequency Counter	5342A	2826A12411	HP	Apr-09
30	Power Meter	EPM-441A	GB32481702	HP	Apr-09
31	Power Sensor	8481A	2702A64048	HP	Apr-09
32	Audio Analyzer	8903B	3729A18901	HP	Oct-09
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-09
34	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-09
35	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-09
36	Stop Watch	HS-3	601Q09R	CASIO	Apr-09