



## CFR 47 FCC PART 15 SUBPART C

### CERTIFICATION TEST REPORT

*For*

**SoundBar**

**MODEL NUMBER: HW-A450, HW-A460, HW-A430, HW-A440, HW-A40M,  
HW-A47M, HW-A470, HW-A450\*\*\*, HW-A450/\*\*, HW-A460\*\*\*, HW-A460/\*\*,  
HW-A430\*\*\*, HW-A430/\*\*, HW-A440\*\*\*, HW-A440/\*\*, HW-A40M\*\*\*, HW-A40M/\*\*,  
HW-A47M\*\*\*, HW-A47M/\*\*, HW-A470\*\*\*, HW-A470/\*\***

**FCC ID: A3LHWA450**

**REPORT NUMBER: 4789711459-17**

**ISSUE DATE: November 30, 2020**

*Prepared for*

**Samsung Electronics Co Ltd  
19 Chapin Rd., Building D Pine Brook New Jersey United States 07058**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	11/30/2020	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1)	Pass
2	Conducted Output Power	FCC 15.247 (b) (1)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III	Pass
6	Conducted Bandedge	FCC 15.247 (d)	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
8	Conducted Emission Test for AC Power Port	FCC 15.207	Pass
9	Antenna Requirement	FCC 15.203	Pass
<b>Note:</b> 1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >when <Accuracy Method> decision rule is applied.			

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>MAXIMUM PEAK OUTPUT POWER .....</i>	<i>9</i>
5.3. <i>PACKET TYPE CONFIGURATION .....</i>	<i>10</i>
5.4. <i>CHANNEL LIST.....</i>	<i>11</i>
5.5. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>11</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>11</i>
5.7. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>12</i>
5.8. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>12</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>16</i>
7.2. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH .....</i>	<i>17</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>19</i>
7.4. <i>CARRIER FREQUENCY SEPARATION.....</i>	<i>20</i>
7.5. <i>NUMBER OF HOPPING FREQUENCIES .....</i>	<i>22</i>
7.6. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>24</i>
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>26</i>
<b>8. RADIATED TEST RESULTS.....</b>	<b>28</b>
8.1. <i>RESTRICTED BANDEDGE .....</i>	<i>34</i>
8.1.1. <i>GFSK MODE .....</i>	<i>34</i>
8.1.2. <i>8DPSK MODE .....</i>	<i>37</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) .....</i>	<i>40</i>
8.2.1. <i>8DPSK MODE .....</i>	<i>40</i>
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz).....</i>	<i>42</i>
8.3.1. <i>GFSK MODE .....</i>	<i>42</i>



8.3.2.	8DPSK MODE .....	48
8.4.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz) .....	54
8.4.1.	GFSK MODE .....	54
8.5.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz) .....	56
8.5.1.	GFSK MODE .....	56
8.6.	SPURIOUS EMISSIONS BELOW 30 MHz .....	58
8.6.1.	GFSK MODE .....	58
8.7.	WORST-CASE CO-LOCATION .....	61
<b>9.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>65</b>
9.1.1.	GFSK MODE .....	66
<b>10.</b>	<b>ANTENNA REQUIREMENTS .....</b>	<b>68</b>
<b>11.</b>	<b>Appendix .....</b>	<b>69</b>
11.1.	Appendix A: 20dB Emission Bandwidth .....	69
11.1.1.	Test Result .....	69
11.1.2.	Test Graphs .....	70
11.2.	Appendix B: Occupied Channel Bandwidth .....	72
11.2.1.	Test Result .....	72
11.2.2.	Test Graphs .....	73
11.3.	Appendix C: Maximum peak conducted output power .....	75
11.3.1.	Test Result .....	75
11.4.	Appendix D: Carrier frequency separation .....	76
11.4.1.	Test Result .....	76
11.4.2.	Test Graphs .....	77
11.5.	Appendix E: Time of occupancy .....	78
11.5.1.	Test Result .....	78
11.5.2.	Test Graphs .....	79
11.6.	Appendix F: Number of hopping channels .....	81
11.6.1.	Test Result .....	81
11.6.2.	Test Graphs .....	82
11.7.	Appendix G: Band edge measurements .....	83
11.7.1.	Test Result .....	83
11.7.2.	Test Graphs .....	84
11.8.	Appendix H: Conducted Spurious Emission .....	87
11.8.1.	Test Result .....	87
11.8.2.	Test Graphs .....	88
11.9.	Appendix I: Duty Cycle .....	94
11.9.1.	Test Result .....	94
11.9.2.	Test Graphs .....	95



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Samsung Electronics Co Ltd  
Address: 19 Chapin Rd., Building D Pine Brook New Jersey United States 07058

## Manufacturer Information

Company Name: Samsung Electronics Co Ltd  
Address: 19 Chapin Rd., Building D Pine Brook New Jersey United States 07058

## EUT Information

EUT Name: SoundBar  
Model: HW-A450  
Serial Model: Please refer to clause 5.1. Description of EUT  
Brand: SAMSUNG  
Sample Received Date: November 12,2020  
Sample Status: Normal  
Sample ID: 3440010  
Date of Tested: November 12,2020~ November 30,2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Kebo Zhang  
Project Engineer

Check By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	SoundBar		
Model	HW-A450		
Series Model	HW-A460, HW-A430, HW-A440, HW-A40M, HW-A47M, HW-A470, HW-A450***, HW-A450/**, HW-A460***, HW-A460/**, HW-A430***, HW-A430/**, HW-A440***, HW-A440/**, HW-A40M***, HW-A40M/**, HW-A47M***, HW-A47M/**, HW-A470***, HW-A470/**		
Model difference	HW-A460, HW-A430, HW-A440, HW-A40M, HW-A47M, HW-A470, HW-A450***, HW-A450/**, HW-A460***, HW-A460/**, HW-A430***, HW-A430/**, HW-A440***, HW-A440/**, HW-A40M***, HW-A40M/**, HW-A47M***, HW-A47M/**, HW-A470***, HW-A470/** ("*" represents any alphanumeric character or blank) have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with HW-A450. The difference lies only model number and marketing purpose.		
Technology	Bluetooth – BR & EDR		
Transmit Frequency Range	2402 MHz ~ 2480 MHz		
Mode	Basic Rate	Enhanced Data Rate	
Modulation	GFSK	π/4-DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate	1 Mbps	2 Mbps	3M bps
Supply Voltage	AC mains State	AC 120V, 60Hz	

### 5.2. MAXIMUM PEAK OUTPUT POWER

Modulation	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	4.31	7.01
8DPSK	2402 ~ 2480	0-78[79]	2.61	5.31



### 5.3. PACKET TYPE CONFIGURATION

Modulation	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

## 5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

## 5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK-3DH5	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK-DH5	Hop	2402 MHz ~ 2480 MHz
8DPSK-3DH5	Hop	2402 MHz ~ 2480 MHz

Note: The hop is hopping mode.

## 5.6. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate	Packet Type
BR	FHSS	GFSK	1Mbit/s	DH5
EDR	FHSS	8DPSK	3Mbit/s	3-DH5

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates. Only GFSK and 8DPSK test data were report in this report.

## 5.7. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5 MHz Band				
Test Software		Tera Term		
Modulation	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	63	63	63
8DPSK	1	63	63	63

## 5.8. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	Flex PIFA antenna	2.7

Modulation	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customer.

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	ThinkPad	X230i	/
2	UART	/	/	/
3	DVD	Pioneer	HGKD001867CN	/
4	USB Disk	Kingston	32 GB	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	N/A	N/A	1	N/A

### ACCESSORIES


Item	Accessory	Brand Name	Model Name	Cable Length(m)
1	Optical Cable	/	/	1.5M

Note: This cable is provided by the customer.

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

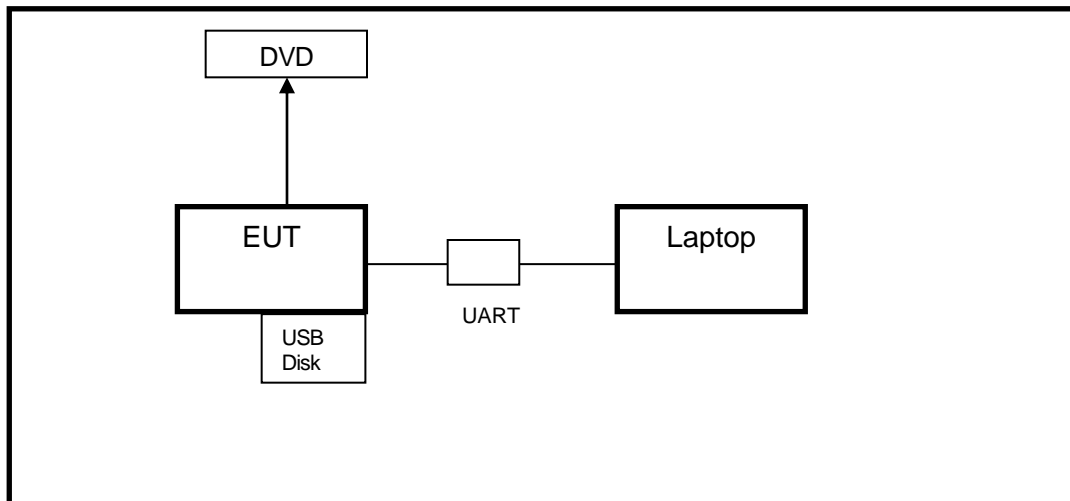

**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Two-Line V- Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020
Software						
Used	Description		Manufacturer	Name	Version	
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		Farad	EZ-EMC	Ver. UL-3A1	
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305- 00066	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307- 00003	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-001- 3000	TRS-302- 00050	Dec.5, 2019	Dec.5, 2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8- 2350-2400- 2483.5- 2533.5- 40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV12- 5695-5725- 5850-5880- 40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	High Pass Filter	Wainwright	WHKX10- 5850-6500- 1800-40SS	4	Dec.05,2019	Dec.05,2020



Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020A	MY49100060	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power Sensor	Keysight	U2021XA	MY5100022	Dec.06,2019	Dec.06,2020

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

#### RESULTS

Please refer to appendix I.



## 7.2. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix A and B.

### 7.3. CONDUCTED OUTPUT POWER


#### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).  
Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

#### RESULTS

Please refer to appendix C.

## 7.4. CARRIER FREQUENCY SEPARATION

### LIMITS

CFR 47 FCC Part15 (15.247),			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1))	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to Appendix D.

## 7.5. NUMBER OF HOPPING FREQUENCIES

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix F.

## 7.6. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time: Burst Width \* (1600/2) \* 31.6 / (channel number)

DH3/3DH3 Dwell Time: Burst Width \* (1600/4) \* 31.6 / (channel number)

DH5/3DH5 Dwell Time: Burst Width \* (1600/6) \* 31.6 / (channel number)

For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time: Burst Width \* (800/2) \* 8 / (channel number)


DH3/3DH3 Dwell Time: Burst Width \* (800/4) \* 8 / (channel number)

DH5/3DH5 Dwell Time: Burst Width \* (800/6) \* 8 / (channel number)





**TEST SETUP**

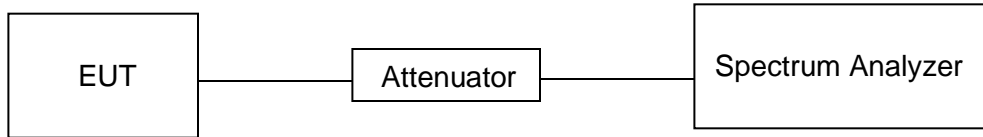

**TEST ENVIRONMENT**

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix E.

## 7.7. CONDUCTED BANDEGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.



**TEST SETUP**



**TEST ENVIRONMENT**

Temperature	26.2 °C	Relative Humidity	60.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix G & H.



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz		
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
		Quasi-Peak
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54
Above 1000	500	Peak
		Average
		74
		54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30


FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30 MHz

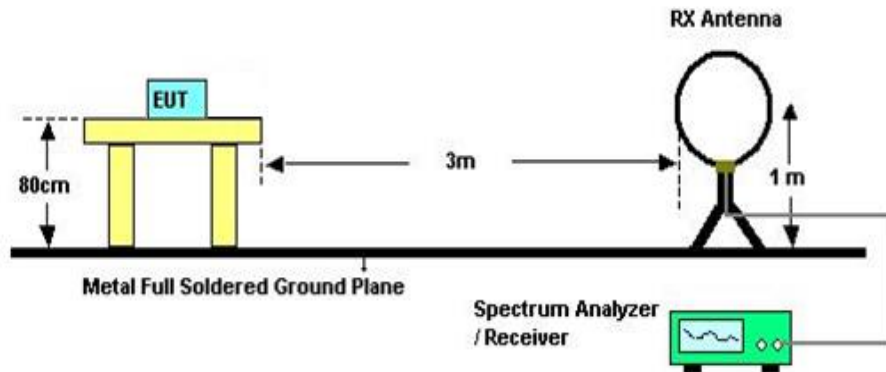

The setting of the spectrum analyser


RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.



3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

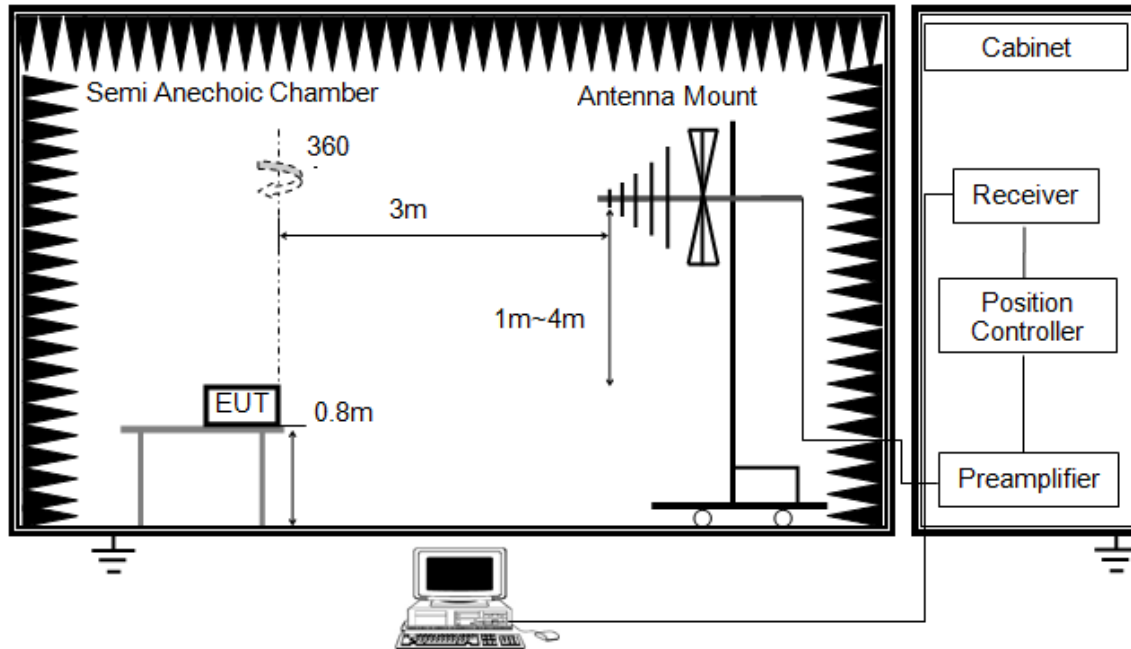


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

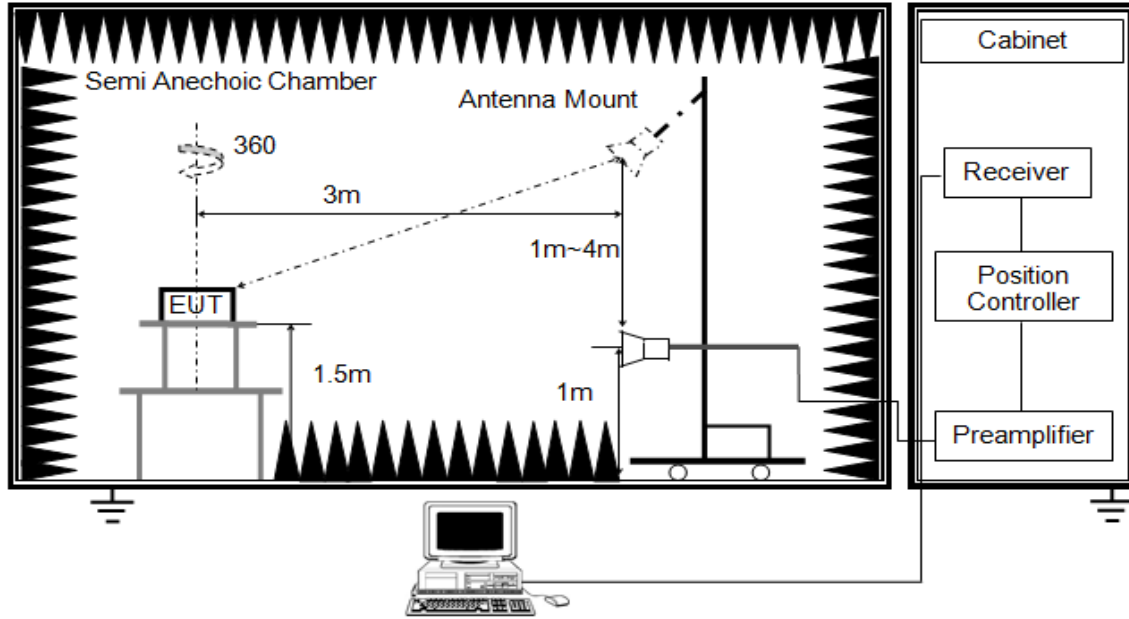


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.



X axis, Y axis, Z axis positions :

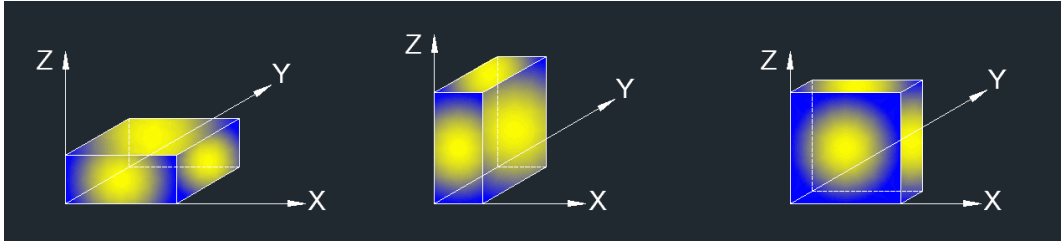

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: Simultaneous transmission had been evaluated with the wireless 5.8GHz and BT transmitter and there were not any additional or worse emissions found. Only the worst data was recorded in the test report.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

**TEST ENVIRONMENT**


Temperature	25.2 °C	Relative Humidity	48.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

## 8.1. RESTRICTED BANDEDGE

### 8.1.1. GFSK MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

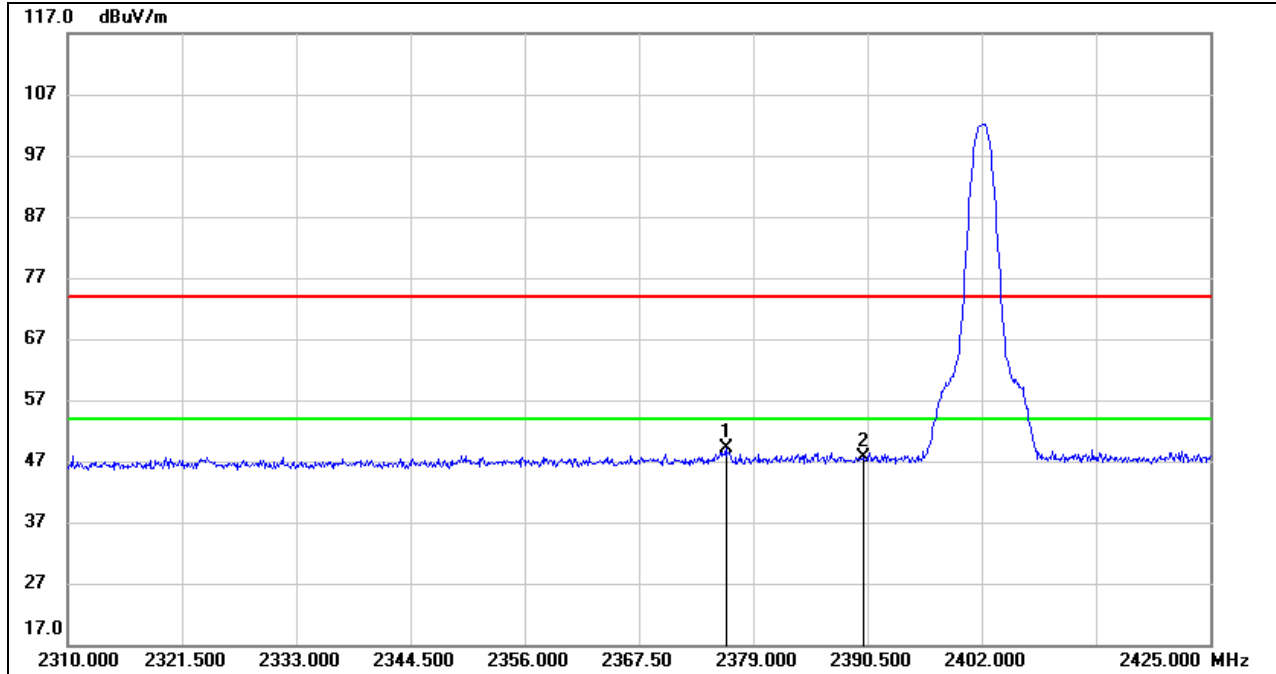


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.240	37.24	11.87	49.11	74.00	-24.89	peak
2	2390.000	35.71	11.96	47.67	74.00	-26.33	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**


**PEAK**

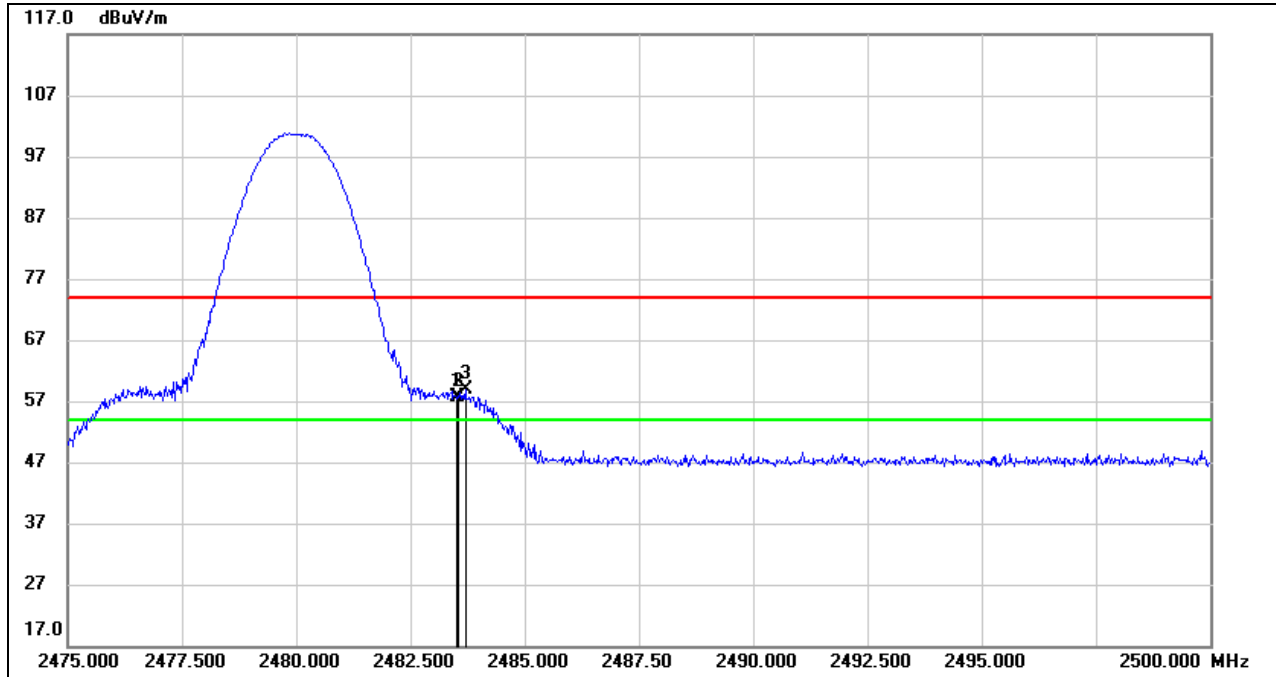

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.25	12.38	57.63	74.00	-16.37	peak
2	2483.550	45.26	12.38	57.64	74.00	-16.36	peak
3	2483.700	46.44	12.38	58.82	74.00	-15.18	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**AVG**

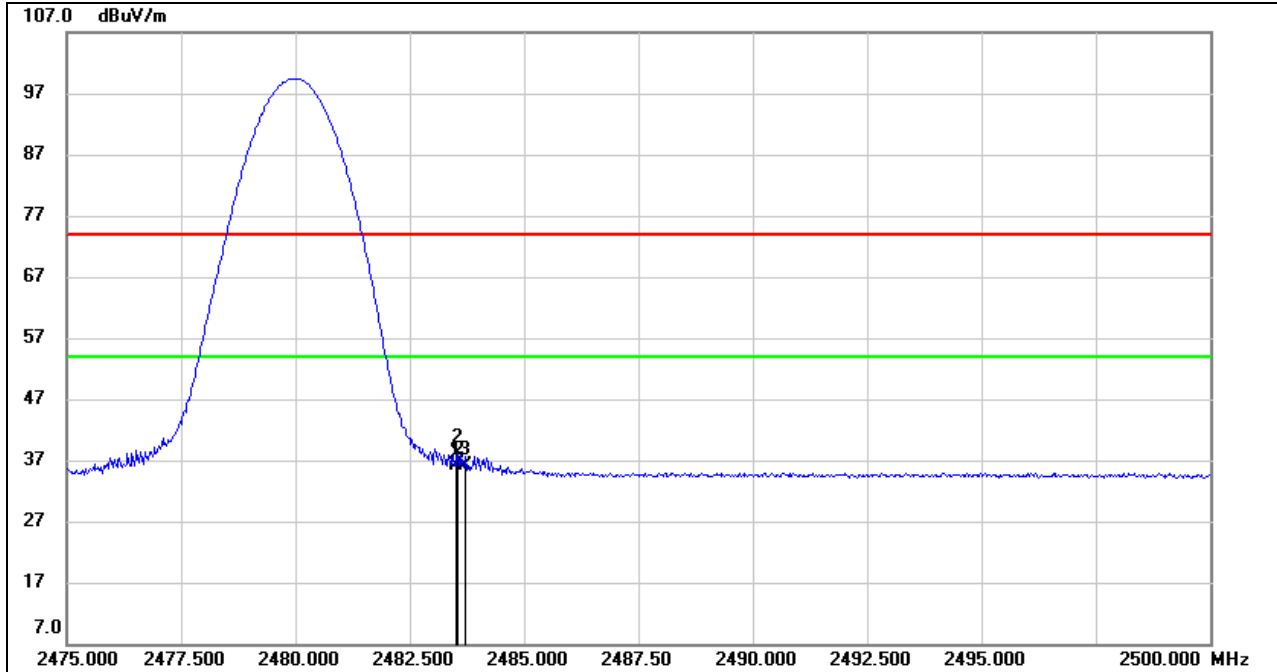


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	23.75	12.38	36.13	54.00	-17.87	AVG
2	2483.550	25.63	12.38	38.01	54.00	-15.99	AVG
3	2483.700	23.79	12.38	36.17	54.00	-17.83	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Both horizontal and vertical had been tested, only the worst data was recorded in the report.

### 8.1.2. 8DPSK MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

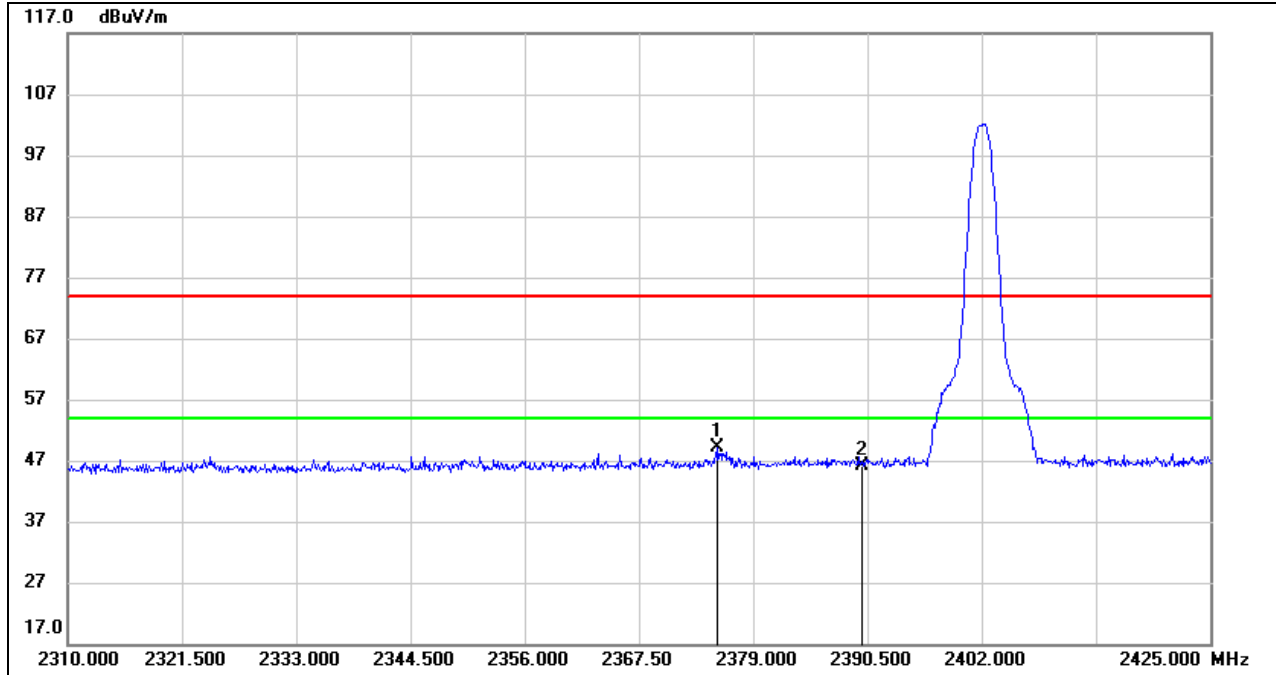


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.435	37.17	11.86	49.03	74.00	-24.97	peak
2	2390.000	34.19	11.96	46.15	74.00	-27.85	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**


**PEAK**

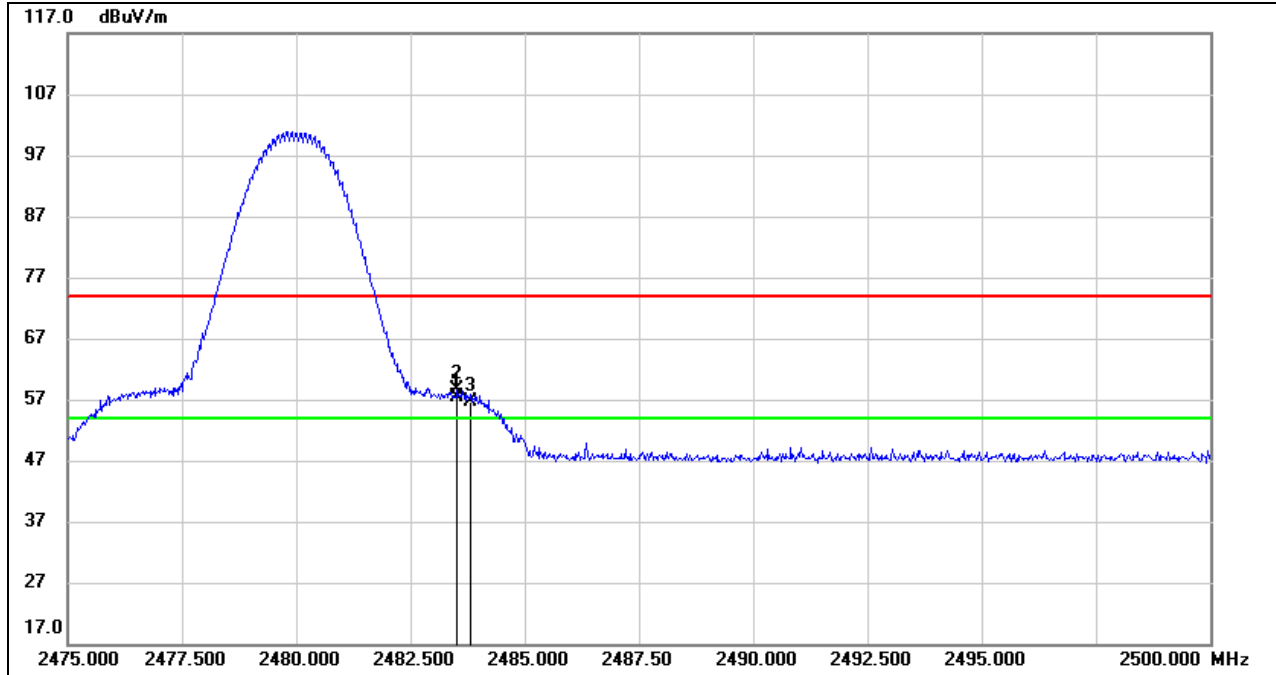

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.09	12.38	57.47	74.00	-16.53	peak
2	2483.525	46.31	12.38	58.69	74.00	-15.31	peak
3	2483.825	44.32	12.38	56.70	74.00	-17.30	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**AVG**

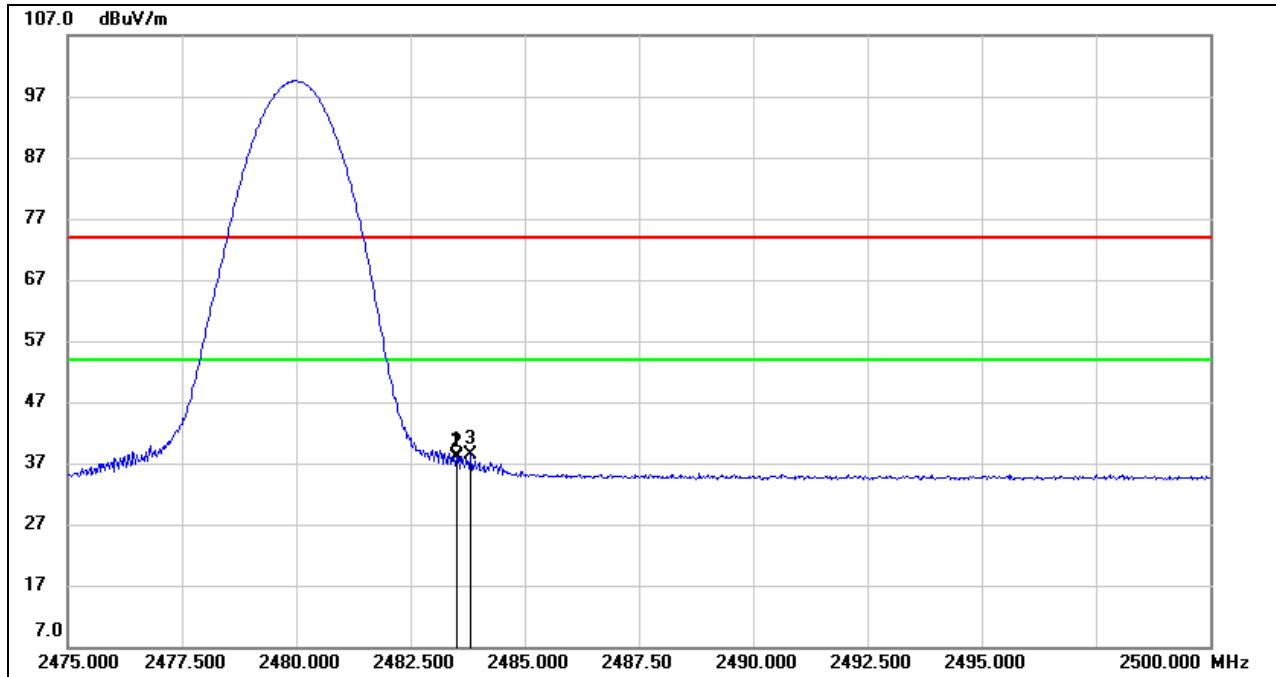

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.71	12.38	38.09	54.00	-15.91	AVG
2	2483.525	25.53	12.38	37.91	54.00	-16.09	AVG
3	2483.825	26.08	12.38	38.46	54.00	-15.54	AVG


- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Both horizontal and vertical had been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. 8DPSK MODE

#### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

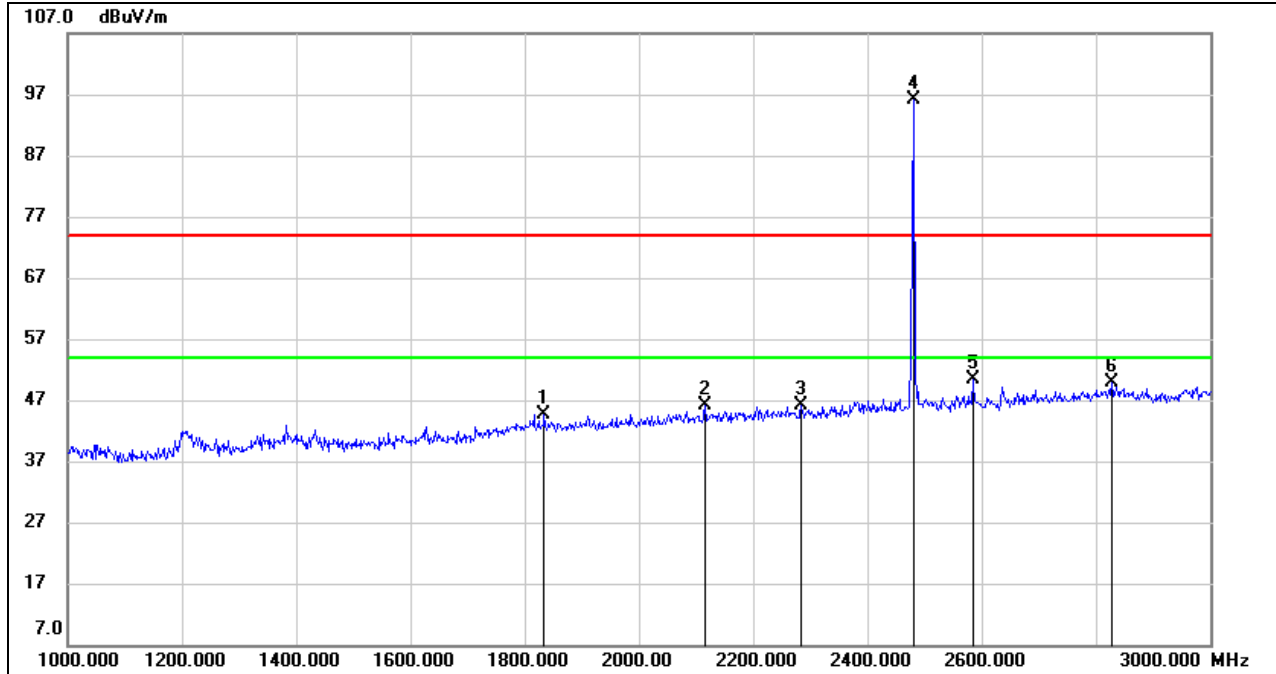


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1834.000	34.79	9.85	44.64	74.00	-29.36	peak
2	2116.000	34.98	11.08	46.06	74.00	-27.94	peak
3	2284.000	34.81	11.32	46.13	74.00	-27.87	peak
4	2480.000	83.76	12.35	96.11	/	/	fundamental
5	2584.000	37.96	12.41	50.37	74.00	-23.63	peak
6	2828.000	35.95	13.84	49.79	74.00	-24.21	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

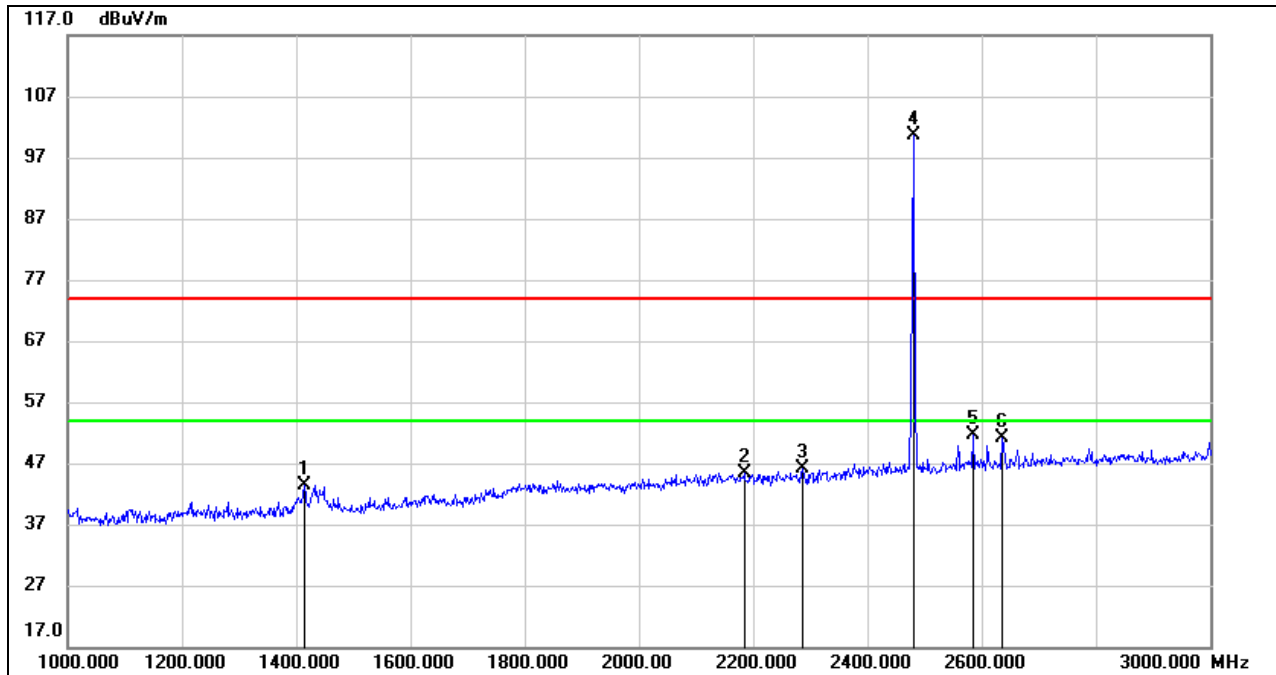

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1414.000	36.67	6.74	43.41	74.00	-30.59	peak
2	2184.000	34.04	11.27	45.31	74.00	-28.69	peak
3	2286.000	34.84	11.32	46.16	74.00	-27.84	peak
4	2480.000	88.29	12.35	100.64	/	/	fundamental
5	2584.000	39.16	12.41	51.57	74.00	-22.43	peak
6	2636.000	38.63	12.62	51.25	74.00	-22.75	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. GFSK MODE


##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

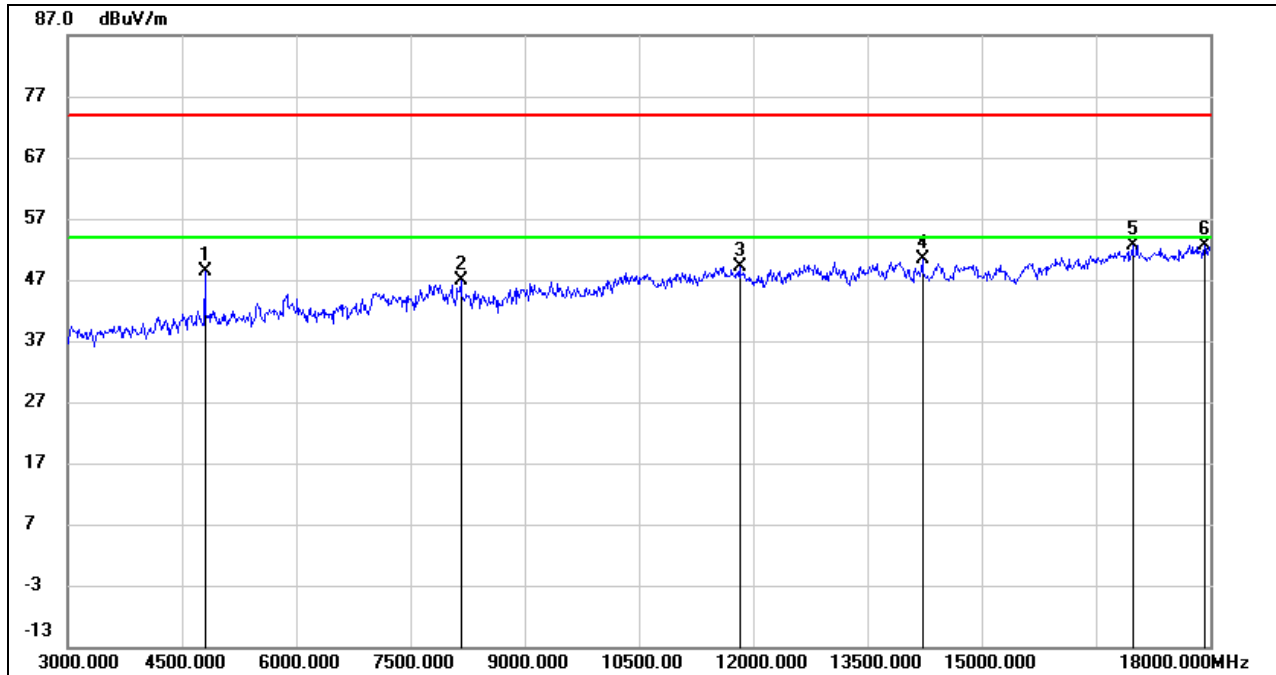

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	47.94	0.46	48.40	74.00	-25.60	peak
2	8160.000	38.72	8.18	46.90	74.00	-27.10	peak
3	11820.000	35.92	13.19	49.11	74.00	-24.89	peak
4	14220.000	33.94	16.34	50.28	74.00	-23.72	peak
5	16980.000	32.33	20.31	52.64	74.00	-21.36	peak
6	17925.000	29.27	23.37	52.64	74.00	-21.36	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

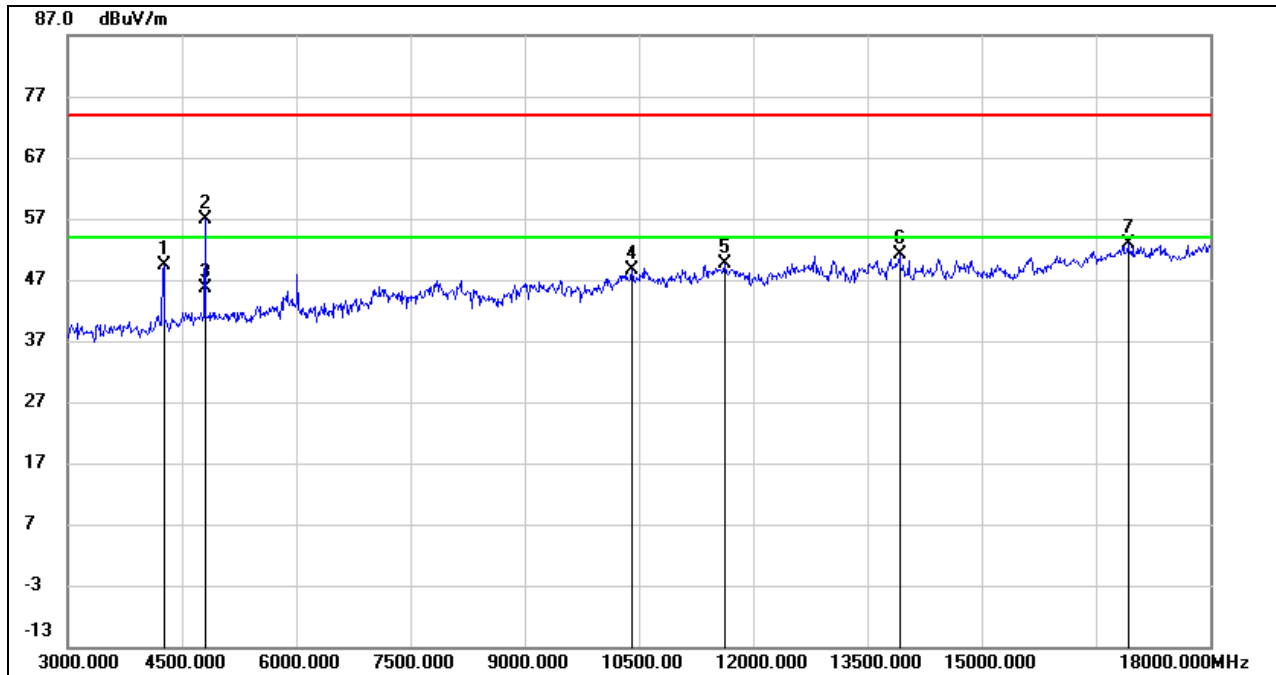

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4260.000	51.03	-1.71	49.32	74.00	-24.68	peak
2	4800.000	56.51	0.46	56.97	74.00	-17.03	peak
3	4800.000	45.15	0.46	45.61	54.00	-8.39	AVG
4	10410.000	37.58	11.02	48.60	74.00	-25.40	peak
5	11625.000	36.55	13.12	49.67	74.00	-24.33	peak
6	13920.000	34.99	16.17	51.16	74.00	-22.84	peak
7	16920.000	32.71	20.06	52.77	74.00	-21.23	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

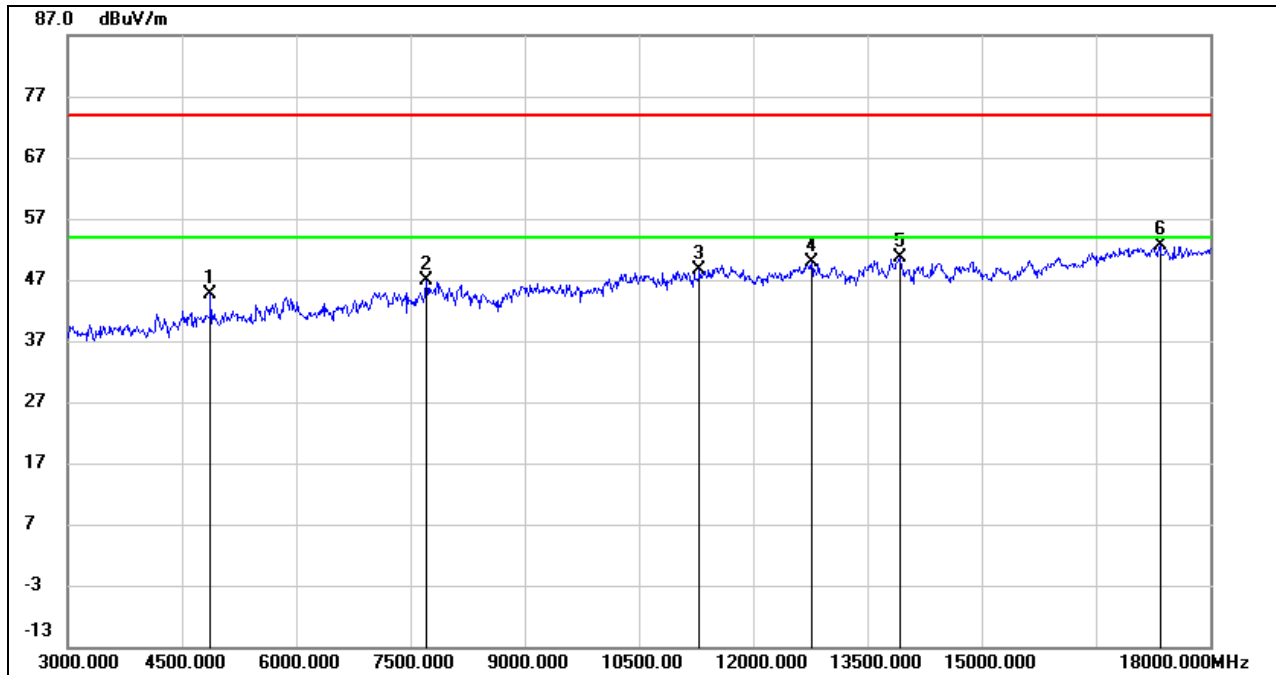

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.77	0.76	44.53	74.00	-29.47	peak
2	7710.000	40.12	6.64	46.76	74.00	-27.24	peak
3	11295.000	36.28	12.34	48.62	74.00	-25.38	peak
4	12765.000	34.64	15.18	49.82	74.00	-24.18	peak
5	13920.000	34.35	16.17	50.52	74.00	-23.48	peak
6	17340.000	30.96	21.61	52.57	74.00	-21.43	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

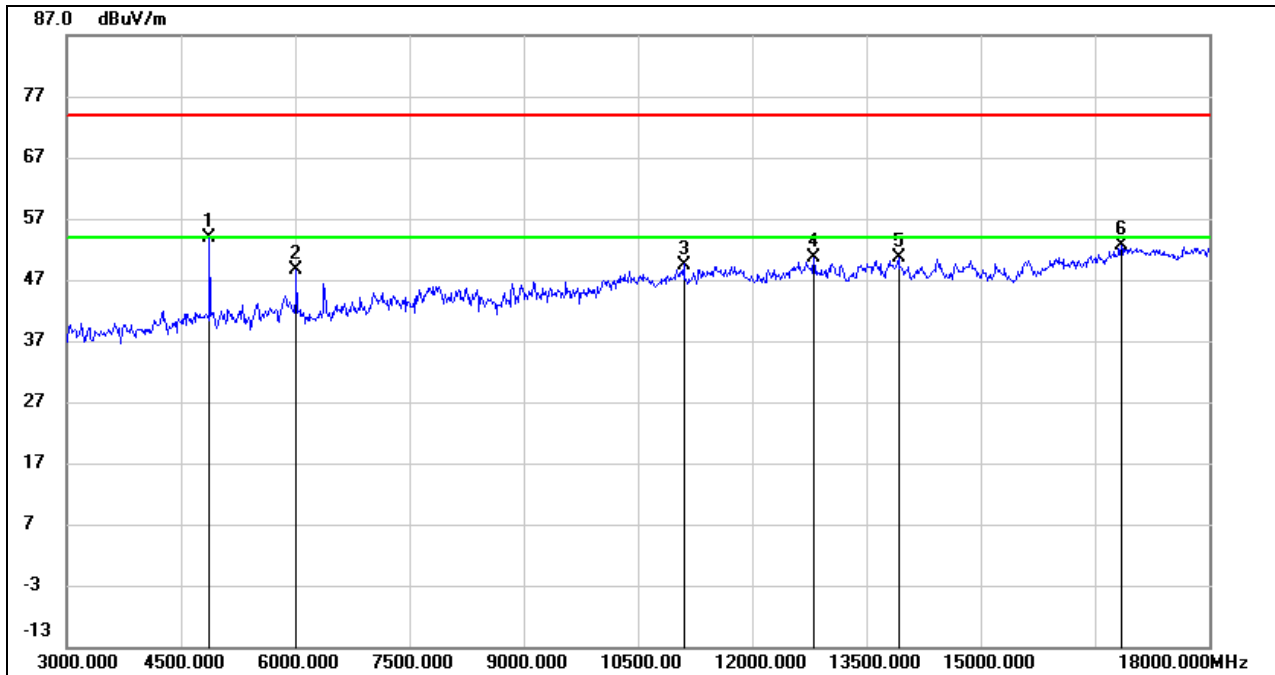

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	53.19	0.76	53.95	74.00	-20.05	peak
2	6015.000	45.34	3.31	48.65	74.00	-25.35	peak
3	11100.000	36.94	12.56	49.50	74.00	-24.50	peak
4	12810.000	34.95	15.59	50.54	74.00	-23.46	peak
5	13920.000	34.46	16.17	50.63	74.00	-23.37	peak
6	16845.000	32.61	19.96	52.57	74.00	-21.43	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

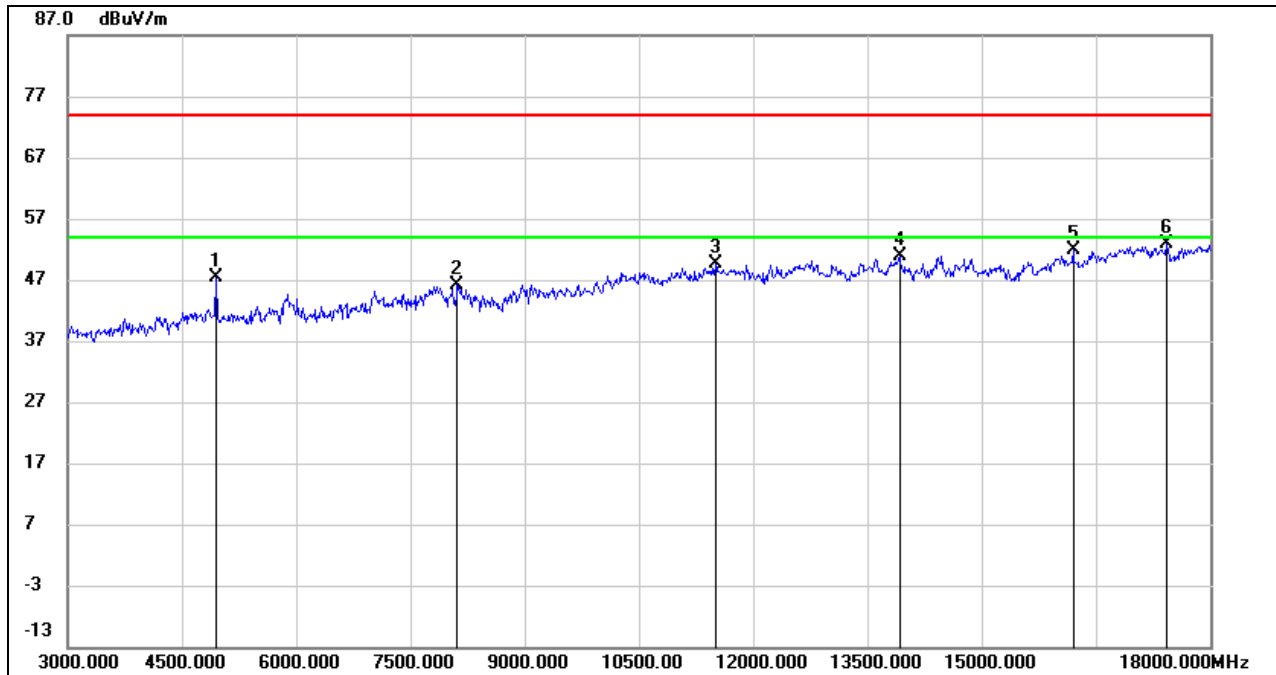

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	46.31	1.13	47.44	74.00	-26.56	peak
2	8115.000	38.12	7.90	46.02	74.00	-27.98	peak
3	11505.000	36.21	13.42	49.63	74.00	-24.37	peak
4	13920.000	34.63	16.17	50.80	74.00	-23.20	peak
5	16200.000	33.39	18.50	51.89	74.00	-22.11	peak
6	17430.000	31.51	21.38	52.89	74.00	-21.11	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

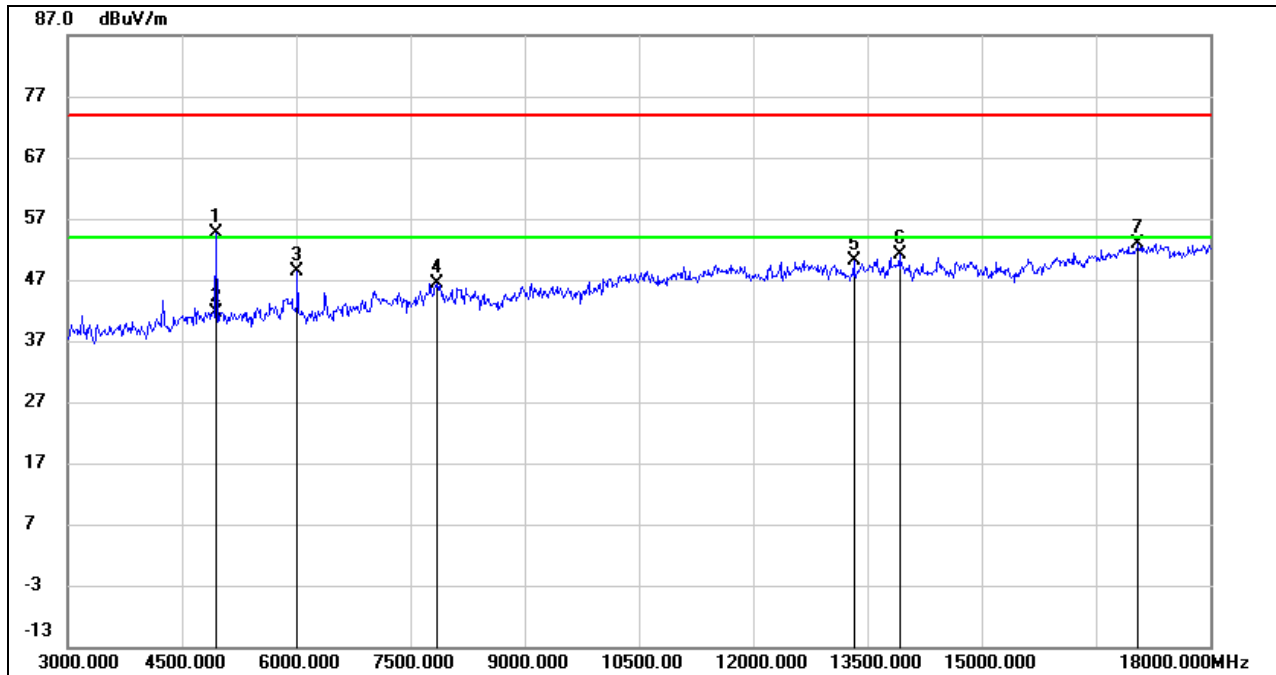


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	53.61	1.13	54.74	74.00	-19.26	peak
2	4950.000	40.41	1.13	41.54	54.00	-12.46	AVG
3	6015.000	44.95	3.31	48.26	74.00	-25.74	peak
4	7845.000	38.85	7.62	46.47	74.00	-27.53	peak
5	13320.000	34.36	15.74	50.10	74.00	-23.90	peak
6	13920.000	35.07	16.17	51.24	74.00	-22.76	peak
7	17055.000	32.39	20.53	52.92	74.00	-21.08	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.2. 8DPSK MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

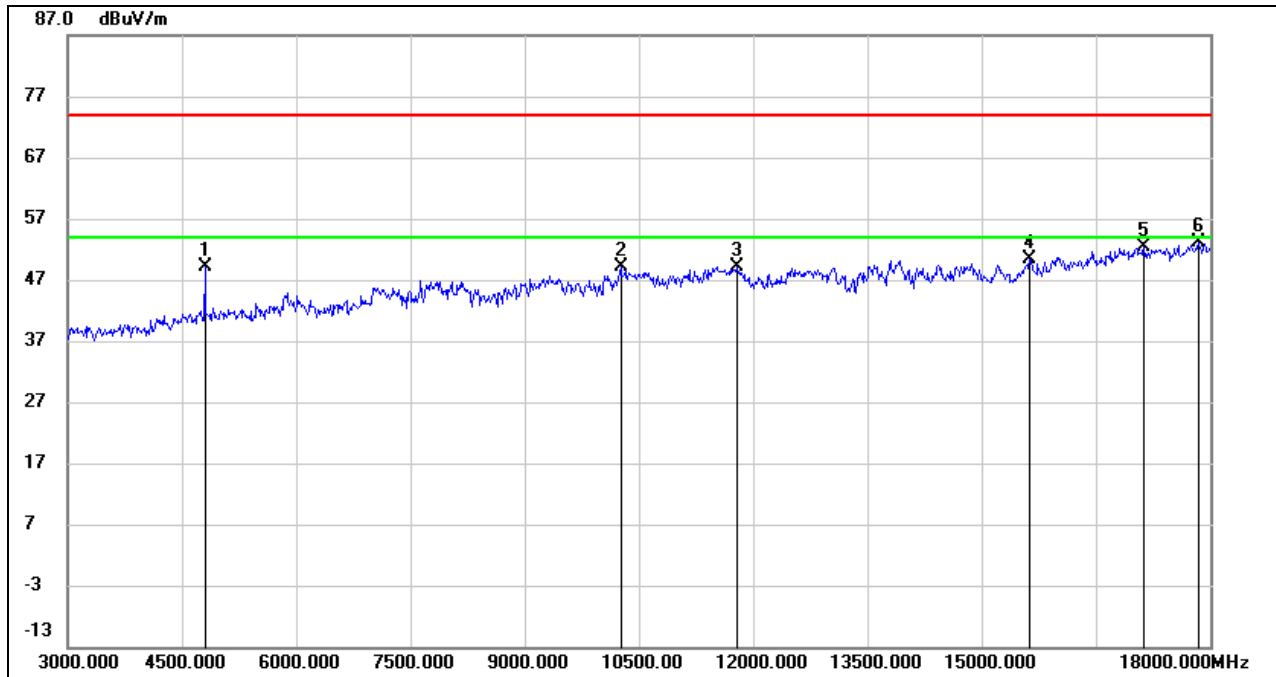


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	48.55	0.46	49.01	74.00	-24.99	peak
2	10260.000	38.38	10.71	49.09	74.00	-24.91	peak
3	11790.000	35.99	13.17	49.16	74.00	-24.84	peak
4	15630.000	33.49	16.89	50.38	74.00	-23.62	peak
5	17130.000	31.62	20.72	52.34	74.00	-21.66	peak
6	17850.000	29.70	23.32	53.02	74.00	-20.98	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.






**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

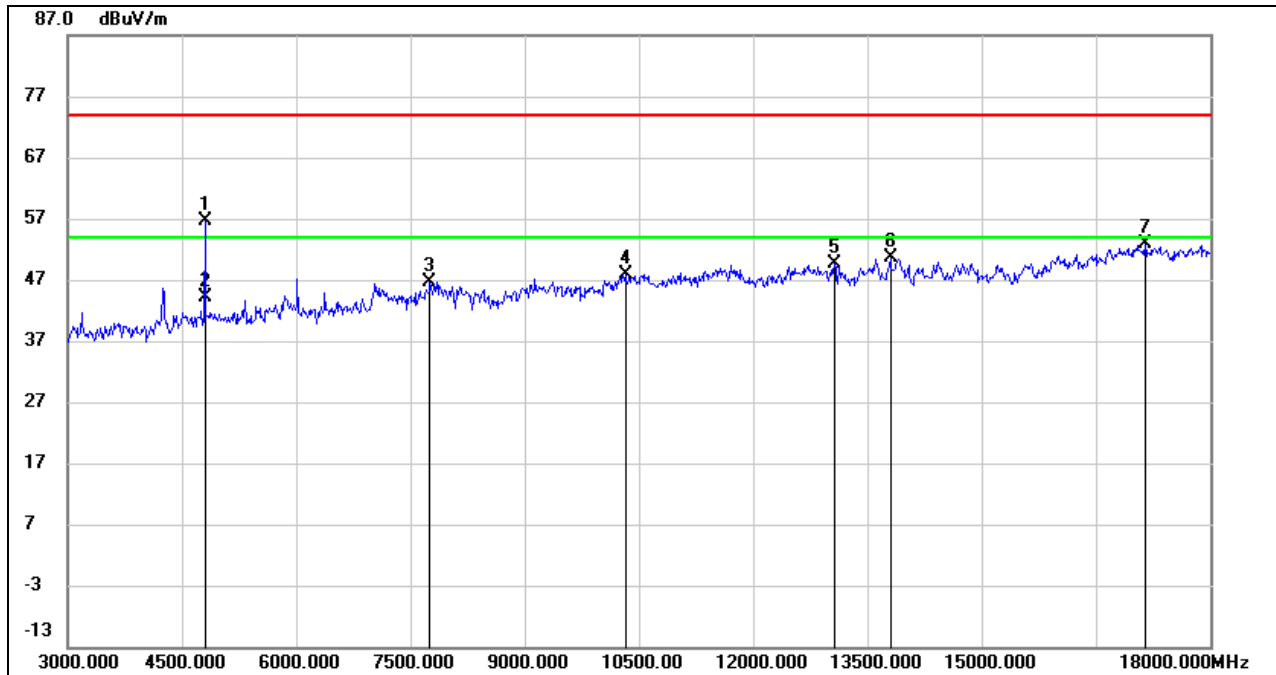

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	56.11	0.46	56.57	74.00	-17.43	peak
2	4800.000	43.67	0.46	44.13	54.00	-9.87	AVG
3	7755.000	39.45	7.29	46.74	74.00	-27.26	peak
4	10320.000	36.93	11.05	47.98	74.00	-26.02	peak
5	13065.000	34.56	15.11	49.67	74.00	-24.33	peak
6	13800.000	33.56	17.10	50.66	74.00	-23.34	peak
7	17145.000	32.00	20.77	52.77	74.00	-21.23	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

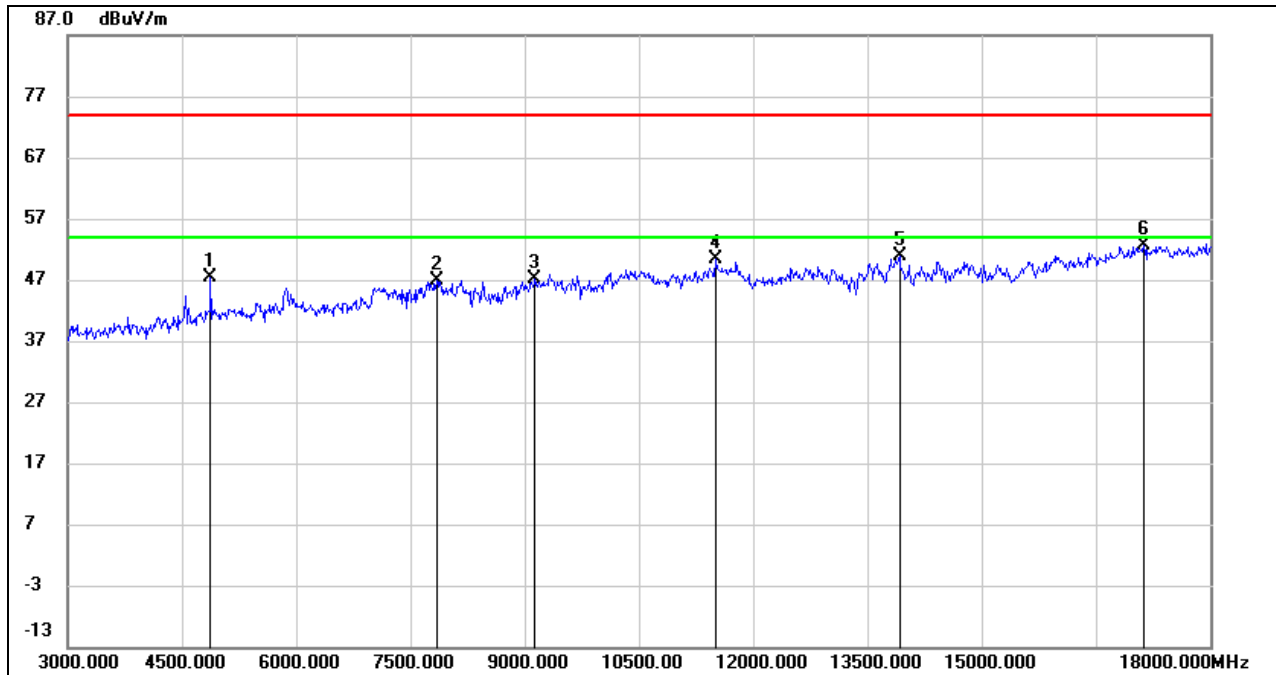

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.62	0.76	47.38	74.00	-26.62	peak
2	7845.000	39.22	7.62	46.84	74.00	-27.16	peak
3	9135.000	38.06	9.07	47.13	74.00	-26.87	peak
4	11505.000	36.87	13.42	50.29	74.00	-23.71	peak
5	13920.000	34.60	16.17	50.77	74.00	-23.23	peak
6	17130.000	32.01	20.72	52.73	74.00	-21.27	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

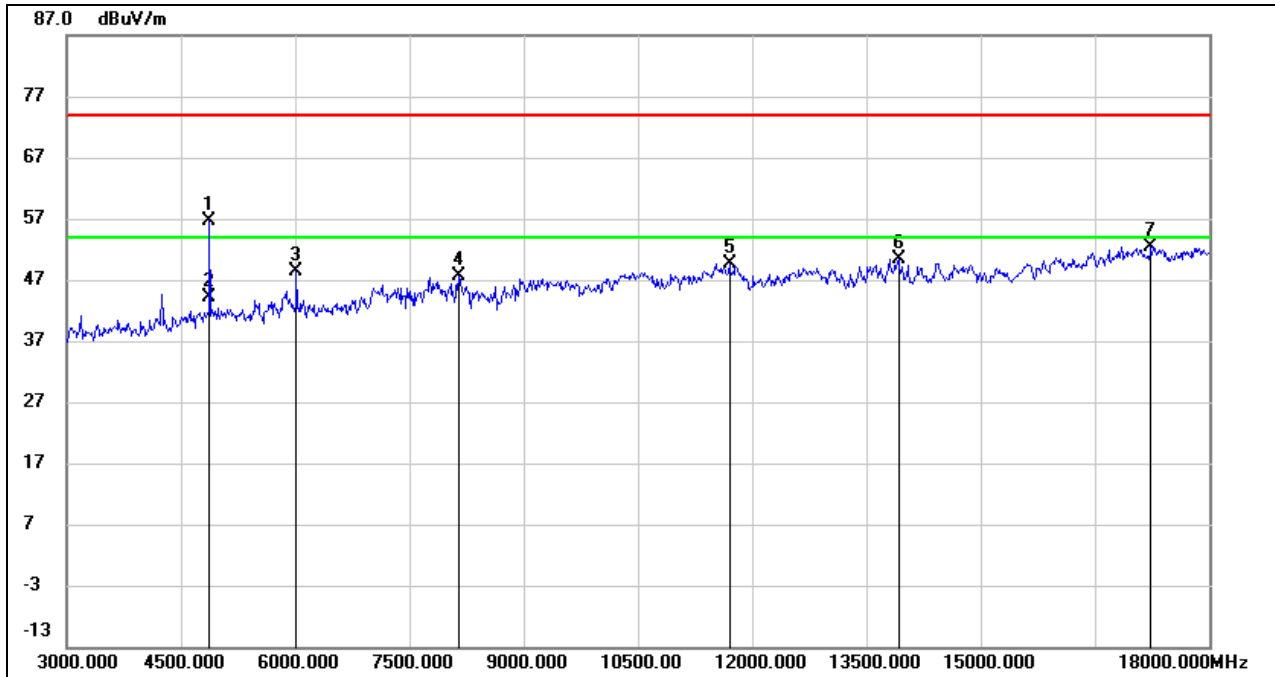

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	55.97	0.76	56.73	74.00	-17.27	peak
2	4875.000	43.35	0.76	44.11	54.00	-9.89	AVG
3	6015.000	45.04	3.31	48.35	74.00	-25.65	peak
4	8145.000	39.47	8.08	47.55	74.00	-26.45	peak
5	11700.000	36.63	12.95	49.58	74.00	-24.42	peak
6	13920.000	34.28	16.17	50.45	74.00	-23.55	peak
7	17235.000	31.29	21.21	52.50	74.00	-21.50	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

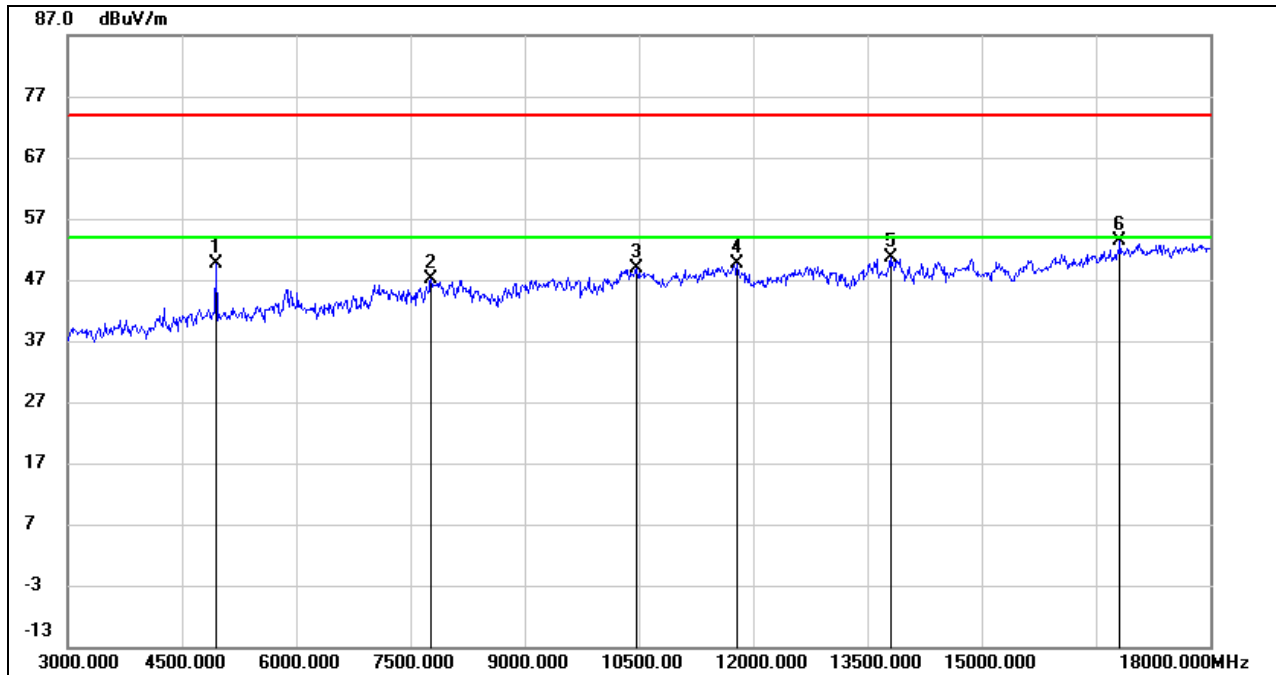
**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	48.40	1.13	49.53	74.00	-24.47	peak
2	7770.000	39.66	7.50	47.16	74.00	-26.84	peak
3	10470.000	37.66	11.25	48.91	74.00	-25.09	peak
4	11790.000	36.36	13.17	49.53	74.00	-24.47	peak
5	13800.000	33.45	17.10	50.55	74.00	-23.45	peak
6	16815.000	33.30	19.96	53.26	74.00	-20.74	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

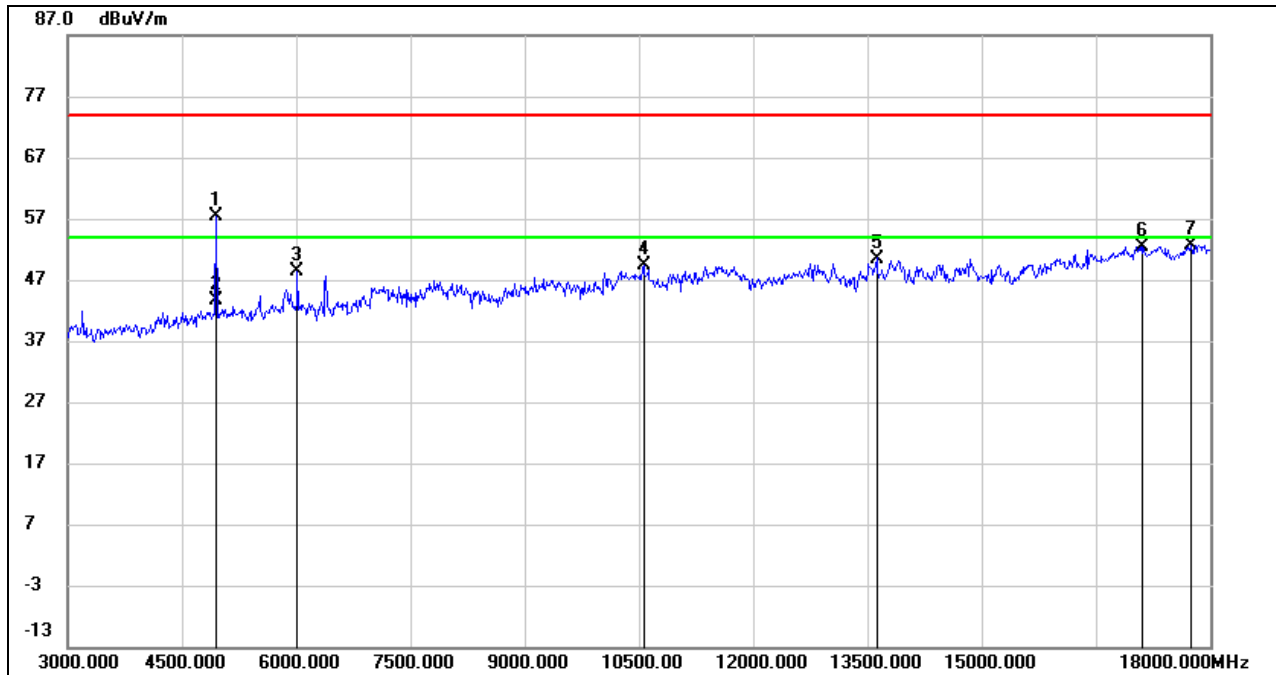


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	56.34	1.13	57.47	74.00	-16.53	peak
2	4950.000	42.41	1.13	43.54	54.00	-10.46	AVG
3	6015.000	45.03	3.31	48.34	74.00	-25.66	peak
4	10560.000	37.53	11.73	49.26	74.00	-24.74	peak
5	13620.000	34.51	15.99	50.50	74.00	-23.50	peak
6	17115.000	31.78	20.68	52.46	74.00	-21.54	peak
7	17745.000	29.91	22.82	52.73	74.00	-21.27	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

### 8.4.1. GFSK MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

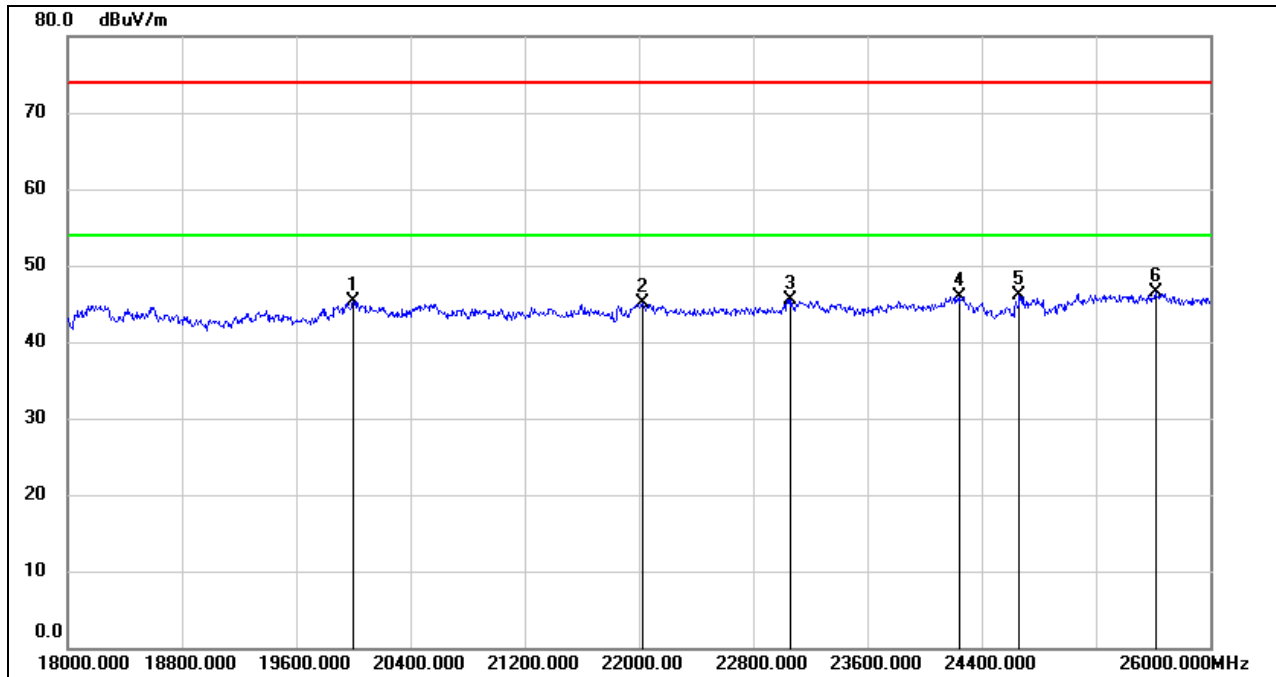


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	20000.000	50.81	-5.45	45.36	74.00	-28.64	peak
2	22024.000	49.54	-4.46	45.08	74.00	-28.92	peak
3	23064.000	48.99	-3.42	45.57	74.00	-28.43	peak
4	24248.000	48.82	-2.83	45.99	74.00	-28.01	peak
5	24664.000	48.40	-2.33	46.07	74.00	-27.93	peak
6	25616.000	47.68	-1.24	46.44	74.00	-27.56	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

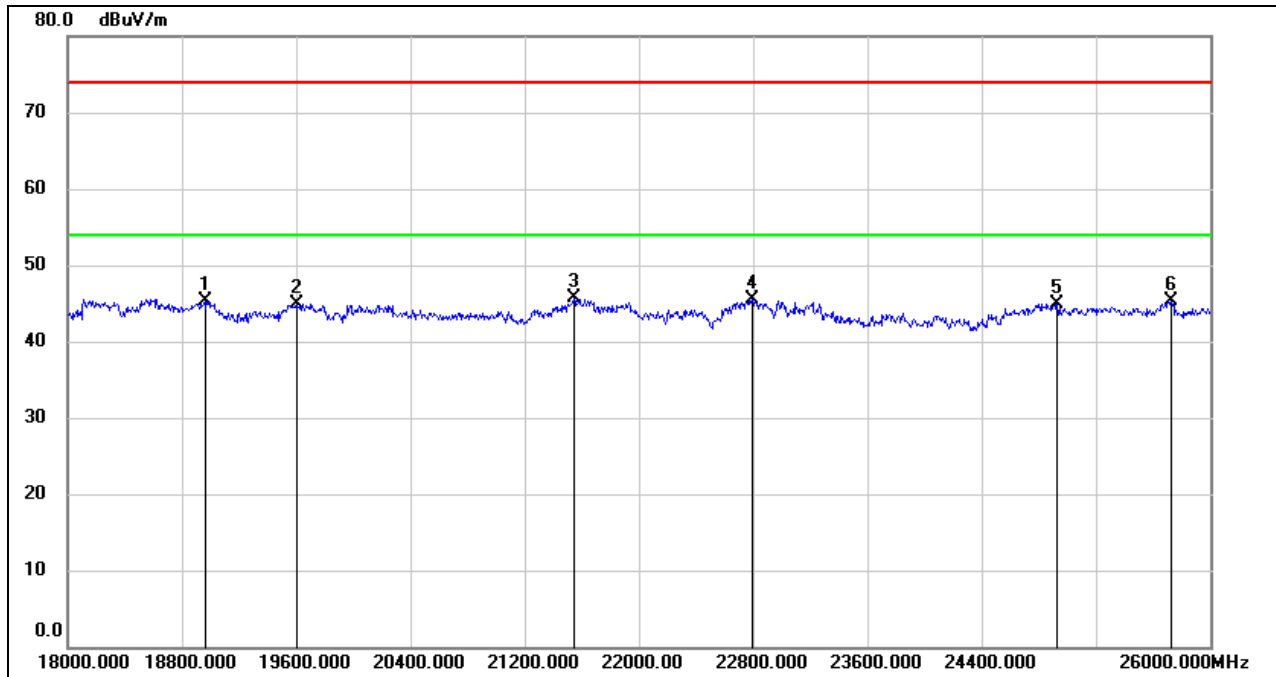**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18960.000	50.51	-5.25	45.26	74.00	-28.74	peak
2	19600.000	50.29	-5.43	44.86	74.00	-29.14	peak
3	21544.000	50.26	-4.63	45.63	74.00	-28.37	peak
4	22792.000	49.11	-3.65	45.46	74.00	-28.54	peak
5	24928.000	47.04	-2.15	44.89	74.00	-29.11	peak
6	25728.000	46.11	-0.72	45.39	74.00	-28.61	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.

## 8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

### 8.5.1. GFSK MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

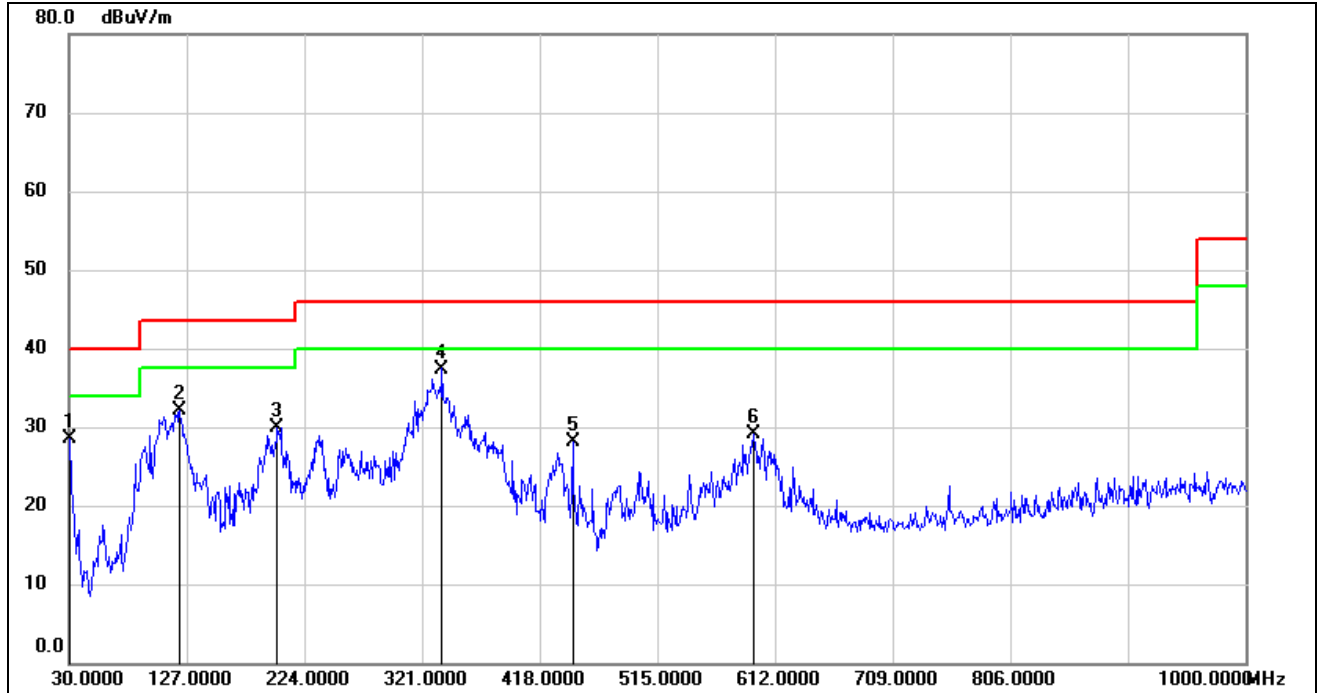


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	45.67	-17.13	28.54	40.00	-11.46	QP
2	121.1800	52.71	-20.62	32.09	43.50	-11.41	QP
3	201.6900	46.15	-16.28	29.87	43.50	-13.63	QP
4	337.4900	51.17	-13.77	37.40	46.00	-8.60	QP
5	445.1600	39.95	-11.90	28.05	46.00	-17.95	QP
6	594.5400	37.99	-8.98	29.01	46.00	-16.99	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.





**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

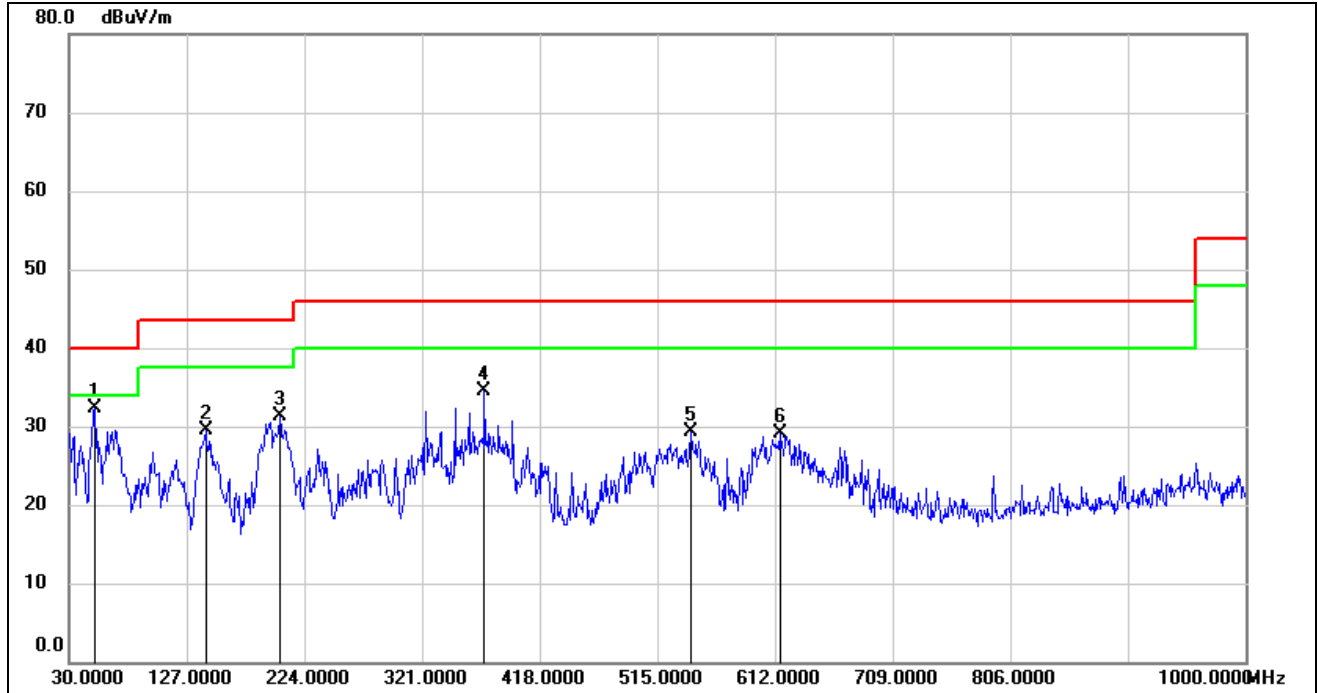

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	50.85	-18.46	32.39	40.00	-7.61	QP
2	142.5200	48.25	-18.80	29.45	43.50	-14.05	QP
3	203.6300	47.67	-16.30	31.37	43.50	-12.13	QP
4	372.4100	47.66	-13.13	34.53	46.00	-11.47	QP
5	542.1599	39.32	-10.02	29.30	46.00	-16.70	QP
6	615.8800	37.56	-8.52	29.04	46.00	-16.96	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels have been tested, only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.6.1. GFSK MODE

(MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

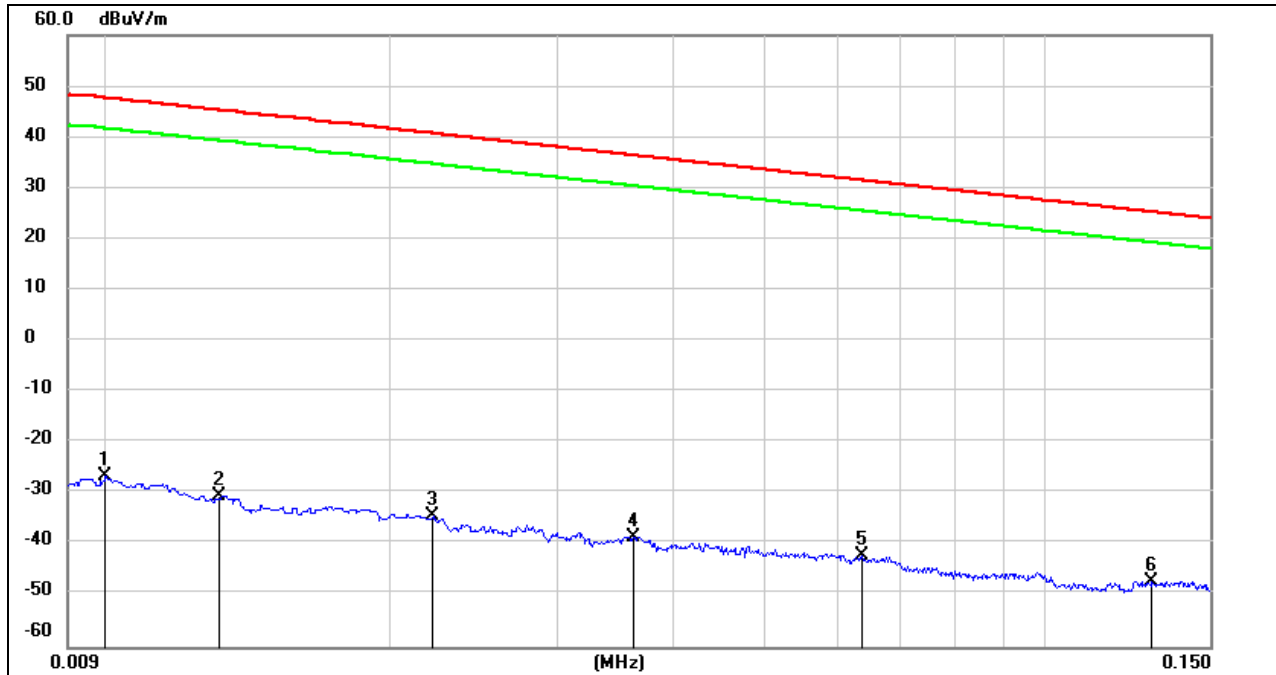


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	74.72	-101.40	-26.68	47.6	-74.28	peak
2	0.0131	70.97	-101.38	-30.41	45.25	-75.66	peak
3	0.0221	67.13	-101.35	-34.22	40.71	-74.93	peak
4	0.0362	63.01	-101.42	-38.41	36.43	-74.84	peak
5	0.0636	59.31	-101.54	-42.23	31.53	-73.76	peak
6	0.1300	54.43	-101.70	-47.27	25.33	-72.60	peak

Note: 1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

2. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

**150 kHz ~ 490 kHz**

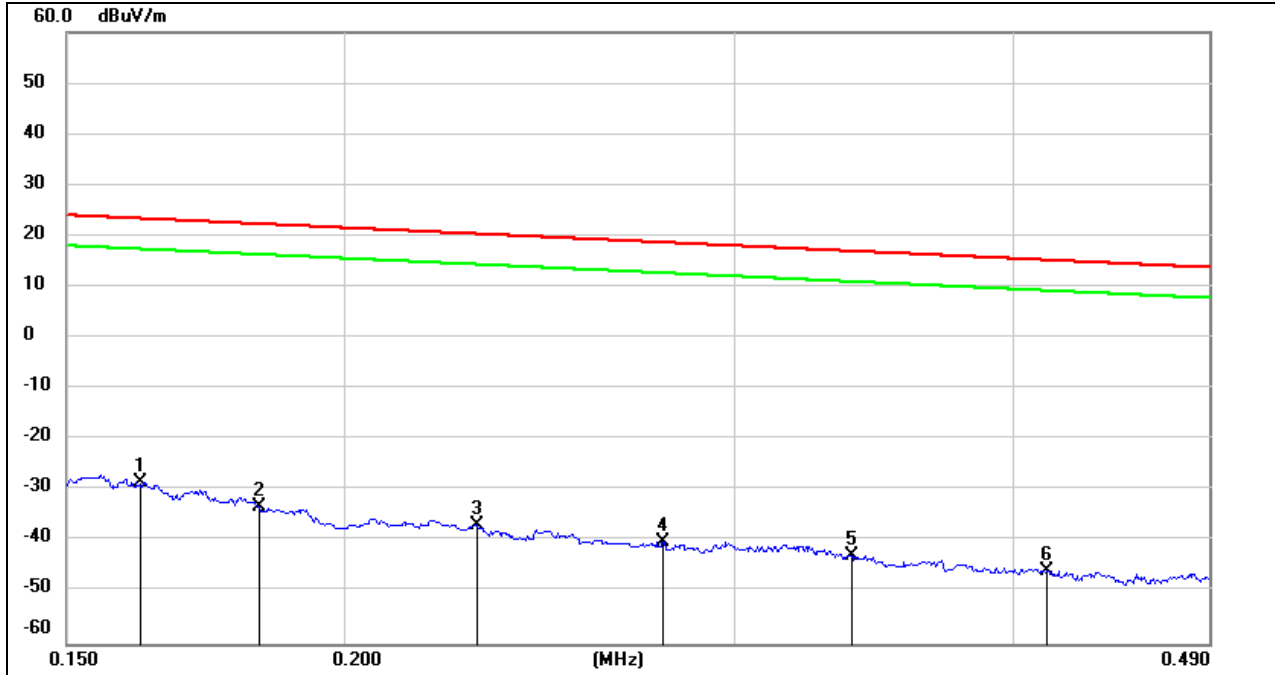


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.1621	73.42	-101.65	-28.23	23.41	-51.64	peak
2	0.1832	68.49	-101.69	-33.2	22.35	-55.55	peak
3	0.2295	65.04	-101.77	-36.73	20.38	-57.11	peak
4	0.2785	61.71	-101.83	-40.12	18.7	-58.82	peak
5	0.3382	59.23	-101.90	-42.67	17.02	-59.69	peak
6	0.4142	56.23	-101.98	-45.75	15.26	-61.01	peak

Note: 1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

2. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

**490 kHz ~ 30 MHz**

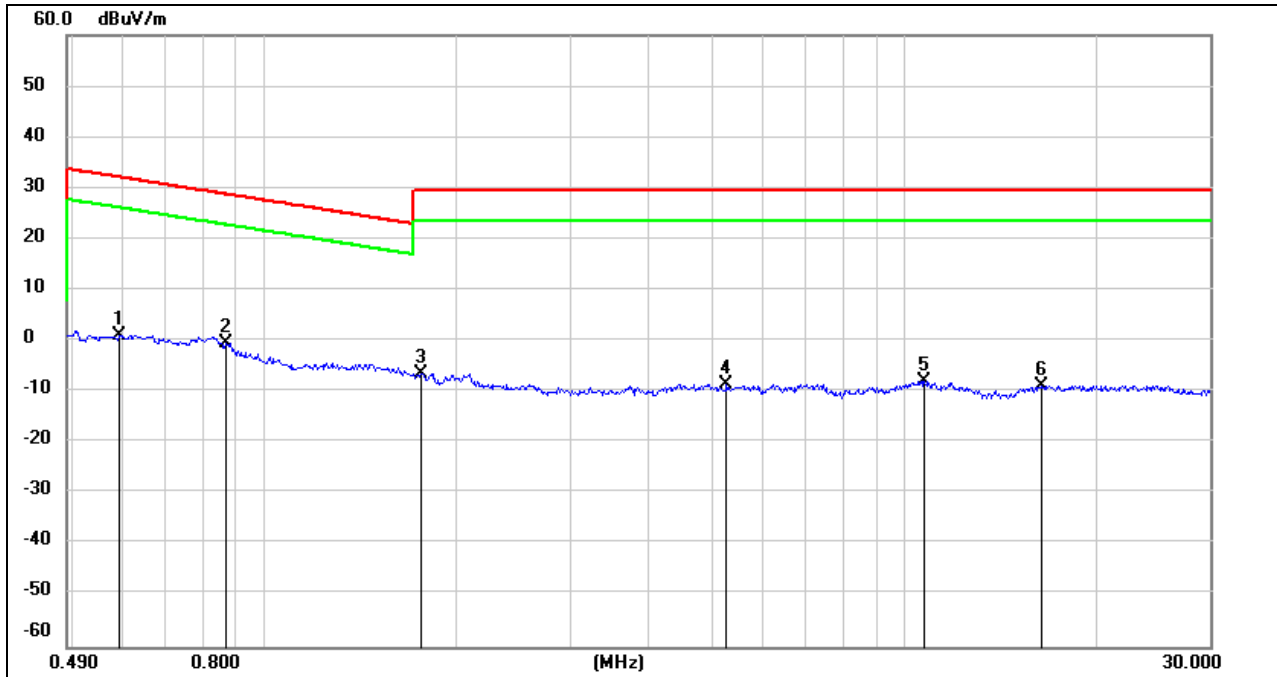

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.5917	63.24	-62.08	1.16	32.16	-31.00	peak
2	0.8679	61.85	-62.18	-0.33	28.83	-29.16	peak
3	1.7580	55.58	-61.93	-6.35	29.54	-35.89	peak
4	5.2705	53.04	-61.45	-8.41	29.54	-37.95	peak
5	10.7299	52.98	-60.83	-7.85	29.54	-37.39	peak
6	16.3959	52.17	-60.96	-8.79	29.54	-38.33	peak

Note: 1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

2. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


Note: All the modes and channels have been tested, only the worst data was recorded in the report.

## 8.7. WORST-CASE CO-LOCATION

### Module BT GFSK MODE & Module Wireless 5G MODE

#### SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

#### 1-7GHz

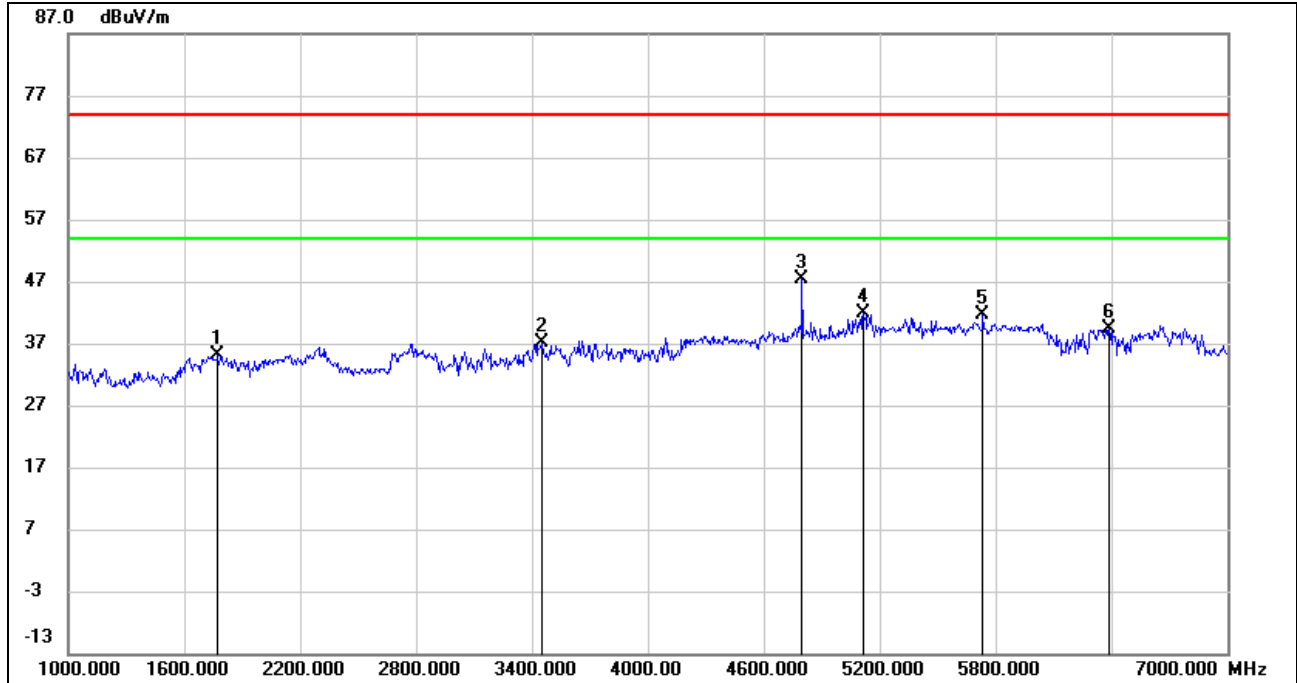

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1774.000	45.44	-10.30	35.14	74.00	-38.86	peak
2	3448.000	42.34	-5.23	37.11	74.00	-36.89	peak
3	4800.000	46.93	0.52	47.45	74.00	-26.55	peak
4	5116.000	40.45	1.47	41.92	74.00	-32.08	peak
5	5734.000	39.76	1.97	41.73	74.00	-32.27	peak
6	6388.000	35.93	3.40	39.33	74.00	-34.67	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

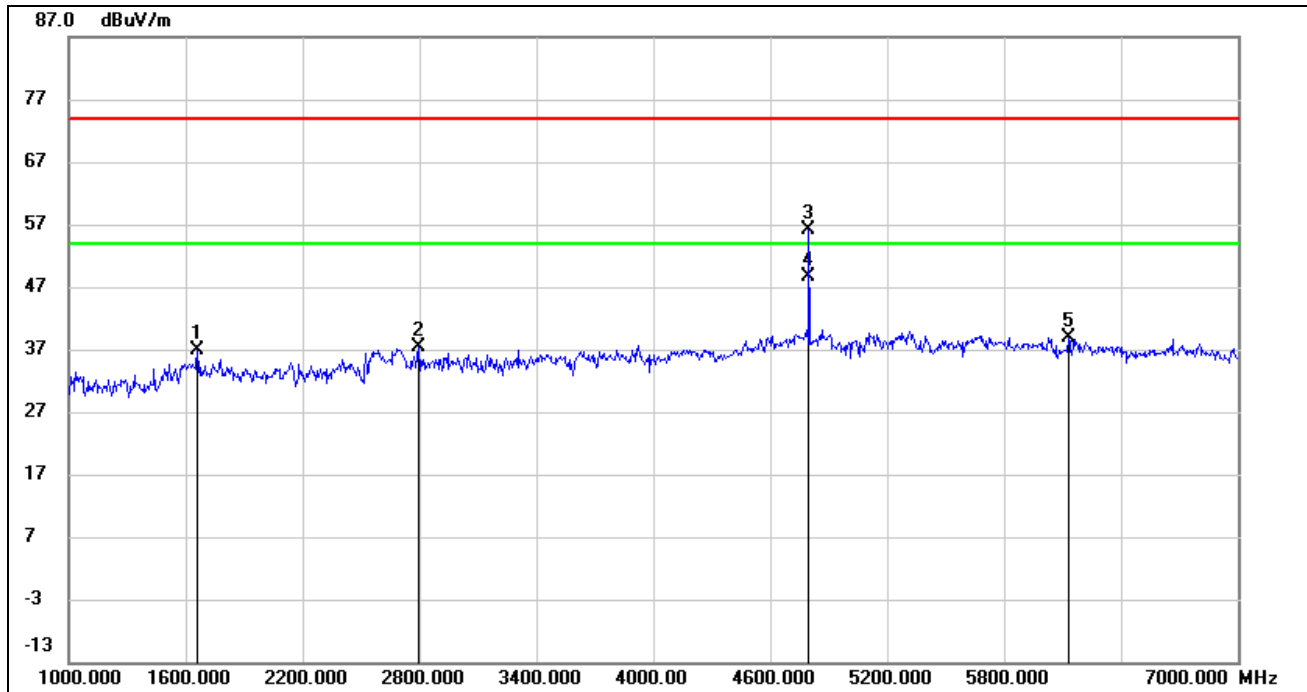
**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****1-7GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1660.000	48.09	-11.16	36.93	74.00	-37.07	peak
2	2794.000	44.39	-6.98	37.41	74.00	-36.59	peak
3	4800.000	55.50	0.52	56.02	74.00	-17.98	peak
4	4800.000	48.05	0.52	48.57	54.00	-5.43	AVG
5	6130.000	36.35	2.51	38.86	74.00	-35.14	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)**

**7-18GHz**

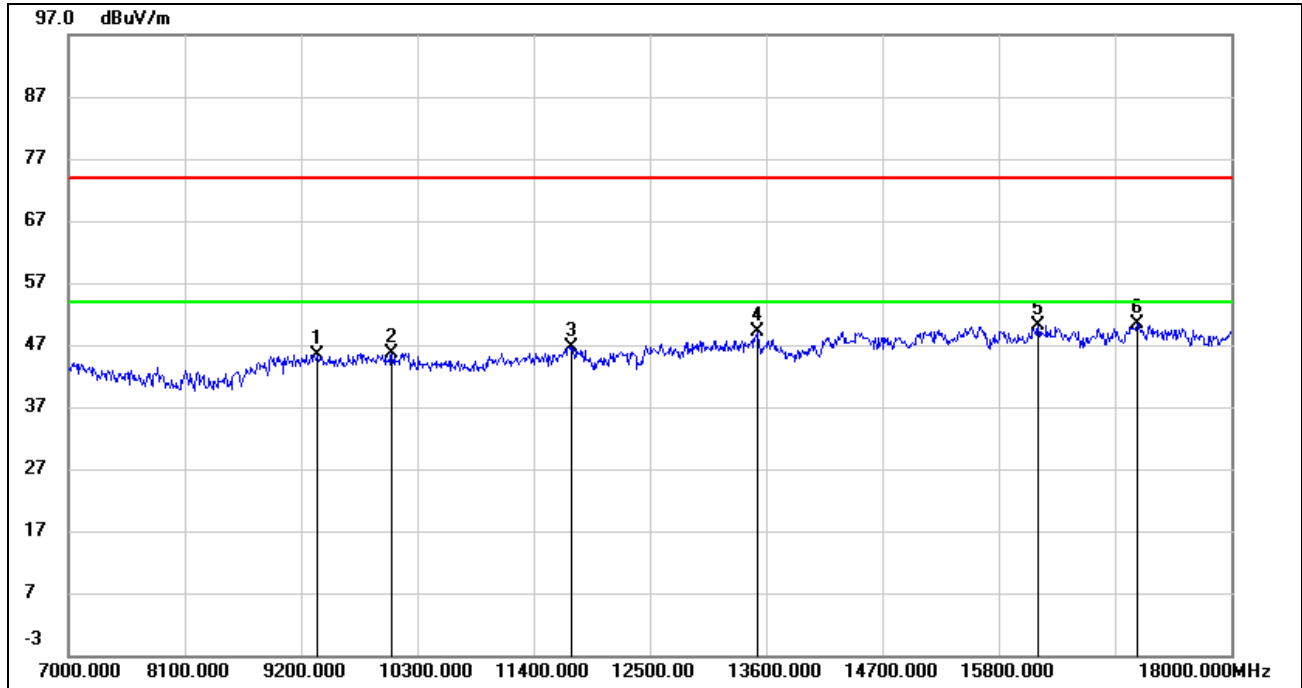

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	35.81	9.64	45.45	74.00	-28.55	peak
2	10058.000	35.21	10.51	45.72	74.00	-28.28	peak
3	11763.000	33.52	13.17	46.69	74.00	-27.31	peak
4	13512.000	33.10	15.92	49.02	74.00	-24.98	peak
5	16174.000	31.49	18.54	50.03	74.00	-23.97	peak
6	17109.000	29.49	20.91	50.40	74.00	-23.60	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

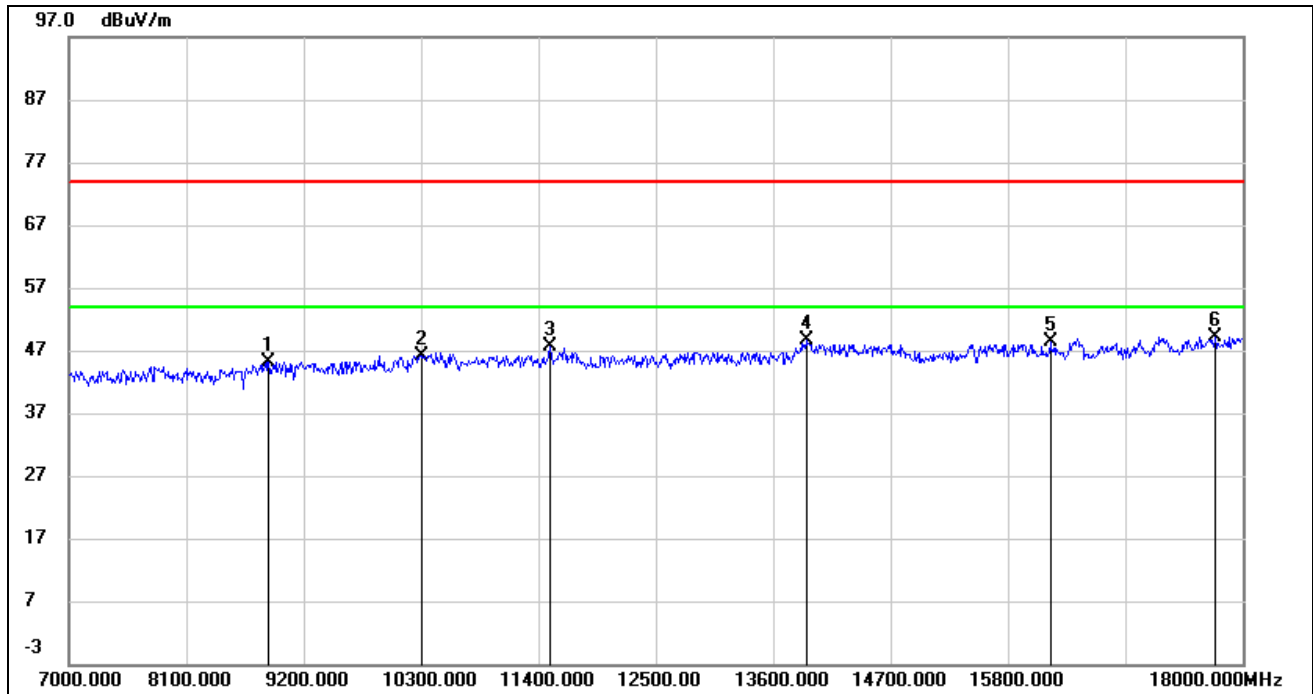**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****7-18GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8870.000	36.57	8.58	45.15	74.00	-28.85	peak
2	10300.000	34.89	11.30	46.19	74.00	-27.81	peak
3	11510.000	34.19	13.39	47.58	74.00	-26.42	peak
4	13908.000	32.57	16.16	48.73	74.00	-25.27	peak
5	16196.000	29.73	18.61	48.34	74.00	-25.66	peak
6	17747.000	26.28	22.92	49.20	74.00	-24.80	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and antennas had been tested, but only the worst data was recorded in the report.



## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

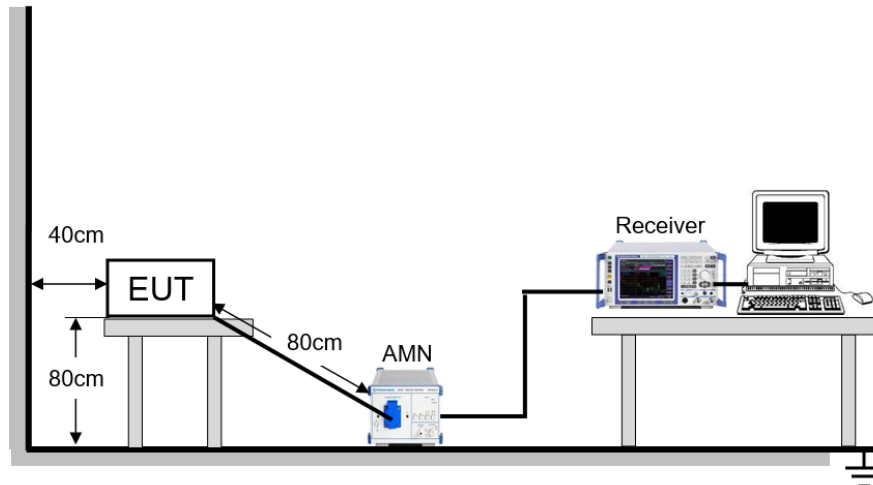

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


### TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	64.9 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V, 60HZ

**TEST RESULTS**

**9.1.1. GFSK MODE**

**LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)**

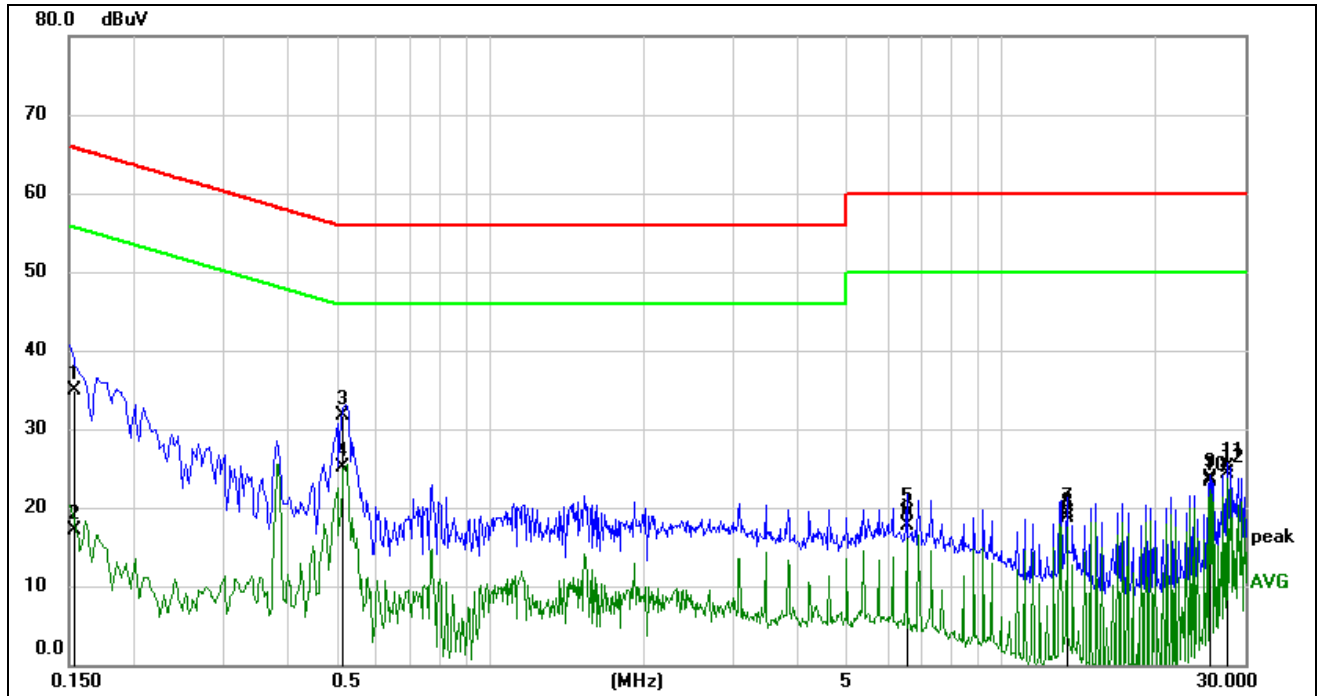


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1538	34.83	-0.01	34.82	65.79	-30.97	QP
2	0.1538	17.19	-0.01	17.18	55.79	-38.61	AVG
3	0.5178	31.77	0.00	31.77	56.00	-24.23	QP
4	0.5178	25.04	0.00	25.04	46.00	-20.96	AVG
5	6.5279	19.33	0.03	19.36	60.00	-40.64	QP
6	6.5279	17.70	0.03	17.73	50.00	-32.27	AVG
7	13.4398	19.29	0.06	19.35	60.00	-40.65	QP
8	13.4398	18.57	0.06	18.63	50.00	-31.37	AVG
9	25.7276	23.52	0.15	23.67	60.00	-36.33	QP
10	25.7276	23.20	0.15	23.35	50.00	-26.65	AVG
11	27.6475	24.89	0.20	25.09	60.00	-34.91	QP
12	27.6475	24.19	0.20	24.39	50.00	-25.61	AVG

Note: 1. Result = Reading + Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).  
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.



**LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)**

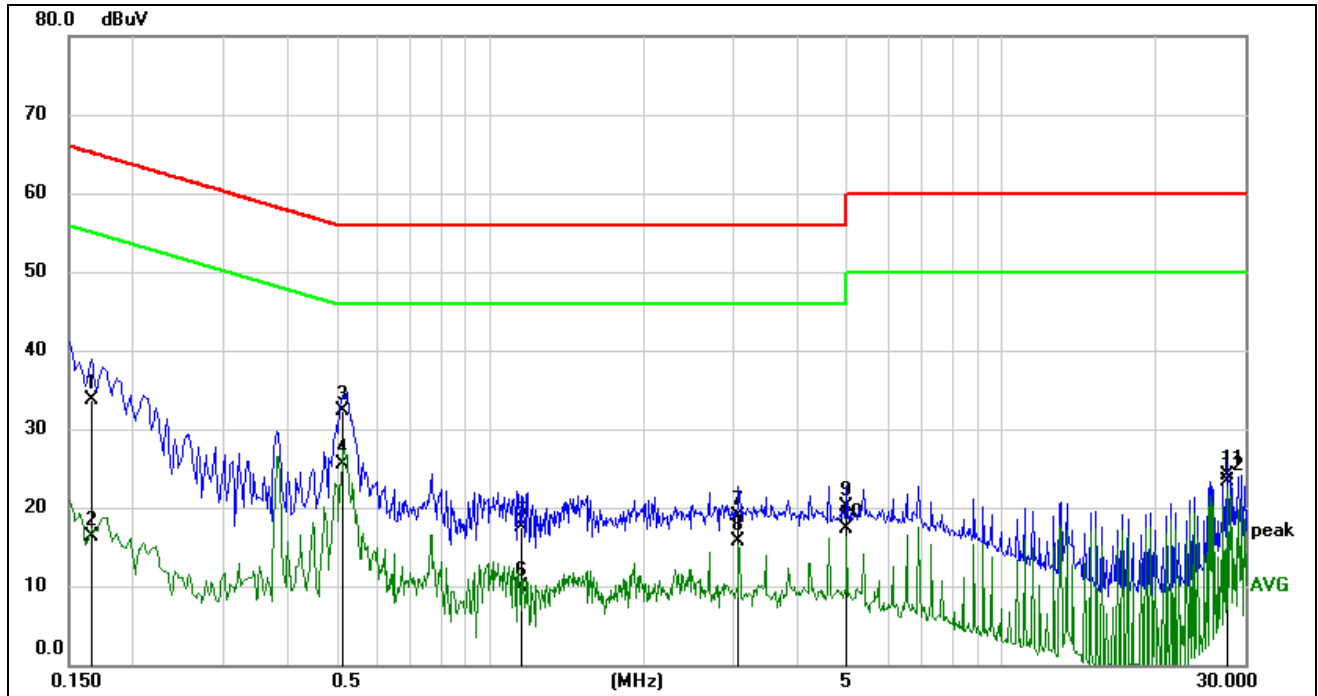

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1652	33.79	-0.01	33.78	65.20	-31.42	QP
2	0.1652	16.27	-0.01	16.26	55.20	-38.94	AVG
3	0.5178	32.23	0.00	32.23	56.00	-23.77	QP
4	0.5178	25.43	0.00	25.43	46.00	-20.57	AVG
5	1.1520	17.47	0.01	17.48	56.00	-38.52	QP
6	1.1520	9.87	0.01	9.88	46.00	-36.12	AVG
7	3.0719	18.87	0.02	18.89	56.00	-37.11	QP
8	3.0719	15.63	0.02	15.65	46.00	-30.35	AVG
9	4.9919	20.04	0.02	20.06	56.00	-35.94	QP
10	4.9919	17.31	0.02	17.33	46.00	-28.67	AVG
11	27.6475	23.91	0.20	24.11	60.00	-35.89	QP
12	27.6475	23.20	0.20	23.40	50.00	-26.60	AVG

- Note: 1. Result = Reading + Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).  
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies



## 11. Appendix

### 11.1. Appendix A: 20dB Emission Bandwidth

#### 11.1.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.942	2401.541	2402.483	PASS
		2441	0.939	2440.541	2441.480	PASS
		2480	0.942	2479.541	2480.483	PASS
3DH5	Ant1	2402	1.284	2401.358	2402.642	PASS
		2441	1.284	2440.349	2441.633	PASS
		2480	1.275	2479.349	2480.624	PASS




11.1.2. Test Graphs




DH5\_Ant1\_2402




DH5\_Ant1\_2441

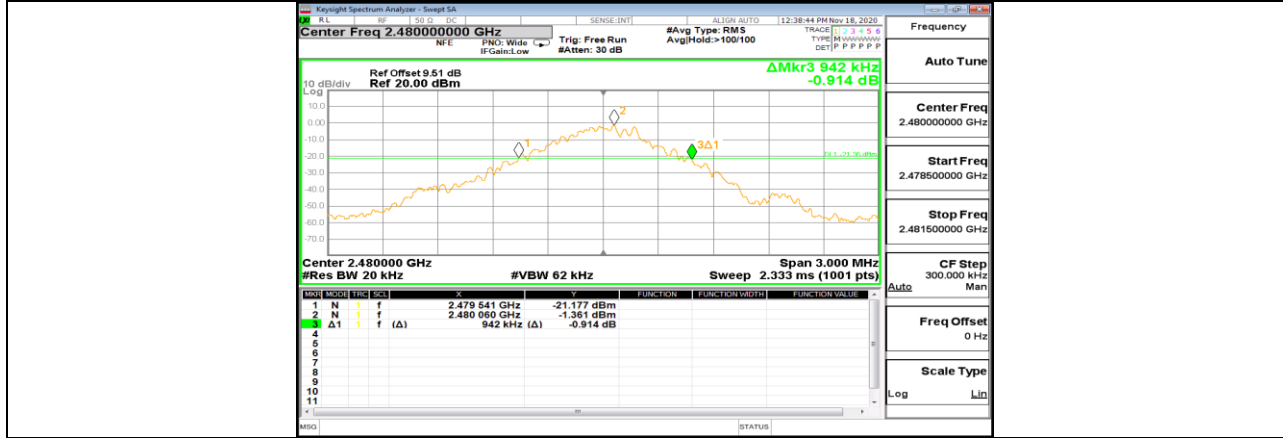


DH5\_Ant1\_2480

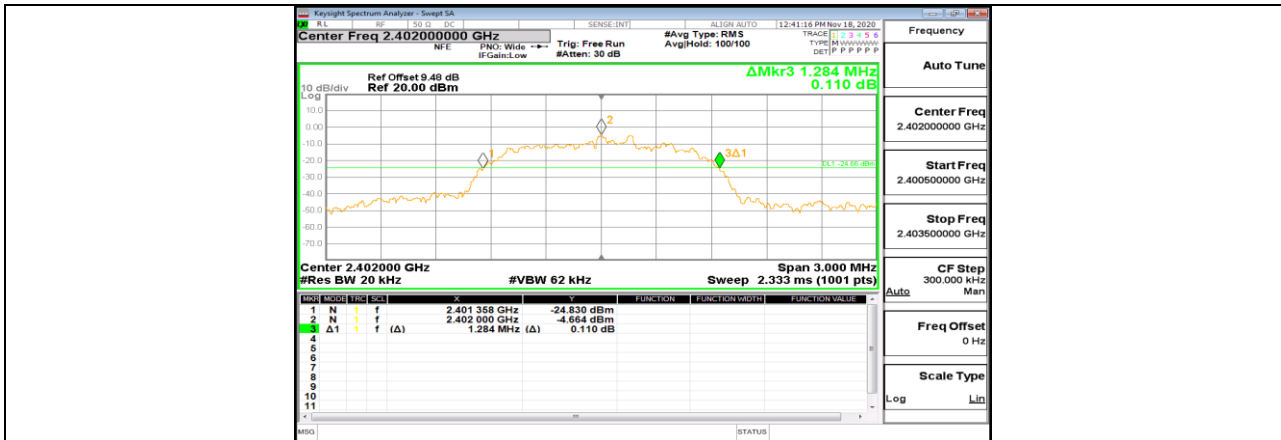

3DH5\_Ant1\_2402

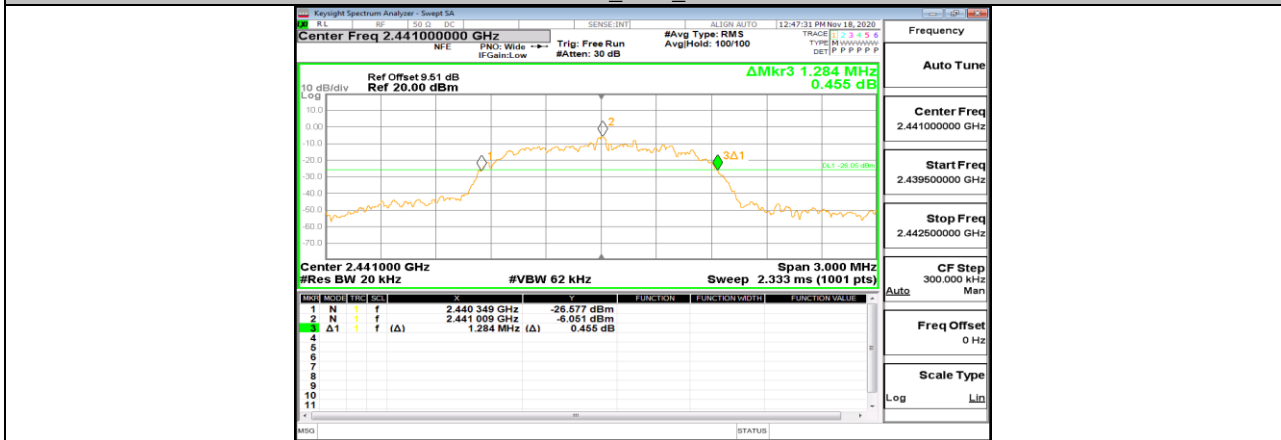

3DH5\_Ant1\_2441

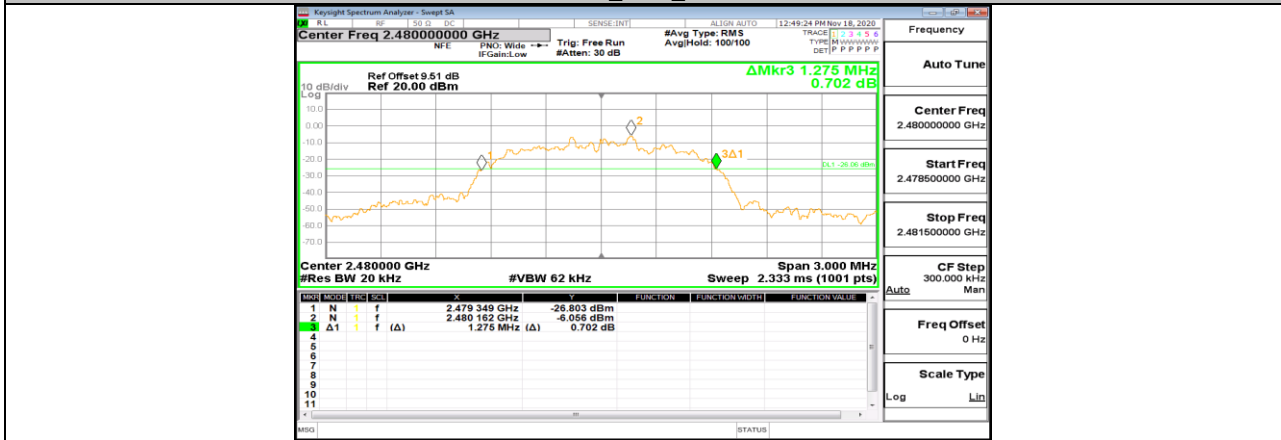

3DH5\_Ant1\_2480



## 11.2. Appendix B: Occupied Channel Bandwidth

### 11.2.1. Test Result




Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.88747	2401.563	2402.451	PASS
		2441	0.86358	2440.562	2441.425	PASS
		2480	0.86600	2479.559	2480.425	PASS
3DH5	Ant1	2402	1.1940	2401.393	2402.587	PASS
		2441	1.1787	2440.404	2441.583	PASS
		2480	1.1848	2479.401	2480.585	PASS





### 11.2.2. Test Graphs



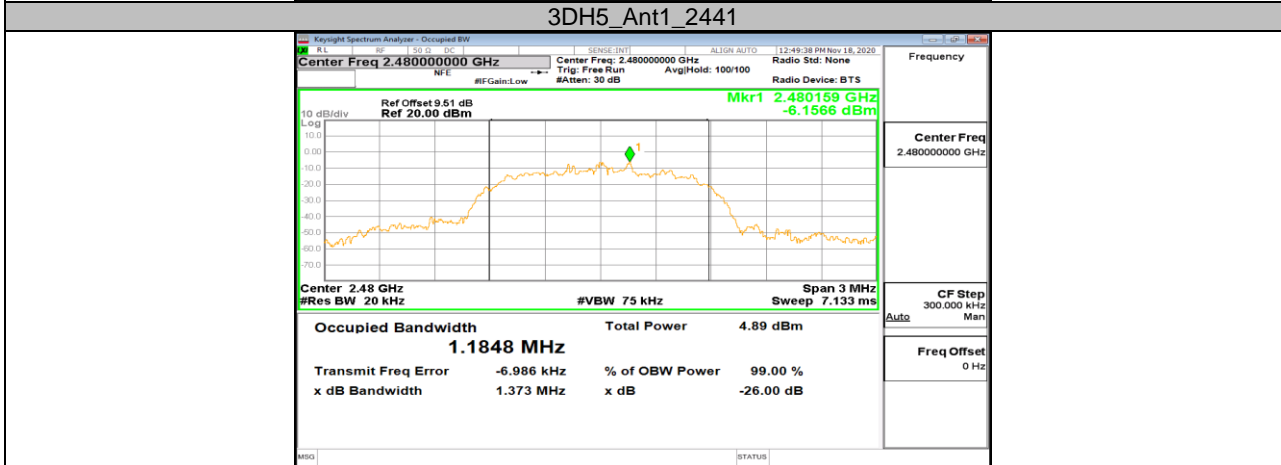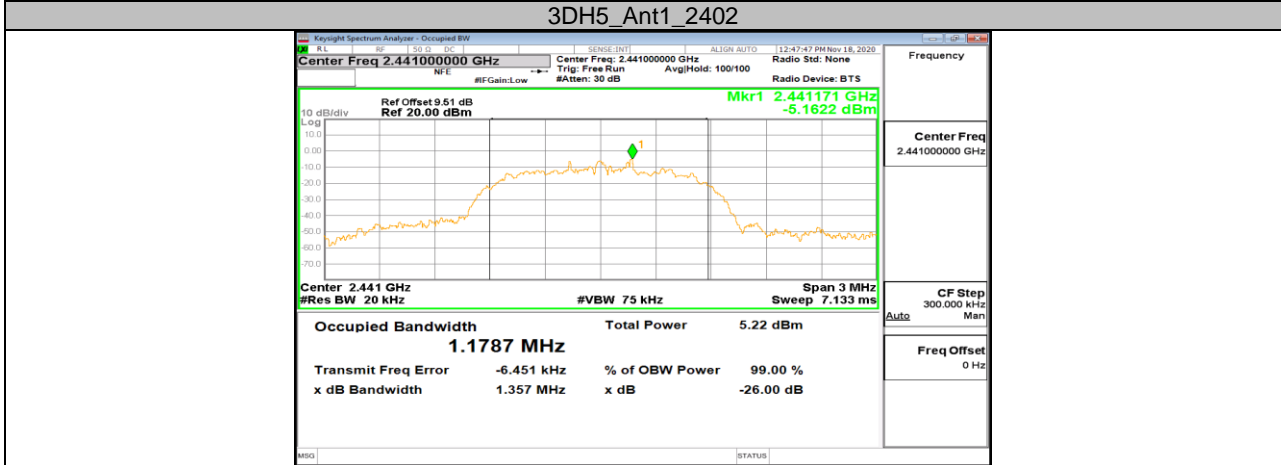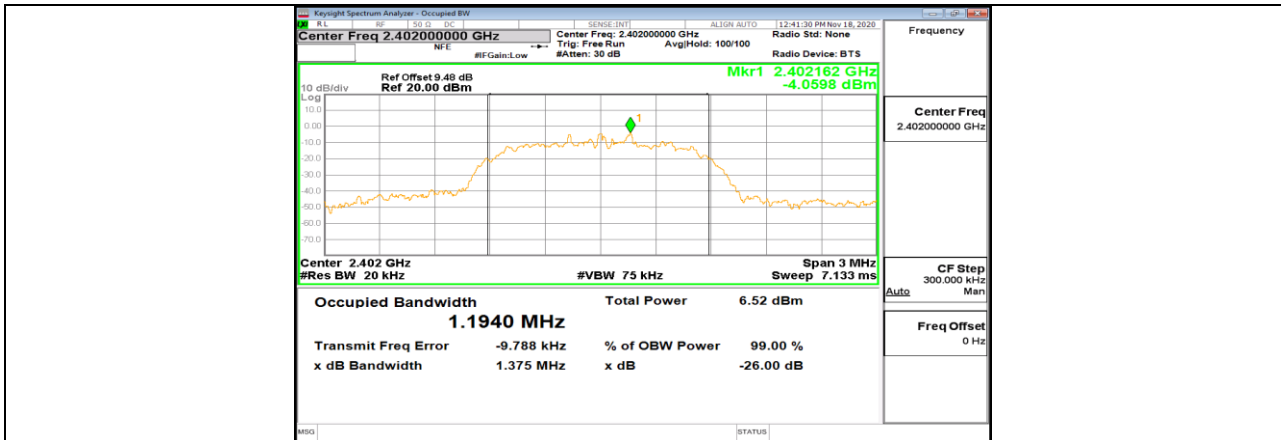

**3DH5\_Ant1\_2480**



### 11.3. Appendix C: Maximum peak conducted output power

#### 11.3.1. Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	3.30	30	PASS
		2441	4.31	30	PASS
		2480	4.14	30	PASS
3DH5	Ant1	2402	1.79	21	PASS
		2441	2.61	21	PASS
		2480	2.42	21	PASS




## 11.4. Appendix D: Carrier frequency separation

### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.016	$\geq 0.942$	PASS
3DH5	Ant1	Hop	1.004	$\geq 0.856$	PASS

### 11.4.2. Test Graphs

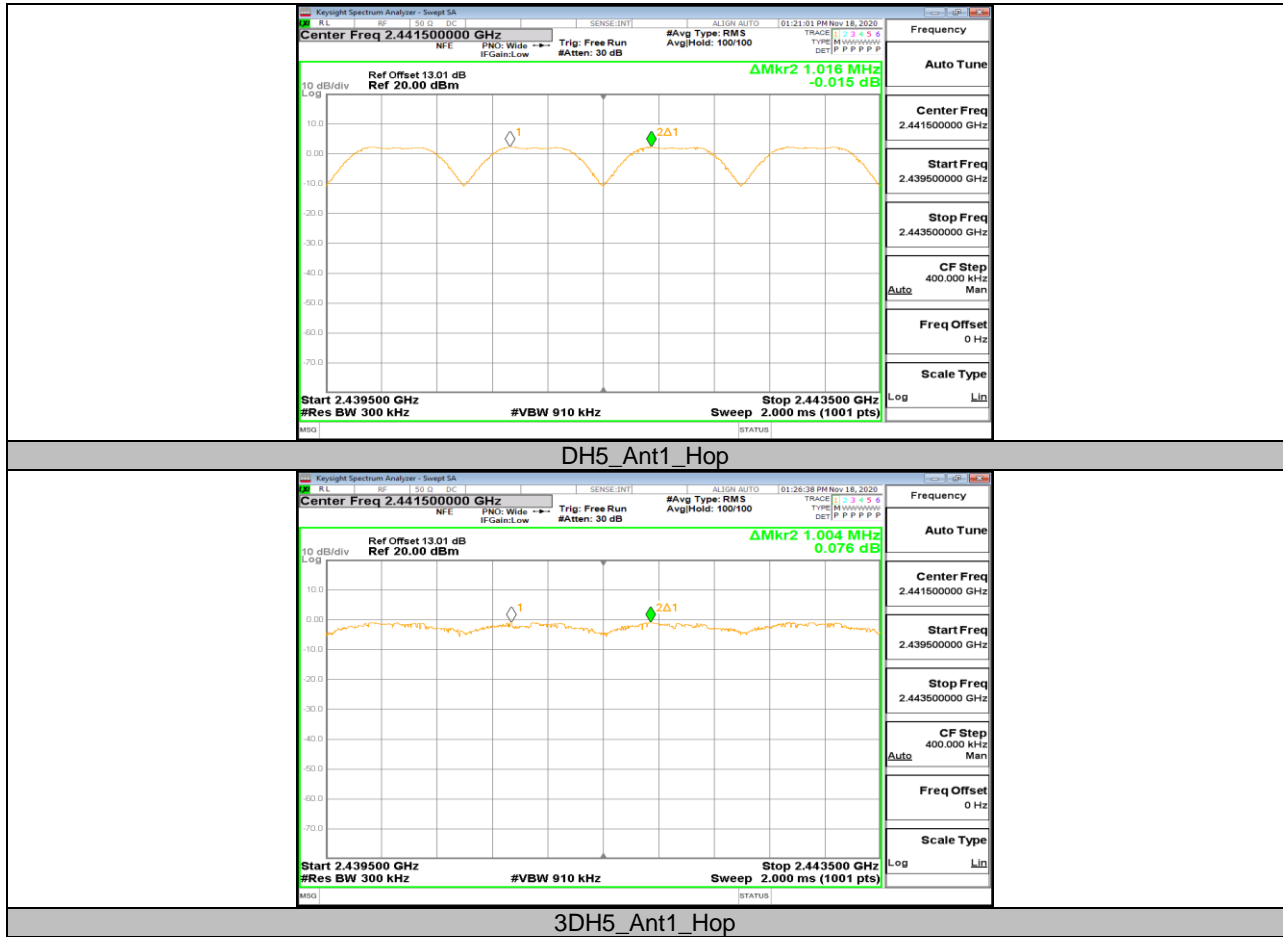

## 11.5. Appendix E: Time of occupancy


### 11.5.1. Test Result


FHSS Mode						
TestMode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.39	0.125	<=0.4	PASS
DH3	Ant1	Hop	1.65	0.264	<=0.4	PASS
DH5	Ant1	Hop	2.9	0.309	<=0.4	PASS
3DH1	Ant1	Hop	0.4	0.128	<=0.4	PASS
3DH3	Ant1	Hop	1.65	0.264	<=0.4	PASS
3DH5	Ant1	Hop	2.91	0.31	<=0.4	PASS

AFHSS Mode						
TestMode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.39	0.063	<=0.4	PASS
DH3	Ant1	Hop	1.65	0.132	<=0.4	PASS
DH5	Ant1	Hop	2.9	0.155	<=0.4	PASS
3DH1	Ant1	Hop	0.4	0.064	<=0.4	PASS
3DH3	Ant1	Hop	1.65	0.132	<=0.4	PASS
3DH5	Ant1	Hop	2.91	0.155	<=0.4	PASS



### 11.5.2. Test Graphs

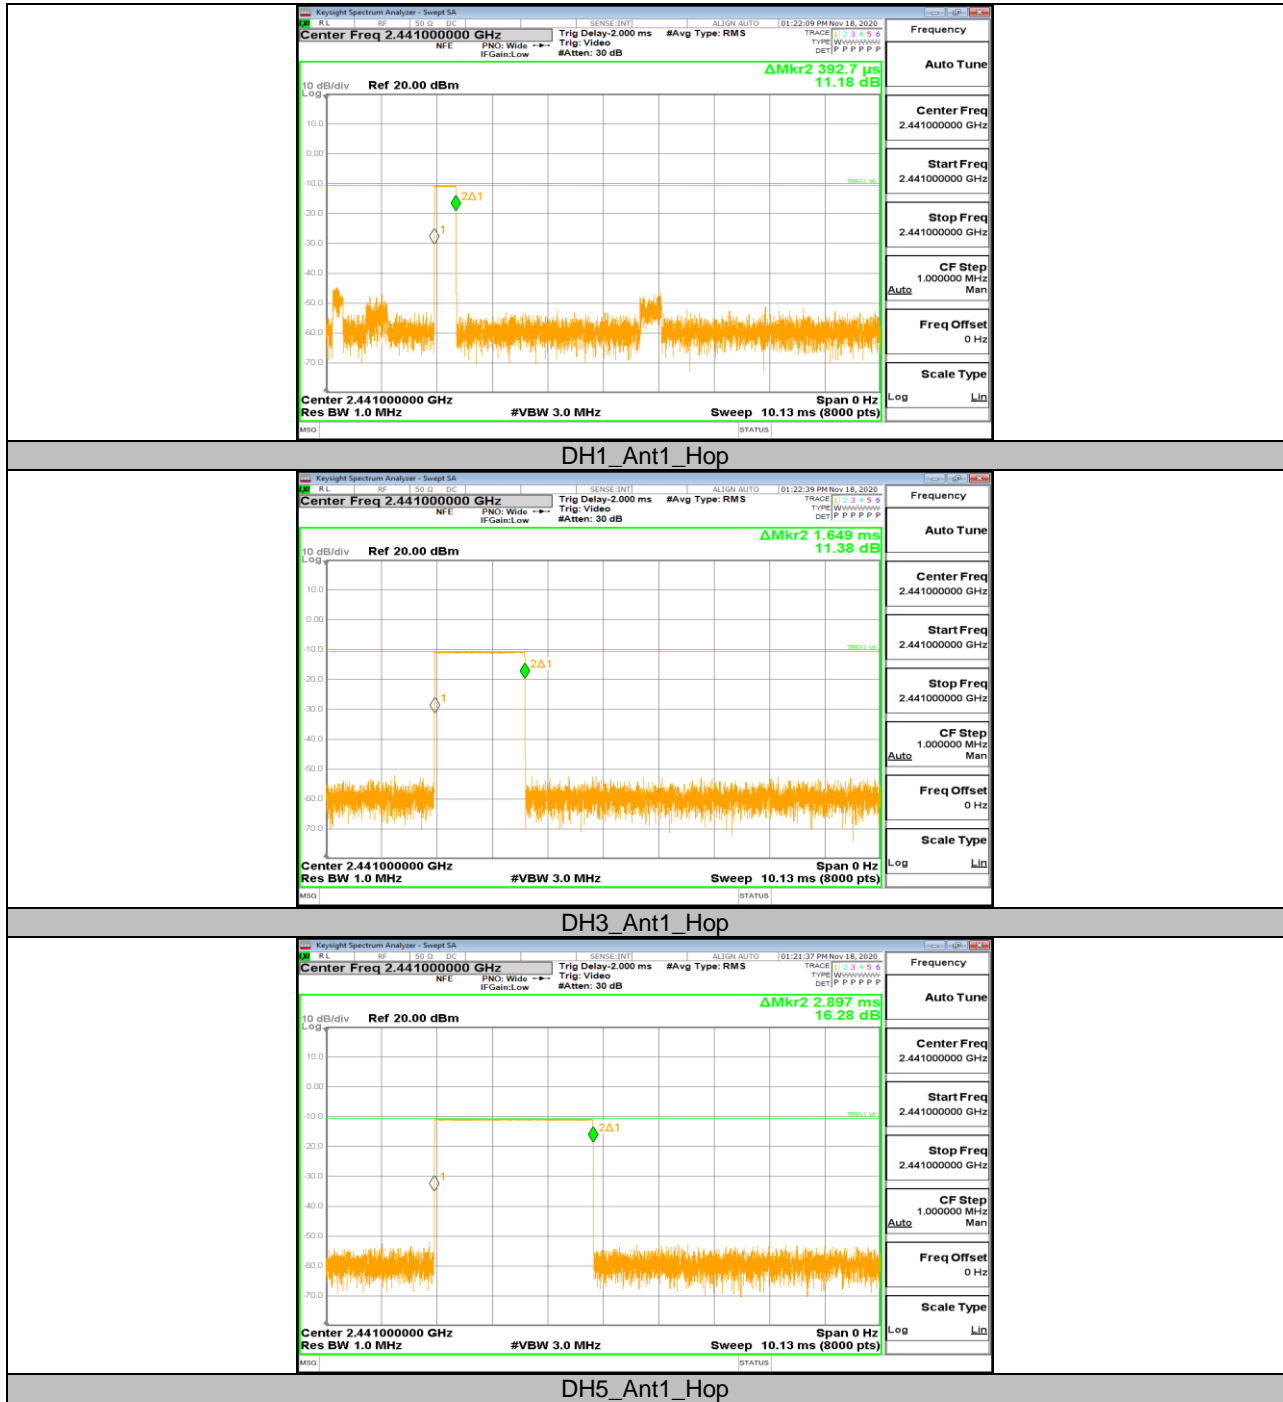

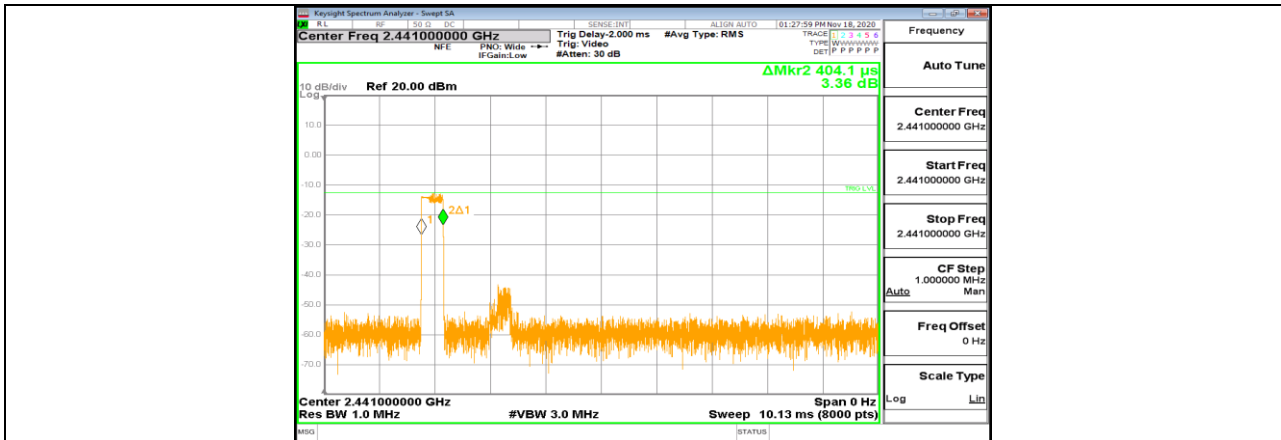






## 11.6. Appendix F: Number of hopping channels

### 11.6.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS

### 11.6.2. Test Graphs

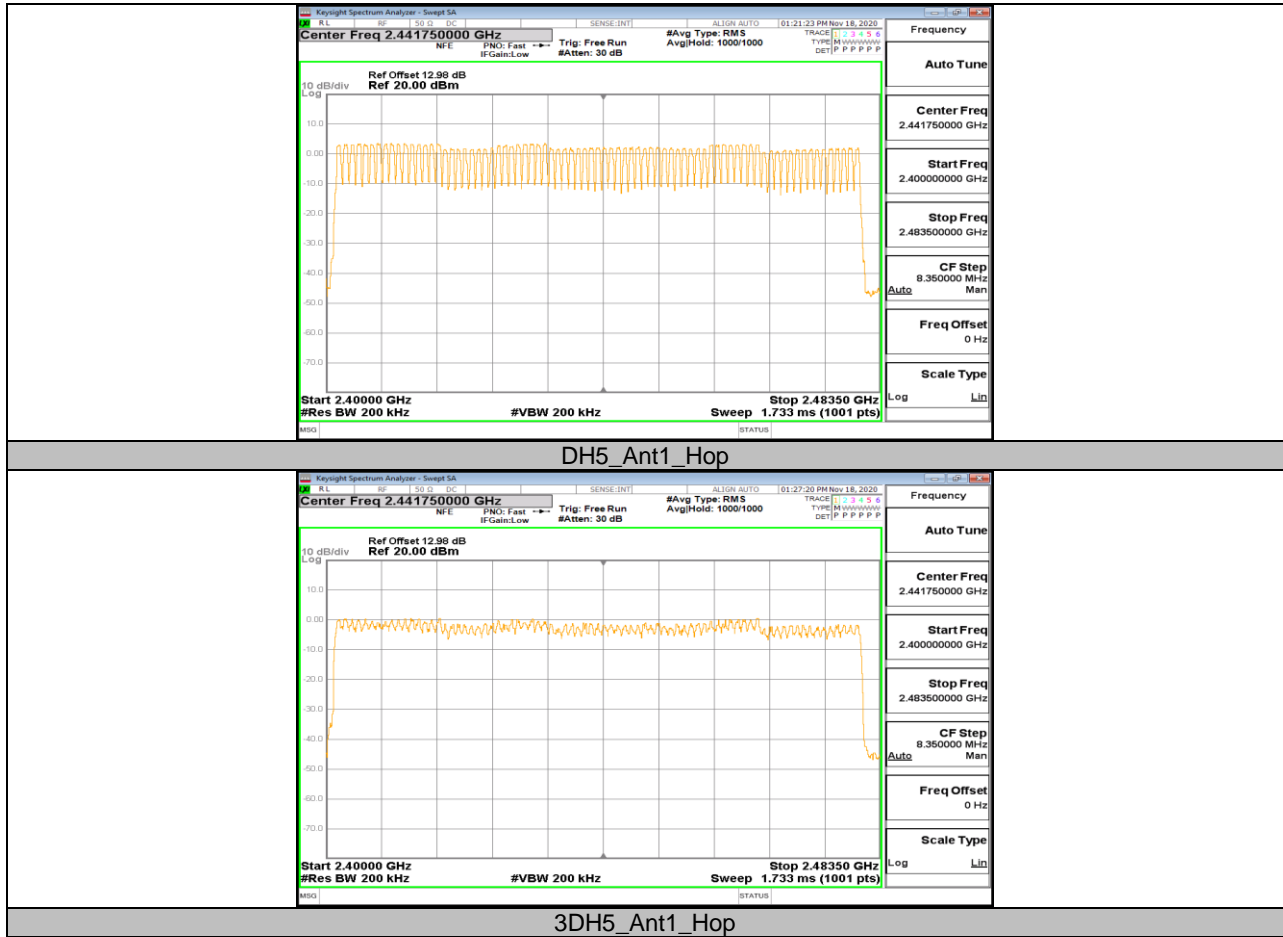




## 11.7. Appendix G: Band edge measurements


### 11.7.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.29	-40.12	<=-16.71	PASS
		High	2480	1.47	-50.37	<=-18.53	PASS
		Low	Hop_2402	2.45	-47.36	<=-17.55	PASS
		High	Hop_2480	1.39	-44.23	<=-18.61	PASS
3DH5	Ant1	Low	2402	0.43	-43.61	<=-19.57	PASS
		High	2480	-1.29	-50.57	<=-21.29	PASS
		Low	Hop_2402	-1.05	-47.37	<=-21.05	PASS
		High	Hop_2480	-2.01	-47.13	<=-22.01	PASS


### 11.7.2. Test Graphs

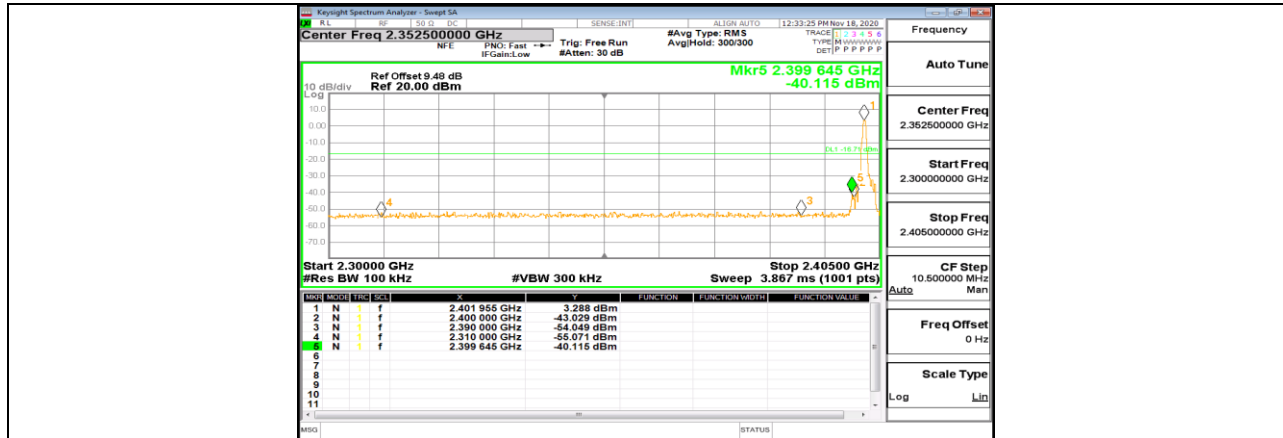


DH5\_Ant1\_Low\_2402

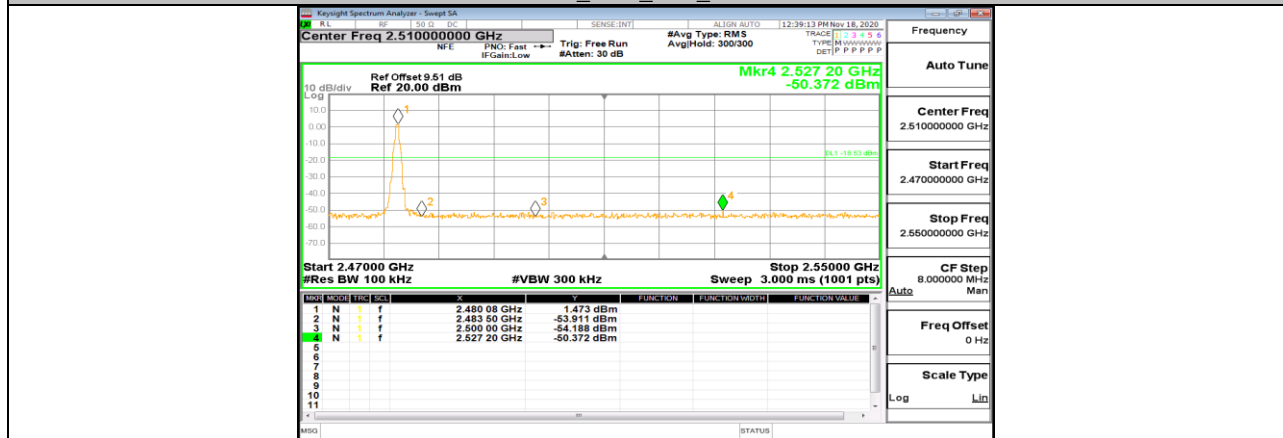


DH5\_Ant1\_High\_2480

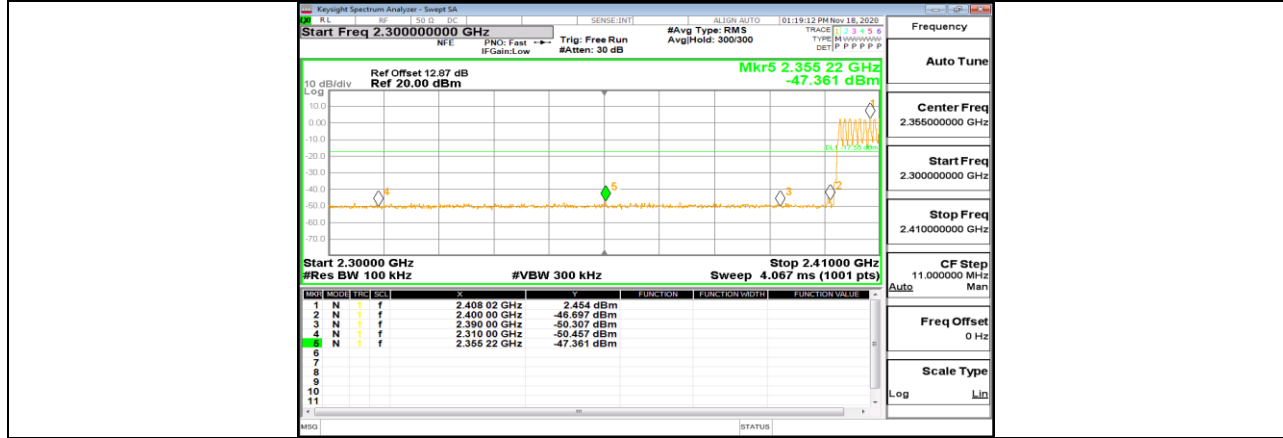


DH5\_Ant1\_Low\_Hop\_2402

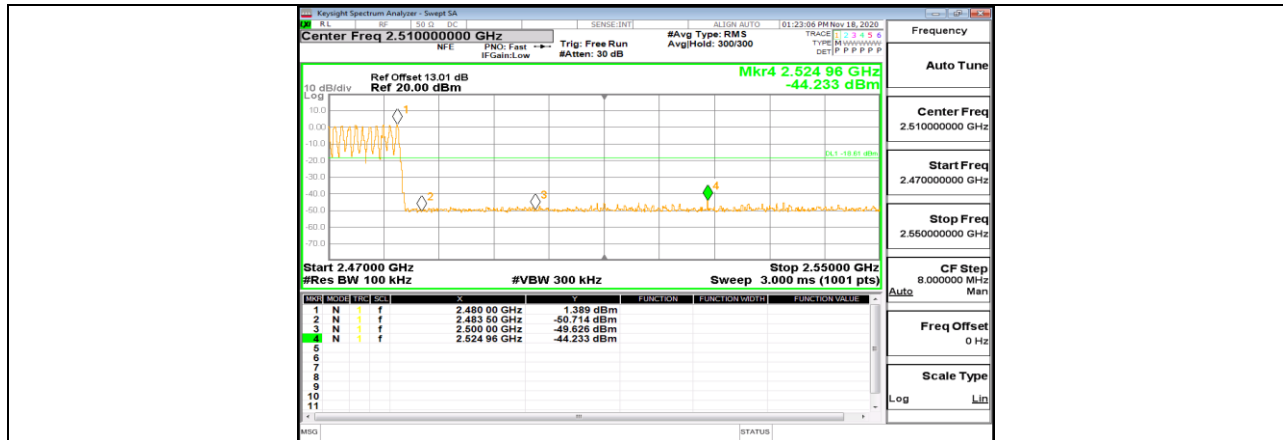


DH5\_Ant1\_High\_Hop\_2480

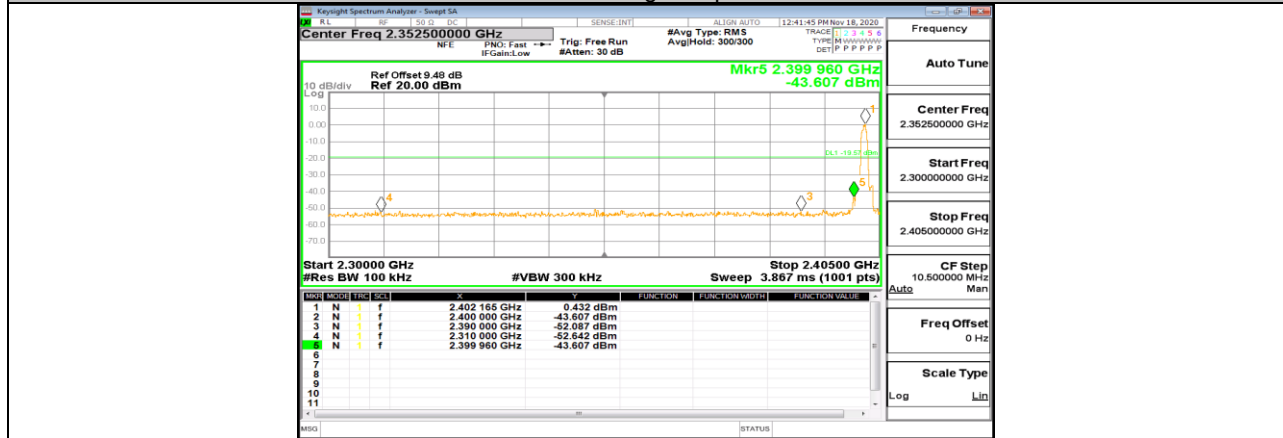


3DH5\_Ant1\_Low\_2402

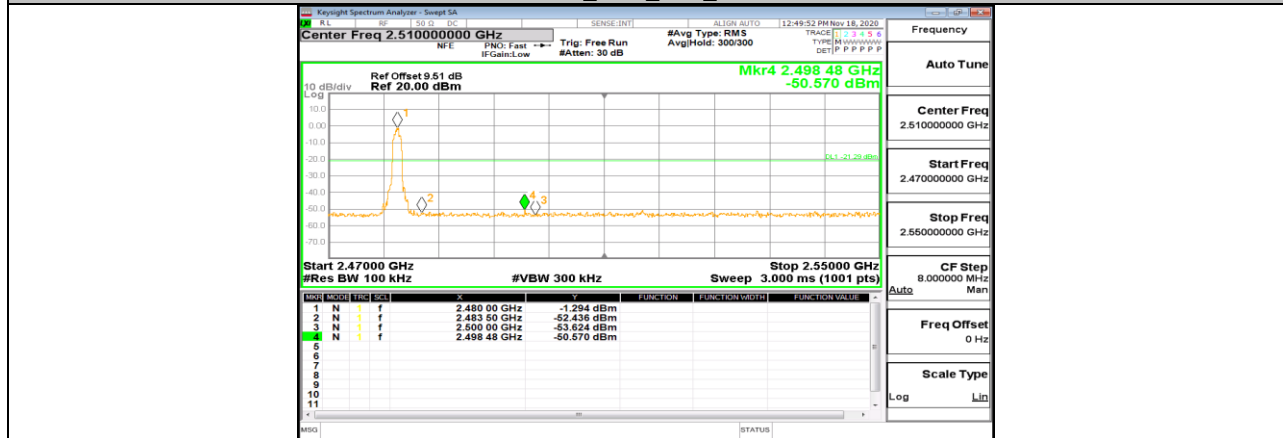

3DH5\_Ant1\_High\_2480

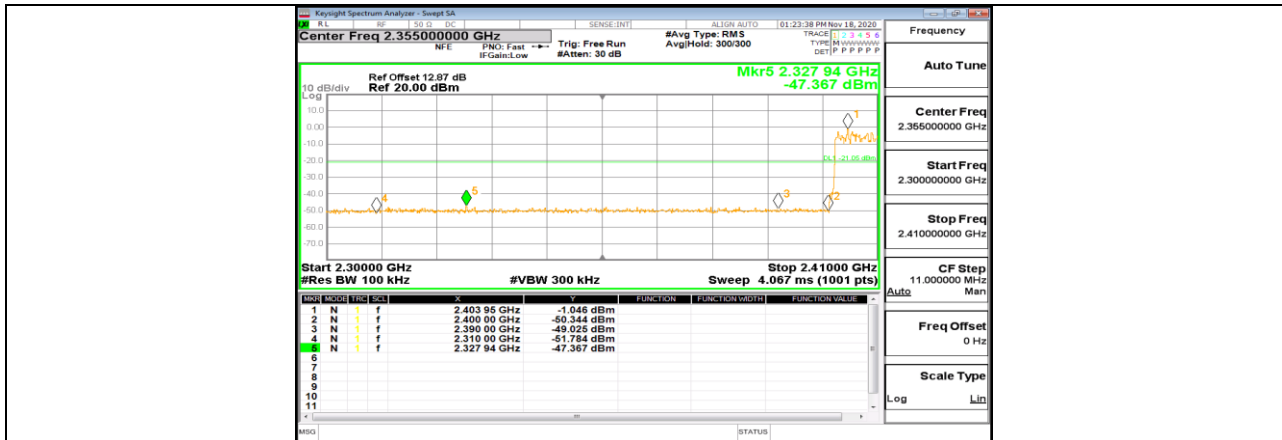

3DH5\_Ant1\_Low\_Hop\_2402

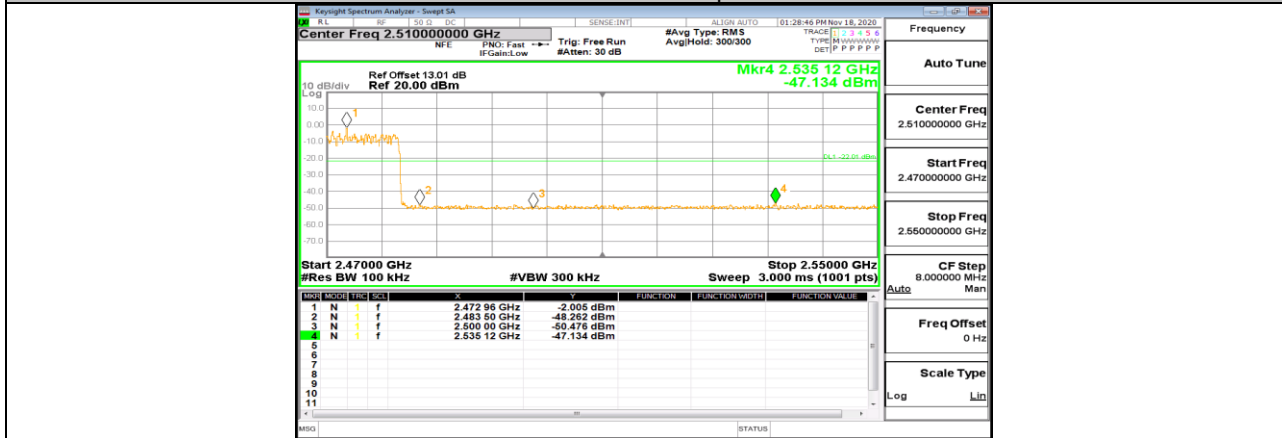

3DH5\_Ant1\_High\_Hop\_2480




### 11.8. Appendix H: Conducted Spurious Emission 11.8.1. Test Result

Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	3.16	3.16	---	PASS
			30~1000	---	-62.58	<=-16.84	PASS
			1000~26500	---	-46.83	<=-16.84	PASS
		2441	Reference	2.22	2.22	---	PASS
			30~1000	---	-63.52	<=-17.78	PASS
			1000~26500	---	-48.68	<=-17.78	PASS
		2480	Reference	2.07	2.07	---	PASS
			30~1000	---	-62.85	<=-17.93	PASS
			1000~26500	---	-49.41	<=-17.93	PASS
3DH5	Ant1	2402	Reference	0.40	0.40	---	PASS
			30~1000	---	-63.08	<=-19.6	PASS
			1000~26500	---	-52.32	<=-19.6	PASS
		2441	Reference	-0.99	-0.99	---	PASS
			30~1000	---	-62.77	<=-20.99	PASS
			1000~26500	---	-53.08	<=-20.99	PASS
		2480	Reference	-1.41	-1.41	---	PASS
			30~1000	---	-63.09	<=-21.41	PASS
			1000~26500	---	-54.44	<=-21.41	PASS


### 11.8.2. Test Graphs






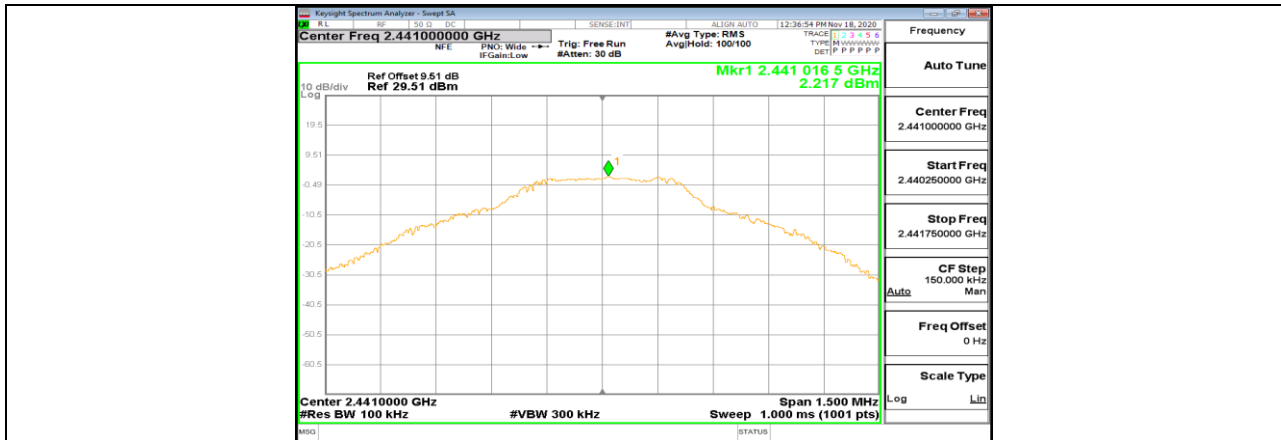


DH5\_Ant1\_2441\_0-Reference

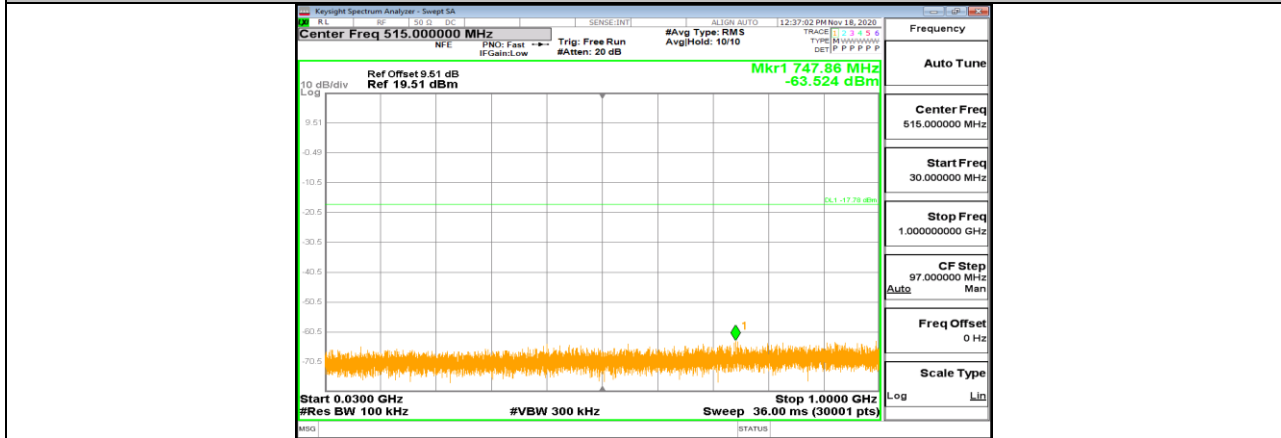


DH5\_Ant1\_2441\_30-1000

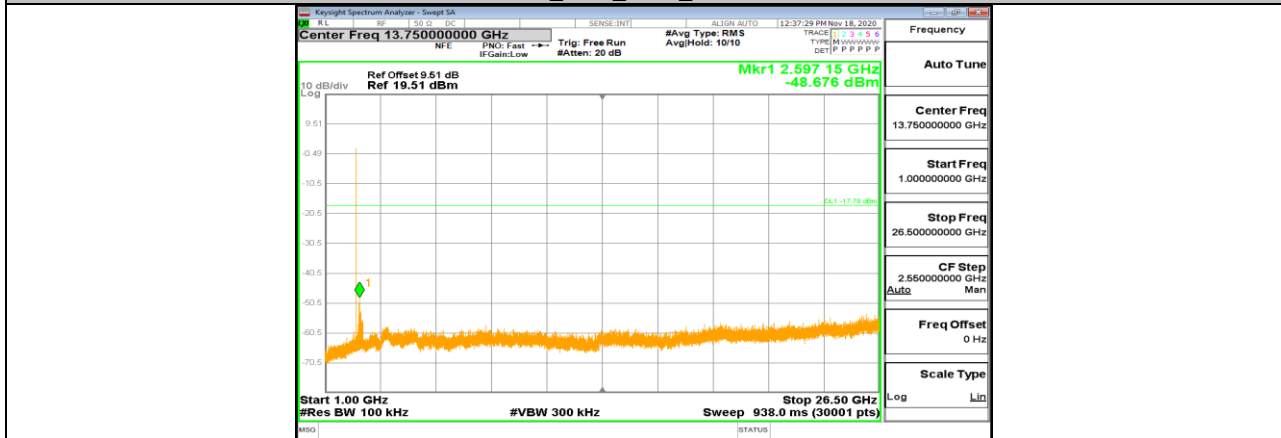


DH5\_Ant1\_2441\_1000-26500

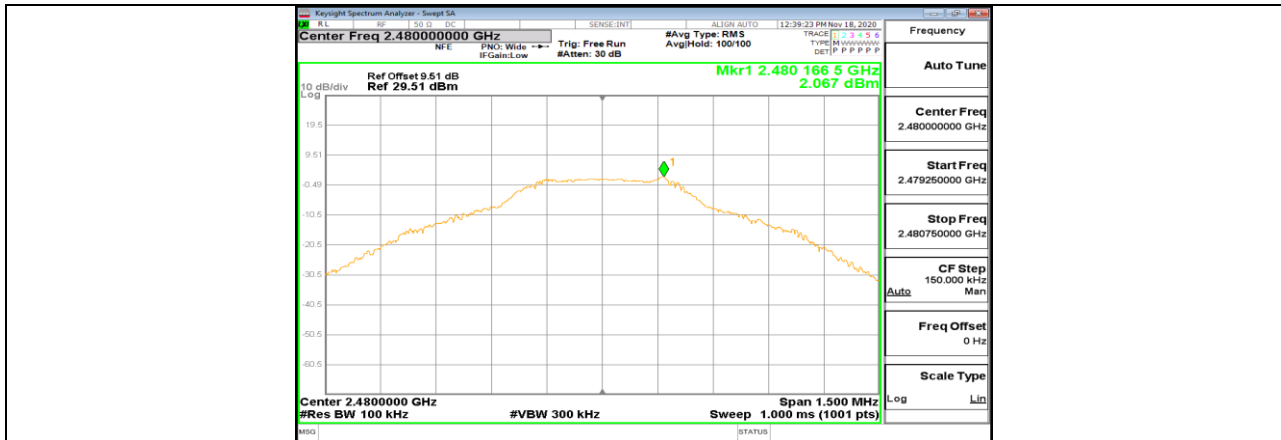


DH5\_Ant1\_2480\_0-Reference

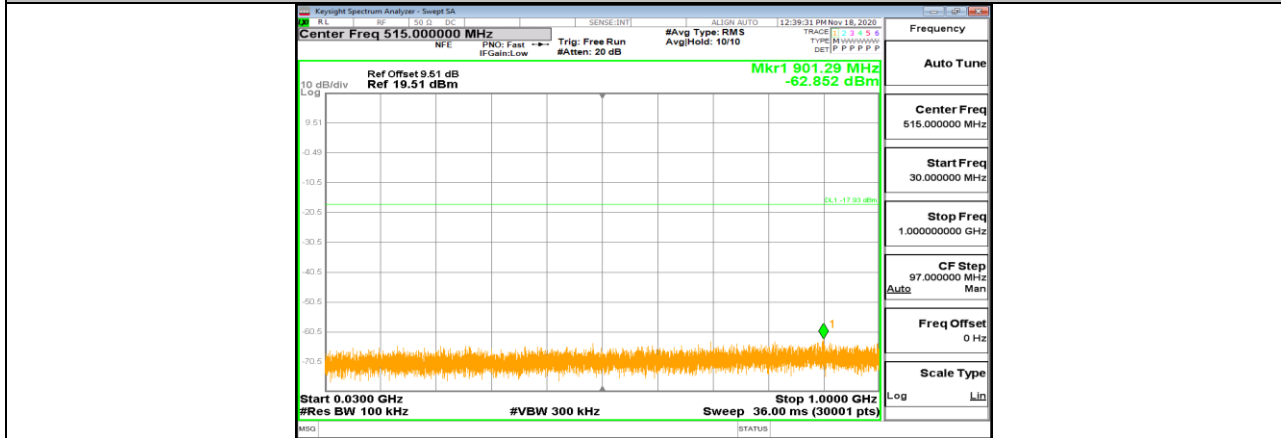


DH5\_Ant1\_2480\_30-1000

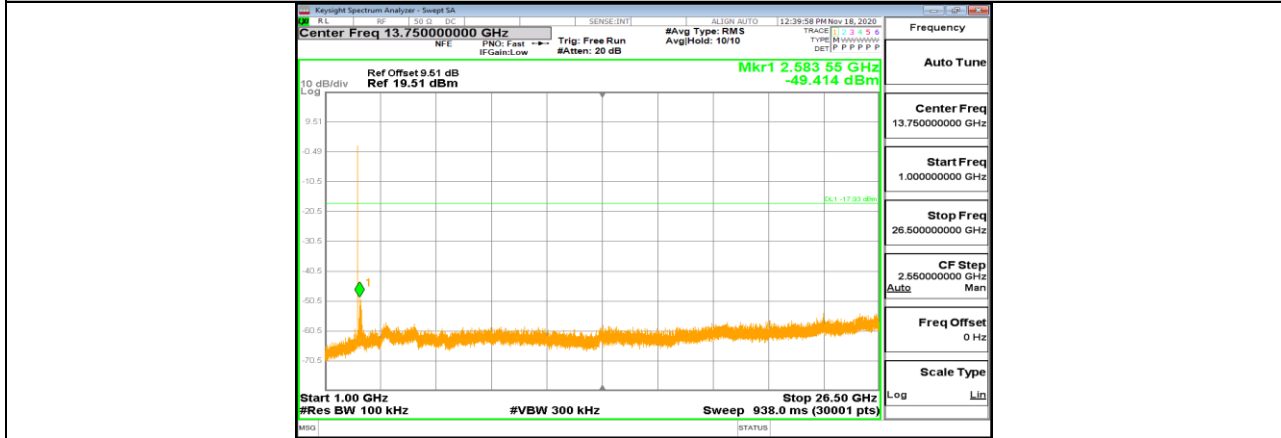


DH5\_Ant1\_2480\_1000-26500

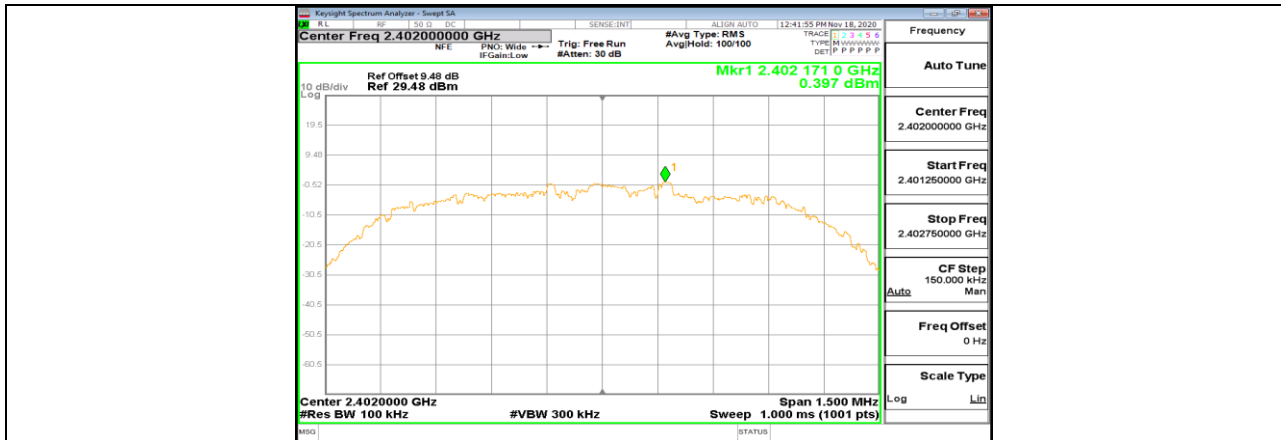


3DH5\_Ant1\_2402\_0~Reference

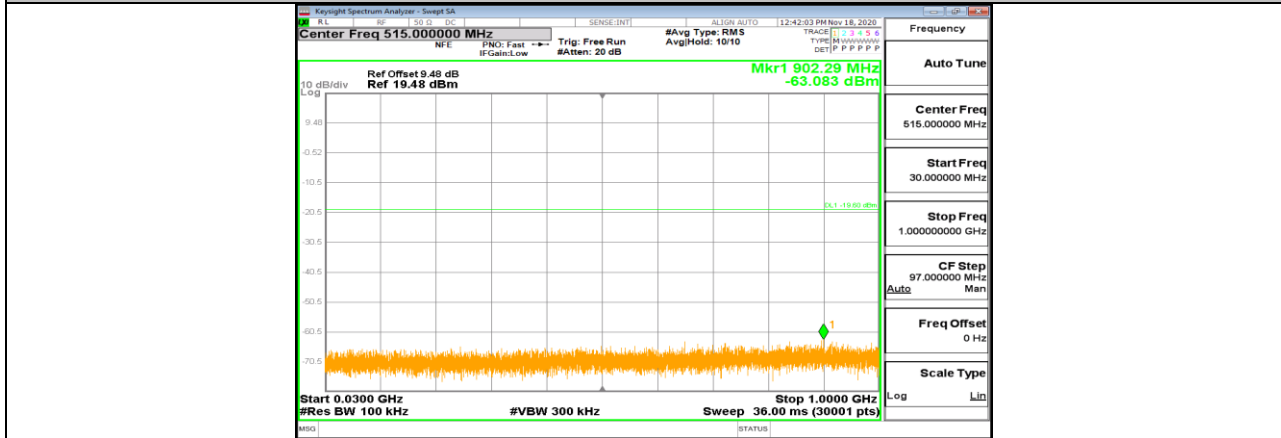


3DH5\_Ant1\_2402\_30~1000

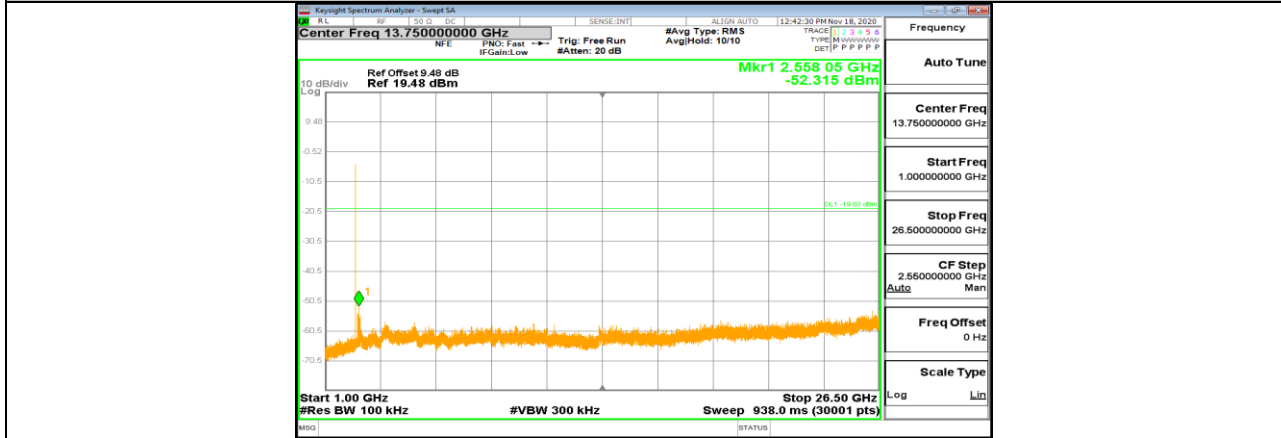


3DH5\_Ant1\_2402\_1000~26500

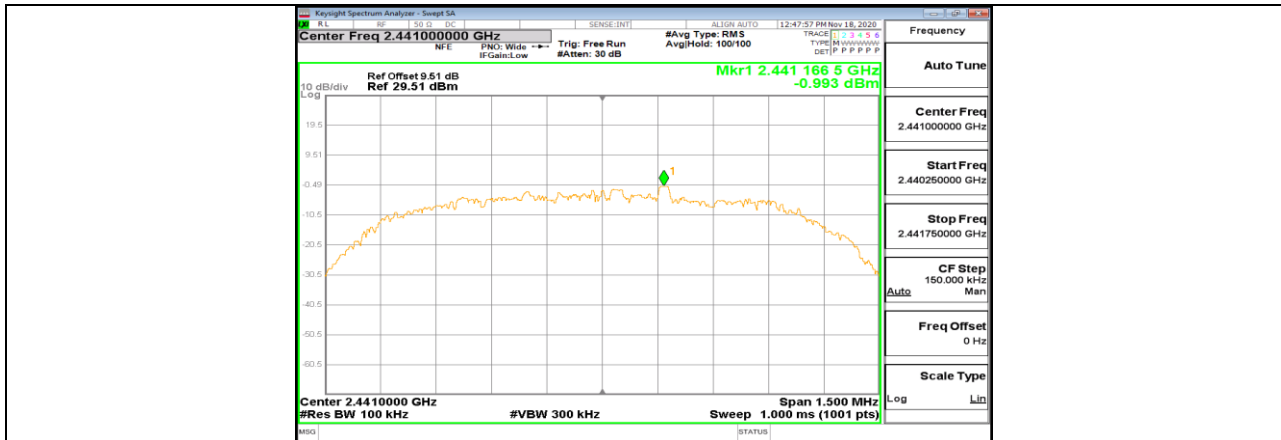


3DH5\_Ant1\_2441\_0~Reference

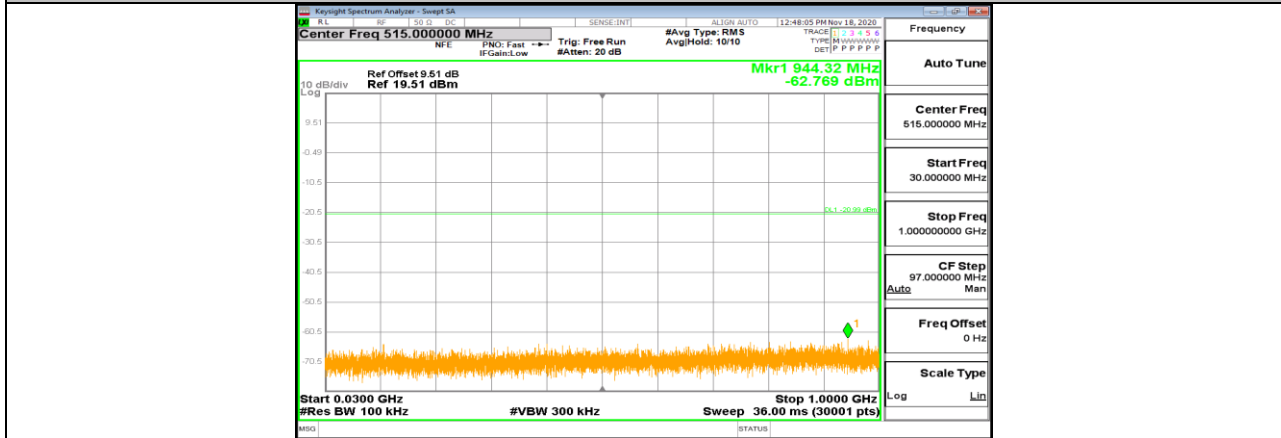


3DH5\_Ant1\_2441\_30~1000

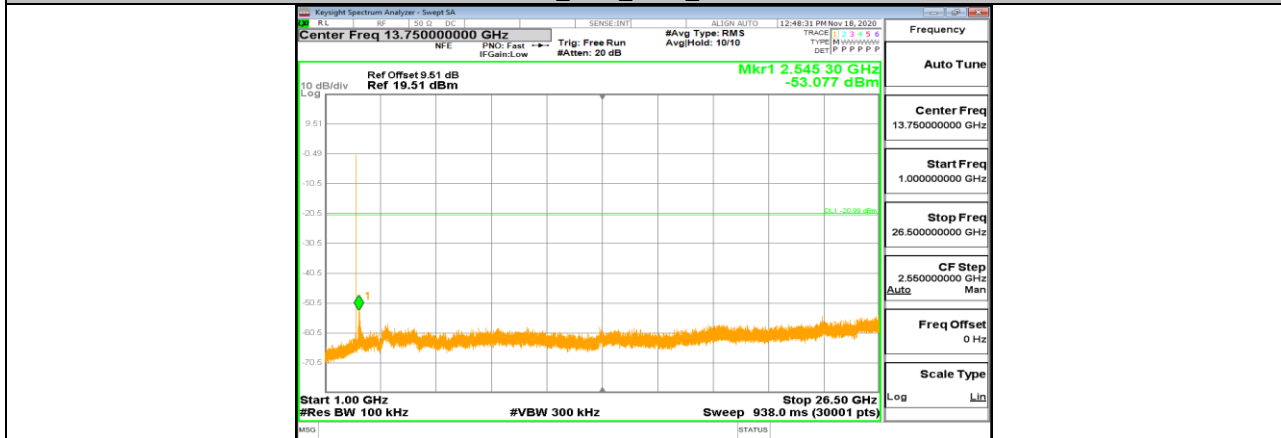


3DH5\_Ant1\_2441\_1000~26500

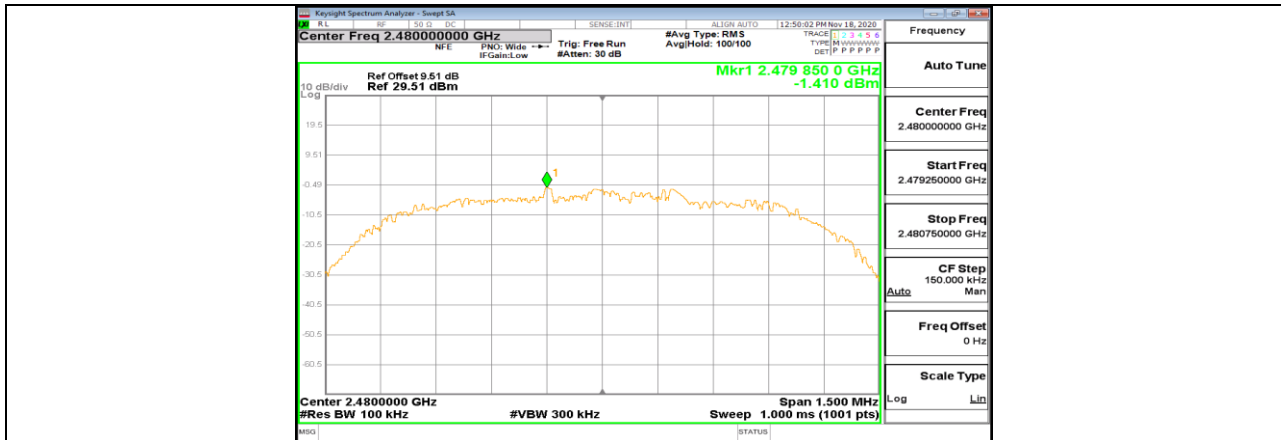

3DH5\_Ant1\_2480\_0-Reference

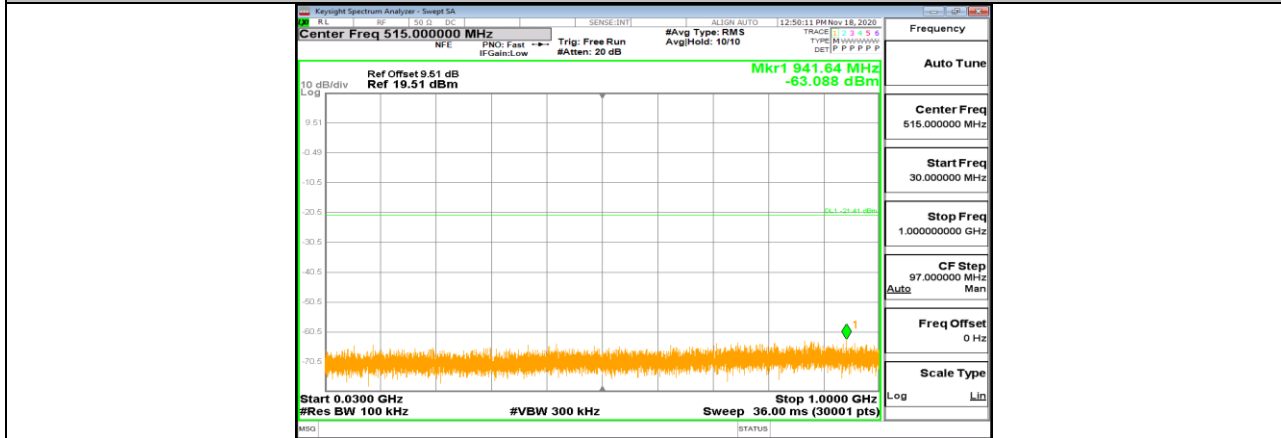

3DH5\_Ant1\_2480\_30-1000

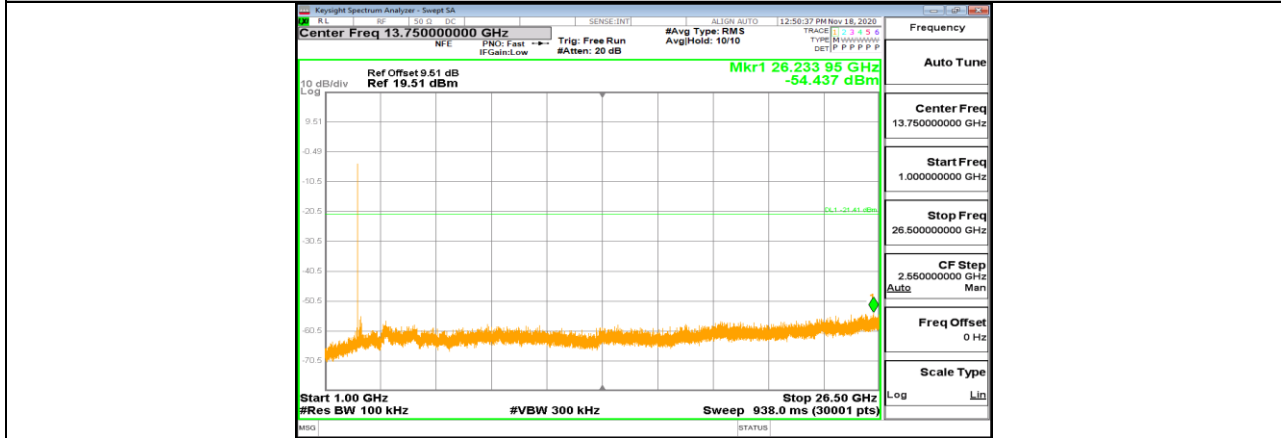

3DH5\_Ant1\_2480\_1000-26500



## 11.9. Appendix I: Duty Cycle

### 11.9.1. Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.90	3.75	0.7733	77.33	1.12	0.345	0.5
3DH5	2.90	3.75	0.7733	77.33	1.12	0.345	0.5

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

### 11.9.2. Test Graphs



**END OF REPORT**