








TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR22-SRF0006-C Page (1) of (20)</p>	 
<p>1. Client</p> <ul style="list-style-type: none"> ◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2021-12-08 <p>2. Use of Report : Class II Permissive change</p> <p>3. Name of Product / Model : LTE module / L850-GL</p> <p>4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Vietnam</p> <p>5. Host Name of Product / Model : Notebook PC / XE525QEA</p> <p>6. FCC ID : A3LL850GL525QEA</p> <p>7. Date of Test : 2022-01-07 to 2022-01-25</p> <p>8. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p>9. Test method used : FCC Part 2 FCC Part 22 subpart H FCC Part 24 subpart E FCC Part 27 subpart C</p> <p>10. Test Result : Refer to the test result in the test report</p>		
Affirmation	<p>Tested by</p> <p>Name : Kwonse Kim (Signature) </p>	<p>Technical Manager</p> <p>Name : Seungyong Kim (Signature) </p>
2022-01-26		
<p>KCTL Inc.</p> <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>		

<p align="center">KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p align="center">Report No.: KR22-SRF0006-C Page (2) of (20)</p>	
---	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2022-01-21	Originally issued	-
2022-01-24	Added note	18
2022-01-25	Added a narrowband emission and revised calibration date	18, 20
2022-01-26	Revised term	8

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR22-SRF0006-B is superseded by the report No. KR22-SRF0006-C.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (3) of (20)



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Additional WLAN/Bluetooth Module information	5
2.2.	Simultaneous Transmission Configurations	5
2.3.	Frequency/channel operations.....	6
3.	Summary of tests	8
4.	Measurement uncertainty	8
5.	Test results	9
5.1.	Radiated Power (ERP/EIRP)	9
5.2.	Radiated Spurious Emissions	13
6.	Measurement equipment	20

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (4) of (20)



1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Factory : SAMSUNG ELECTRONICS VIETNAM CO.,LTD.
Address : Khu Cong nghiep Ten Phong 1, Yen Trung, Yen Phong, Bac Ning, Vietnam
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040
ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : LTE Module
Model : LG850-GL
Host name of Product : Notebook PC
Host Model : XE525QEA
Modulation technique : LTE_QPSK, 16QAM
WCDMA_QPSK
Power source : DC 7.7 V
Antenna specification : LTE/WCDMA_FIFA Antenna
Frequency range : LTE Band 2 : 1 850 MHz ~ 1 910 MHz
LTE Band 4 : 1 710 MHz ~ 1 755 MHz
LTE Band 5 : 824 MHz ~ 849 MHz
LTE Band 12 : 699 MHz ~ 716 MHz
LTE Band 13 : 777 MHz ~ 787 MHz
LTE Band 66 : 1 710 MHz ~ 1 780 MHz
WCDMA 850 : 824 MHz ~ 849 MHz
WCDMA 1900 : 1 850 MHz ~ 1 910 MHz
Software version : Chrome OS
Hardware version : REV1.0
Test device serial No. : 1KLL91ZRB00078K, 1KLP91ZRB00058B

Note.

1. In this report is based on original report FCC ID: A3LL850GL525QEA, additional simultaneous transmission measurement with intel module AX201D2W which is also integrated into this host was investigated in test report.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (5) of (20)



KCTL

2.1. Additional WLAN/Bluetooth Module information

Manufacturer	: Intel Mobile Communications	
Model	: AX201D2W	
FCC ID	: PD9AX201D2	
Modulation technique	: DSSS, OFDM, OFDMA	
Frequency range	: 802.11b/g/n/ax	2.4 GHz Band (2 400.0 – 2 483.5 MHz)
	802.11a/n/ac/ax	5.15 GHz Band (5 150.0 – 5 250.0 MHz)
		5.25 GHz Band (5 250.0 – 5 350.0 MHz)
		5.47 GHz Band (5 470.0 – 5 725.0 MHz)
		5.725 GHz Band (5 725.0 – 5 850.0 MHz)
	Bluetooth/Low Energy	2.4 GHz Band (2 400.0 – 2 483.5 MHz)
Antenna Information	: Chain A (Aux): WLAN 2.4 GHz & 5 GHz and Bluetooth	
	Chain B (Main): WLAN 2.4 GHz & 5 GHz	

2.2. Simultaneous Transmission Configurations

No	Scenario
1	Bluetooth (Aux) + WWAN

Note.

- WWAN does not work simultaneously with WIFI.
- For the simultaneous mode the lowest margin condition among the channels and modes of each module (Cellular module L850-GL, Unlicensed module AX201D2W) was selected for the test.

2.3. Frequency/channel operations

This device contains the following capabilities:

WCDMA 850, WCDMA 1900,

LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 12, LTE Band 13, LTE Band 66

WCDMA 850

Ch.	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

Table 2.3.1.
RMC/HSDPA/HSUPA

WCDMA 1900

Ch.	Frequency (MHz)
9262	1 852.4
9400	1 880.0
9538	1 907.6

Table 2.3.2.
RMC/HSDPA/HSUPA

LTE Band 2

Ch.	Frequency (MHz)
18607	1 850.7
18900	1 880.0
19193	1 909.3

Table 2.3.3. 1.4M BW

Ch.	Frequency (MHz)
18615	1 851.5
18900	1 880.0
19185	1 908.5

Table 2.3.4. 3M BW

Ch.	Frequency (MHz)
18625	1 852.5
18900	1 880.0
19175	1 907.5

Table 2.3.5. 5M BW

Ch.	Frequency (MHz)
18650	1 855.0
18900	1 880.0
19150	1 905.0

Table 2.3.6. 10M BW

Ch.	Frequency (MHz)
18675	1 857.5
18900	1 880.0
19125	1 902.5

Table 2.3.7. 15M BW

Ch.	Frequency (MHz)
18700	1 860.0
18900	1 880.0
19100	1 900.0

Table 2.3.8. 20M BW

LTE Band 4

Ch.	Frequency (MHz)
19957	1 710.7
20175	1 732.5
20393	1 754.3

Table 2.3.9. 1.4M BW

Ch.	Frequency (MHz)
19965	1 711.5
20175	1 732.5
20385	1 753.5

Table 2.3.10. 3M BW

Ch.	Frequency (MHz)
19975	1 712.5
20175	1 732.5
20375	1 752.5

Table 2.3.11. 5M BW

Ch.	Frequency (MHz)
20000	1 715.0
20175	1 732.5
20350	1 750.0

Table 2.3.12. 10M BW

Ch.	Frequency (MHz)
20025	1 717.5
20175	1 732.5
20325	1 747.5

Table 2.3.13. 15M BW

Ch.	Frequency (MHz)
20050	1 720.0
20175	1 732.5
20300	1 745.0

Table 2.3.14. 20M BW

LTE Band 5

Ch.	Frequency (MHz)
20407	824.7
20525	836.5
20643	848.3

Table 2.3.15. 1.4M BW

Ch.	Frequency (MHz)
20415	825.5
20525	836.5
20635	847.5

Table 2.3.16. 3M BW

Ch.	Frequency (MHz)
20425	826.5
20525	836.5
20625	846.5

Table 2.3.17. 5M BW

Ch.	Frequency (MHz)
20450	829.0
20525	836.5
20600	844.0

Table 2.3.18. 10M BW

LTE Band 12

Ch.	Frequency (MHz)
23017	699.7
23095	707.5
23173	715.3

Table 2.3.19. 1.4M BW

Ch.	Frequency (MHz)
23025	700.5
23095	707.5
23165	714.5

Table 2.3.20. 3M BW

Ch.	Frequency (MHz)
23035	701.5
23095	707.5
23155	713.5

Table 2.3.21. 5M BW

Ch.	Frequency (MHz)
23060	704.0
23095	707.5
23130	711.0

Table 2.3.22. 10M BW

LTE Band 13

Ch.	Frequency (MHz)
23205	779.5
23230	782.0
23255	784.5

Table 2.3.23 5M BW

Ch.	Frequency (MHz)
-	-
23230	782.0
-	-

Table 2.3.24. 10M BW

LTE Band 66

Ch.	Frequency (MHz)
131979	1 710.7
132322	1 745.0
132665	1 779.3

Table 2.3.25. 1.4M BW

Ch.	Frequency (MHz)
131987	1 711.5
132322	1 745.0
132657	1 778.5

Table 2.3.26. 3M BW

Ch.	Frequency (MHz)
131997	1 712.5
132322	1 745.0
132647	1 777.5

Table 2.3.27. 5M BW

Ch.	Frequency (MHz)
132022	1 715.0
132322	1 745.0
132622	1 775.0

Table 2.3.28. 10M BW

Ch.	Frequency (MHz)
132047	1 717.5
132322	1 745.0
132597	1 772.5

Table 2.3.29. 15M BW

Ch.	Frequency (MHz)
132072	1 720.0
132322	1 745.0
132572	1 770.0

Table 2.3.30. 20M BW

3. Summary of tests

FCC Part section(s)	Parameter	Test Limit	Test Condition	Test results
22.913(a)(5)	Effective Radiated Power	< 7 Watts max. ERP	Radiated	Pass
27.50(b)(c)(10)		< 3 Watts max. ERP		Pass
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		Pass
27.50(d)(4)		< 1 Watts max. EIRP		Pass
2.1053 22.917(a) 24.238(a) 27.53(f),(g),(h)	Radiated Spurious Emissions	< 43 + 10Log ₁₀ (P) dB for all out of band emissions, <-70 dBW/MHz EIRP- Wideband, <-80 dBW/MHz EIRP- Narrowband		Pass

Notes:

- The test procedure(s) in this report were performed in accordance as following.
 - ◆ ANSI C63.26-2015
 - ◆ ANSI/TIA-603-E-2016
 - ◆ KDB 971168 D01 v03r01
- This is the C2PC test report to add host (Notebook PC), XE525QEA as documented in the C2PC letter. Because the change does not affect RF characteristics, therefore, only radiated spurious emission test was done against the worst case from the original module.
- All the radiated tests have been performed two modes (Notebook and Tablet mode) and the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z.
 - Worst case : Notebook mode

4. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded uncertainty (±)	
	Radiated spurious emissions	Below 1 000 MHz
1 000 MHz ~ 18 000 MHz		3.8 dB
Above 18 000 MHz		5.8 dB

5. Test results


5.1. Radiated Power (ERP/EIRP)

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

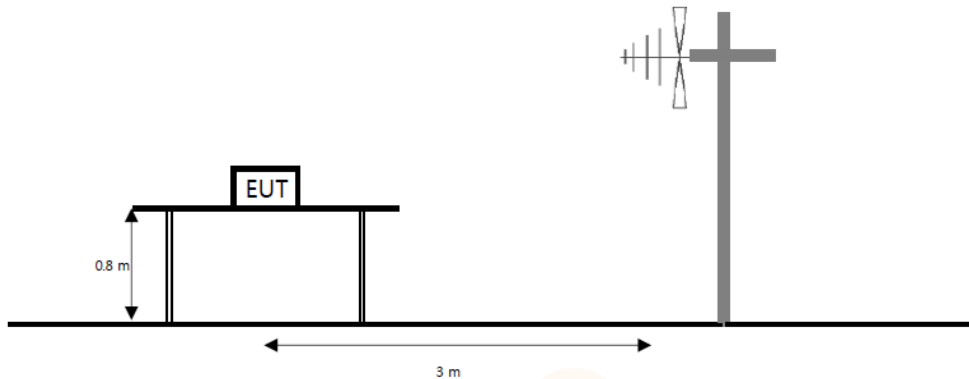

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

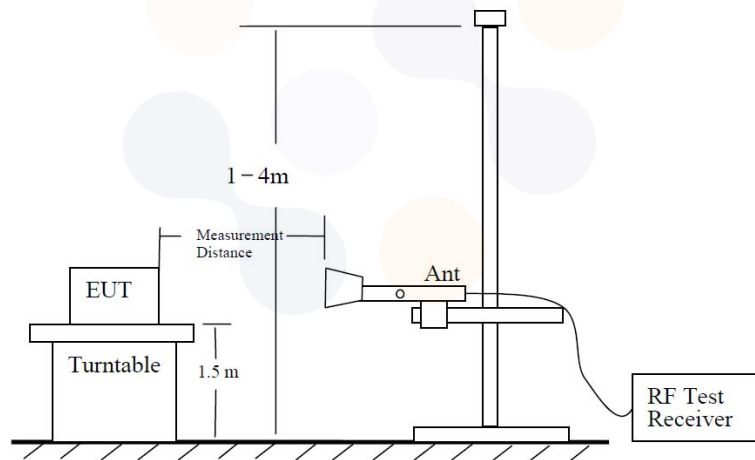

The diagram below shows the test setup for substituted method.

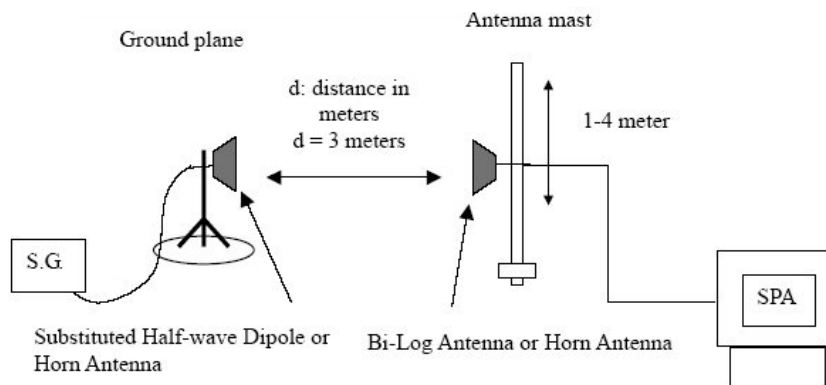

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (10) of (20)



Limit

According to §22.913(a)(5), the ERP of transmitters in the cellular radiotelephone service must not exceed the limits in this section. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to §24.232(c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(b)(10), Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-768 MHz, and 776-768 MHz bands are limited to 3 watts ERP.

According to §27.50(c)(10), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(d)(4), Fixed, mobile and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test procedure

971168 D01 v03r01 - Section 5.2 and 5.8, 412172 D01 v01r01
ANSI 63.26-2015 – Section 5.2
ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 \times to 3 \times the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (11) of (20)



Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
The power is calculated by the following formula;
$$Pd(\text{dBm}) = Pg(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$

Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (12) of (20)

**Test results****Test mode: WCDMA 850**

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
RMC	4182	836.4	H	-2.41	5.39	28.96	21.16	0.131

Test mode: WCDMA 1900

Mode	Channel	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
RMC	9538	1907.6	H	5.32	7.98	25.65	22.99	0.199

Test mode: LTE Band 2

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
20 M	QPSK	1860.0	H	5.44	7.91	23.25	20.78	0.120

Test mode: LTE Band 4

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
20 M	QPSK	1720.0	H	5.77	7.62	18.66	16.81	0.048

Test mode: LTE Band 5

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
10 M	QPSK	844.0	H	-2.87	5.43	28.70	20.40	0.110

Test mode: LTE Band 12

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
10 M	QPSK	707.5	H	-2.55	4.89	25.25	17.81	0.060

Test mode: LTE Band 13

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
10 M	QPSK	782.0	H	-1.65	5.13	27.05	20.27	0.106

Test mode: LTE Band 66

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
20 M	QPSK	1745.0	H	5.71	7.68	24.00	22.03	0.160


Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd & dBi) - C.L(Cable loss) (dB)


5.2. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

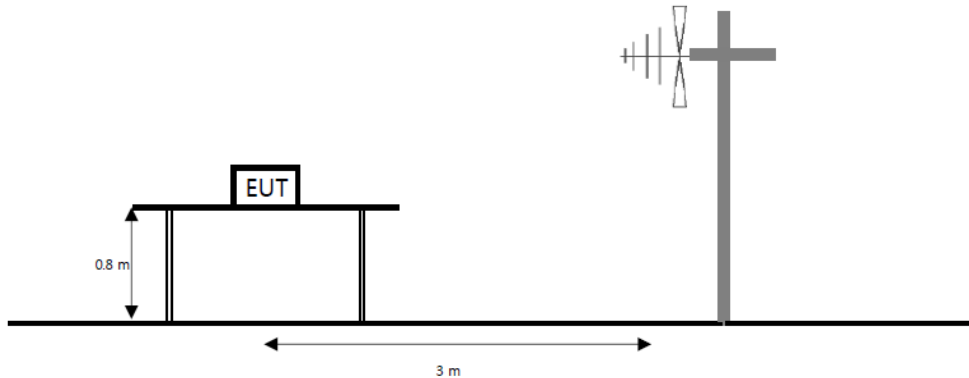

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

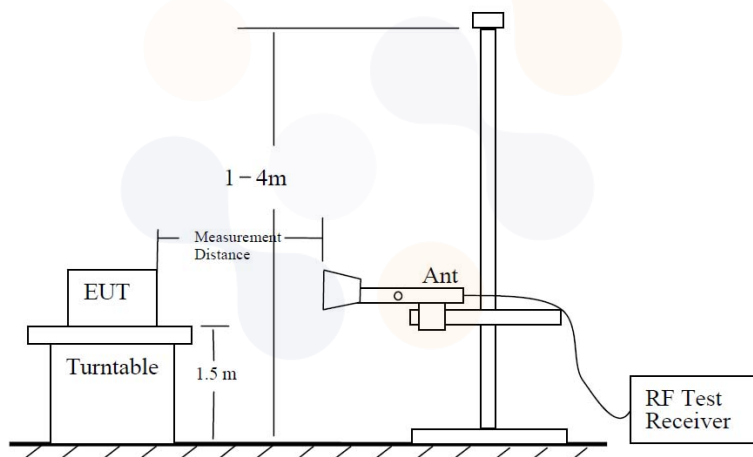

The diagram below shows the test setup for substituted method.

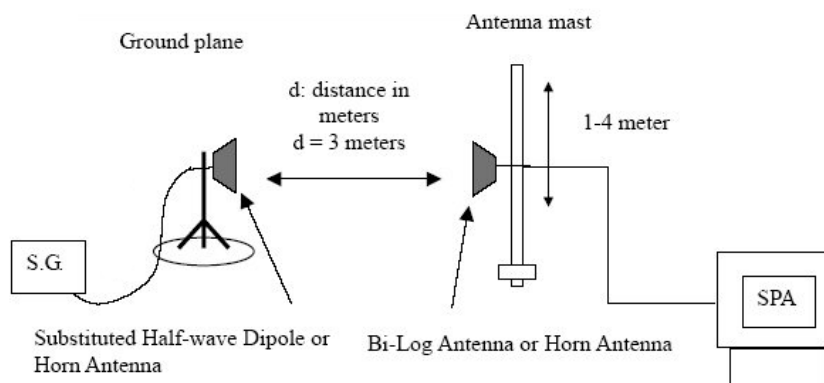

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (14) of (20)



Limit

According to §22.917(a), §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P_{\text{Watts}})$ dB.

According to §27.53(f), for operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power(EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10\log(P_{\text{Watts}})$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log(P_{\text{Watts}})$ dB.

Test procedure

971168 D01 v03r01 - Section 6.2
ANSI 63.26-2015 – Section 5.5
ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

- 1) RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times$ span / RBW
- 7) Allow trace to fully stabilize.

For the narrowband spurious settings:

- 1) RBW = 1 kHz
- 2) VBW = 3 kHz
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep speed slow enough to maintain measurement calibration.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (15) of (20)

**Notes:**

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring corrected for the change of input attenuator setting of the measuring receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (16) of (20)

**Test results (Above 1 000 MHz)**

Test mode : WCDMA 850

Frequency(MHz) : 826.4

Channel : 4132

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 651.52	H	5.94	7.46	-55.68	-57.20	-13.00	44.20
	2 479.05	V	6.15	9.19	-54.66	-57.70	-13.00	44.70
	3 305.35	H	7.75	10.83	-53.12	-56.20	-13.00	43.20
	4 133.70	V	8.82	12.27	-49.65	-53.10	-13.00	40.10

Test mode : WCDMA 1900

Frequency(MHz) : 1 907.6

Channel : 9538

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 816.42	H	8.68	11.69	-51.99	-55.00	-13.00	42.00
	5 721.82	V	10.54	14.56	-49.98	-54.00	-13.00	41.00
	7 630.41	H	12.20	17.10	-45.40	-50.30	-13.00	37.30
	9 537.72	V	13.19	18.98	-42.61	-48.40	-13.00	35.40

Test mode : LTE Band 2

Frequency(MHz) : 1 900.0

Channel : 19100

Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 780.03	V	8.64	11.55	-53.29	-56.20	-13.00	43.20
	5 670.11	V	10.53	14.48	-50.15	-54.10	-13.00	41.10
	7 564.66	V	12.15	16.87	-38.28	-43.00	-13.00	30.00
	9 455.38	H	13.20	18.98	-40.62	-46.40	-13.00	33.40

Note.

1. E.R.P & E.I.R.P(dB m) = Substitute Level(dB) + Antenna gain(dB i&dB d) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (17) of (20)



Test mode : LTE Band 4

Frequency(MHz) : 1 745.0

Channel : 20300

Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 472.36	H	8.22	11.17	-48.35	-51.30	-13.00	38.30
	5 208.61	H	10.27	13.92	-45.65	-49.30	-13.00	36.30
	6 944.21	V	11.33	16.14	-33.89	-38.70	-13.00	25.70
	10 416.70	H	13.10	19.79	-32.71	-39.40	-13.00	26.40

Test mode : LTE Band 5

Frequency(MHz) : 836.5

Channel : 20525

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 664.24	H	5.91	7.49	-48.92	-50.50	-13.00	37.50
	2 488.90	H	6.18	9.21	-47.17	-50.20	-13.00	37.20
	3 327.91	V	7.82	10.88	-52.34	-55.40	-13.00	42.40
	4 159.55	V	8.80	12.15	-50.55	-53.90	-13.00	40.90

Test mode : LTE Band 12

Frequency(MHz) : 704.0

Channel : 23060

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 399.20	H	5.63	6.89	-52.64	-53.90	-13.00	40.90
	2 098.72	H	5.32	8.39	-53.13	-56.20	-13.00	43.20
	2 795.37	V	6.61	9.81	-53.80	-57.00	-13.00	44.00
	3 495.31	V	8.29	11.22	-52.07	-55.00	-13.00	42.00

Note.

1. E.R.P & E.I.R.P(dB m) = Substitute Level(dB) + Antenna gain(dB i&dB d) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (18) of (20)



Test mode : LTE Band 13

Frequency(MHz) : 782.0

Channel : 23230

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 555.00	H	6.17	7.23	-57.24	-58.30	-13.00	45.30
	2 333.00	H	5.83	8.84	-55.49	-58.50	-13.00	45.50
	3 108.00	V	7.20	10.44	-54.86	-58.10	-13.00	45.10
	3 886.00	H	8.76	11.81	-53.55	-56.60	-13.00	43.60

Test mode : LTE Band 13 (1 559 MHz – 1 610 MHz)

Frequency(MHz) : 782.0

Channel : 23230

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 603.45	H	6.05	7.44	-56.41	-57.80	-50.00	7.80

Test mode : LTE Band 66

Frequency(MHz) : 1 745.0

Channel : 132322

Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 472.36	H	8.22	11.17	-47.45	-50.40	-13.00	37.40
	5 207.97	H	10.27	13.92	-43.65	-47.30	-13.00	34.30
	6 944.21	H	11.33	16.14	-33.09	-37.90	-13.00	24.90
	10 416.70	V	13.10	19.79	-23.51	-30.20	-13.00	17.20

Note.

1. Limit Calculation(dBm)= 43 + 10log(P_{Watts})

Limit Calculation of wide-band (dBm/MHz) = -70dBW/MHz (-40 dBm/MHz)

Limit Calculation of narrow-band (dBm) = -80dBW (-50dBm)

2. E.R.P & E.I.R.P(dB m) = Substitute Level(dB) + Antenna gain(dB d&dB i) - C.L(Cable loss) (dB)

3. The narrowband limit is applied because any emissions are not detected within 1 559 MHz - 1 610 MHz.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0006-C
Page (19) of (20)



**Spurious Emission for Simultaneous Condition**

Case	WWAN	Bluetooth
Mode	LTE Band 4	EDR (2DH5)
Channel	20300	39
Frequency(MHz)	1745	2441
Bandwidth(MHz)	20	-

Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
2153.25	H	5.44	8.51	-41.93	-45.00	-13.00	32.00
4881.14	H	9.74	13.77	-49.87	-53.90	-13.00	40.90
6944.21	H	11.33	16.14	-32.99	-37.80	-13.00	24.80
10416.70	H	13.10	19.79	-37.21	-43.90	-13.00	30.90

Note.

1. E.R.P & E.I.R.P(dB m) = Substitute Level(dB) + Antenna gain(dB i&dB d) - C.L(Cable loss) (dB)
2. For the simultaneous mode the lowest margin condition among the channels and modes were selected for the test.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR22-SRF0006-C Page (20) of (20)	 
---	--	---

6. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
PXA Signal Analyzer	KEYSIGHT	N9040B	US55230151	22.07.28
Signal Generator	R&S	SMB100A	176206	23.01.19*
Wideband Radio Communication Tester	R&S	CMW500	141780	22.04.01
Biconical VHF-UHF Broadband Antenna	SCHWARZBECK	VUBA9117	275	22.04.09
Bilog Antenna	ETS.LINDGREN	3143B	228420	23.09.28
Horn Antenna	ETS.LINDGREN	3117	161225	22.05.11
Horn Antenna	ETS.LINDGREN	3117	227509	22.09.27
High Pass Filter	Wainwright Instruments GmbH	WHKX10-900-1000-15000-40SS	11	22.08.20
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40SS	32	22.08.20
Band Reject Filter	Wainwright Instruments GmbH	WRCG 1710/1785-1690/1805-60/12SS	43	23.01.19*
Broadband Amplifier	SONOMA INSTRUMENT	310N	186280	22.04.01
Amplifier	LTC MICROWAVE	LLA01185522Q-B	141	22.07.19
Antenna Stand	innco systems GmbH	AS1500-EP-10kg	N/A	N/A
Antenna Stand	innco systems GmbH	AS1500-EP-10kg	N/A	N/A
Compact Table	innco systems GmbH	CT1000	N/A	N/A
Cable Assembly	Radiall	R286303620	1649.241	N/A
Cable Assembly	Radiall	TESTPRO 3	N/A	N/A

* Tests related to this equipment were progressed before the calibration was completed.

End of test report