

# TEST REPORT



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (1) / (73) Pages

## 1. Client

- Name : Samsung Electronics Co Ltd
- Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey
- Date of Receipt : 2019-10-22

## 2. Manufacturer

- Name : Samsung Electronics Co Ltd
- Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey

**3. Use of Report :** For FCC Certification & Canadian Certification

**4. Test Sample / Model:** BT (module) / MB8811QAN



**5. Date of Test :** 2019-10-28 to 2019-11-12

**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.247

**7. Testing Environment:** Temp.: (23 ± 1) °C, Humidity: (48 ± 5) % R.H.

**8. Test Results :** Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by Bongseok, Kim: (Signature) 	Technical Manager Young-taek, Lee: (Signature) 
-------------	---	---

2019-11-12

Republic of KOREA **CTK Co., Ltd.**



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (2) / (73) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2019-11-12	Issued (CTK-2019-04450)	all

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (3) / (73) Pages

## **CONTENTS**

1. General Product Description .....	4
1.1 Client Information .....	4
1.2 Product Information.....	4
1.3 Peripheral Devices .....	4
2. Facility and Accreditations.....	5
2.1 Test Facility.....	5
2.2 Laboratory Accreditations and Listings .....	5
2.3 Calibration Details of Equipment Used for Measurement .....	5
3. Test Specifications .....	6
3.1 Standards.....	6
3.2 Mode of operation during the test.....	6
3.3 Maximum Measurement Uncertainty .....	7
4. Technical Characteristic Test.....	8
4.1 Carrier Frequency Separation.....	8
4.2 Number of Hopping Frequencies .....	10
4.3 20 dB bandwidth & 99% Bandwidth .....	13
4.4 Time of Occupancy .....	21
4.5 Maximum peak Conducted Output Power.....	27
4.6 Unwanted Emissions (Conducted).....	35
4.7 Radiated Emission .....	46
4.8 AC Power Line Conducted Emissions .....	66
4.9 Frequency Hopping System Requirements .....	71
APPENDIX A – Test Equipment Used For Tests .....	73



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (4) / (73) Pages

## 1. General Product Description

### 1.1 Client Information

<b>Company</b>	Samsung Electronics Co., Ltd.
<b>Contact Point</b>	19 Chapin Rd., Building D, Pine Brook, New Jersey
<b>Contact Person</b>	Name : Minhyung Cho E-mail : mh719.cho@samsung.com Tel : +82-31-277-2688

### 1.2 Product Information

<b>FCC ID</b>	A3LMB8811QAN
<b>IC</b>	649E-MB8811QAN
<b>Product Description</b>	BT module
<b>Model name</b>	MB8811QAN
<b>Variant Model name</b>	MB8811QAC (Extension of PCB to Screw Fixation)
<b>Operating Frequency</b>	2 402 MHz - 2 480 MHz
<b>RF Output Power</b>	7.52 dBm (5.65 mW)
<b>Antenna Specification</b>	Antenna type : Internal Antenna Peak Gain : 1.193 dBi
<b>Number of channels</b>	79
<b>Channel Spacing</b>	1 MHz
<b>Type of Modulation</b>	GFSK(1Mbps), $\pi/4$ DQPSK(2Mbps), 8DPSK(3Mbps)
<b>Power Source</b>	DC 3.3 V
<b>Firmware Version Id Number(FVIN)</b>	V1.0
<b>Test SW Version</b>	BlueSuite: 2.6.2
<b>RF Power setting in Test SW</b>	Initial value

### 1.3 Peripheral Devices

<b>Device</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>
Notebook	Hewlett Packard Co.,Ltd	HP ProBook 650 G1	5CG5114K13
AC Adapter	Hewlett Packard Co.,Ltd	PPP012D-S	WCNXF0AAR7S2XX



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (5) / (73) Pages

## 2. Facility and Accreditations

### 2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

### 2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

### 2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



### 3. Test Specifications

#### 3.1 Standards

Section in FCC	Section in RSS	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	RSS-247 5.1(b)	Carrier Frequency Separation	C	Conducted
15.247(a)	RSS-247 5.1(d)	Number of Hopping Frequencies	C	
15.247(a)	RSS-247 5.1(a)	20 dB Bandwidth	C	
15.247(a)	RSS-247 5.1(d)	Time of occupancy (Dwell Time)	C	
15.247(b)	RSS-247 5.1(b)	Maximum peak conducted output power	C	
15.247(d)	RSS-247 5.5	Unwanted emission	C	
15.209	RSS-Gen 6.13	Transmitter emission	C	Radiated
15.207(a)	RSS-Gen 8.8	AC Conducted Emission	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.				
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013, RSS-247 Issue 2				

#### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

##### Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 441 MHz	2 480 MHz

##### Test mode

Modulation	Packet type	Data rate
GFSK	DH5	1 Mbps
8DPSK	3-DH5	3 Mbps

##### Test model

Model	Test item	
MB8811QAN(Basic)	Conducted measurement item	Radiated measurement item
MB8811QAC(Variant)	-	Radiated measurement item



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (7) / (73) Pages

### 3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	$\pm 0.19$ dB
Conducted Unwanted Emission	$\pm 3.0$ dB
Radiated Emissions ( $f \leq 1$ GHz)	$\pm 4.38$ dB
Radiated Emissions ( $f > 1$ GHz)	$\pm 5.12$ dB
AC Conducted Emission	$\pm 3.64$ dB

## 4. Technical Characteristic Test

### 4.1 Carrier Frequency Separation

#### Test Procedures(ANSI C63.10-2013 7.8.2)

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled. After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span : wide enough to capture the peaks of two adjacent channels

RBW : approximately 30% of the channel spacing;

adjust as necessary to best identify the center of each individual channel.

VBW  $\geq$  RBW

Sweep : auto

Detector function = peak

Trace = max hold

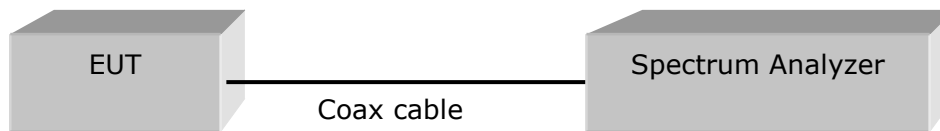


Figure 1 : Measurement setup for the carrier frequency separation

#### Limit

FHSS operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater.

#### Test Results

Test mode : GFSK

Channel	Adjacent Hopping Channel Separation [kHz]	Two-third of 20dB bandwidth [kHz]	Minimum Bandwidth [kHz]	Result
Middle	1 000	647	25	Complies


Test mode : 8DPSK

Channel	Adjacent Hopping Channel Separation [kHz]	Two-third of 20dB bandwidth [kHz]	Minimum Bandwidth [kHz]	Result
Middle	1 010	860	25	Complies

See next pages for actual measured spectrum plots.




**Test mode : GFSK**

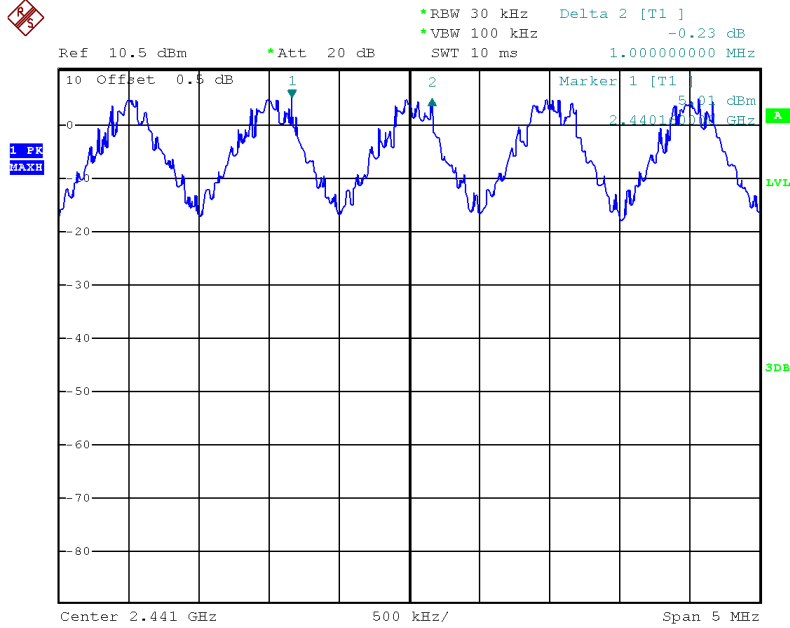

Date: 30.OCT.2019 08:50:34

**Test mode : 8DPSK**

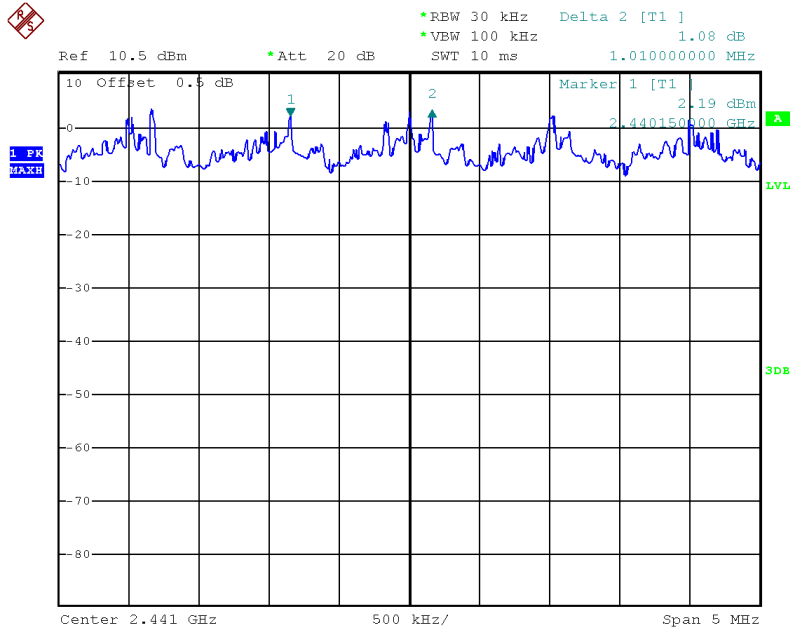

Date: 30.OCT.2019 09:59:50



#### 4.2 Number of Hopping Frequencies


##### Test Procedures(ANSI C63.10-2013 7.8.3)

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range      1: Start = 2389.5 MHz, Stop = 2439.5 MHz  
                                    2: Start = 2439.5 MHz, Stop = 2489.5 MHz

RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.  
VBW  $\geq$  RBW    Sweep = auto  
Detector function = peak    Trace = max hold

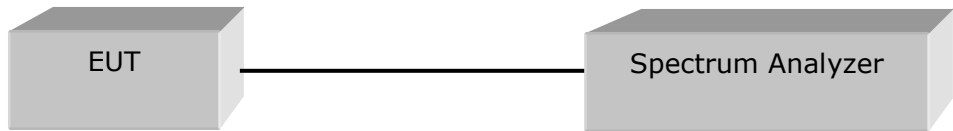

##### Limit

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

##### Test Results

Test mode : GFSK


Total number of Hopping Channels	Result
79	Complies

Test mode : 8DPSK


Total number of Hopping Channels	Result
79	Complies

See next pages for actual measured spectrum plots.

**Test Mode : GFSK**

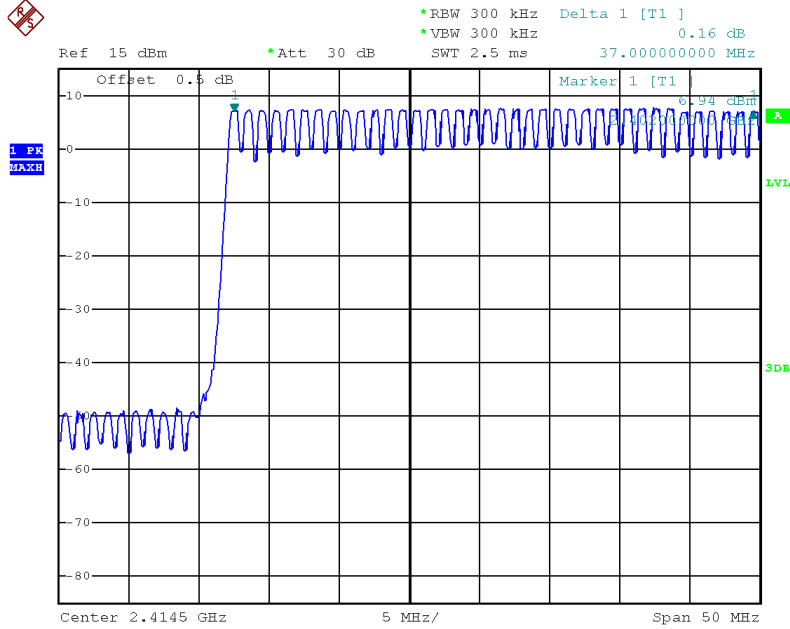


Date: 30.OCT.2019 08:52:06

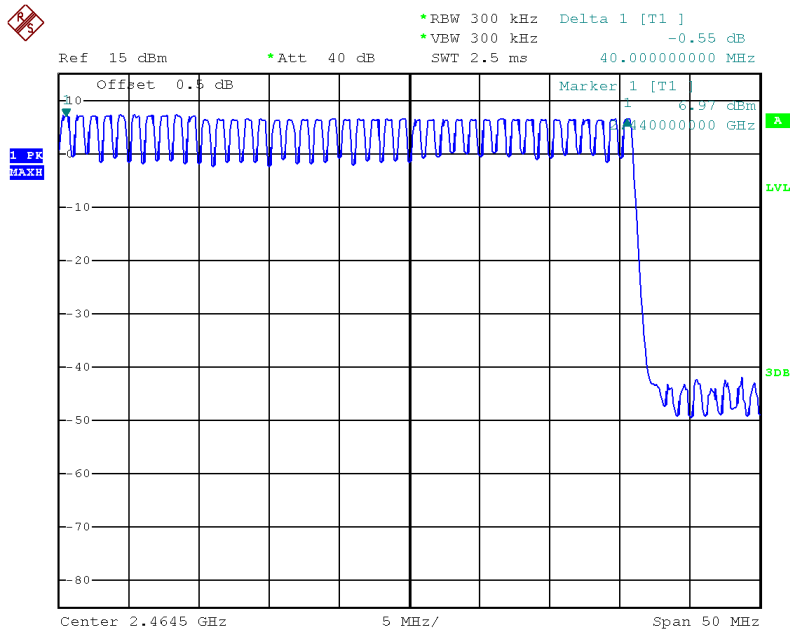


Date: 30.OCT.2019 08:53:13

**Test Mode : 8DPSK**

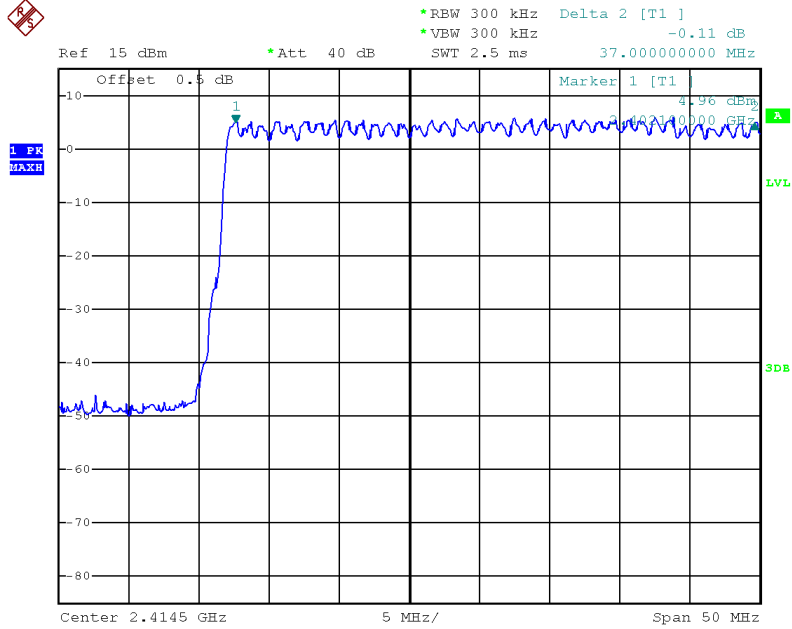

Date: 30.OCT.2019 10:01:18

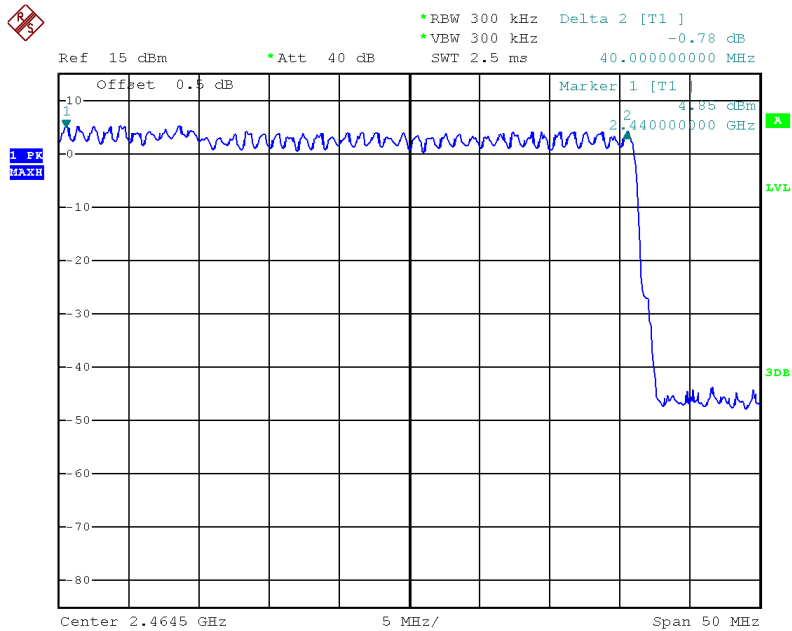

Date: 30.OCT.2019 10:02:37

### 4.3 20 dB bandwidth & 99% Bandwidth

#### Test Procedures(ANSI C63.10-2013 6.9.2)

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Test Procedures(ANSI C63.10-2013 6.9.3)

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = between 2 times and 5 times the OBW


RBW = 1% to 5% of the OBW

Sweep = auto

VBW : approximately 3 times RBW

Detector function = peak

Trace = max hold

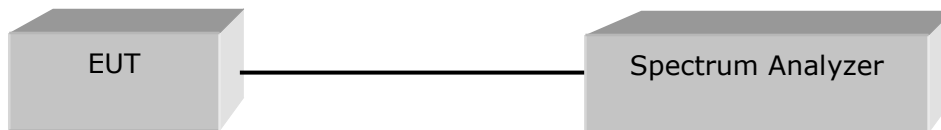

#### Limit

Limit : N/A



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (14) / (73) Pages

## Test Results

Test mode : GFSK


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]	Result
Low	2 402	0.970	0.870	Complies
Middle	2 441	0.970	0.870	Complies
High	2 480	0.960	0.870	Complies

Test mode : 8DPSK

Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]	Result
Low	2 402	1.300	1.190	Complies
Middle	2 441	1.290	1.190	Complies
High	2 480	1.300	1.180	Complies


See next pages for actual measured spectrum plots.

### GFSK - Lowest Frequency (2 402 MHz)

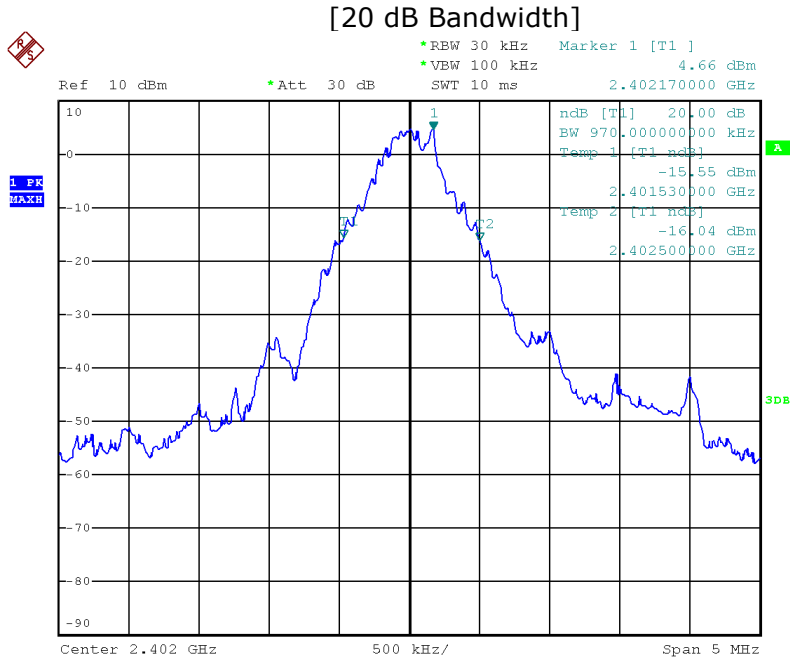


Date: 30.OCT.2019 08:43:04

### [99% Bandwidth]

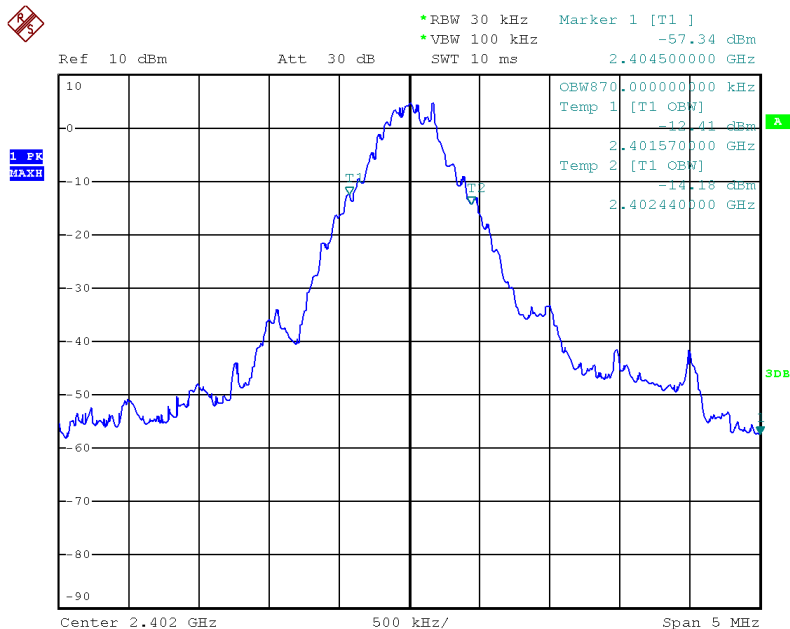


Date: 30.OCT.2019 08:43:19

### GFSK - Middle Frequency (2 441 MHz)

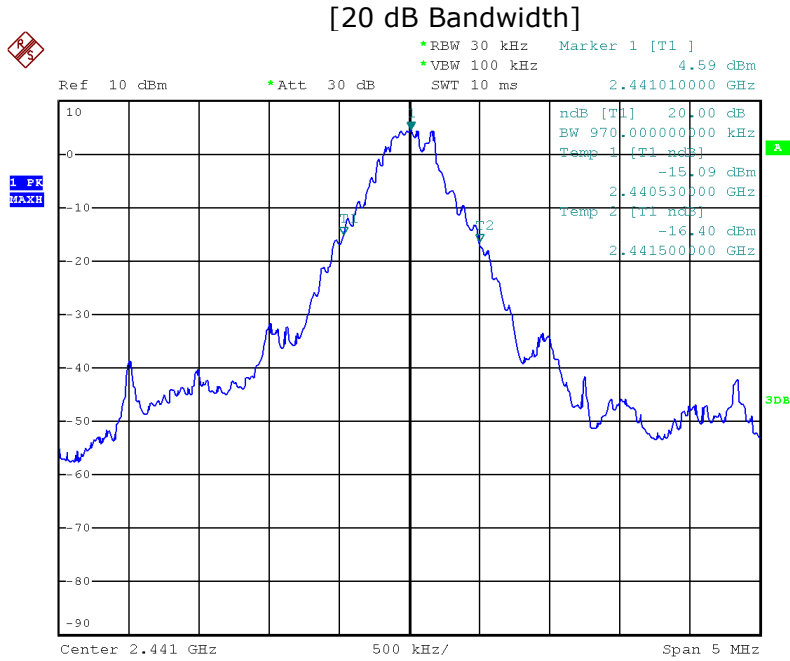


Date: 30.OCT.2019 08:44:55

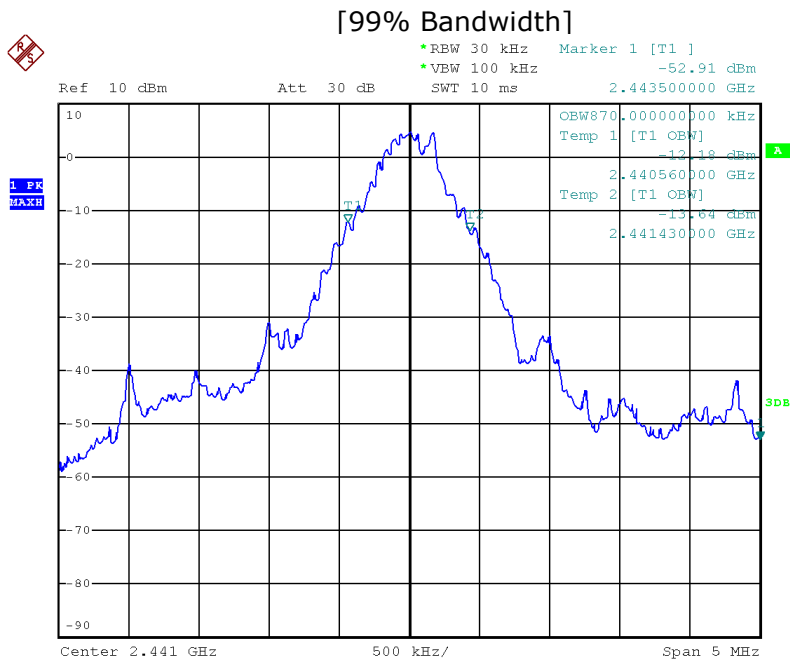

Date: 30.OCT.2019 08:45:10




### GFSK - Highest Frequency (2 480 MHz)

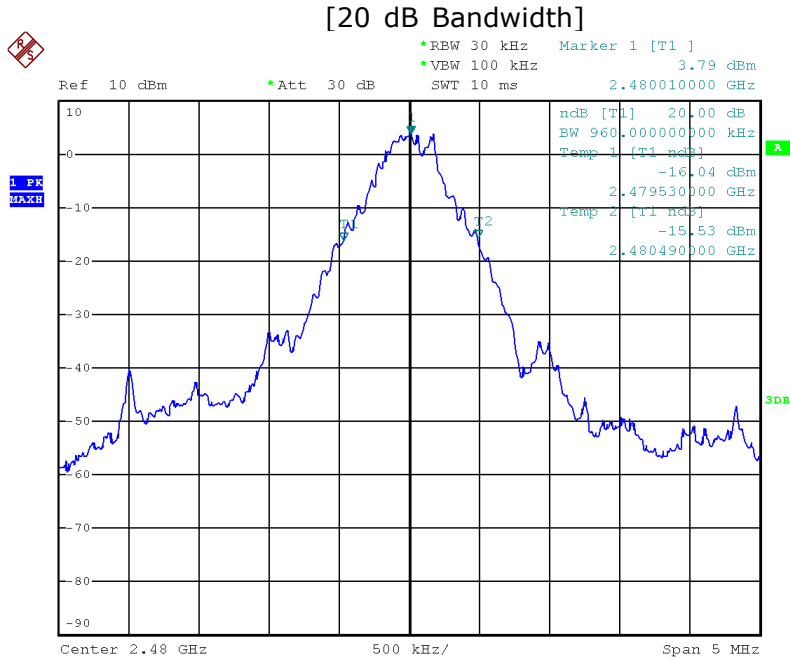


Date: 30.OCT.2019 08:46:49

### [99% Bandwidth]

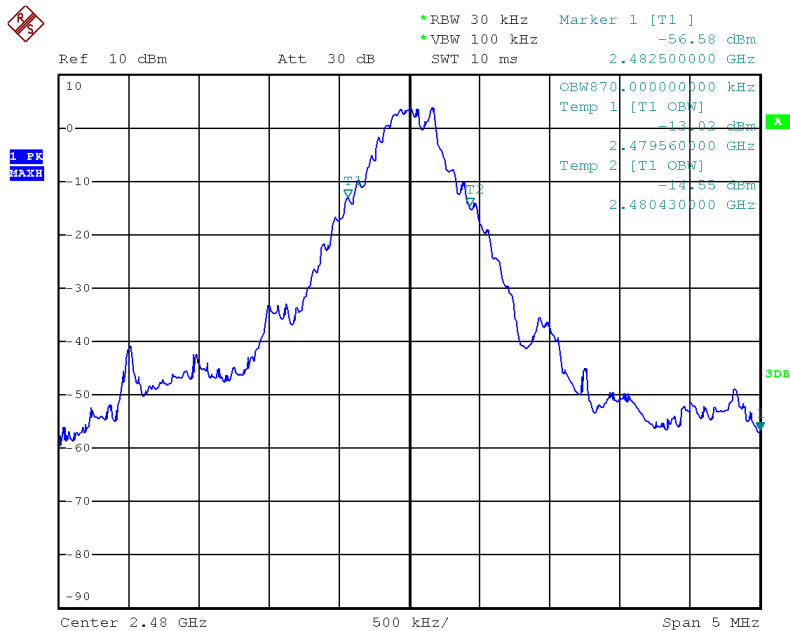


Date: 30.OCT.2019 08:47:03

### 8DPSK -Lowest Frequency (2 402 MHz)

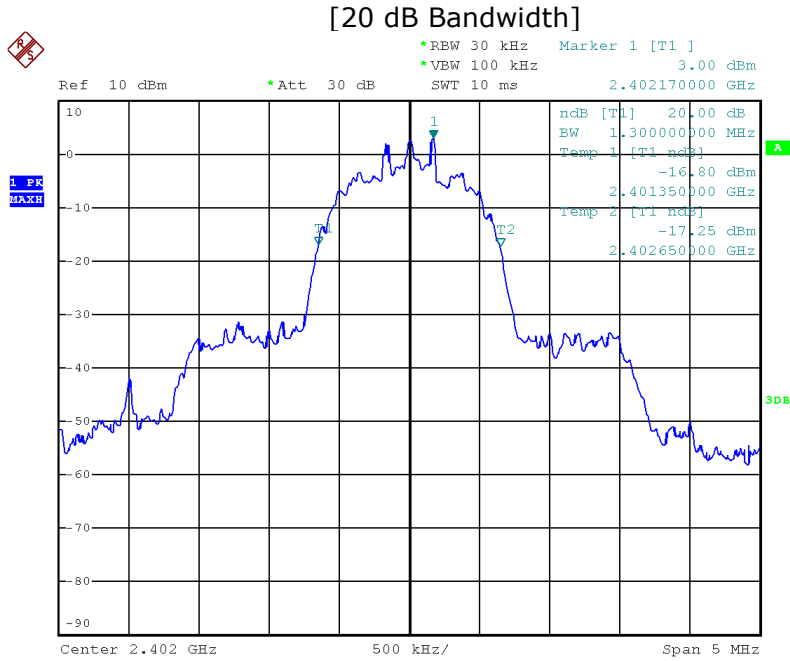


Date: 30.OCT.2019 09:52:47

### [99% Bandwidth]

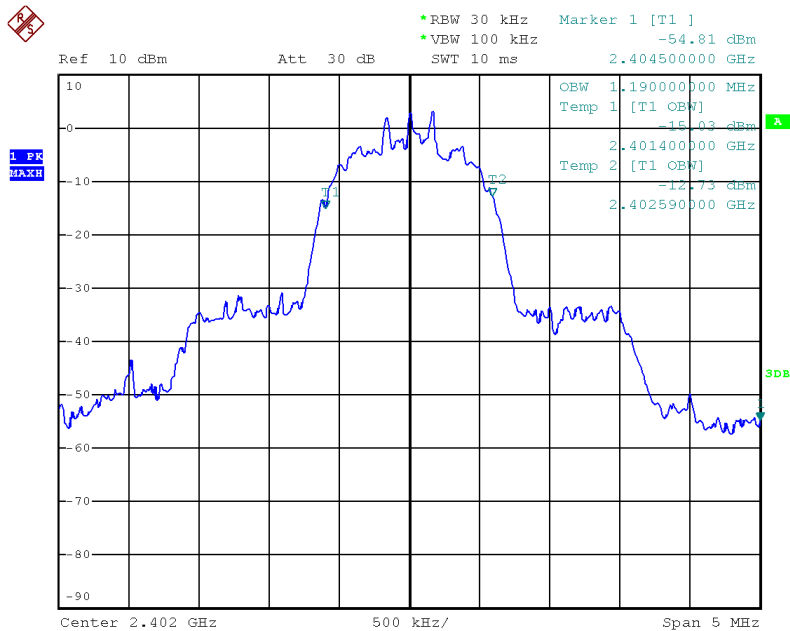


Date: 30.OCT.2019 09:53:01

### 8DPSK -Middle Frequency (2 441 MHz)

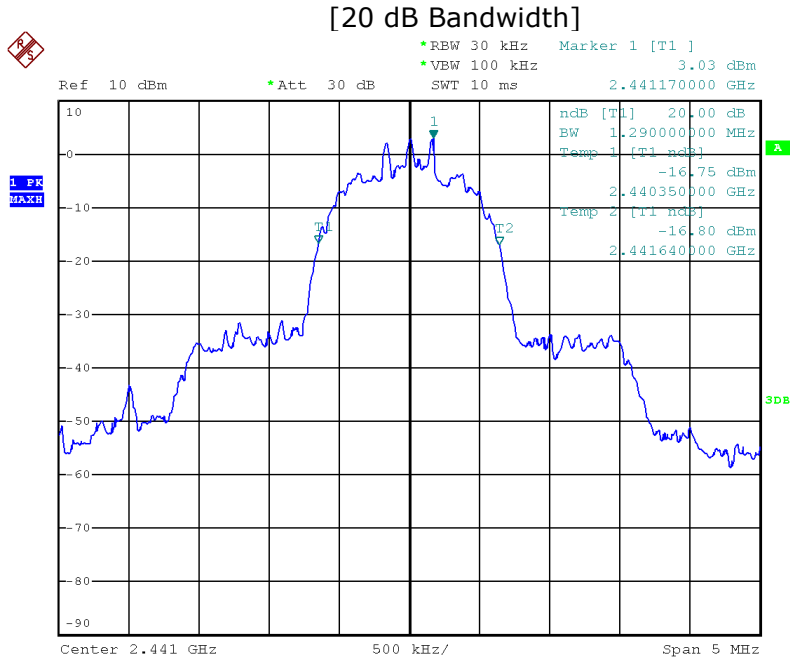


Date: 30.OCT.2019 09:54:27

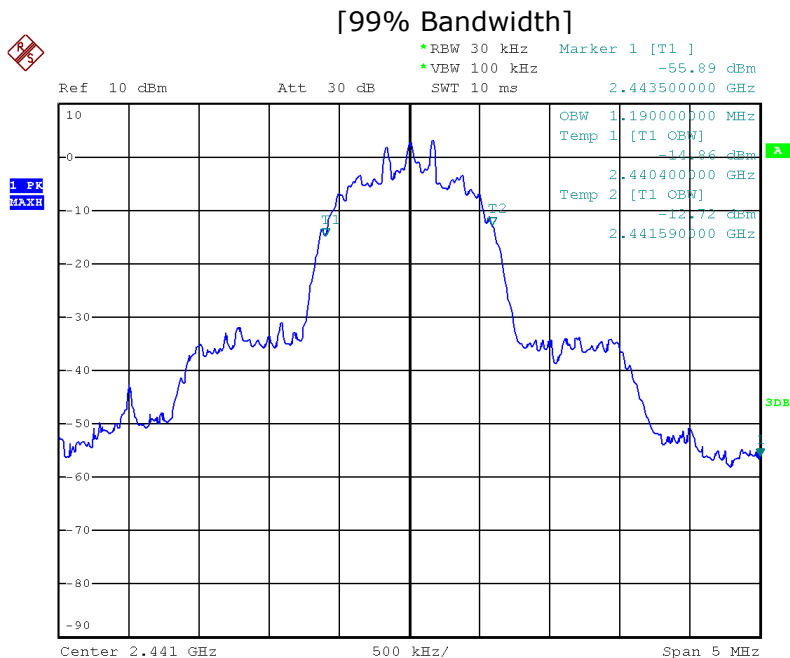


Date: 30.OCT.2019 09:54:42

### 8DPSK - Highest Frequency (2 480 MHz)

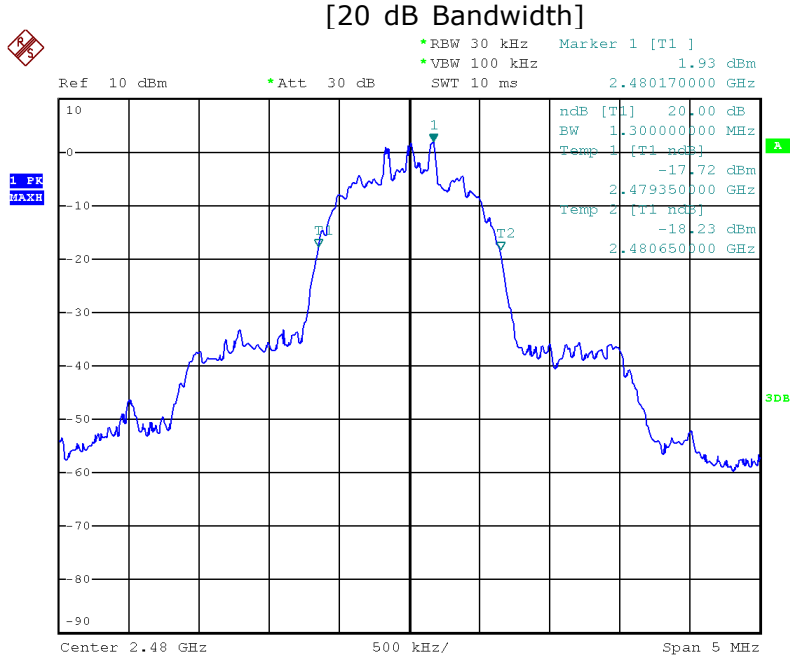

Date: 30.OCT.2019 09:56:52

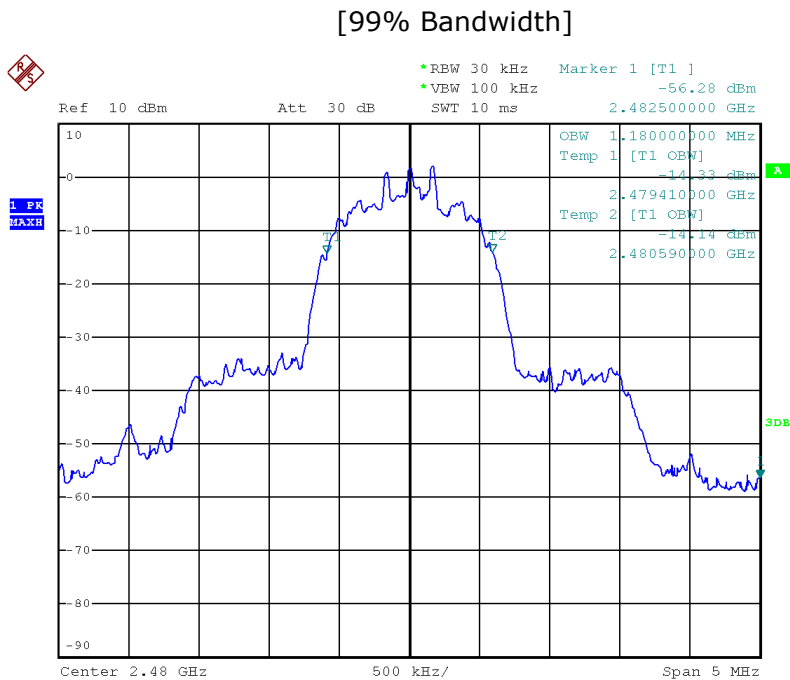

Date: 30.OCT.2019 09:57:06

## 4.4 Time of Occupancy

### Test Procedures(ANSI C63.10-2013 7.8.4)


The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

Number of hops in the period specified in the requirements =  
(number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time)

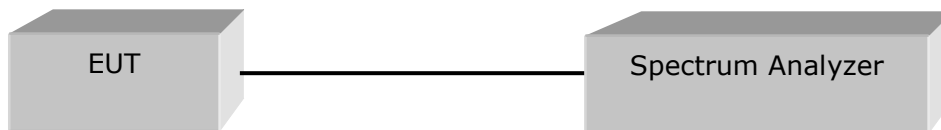

### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



## Test Results

Test mode : GFSK

Mode	Number of hops Channels	Transmit time per hop(msec)	Result (msec)	Limit (msec)
DH1	79	0.390	<b>124.8</b>	400
DH3	79	1.650	<b>264.0</b>	400
DH5	79	2.900	<b>310.3</b>	400

Test mode : 8DPSK

Mode	Number of hops Channels	Transmit time per hop(msec)	Result (msec)	Limit (msec)
3-DH1	79	0.395	<b>126.4</b>	400
3-DH3	79	1.650	<b>264.0</b>	400
3-DH5	79	2.900	<b>310.3</b>	400

**※ Remark:**


**Average time of occupancy = Transmit time per hop \* Number of hopping channels in 31.6s**

**According the BLUETOOTH STANDARD SPECIFICATION, the nominal hop rate is 1600 hop/s. All bluetooth units participating in the piconet are time and hop synchronized to the channel.**

- The maximum number of hopping channels in 31.6s for DH1 =  $1600 / 2 / 79 * 31.6 = 320$
- The maximum number of hopping channels in 31.6s for DH3 =  $1600 / 4 / 79 * 31.6 = 160$
- The maximum number of hopping channels in 31.6s for DH5 =  $1600 / 6 / 79 * 31.6 = 107$


See next pages for actual measured spectrum plots.

### Transmit time for PACKET Type DH1(GFSK)

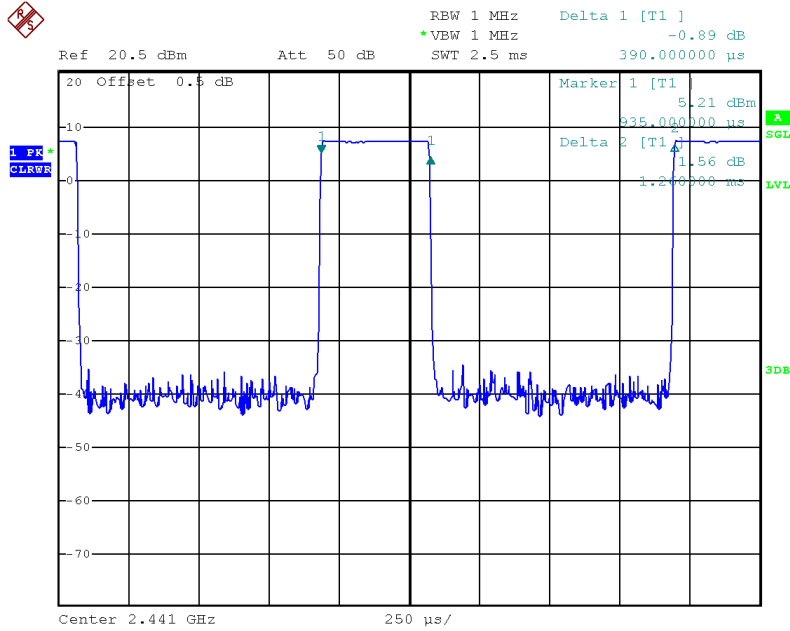

Date: 30.OCT.2019 09:49:36


### Transmit time for PACKET Type DH3(GFSK)

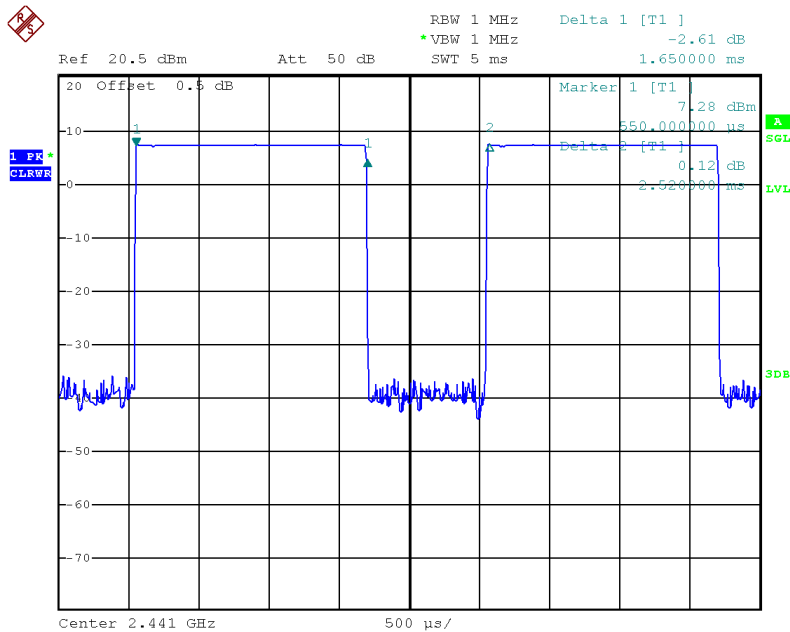

Date: 30.OCT.2019 09:50:19




### Transmit time for PACKET Type DH5(GFSK)

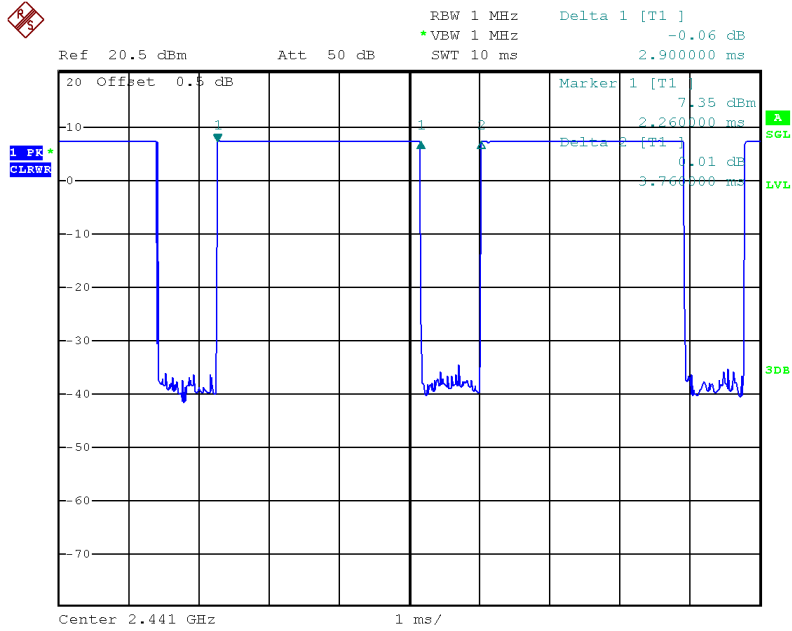

Date: 30.OCT.2019 09:51:08




### Transmit time for PACKET Type 3-DH1(8DPSK)

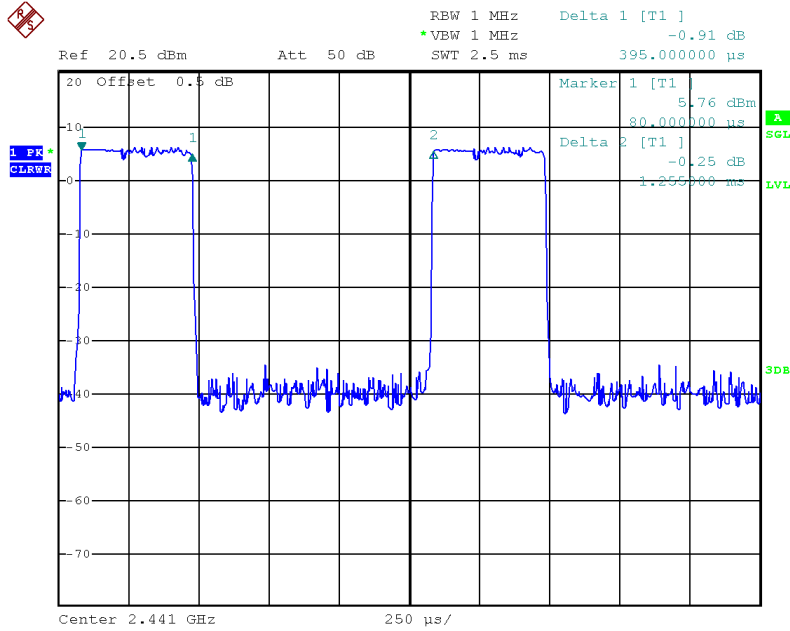


Date: 30.OCT.2019 12:43:17

### Transmit time for PACKET Type 3-DH3(8DPSK)

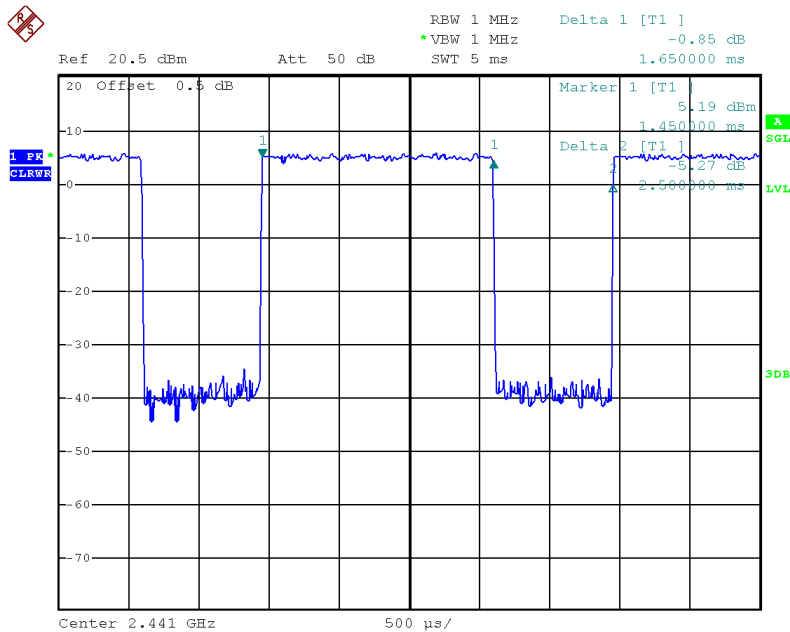

Date: 30.OCT.2019 10:10:55

### Transmit time for PACKET Type 3-DH5(8DPSK)

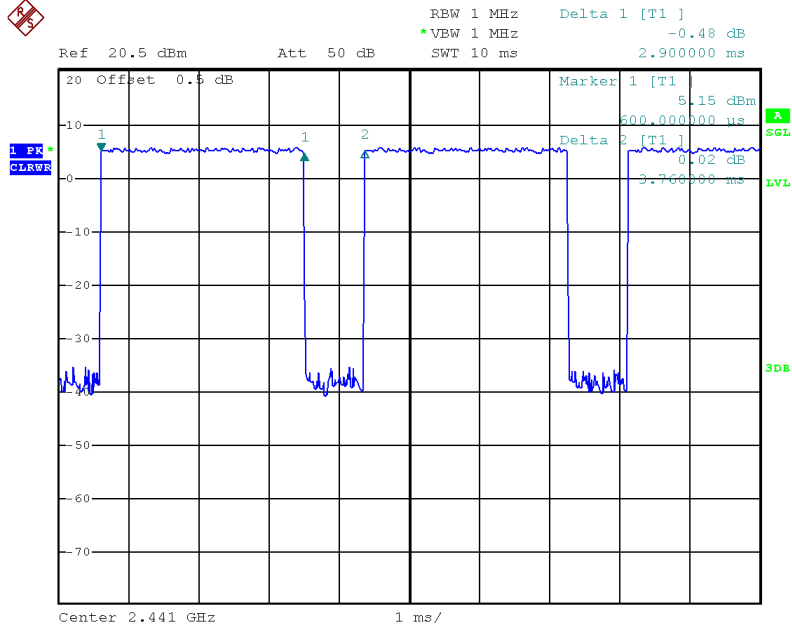

Date: 30.OCT.2019 10:11:50

## 4.5 Maximum peak Conducted Output Power

### Test Procedures(ANSI C63.10-2013 7.8.5)

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = approximately 5 times of the 20 dB bandwidth


RBW > 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Detector function = peak

Trace = max hold

Sweep = auto

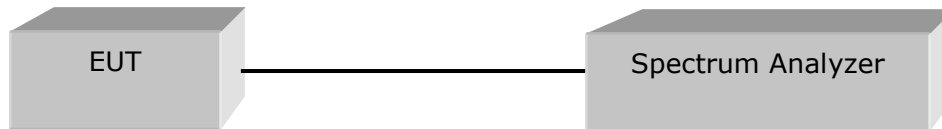

### Limit

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.



## Test Results

Test mode : GFSK

Frequency [MHz]	Channel No.	Output Power [dBm]	Output power [mW]	Result
2 402	0	7.50	5.623	Complies
2 441	39	7.52	5.649	Complies
2 480	78	6.83	4.819	Complies

Test mode :  $\pi/4$  DQPSK

Frequency [MHz]	Channel No.	Output Power [dBm]	Output power [mW]	Result
2 402	0	6.90	4.898	Complies
2 441	39	6.61	4.581	Complies
2 480	78	5.84	3.837	Complies


Test mode : 8DPSK

Frequency [MHz]	Channel No.	Output Power [dBm]	Output power [mW]	Result
2 402	0	6.16	4.130	Complies
2 441	39	6.07	4.046	Complies
2 480	78	5.24	3.342	Complies

See next pages for actual measured spectrum plots.


**Test Mode : GFSK**

[Lowest channel]

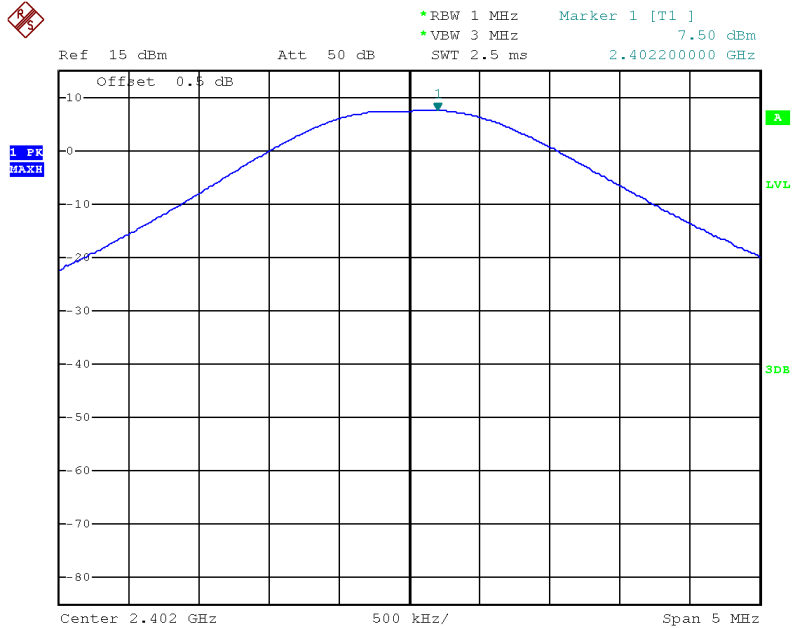

Date: 30.OCT.2019 08:42:50

[Middle channel]

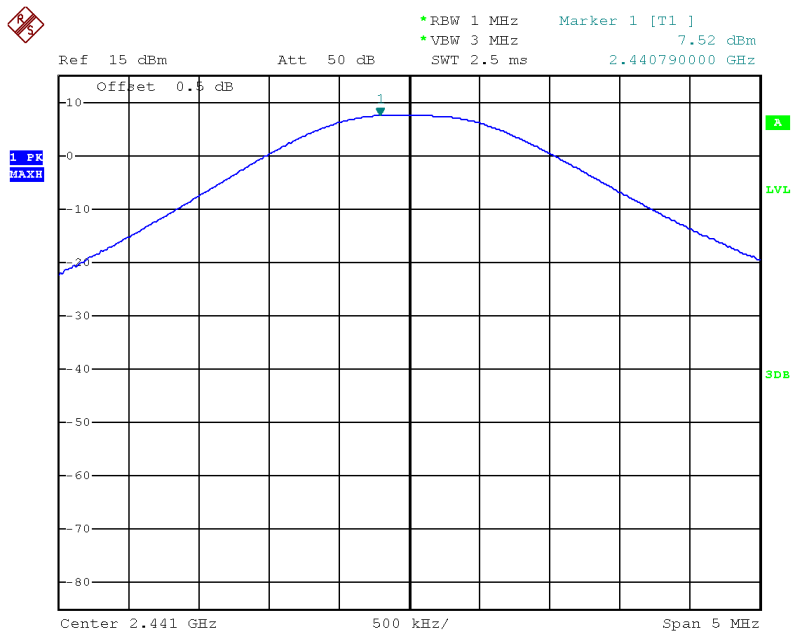


Date: 30.OCT.2019 08:44:41



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (30) / (73) Pages


[Highest channel]

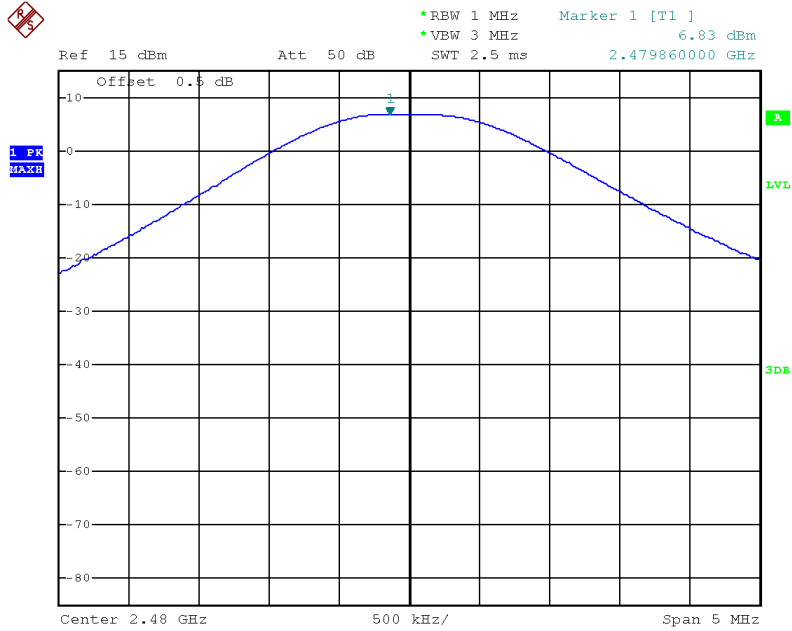

Date: 30.OCT.2019 08:46:35


**Test Mode :  $\pi/4$  DQPSK**

[Lowest channel]

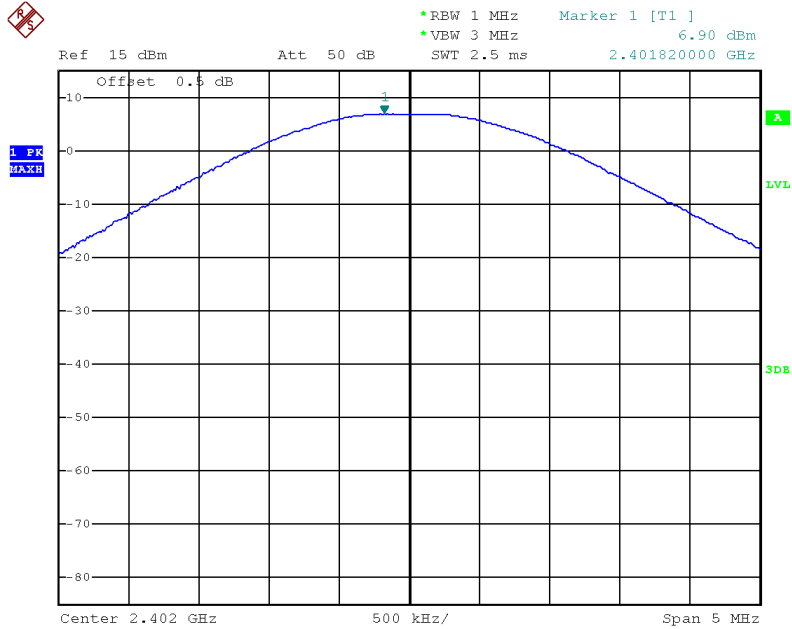

Date: 30.OCT.2019 08:48:28

[Middle channel]

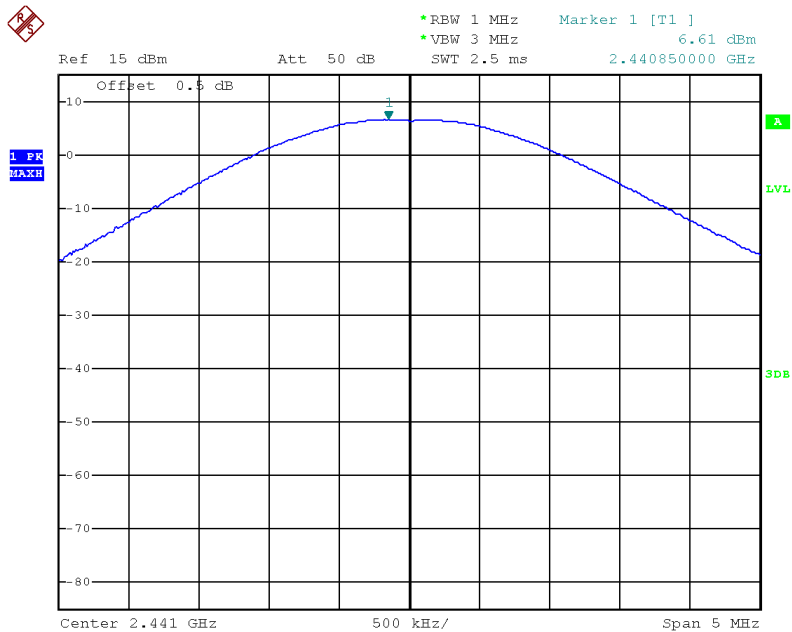


Date: 30.OCT.2019 08:49:08



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (32) / (73) Pages

[Highest channel]

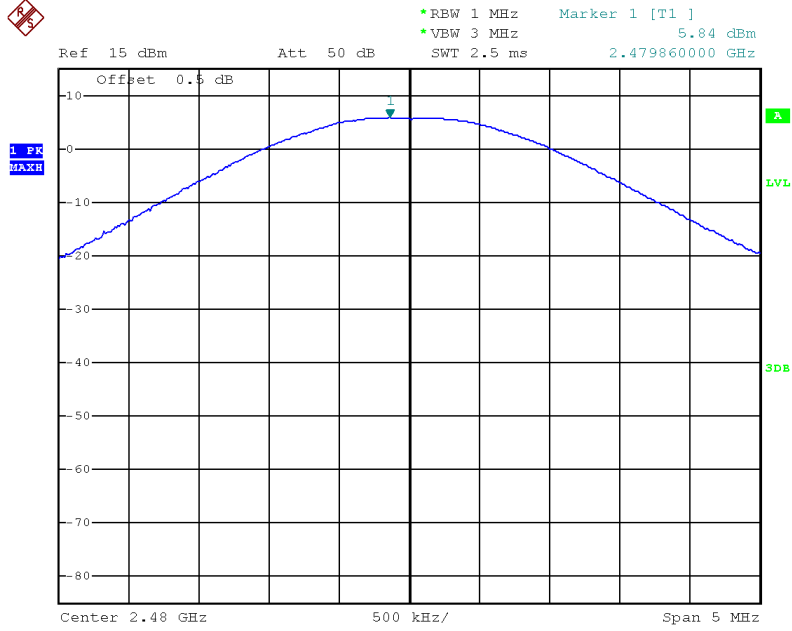


Date: 30.OCT.2019 08:49:42




**Test Mode : 8DPSK**

[Lowest channel]

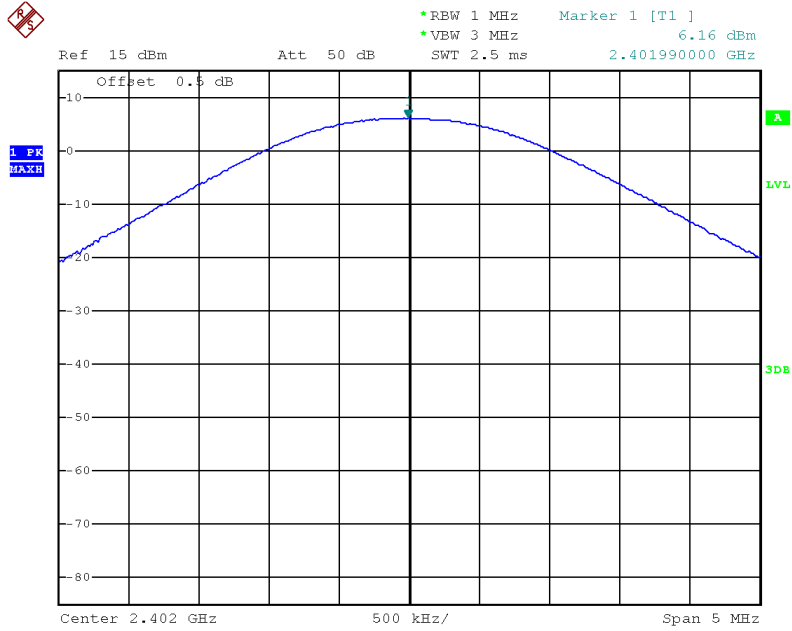

Date: 30.OCT.2019 09:52:33

[Middle channel]

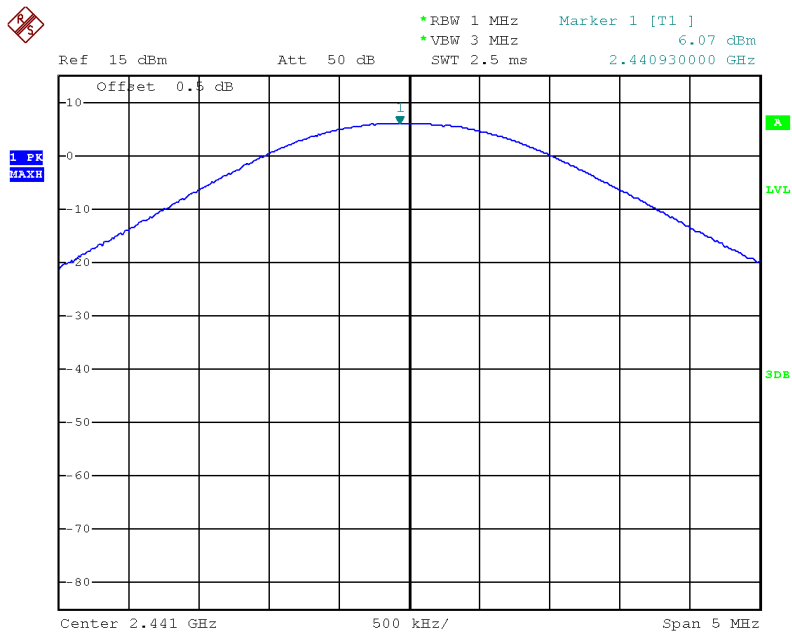


Date: 30.OCT.2019 09:54:13



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (34) / (73) Pages

[Highest channel]

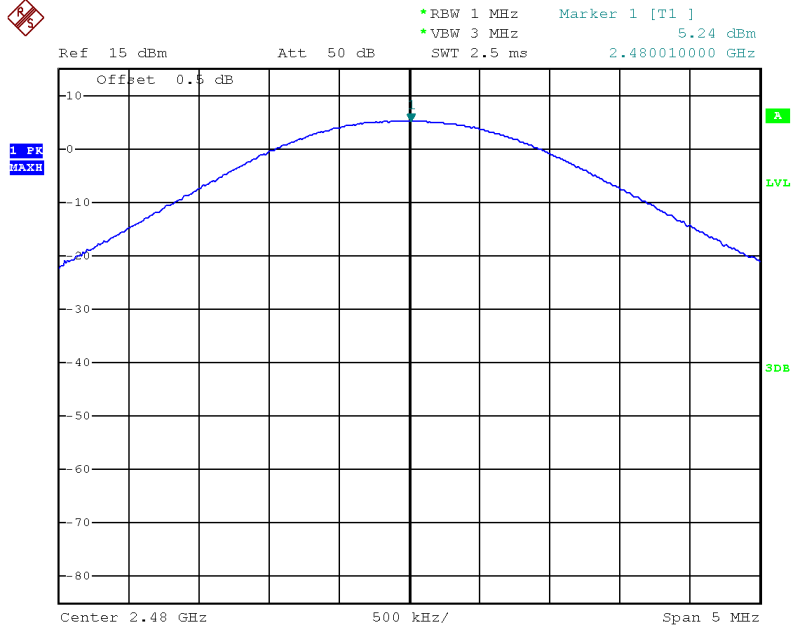

Date: 30.OCT.2019 09:56:38



## 4.6 Unwanted Emissions (Conducted)

### Test Procedures(ANSI C63.10-2013 7.8.6 / ANSI C63.10-2013 7.8.8)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

RBW : 100 kHz


VBW : 300 kHz

Span : 30 MHz to 10 times the operating frequency in GHz

Detector function = peak

Trace : max hold

Sweep = auto

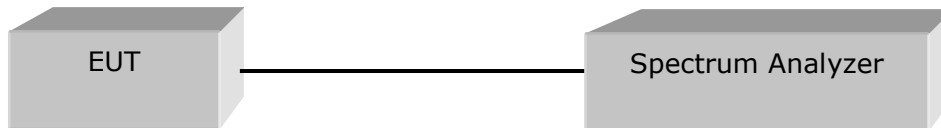

### Limit

> 20 dBc

### Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the in-band spectral density. Therefore the applying equipment meets the requirement.


See next pages for actual measured spectrum plots.

## Band Edge

Test Mode : Hopping mode, GFSK




Date: 30.OCT.2019 08:53:30

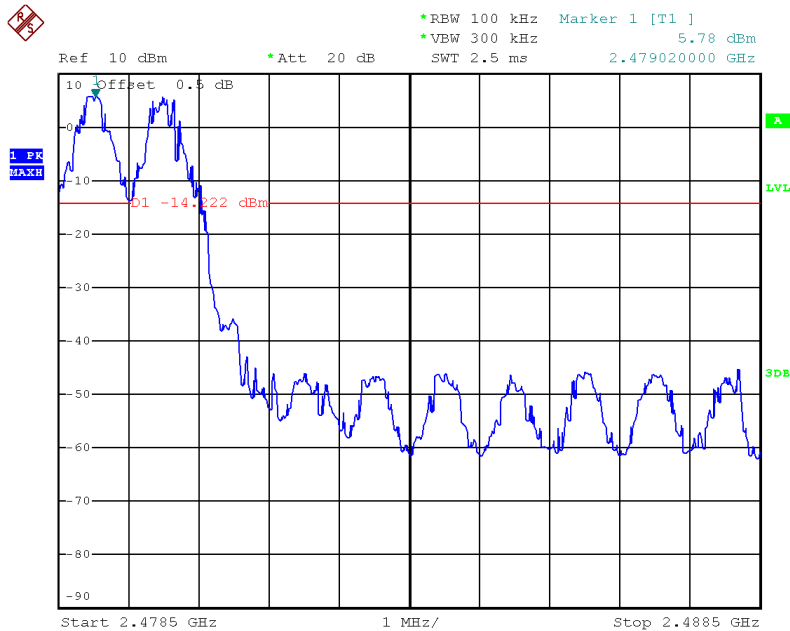

Date: 30.OCT.2019 08:53:46

Test Mode : Hopping mode, 8DPSK

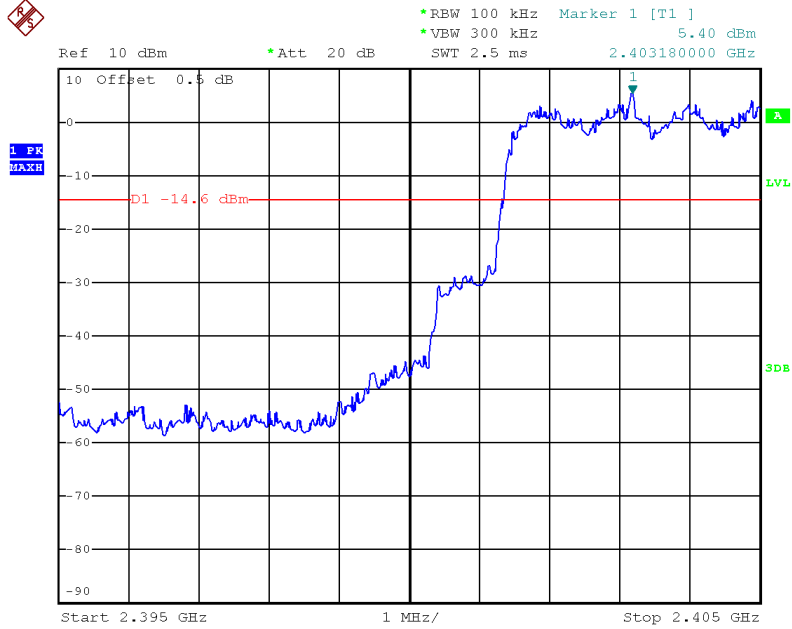


Date: 30.OCT.2019 10:05:46




Date: 30.OCT.2019 10:06:46

Test Mode : Non-Hopping mode, GFSK

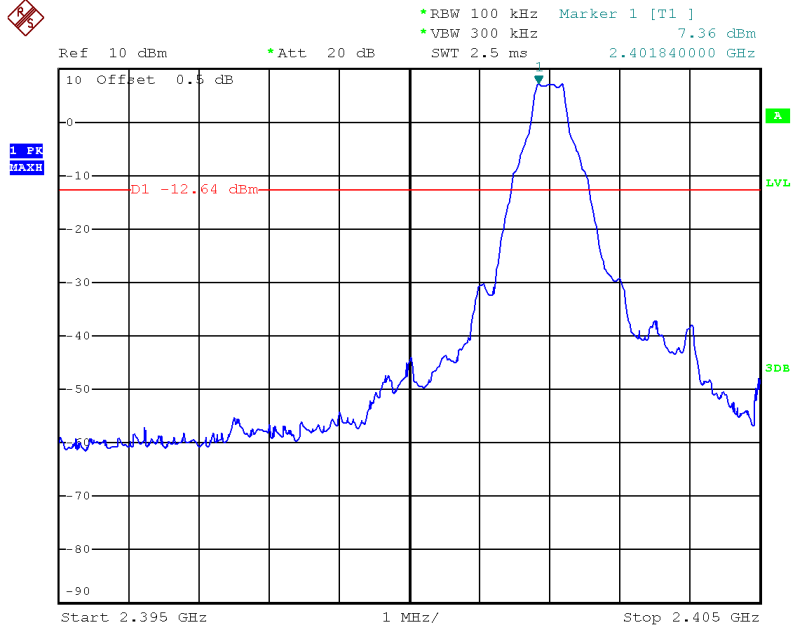


Date: 30.OCT.2019 08:43:35

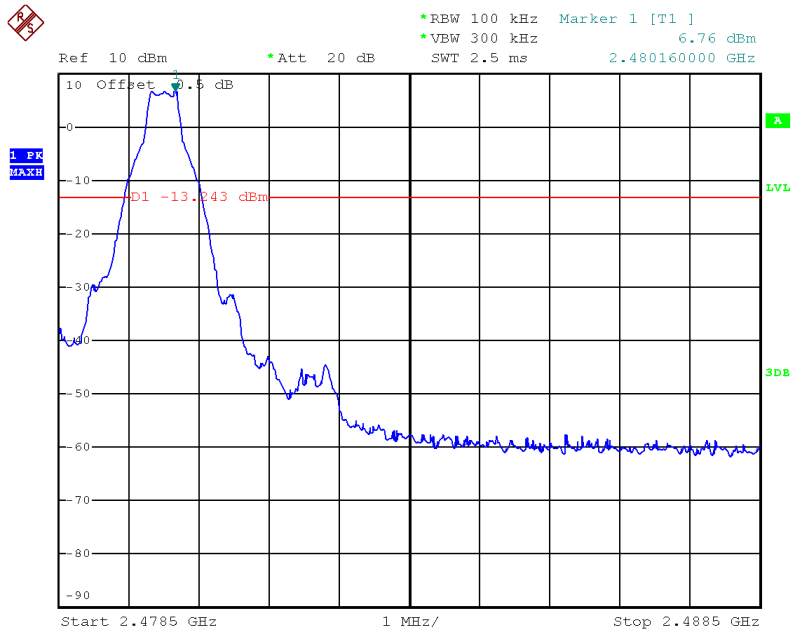


Date: 30.OCT.2019 08:47:19

Test Mode : Non-Hopping mode, 8DPSK

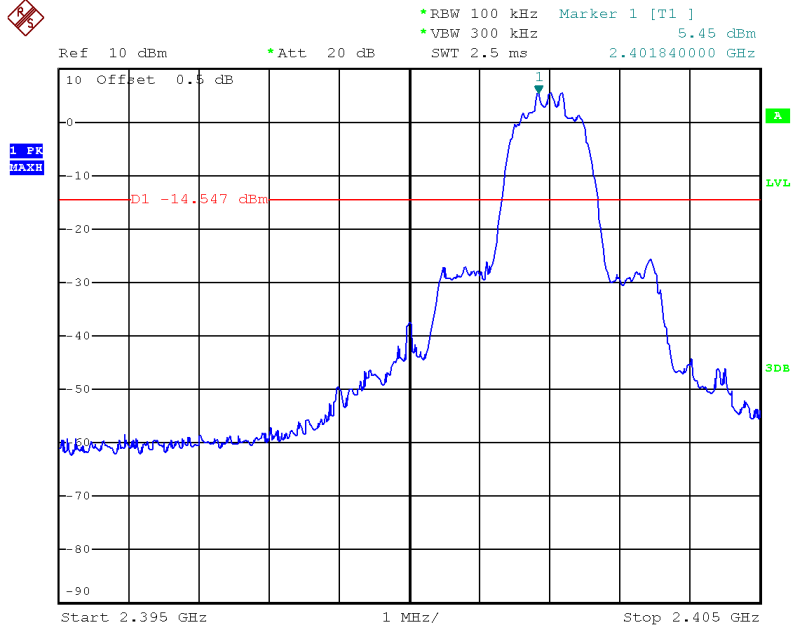

Date: 30.OCT.2019 09:53:17

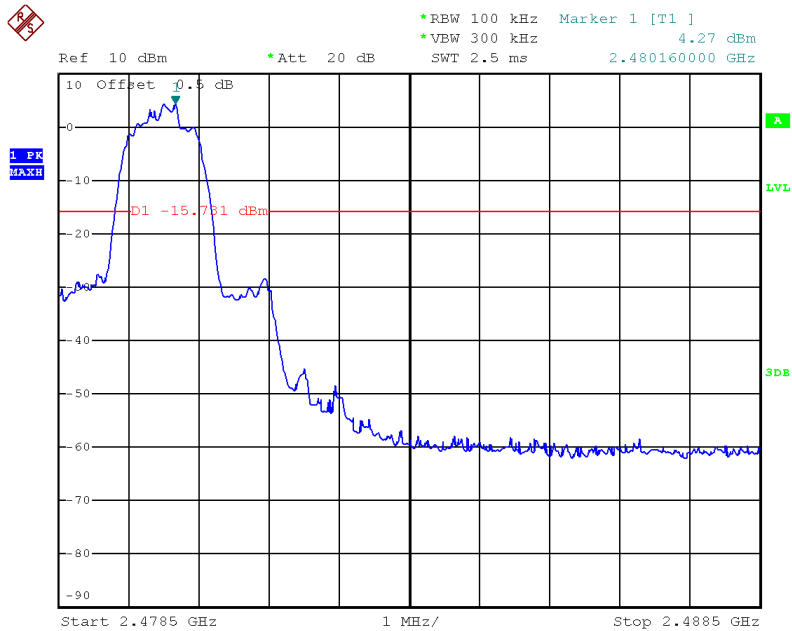


Date: 30.OCT.2019 09:57:22


## Spurious Emission

Test Mode : GFSK

[Lowest channel]

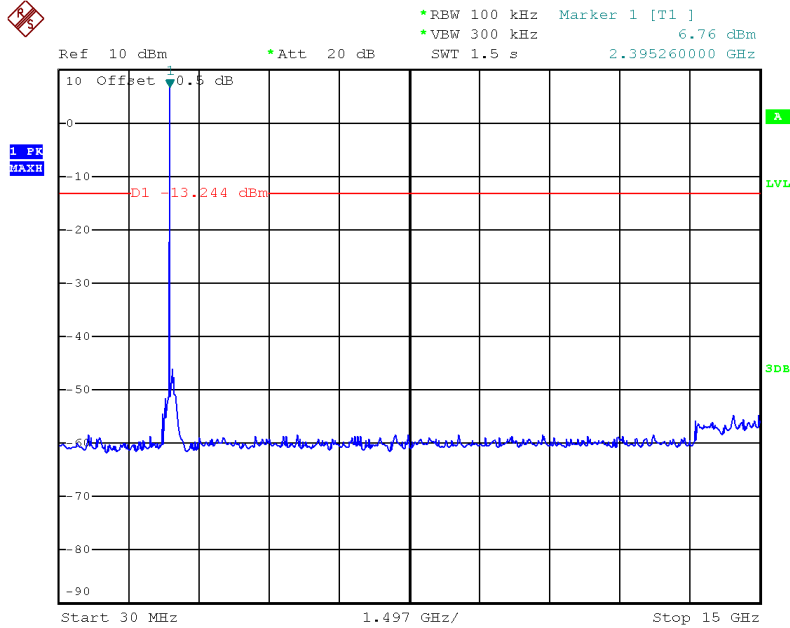


Date: 30.OCT.2019 08:43:51

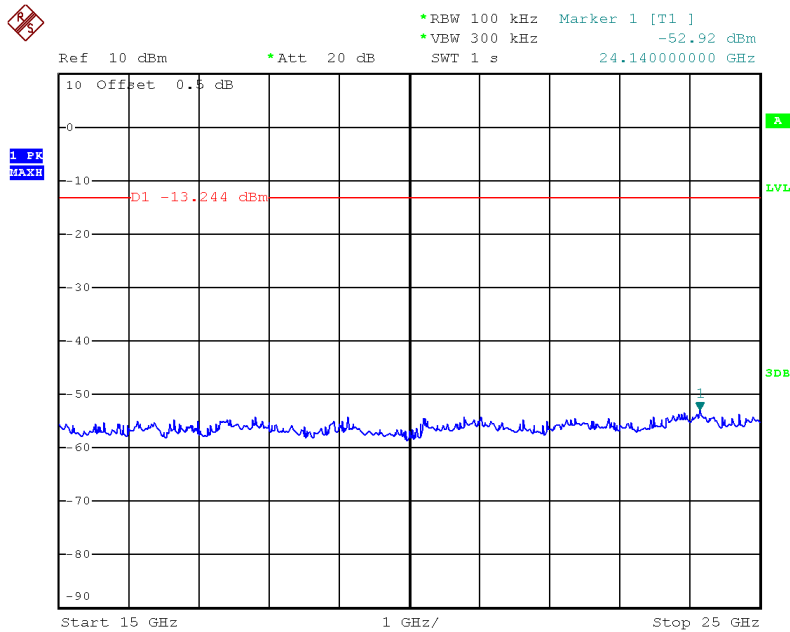


Date: 30.OCT.2019 08:44:05



[Middle Channel]

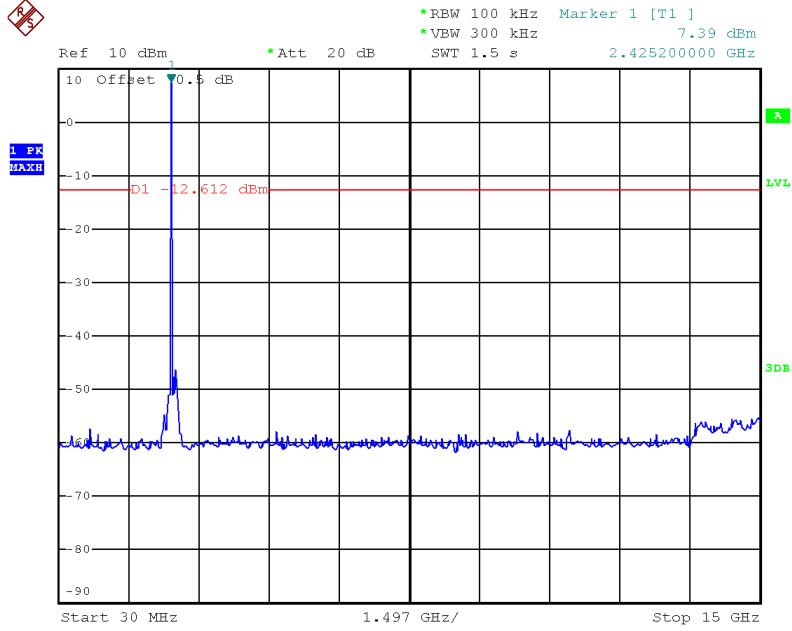


Date: 30.OCT.2019 08:45:26

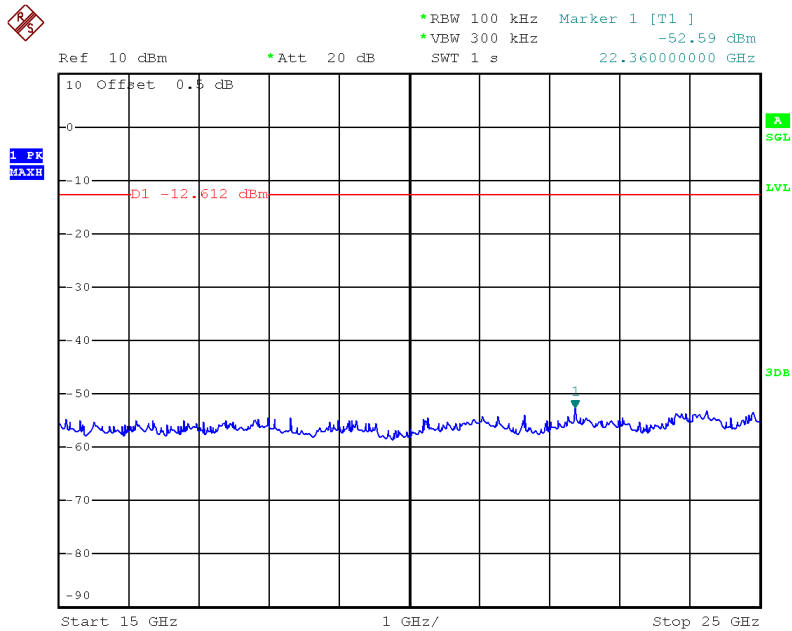


Date: 30.OCT.2019 08:45:40

[Highest channel]

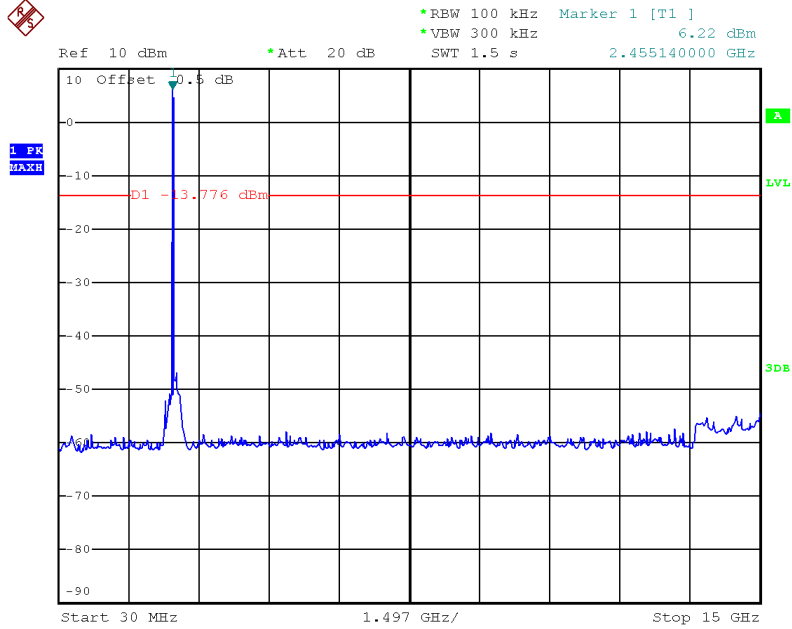


Date: 30.OCT.2019 08:47:36

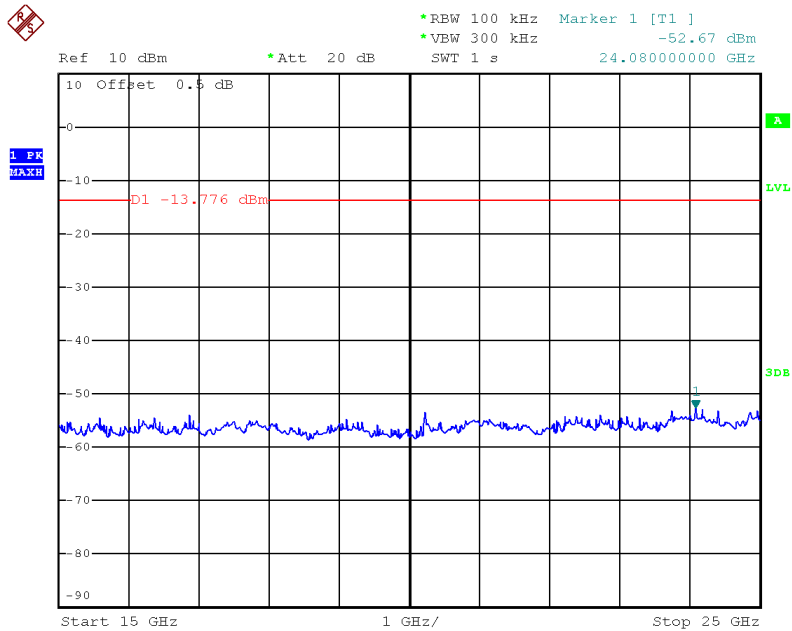


Date: 30.OCT.2019 08:47:50

**Test Mode : 8DPSK**

[Lowest channel]

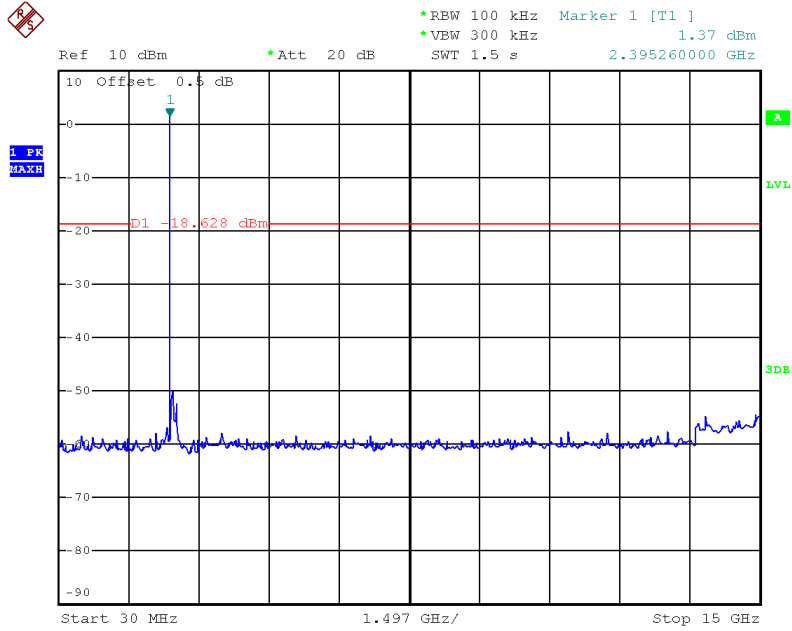


Date: 30.OCT.2019 09:53:33

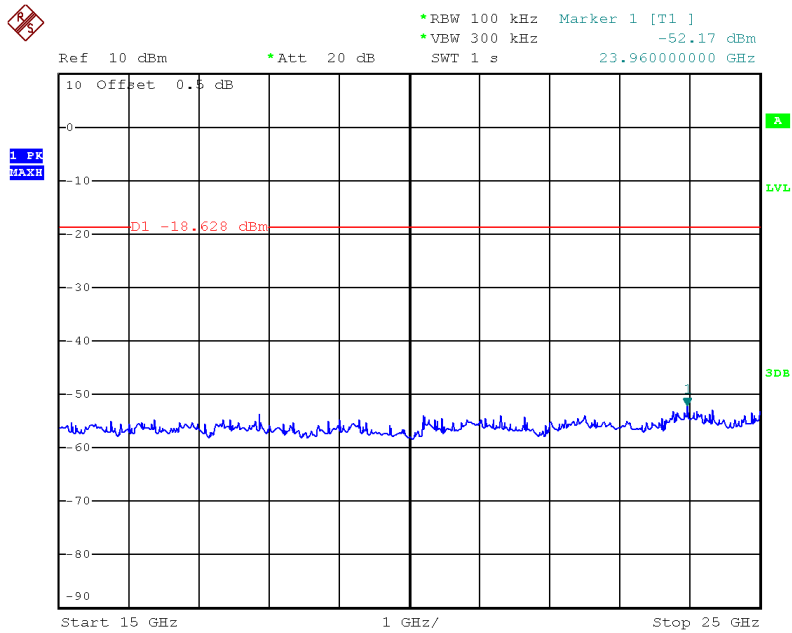


Date: 30.OCT.2019 09:53:47

[Middle Channel]

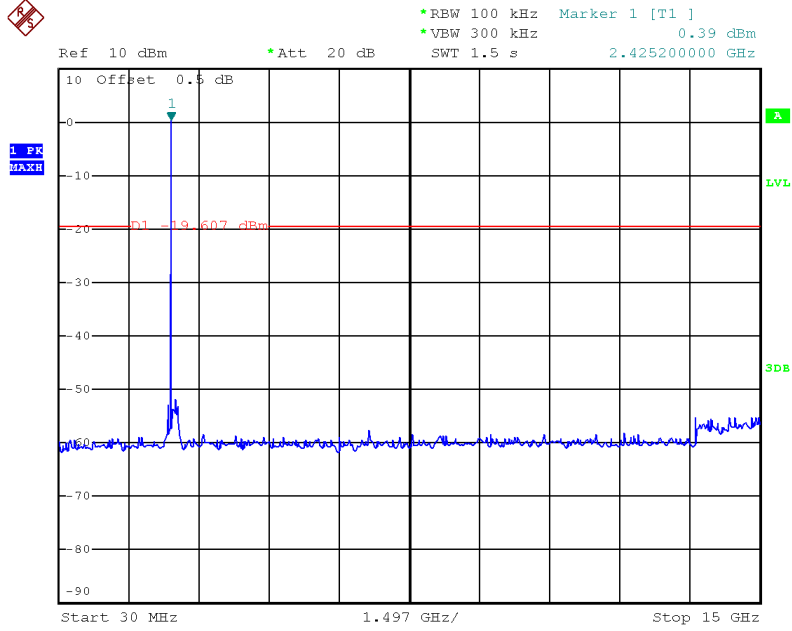


Date: 30.OCT.2019 09:54:58

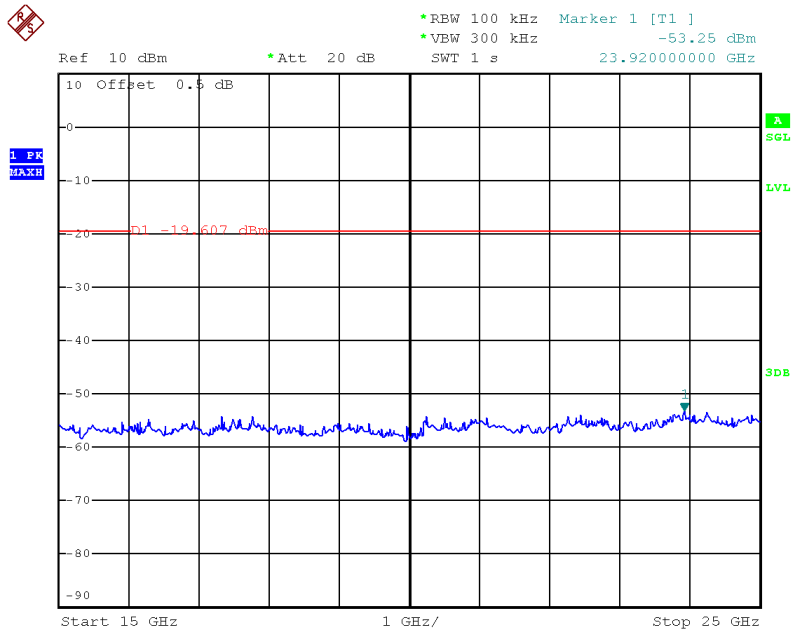


Date: 30.OCT.2019 09:55:12

[Highest channel]

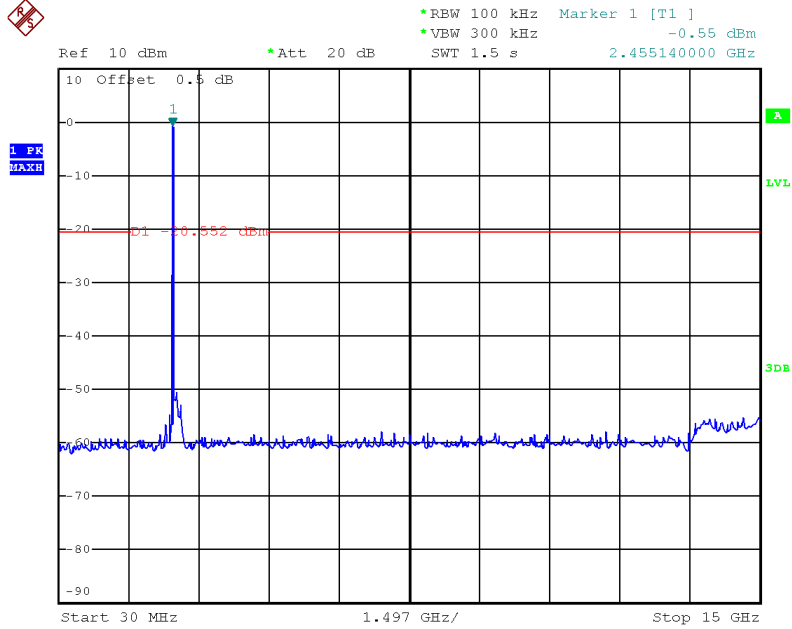

Date: 30.OCT.2019 09:57:38

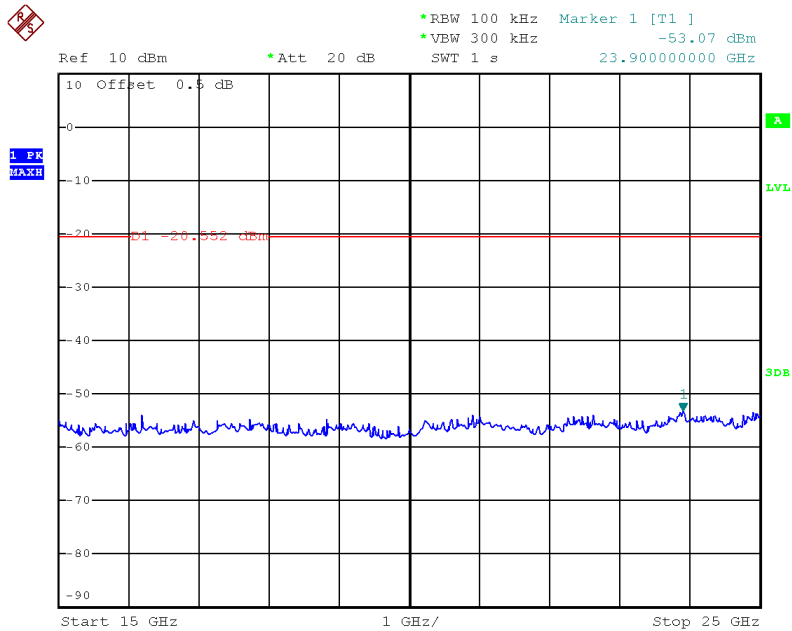

Date: 30.OCT.2019 09:57:52



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (46) / (73) Pages

## 4.7 Radiated Emission

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)
- 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Instrument Settings

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz
- b) VBW  $\geq$  RBW
- c) Sweep time = auto couple



**Limit :**

Unwanted emissions that do not fall within the restricted frequency bands of Table 1 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

**Table 1. Restricted Frequency Bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 2. General Field Strength Limits for Licence-Exempt Transmitters**

Frequency(MHz)	Field Strength $\mu\text{V}/\text{m}$	Field Strength $\text{dB}\mu\text{V}/\text{m}$	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.


Note :

- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54  $\text{dB}\mu\text{V}/\text{m}@3\text{m}$  (AV) and 74  $\text{dB}\mu\text{V}/\text{m}@3\text{m}$  (PK)




### Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

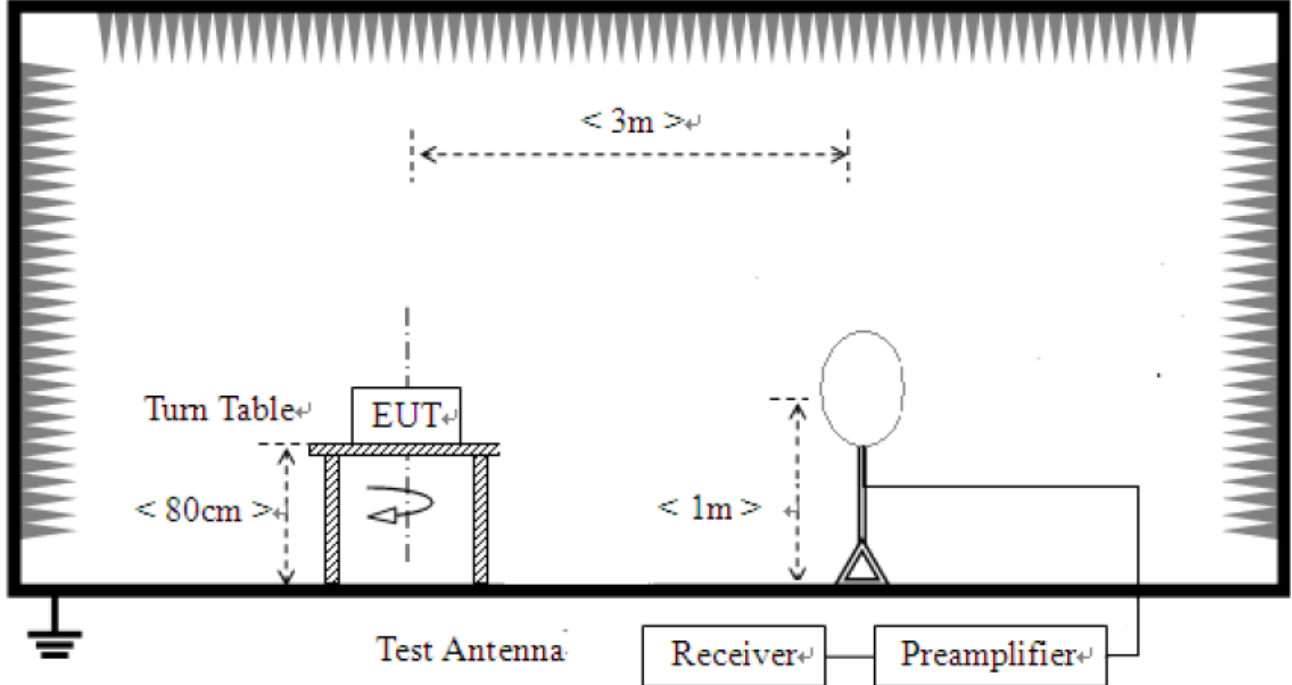

2) For field strength of emissions from 30 MHz to 1 GHz

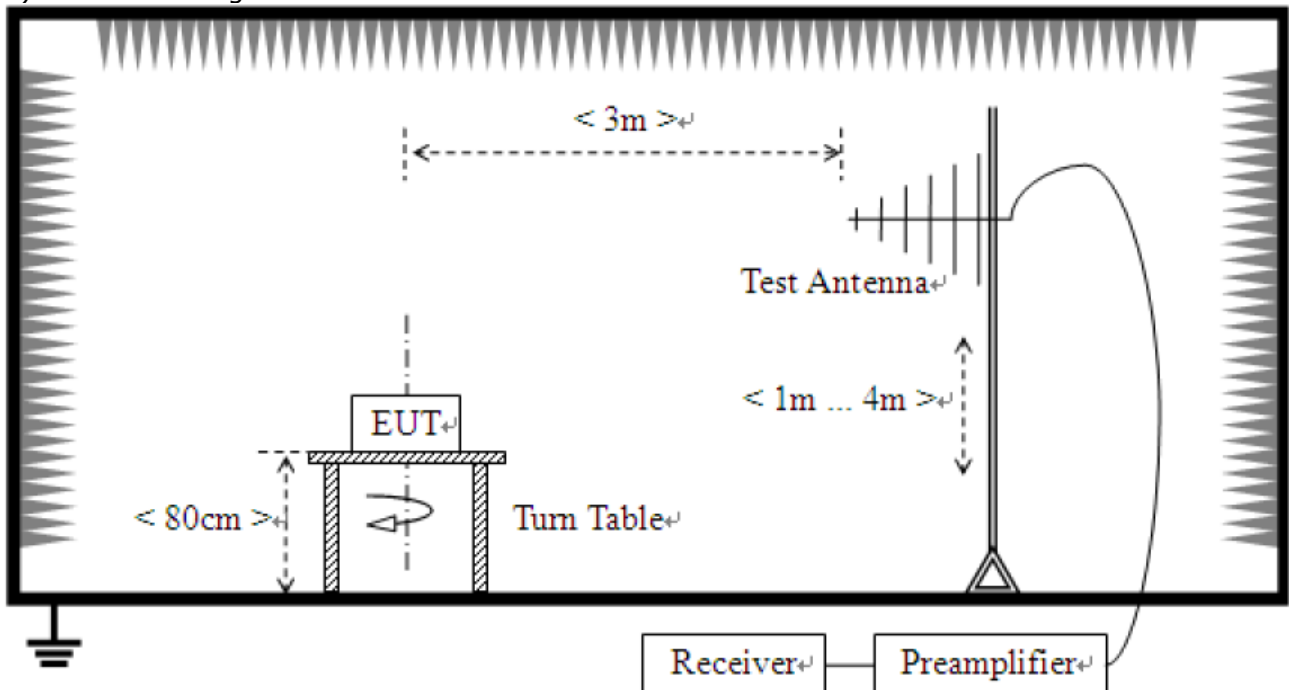

3) For field strength of emissions above 1 GHz

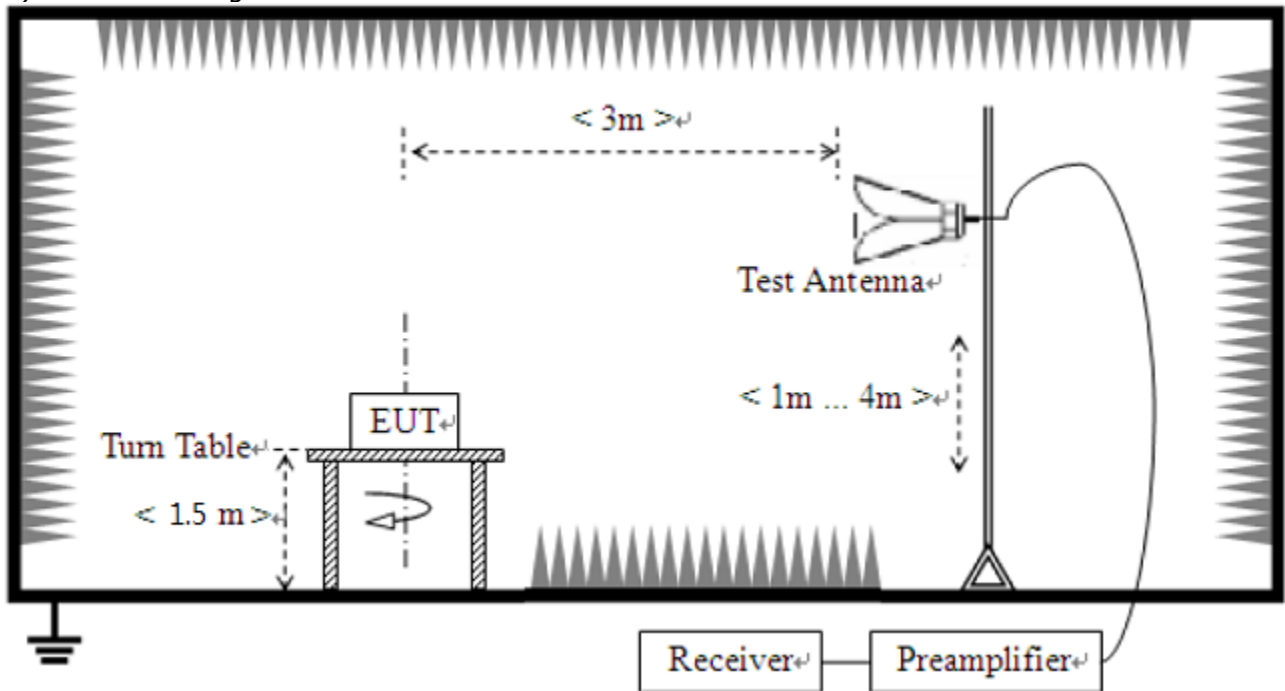

## Test results


### 1) 9 kHz to 30 MHz

The requirements are:

Complies

## Test Data

**Test mode : Basic model(Worst case), GFSK, Highest Channel(Worst case)**

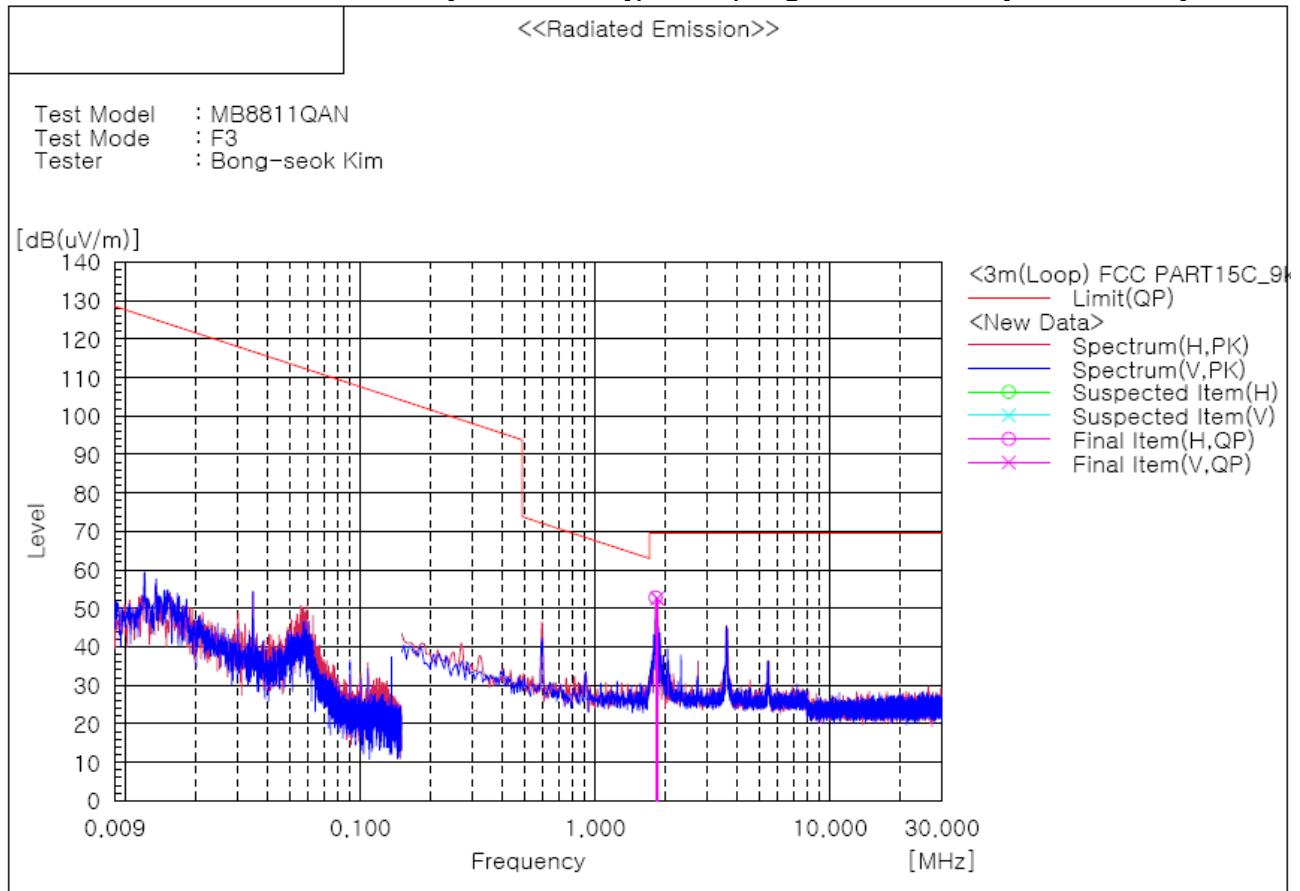


Frequency [MHz]	Reading* [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit @3m [dBuV/m]	Margin [dB]	Detector
1.810	27.6	25.2	<b>52.8</b>	69.5	16.7	Quasi peak

### Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.

**Test mode : Basic model(Worst case), 8DPSK, Lowest Channel(Worst case)**

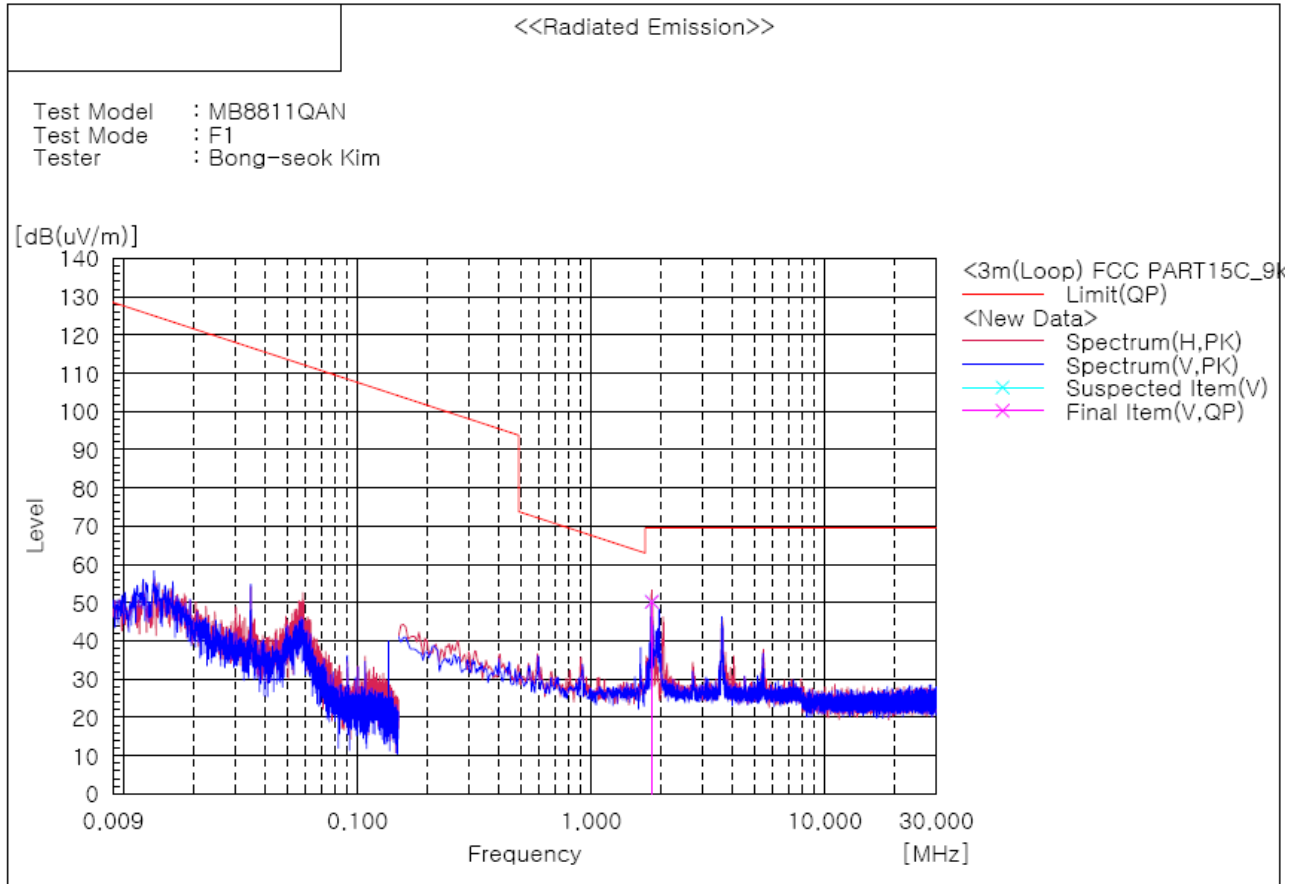

Frequency [MHz]	Reading* [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit @3m [dBuV/m]	Margin [dB]	Detector
1.822	28.1	25.2	<b>53.3</b>	69.5	16.2	Quasi peak

**Remark :**

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.


## 2) 30 MHz to 1 GHz

**Test mode : Basic model, GFSK, Lowest channel(Worst case)**

The requirements are:

Complies

### Test Data

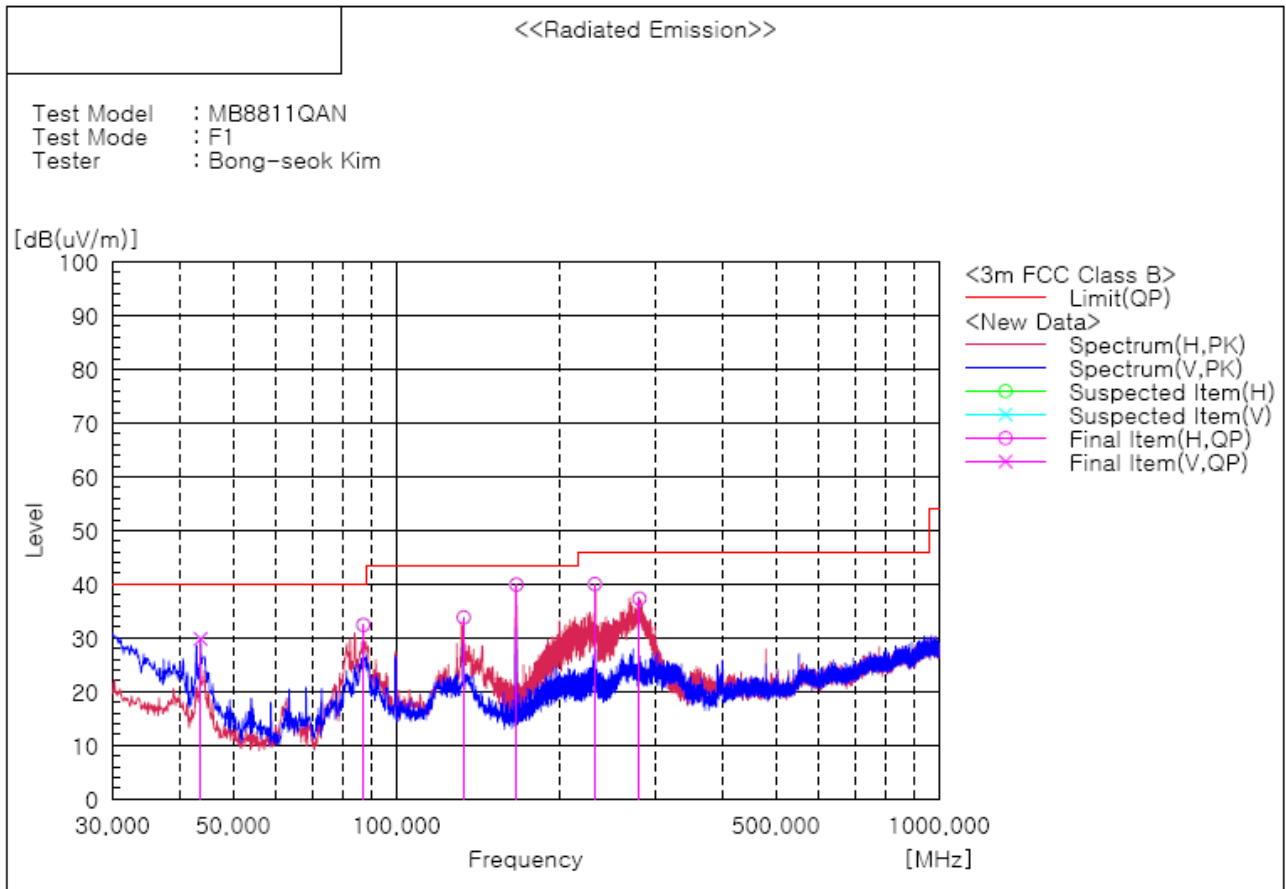

#### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	43.580	V	42.7	-12.9	29.8	40.0	10.2	101.0	304.0
2	86.988	H	47.5	-15.1	32.4	40.0	7.6	308.0	323.0
3	133.184	H	45.2	-11.4	33.8	43.5	9.7	208.0	278.0
4	166.528	H	52.6	-12.7	39.9	43.5	3.6	208.0	54.0
5	232.366	H	51.8	-11.8	40.0	46.0	6.0	208.0	37.0
6	280.624	H	46.3	-9.0	37.3	46.0	8.7	100.0	290.0

#### Remark :


1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**Test mode : Basic model, 8DPSK, Highest channel(Worst case)**

The requirements are:

Complies

**Test Data**

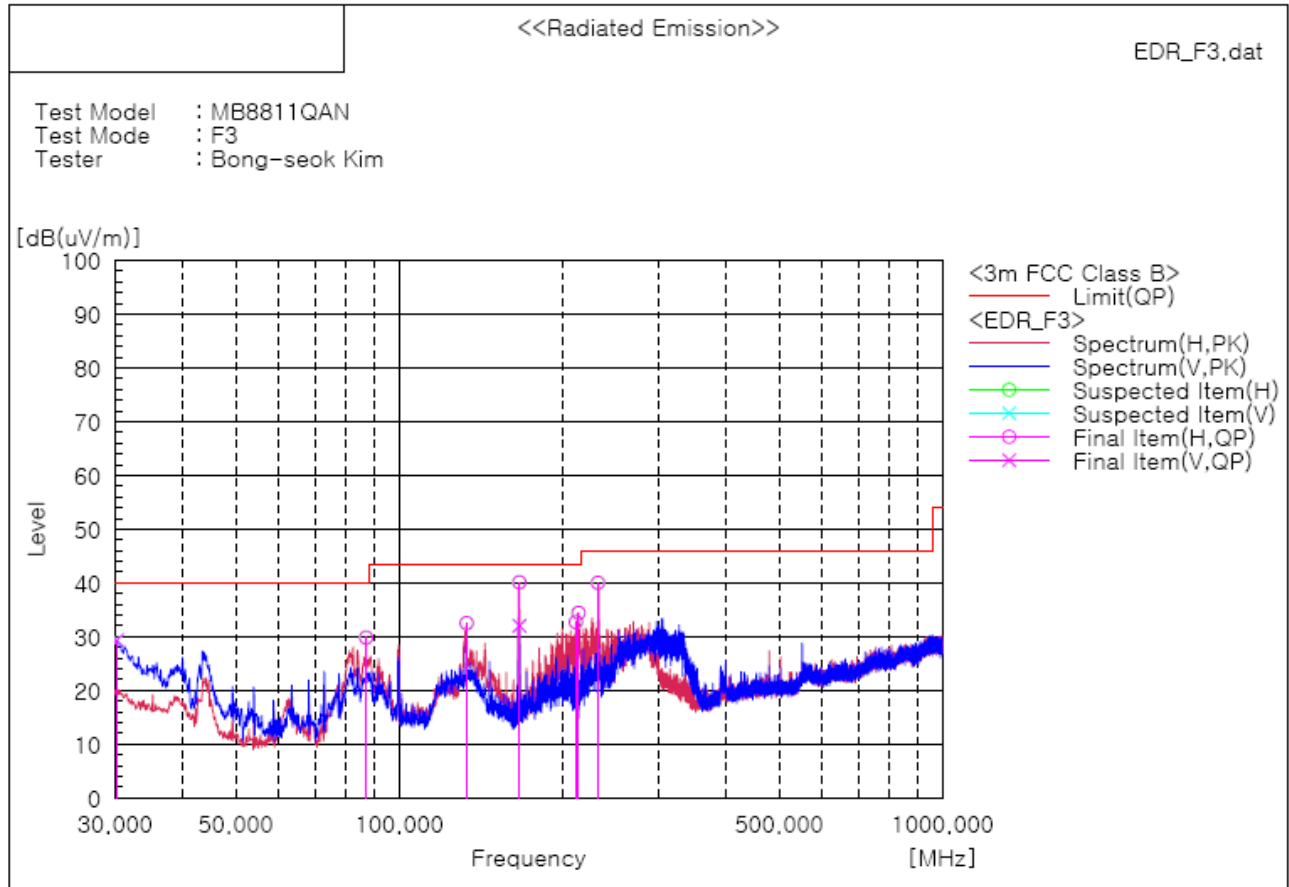

**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.243	V	35.5	-6.2	29.3	40.0	10.7	100.0	356.0
2	86.988	H	44.9	-15.1	29.8	40.0	10.2	306.0	8.0
3	133.184	H	43.9	-11.4	32.5	43.5	11.0	206.0	311.0
4	166.528	H	52.8	-12.7	40.1	43.5	3.4	206.0	50.0
5	166.528	V	44.7	-12.7	32.0	43.5	11.5	100.0	238.0
6	211.633	H	46.0	-13.3	32.7	43.5	10.8	101.0	291.0
7	214.058	H	47.7	-13.3	34.4	43.5	9.1	101.0	291.0
8	232.366	H	51.8	-11.8	40.0	46.0	6.0	206.0	36.0

**Remark :**


1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**Test mode : Variant model, GFSK, Lowest channel(Worst case)**

The requirements are:

Complies

**Test Data**

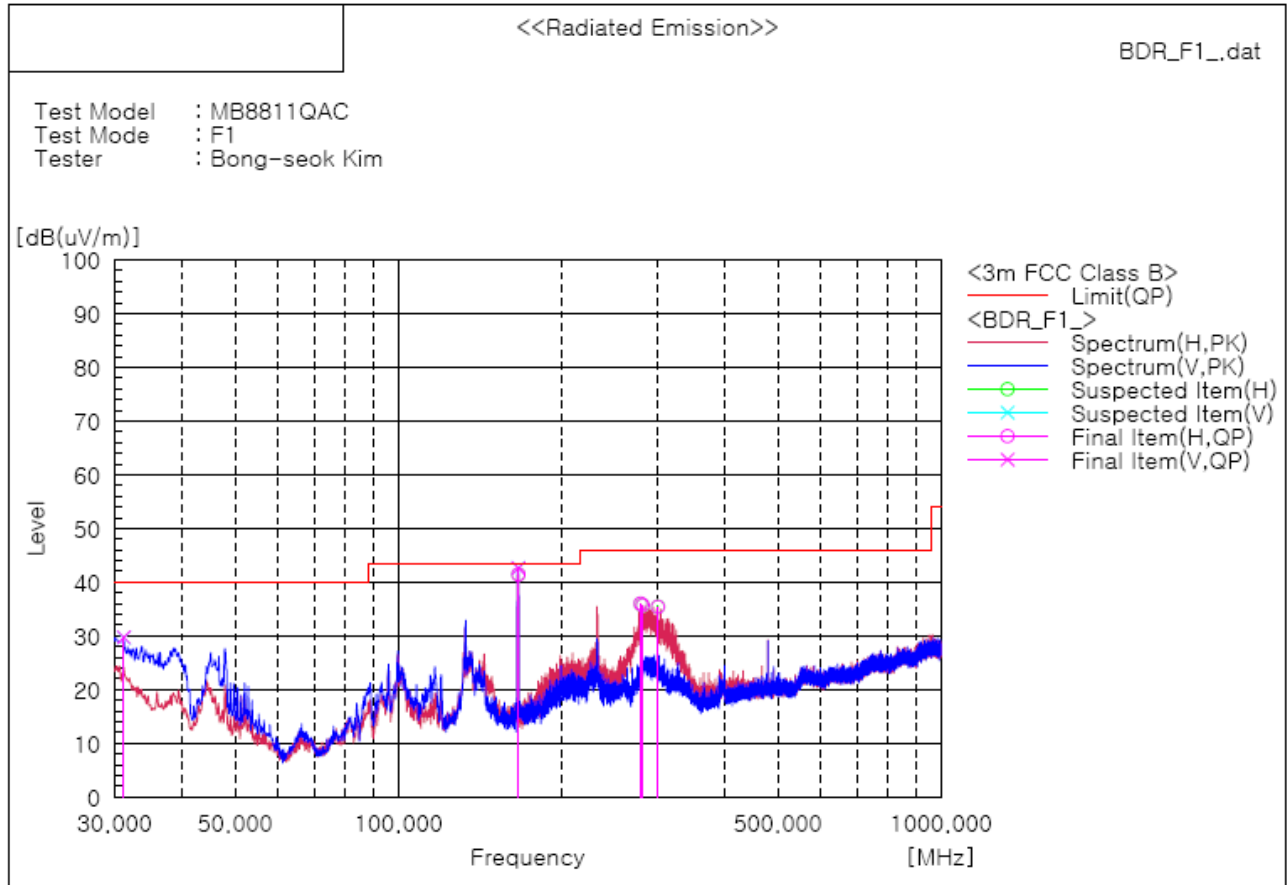

**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	31.213	V	36.5	-6.8	29.7	40.0	10.3	101.0	281.0
2	166.528	V	55.3	-12.7	42.6	43.5	0.9	101.0	324.0
3	166.528	H	54.1	-12.7	41.4	43.5	2.1	305.0	37.0
4	279.654	H	45.0	-9.0	36.0	46.0	10.0	101.0	155.0
5	282.079	H	44.6	-8.9	35.7	46.0	10.3	101.0	155.0
6	300.994	H	43.8	-8.4	35.4	46.0	10.6	101.0	148.0

**Remark :**


1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**Test mode : Variant model, 8DPSK, Lowest channel(Worst case)**

The requirements are:

Complies

**Test Data**

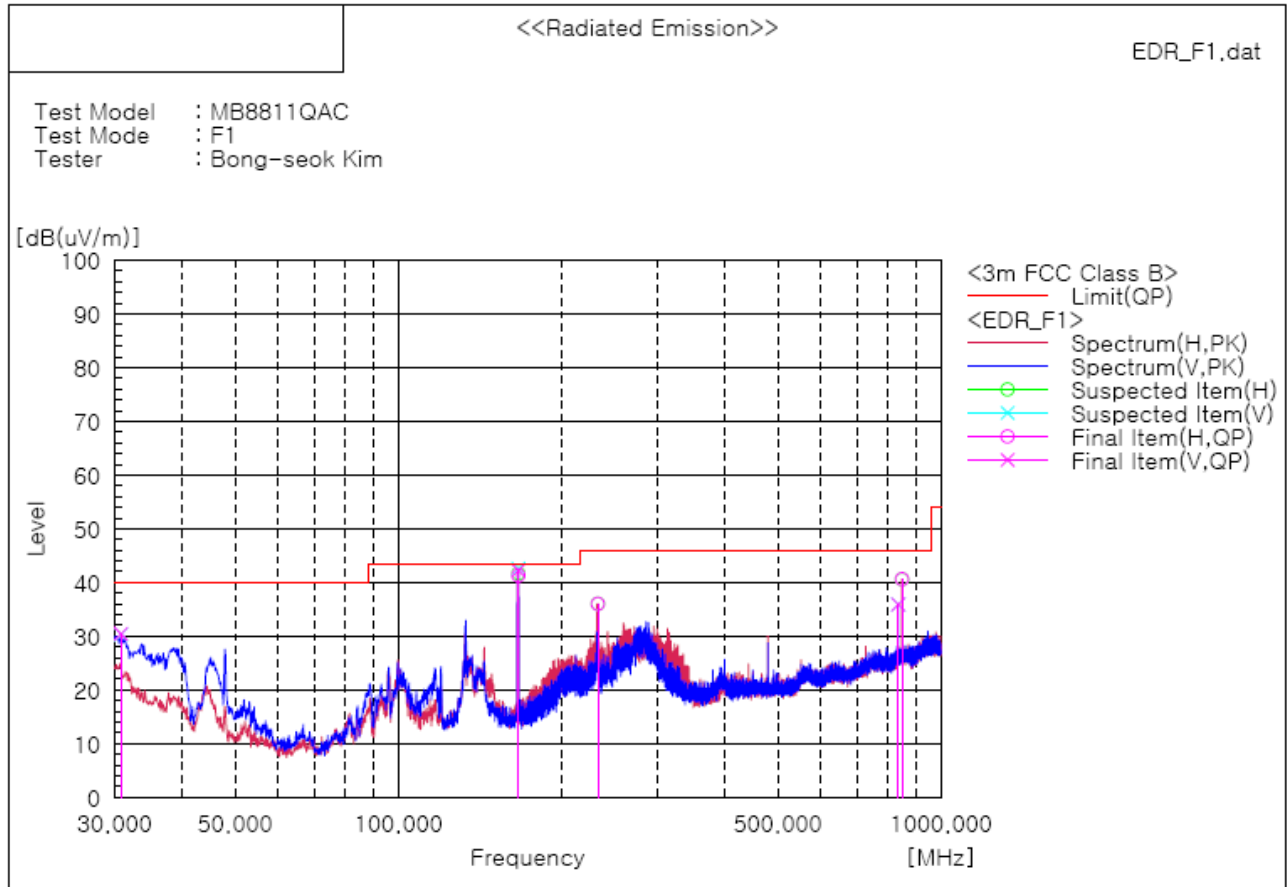

**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.849	V	36.9	-6.5	30.4	40.0	9.6	100.0	338.0
2	166.528	V	54.9	-12.7	42.2	43.5	1.3	100.0	316.0
3	166.528	H	54.0	-12.7	41.3	43.5	2.2	209.0	181.0
4	233.215	H	47.7	-11.7	36.0	46.0	10.0	100.0	286.0
5	834.373	V	31.7	4.2	35.9	46.0	10.1	100.0	50.0
6	847.953	H	35.9	4.7	40.6	46.0	5.4	100.0	3.0

**Remark :**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain




### 3) above 1 GHz

The requirements are:

Complies

#### Test Data

**Test mode : Basic model, GFSK(Worst case), Lowest Channel(Worst case)**

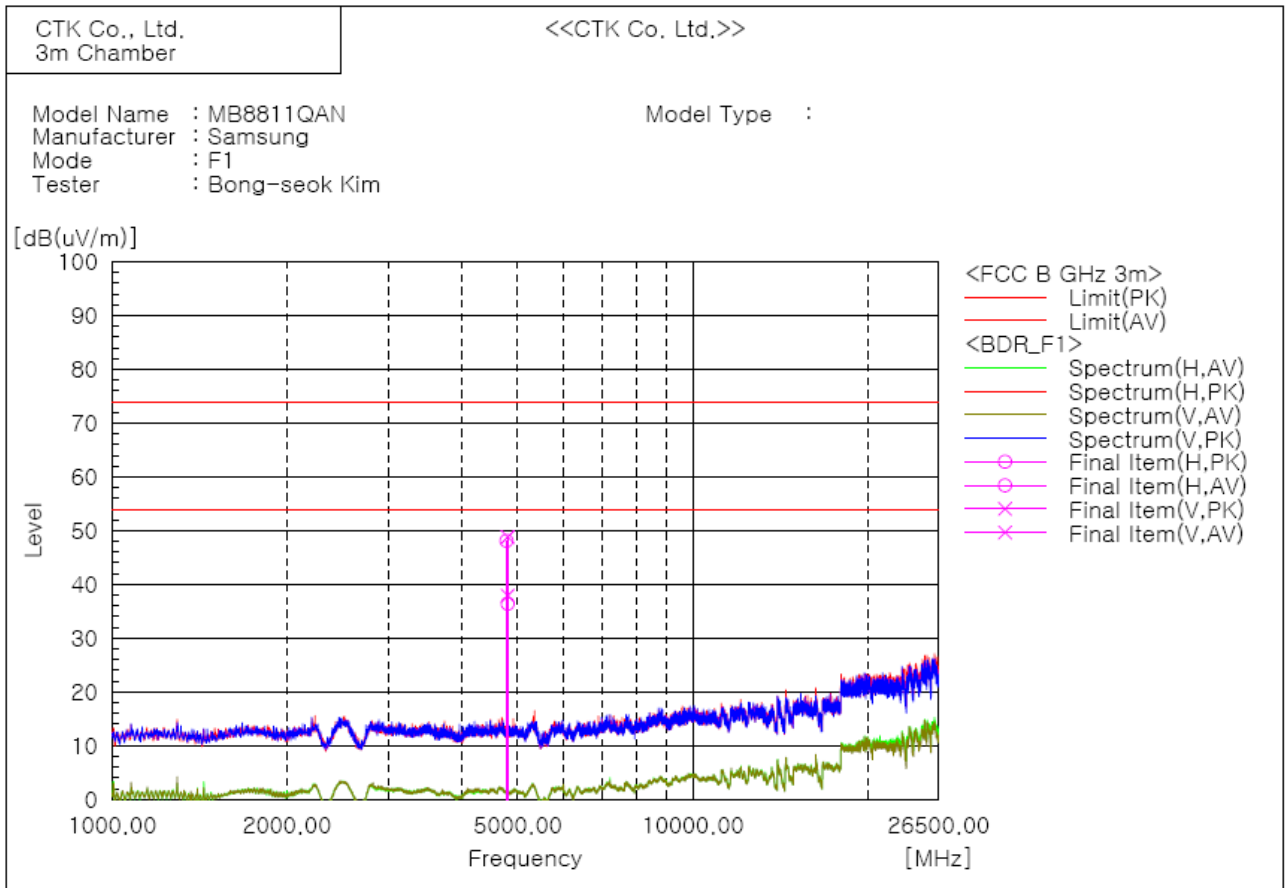


#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	4803.750	V	47.9	37.0	0.9	48.8	37.9	74.0	54.0	25.2	16.1	464.0	344.8	
2	4803.750	V	47.9	37.0	0.9	48.8	37.9	74.0	54.0	25.2	16.1	464.0	344.8	
3	4803.750	H	47.9	37.0	0.9	48.8	37.9	74.0	54.0	25.2	16.1	464.0	344.8	
4	4780.375	H	47.1	36.5	1.0	48.1	36.4	74.0	54.0	25.9	17.6	464.0	268.6	

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**Test mode : Variant model, GFSK, Lowest Channel(Worst case)**

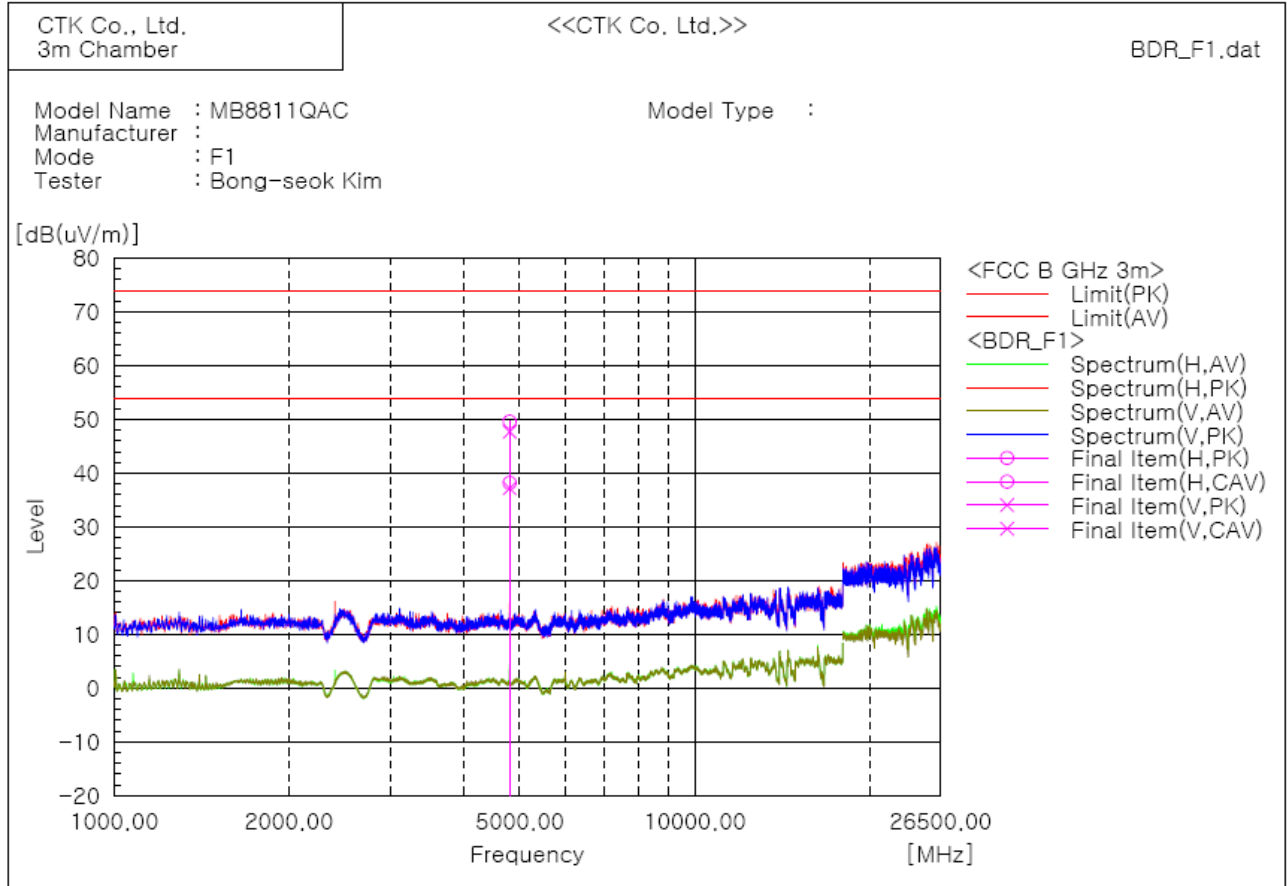


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	4803.750	V	46.8	36.3	0.9	47.7	37.2	74.0	54.0	26.3	16.8	464.0	26.3	
2	4803.750	H	48.7	37.3	0.9	49.6	38.2	74.0	54.0	24.4	15.8	464.0	359.9	
3	4803.750	V	46.8	36.3	0.9	47.7	37.2	74.0	54.0	26.3	16.8	464.0	359.9	
4	4803.750	H	48.7	37.3	0.9	49.6	38.2	74.0	54.0	24.4	15.8	464.0	64.0	

**Remarks**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**Test mode : Variant model, 8DPSK, Lowest Channel(Worst case)**

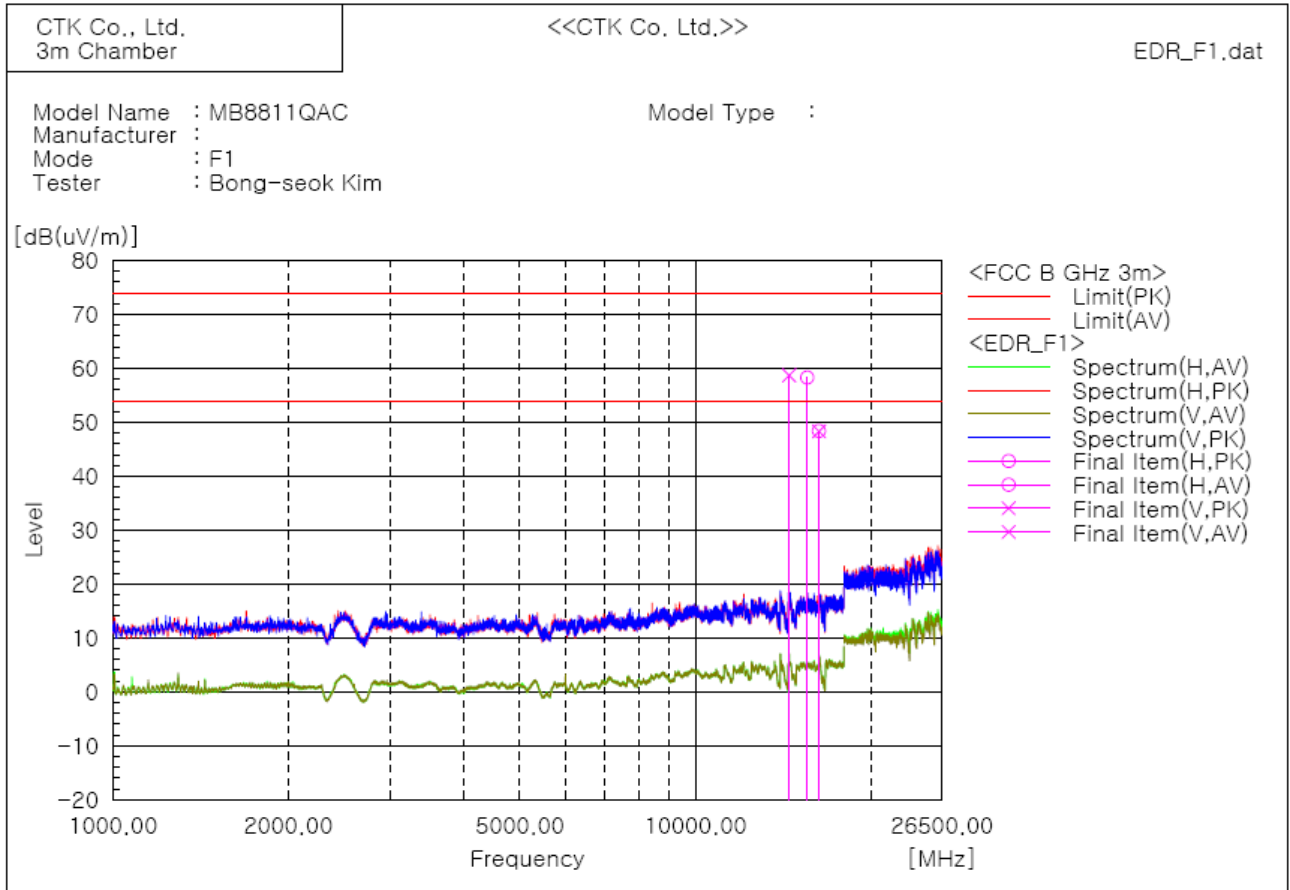

**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	16304.250	V	---	36.7	11.6	---	48.3	74.0	54.0	---	5.7	345.4	0.0	
2	16304.250	H	---	36.8	11.6	---	48.4	74.0	54.0	---	5.6	355.8	0.0	
3	15569.000	H	47.8	---	10.5	58.3	---	74.0	54.0	15.7	---	234.3	59.1	
4	14487.370	V	47.6	---	11.1	58.7	---	74.0	54.0	15.3	---	99.8	64.1	

**Remarks**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

#### 4) Restricted Frequency Bands


The requirements are:

Complies

#### Test Data

**Test mode : Basic model, GFSK**


**Test frequency range : 2 310 MHz – 2 390 MHz**

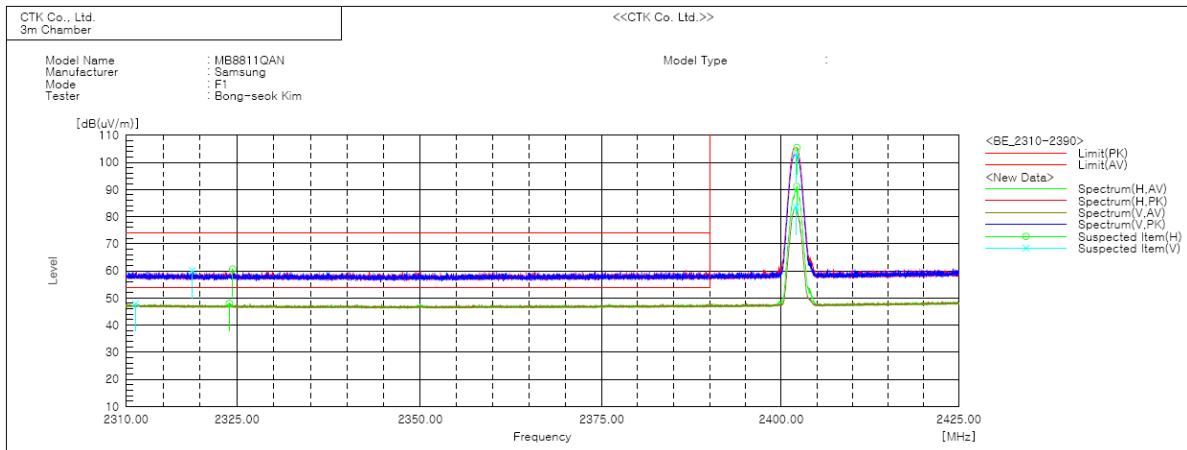

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	2311.308	V	42.8	5.1	---	47.9	---	54.0	---	6.1	225.4	0.0	
2	2323.958	H	43.2	4.8	---	48.0	---	54.0	---	6.0	464.2	0.0	
3	2318.927	V	55.2	4.9	60.1	---	74.0	---	13.9	---	464.2	19.8	
4	2324.418	H	55.8	4.8	60.6	---	74.0	---	13.4	---	99.8	11.9	

**Test frequency range : 2 483.5 MHz – 2 500 MHz**

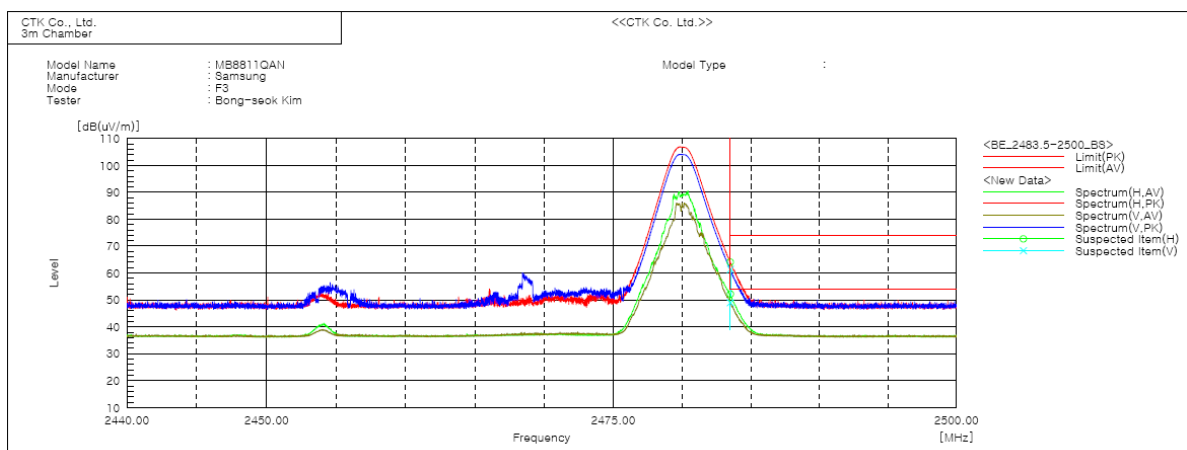


Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	2483.500	V	42.3	6.7	---	49.0	---	54.0	---	5.0	464.2	4.2	
2	2483.508	H	45.5	6.7	---	52.2	---	54.0	---	1.8	99.9	12.5	
3	2483.522	V	54.7	6.7	61.4	---	74.0	---	12.6	---	345.1	207.3	
4	2483.500	H	57.4	6.7	64.1	---	74.0	---	9.9	---	234.1	76.3	

**Test mode : Basic model, 8DPSK**


**Test frequency range : 2 310 MHz – 2 390 MHz**

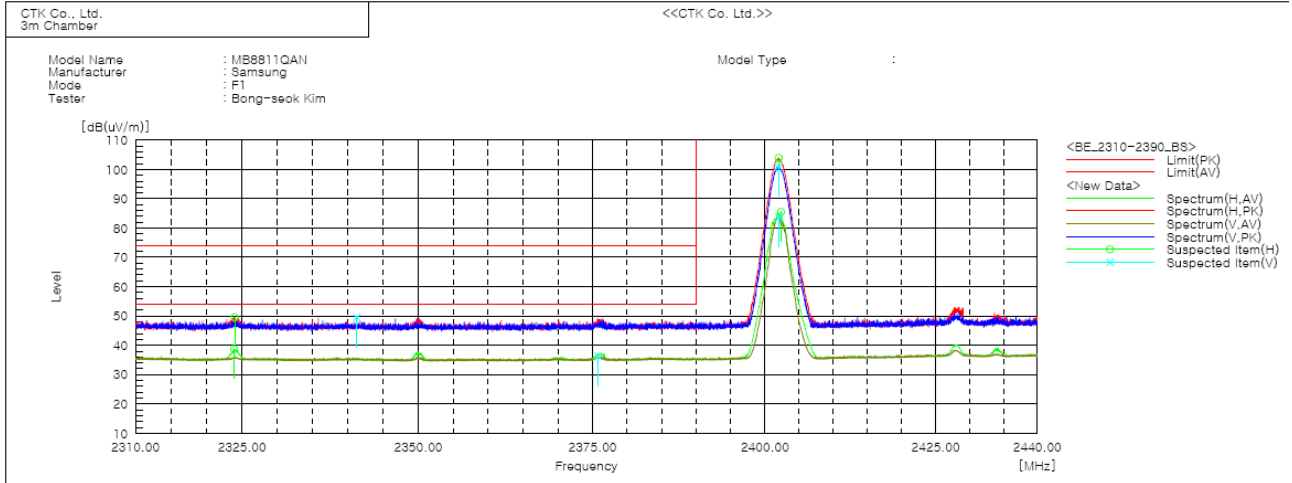

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	2375.780	V	31.5	4.8	---	36.3	---	54.0	---	17.7	464.2	0.1	
2	2323.894	H	33.9	4.8	---	38.7	---	54.0	---	15.3	99.9	0.0	
3	2341.249	V	44.8	4.7	49.5	---	74.0	---	24.5	---	223.7	179.9	
4	2323.959	H	44.8	4.8	49.6	---	74.0	---	24.4	---	99.9	223.8	

**Test frequency range : 2 483.5 MHz – 2 500 MHz**

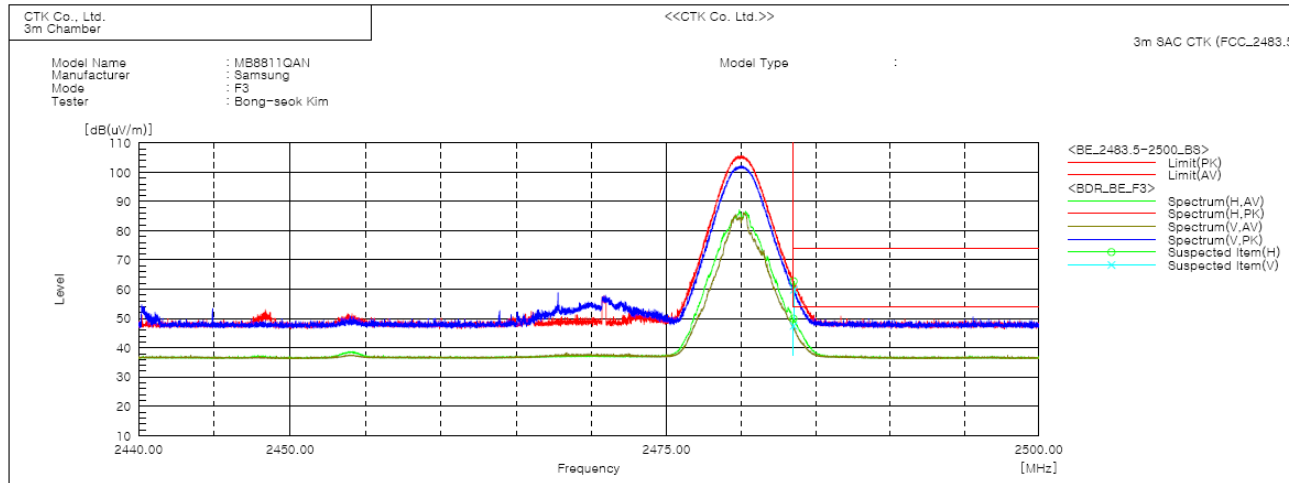


Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	Remark
1	2483.500	H	43.3	6.7	---	50.0	---	54.0	---	4.0	99.8	0.0	
2	2483.508	V	40.8	6.7	---	47.5	---	54.0	---	6.5	464.1	0.1	
3	2483.515	H	56.0	6.7	62.7	---	74.0	---	11.3	---	234.8	81.7	
4	2483.538	V	53.1	6.7	59.8	---	74.0	---	14.2	---	346.7	209.7	

**Test mode : Variant model, GFSK**


**Test frequency range : 2 310 MHz – 2 390 MHz**

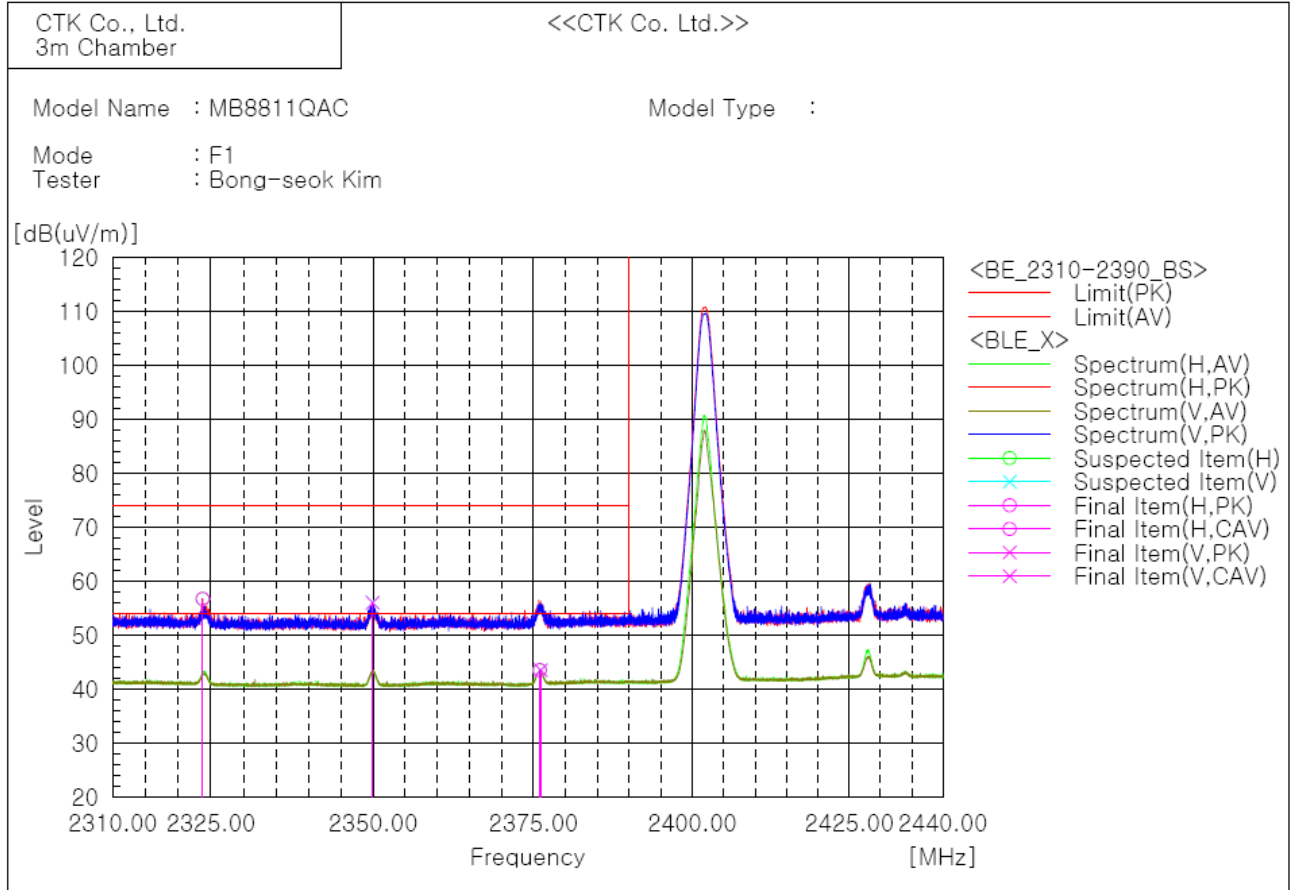

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	o.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2323.764	H	51.9	-----	4.8	56.7	-----	74.0	54.0	17.3	-----	99.8	254.9	
2	2349.959	V	51.4	-----	4.6	56.0	-----	74.0	54.0	18.0	-----	345.2	270.1	
3	2376.024	H	-----	38.7	4.8	-----	43.5	74.0	54.0	-----	10.5	99.8	266.7	
4	2376.154	V	-----	38.7	4.8	-----	43.5	74.0	54.0	-----	10.5	345.2	243.9	

**Test frequency range : 2 483.5 MHz – 2 500 MHz**

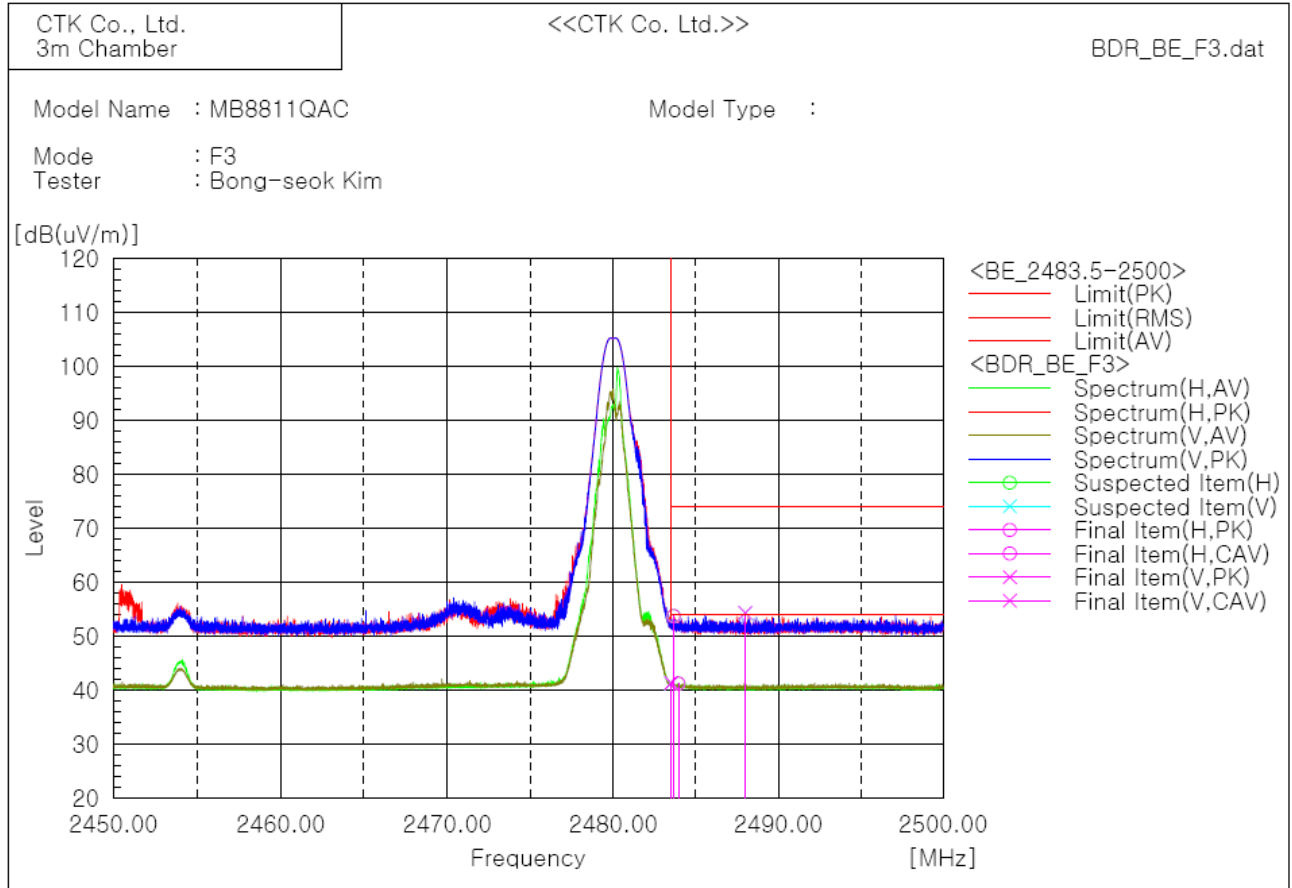


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	o.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2483.950	H	-----	34.5	6.7	-----	41.2	74.0	54.0	-----	12.8	99.8	0.1	
2	2483.519	V	-----	34.6	6.7	-----	41.3	74.0	54.0	-----	12.7	464.0	0.0	
3	2483.663	H	47.0	-----	6.7	53.7	-----	74.0	54.0	20.3	-----	99.8	332.2	
4	2487.994	V	47.6	-----	6.7	54.3	-----	74.0	54.0	19.7	-----	99.8	9.6	


**Test mode : Variant model, 8DPSK**

**Test frequency range : 2 310 MHz – 2 390 MHz**

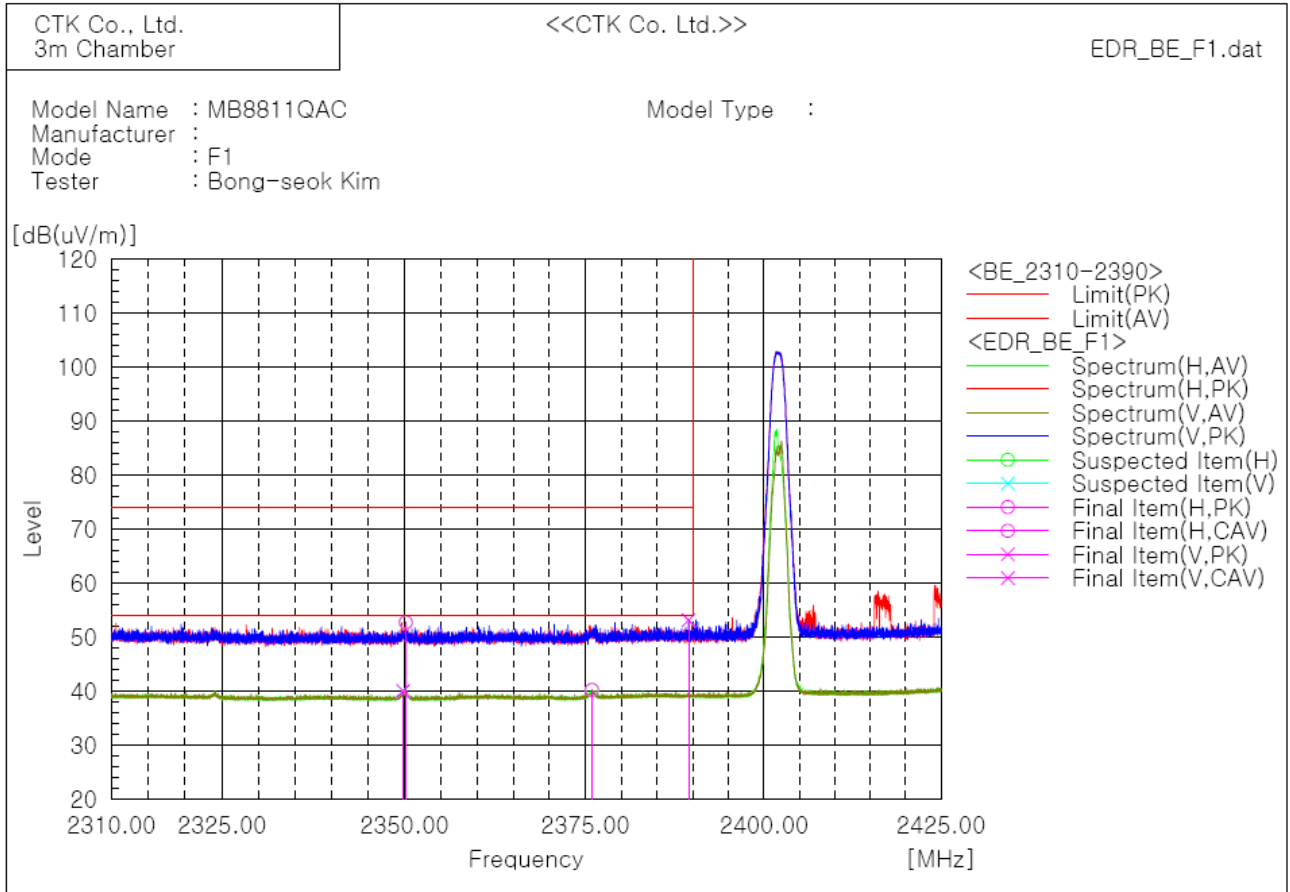



**Test frequency range : 2 483.5 MHz – 2 500 MHz**

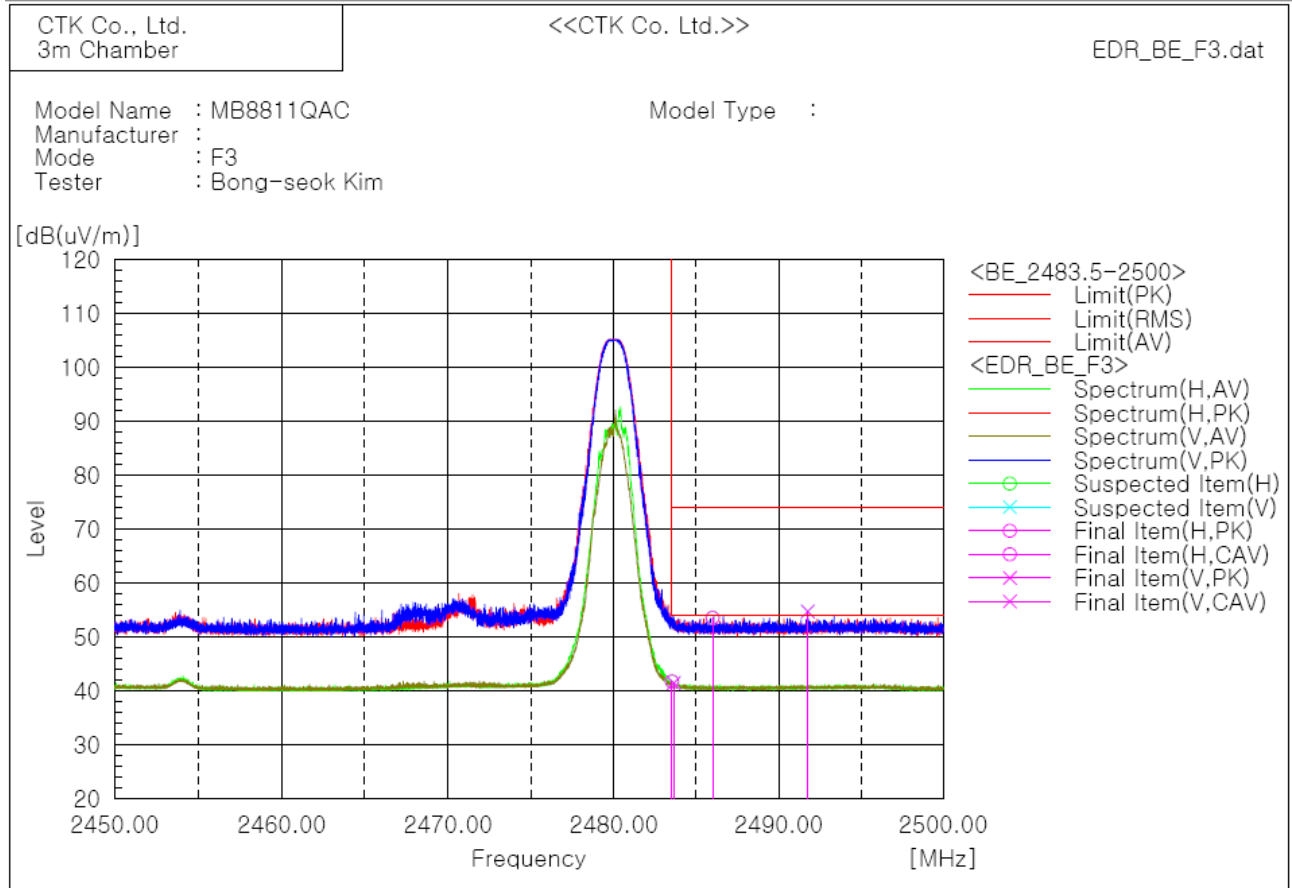

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2483.531	H	-----	35.0	6.7	-----	41.7	74.0	54.0	-----	12.3	234.3	350.4	
2	2483.650	V	-----	34.7	6.7	-----	41.4	74.0	54.0	-----	12.6	464.3	0.0	
3	2486.000	H	46.8	-----	6.7	53.5	-----	74.0	54.0	20.5	-----	234.3	0.0	
4	2491.775	V	48.1	-----	6.6	54.7	-----	74.0	54.0	19.3	-----	223.1	333.5	

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

## 4.8 AC Power Line Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.

## Test Results


The requirements are:

Complies

## Test Data

### Test mode : GFSK, Lowest channel(Worst case) [L1]

3CE\_Class B\_L1

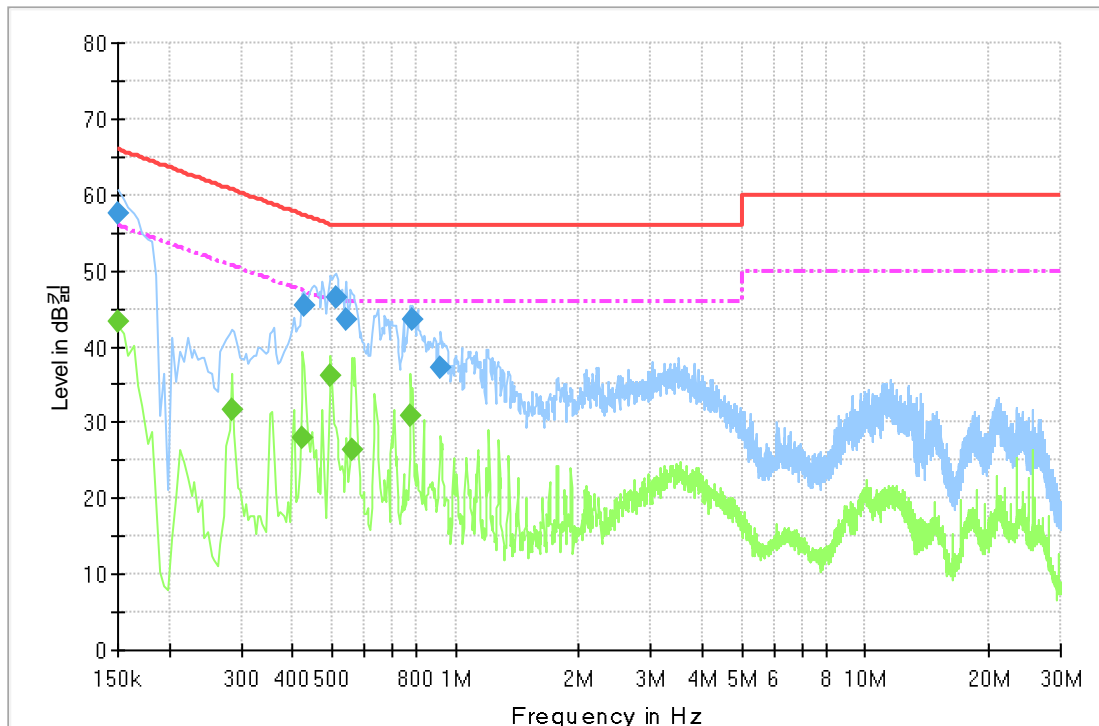

#### Final Result 1


Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	57.7	1000.0	9.000	On	L1	9.8	8.3	66.0
0.429000	45.5	1000.0	9.000	On	L1	10.0	11.8	57.3
0.510000	46.4	1000.0	9.000	On	L1	10.0	9.6	56.0
0.541500	43.4	1000.0	9.000	On	L1	10.0	12.6	56.0
0.784500	43.5	1000.0	9.000	On	L1	10.0	12.5	56.0
0.919500	37.2	1000.0	9.000	On	L1	9.9	18.8	56.0

#### Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	43.4	1000.0	9.000	On	L1	9.8	12.6	56.0
0.285000	31.8	1000.0	9.000	On	L1	9.8	18.9	50.7
0.424500	27.9	1000.0	9.000	On	L1	10.0	19.4	47.4
0.496500	36.1	1000.0	9.000	On	L1	10.0	10.0	46.1
0.559500	26.3	1000.0	9.000	On	L1	10.0	19.7	46.0
0.775500	31.0	1000.0	9.000	On	L1	10.0	15.0	46.0

**[NEUTRAL]**

3CE\_Class B\_N

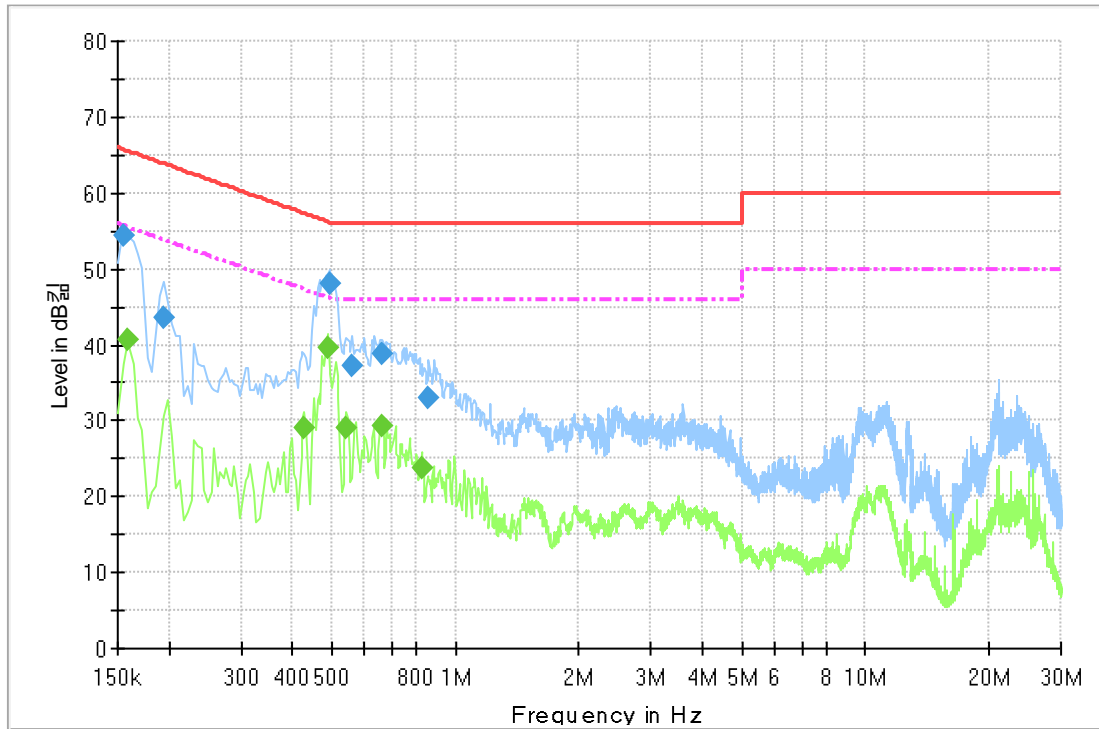

**Final Result 1**


Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154500	54.3	1000.0	9.000	On	N	9.9	11.5	65.8
0.195000	43.5	1000.0	9.000	On	N	10.0	20.3	63.8
0.492000	48.0	1000.0	9.000	On	N	10.0	8.1	56.1
0.559500	37.2	1000.0	9.000	On	N	10.0	18.8	56.0
0.663000	38.7	1000.0	9.000	On	N	10.0	17.3	56.0
0.861000	33.0	1000.0	9.000	On	N	9.9	23.0	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.159000	40.7	1000.0	9.000	On	N	10.0	14.8	55.5
0.429000	29.1	1000.0	9.000	On	N	10.0	18.2	47.3
0.487500	39.6	1000.0	9.000	On	N	10.0	6.6	46.2
0.541500	29.1	1000.0	9.000	On	N	10.0	16.9	46.0
0.663000	29.3	1000.0	9.000	On	N	10.0	16.7	46.0
0.825000	23.9	1000.0	9.000	On	N	9.9	22.1	46.0

**Test mode : Variant model, 8DPSK, Highest channel(Worst case)  
[L1]**

3CE\_Class B\_L1

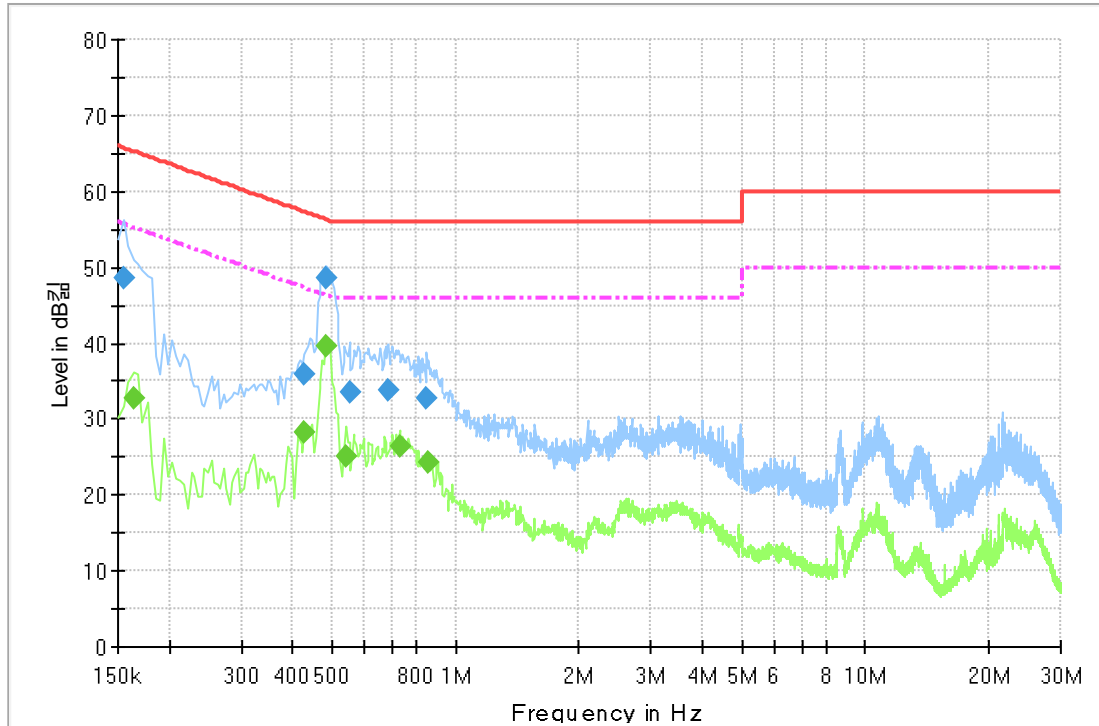

**Final Result 1**


Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154500	48.6	1000.0	9.000	On	L1	9.9	17.1	65.8
0.429000	35.8	1000.0	9.000	On	L1	10.0	21.4	57.3
0.483000	48.5	1000.0	9.000	On	L1	10.0	7.8	56.3
0.550500	33.4	1000.0	9.000	On	L1	10.0	22.6	56.0
0.685500	33.7	1000.0	9.000	On	L1	10.0	22.3	56.0
0.852000	32.7	1000.0	9.000	On	L1	9.9	23.3	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.163500	32.6	1000.0	9.000	On	L1	10.0	22.7	55.3
0.429000	28.3	1000.0	9.000	On	L1	10.0	19.0	47.3
0.483000	39.5	1000.0	9.000	On	L1	10.0	6.8	46.3
0.541500	25.1	1000.0	9.000	On	L1	10.0	20.9	46.0
0.730500	26.4	1000.0	9.000	On	L1	10.0	19.6	46.0
0.861000	24.2	1000.0	9.000	On	L1	9.9	21.8	46.0

**[NEUTRAL]**

3CE\_Class B\_N

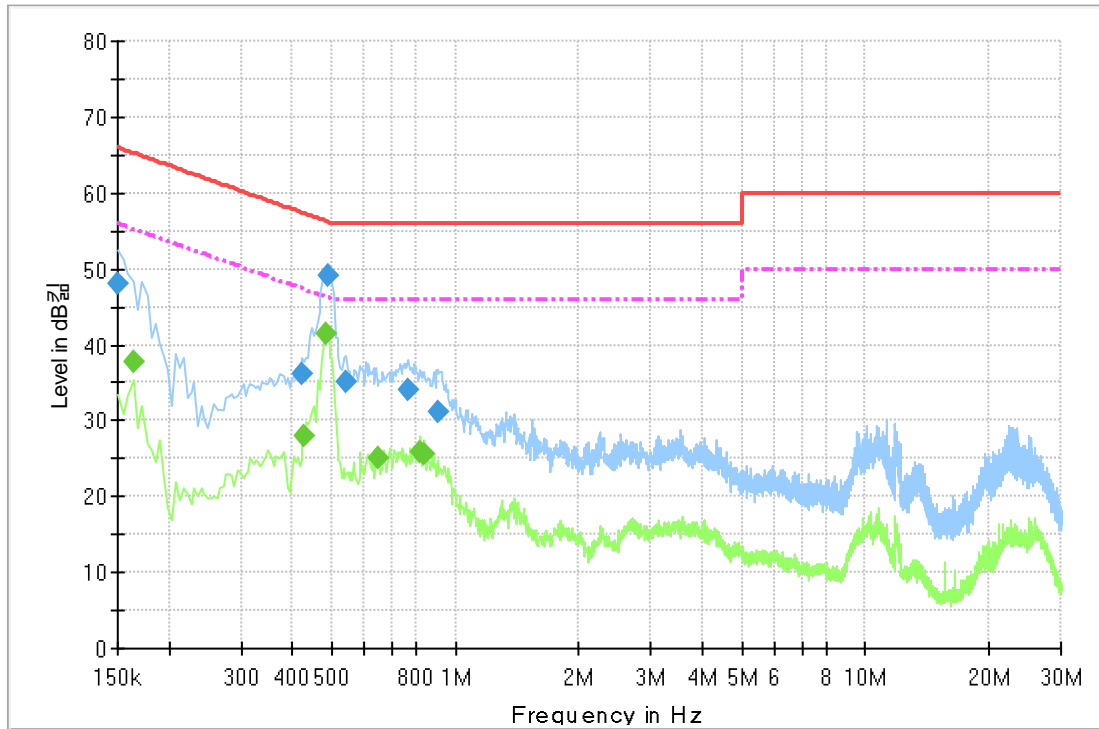

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	48.0	1000.0	9.000	On	N	9.8	18.0	66.0
0.424500	36.1	1000.0	9.000	On	N	10.0	21.2	57.4
0.487500	49.1	1000.0	9.000	On	N	10.0	7.1	56.2
0.541500	35.2	1000.0	9.000	On	N	10.0	20.8	56.0
0.766500	34.0	1000.0	9.000	On	N	9.9	22.0	56.0
0.906000	31.2	1000.0	9.000	On	N	9.9	24.8	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.163500	37.7	1000.0	9.000	On	N	10.0	17.5	55.3
0.429000	28.1	1000.0	9.000	On	N	10.0	19.2	47.3
0.483000	41.4	1000.0	9.000	On	N	10.0	4.9	46.3
0.649500	25.0	1000.0	9.000	On	N	10.0	21.0	46.0
0.816000	25.9	1000.0	9.000	On	N	9.9	20.1	46.0
0.834000	25.5	1000.0	9.000	On	N	9.9	20.5	46.0

## 4.9 Frequency Hopping System Requirements

### Standard Applicable


According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### EUT Pseudorandom Frequency Hopping Sequence

The pseudo random sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9 Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits Longest sequence of zeros: 8 (non-inverted signal)

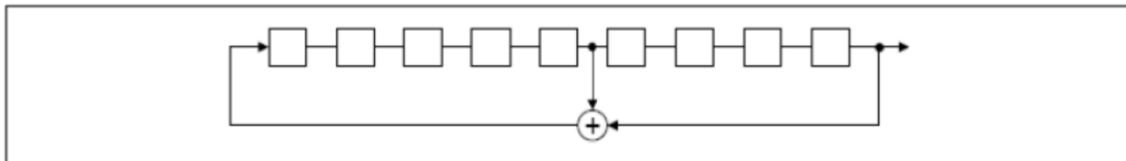

*Linear Feedback Shift Register for Generation of the PRBS sequence*

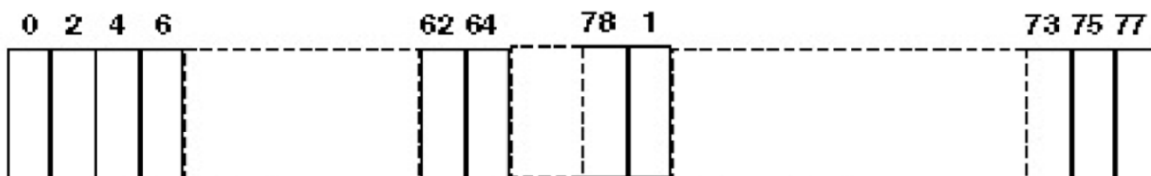

Each frequency used equally on the average by each transmitter. The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-04450  
Page (72) / (73) Pages

## Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

\*Example for a Bluetooth device using channel numbers would be :

Ch 44, 35, 78, 03, 15, 21, 76, 40, 56, 13, 02, 19, 67, 39, 78, 20, 21, 64, 75 etc.





**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2019-04450  
 Page (73) / (73) Pages

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2019-10-16	2020-10-16
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2019-10-16	2020-10-16
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2019-10-22	2020-10-22
4	Bilog Antenna	SCHAFFNER	CBL6111C	2551	2019-05-10	2020-05-10
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2018-05-02	2020-05-02
6	6dB Attenuator	Rohde & Schwarz	DNF	272.4110.50-2	2019-10-25	2020-10-25
7	AMPLIFIER	SONOMA	310	291721	2019-01-28	2020-01-28
8	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2019-01-29	2020-01-29
9	Preamplifier	Agilent	8449B	3008A01504	2018-12-17	2019-12-17
10	Horn Antenna	ETS-Lindgren	3116	00062504	2017-12-04	2019-12-04
11	Horn Antenna	ETS-Lindgren	3117	00154525	2019-09-25	2021-09-25
12	Band Reject Filter	Micro Tronics	BRM50702	G233	2019-01-28	2020-01-28
13	LISN	Rohde & Schwarz	ENV216	101760	2019-01-29	2020-01-29

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2018-12-19
2	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	N/A (below 1GHz)	2018-12-19
3	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2018-12-19
4	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 106	N/A (above 1GHz)	2018-12-19
5	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2374/2	2018-12-19
6	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2018-12-19
7	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY14858/4	2018-12-19
8	RF Cable (Conducted)	JUNFLON	MWX221	1512S148	2019-10-28
9	Cable	CANARE	AC power line	N/A	2019-01-28
10	Cable	CANARE	3m loop	N/A	2019-01-28