

# SCHEMATIC DIAGRAM - ME1440SC

NOTE1: CIRCUIT SHOWN WITH DOOR IS OPEDED POSITION.

NOTE2: FOR SERVICE REPLACEMENT USE 16 GA 105°C THERMOPLASTIC COVERED WIRE EXCEPT FOR HIGH VOLTAGE LEADS OR AS NOTED ON SPECIAL LEADS.


NOTE3: - - - - - (PCB PATTERN)

NOTE4: ■ : PCB CONNECTOR

NOTE5: (L) : LIVE


(N) : NEUTRAL

**WARNING**  
**POWER MUST BE DISCONNECTED**  
**BEFORE SERVICING THIS APPLIANCE**

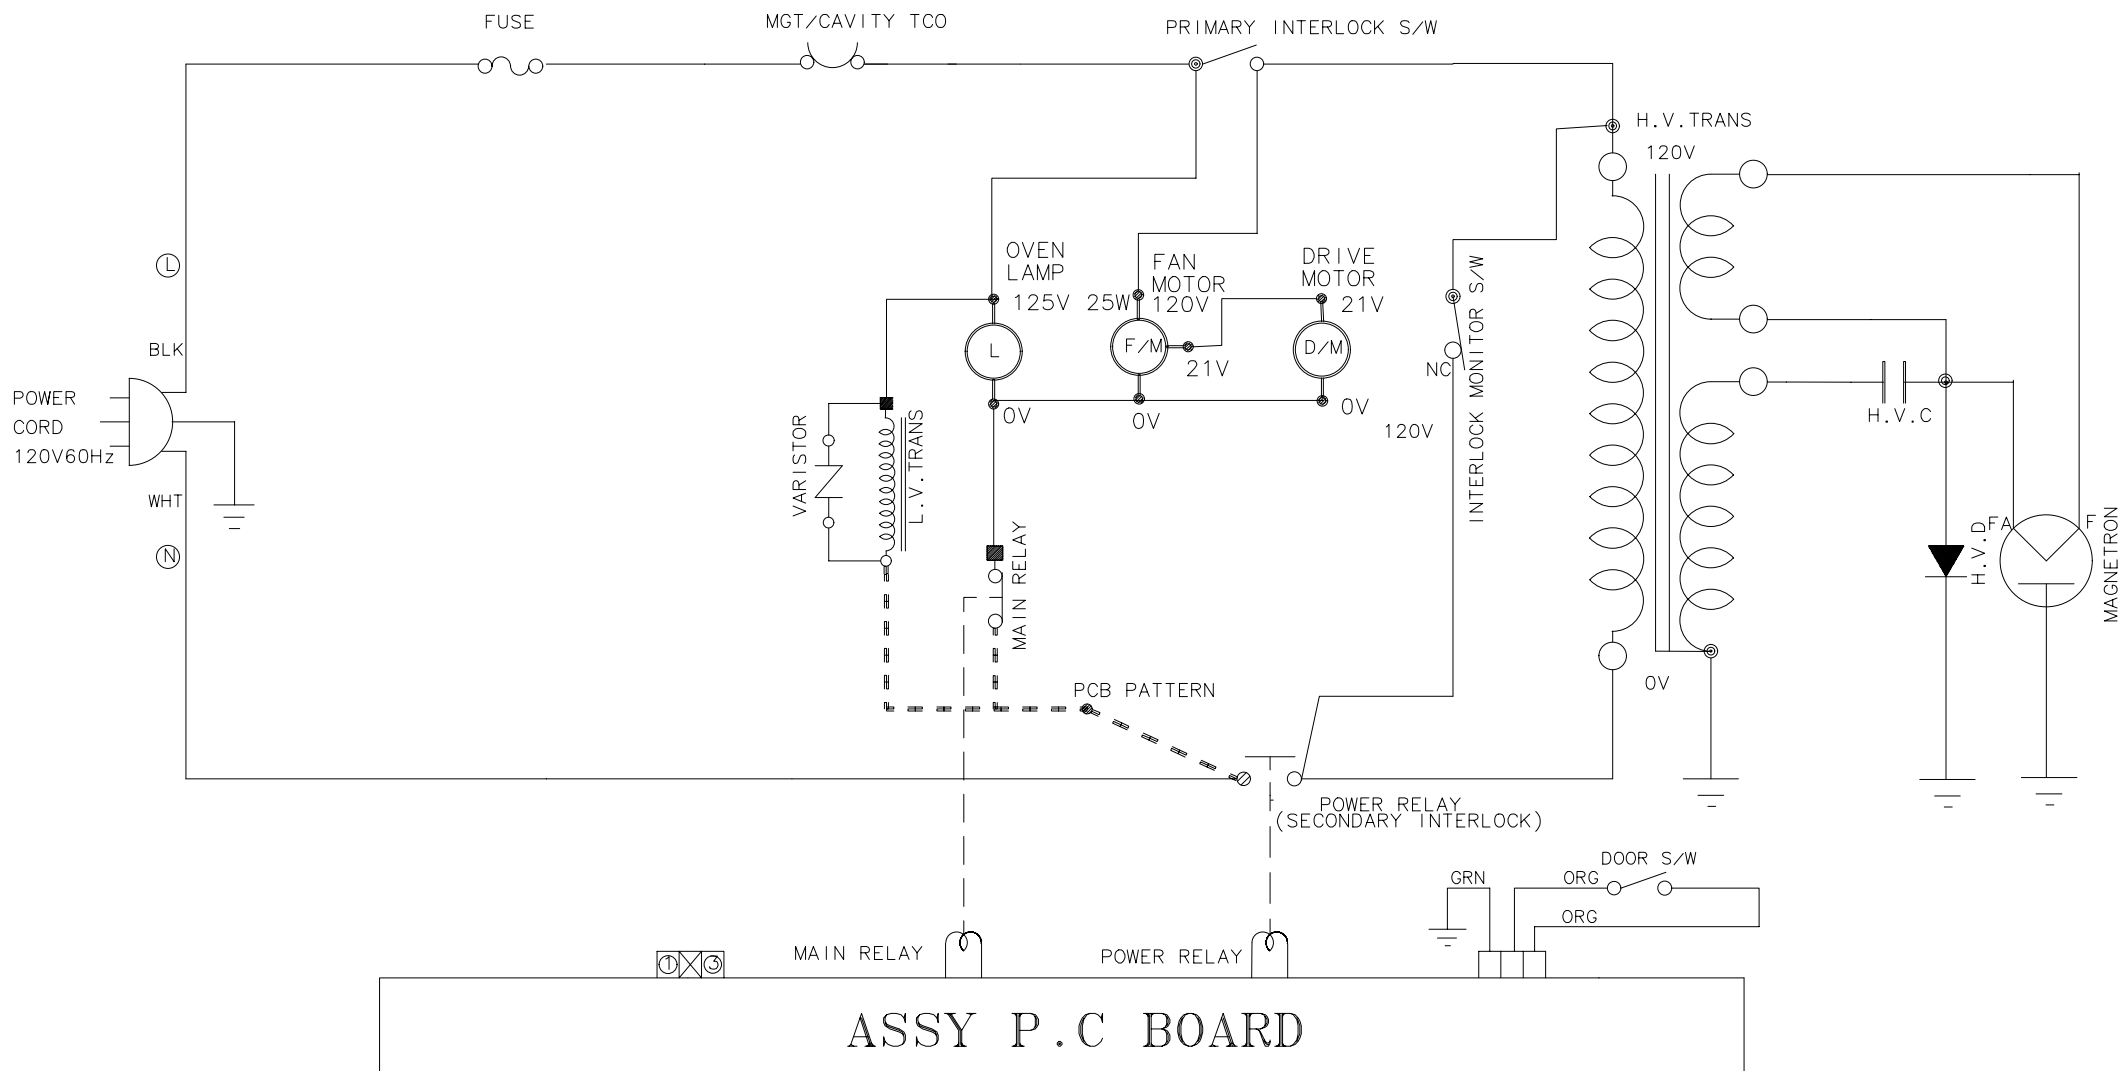

# 8. P.C.B Diagrams

## 8-1 P.C.B Diagrams

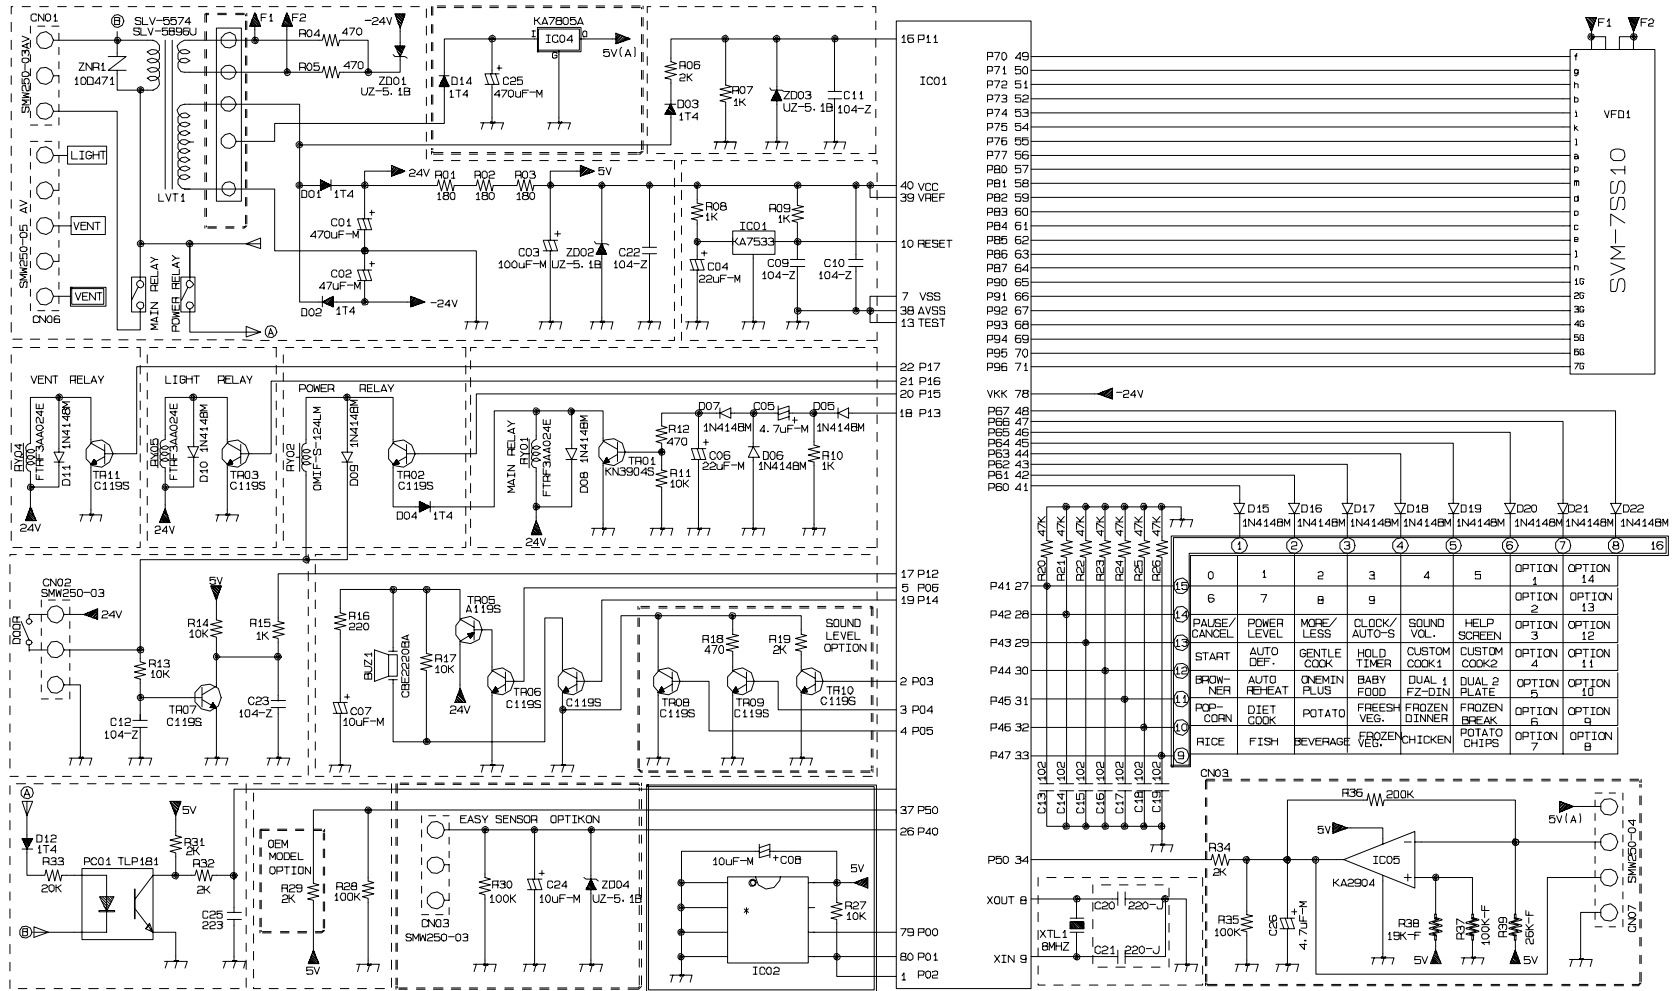

S22USA  
SCHEMATIC