



TEST REPORT

PART 27 MEASUREMENT REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 04/04/2023 - 05/15/2023
Test Site/Location:
 Element Lab., Suwon,
 Yongin-si, Gyeonggi-do, Korea
Test Report Serial No.:
 8K23032101-00-R1.A3L

FCC ID:	A3LMT6413-77A
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: MT6413-77A
EUT Type: MMU(MT6413)
FCC Classification: Licensed Non-Broadcast Station Transmitter
FCC Rule Part(s): §27
Test Procedure(s): ANSI C63.26-2015, KDB 971168 D01 v03r01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Prepared by Jonathan Jang
 Test Engineer



Reviewed by Charles.Shin
 Technical Manager






FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 1 of 137	


TABLE OF CONTENTS

1.0	REVISION RECORD	4
2.0	INTRODUCTION	5
2.1	Scope	5
2.2	Element Test Location.....	5
2.3	Test Facility / Accreditation	5
3.0	PRODUCT INFORMATION.....	6
3.1	Equipment Description	6
3.2	Device Capabilities.....	6
3.3	Test Configuration	7
3.4	EMI Suppression Device(s)/Modifications	7
4.0	DESCRIPTION OF TESTS	8
4.1	Measurement Procedure.....	8
4.2	Radiated Emissions.....	9
4.3	Measurement Software	9
4.4	Environmental Conditions	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA	11
7.0	SAMPLE CALCULATIONS	12
8.0	TEST RESULTS	13
8.1	Summary	13
8.2	Occupied Bandwidth	14
8.3	Equivalent Isotropic Radiated Power.....	18
8.4	Peak To Average Ratio	42
8.5	Band Edge Emissions at Antenna Terminal	45
8.6	Spurious and Harmonic Emissions at Antenna Terminal	65
8.7	Frequency Stability.....	101
8.8	Radiated spurious emission	103
9.0	CONCLUSION.....	115
10.0	APPENDIX. A	116
10.1	Conducted Average Output Power.....	116

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 2 of 137	



MEASUREMENT REPORT FCC Part 27





Mode	Tx Frequency (MHz)	Max. EIRP (dBm/MHz)	Max. EIRP /Entire Band Width (dBm)	Max. EIRP /Entire Band Width (W)	Emission Designator	Modulation
n77_1C_40M	3 700 to 3 980	65.01	80.68	116949.94	38M0G7D	QPSK
		65.04	80.87	122179.97	38M0W7D	QAM
n77_1C_60M		64.75	81.56	143218.79	57M9G7D	QPSK
		64.87	81.69	147570.65	58M0W7D	QAM
n77_1C_80M		63.74	81.81	151705.04	77M7G7D	QPSK
		63.83	81.91	155238.70	77M7W7D	QAM
n77_1C_100M		62.68	81.68	147231.25	97M5G7D	QPSK
		62.81	81.71	148251.81	97M7W7D	QAM
n77_2C_100M+40M		61.25	81.63	145545.91	137MG7D	QPSK
		60.98	81.51	141579.38	137MW7D	QAM
n77_2C_100M+100M	59.57	81.72	148593.56	196MG7D	QPSK	
	59.62	81.61	144877.19	196MW7D	QAM	

EUT Overview



Notes:

Total Power shown in the table above are the Equivalent Isotropic Radiated Power that will appear on the Grant of Authorization.

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 3 of 137

1.0 REVISION RECORD

Issue Number	Issued Date	Revision History
8K23032101-00.A3L	05/17/2023	Initial Issue
8K23032101-00-R1.A3L	05/25/2023	Revision due to updated data table names.

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 4 of 137	

2.0 INTRODUCTION

2.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



2.2 Element Test Location

These measurement tests were conducted at the Element Materials Technology Suwon. Ltd. facility located at (#1407) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do 16954, Korea.

2.3 Test Facility / Accreditation

Measurements were performed at Element Materials Technology Suwon Lab located in Yongin-si, Gyeonggi, Korea.

- Element Materials Technology Suwon is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of IC: 26168

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 5 of 137	

3.0 PRODUCT INFORMATION

3.1 Equipment Description



The Equipment Under Test (EUT) is the **Samsung MMU(MT6413) FCC ID: A3LMT6413-77A**.

The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

3.2 Device Capabilities

This device supports the following conditional features and filter information declared by the manufacturer.

EUT Type	MMU(MT6413)		
Model Name	MT6413-77A		
Test Device Serial No	S619326992		
Device Capabilities:	5G NR		
Operating Band/Frequency Range:	Band	Tx	Rx
	n77:	3700 MHz to 3980 MHz	3700 MHz to 3980 MHz
Supported Modulation	QPSK, 16QAM, 64QAM, 256QAM		
Numerology	SCS 30 kHz		
Supported Number of Carriers and Channel Bandwidth	40, 60, 80 and 100MHz bandwidth 1C modes for 5G NR n77 with up to 2CC aggregated of Max. Bandwidth 200 MHz		
Maximum RF Output Power	1CC: 40 MHz: 3.625W/path, 232W/unit 1CC: 60, 80, 100 MHz: 5W/path, 320W/unit 2CC: 100 MHz + 40 MHz, 100 MHz + 60 MHz, 100 MHz + 80 MHz, 100 MHz + 100 MHz: 5W/path, 320W/unit		
IBW/OBW	200 MHz / 200 MHz		
Number of Antenna ports	64T64R		
Supported Configurations	Single carrier, Multi-carrier		
Input Voltage:	-48V DC		
Maximum antenna gain	Max 26.5 dBi (25.5 dBi ± 1 dB tolerance) Antenna gain declared by the manufacturer		

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 6 of 137

3.3 Test Configuration

The setup is as follows:

- The EUT (“MMU(MT6413)”) and a Data Unit (DU) are each powered by -48V DC power supply.
- The DU is connected to a test laptop via an ethernet cable acting as backhaul.
- DU connects to the EUT through a fiber optic cable.
- An RF cable connects the signal analyzer and the EUT Ports for respective measurement.

The EUT was tested per the guidance of ANSI C63.26-2015 and KDB 971168 D01 v03r01. See Section 8.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The following information is about configurations of carrier frequency and output power per port declared by the manufacturer.

* Abbreviations:



- 1C: 1 carrier configuration
- 2C: Contiguous 2 carriers configuration in multi-carrier operation

Single and Multi Carrier Configuration	No. of Carriers	Total Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)			Rated Power (W/path)
			Lowest	Middle	Highest	
n77_1C_40M	1	40	3720.0	3840.0	3960.0	3.63
n77_1C_60M	1	60	3730.0	3840.0	3950.0	5
n77_1C_80M	1	80	3740.0	3840.0	3940.0	5
n77_1C_100M	1	100	3750.0	3840.0	3930.0	5
n77_2C_100+40M	2	140 (100+40)	3750.0 + 3820.0 (Note1)			5
n77_2C_100+100M	2	200 (100+100)	3750.0 + 3850.0 (Note1)			5

Note1: All measurements were performed on the fix channels because the EUT operates on the fixed channels in the multi carrier operation.

3.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 7 of 137	

4.0 DESCRIPTION OF TESTS

4.1 Measurement Procedure

The measurement procedures described in the document titled “American National Standard for Compliance Testing of Transmitter Used in Licensed Radio Service” (ANSI C63.26-2015) and the guidance provided in KDB 842590 D01 v01r01 were used in the measurement of the EUT.

Occupied Bandwidth:

KDB 971168 D01 v03r01 – Section 4.3
ANSI C63.26-2015 – Section 5.4.4

Conducted Power Measurement and EIRP and PSD

KDB 971168 D01 v03r01 – Section 5.3
KDB 971168 D01 v03r01 – Section 5.4
KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements
KDB 662911 D01 v02r01 – Section E)2) In-Band Power Spectral Density (PSD) Measurements
ANSI C63.26-2015 – Section 5.2.5
ANSI C63.26-2015 – Section 5.2.4

Peak-to-Average Power Ratio:

KDB 971168 D01 v03r01 – Section 5.7
ANSI C63.26-2015 – Section 5.2.3.4

Band Edge Emissions at Antenna Terminal

KDB 971168 D01 v03r01 – Section 6
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements
a) Absolute Emission Limits
ii) Measure and sum spectral maxima across the outputs
ANSI C63.26-2015 – Section 5.7

Spurious and Harmonic Emissions at Antenna Terminal



KDB 971168 D01 v03r01 – Section 6
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements
a) Absolute Emission Limits
ii) Measure and sum spectral maxima across the outputs
ANSI C63.26-2015 – Section 5.7

Radiated unwanted emission

KDB 971168 D01 v03r01 – Section 7
ANSI C63.26-2015 – Section 5.8

Frequency Stability / Temperature Variation

KDB 971168 D01 v03r01 – Section 9
ANSI C63.26-2015 – Section 5.6

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 8 of 137	

4.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi- anechoic chamber which is shielded from any ambient interference.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. For frequencies above 1GHz, linearly polarized Vivaldi antennas were used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.



Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and Vivaldi antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the polarity of the receive antenna to produce the worst-case emissions

4.3 Measurement Software

Test item	Name	Version
Conducted Measurement	Node B automation	1.0

4.4 Enviromental Conditions



The temperature is controlled within the range of 15°C to 35°C. The relative humidity is controlled within the range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 9 of 137	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.37
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	4.84

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 10 of 137	

6.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacture	Model	Description	Cal Date	Cal interval	Cal Due	Serial Number
SUKSAN TECHNOLOGY	SE-CT-10	Temperature Chamber	07/05/2022	Annual	07/04/2023	191021
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	04/06/2023	Annual	04/05/2024	101250
Rohde & Schwarz	ESW	EMI Test Receiver	07/04/2022	Annual	07/03/2023	101761
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	01/13/2023	Annual	01/12/2024	102151
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	07/13/2021	Biennial	07/12/2023	9162-217
Sunol sciences	DRH-118	Horn Antenna	01/26/2023	Biennial	01/25/2025	A060215
NARDA	180-442A-KF	Horn Antenna	11/23/2022	Biennial	11/22/2024	T058701-0
Keysight	N9030B	PXA Signal Analyzer	04/06/2023	Annual	04/05/2024	MY57142018
K&L Microwave	D.C 1527	High Pass Filter	07/05/2022	Annual	07/04/2023	2
WAINWRIGHT	WHW-13000-18000-40000-40CC	High Pass Filter	04/06/2023	Annual	04/05/2024	2
Reachline	RL50W40GKF-20	Attenuator	04/06/2023	Annual	04/05/2024	PK00408
Centric RF	C411-20	Attenuator	01/12/2023	Annual	01/11/2024	0003
RF One	RFHB1810SC 10	Attenuator	07/28/2022	Annual	07/27/2023	RFHB0001 To RFHB0033
Qualwave	QFA1820	Attenuator	07/28/2022	Annual	07/27/2023	22265083 To 22265116

Table 6-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. All testing was performed before the calibration due date.

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 11 of 137

7.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 38M0G7D

Occupied Bandwidth = 38.03 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation



Emission Designator = 38M0W7D

Occupied Bandwidth = 38.04 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 12 of 137	

8.0 TEST RESULTS

8.1 Summary


Company Name: SAMSUNG Electronics Co., Ltd.
 FCC ID: A3LMT6413-77A
 FCC Classification: Licensed Non-Broadcast Station Transmitter
 Mode(s): 5G NR

FCC Part Section(s)	Test Description	Limit	Test Condition	Test Result	Reference
§ 2.1046	Conducted Average Output Power	N/A	CONDUCTED	PASS	Annex 1
§ 2.1049	Occupied Bandwidth	N/A		PASS	Section 8.2
§ 2.1046, § 27.50(j)	Equivalent Isotropic Radiated Power (Power Spectral Density)	≤ 3280 W/MHz		PASS	Section 8.3
§ 2.1046, § 27.50(l)	Peak-to-average ratio	≤ 13 dB		PASS	Section 8.4
§ 2.1051, § 27.50(l)	Band Edge Emissions at Antenna Terminal	$< 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and all out-of-band emissions		PASS	Section 8.5
§ 2.1051, § 27.50(l)	Spurious and Harmonic Emissions at Antenna Terminal			PASS	Section 8.6
§ 2.1055 § 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 8.7
§ 2.1055, § 27.50(l)	Radiated unwanted emission	$< 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and all out-of-band emissions	RADIATED	PASS	Section 8.8

Table 8-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 13 of 137	

8.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 4.3

ANSI C63.26-2015 – Section 5.4.4

Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 8-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 14 of 137	

Channel	OBW (MHz)			
	QPSK	16QAM	64QAM	256QAM
Low	37.90	37.88	37.98	38.00
Middle	37.96	37.91	37.93	38.04
High	38.03	37.90	37.99	38.04

Table 8-2. Occupied Bandwidth Summary Data (n77_1C_40M)

Channel	OBW (MHz)			
	QPSK	16QAM	64QAM	256QAM
Low	57.84	58.03	57.97	58.01
Middle	57.88	57.85	57.96	57.93
High	57.82	57.95	57.86	57.85

Table 8-3. Occupied Bandwidth Summary Data (n77_1C_60M)

Channel	OBW (MHz)			
	QPSK	16QAM	64QAM	256QAM
Low	77.71	77.66	77.52	77.54
Middle	77.69	77.61	77.48	77.52
High	77.70	77.63	77.52	77.53



Table 8-4. Occupied Bandwidth Summary Data (n77_1C_80M)


Channel	OBW (MHz)			
	QPSK	16QAM	64QAM	256QAM
Low	97.44	97.45	97.54	97.66
Middle	97.41	97.43	97.49	97.42
High	97.47	97.63	97.59	97.53

Table 8-5. Occupied Bandwidth Summary Data (n77_1C_100M)


Mode	OBW (MHz)	
	QPSK	16QAM
n77_2C_100M+40M	136.58	136.60
n77_2C_100M+100M	196.28	196.28

Table 8-6. Occupied Bandwidth Summary Data (n77_Multi-carrier)


FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 15 of 137	

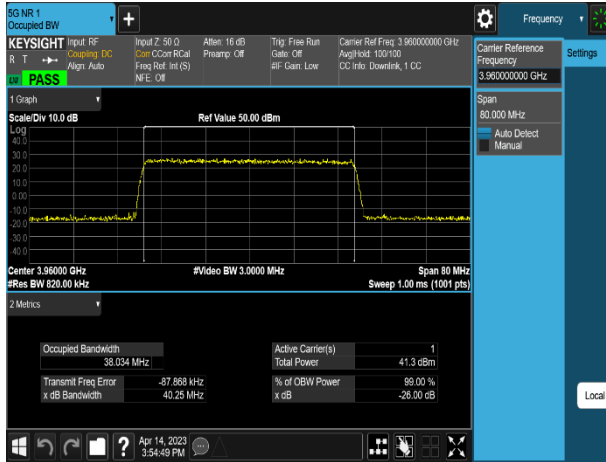


Plot 8-1. Occupied Bandwidth Plot (n77_1C_40M_QPSK - High Channel)

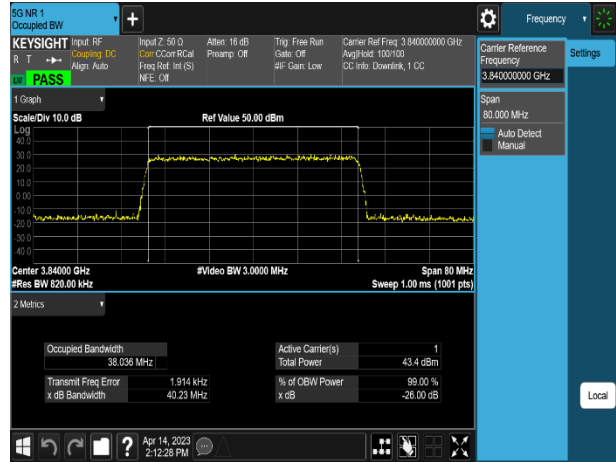


Plot 8-2. Occupied Bandwidth Plot (n77_1C_40M_256QAM - Mid Channel)

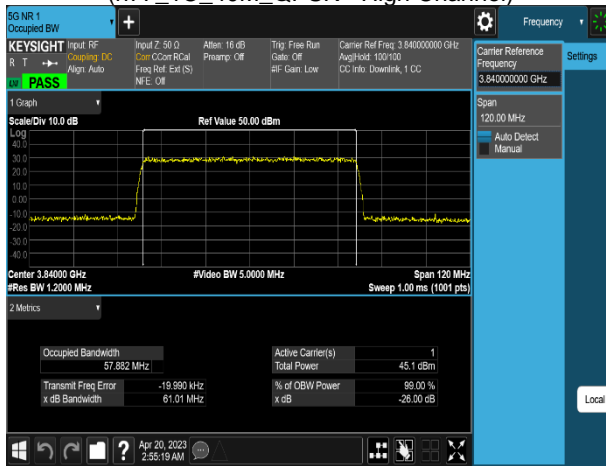


Plot 8-3. Occupied Bandwidth Plot (n77_1C_60M_QPSK - Mid Channel)

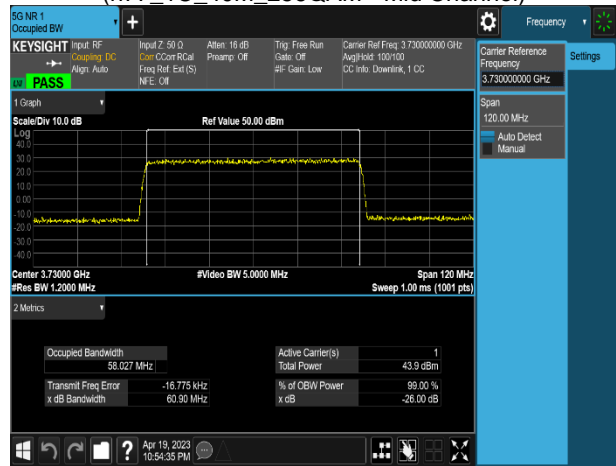

Plot 8-4. Occupied Bandwidth Plot (n77_1C_60M_16QAM - Low Channel)

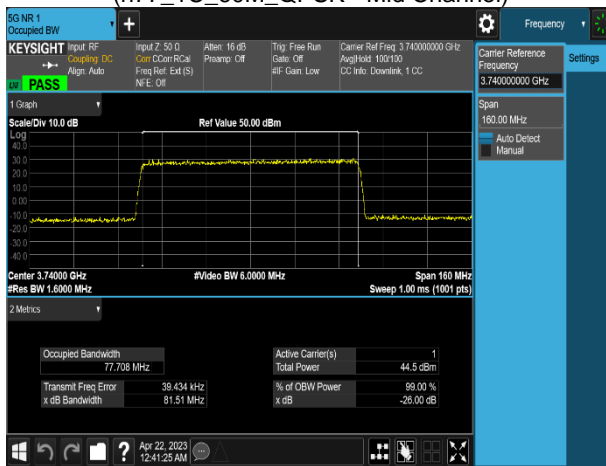


Plot 8-5. Occupied Bandwidth Plot (n77_1C_80M_QPSK - Low Channel)

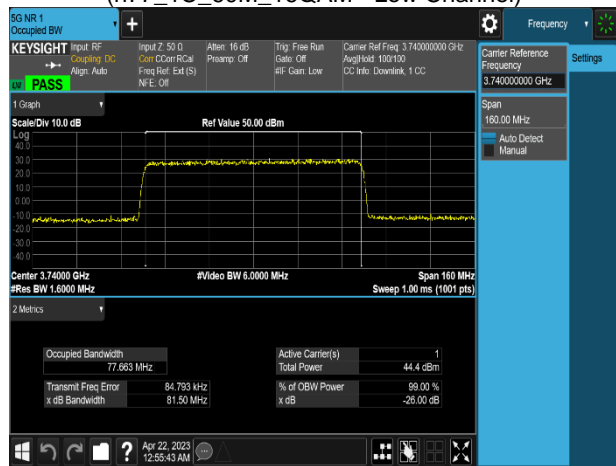


Plot 8-6. Occupied Bandwidth Plot (n77_1C_80M_16QAM - Low Channel)


FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 16 of 137

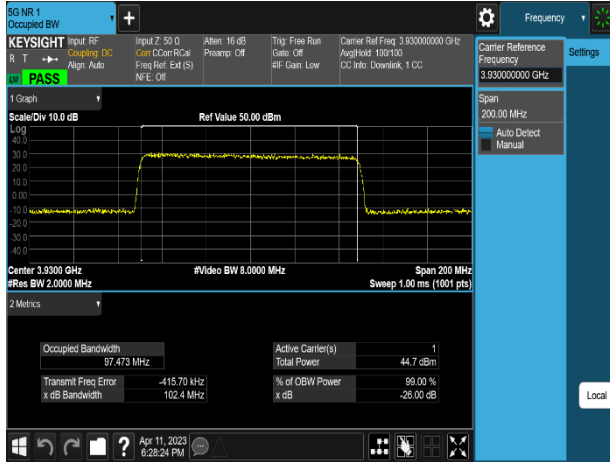


Plot 8-7. Occupied Bandwidth Plot (n77_1C_100M_QPSK - High Channel)

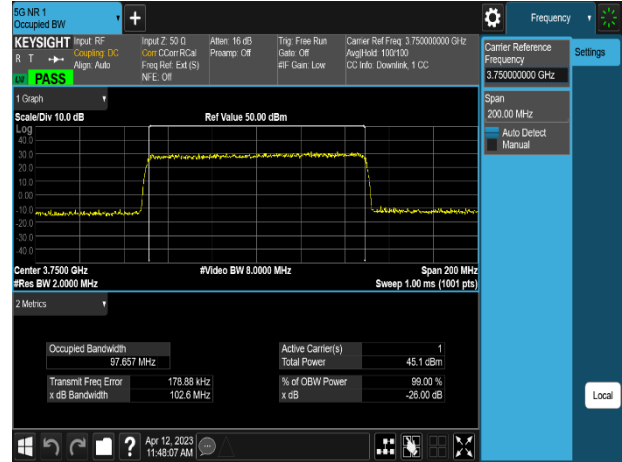


Plot 8-8. Occupied Bandwidth Plot (n77_1C_100M_256QAM - Low Channel)

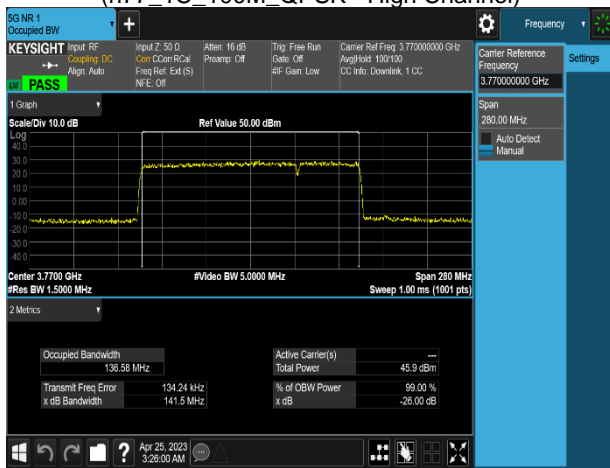


Plot 8-9. Occupied Bandwidth Plot (n77_2C_100+40M_QPSK - Mid Channel)

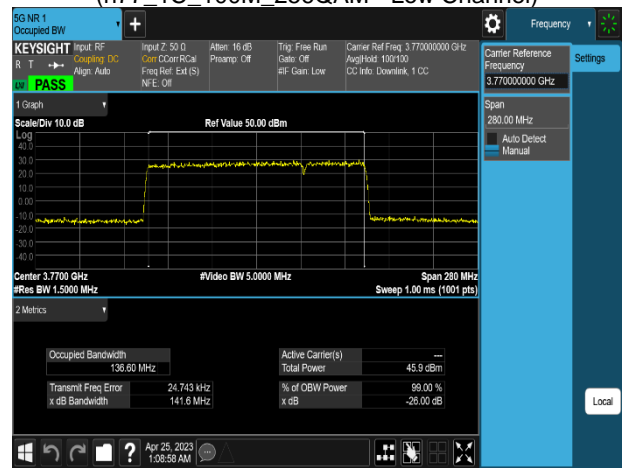

Plot 8-10. Occupied Bandwidth Plot (n77_2C_100+40M_16QAM - Mid Channel)

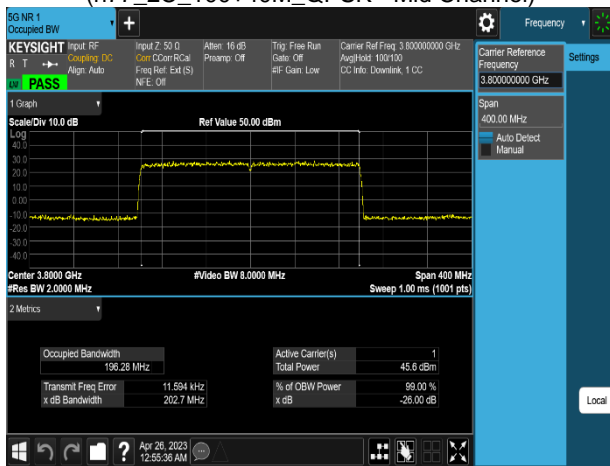

Plot 8-11. Occupied Bandwidth Plot (n77_2C_100+100M_QPSK - Mid Channel)

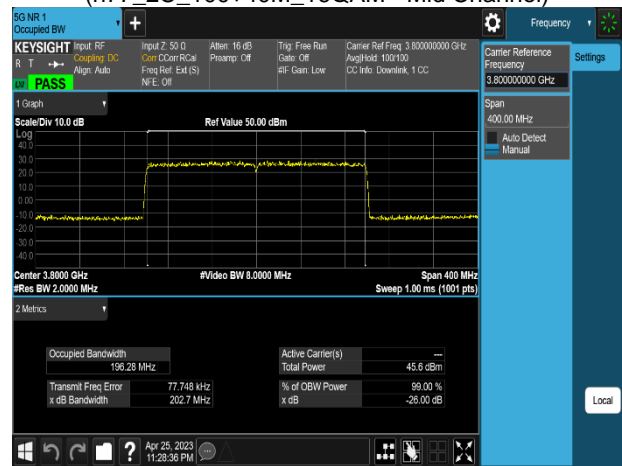

Plot 8-12. Occupied Bandwidth Plot (n77_2C_100+100M_16QAM - Mid Channel)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 17 of 137

8.3 Equivalent Isotropic Radiated Power

Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.2

KDB 662911 D01 v02r01 – Section E)2) In-Band Power Spectral Density (PSD) Measurements

b) Measure and sum spectral maxima across the outputs.

ANSI C63.26-2015 – Section 5.2.4

Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. Conducted power measurements are performed using the signal analyzer’s “SA mode” measurement capability for signals with continuous operation.
2. Set span to 2 × to 3 × the OBW.
3. Set RBW = 1 MHz (the reference bandwidth)
4. Set VBW ≥ 3 × RBW.
5. Set number of measurement points in sweep ≥ 2 × span / RBW.
6. Sweep time:
 - a) Set ≥ auto-couple, and enable trace averaging, or
 - b) Set ≥ [10 × (number of points in sweep) × (transmission symbol period)] and enable a single sweep (automation-compatible) measurement. The sweep time should never be faster than the auto-coupled sweep time.
7. Detector = power averaging (rms).
8. The trace was allowed to stabilize
9. Use the peak marker function to determine the maximum amplitude level. (=P_{Meas})
10. The relevant equation for determining the maximum EIRP from the measured RF output power is given in Equation as follows:

$$EIRP = P_{Meas} + G_T$$

where

G_T: gain of the transmitting antenna, in dBi (EIRP).

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 8-2. Test Instrument & Measurement Setup

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 18 of 137



Limit

The Equivalent Isotropic Radiated Power cannot exceed ≤ 3280 W/MHz



Test Notes

1. Consider the following factors for MIMO:
The output power per each port is measured as dBm/MHz or dBm, the output powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01 - Section E) 2).
2. The output power per port (dBm/MHz or dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO Conducted Power (mW). We convert this back to logarithmic scale for further output power calculations.
3. Periodic trigger was used with gating ON. Gate sweep time, Gate delay and gate length were set accordingly to capture ON time of the transmission.
4. All transmit signals from different antennas are completely uncorrelated with each other. So the maximum output power shall be calculated based on the aggregate power conducted across all antennas.
5. Sample Calculation:
Let us assume the following numbers:
 - a) Total MIMO Conducted Power as 6961.16 milliWatts
 - b)



	Factors	Value	Unit
Summed MIMO Conducted Power (linear sum)		6961.16	mW/MHz
Summed MIMO Conducted Power (dBm)	$= 10 * \log (6961.16) =$	38.43	dBm/MHz
Antenna Gain		26.50	dBi
Total e.i.r.p	$= 38.43 + 26.50$	64.93	dBm/MHz
Limit	$= 10 * \log (3280) + 30$	65.15	dBm/MHz

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 19 of 137	



Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	20.40	20.47	20.49	20.44
	1	20.36	20.51	20.52	20.49
	2	20.42	20.46	20.55	20.50
	3	20.56	20.62	20.66	20.64
	4	20.42	19.99	20.56	20.07
	5	20.16	20.09	20.29	20.14
	6	20.39	20.25	20.46	20.26
	7	20.70	20.06	20.82	20.05
	8	20.52	20.71	20.63	20.75
	9	20.37	20.21	20.45	20.21
	10	20.55	20.57	20.65	20.61
	11	20.53	20.96	20.60	20.98
	12	20.09	20.61	20.18	20.64
	13	20.28	20.25	20.36	20.28
	14	20.49	20.62	20.62	20.64
	15	20.56	20.65	20.64	20.68
	16	20.59	20.37	20.68	20.46
	17	20.37	20.47	20.48	20.49
	18	20.41	20.74	20.48	20.78
	19	20.72	20.59	20.84	20.66
	20	20.49	20.22	20.57	20.25
	21	20.66	20.16	20.77	20.20
	22	20.40	20.76	20.52	20.80
	23	20.45	20.14	20.61	20.20
	24	20.43	20.41	20.47	20.45
	25	20.34	20.50	20.42	20.60
	26	20.40	20.43	20.51	20.53
	27	20.67	20.35	20.73	20.40
	28	20.46	20.33	20.55	20.39
	29	20.23	20.01	20.29	20.06
	30	20.44	20.70	20.53	20.74
	31	20.58	20.25	20.65	20.31
	32	20.02	20.58	20.11	20.63
	33	20.09	20.51	20.21	20.55
	34	20.35	20.14	20.45	20.21
	35	20.23	20.76	20.32	20.81
	36	20.36	19.96	20.45	20.02
	37	20.22	20.09	20.29	20.16
	38	20.55	20.23	20.62	20.26
	39	20.32	20.16	20.39	20.19
	40	20.13	20.53	20.25	20.57
	41	20.06	20.60	20.16	20.66
	42	20.55	20.26	20.69	20.31
	43	20.40	20.74	20.55	20.78
	44	20.40	20.29	20.53	20.32
	45	20.05	20.18	20.15	20.23
	46	20.68	20.38	20.80	20.42
	47	20.27	20.50	20.40	20.54
	48	20.11	20.44	20.20	20.49
	49	20.12	20.33	20.22	20.38
	50	20.26	20.34	20.40	20.43
	51	20.37	20.63	20.53	20.69
52	20.09	20.38	20.23	20.44	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 20 of 137	

	53	20.02	19.89	20.13	19.94
	54	20.41	20.44	20.53	20.44
	55	20.35	20.04	20.44	20.07
	56	20.27	20.33	20.39	20.37
	57	20.36	20.72	20.51	20.78
	58	20.57	20.52	20.71	20.57
	59	20.28	20.71	20.45	20.76
	60	20.12	20.13	20.24	20.19
	61	20.03	20.08	20.15	20.15
	62	20.39	20.35	20.52	20.43
	63	20.28	20.27	20.44	20.34
Total MIMO PSD Power (mW/MHz)		6961.16	7011.65	7135.70	7084.14
Total MIMO PSD Power (dBm/MHz)		38.43	38.46	38.53	38.50
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		64.93	64.96	65.03	65.00
Limit (dBm/MHz)		65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Mid	0	20.57	20.64	20.62	20.68
	1	20.52	20.52	20.52	20.58
	2	20.55	20.59	20.55	20.49
	3	20.53	20.59	20.59	20.66
	4	20.30	20.23	20.36	20.37
	5	20.19	20.18	20.30	20.29
	6	20.24	20.18	20.32	20.28
	7	20.08	20.13	20.16	20.16
	8	20.82	20.76	20.82	20.72
	9	20.30	20.29	20.41	20.40
	10	20.52	20.52	20.44	20.43
	11	20.81	20.86	20.85	20.71
	12	20.51	20.52	20.56	20.43
	13	20.12	20.12	20.22	20.20
	14	20.59	20.58	20.57	20.54
	15	20.70	20.72	20.77	20.74
	16	20.57	20.56	20.59	20.48
	17	20.54	20.55	20.49	20.64
	18	20.73	20.72	20.81	20.79
	19	20.54	20.52	20.59	20.50
	20	20.42	20.35	20.46	20.50
	21	20.23	20.17	20.26	20.16
	22	20.40	20.28	20.36	20.34
	23	20.12	20.37	20.38	20.44
	24	20.55	20.45	20.40	20.56
	25	20.77	20.78	20.75	20.77
	26	20.45	20.42	20.49	20.50
	27	20.37	20.40	20.37	20.39
	28	20.46	20.40	20.42	20.47
	29	20.12	20.13	20.11	20.13
	30	20.54	20.48	20.49	20.39
	31	20.34	20.31	20.23	20.34
	32	20.62	20.59	20.46	20.44
	33	20.50	20.49	20.48	20.54
	34	20.20	20.16	20.18	20.23
	35	20.81	20.79	20.65	20.66
36	20.05	20.00	20.11	20.08	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 21 of 137	

	37	20.17	20.14	20.36	20.19
	38	20.24	20.17	20.20	20.31
	39	20.31	20.27	20.41	20.33
	40	20.60	20.67	20.58	20.70
	41	20.61	20.60	20.52	20.51
	42	20.31	20.36	20.49	20.44
	43	20.88	20.91	20.88	20.79
	44	20.31	20.38	20.30	20.38
	45	20.37	20.36	20.48	20.43
	46	20.16	20.22	20.35	20.29
	47	20.37	20.42	20.37	20.50
	48	20.52	20.51	20.62	20.55
	49	20.68	20.73	20.66	20.59
	50	20.34	20.33	20.47	20.42
	51	20.72	20.70	20.68	20.56
	52	20.48	20.53	20.65	20.62
	53	19.92	19.99	20.09	20.03
	54	20.41	20.44	20.56	20.51
	55	20.20	20.16	20.25	20.18
	56	20.55	20.57	20.49	20.62
	57	20.97	21.02	21.07	20.92
	58	20.52	20.54	20.50	20.61
	59	20.85	20.80	20.75	20.85
	60	20.34	20.38	20.33	20.44
	61	20.18	20.23	20.32	20.31
	62	20.26	20.26	20.33	20.35
	63	20.32	20.24	20.34	20.31
Total MIMO PSD Power (mW/MHz)		7093.73	7093.79	7141.60	7129.70
Total MIMO PSD Power (dBm/MHz)		38.51	38.51	38.54	38.53
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		65.01	65.01	65.04	65.03
Limit (dBm/MHz)		65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
High	0	19.84	19.96	19.92	19.87
	1	20.03	20.14	20.11	20.08
	2	19.93	20.06	20.04	20.02
	3	20.02	20.11	20.12	20.06
	4	19.95	20.08	20.03	20.02
	5	20.04	20.11	20.11	20.08
	6	19.82	19.89	19.89	19.83
	7	19.99	20.11	20.08	19.96
	8	20.17	20.26	20.25	20.19
	9	19.66	19.77	19.74	19.71
	10	19.84	19.97	19.93	19.91
	11	19.72	19.78	19.78	19.77
	12	19.62	19.71	19.67	19.60
	13	20.00	20.14	20.09	20.04
	14	19.64	19.79	19.76	19.73
	15	19.78	19.89	19.90	19.83
	16	19.96	20.00	20.05	20.00
	17	19.83	19.96	19.92	19.93
	18	19.73	19.84	19.84	19.80
	19	20.34	20.41	20.41	20.35
20	20.01	20.09	20.11	20.10	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 22 of 137	

21	20.36	20.42	20.45	20.43	
22	19.79	19.92	19.84	19.87	
23	19.89	19.93	19.92	19.93	
24	19.85	19.99	19.96	19.90	
25	20.07	20.19	20.16	20.15	
26	19.71	19.83	19.79	19.77	
27	20.00	20.20	20.16	20.15	
28	20.14	20.03	20.02	19.98	
29	19.85	19.90	19.93	19.91	
30	19.74	19.85	19.85	19.85	
31	19.72	19.83	19.84	19.78	
32	19.54	19.66	19.62	19.59	
33	19.83	19.97	19.92	19.88	
34	19.62	19.76	19.72	19.74	
35	19.61	19.69	19.69	19.67	
36	19.88	19.95	19.93	19.88	
37	19.94	19.77	19.81	19.76	
38	19.99	20.04	20.10	20.08	
39	19.56	19.57	19.64	19.62	
40	20.16	20.20	20.26	20.23	
41	19.57	19.59	19.62	19.63	
42	19.77	19.79	19.89	19.85	
43	19.78	19.76	19.84	19.81	
44	19.93	19.94	19.98	19.93	
45	19.57	19.58	19.60	19.63	
46	19.60	19.62	19.68	19.65	
47	19.62	19.61	19.67	19.60	
48	19.76	19.77	19.86	19.85	
49	19.71	19.73	19.80	19.78	
50	19.46	19.47	19.54	19.53	
51	19.74	19.70	19.79	19.74	
52	20.01	20.05	20.13	20.10	
53	19.76	19.74	19.82	19.74	
54	19.55	19.58	19.67	19.65	
55	19.73	19.74	19.81	19.79	
56	19.67	19.69	19.75	19.73	
57	19.91	19.93	19.99	19.99	
58	19.56	19.59	19.64	19.58	
59	19.77	19.78	19.87	19.83	
60	20.07	20.08	20.16	20.18	
61	19.68	19.70	19.71	19.73	
62	19.89	19.94	20.03	19.95	
63	19.50	19.50	19.58	19.50	
Total MIMO PSD Power (mW/MHz)		6152.93	6239.79	6265.47	6219.34
Total MIMO PSD Power (dBm/MHz)		37.89	37.95	37.97	37.94
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		64.39	64.45	64.47	64.44
Limit (dBm/MHz)		65.15			


Table 8-7. Peak Power Spectral Density Table (n77_1C_40M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 23 of 137	



Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	20.04	20.08	20.15	20.33
	1	20.12	20.12	20.13	20.32
	2	20.11	20.16	20.20	20.40
	3	20.27	20.27	20.31	20.54
	4	20.07	20.15	20.20	20.37
	5	19.99	19.91	19.96	20.14
	6	20.09	20.10	20.10	20.27
	7	20.37	20.44	20.48	20.66
	8	20.18	20.22	20.32	20.45
	9	20.09	20.07	20.13	20.30
	10	20.22	20.26	20.30	20.43
	11	20.18	20.14	20.29	20.40
	12	19.74	19.75	19.79	19.94
	13	20.01	19.93	20.01	20.14
	14	20.23	20.18	20.24	20.39
	15	20.16	20.23	20.27	20.40
	16	20.41	20.27	20.35	20.52
	17	20.28	20.05	20.14	20.26
	18	20.21	20.05	20.10	20.20
	19	20.51	20.41	20.48	20.60
	20	20.25	20.14	20.19	20.31
	21	20.55	20.32	20.39	20.55
	22	20.24	20.07	20.12	20.27
	23	20.28	20.14	20.20	20.36
	24	20.28	20.08	20.18	20.32
	25	20.19	20.03	20.07	20.22
	26	20.24	20.06	20.11	20.27
	27	20.23	20.29	20.24	20.49
	28	20.15	20.12	20.11	20.31
	29	19.88	19.85	19.81	20.04
	30	20.11	20.06	20.05	20.28
	31	20.24	20.19	20.21	20.42
	32	19.81	19.72	19.78	20.03
	33	19.84	19.73	19.85	20.07
	34	20.07	19.95	20.10	20.25
	35	19.93	19.86	20.01	20.16
	36	20.00	19.99	20.12	20.29
	37	20.05	19.84	20.00	20.17
	38	20.25	20.16	20.24	20.41
	39	20.02	19.96	20.10	20.24
	40	19.89	19.85	19.99	20.13
	41	19.88	19.70	19.90	20.01
	42	20.34	20.26	20.40	20.52
	43	20.18	20.16	20.31	20.47
	44	20.17	20.08	20.19	20.35
	45	19.84	19.69	19.82	19.95
	46	20.49	20.35	20.45	20.61
	47	20.04	19.97	20.11	20.25
	48	19.84	19.74	19.88	20.01
	49	19.87	19.81	19.89	20.01
	50	20.01	19.93	20.02	20.14
	51	20.13	20.08	20.17	20.30
52	19.90	19.77	19.91	20.04	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 24 of 137	

	53	19.76	19.64	19.80	19.94
	54	20.16	20.06	20.20	20.32
	55	20.07	20.02	20.15	20.26
	56	20.10	19.96	20.12	20.23
	57	20.16	20.01	20.15	20.29
	58	20.31	20.20	20.34	20.47
	59	20.01	19.96	20.10	20.25
	60	19.92	19.81	19.96	20.10
	61	19.78	19.67	19.82	19.95
	62	20.09	20.00	20.14	20.28
	63	19.97	19.94	20.04	20.21
Total MIMO PSD Power (mW/MHz)		6563.44	6452.02	6584.06	6824.20
Total MIMO PSD Power (dBm/MHz)		38.17	38.10	38.18	38.34
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		64.67	64.60	64.68	64.84
Limit (dBm/MHz)		65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Mid	0	20.33	20.22	20.19	20.40
	1	20.29	20.23	20.11	20.38
	2	20.31	20.30	20.14	20.41
	3	20.33	20.28	20.24	20.39
	4	20.35	20.31	20.35	20.44
	5	20.08	20.05	20.06	20.15
	6	20.18	20.13	20.12	20.27
	7	20.44	20.38	20.39	20.55
	8	20.47	20.43	20.43	20.58
	9	20.27	20.19	20.25	20.36
	10	20.36	20.28	20.31	20.44
	11	20.32	20.29	20.31	20.41
	12	19.99	19.86	19.95	20.03
	13	20.24	20.23	20.22	20.34
	14	20.22	20.19	20.18	20.32
	15	20.29	20.27	20.26	20.38
	16	20.28	20.18	20.26	20.37
	17	20.15	20.06	20.10	20.23
	18	20.18	20.12	20.13	20.27
	19	20.64	20.58	20.61	20.74
	20	20.29	20.24	20.31	20.41
	21	20.41	20.36	20.42	20.54
	22	20.22	20.17	20.24	20.33
	23	20.42	20.34	20.41	20.51
	24	20.25	20.19	20.24	20.37
	25	20.49	20.45	20.49	20.63
	26	20.11	20.06	20.12	20.22
	27	20.45	20.39	20.46	20.57
	28	20.38	20.33	20.41	20.50
	29	20.20	20.18	20.23	20.34
	30	20.16	20.08	20.16	20.25
	31	20.33	20.27	20.35	20.45
	32	20.10	20.08	20.10	20.23
	33	20.00	19.95	20.02	20.11
	34	20.09	20.02	20.10	20.21
	35	20.04	20.03	20.08	20.21
36	20.05	20.00	20.04	20.18	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 25 of 137	

	37	19.81	19.74	19.86	19.92
	38	20.41	20.37	20.40	20.52
	39	20.22	20.18	20.23	20.37
	40	20.09	20.08	20.08	20.23
	41	20.00	19.97	20.02	20.12
	42	20.08	20.06	20.07	20.25
	43	20.32	20.27	20.32	20.43
	44	20.20	20.15	20.23	20.31
	45	19.89	19.86	19.92	20.01
	46	20.17	20.18	20.17	20.33
	47	20.00	20.04	20.05	20.20
	48	19.91	19.84	19.93	20.03
	49	19.94	19.87	19.93	20.05
	50	20.03	19.97	20.02	20.13
	51	20.17	20.11	20.17	20.28
	52	19.88	19.85	19.89	20.03
	53	19.92	19.92	19.94	20.05
	54	20.09	20.09	20.12	20.25
	55	20.14	20.12	20.17	20.29
	56	20.28	20.23	20.23	20.39
	57	20.22	20.17	20.23	20.33
	58	20.29	20.19	20.30	20.40
	59	20.16	20.12	20.19	20.29
	60	20.09	20.06	20.12	20.22
	61	19.96	19.93	19.97	20.06
	62	20.07	20.05	20.06	20.21
	63	20.05	20.05	20.07	20.18
Total MIMO PSD Power (mW/MHz)		6688.72	6619.62	6675.05	6866.57
Total MIMO PSD Power (dBm/MHz)		38.25	38.21	38.24	38.37
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		64.75	64.71	64.74	64.87
Limit (dBm/MHz)		65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
High	0	19.38	19.69	19.58	19.59
	1	19.52	19.80	19.71	19.69
	2	19.43	19.67	19.57	19.56
	3	19.56	19.82	19.70	19.73
	4	19.48	19.79	19.67	19.68
	5	19.49	19.76	19.65	19.66
	6	19.23	19.53	19.43	19.39
	7	19.49	19.72	19.62	19.59
	8	19.61	19.86	19.75	19.76
	9	19.17	19.44	19.38	19.34
	10	19.34	19.61	19.55	19.53
	11	19.36	19.61	19.53	19.53
	12	19.13	19.39	19.34	19.30
	13	19.47	19.71	19.62	19.62
	14	19.23	19.50	19.39	19.39
	15	19.33	19.60	19.49	19.52
	16	19.45	19.70	19.54	19.58
	17	19.42	19.69	19.57	19.59
	18	19.24	19.51	19.42	19.43
	19	19.79	20.09	19.95	19.98
20	19.49	19.71	19.60	19.61	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 26 of 137	

21	19.85	20.09	19.96	19.97	
22	19.27	19.49	19.40	19.45	
23	19.39	19.63	19.52	19.56	
24	19.32	19.58	19.45	19.50	
25	19.62	19.83	19.73	19.75	
26	19.17	19.40	19.26	19.31	
27	19.54	19.81	19.71	19.75	
28	19.43	19.71	19.56	19.63	
29	19.29	19.58	19.43	19.44	
30	19.25	19.51	19.34	19.39	
31	19.27	19.54	19.39	19.45	
32	19.13	19.40	19.28	19.32	
33	19.32	19.59	19.49	19.54	
34	19.12	19.39	19.28	19.33	
35	19.19	19.45	19.33	19.44	
36	19.36	19.60	19.49	19.55	
37	19.18	19.44	19.26	19.32	
38	19.55	19.84	19.69	19.77	
39	19.25	19.49	19.36	19.43	
40	19.61	19.86	19.71	19.77	
41	19.12	19.36	19.26	19.30	
42	19.30	19.61	19.43	19.53	
43	19.43	19.67	19.53	19.61	
44	19.40	19.66	19.50	19.60	
45	19.11	19.38	19.24	19.27	
46	19.14	19.43	19.27	19.33	
47	19.12	19.41	19.19	19.33	
48	19.20	19.48	19.31	19.43	
49	19.25	19.53	19.35	19.39	
50	19.02	19.28	19.16	19.19	
51	19.21	19.57	19.35	19.41	
52	19.49	19.76	19.55	19.60	
53	19.25	19.59	19.29	19.41	
54	19.12	19.44	19.24	19.31	
55	19.31	19.61	19.47	19.49	
56	19.18	19.52	19.34	19.38	
57	19.48	19.80	19.63	19.66	
58	19.02	19.36	19.12	19.21	
59	19.26	19.57	19.41	19.45	
60	19.56	19.86	19.69	19.76	
61	19.19	19.47	19.33	19.40	
62	19.41	19.68	19.55	19.62	
63	19.01	19.32	19.15	19.20	
Total MIMO PSD Power (mW/MHz)		5493.59	5849.42	5668.83	5720.02
Total MIMO PSD Power (dBm/MHz)		37.40	37.67	37.53	37.57
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		63.90	64.17	64.03	64.07
Limit (dBm/MHz)		65.15			

Table 8-8. Peak Power Spectral Density Table (n77_1C_60M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 27 of 137	



Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	19.13	19.14	19.16	19.18
	1	19.12	19.09	19.11	19.15
	2	19.24	19.21	19.25	19.25
	3	19.35	19.35	19.38	19.39
	4	19.27	19.23	19.22	19.30
	5	19.00	18.99	18.98	19.03
	6	19.10	19.05	19.07	19.10
	7	19.39	19.40	19.42	19.46
	8	19.21	19.20	19.23	19.25
	9	19.09	19.07	19.11	19.13
	10	19.24	19.22	19.24	19.27
	11	19.30	19.30	19.29	19.36
	12	18.86	18.89	18.90	18.91
	13	18.95	18.95	18.95	18.99
	14	19.24	19.19	19.23	19.29
	15	19.24	19.22	19.23	19.31
	16	19.28	19.30	19.32	19.35
	17	19.02	19.01	19.06	19.08
	18	18.95	18.92	18.95	18.98
	19	19.43	19.40	19.47	19.45
	20	19.07	19.07	19.11	19.10
	21	19.30	19.28	19.34	19.33
	22	19.08	19.05	19.09	19.09
	23	19.19	19.15	19.22	19.22
	24	19.16	19.13	19.15	19.13
	25	18.96	18.96	19.00	18.98
	26	19.03	19.03	19.05	19.06
	27	19.30	19.28	19.29	19.31
	28	19.17	19.15	19.19	19.15
	29	18.89	18.85	18.92	18.74
	30	19.03	19.01	19.04	18.93
	31	19.19	19.21	19.22	19.12
	32	18.80	18.80	18.83	18.76
	33	18.88	18.86	18.88	18.87
	34	19.08	19.06	19.07	19.03
	35	18.98	18.95	18.97	18.95
	36	19.12	19.10	19.13	19.11
	37	19.00	18.96	19.01	18.95
	38	19.16	19.15	19.19	19.15
	39	18.95	18.95	18.96	18.94
	40	18.96	18.95	18.97	18.90
	41	18.86	18.83	18.88	18.82
	42	19.29	19.26	19.28	19.24
	43	19.25	19.26	19.26	19.23
	44	19.16	19.14	19.21	19.12
	45	18.73	18.70	18.71	18.71
	46	19.41	19.36	19.38	19.39
	47	19.06	19.05	19.08	19.07
	48	18.88	18.86	18.88	18.89
	49	18.78	18.76	18.79	18.81
	50	18.92	18.87	18.91	18.92
	51	19.11	19.07	19.10	19.11
52	18.82	18.82	18.86	18.89	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 28 of 137	

	53	18.81	18.75	18.81	18.80
	54	19.11	19.08	19.11	19.11
	55	19.06	19.02	19.08	19.05
	56	19.11	19.08	19.09	19.10
	57	19.07	19.07	19.12	19.10
	58	19.31	19.26	19.30	19.31
	59	19.05	19.00	19.05	19.06
	60	18.93	18.91	18.92	18.92
	61	18.81	18.80	18.81	18.83
	62	19.06	18.98	19.06	19.09
	63	19.00	18.95	18.98	19.01
Total MIMO PSD Power (mW/MHz)		5184.65	5159.57	5194.60	5191.06
Total MIMO PSD Power (dBm/MHz)		37.15	37.13	37.16	37.15
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		63.65	63.63	63.66	63.65
Limit (dBm/MHz)		65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Mid	0	19.29	19.35	19.39	19.36
	1	19.28	19.37	19.36	19.35
	2	19.26	19.33	19.38	19.37
	3	19.30	19.37	19.40	19.38
	4	19.36	19.43	19.47	19.45
	5	19.14	19.18	19.22	19.15
	6	19.15	19.21	19.25	19.22
	7	19.42	19.48	19.54	19.50
	8	19.43	19.50	19.54	19.53
	9	19.26	19.35	19.35	19.30
	10	19.26	19.38	19.37	19.34
	11	19.30	19.38	19.40	19.36
	12	18.84	19.00	18.94	18.89
	13	19.17	19.25	19.29	19.27
	14	19.29	19.33	19.37	19.32
	15	19.30	19.36	19.35	19.36
	16	19.24	19.33	19.35	19.29
	17	19.12	19.20	19.21	19.16
	18	19.10	19.19	19.19	19.16
	19	19.61	19.69	19.70	19.66
	20	19.24	19.32	19.36	19.31
	21	19.39	19.47	19.49	19.45
	22	19.18	19.27	19.28	19.24
	23	19.36	19.43	19.47	19.43
	24	19.24	19.30	19.34	19.30
	25	19.45	19.53	19.53	19.51
	26	19.10	19.18	19.20	19.16
	27	19.44	19.51	19.52	19.48
	28	19.34	19.42	19.46	19.42
	29	19.24	19.29	19.34	19.30
	30	19.17	19.25	19.25	19.23
	31	19.37	19.43	19.46	19.41
	32	19.05	19.15	19.16	19.15
	33	18.97	19.05	19.06	19.02
	34	19.08	19.15	19.16	19.12
	35	19.07	19.15	19.16	19.12
36	19.05	19.14	19.18	19.12	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 29 of 137	

	37	18.87	18.95	18.94	18.90
	38	19.35	19.45	19.42	19.40
	39	19.20	19.29	19.31	19.27
	40	19.12	19.20	19.22	19.16
	41	18.99	19.06	19.07	19.05
	42	19.11	19.18	19.18	19.17
	43	19.34	19.42	19.43	19.39
	44	19.11	19.26	19.24	19.20
	45	18.87	18.96	18.92	18.94
	46	19.22	19.29	19.32	19.29
	47	19.03	19.10	19.11	19.10
	48	18.91	18.95	18.99	18.97
	49	18.92	18.99	18.98	18.97
	50	19.01	19.12	19.08	19.04
	51	19.14	19.22	19.25	19.19
	52	18.92	18.96	19.02	18.99
	53	18.92	19.00	18.98	18.96
	54	19.15	19.24	19.23	19.23
	55	19.21	19.25	19.26	19.25
	56	19.32	19.37	19.38	19.39
	57	19.15	19.26	19.24	19.23
	58	19.21	19.30	19.31	19.31
	59	19.22	19.23	19.22	19.22
	60	19.12	19.18	19.18	19.18
	61	18.93	19.04	19.01	19.03
	62	19.19	19.25	19.22	19.25
	63	19.10	19.18	19.17	19.16
	Total MIMO PSD Power (mW/MHz)	5301.69	5395.26	5411.36	5376.93
	Total MIMO PSD Power (dBm/MHz)	37.24	37.32	37.33	37.31
	Antenna Gain (dBi)	26.50	26.50	26.50	26.50
	EIRP (dBm/MHz)	63.74	63.82	63.83	63.81
	Limit (dBm/MHz)	65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
High	0	18.45	18.66	18.54	18.51
	1	18.58	18.78	18.62	18.64
	2	18.31	18.56	18.38	18.39
	3	18.50	18.74	18.57	18.58
	4	18.50	18.74	18.59	18.58
	5	18.41	18.67	18.50	18.50
	6	18.18	18.42	18.27	18.24
	7	18.47	18.67	18.52	18.50
	8	18.59	18.81	18.66	18.65
	9	18.20	18.43	18.29	18.24
	10	18.35	18.56	18.43	18.39
	11	18.31	18.53	18.36	18.34
	12	18.03	18.25	18.11	18.06
	13	18.44	18.67	18.51	18.50
	14	18.23	18.46	18.32	18.27
	15	18.26	18.51	18.34	18.33
	16	18.45	18.67	18.53	18.52
	17	18.42	18.64	18.49	18.49
	18	18.15	18.41	18.24	18.22
	19	18.76	18.99	18.86	18.81
20	18.39	18.63	18.47	18.46	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 30 of 137	

21	18.69	18.91	18.77	18.75	
22	18.29	18.52	18.37	18.36	
23	18.29	18.49	18.32	18.29	
24	18.38	18.57	18.45	18.40	
25	18.49	18.70	18.56	18.51	
26	18.19	18.41	18.26	18.24	
27	18.53	18.74	18.59	18.57	
28	18.40	18.64	18.47	18.45	
29	18.30	18.52	18.37	18.35	
30	18.23	18.44	18.31	18.27	
31	18.34	18.53	18.42	18.37	
32	18.16	18.36	18.22	18.16	
33	18.36	18.57	18.44	18.41	
34	18.11	18.37	18.17	18.16	
35	18.13	18.38	18.22	18.19	
36	18.33	18.54	18.39	18.37	
37	18.05	18.30	18.16	18.11	
38	18.48	18.71	18.57	18.54	
39	18.16	18.39	18.23	18.20	
40	18.59	18.82	18.68	18.69	
41	18.08	18.32	18.14	18.15	
42	18.28	18.54	18.34	18.33	
43	18.33	18.56	18.42	18.39	
44	18.33	18.50	18.38	18.34	
45	18.04	18.27	18.10	18.11	
46	18.22	18.41	18.28	18.23	
47	18.22	18.40	18.25	18.24	
48	18.25	18.43	18.30	18.28	
49	18.13	18.33	18.18	18.17	
50	18.04	18.25	18.10	18.08	
51	18.21	18.41	18.23	18.24	
52	18.40	18.63	18.49	18.47	
53	18.11	18.27	18.17	18.19	
54	18.11	18.34	18.19	18.18	
55	18.22	18.41	18.27	18.25	
56	18.20	18.43	18.31	18.28	
57	18.41	18.64	18.47	18.48	
58	18.00	18.21	18.07	18.03	
59	18.21	18.43	18.32	18.28	
60	18.43	18.62	18.51	18.50	
61	18.09	18.33	18.17	18.15	
62	18.34	18.58	18.43	18.39	
63	18.13	18.33	18.22	18.16	
Total MIMO PSD Power (mW/MHz)		4330.14	4555.92	4403.72	4382.16
Total MIMO PSD Power (dBm/MHz)		36.37	36.59	36.44	36.42
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		62.87	63.09	62.94	62.92
Limit (dBm/MHz)		65.15			



Table 8-9. Peak Power Spectral Density Table (n77_1C_80M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 31 of 137	



Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	18.14	18.29	18.13	18.07
	1	18.18	18.29	18.11	18.09
	2	18.18	18.35	18.19	18.13
	3	18.34	18.50	18.29	18.29
	4	18.35	18.42	18.24	18.20
	5	17.97	18.15	17.98	17.91
	6	18.12	18.28	18.08	18.05
	7	18.39	18.54	18.34	18.29
	8	18.19	18.33	18.18	18.09
	9	18.18	18.31	18.12	18.07
	10	18.34	18.45	18.27	18.20
	11	18.27	18.45	18.22	18.17
	12	17.83	17.97	17.86	17.76
	13	18.09	18.24	18.03	17.99
	14	18.20	18.38	18.17	18.12
	15	18.22	18.43	18.19	18.14
	16	18.32	18.42	18.29	18.21
	17	18.16	18.31	18.05	18.06
	18	18.11	18.24	18.03	18.01
	19	18.53	18.63	18.47	18.40
	20	18.15	18.29	18.10	18.03
	21	18.40	18.54	18.29	18.30
	22	18.09	18.22	18.07	17.97
	23	18.20	18.33	18.17	18.07
	24	18.12	18.26	18.12	18.00
	25	18.06	18.19	17.97	17.92
	26	18.08	18.22	18.02	17.94
	27	18.34	18.48	18.30	18.19
	28	18.22	18.39	18.21	18.12
	29	17.95	18.09	17.89	17.79
	30	18.07	18.19	18.02	17.95
	31	18.21	18.32	18.18	18.09
	32	17.85	18.00	17.82	17.74
	33	17.92	18.05	17.87	17.79
	34	18.05	18.20	18.04	17.94
	35	17.95	18.11	17.89	17.88
	36	18.15	18.27	18.10	18.07
	37	17.98	18.15	17.96	17.90
	38	18.17	18.32	18.14	18.08
	39	17.94	18.08	17.93	17.88
	40	17.99	18.12	17.96	17.91
	41	17.93	18.06	17.92	17.82
	42	18.27	18.40	18.26	18.20
	43	18.25	18.35	18.19	18.12
	44	18.19	18.28	18.17	18.05
	45	17.88	18.02	17.83	17.76
	46	18.42	18.49	18.33	18.25
	47	18.08	18.17	18.02	17.93
	48	17.89	18.07	17.91	17.85
	49	17.88	17.96	17.76	17.71
	50	17.99	18.09	17.98	17.85
	51	18.10	18.21	18.06	18.04
52	17.90	18.03	17.87	17.83	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 32 of 137	

	53	17.87	17.96	17.75	17.74
	54	18.13	18.26	18.11	18.06
	55	18.03	18.12	17.99	17.91
	56	18.15	18.26	18.10	17.99
	57	18.14	18.24	18.07	18.03
	58	18.32	18.43	18.27	18.18
	59	18.06	18.15	18.01	17.94
	60	17.93	18.09	17.86	17.81
	61	17.85	17.97	17.79	17.71
	62	18.10	18.17	18.04	17.93
	63	17.98	18.09	17.96	17.87
Total MIMO PSD Power (mW/MHz)		4148.03	4274.61	4107.06	4046.57
Total MIMO PSD Power (dBm/MHz)		36.18	36.31	36.14	36.07
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		62.68	62.81	62.64	62.57
Limit (dBm/MHz)		65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Mid	0	18.52	18.13	18.21	18.27
	1	18.58	18.11	18.15	18.21
	2	18.55	18.10	18.18	18.23
	3	18.58	18.20	18.24	18.27
	4	18.65	18.19	18.28	18.34
	5	18.23	17.95	18.04	18.06
	6	18.27	18.01	18.05	18.11
	7	18.57	18.31	18.37	18.48
	8	18.60	18.22	18.33	18.48
	9	18.37	18.08	18.10	18.27
	10	18.40	18.18	18.18	18.32
	11	18.42	18.23	18.25	18.40
	12	17.96	17.75	17.73	17.89
	13	18.30	18.17	18.09	18.21
	14	18.41	18.28	18.18	18.34
	15	18.42	18.32	18.24	18.37
	16	18.38	18.24	18.17	18.32
	17	18.23	18.12	17.96	17.89
	18	18.21	18.14	18.00	17.94
	19	18.44	18.63	18.51	18.53
	20	18.06	18.26	18.17	18.21
	21	18.22	18.38	18.27	18.34
	22	18.02	18.24	18.12	18.18
	23	18.15	18.36	18.26	18.31
	24	18.03	18.27	18.14	18.19
	25	18.20	18.42	18.26	18.32
	26	17.93	18.13	18.03	18.05
	27	18.21	18.39	18.30	18.32
	28	18.14	18.37	18.26	18.27
	29	18.08	18.23	18.13	18.15
	30	18.00	18.18	18.08	18.12
	31	18.18	18.34	18.26	18.29
	32	17.91	18.08	18.01	18.03
	33	17.81	17.95	17.91	17.95
	34	17.86	18.05	17.97	18.02
	35	17.88	18.07	17.99	18.01
36	17.92	18.10	18.00	18.05	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 33 of 137	

	37	17.69	17.89	17.70	17.77
	38	18.14	18.31	18.23	18.26
	39	18.02	18.20	18.07	18.15
	40	17.90	18.09	17.99	18.02
	41	17.79	17.97	17.85	17.87
	42	17.91	18.17	18.00	18.04
	43	18.14	18.36	18.24	18.24
	44	17.91	18.16	18.04	18.04
	45	17.65	17.62	17.72	17.80
	46	18.01	18.06	18.13	18.18
	47	17.86	17.89	17.96	17.97
	48	17.75	17.84	17.84	17.89
	49	17.70	17.71	17.66	17.75
	50	17.84	17.90	17.89	17.92
	51	17.98	18.02	18.06	18.10
	52	17.81	17.81	17.85	17.89
	53	17.72	17.79	17.77	17.83
	54	17.99	18.08	18.07	18.10
	55	17.96	18.05	18.06	18.11
	56	18.05	18.13	18.10	18.22
	57	17.95	18.01	18.00	18.10
	58	18.00	18.11	18.10	18.15
	59	17.91	18.00	18.00	18.08
	60	17.89	17.93	17.93	17.99
	61	17.78	17.79	17.80	17.90
	62	17.98	18.10	18.06	18.15
	63	17.86	18.00	17.99	18.08
	Total MIMO PSD Power (mW/MHz)	4131.10	4146.78	4107.32	4163.90
	Total MIMO PSD Power (dBm/MHz)	36.16	36.18	36.14	36.19
	Antenna Gain (dBi)	26.50	26.50	26.50	26.50
	EIRP (dBm/MHz)	62.66	62.68	62.64	62.69
	Limit (dBm/MHz)	65.15			
Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
High	0	17.77	18.02	17.86	17.79
	1	17.94	18.14	18.03	17.93
	2	17.58	17.76	17.65	17.56
	3	17.85	18.00	17.90	17.80
	4	17.84	17.99	17.87	17.80
	5	17.72	17.86	17.76	17.66
	6	17.46	17.60	17.51	17.41
	7	17.85	17.98	17.88	17.81
	8	17.89	18.02	17.92	17.84
	9	17.55	17.70	17.58	17.49
	10	17.70	17.84	17.73	17.67
	11	17.69	17.82	17.72	17.64
	12	17.42	17.57	17.48	17.40
	13	17.71	17.84	17.75	17.69
	14	17.60	17.74	17.67	17.61
	15	17.61	17.76	17.66	17.62
	16	17.47	17.81	17.72	17.69
	17	17.47	17.81	17.72	17.68
	18	17.37	17.67	17.60	17.54
	19	17.86	18.22	18.12	18.09
20	17.49	17.83	17.74	17.71	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 34 of 137	

21	17.66	18.00	17.92	17.88	
22	17.49	17.77	17.69	17.61	
23	17.42	17.76	17.64	17.62	
24	17.77	17.88	17.78	17.75	
25	17.90	18.04	17.94	17.89	
26	17.53	17.68	17.58	17.53	
27	17.87	18.00	17.92	17.86	
28	17.69	17.80	17.72	17.67	
29	17.62	17.74	17.67	17.61	
30	17.59	17.73	17.64	17.60	
31	17.65	17.82	17.76	17.66	
32	17.49	17.66	17.56	17.49	
33	17.64	17.82	17.70	17.64	
34	17.44	17.63	17.52	17.33	
35	17.49	17.66	17.57	17.38	
36	17.69	17.87	17.76	17.58	
37	17.35	17.51	17.41	17.26	
38	17.75	17.92	17.81	17.66	
39	17.58	17.73	17.63	17.45	
40	17.87	18.01	17.92	17.75	
41	17.43	17.58	17.48	17.37	
42	17.60	17.78	17.68	17.55	
43	17.74	17.88	17.79	17.70	
44	17.58	17.75	17.62	17.51	
45	17.34	17.50	17.40	17.32	
46	17.55	17.72	17.61	17.53	
47	17.50	17.70	17.55	17.49	
48	17.51	17.65	17.53	17.49	
49	17.32	17.51	17.39	17.32	
50	17.35	17.51	17.38	17.31	
51	17.52	17.67	17.47	17.53	
52	17.70	17.83	17.72	17.72	
53	17.39	17.53	17.34	17.37	
54	17.52	17.67	17.49	17.51	
55	17.60	17.75	17.58	17.59	
56	17.57	17.72	17.58	17.59	
57	17.67	17.81	17.65	17.67	
58	17.35	17.51	17.33	17.41	
59	17.56	17.72	17.56	17.57	
60	17.80	17.97	17.79	17.83	
61	17.40	17.55	17.39	17.44	
62	17.71	17.88	17.70	17.73	
63	17.48	17.64	17.46	17.49	
Total MIMO PSD Power (mW/MHz)		3685.80	3839.19	3739.75	3689.58
Total MIMO PSD Power (dBm/MHz)		35.67	35.84	35.73	35.67
Antenna Gain (dBi)		26.50	26.50	26.50	26.50
EIRP (dBm/MHz)		62.17	62.34	62.23	62.17
Limit (dBm/MHz)		65.15			

Table 8-10. Peak Power Spectral Density Table (n77_1C_100M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 35 of 137	

Channel	Port	PSD Power (dBm/MHz)	
		QPSK	QAM
Mid	0	16.81	16.47
	1	16.73	16.47
	2	16.80	16.59
	3	16.91	16.72
	4	16.89	16.59
	5	16.55	16.34
	6	16.68	16.45
	7	16.93	16.71
	8	16.94	16.51
	9	16.81	16.41
	10	16.93	16.61
	11	16.89	16.57
	12	16.41	16.15
	13	16.74	16.36
	14	16.76	16.52
	15	16.86	16.53
	16	16.84	16.61
	17	16.70	16.44
	18	16.65	16.38
	19	17.10	16.77
	20	16.79	16.38
	21	16.95	16.65
	22	16.63	16.36
	23	16.83	16.46
	24	16.70	16.42
	25	16.89	16.37
	26	16.54	16.33
	27	16.92	16.69
	28	16.89	16.51
	29	16.69	14.88
	30	16.61	16.33
	31	16.84	16.52
	32	16.53	16.10
	33	16.41	16.20
	34	16.52	16.37
	35	16.51	16.26
	36	16.66	16.44
	37	16.54	16.31
	38	16.73	16.44
	39	16.57	16.24
	40	16.60	16.28
	41	16.49	16.20
	42	16.81	16.58
	43	16.78	16.54
	44	16.69	16.44
	45	16.39	16.09
	46	16.91	16.69
	47	16.55	16.30
	48	16.48	16.21
	49	16.42	16.16
	50	16.50	16.30
	51	16.63	16.47
52	16.45	16.25	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 36 of 137	

53	16.46	16.15
54	16.62	16.48
55	16.60	16.48
56	16.77	16.60
57	16.66	16.61
58	16.81	16.76
59	16.60	16.55
60	16.53	16.42
61	16.39	16.31
62	16.54	16.50
63	16.50	16.49
Total MIMO PSD Power (mW/MHz)	2985.37	2805.43
Total MIMO PSD Power (dBm/MHz)	34.75	34.48
Antenna Gain (dBi)	26.50	26.50
EIRP (dBm/MHz)	61.25	60.98
Limit (dBm/MHz)	65.15	

Table 8-11. Peak Power Spectral Density Table (n77_2C_100M+40M)



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 37 of 137	


Channel	Port	PSD Power (dBm/MHz)	
		QPSK	QAM
Mid	0	14.93	15.23
	1	14.92	15.06
	2	14.96	15.15
	3	15.13	15.26
	4	15.16	15.19
	5	14.96	14.91
	6	15.03	15.05
	7	15.35	15.29
	8	15.31	15.14
	9	15.12	15.04
	10	15.32	15.20
	11	15.08	15.21
	12	14.70	14.76
	13	14.87	15.00
	14	15.04	15.13
	15	15.09	15.17
	16	15.14	15.16
	17	14.92	15.03
	18	14.85	14.96
	19	15.33	15.39
	20	14.98	15.01
	21	15.16	15.25
	22	14.94	14.99
	23	15.11	15.17
	24	15.02	15.05
	25	15.07	15.13
	26	14.90	14.97
	27	15.18	15.37
	28	15.07	15.18
	29	14.88	14.92
	30	14.91	14.98
	31	15.12	15.21
	32	14.80	14.79
	33	14.77	14.86
	34	14.98	15.02
	35	14.85	14.93
	36	15.01	15.09
	37	14.88	14.98
	38	15.09	15.11
	39	14.95	14.94
	40	14.90	14.92
	41	14.79	14.87
	42	15.19	15.22
	43	15.16	15.19
	44	15.09	15.16
	45	14.71	14.76
	46	15.28	15.30
	47	14.97	14.98
	48	14.86	14.88
	49	14.82	14.84
	50	14.91	14.93
	51	15.08	15.09
52	14.85	14.86	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 38 of 137	

	53	14.78	14.80
	54	15.02	15.10
	55	15.06	15.01
	56	15.09	15.14
	57	15.05	15.11
	58	15.22	15.23
	59	15.02	15.08
	60	14.89	14.93
	61	14.74	14.77
	62	15.01	14.99
	63	14.95	15.01
	Total MIMO PSD Power (mW/MHz)	2027.40	2050.22
	Total MIMO PSD Power (dBm/MHz)	33.07	33.12
	Antenna Gain (dBi)	26.50	26.50
	EIRP (dBm/MHz)	59.57	59.62
	Limit (dBm/MHz)	65.15	

Table 8-12. Peak Power Spectral Density Table (n77_2C_100M+100M)


FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 39 of 137	

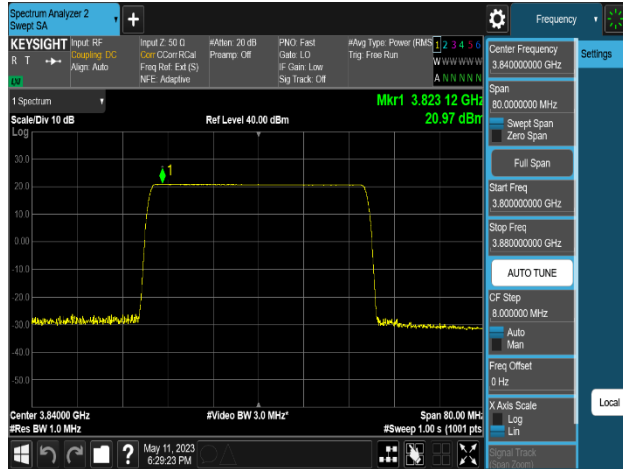


Plot 8-13. Power Spectral Density Plot
(n77_1C_40M_QPSK - Mid Channel, Port 57)




Plot 8-14. Power Spectral Density Plot
(n77_1C_40M_64QAM - Mid Channel, Port 57)

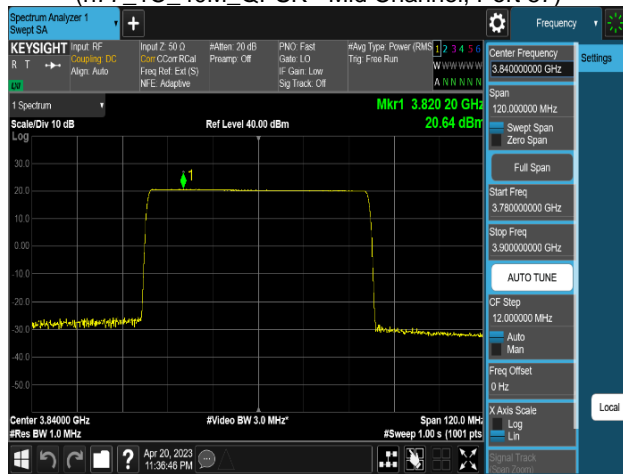


Plot 8-15. Power Spectral Density Plot
(n77_1C_60M_QPSK - Mid Channel, Port 19)

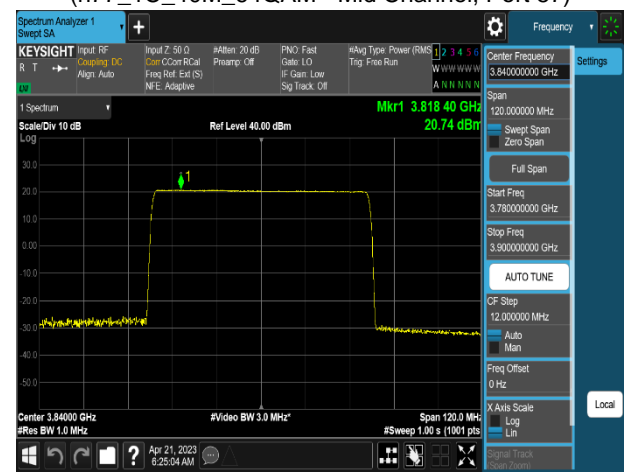

Plot 8-16. Power Spectral Density Plot
(n77_1C_60M_256QAM - Mid Channel, Port 19)

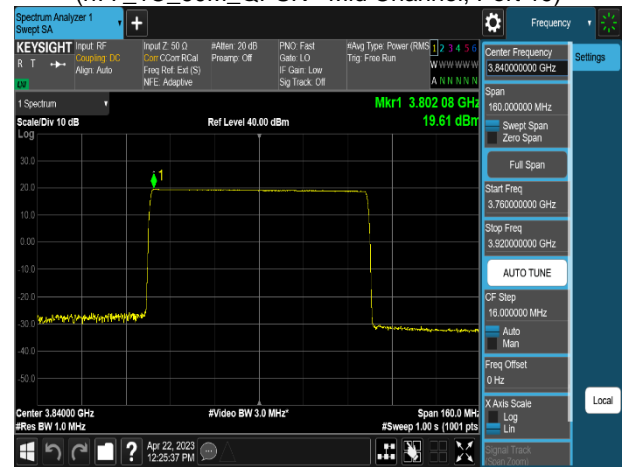

Plot 8-17. Power Spectral Density Plot
(n77_1C_80M_QPSK - Mid Channel, Port 19)

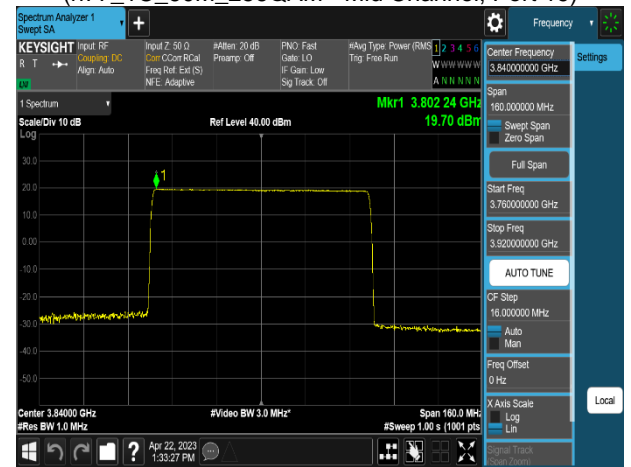

Plot 8-18. Power Spectral Density Plot
(n77_1C_80M_64QAM - Mid Channel, Port 19)


FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 40 of 137




Plot 8-19. Power Spectral Density Plot
(n77_1C_100M_QPSK - Mid Channel, Port 4)




Plot 8-20. Power Spectral Density Plot
(n77_1C_100M_16QAM - Mid Channel, Port 19)

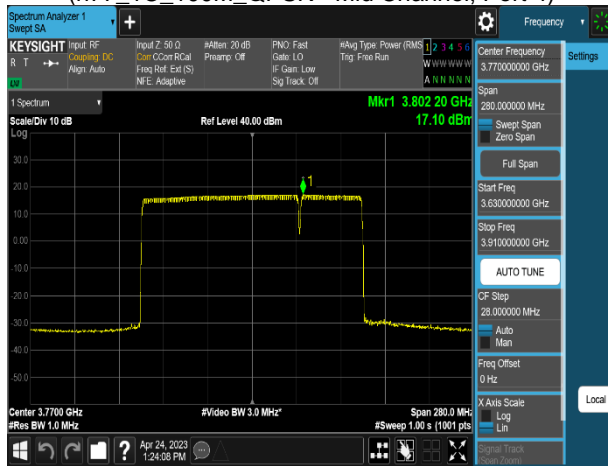


Plot 8-21. Power Spectral Density Plot
(n77_2C_100M+40M_QPSK - Mid Channel, Port 19)

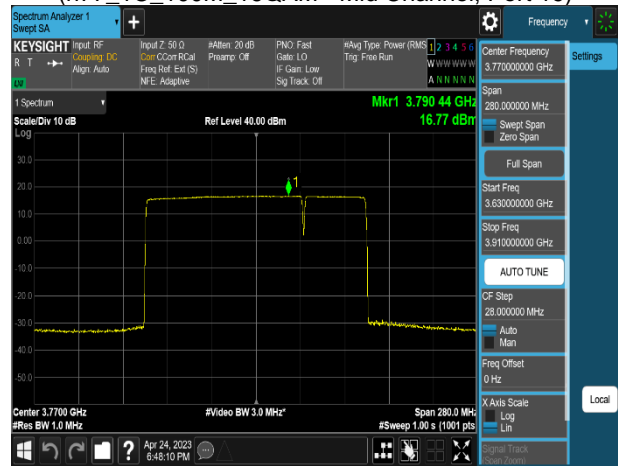

Plot 8-22. Power Spectral Density Plot
(n77_2C_100M+40M_16QAM - Mid Channel, Port 19)

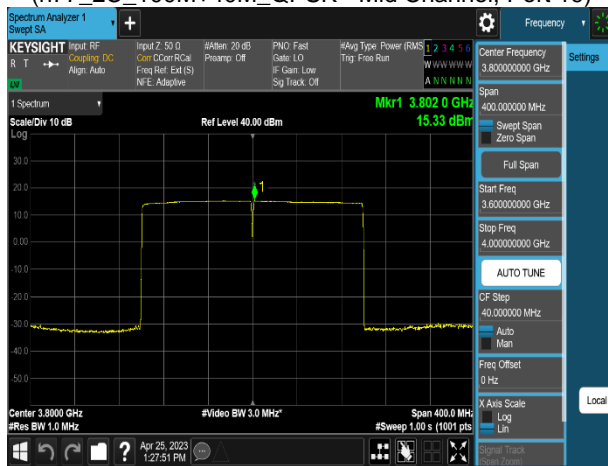

Plot 8-23. Power Spectral Density Plot
(n77_2C_100M+100M_QPSK - Mid Channel, Port 19)

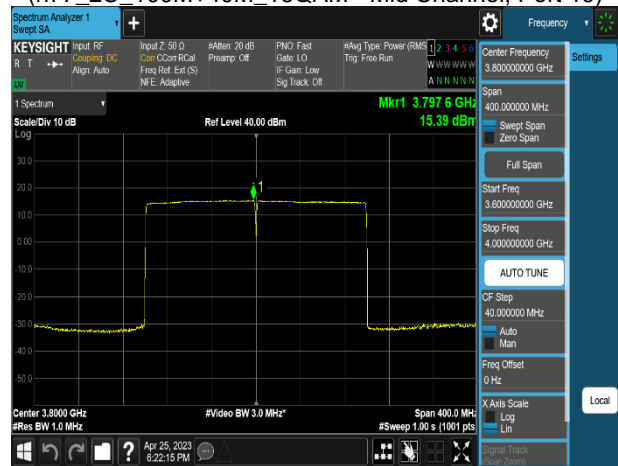

Plot 8-24. Power Spectral Density Plot
(n77_2C_100M+100M_16QAM - Mid Channel, Port 19)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 41 of 137

8.4 Peak To Average Ratio

Test Overview

The peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7

ANSI C63.26-2015 – Section 5.2.3.4

Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's CCDF function is enabled.
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 8-3. Test Instrument & Measurement Setup

Limit

The peak-to-average power ratio (PAPR) limit shall not exceed 13 dB for more than 0.1% of the time.

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 42 of 137

Channel	PAPR (dB)				Limit (dB)
	QPSK	16QAM	64QAM	256QAM	
Low	8.40	8.39	8.23	8.39	≤ 13
Middle	8.45	8.50	8.17	8.38	
High	8.36	8.49	8.24	8.38	

Table 8-13. Peak To Average Power Ratio Summary Data (n77_1C_40M)

Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low		7.63	7.64	7.73	7.65	≤ 13
Middle		7.58	7.61	7.59	7.58	
High		7.71	7.76	7.75	7.60	

Table 8-14. Peak To Average Power Ratio Summary Data (n77_1C_60M)

Channel	PAPR (dB)				Limit (dB)
	QPSK	16QAM	64QAM	256QAM	
Low	7.69	7.64	7.77	7.69	≤ 13
Middle	7.63	7.62	7.75	7.64	
High	7.78	7.76	7.91	7.81	



Table 8-15. Peak To Average Power Ratio Summary Data (n77_1C_80M)


Channel	PAPR (dB)				Limit (dB)
	QPSK	16QAM	64QAM	256QAM	
Low	7.74	7.80	7.76	7.76	≤ 13
Middle	7.57	7.55	7.60	7.66	
High	7.79	7.75	7.84	7.89	

Table 8-16. Peak To Average Power Ratio Summary Data (n77_1C_100M)

Channel	PAPR (dB)		Limit (dB)
	n77_2C_100M+40M	n77_2C_100M+100M	
	QPSK	QPSK	
Middle	7.92	7.96	≤ 13

Table 8-17. Peak To Average Power Ratio Summary Data (n77_2C_Multi-Carrier)


FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 43 of 137

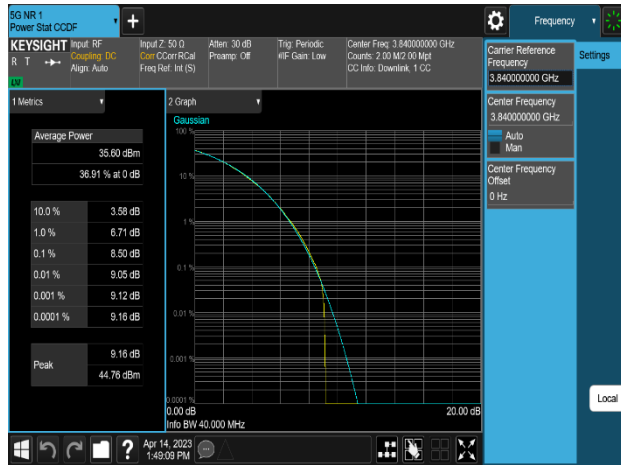


Plot 8-25. Peak To Average Power Ratio Plot (n77_1C_40M_16QAM - Mid Channel)




Plot 8-26. Peak To Average Power Ratio Plot (n77_1C_60M_16QAM - High Channel)

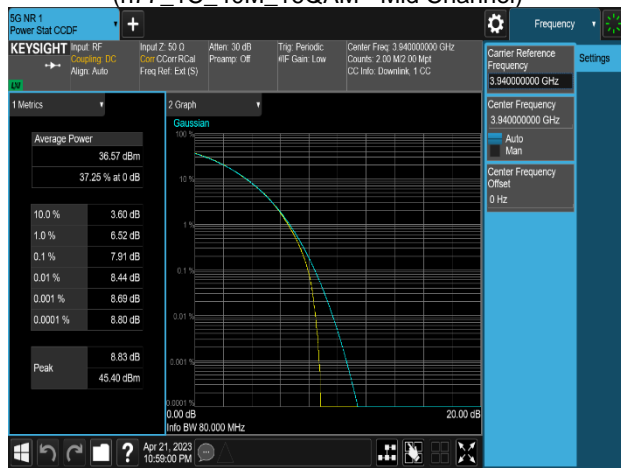

Plot 8-27. Peak To Average Power Ratio Plot (n77_1C_80M_64QAM - High Channel)

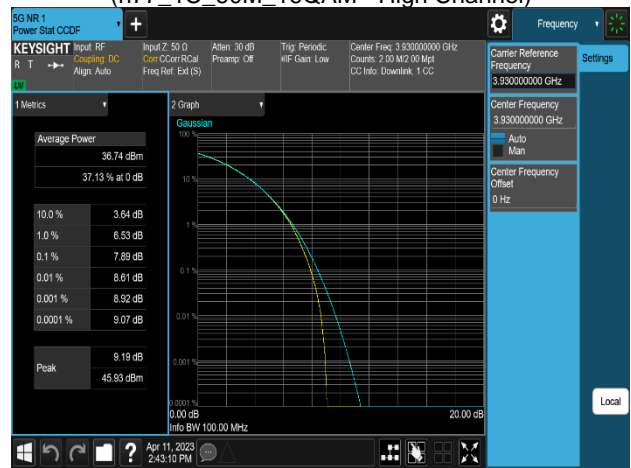

Plot 8-28. Peak To Average Power Ratio Plot (n77_1C_100M_256QAM - High Channel)

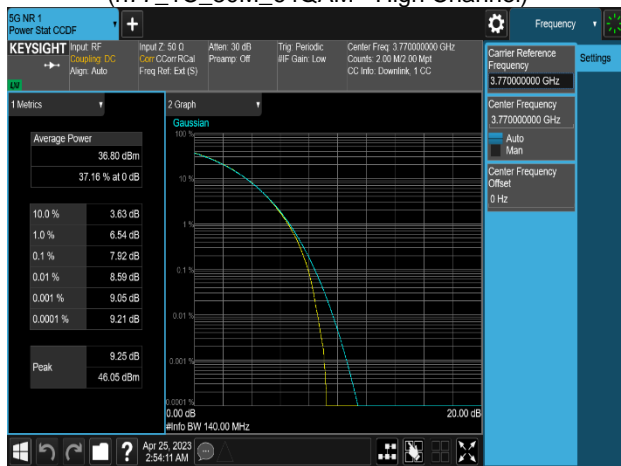

Plot 8-29. Peak To Average Power Ratio Plot (n77_2C_100+40M_QPSK - Mid Channel)



Plot 8-30. Peak To Average Power Ratio Plot (n77_2C_100+100M_QPSK - Mid Channel)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 44 of 137

8.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

ii) Measure and sum spectral maxima across the outputs

ANSI C63.26-2015 – Section 5.7.3

Test Setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW: Please see test notes below.
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit

The power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.







Figure 8-4. Test Instrument & Measurement Setup

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 45 of 137

Test Notes

1. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
2. When the Band edge emissions performed using the method KDB 971168 D01 v03r01 - Section E) 3) iii) detect with a margin of under 1dB to limit, the integration method was performed using the spectrum analyzer's band power functions according to ANSI C63.26-2015 – Section 5.7 and using the method KDB 971168 D01 v03r01 - Section E) 3) ii). The integration value was set to a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter.
3. Consider the following factors for MIMO:
The Band edge emissions per each port is measured as dBm/MHz or dBm, the emissions are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01 - Section E) 3) ii).
4. The Band edge emissions per port (dBm/MHz or dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO Conducted emissions (mW). We convert this back to logarithmic scale for further output power calculations.
5. Periodic trigger was used with gating ON. Gate sweep time, Gate delay and gate length were set accordingly to capture ON time of the transmission.
6. When sweep triggering/signal gating did not used, The test result added value of the transmitter duty cycle.
7. All transmit signals from different antennas are completely uncorrelated with each other. So the maximum emissions shall be calculated based on the aggregate emission conducted across all antennas.
8. Sample Calculation:
Let us assume the following numbers:
 - a) Total MIMO Emission power as 0.031 milliWatts
 - b)



	Factors	Value	Unit
Summed MIMO Emission power (linear sum)		0.031	mW
Summed MIMO Emission power (dBm)	$= 10 * \log (0.031) =$	-15.09	dBm
Limit		-13	dBm
Margin	$= \text{Summed MIMO Emission power (dBm)} - \text{Limit}$	-2.09	dB

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 46 of 137	

CH	Port	Max. Value (dBm)					
		QPSK			16QAM		
		3699 to 3699.4 MHz	3699.4 to 3699.8 MHz	3699.6 to 3700 MHz	3699 to 3699.4 MHz	3699.4 to 3699.8 MHz	3699.6 to 3700 MHz
Low	0	-33.28	-33.18	-33.42	-35.18	-35.21	-33.88
	1	-35.01	-34.99	-33.57	-34.98	-34.99	-33.60
	2	-34.69	-34.75	-33.17	-34.32	-34.19	-32.78
	3	-34.80	-34.76	-33.33	-34.29	-34.28	-32.85
	4	-35.04	-35.07	-33.59	-34.92	-34.80	-33.55
	5	-34.78	-34.82	-33.48	-34.33	-34.31	-33.18
	6	-34.02	-33.99	-32.74	-33.71	-33.66	-32.67
	7	-34.22	-34.12	-32.49	-33.79	-33.82	-32.50
	8	-35.09	-35.15	-33.66	-34.98	-35.07	-33.81
	9	-34.69	-34.74	-33.52	-34.51	-34.51	-33.39
	10	-34.64	-34.50	-33.07	-34.47	-34.57	-32.92
	11	-34.15	-34.01	-32.69	-34.06	-34.12	-32.77
	12	-35.36	-35.32	-33.89	-35.05	-35.13	-33.88
	13	-34.25	-34.25	-32.96	-34.01	-34.02	-33.20
	14	-33.36	-33.54	-32.29	-33.49	-33.47	-32.25
	15	-34.02	-34.00	-32.63	-33.89	-33.93	-32.70
	16	-34.75	-34.74	-33.25	-34.51	-34.52	-33.29
	17	-34.07	-34.03	-32.98	-33.95	-33.99	-32.95
	18	-34.33	-34.22	-32.78	-33.70	-33.70	-32.51
	19	-34.32	-34.32	-32.48	-33.64	-33.68	-32.35
	20	-34.80	-34.68	-33.37	-34.46	-34.42	-33.29
	21	-33.99	-34.09	-32.82	-34.38	-34.35	-33.18
	22	-34.57	-34.55	-32.73	-34.57	-34.51	-33.03
	23	-33.58	-33.59	-32.37	-33.54	-33.49	-32.53
	24	-34.96	-34.95	-33.43	-34.97	-34.97	-33.60
	25	-34.74	-34.79	-33.34	-34.87	-34.93	-33.65
	26	-33.37	-33.32	-32.08	-33.44	-33.47	-32.40
	27	-33.99	-33.97	-32.44	-33.81	-33.81	-32.57
	28	-34.38	-34.50	-32.30	-35.19	-35.32	-33.76
	29	-34.28	-34.10	-32.76	-34.13	-34.16	-33.21
	30	-34.43	-34.29	-32.92	-33.66	-33.59	-32.91
	31	-32.57	-32.45	-31.45	-32.93	-32.86	-31.84
	32	-34.27	-34.11	-32.46	-34.75	-34.69	-33.69
	33	-34.42	-34.38	-32.74	-34.48	-34.35	-33.38
	34	-34.66	-34.63	-33.26	-35.05	-34.97	-33.68
	35	-34.92	-34.89	-33.41	-35.23	-35.22	-33.77
	36	-33.85	-33.83	-32.50	-34.38	-34.36	-33.08
	37	-34.39	-34.17	-32.67	-34.22	-34.17	-32.76
	38	-34.89	-34.90	-33.84	-34.48	-34.34	-32.92
	39	-34.04	-34.01	-32.38	-34.66	-34.69	-33.18
	40	-35.01	-35.03	-33.93	-34.87	-34.76	-33.45
	41	-34.81	-34.84	-33.78	-34.25	-34.40	-33.26
	42	-34.60	-34.49	-33.43	-34.34	-34.41	-33.10
	43	-35.11	-35.07	-34.13	-34.77	-34.71	-33.47
	44	-34.39	-34.39	-33.23	-34.34	-34.40	-33.07
45	-34.71	-34.87	-33.97	-34.68	-34.79	-33.50	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 47 of 137	

	46	-35.05	-35.07	-33.84	-34.72	-34.73	-33.38
	47	-34.60	-34.48	-33.61	-34.63	-34.62	-33.56
	48	-33.94	-33.99	-33.12	-34.30	-34.35	-33.32
	49	-34.75	-34.79	-33.72	-34.38	-34.29	-33.03
	50	-34.66	-34.78	-33.77	-34.52	-34.60	-33.33
	51	-35.01	-35.01	-33.78	-34.56	-34.59	-33.35
	52	-34.93	-35.01	-33.84	-34.83	-34.82	-33.81
	53	-34.59	-34.60	-33.59	-33.60	-33.52	-32.44
	54	-35.24	-35.34	-33.82	-35.24	-35.34	-33.82
	55	-35.31	-35.29	-33.71	-34.91	-34.96	-33.47
	56	-34.89	-34.88	-33.97	-34.58	-34.43	-33.29
	57	-34.32	-34.29	-33.31	-34.54	-34.54	-33.07
	58	-34.74	-34.78	-33.55	-34.77	-34.71	-33.37
	59	-34.64	-34.71	-33.63	-34.66	-34.66	-33.47
	60	-34.49	-34.60	-33.63	-34.30	-34.25	-33.15
	61	-34.41	-34.39	-33.42	-34.60	-34.49	-33.18
	62	-34.78	-34.67	-33.75	-34.67	-34.72	-33.37
	63	-35.09	-35.19	-34.06	-35.09	-35.10	-33.76
	SUM	-16.41	-16.39	-15.11	-16.33	-16.33	-15.09
	Limit (dBm)	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0
	Margin (dB)	-3.41	-3.39	-2.11	-3.33	-3.33	-2.09
CH	Port	Max. Value (dBm)					
		QPSK			256QAM		
		3980 to 3980.4 MHz	3980.4 to 3980.8 MHz	3980.6 to 3981 MHz	3980 to 3980.4 MHz	3980.4 to 3980.8 MHz	3980.6 to 3981 MHz
High	0	-32.26	-33.14	-33.06	-32.48	-33.52	-33.61
	1	-32.13	-32.71	-32.68	-32.15	-33.18	-33.34
	2	-32.66	-33.34	-33.42	-32.58	-33.61	-33.50
	3	-32.54	-33.27	-33.20	-32.75	-33.46	-33.44
	4	-32.65	-33.36	-33.42	-32.68	-33.64	-33.72
	5	-31.74	-32.56	-32.68	-31.70	-32.57	-32.59
	6	-32.30	-32.85	-32.81	-32.05	-33.03	-33.07
	7	-32.52	-33.46	-33.39	-32.50	-33.39	-33.39
	8	-32.23	-33.12	-33.19	-32.35	-33.34	-33.31
	9	-32.71	-33.14	-33.16	-32.04	-32.76	-32.80
	10	-33.10	-34.01	-33.93	-32.75	-33.89	-33.80
	11	-32.53	-33.34	-33.25	-33.03	-33.91	-33.75
	12	-32.87	-33.57	-33.65	-32.68	-33.50	-33.64
	13	-32.10	-32.66	-32.72	-32.06	-32.81	-32.87
	14	-32.07	-32.70	-32.62	-31.90	-32.55	-32.68
	15	-32.63	-33.51	-33.43	-32.33	-33.01	-33.21
	16	-32.37	-33.10	-33.06	-32.52	-33.38	-33.42
	17	-32.38	-32.92	-32.82	-32.13	-32.89	-32.92
	18	-33.05	-33.75	-33.88	-32.64	-33.48	-33.48
	19	-32.63	-33.64	-33.60	-32.59	-33.67	-33.70
	20	-32.13	-33.18	-33.24	-32.74	-33.62	-33.57
	21	-32.04	-32.84	-32.97	-31.96	-32.71	-32.80
	22	-33.15	-34.15	-34.19	-32.78	-33.90	-33.88
	23	-32.14	-32.83	-32.87	-32.13	-33.03	-33.02
24	-32.53	-33.26	-33.40	-32.68	-33.74	-33.76	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 48 of 137	

25	-32.34	-33.25	-33.20	-32.65	-33.35	-33.39
26	-32.53	-33.15	-33.14	-32.21	-33.02	-33.07
27	-32.47	-33.26	-33.25	-32.26	-33.20	-33.18
28	-32.58	-33.61	-33.71	-32.60	-33.63	-33.64
29	-32.08	-32.93	-32.87	-31.50	-32.32	-32.39
30	-33.21	-34.24	-34.09	-32.90	-33.78	-33.74
31	-31.71	-32.09	-32.12	-31.84	-32.49	-32.43
32	-32.74	-33.57	-33.58	-33.00	-33.86	-33.89
33	-32.44	-33.20	-33.26	-32.40	-33.22	-33.43
34	-32.67	-33.67	-33.60	-32.56	-33.46	-33.44
35	-32.67	-33.66	-33.63	-32.43	-33.48	-33.50
36	-32.28	-33.24	-33.12	-32.78	-33.64	-33.70
37	-32.22	-33.22	-32.93	-32.13	-32.74	-32.93
38	-32.40	-33.20	-33.26	-31.77	-32.70	-32.59
39	-32.39	-33.10	-33.07	-32.85	-33.78	-33.69
40	-32.64	-33.57	-33.64	-32.70	-33.52	-33.74
41	-33.28	-34.43	-34.42	-30.66	-31.52	-31.44
42	-32.63	-33.42	-33.54	-32.14	-32.99	-33.10
43	-32.42	-33.19	-33.07	-32.70	-33.54	-33.44
44	-32.57	-33.52	-33.31	-32.14	-33.07	-33.18
45	-33.19	-34.20	-34.10	-32.97	-33.90	-33.89
46	-32.53	-33.42	-33.47	-32.42	-33.43	-33.53
47	-32.01	-33.09	-32.90	-32.01	-32.98	-33.26
48	-32.43	-33.10	-33.05	-32.00	-32.52	-32.62
49	-32.93	-33.72	-33.69	-32.93	-33.68	-33.90
50	-33.05	-33.92	-33.91	-32.41	-32.98	-33.08
51	-32.83	-33.66	-33.69	-32.70	-33.65	-33.77
52	-32.89	-33.70	-33.67	-32.89	-33.84	-33.88
53	-32.87	-33.88	-33.85	-32.75	-33.70	-33.75
54	-32.49	-33.66	-33.69	-32.49	-33.66	-33.69
55	-32.83	-33.58	-33.61	-32.79	-33.68	-33.78
56	-33.26	-34.21	-34.17	-33.15	-34.01	-34.23
57	-32.90	-33.67	-33.61	-32.56	-33.49	-33.61
58	-33.05	-33.96	-33.87	-32.79	-33.67	-33.72
59	-32.26	-33.03	-33.21	-32.52	-33.31	-33.43
60	-32.84	-33.85	-33.68	-32.83	-33.69	-33.74
61	-32.81	-33.62	-33.63	-33.18	-34.09	-34.19
62	-33.04	-33.93	-34.01	-32.36	-33.30	-33.53
63	-32.62	-33.58	-33.48	-32.63	-33.53	-33.47
SUM	-14.49	-15.32	-15.30	-14.37	-15.24	-15.29
Limit (dBm)	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0
Margin (dB)	-1.49	-2.32	-2.30	-1.37	-2.24	-2.29



Table 8-18. Band Edge Emission Summary Data (n77_1C_40M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 49 of 137	

CH	Port	Max. Value (dBm)			
		QPSK		256QAM	
		3699 to 3699.6 MHz	3699.4 to 3700 MHz	36980 to 3680.6 MHz	3980.4 to 3981 MHz
Low	0	-33.94	-33.69	-33.85	-33.71
	1	-33.55	-33.01	-33.60	-33.09
	2	-33.12	-32.47	-33.11	-32.66
	3	-33.00	-32.39	-33.18	-32.90
	4	-33.98	-33.69	-33.77	-33.66
	5	-32.93	-32.55	-33.27	-32.81
	6	-32.34	-31.83	-32.47	-32.09
	7	-32.34	-31.71	-32.53	-32.03
	8	-33.93	-33.61	-33.78	-33.54
	9	-33.37	-32.95	-33.35	-32.90
	10	-33.37	-32.69	-33.50	-33.06
	11	-32.62	-31.93	-32.98	-32.36
	12	-34.18	-33.95	-34.00	-33.86
	13	-33.21	-32.77	-33.04	-32.67
	14	-32.33	-31.86	-32.64	-32.28
	15	-32.44	-32.04	-32.88	-32.50
	16	-33.63	-33.42	-33.68	-33.36
	17	-33.06	-32.71	-33.03	-32.70
	18	-33.13	-32.53	-33.85	-33.29
	19	-32.28	-31.56	-32.87	-32.06
	20	-33.91	-33.78	-33.94	-33.72
	21	-33.25	-32.78	-33.27	-32.80
	22	-33.10	-32.46	-33.31	-32.57
	23	-32.75	-32.26	-32.75	-32.37
	24	-33.91	-33.73	-33.82	-33.63
	25	-34.12	-33.50	-33.85	-33.40
	26	-32.98	-32.46	-33.02	-32.62
	27	-32.64	-32.16	-32.89	-32.40
	28	-34.22	-34.04	-34.39	-34.21
	29	-33.38	-32.89	-33.49	-33.02
	30	-33.30	-32.73	-33.50	-32.89
	31	-31.86	-31.38	-32.03	-31.42
	32	-32.96	-32.63	-33.09	-32.75
	33	-32.64	-31.94	-32.71	-32.08
	34	-33.77	-33.14	-33.62	-33.18
	35	-34.11	-33.65	-34.02	-33.72
	36	-33.27	-33.16	-33.37	-32.93
	37	-33.12	-32.48	-33.34	-32.83
	38	-33.32	-32.59	-33.38	-32.76
	39	-33.04	-32.45	-33.33	-32.87
	40	-33.49	-33.20	-33.69	-33.54
	41	-33.63	-33.08	-33.74	-33.24
	42	-33.15	-32.52	-33.62	-32.97
	43	-33.23	-32.64	-33.38	-32.83
	44	-32.63	-32.29	-32.87	-32.48
45	-33.77	-33.20	-34.11	-33.63	



FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 50 of 137	

	46	-33.36	-32.64	-33.50	-32.91
	47	-32.64	-32.05	-32.81	-32.22
	48	-33.47	-33.17	-33.47	-33.24
	49	-33.64	-32.88	-33.60	-33.09
	50	-33.81	-33.20	-33.82	-33.25
	51	-33.81	-33.25	-34.02	-33.44
	52	-33.97	-33.75	-33.86	-33.60
	53	-33.54	-32.81	-33.71	-33.16
	54	-34.14	-33.60	-34.14	-33.60
	55	-33.71	-33.18	-33.72	-33.16
	56	-34.00	-33.65	-33.70	-33.44
	57	-33.62	-33.01	-33.63	-33.08
	58	-33.67	-33.06	-33.41	-32.72
	59	-33.72	-33.17	-33.53	-32.90
	60	-33.43	-33.09	-33.47	-33.26
	61	-33.74	-33.01	-33.51	-32.93
	62	-33.56	-32.84	-33.52	-32.98
	63	-34.13	-33.64	-34.06	-33.60
	SUM	-15.25	-14.75	-15.34	-14.89
	Limit (dBm)	-13.0	-13.0	-13.0	-13.0
	Margin (dB)	-2.25	-1.75	-2.34	-1.89
CH	Port	Max. Value (dBm)			
		QPSK		256QAM	
		3980 to 3980.6 MHz	3980.4 to 3981 MHz	3698 to 3680.6 MHz	3980.4 to 3981 MHz
High	0	-32.55	-32.86	-31.91	-32.14
	1	-31.41	-32.11	-31.31	-32.03
	2	-32.12	-32.71	-31.81	-32.40
	3	-31.72	-32.33	-31.39	-32.16
	4	-32.52	-32.85	-31.94	-32.25
	5	-30.98	-31.58	-30.77	-31.36
	6	-31.80	-32.28	-31.71	-32.16
	7	-31.95	-32.58	-31.57	-32.06
	8	-32.39	-32.58	-32.09	-32.37
	9	-31.62	-31.98	-31.53	-32.04
	10	-32.47	-33.07	-32.31	-32.95
	11	-31.86	-32.29	-31.71	-32.31
	12	-32.75	-33.02	-32.33	-32.65
	13	-31.26	-31.67	-31.21	-31.71
	14	-31.64	-31.92	-31.30	-31.84
	15	-32.23	-32.72	-31.85	-32.57
	16	-32.28	-32.48	-31.96	-32.22
	17	-31.54	-32.01	-31.35	-31.82
	18	-32.43	-32.90	-32.05	-32.64
	19	-32.22	-32.87	-31.83	-32.64
	20	-32.46	-32.73	-31.73	-32.19
	21	-31.13	-31.65	-31.07	-31.66
	22	-32.75	-33.34	-32.36	-33.12
	23	-31.73	-32.13	-31.60	-32.02
24	-32.96	-33.12	-32.34	-32.71	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 51 of 137	

25	-31.83	-32.46	-31.78	-32.40
26	-31.97	-32.37	-31.57	-32.03
27	-31.89	-32.48	-31.62	-32.18
28	-32.91	-33.08	-32.34	-32.59
29	-31.26	-31.82	-31.23	-31.80
30	-32.56	-33.01	-32.56	-33.12
31	-31.65	-32.09	-31.11	-31.71
32	-32.76	-33.02	-32.29	-32.39
33	-32.34	-32.89	-31.92	-32.61
34	-31.91	-32.56	-31.77	-32.42
35	-31.88	-32.33	-31.50	-31.96
36	-32.45	-32.72	-31.82	-32.14
37	-31.81	-32.40	-31.45	-32.10
38	-31.82	-32.32	-31.15	-31.95
39	-31.55	-32.15	-31.25	-31.78
40	-32.82	-32.95	-32.09	-32.48
41	-32.58	-33.21	-32.37	-32.87
42	-31.85	-32.42	-31.67	-32.32
43	-30.67	-31.36	-30.62	-31.21
44	-32.24	-32.46	-31.81	-32.20
45	-32.39	-32.95	-32.38	-32.85
46	-31.78	-32.46	-31.43	-32.28
47	-30.53	-30.92	-30.52	-31.22
48	-32.38	-32.48	-32.04	-32.20
49	-32.36	-32.87	-32.15	-32.75
50	-31.91	-32.42	-31.60	-32.19
51	-31.98	-32.46	-31.92	-32.55
52	-33.28	-33.39	-32.78	-33.22
53	-32.14	-32.74	-31.88	-32.64
54	-31.54	-32.31	-31.54	-32.31
55	-31.82	-32.36	-31.84	-32.56
56	-33.47	-33.60	-33.13	-33.30
57	-32.35	-32.84	-32.12	-32.80
58	-32.00	-32.60	-32.11	-32.62
59	-32.18	-32.65	-31.84	-32.49
60	-33.14	-33.34	-32.68	-32.99
61	-32.63	-33.15	-32.54	-33.06
62	-32.05	-32.68	-31.66	-32.39
63	-32.00	-32.65	-32.05	-32.70
SUM	-13.98	-14.45	-13.71	-14.25
Limit (dBm)	-13.0	-13.0	-13.0	-13.0
Margin (dB)	-0.98	-1.45	-0.71	-1.25


Table 8-19. Band Edge Emission Summary Data (n77_1C_60M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 52 of 137	

CH	Port	Max. Value (dBm)			
		QPSK		16QAM	
		3699 to 3699.8 MHz	3699.2 to 3700 MHz	3699 to 3699.8 MHz	3699.2 to 3700 MHz
Low	0	-33.12	-33.08	-33.17	-33.12
	1	-33.03	-32.82	-32.93	-32.71
	2	-32.37	-32.20	-32.45	-32.21
	3	-32.28	-32.00	-32.36	-32.13
	4	-33.19	-33.18	-33.32	-33.34
	5	-32.57	-32.38	-32.61	-32.45
	6	-31.81	-31.59	-31.60	-31.48
	7	-31.81	-31.57	-31.90	-31.67
	8	-33.07	-33.01	-33.31	-33.25
	9	-32.54	-32.40	-32.66	-32.47
	10	-32.69	-32.40	-32.55	-32.35
	11	-31.95	-31.64	-31.76	-31.64
	12	-33.28	-33.28	-33.30	-33.28
	13	-32.32	-32.24	-32.19	-32.06
	14	-31.82	-31.58	-31.45	-31.32
	15	-31.79	-31.54	-31.66	-31.43
	16	-32.76	-32.71	-32.92	-32.85
	17	-32.24	-32.04	-32.18	-32.09
	18	-32.33	-32.06	-32.22	-31.99
	19	-31.86	-31.49	-31.41	-31.26
	20	-33.02	-33.01	-32.96	-32.89
	21	-32.52	-32.30	-32.44	-32.28
	22	-32.49	-32.13	-32.36	-32.11
	23	-31.91	-31.68	-31.73	-31.52
	24	-33.27	-33.24	-33.18	-33.08
	25	-33.22	-32.96	-33.16	-32.97
	26	-32.08	-31.80	-32.09	-31.90
	27	-31.96	-31.72	-32.13	-31.91
	28	-33.50	-33.49	-33.47	-33.44
	29	-32.67	-32.56	-32.62	-32.38
	30	-32.62	-32.33	-32.58	-32.33
	31	-31.15	-30.96	-30.17	-30.05
	32	-32.15	-32.10	-31.78	-31.77
	33	-31.64	-31.40	-31.73	-31.54
	34	-32.90	-32.59	-33.00	-32.78
	35	-33.18	-33.00	-33.41	-33.17
	36	-32.58	-32.46	-32.43	-32.43
	37	-32.35	-32.09	-32.18	-32.07
	38	-32.57	-32.34	-32.48	-32.34
	39	-32.41	-32.22	-32.65	-32.40
	40	-32.83	-32.82	-32.86	-32.81
	41	-33.07	-32.76	-33.14	-32.87
	42	-32.85	-32.63	-33.01	-32.71
	43	-32.21	-31.92	-32.50	-32.31
	44	-32.16	-32.12	-32.08	-31.96
45	-33.01	-32.77	-32.85	-32.66	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 53 of 137	

	46	-32.71	-32.40	-32.45	-32.20
	47	-31.48	-31.22	-31.98	-31.73
	48	-32.64	-32.61	-32.30	-32.25
	49	-32.59	-32.37	-32.59	-32.45
	50	-33.00	-32.64	-32.99	-32.77
	51	-33.20	-32.88	-33.23	-33.03
	52	-33.03	-32.99	-32.83	-32.78
	53	-33.09	-32.87	-32.84	-32.59
	54	-33.12	-32.96	-33.12	-32.96
	55	-33.29	-32.91	-33.20	-32.99
	56	-32.98	-32.93	-32.88	-32.78
	57	-32.83	-32.58	-32.80	-32.54
	58	-32.81	-32.58	-32.93	-32.64
	59	-32.96	-32.74	-32.70	-32.49
	60	-32.76	-32.75	-33.04	-33.02
	61	-32.86	-32.54	-32.67	-32.41
	62	-32.88	-32.60	-32.92	-32.66
	63	-33.32	-33.07	-33.34	-33.04
	SUM	-14.51	-14.31	-14.45	-14.28
	Limit (dBm)	-13.0	-13.0	-13.0	-13.0
	Margin (dB)	-1.51	-1.31	-1.45	-1.28
CH	Port	Max. Value (dBm)			
		QPSK		256QAM	
		3980 to 3680.8 MHz	3980.2 to 3981 MHz	3980 to 3680.8 MHz	3980.2 to 3981 MHz
High	0	-32.76	-32.74	-32.71	-32.76
	1	-32.54	-32.58	-32.56	-32.62
	2	-32.91	-32.92	-32.76	-32.86
	3	-32.48	-32.51	-32.42	-32.46
	4	-32.66	-32.69	-32.71	-32.73
	5	-32.15	-32.18	-32.08	-32.13
	6	-31.97	-32.00	-32.01	-32.04
	7	-32.35	-32.38	-32.44	-32.43
	8	-32.47	-32.48	-32.56	-32.55
	9	-32.07	-32.12	-32.04	-32.07
	10	-32.86	-32.90	-32.96	-32.99
	11	-32.66	-32.73	-32.65	-32.77
	12	-32.74	-32.77	-32.90	-32.93
	13	-31.66	-31.69	-31.58	-31.65
	14	-31.71	-31.76	-31.70	-31.73
	15	-32.51	-32.53	-32.49	-32.53
	16	-32.15	-32.19	-32.25	-32.24
	17	-31.53	-31.56	-31.63	-31.63
	18	-32.49	-32.52	-32.68	-32.74
	19	-32.53	-32.55	-32.61	-32.65
	20	-32.61	-32.65	-32.76	-32.74
	21	-31.72	-31.76	-31.91	-31.95
	22	-32.99	-33.03	-33.13	-33.13
	23	-31.46	-31.53	-31.64	-31.67
24	-32.69	-32.69	-32.73	-32.72	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 54 of 137	

25	-32.53	-32.55	-32.70	-32.77
26	-31.89	-31.88	-31.90	-31.87
27	-32.01	-32.01	-32.07	-32.13
28	-32.68	-32.64	-32.71	-32.77
29	-32.09	-32.13	-32.08	-32.08
30	-32.68	-32.71	-32.76	-32.78
31	-31.51	-31.58	-31.53	-31.57
32	-32.67	-32.67	-32.76	-32.76
33	-32.73	-32.74	-32.75	-32.85
34	-32.75	-32.78	-32.73	-32.76
35	-32.61	-32.66	-32.51	-32.52
36	-32.55	-32.54	-32.54	-32.61
37	-32.67	-32.75	-32.81	-32.83
38	-32.71	-32.76	-32.63	-32.71
39	-32.79	-32.79	-32.69	-32.70
40	-32.67	-32.67	-32.71	-32.75
41	-32.95	-32.94	-33.00	-33.03
42	-32.86	-32.92	-32.98	-33.00
43	-32.34	-32.33	-32.34	-32.38
44	-32.51	-32.51	-32.47	-32.52
45	-32.81	-32.85	-32.95	-33.04
46	-32.89	-32.96	-32.91	-32.95
47	-32.38	-32.46	-32.42	-32.45
48	-32.00	-32.01	-32.06	-32.06
49	-32.78	-32.76	-32.79	-32.85
50	-32.87	-32.90	-32.78	-32.79
51	-32.56	-32.59	-32.62	-32.71
52	-33.01	-33.10	-32.94	-33.00
53	-32.82	-32.83	-32.80	-32.85
54	-32.78	-32.83	-32.78	-32.83
55	-32.86	-32.91	-32.86	-32.91
56	-32.93	-32.98	-33.02	-33.02
57	-32.55	-32.56	-32.59	-32.68
58	-32.59	-32.62	-32.65	-32.71
59	-32.65	-32.69	-32.58	-32.64
60	-32.80	-32.78	-32.84	-32.88
61	-32.94	-32.96	-32.90	-32.98
62	-32.66	-32.67	-32.70	-32.73
63	-32.80	-32.80	-32.77	-32.83
SUM	-14.43	-14.46	-14.46	-14.50
Limit (dBm)	-13	-13	-13	-13
Margin (dB)	-1.43	-1.46	-1.46	-1.50

Table 8-20. Band Edge Emission Summary Data (n77_1C_80M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)		Page 55 of 137

CH	Port	Max. Value (dBm)	
		QPSK	16QAM
		3699 to 3700 MHz	3699 to 3700 MHz
Low	0	-32.89	-32.92
	1	-33.16	-33.25
	2	-31.09	-31.22
	3	-31.52	-31.47
	4	-33.70	-34.09
	5	-32.34	-32.37
	6	-31.16	-31.89
	7	-30.82	-31.16
	8	-33.28	-33.38
	9	-33.60	-33.72
	10	-31.87	-31.93
	11	-31.11	-31.45
	12	-33.84	-34.43
	13	-33.47	-34.26
	14	-31.02	-31.44
	15	-31.32	-31.49
	16	-33.45	-33.68
	17	-33.58	-33.96
	18	-31.22	-31.60
	19	-30.58	-30.59
	20	-32.59	-33.14
	21	-33.07	-33.03
	22	-31.69	-31.57
	23	-32.00	-32.20
	24	-32.56	-32.90
	25	-33.37	-33.53
	26	-31.76	-32.11
	27	-31.37	-31.55
	28	-33.86	-34.22
	29	-33.10	-33.15
	30	-32.25	-32.39
	31	-30.04	-30.12
	32	-31.21	-31.88
	33	-30.91	-30.83
	34	-32.80	-32.90
	35	-33.54	-33.66
	36	-31.29	-31.30
	37	-31.54	-31.49
	38	-31.90	-32.27
	39	-31.99	-32.04
	40	-32.42	-32.23
	41	-32.23	-32.57
	42	-31.56	-31.86
	43	-32.68	-32.70
	44	-30.56	-31.24
	45	-32.51	-32.64

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 56 of 137	

	46	-31.67	-31.85
	47	-30.17	-30.45
	48	-32.66	-32.74
	49	-32.04	-32.17
	50	-32.58	-33.10
	51	-32.93	-33.02
	52	-32.64	-32.79
	53	-32.09	-32.22
	54	-33.41	-33.41
	55	-33.12	-33.39
	56	-32.81	-33.05
	57	-32.76	-32.85
	58	-32.37	-32.38
	59	-32.40	-32.37
	60	-32.26	-32.43
	61	-32.09	-32.06
	62	-32.85	-33.03
	63	-33.22	-33.18
	SUM	-14.08	-14.27
	Limit (dBm)	-13.0	-13.0
	Margin (dB)	-1.08	-1.27
CH	Port	Max. Value (dBm)	
		QPSK	64QAM
		3699 to 3700 MHz	3699 to 3700 MHz
High	0	-32.41	-31.37
	1	-31.87	-31.03
	2	-32.98	-32.66
	3	-32.40	-32.04
	4	-32.53	-31.90
	5	-31.53	-30.72
	6	-33.35	-33.20
	7	-32.72	-32.30
	8	-32.52	-31.25
	9	-33.35	-33.46
	10	-33.39	-33.39
	11	-33.38	-33.11
	12	-33.16	-32.78
	13	-32.99	-32.77
	14	-33.28	-32.90
	15	-33.69	-33.19
	16	-33.47	-32.96
	17	-32.70	-32.67
	18	-33.76	-33.08
	19	-33.59	-33.12
	20	-32.15	-31.23
	21	-31.27	-31.24
	22	-33.76	-33.46
23	-33.74	-33.49	

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 57 of 137	

24	-32.97	-32.46
25	-32.37	-32.19
26	-32.81	-32.90
27	-33.06	-32.65
28	-32.88	-32.37
29	-32.61	-31.88
30	-34.74	-34.07
31	-33.46	-33.16
32	-33.80	-33.58
33	-33.05	-33.09
34	-33.04	-32.84
35	-32.45	-31.99
36	-32.79	-32.88
37	-32.74	-32.69
38	-32.09	-31.80
39	-31.74	-31.53
40	-33.11	-32.95
41	-33.91	-34.13
42	-32.38	-31.56
43	-31.92	-31.53
44	-32.35	-32.20
45	-34.09	-34.16
46	-32.65	-32.22
47	-30.96	-31.15
48	-32.94	-32.37
49	-33.79	-33.28
50	-32.64	-31.85
51	-33.25	-32.73
52	-33.86	-33.54
53	-32.84	-32.60
54	-32.17	-31.57
55	-32.22	-31.75
56	-35.02	-34.77
57	-34.10	-33.94
58	-32.87	-32.21
59	-33.53	-32.79
60	-32.73	-32.52
61	-34.20	-34.25
62	-32.85	-32.42
63	-33.30	-32.90
SUM	-14.84	-14.46
Limit (dBm)	-13.0	-13.0
Margin (dB)	-1.84	-1.46

Table 8-21. Band Edge Emission Summary Data (n77_1C_100M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 58 of 137	

CH	Port	Max. Value (dBm)	
		QPSK	
		3699 to 3700 MHz	3980 to 3981 MHz
Mid	0	-34.26	-37.93
	1	-33.40	-35.35
	2	-32.29	-36.82
	3	-32.55	-37.24
	4	-34.93	-35.66
	5	-33.19	-35.08
	6	-32.22	-36.72
	7	-31.85	-37.55
	8	-34.31	-39.06
	9	-34.30	-37.16
	10	-32.68	-37.27
	11	-32.01	-37.82
	12	-34.77	-37.37
	13	-34.40	-37.70
	14	-32.44	-35.69
	15	-32.62	-33.85
	16	-34.67	-38.02
	17	-34.60	-37.11
	18	-32.15	-36.76
	19	-31.75	-36.81
	20	-34.43	-36.59
	21	-33.80	-36.55
	22	-33.07	-38.92
	23	-33.42	-35.90
	24	-34.45	-37.85
	25	-34.31	-36.52
	26	-33.12	-37.51
	27	-32.33	-34.75
	28	-34.63	-38.26
	29	-34.01	-31.46
	30	-33.40	-37.62
	31	-31.70	-35.70
	32	-33.37	-37.36
	33	-32.65	-35.51
	34	-33.63	-37.77
	35	-34.14	-36.76
	36	-32.69	-37.19
	37	-32.41	-34.83
	38	-33.12	-38.96
	39	-32.55	-37.66
	40	-33.97	-36.53
	41	-32.83	-37.83
	42	-32.79	-36.78
	43	-33.91	-36.72
	44	-32.41	-36.11
	45	-33.57	-36.63

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 59 of 137	

46	-32.66	-38.36
47	-31.55	-37.04
48	-33.57	-36.65
49	-32.70	-36.03
50	-33.33	-38.20
51	-33.15	-37.83
52	-33.33	-35.93
53	-33.64	-37.25
54	-33.61	-36.39
55	-32.83	-38.24
56	-33.10	-38.88
57	-33.69	-35.98
58	-33.22	-37.45
59	-32.58	-37.91
60	-33.11	-36.97
61	-33.24	-35.39
62	-33.73	-37.87
63	-33.89	-35.54
SUM	-15.12	-18.58
Limit (dBm)	-13.0	-13.0
Margin (dB)	-2.12	-5.58

Table 8-22. Band Edge Emission Summary Data (n77_2C_100M+40M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 60 of 137	

CH	Port	Max. Value (dBm)	
		QPSK	
		3699 to 3700 MHz	3980 to 3981 MHz
Mid	0	-33.85	-36.07
	1	-32.80	-34.98
	2	-32.37	-33.95
	3	-32.06	-35.03
	4	-34.07	-34.82
	5	-32.23	-35.26
	6	-32.68	-36.10
	7	-31.55	-33.94
	8	-33.78	-37.27
	9	-33.88	-36.71
	10	-32.90	-34.63
	11	-32.20	-33.77
	12	-34.30	-36.65
	13	-33.92	-35.54
	14	-32.14	-35.86
	15	-32.40	-33.48
	16	-33.93	-35.20
	17	-34.16	-36.22
	18	-32.16	-32.21
	19	-31.81	-36.79
	20	-33.37	-34.03
	21	-33.33	-34.54
	22	-32.88	-36.84
	23	-32.57	-34.35
	24	-33.45	-34.75
	25	-33.68	-35.56
	26	-32.97	-34.14
	27	-32.38	-35.34
	28	-33.74	-35.85
	29	-33.56	-37.66
	30	-33.68	-32.87
	31	-31.24	-34.22
	32	-33.12	-36.77
	33	-32.54	-32.46
	34	-33.37	-35.24
	35	-33.88	-35.91
	36	-32.22	-36.36
	37	-32.59	-32.92
	38	-32.68	-34.75
	39	-32.25	-36.15
	40	-33.21	-36.15
	41	-33.02	-35.86
	42	-32.24	-36.83
	43	-33.47	-33.96
	44	-32.38	-37.42
	45	-33.19	-36.88

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 61 of 137	

46	-32.71	-36.34
47	-31.99	-32.78
48	-33.48	-35.74
49	-32.70	-35.23
50	-33.18	-36.71
51	-32.77	-36.18
52	-33.40	-37.05
53	-33.10	-37.35
54	-33.68	-33.78
55	-33.15	-35.84
56	-33.13	-34.98
57	-33.49	-37.88
58	-33.36	-36.02
59	-32.71	-38.00
60	-32.81	-36.37
61	-33.96	-36.04
62	-33.01	-35.01
63	-34.07	-37.86
SUM	-14.90	-17.20
Limit (dBm)	-13	-13
Margin (dB)	-1.90	-4.20

Table 8-23. Band Edge Emission Summary Data (n77_2C_100M+100M)

FCC ID: A3LMT6413-77A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 8K23032101-00-R1.A3L	Test Dates: 04/04/2023 - 05/15/2023	EUT Type: MMU(MT6413)	Page 62 of 137	