

**20210601\_SystemPerformanceCheck-D5GHzV2 SN 1209**

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used (interpolated):  $f = 5250$  MHz;  $\sigma = 4.543$  S/m;  $\epsilon_r = 35.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2020-08-25
- Probe: EX3DV4 - SN7313; ConvF(5.24, 5.24, 5.24) @ 5250 MHz; Calibrated: 2021-02-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2005

**Head/5.25 GHz, Pin=100mW/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 21.4 W/kg


**Head/5.25 GHz, Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.30 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.7 W/kg

**SAR(1 g) = 8.49 W/kg; SAR(10 g) = 2.43 W/kg**

Maximum value of SAR (measured) = 19.9 W/kg

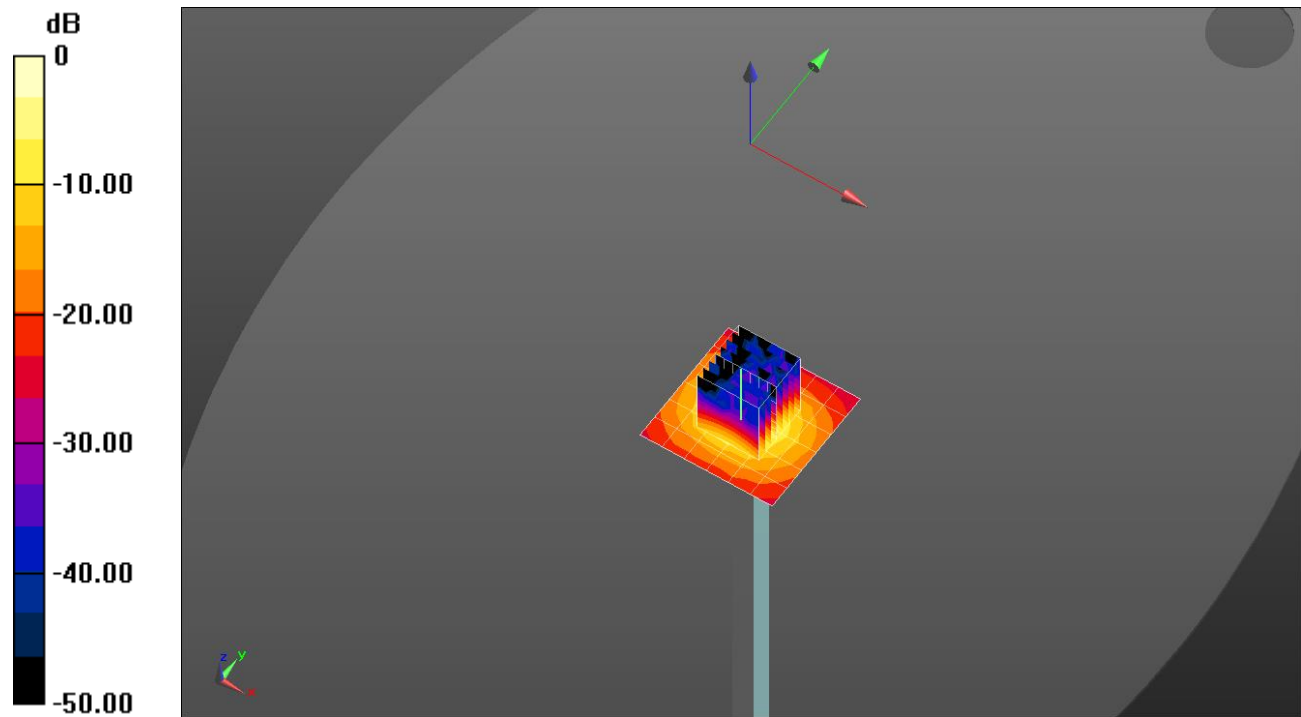


0 dB = 19.9 W/kg = 12.99 dBW/kg

### 20210601\_SystemPerformanceCheck-D5GHzV2 SN 1209

Frequency: 5250 MHz; Duty Cycle: 1:1

**Head/5.25 GHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 15.0 W/kg

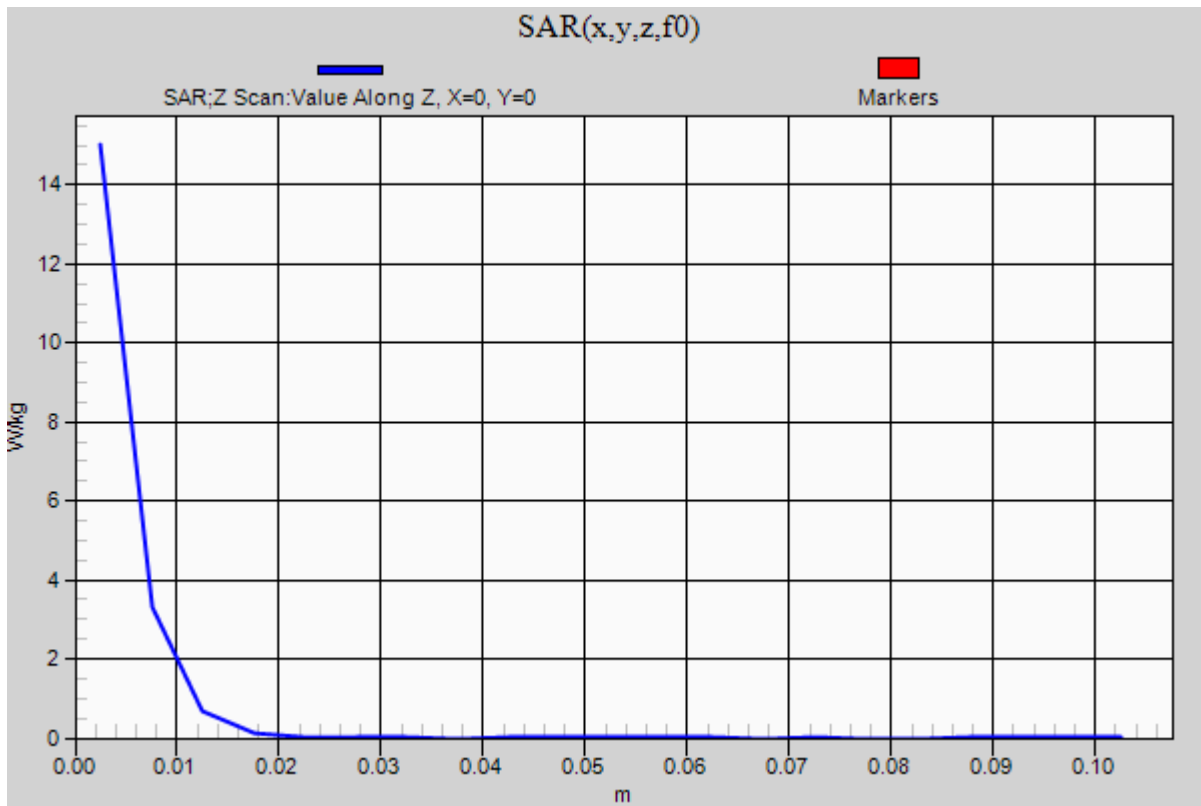

## 20210425\_SystemPerformanceCheck-D1900V2 SN 5d199

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.43 \text{ S/m}$ ;  $\epsilon_r = 39.237$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2020-07-23
- Probe: EX3DV4 - SN3871; ConvF(8.33, 8.33, 8.33) @ 1900 MHz; Calibrated: 2020-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

**Head/1900MHz, Pin=100 mW/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 6.09 W/kg


**Head/1900MHz, Pin=100 mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 60.44 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 7.08 W/kg

**SAR(1 g) = 3.86 W/kg; SAR(10 g) = 2.02 W/kg**

Maximum value of SAR (measured) = 5.95 W/kg

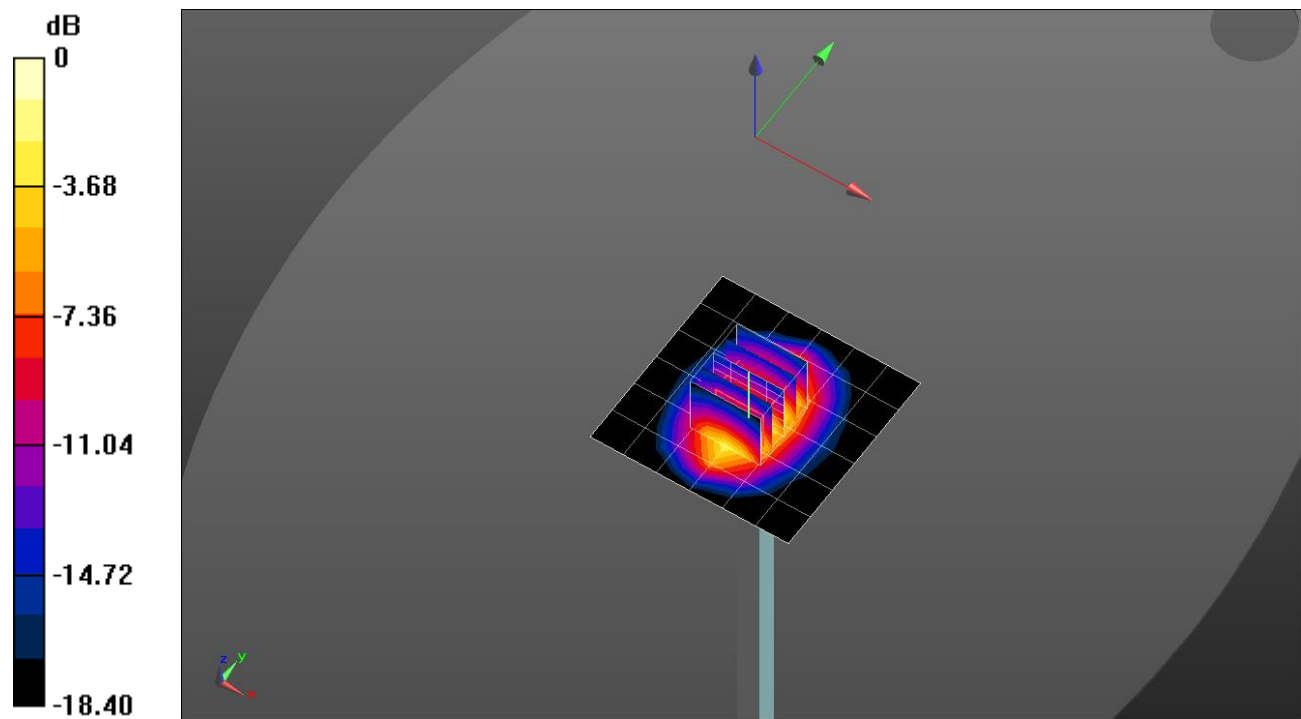


0 dB = 5.95 W/kg = 7.75 dBW/kg

### 20210425\_SystemPerformanceCheck-D1900V2 SN 5d199

Frequency: 1900 MHz; Duty Cycle: 1:1

**Head/1900MHz, Pin=100 mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 5.11 W/kg

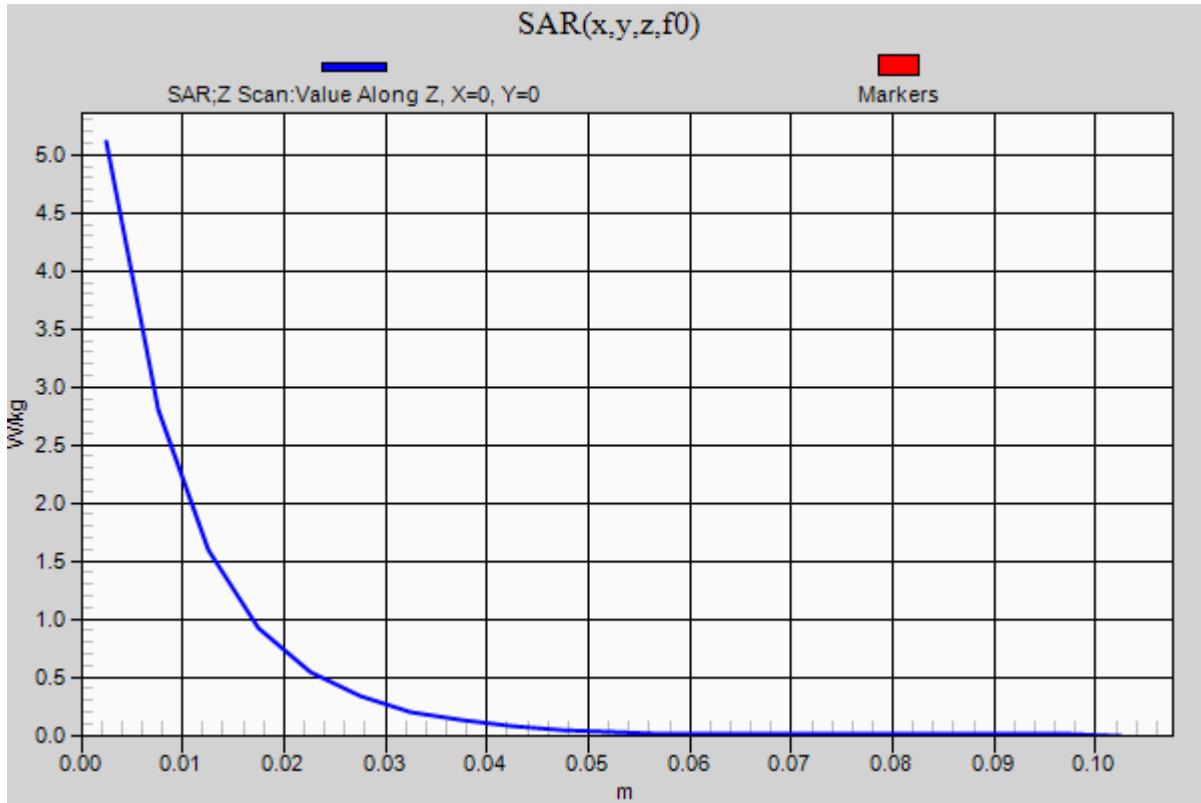

**20210531\_SystemPerformanceCheck-D3700V2 SN1026**

Frequency: 3700 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used:  $f = 3700$  MHz;  $\sigma = 3.084$  S/m;  $\epsilon_r = 38.542$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2020-07-23
- Probe: EX3DV4 - SN7645; ConvF(7.2, 7.2, 7.2) @ 3700 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

**Head/3700MHz, Pin=100mW/Area Scan (5x7x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 13.1 W/kg


**Head/3700MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 70.73 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 7.05 W/kg; SAR(10 g) = 2.64 W/kg**

Maximum value of SAR (measured) = 13.3 W/kg

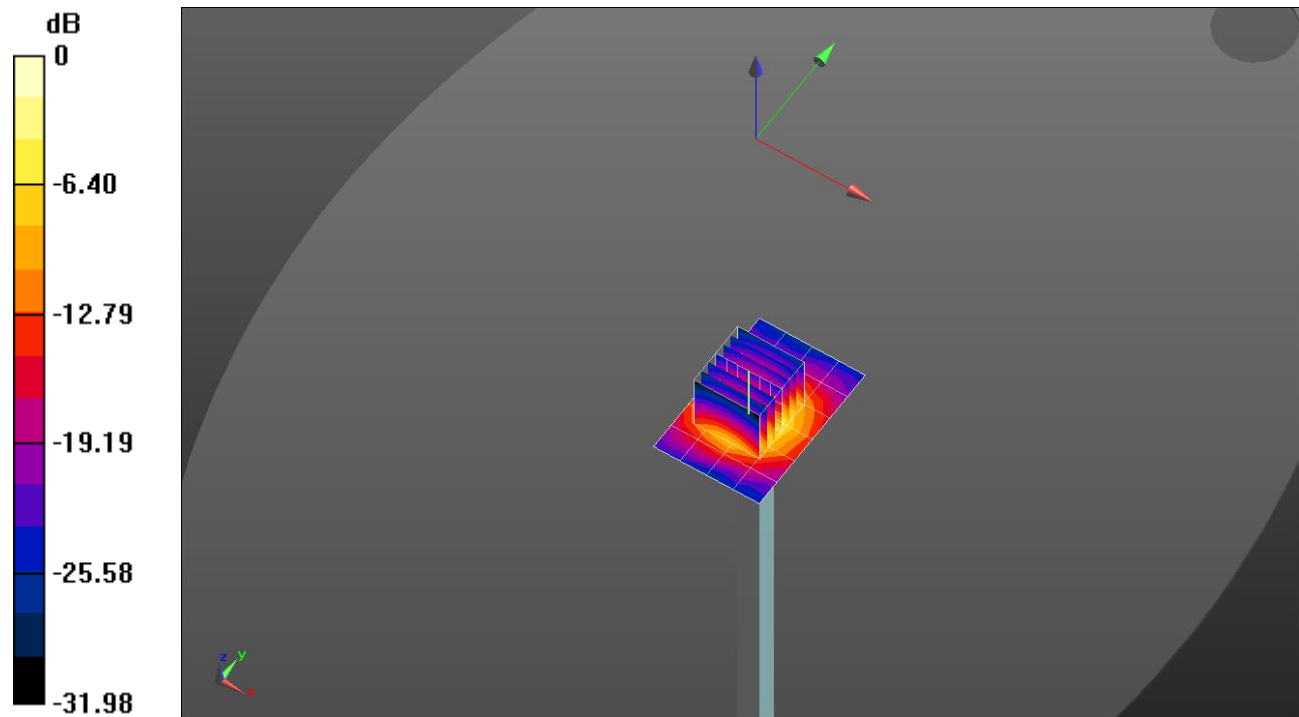


0 dB = 13.3 W/kg = 11.24 dBW/kg

### 20210531\_SystemPerformanceCheck-D3700V2 SN1026

Frequency: 3700 MHz; Duty Cycle: 1:1

**Head/3700MHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 12.2 W/kg

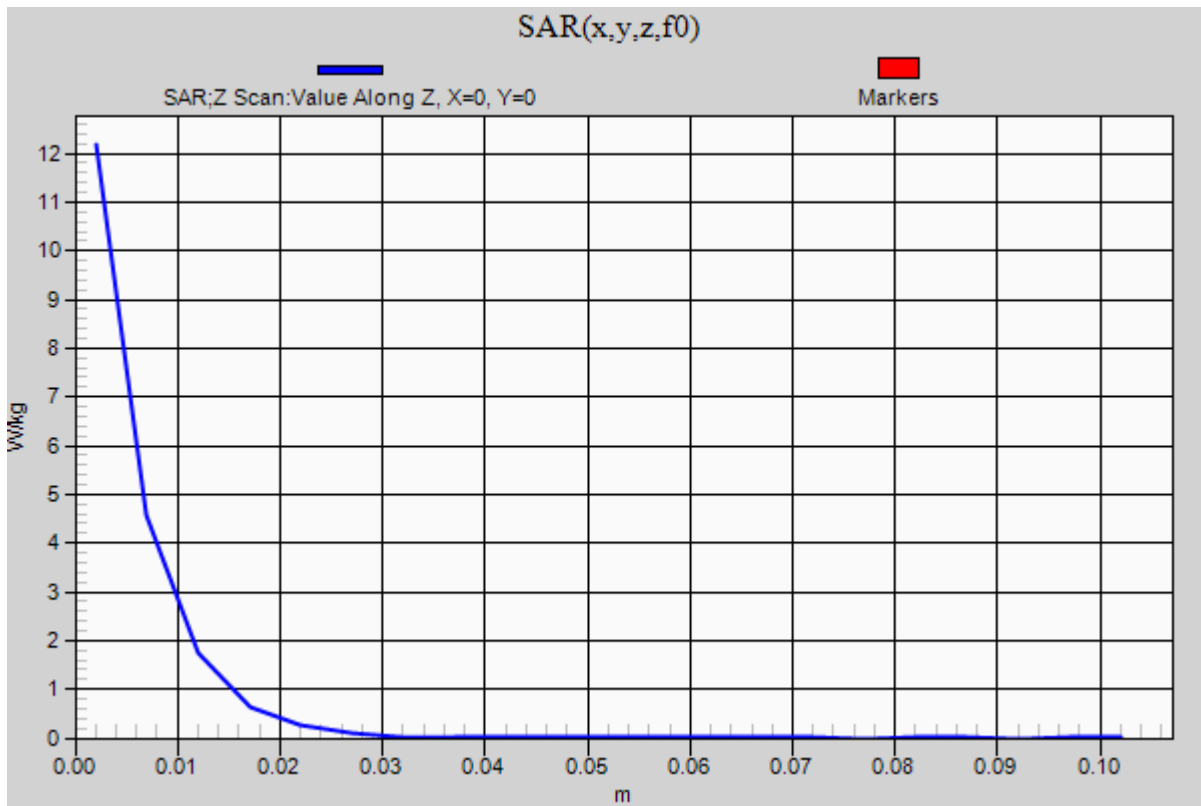

**20210531\_SystemPerformanceCheck-D3900V2 SN1069**

Frequency: 3900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used:  $f = 3900$  MHz;  $\sigma = 3.307$  S/m;  $\epsilon_r = 38.356$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2020-07-23
- Probe: EX3DV4 - SN7645; ConvF(7.05, 7.05, 7.05) @ 3900 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

**Head/3900MHz, Pin=100mW/Area Scan (5x7x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 12.8 W/kg


**Head/3900MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 69.47 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.4 W/kg

**SAR(1 g) = 6.77 W/kg; SAR(10 g) = 2.44 W/kg**

Maximum value of SAR (measured) = 13.3 W/kg

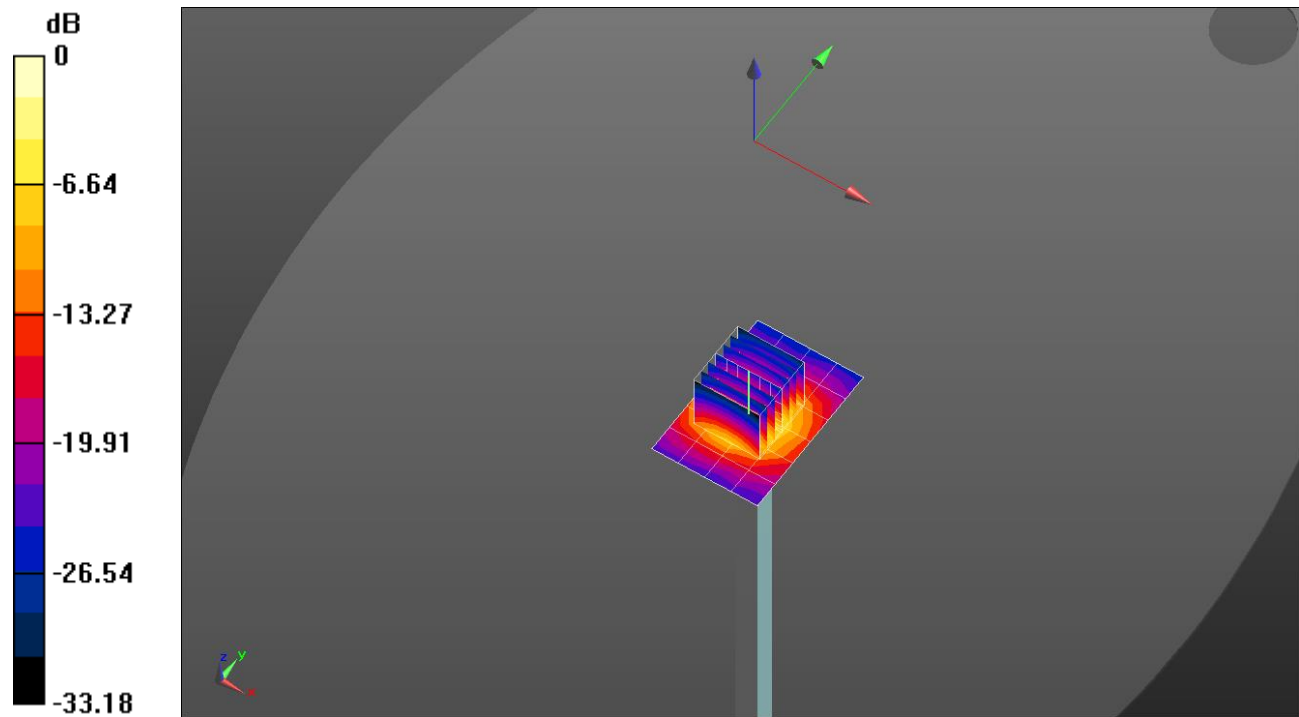


0 dB = 13.3 W/kg = 11.24 dBW/kg

### 20210531\_SystemPerformanceCheck-D3900V2 SN1069

Frequency: 3900 MHz; Duty Cycle: 1:1

**Head/3900MHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 11.8 W/kg

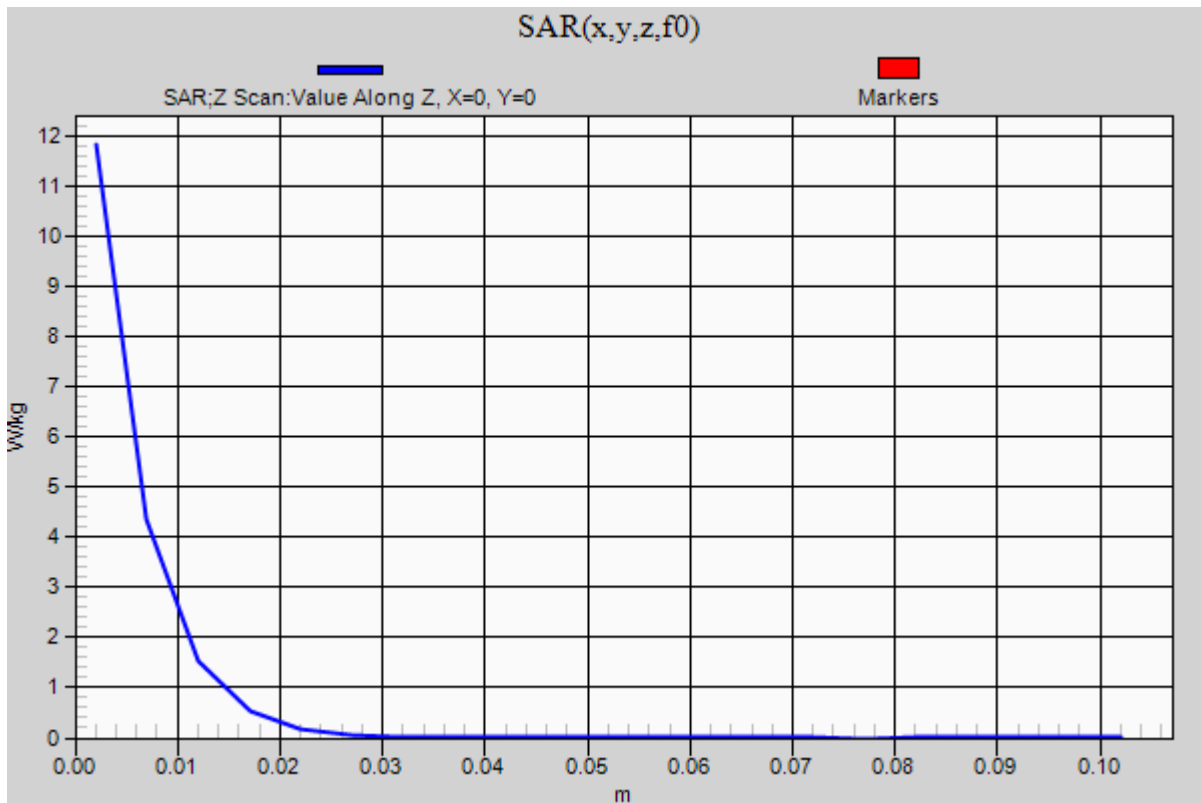



## 20210607\_SystemPerformanceCheck-D3700V2 SN1036

Frequency: 3700 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used:  $f = 3700$  MHz;  $\sigma = 3.101$  S/m;  $\epsilon_r = 38.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2020-07-23
- Probe: EX3DV4 - SN7645; ConvF(7.2, 7.2, 7.2) @ 3700 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

**Head/3700MHz, Pin=100mW/Area Scan (5x7x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 12.8 W/kg


**Head/3700MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 69.68 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.2 W/kg

**SAR(1 g) = 6.88 W/kg; SAR(10 g) = 2.56 W/kg**

Maximum value of SAR (measured) = 13.2 W/kg

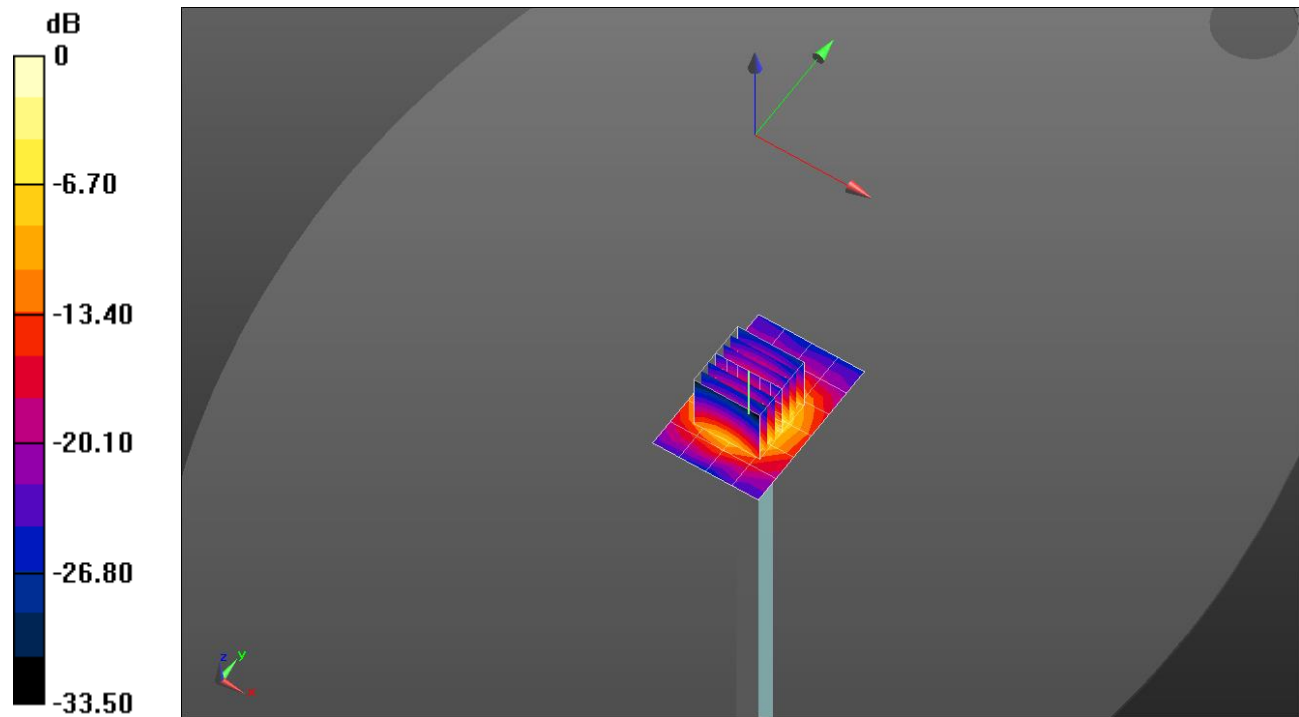


0 dB = 13.2 W/kg = 11.21 dBW/kg

### 20210607\_SystemPerformanceCheck-D3700V2 SN1036

Frequency: 3700 MHz; Duty Cycle: 1:1

**Head/3700MHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 11.8 W/kg

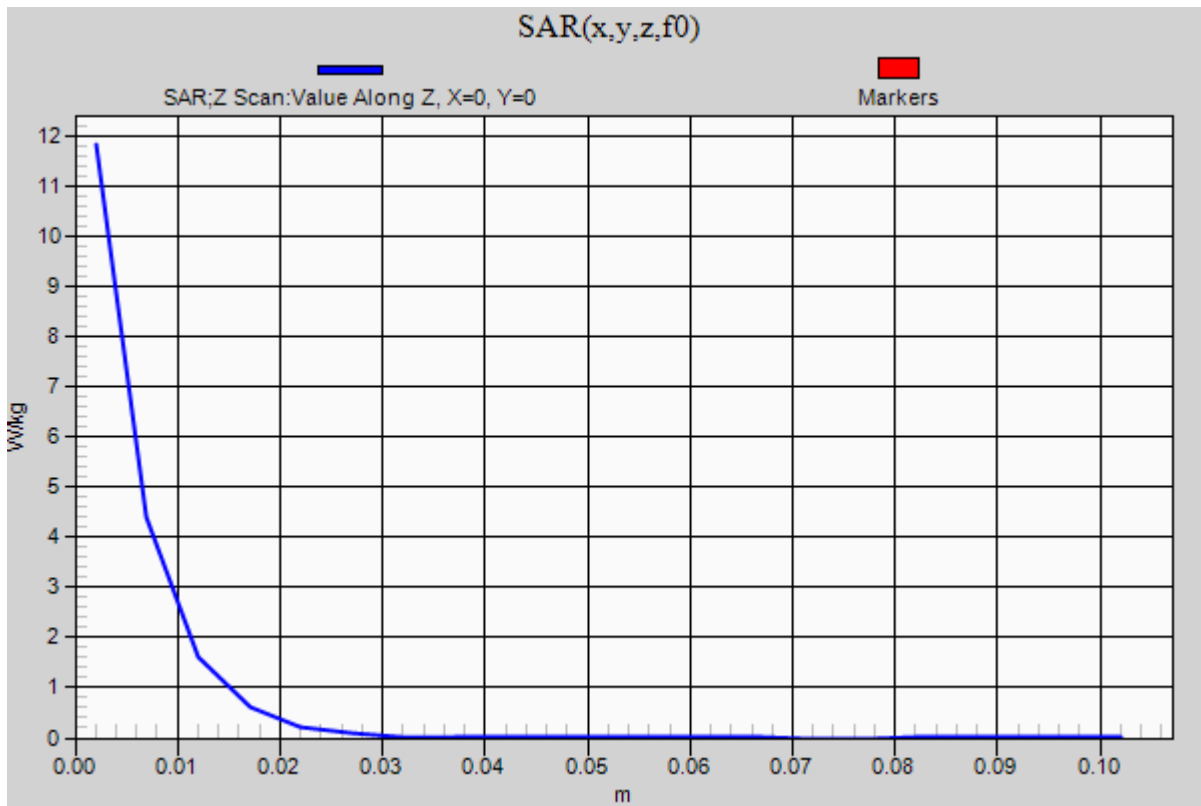

## 20210611\_SystemPerformanceCheck-D3500V2 SN1121

Frequency: 3500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 3500 \text{ MHz}$ ;  $\sigma = 2.799 \text{ S/m}$ ;  $\epsilon_r = 39.471$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2020-07-23
- Probe: EX3DV4 - SN7645; ConvF(7.24, 7.24, 7.24) @ 3500 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

**Head/3500MHz, Pin=100mW/Area Scan (5x7x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 11.7 W/kg


**Head/3500MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 69.88 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 16.2 W/kg

**SAR(1 g) = 6.39 W/kg; SAR(10 g) = 2.46 W/kg**

Maximum value of SAR (measured) = 12.0 W/kg

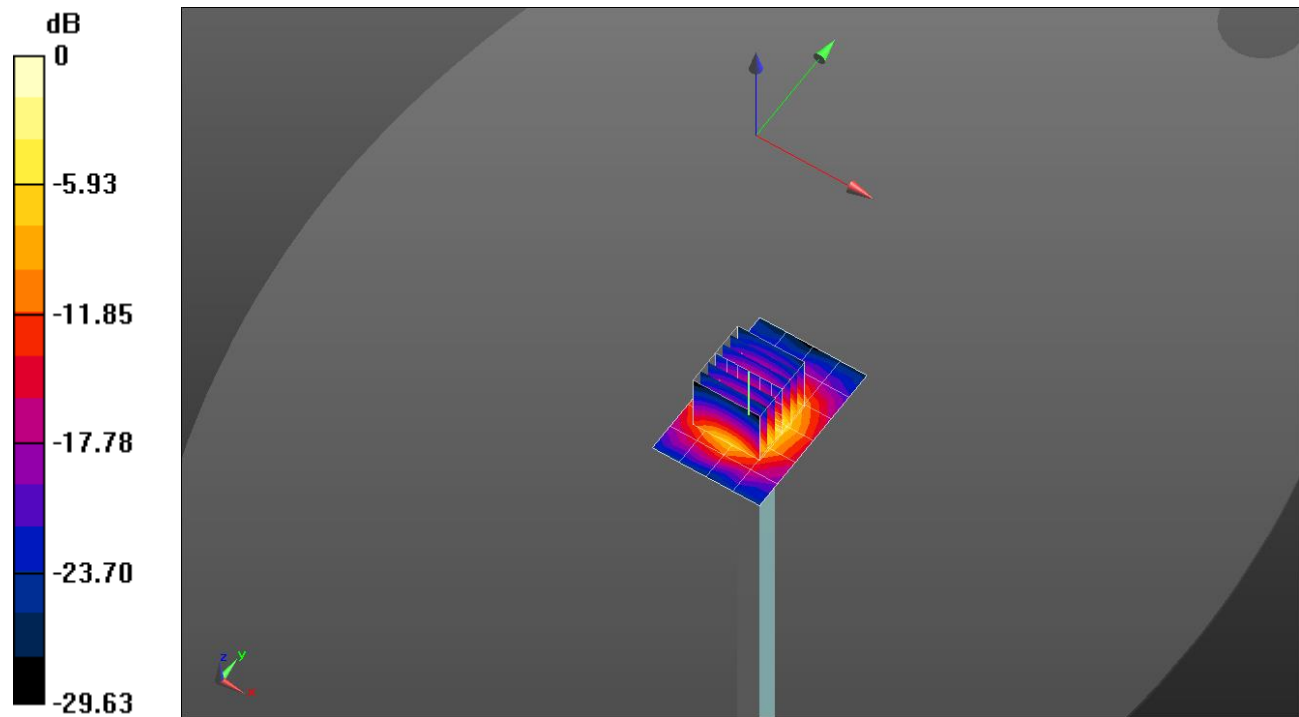


0 dB = 12.0 W/kg = 10.79 dBW/kg

### 20210611\_SystemPerformanceCheck-D3500V2 SN1121

Frequency: 3500 MHz; Duty Cycle: 1:1

**Head/3500MHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 10.7 W/kg

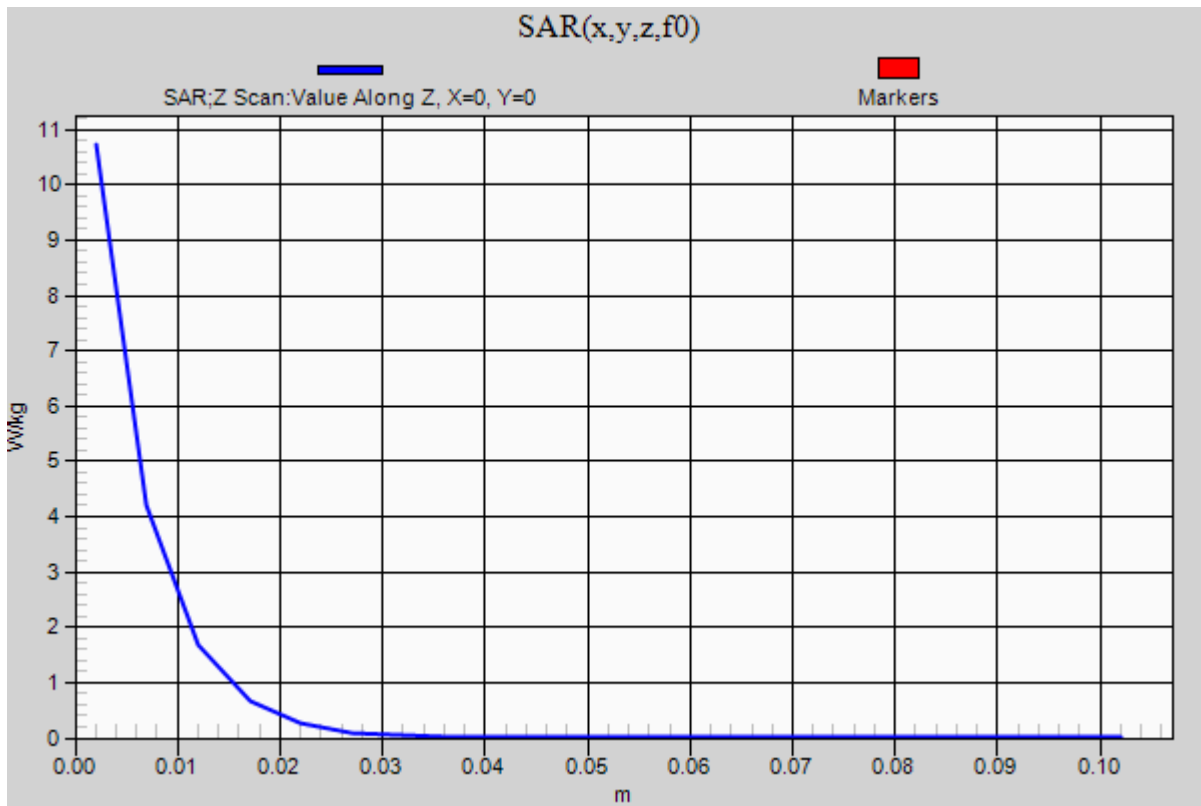

## 20210505\_SystemPerformancecheck-D2450V2 SN 939

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 39.633$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1591; Calibrated: 2021-03-26
- Probe: EX3DV4 - SN7314; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 2020-05-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt)\_Left; Type: QD OVA 004 AA; Serial: 2111

**Head/2450MHz, Pin=100mW/Area Scan (6x8x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 6.95 W/kg


**Head/2450MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 64.92 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 11.7 W/kg

**SAR(1 g) = 5.46 W/kg; SAR(10 g) = 2.51 W/kg**

Maximum value of SAR (measured) = 9.37 W/kg

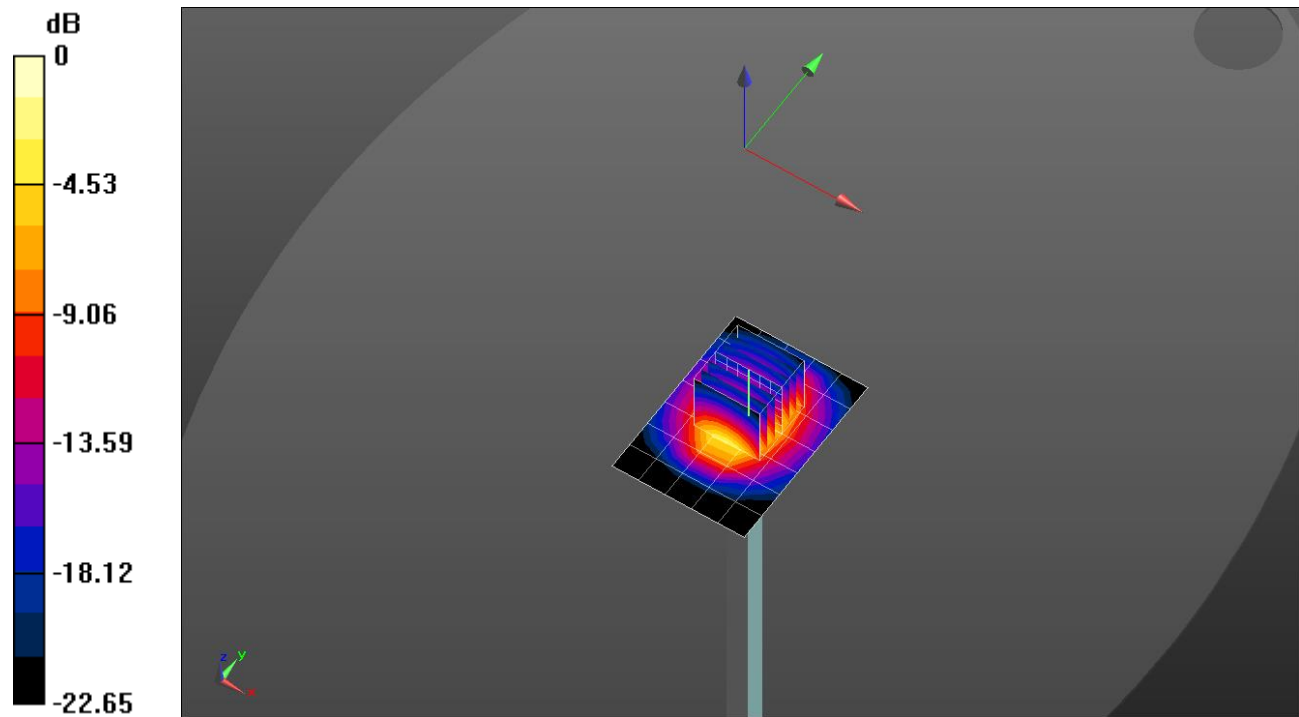


0 dB = 9.37 W/kg = 9.72 dBW/kg

### 20210505\_SystemPerformancecheck-D2450V2 SN 939

Frequency: 2450 MHz; Duty Cycle: 1:1

**Head/2450MHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 8.21 W/kg

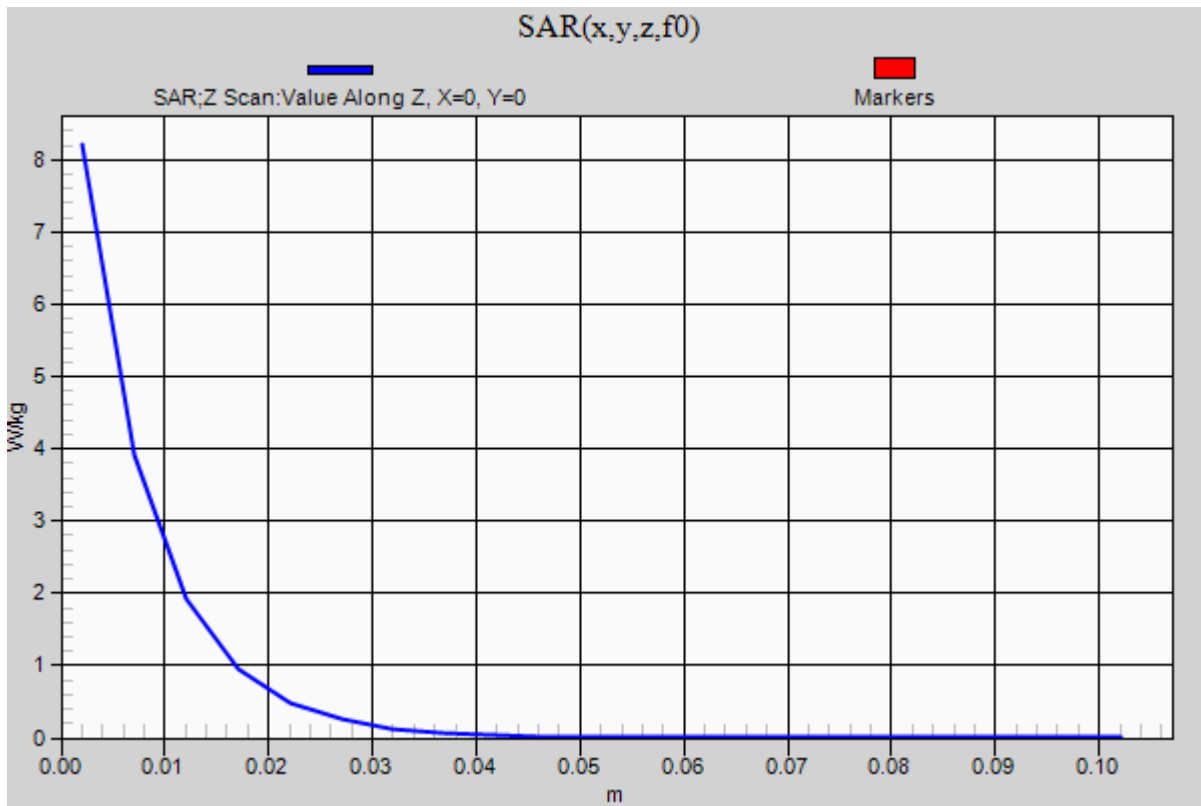

**20210524\_SystemPerformanceCheck-D750V3 SN 1122**

Frequency: 750 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.896 \text{ S/m}$ ;  $\epsilon_r = 43.09$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1447; Calibrated: 2021-03-23
- Probe: EX3DV4 - SN7545; ConvF(10.17, 10.17, 10.17) @ 750 MHz; Calibrated: 2020-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

**Head/750MHz, Pin=100 mW/Area Scan (7x17x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 W/kg


**Head/750MHz, Pin=100 mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.67 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.539 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

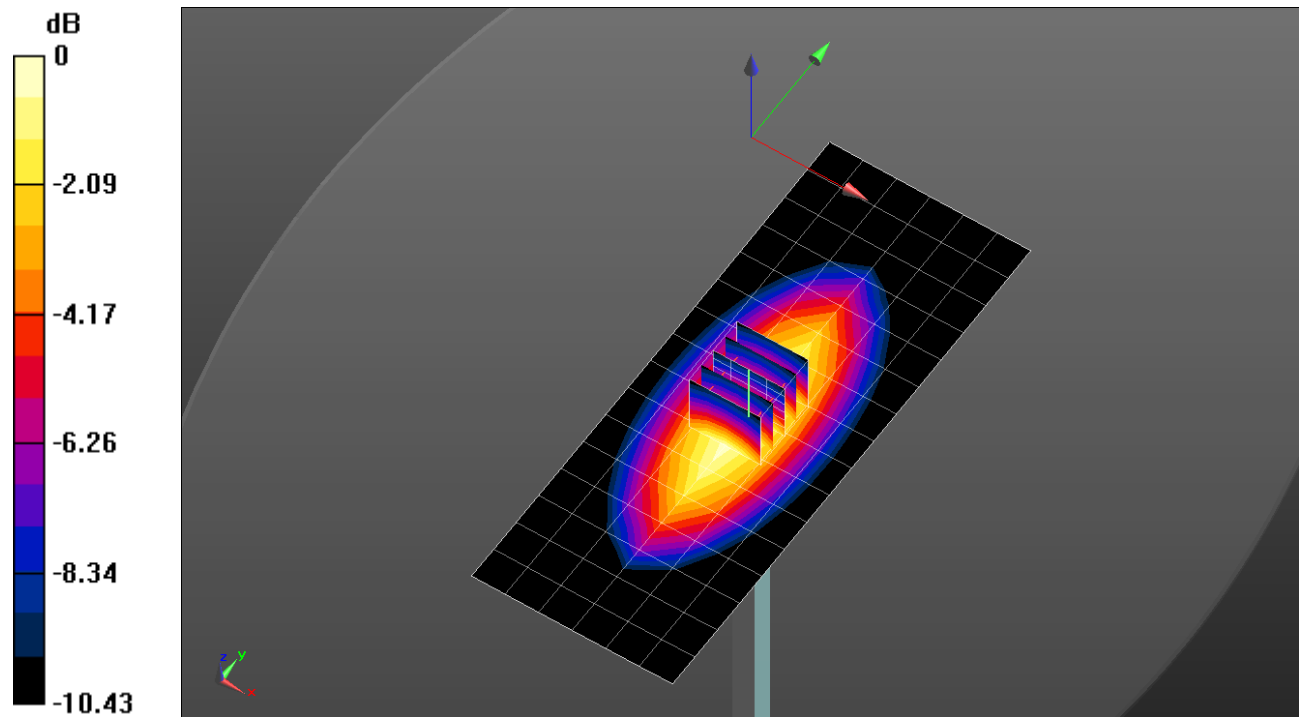


0 dB = 1.10 W/kg = 0.41 dBW/kg

### 20210524\_SystemPerformanceCheck-D750V3 SN 1122

Frequency: 750 MHz; Duty Cycle: 1:1

**Head/750MHz, Pin=100 mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 1.03 W/kg

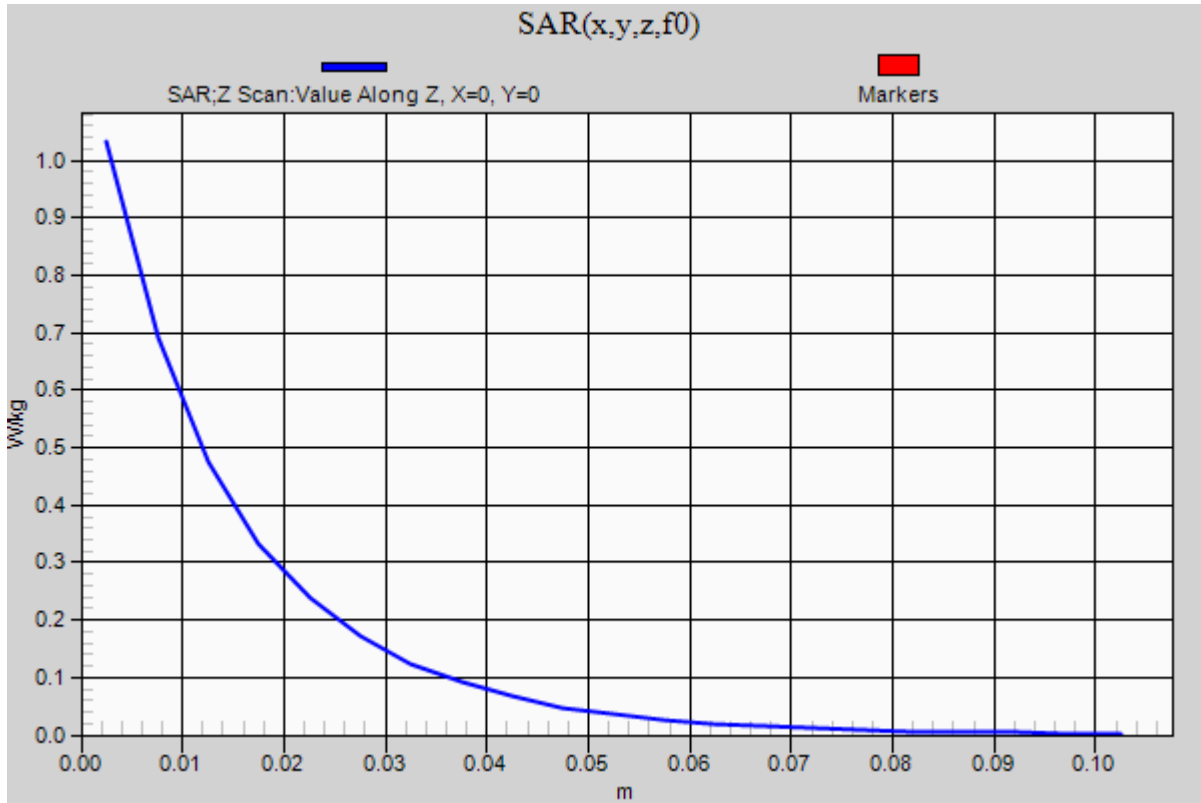



## 20210524\_SystemPerformanceCheck-D835V2 SN 4d194

Frequency: 835 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 42.785$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1447; Calibrated: 2021-03-23
- Probe: EX3DV4 - SN7545; ConvF(9.86, 9.86, 9.86) @ 835 MHz; Calibrated: 2020-11-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

**Head/835MHz, Pin=100 mW/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.20 W/kg


**Head/835MHz, Pin=100 mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.654 W/kg**

Maximum value of SAR (measured) = 1.21 W/kg

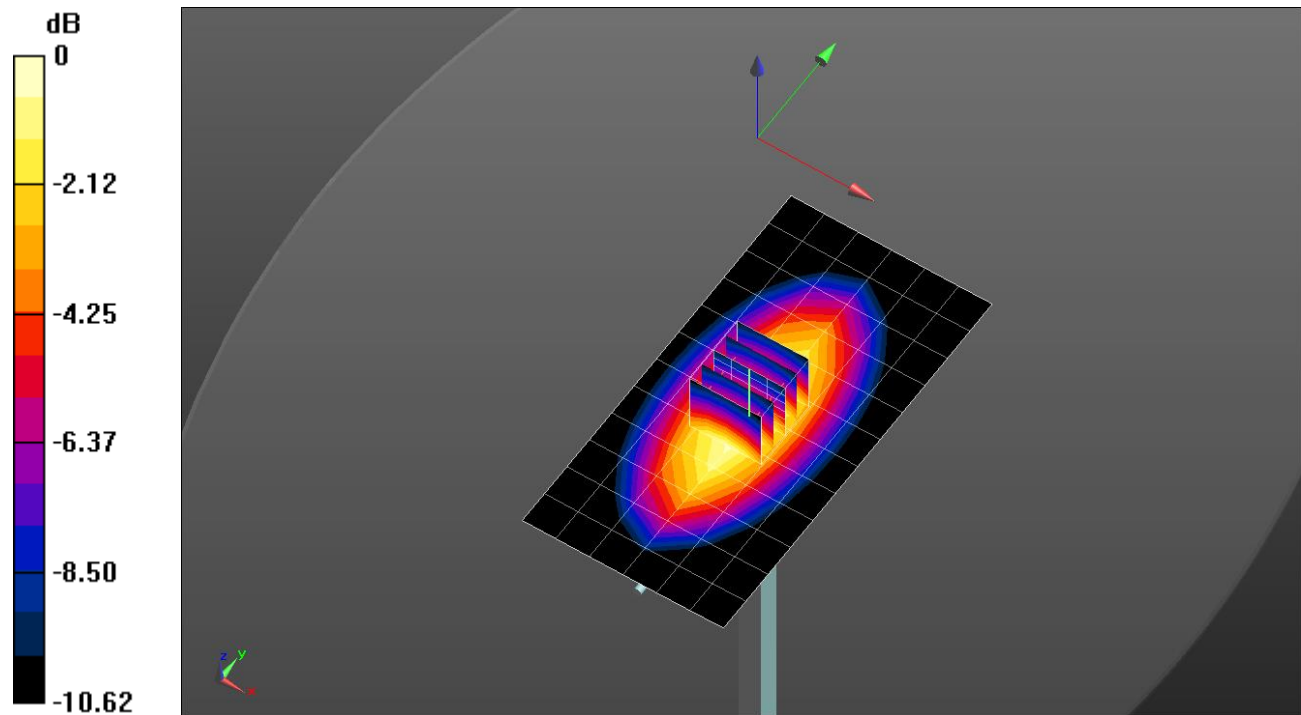


0 dB = 1.21 W/kg = 0.83 dBW/kg

### 20210524\_SystemPerformanceCheck-D835V2 SN 4d194

Frequency: 835 MHz; Duty Cycle: 1:1

**Head/835MHz, Pin=100 mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 1.25 W/kg

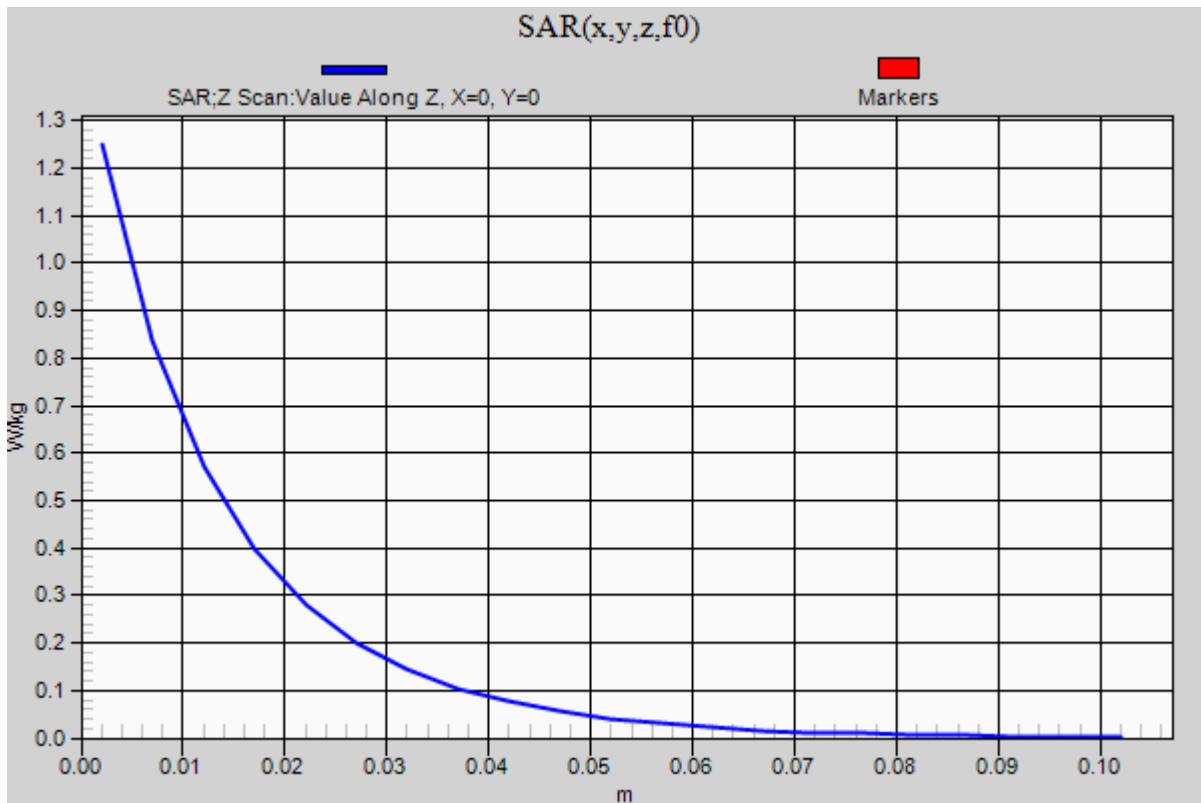

## 20210527\_SystemPerformancecheck- D2600V2 SN 1097

Frequency: 2600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 2600 \text{ MHz}$ ;  $\sigma = 1.959 \text{ S/m}$ ;  $\epsilon_r = 38.144$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1447; Calibrated: 2021-03-23
- Probe: EX3DV4 - SN7545; ConvF(7.11, 7.11, 7.11) @ 2600 MHz; Calibrated: 2020-11-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

**Head/2600MHz, Pin=100 mW/Area Scan (6x8x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
 Maximum value of SAR (measured) = 6.71 W/kg


**Head/2600MHz, Pin=100 mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 68.01 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 12.4 W/kg

**SAR(1 g) = 5.84 W/kg; SAR(10 g) = 2.63 W/kg**

Maximum value of SAR (measured) = 8.33 W/kg

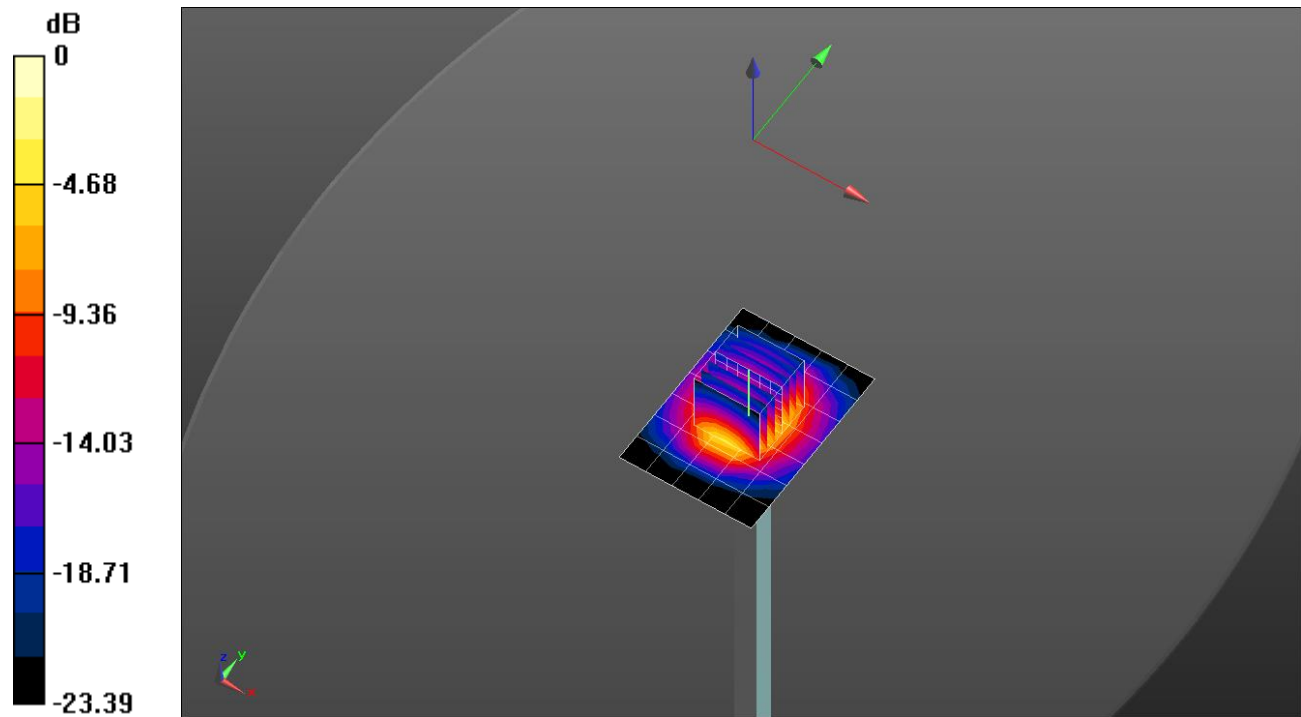


0 dB = 8.33 W/kg = 9.21 dBW/kg

### 20210527\_SystemPerformancecheck-D2600V2 SN 1097

Frequency: 2600 MHz; Duty Cycle: 1:1

**Head/2600MHz, Pin=100 mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 8.77 W/kg

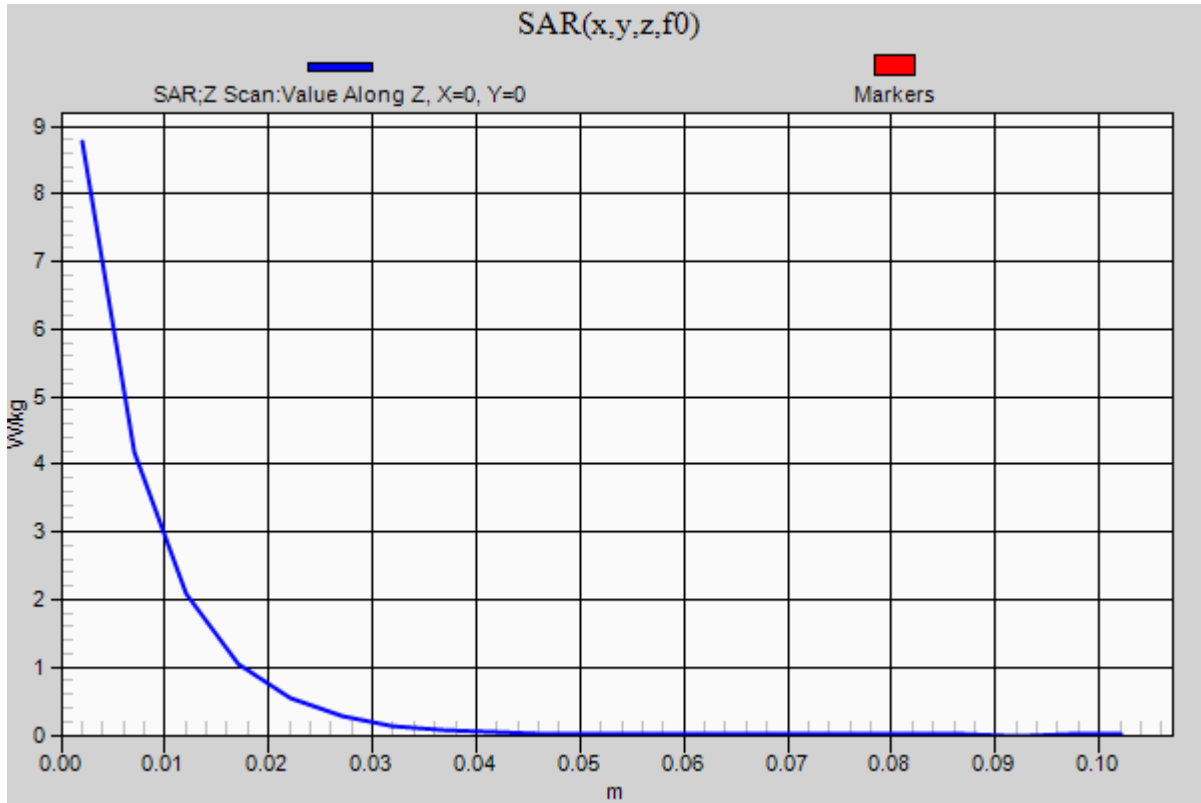

## 20210531\_SystemPerformancecheck-D2450V2 SN 939

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 38.784$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1447; Calibrated: 2021-03-23
- Probe: EX3DV4 - SN7545; ConvF(7.29, 7.29, 7.29) @ 2450 MHz; Calibrated: 2020-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

**Head/2450MHz, Pin=100mW/Area Scan (6x8x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 6.73 W/kg


**Head/2450MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.78 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 11.8 W/kg

**SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.61 W/kg**

Maximum value of SAR (measured) = 9.47 W/kg

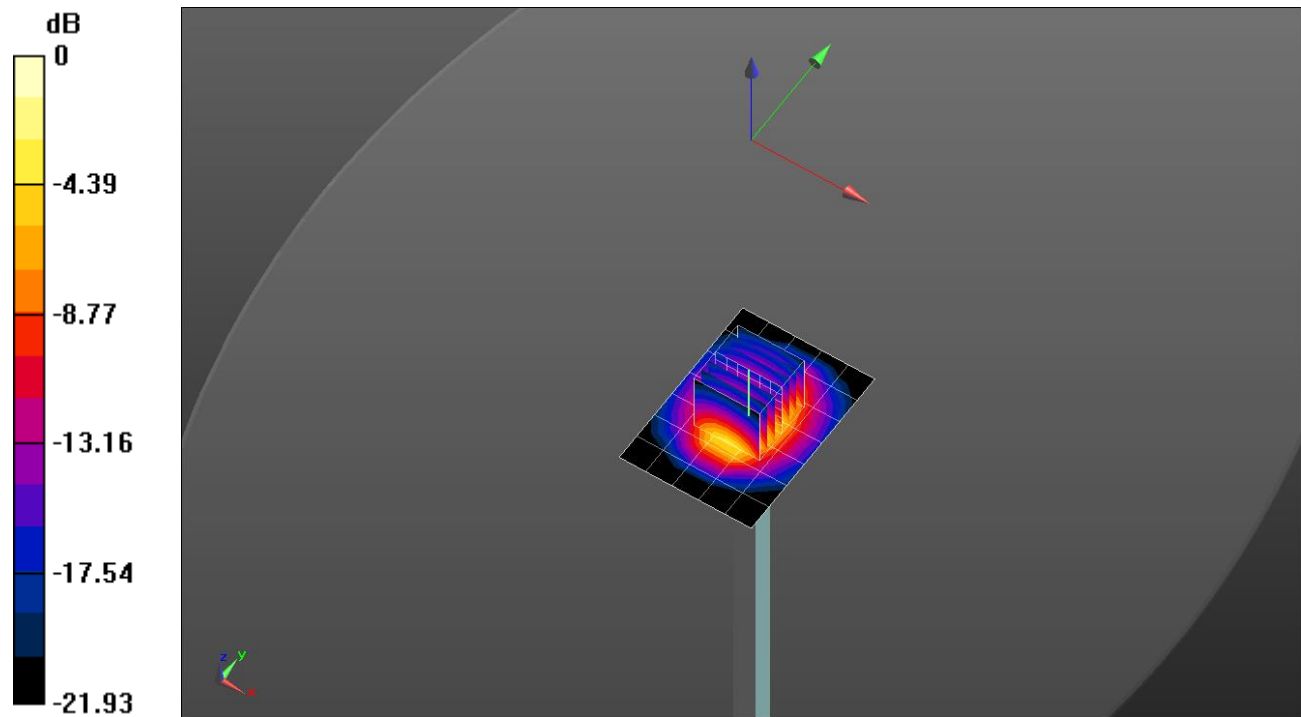


0 dB = 9.47 W/kg = 9.76 dBW/kg

### 20210531\_SystemPerformancecheck-D2450V2 SN 939

Frequency: 2450 MHz; Duty Cycle: 1:1

**Head/2450MHz, Pin=100mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 8.43 W/kg

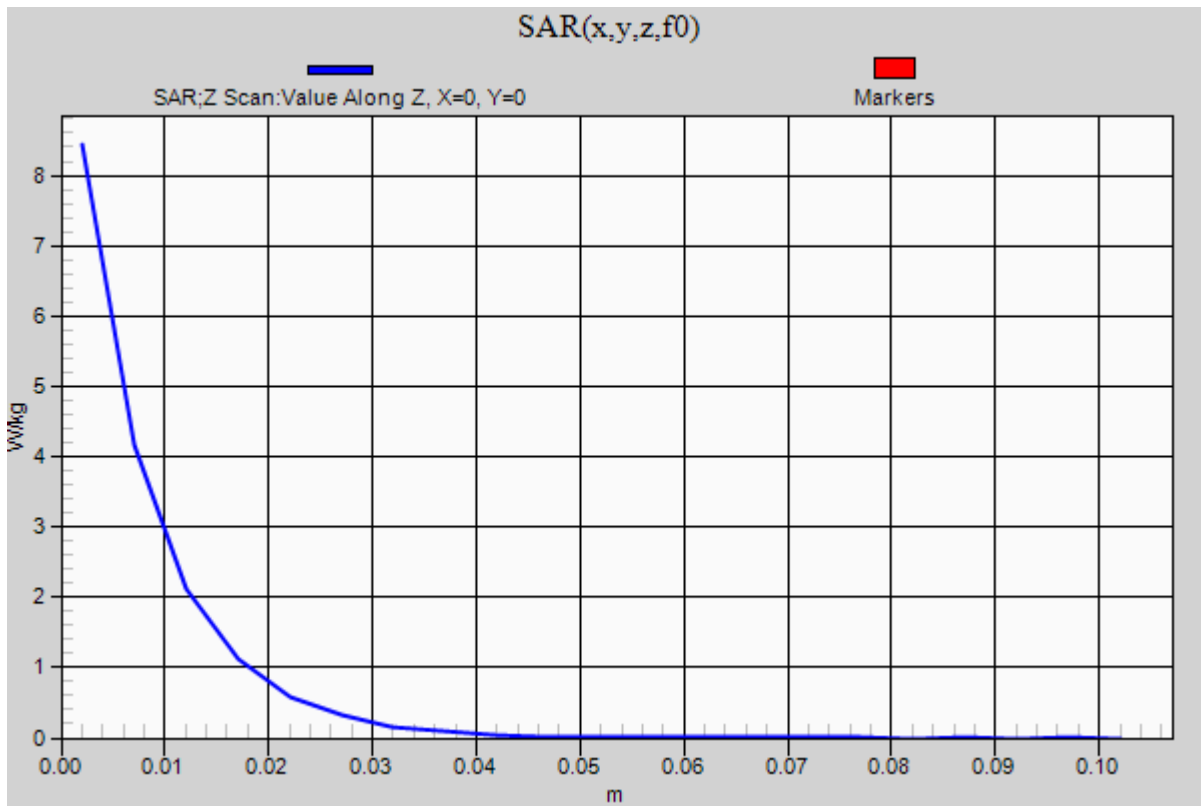

## 20210611\_SystemPerformanceCheck-D1750V2 SN 1125

Frequency: 1750 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.363 \text{ S/m}$ ;  $\epsilon_r = 40.096$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1447; Calibrated: 2021-03-23
- Probe: EX3DV4 - SN7545; ConvF(8.2, 8.2, 8.2) @ 1750 MHz; Calibrated: 2020-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

**Head/1750MHz, Pin=100 mW/Area Scan (7x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 5.75 W/kg


**Head/1750MHz, Pin=100 mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  
 $dz=5\text{mm}$

Reference Value = 60.67 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 6.89 W/kg

**SAR(1 g) = 3.75 W/kg; SAR(10 g) = 2.01 W/kg**

Maximum value of SAR (measured) = 5.79 W/kg

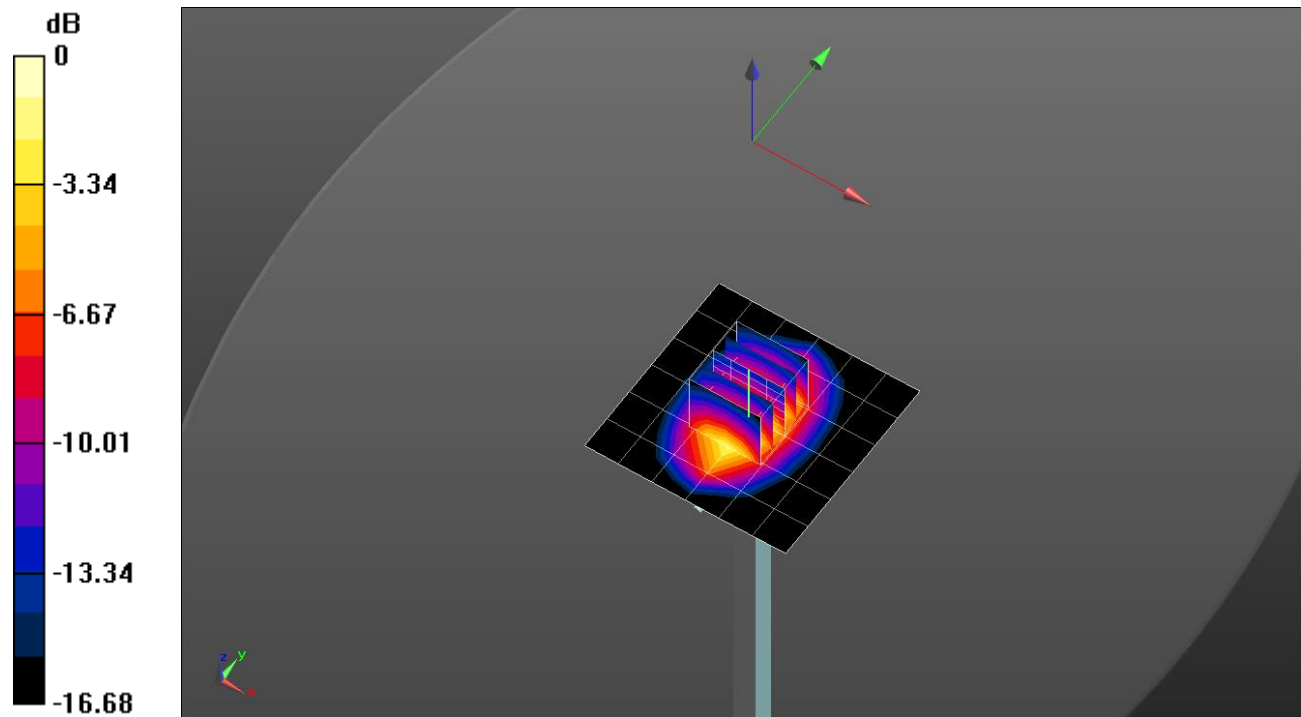

0 dB = 5.79 W/kg = 7.63 dBW/kg

### 20210611\_SystemPerformanceCheck-D1750V2 SN 1125

Frequency: 1750 MHz; Duty Cycle: 1:1

**Head/1750MHz, Pin=100 mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 4.89 W/kg

