



FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

Notebook PC

Model: NP900X3F, NP900X3E

Trade Name: SAMSUNG

Issued to

**Samsung Electronics Co., Ltd.
19 Chapin Rd., Building D, Pine Brook, New Jersey,
United States. (Zip code: 07058)**

Issued by

**Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: April 10, 2013**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 10, 2013	Initial Issue	ALL	Gina Lo



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	7
3.1 EUT EXERCISE	7
3.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.3 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 TABLE OF ACCREDITATIONS AND LISTINGS	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 15 REQUIREMENTS.....	13
7.1 DYNAMIC FREQUENCY SELECTION.....	13
APPENDIX II PHOTOGRAPHS OF TEST SETUP.....	48
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: Samsung Electronics Co., Ltd.
 19 Chapin Rd., Building D, Pine Brook, New Jersey,
 United States. (Zip code: 07058)

Equipment Under Test: Notebook PC

Trade Name: SAMSUNG

Model: NP900X3F, NP900X3E

Date of Test: March 30 ~ 31, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Miller Lee
 Section Manager
 Compliance Certification Services Inc.

Gina Lo
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Notebook PC			
Trade Name	SAMSUNG			
Model Number	NP900X3F, NP900X3E			
Model Discrepancy	All the specification and layout are identical except they come with different model numbers and colors.			
Received Date	March 29, 2013			
Power Supply	<p>1. Power Adapter: SAMSUNG / PA-1400-24 I/P: 100-240V, 1.0A, 50-60Hz O/P: 19V, 2.1A</p> <p>2. VDC from Li-Polymer Battery: Trade Name: SAMAUNG Rating: DC 7.5V, 44Wh(5880mAh)</p>			
Operating Frequency Range & Number of Channels		Mode	Frequency Range (MHz)	Number of Channels
	UNII Band II	IEEE 802.11a	5260 - 5320	4 Channels
		IEEE 802.11n HT 20 MHz	5260 - 5320	4 Channels
		IEEE 802.11n HT 40 MHz	5270 - 5310	2 Channels
	UNII Band III	IEEE 802.11a	5500 - 5700	8 Channels
		IEEE 802.11n HT 20 MHz	5500 - 5700	8 Channels
IEEE 802.11n HT 40 MHz		5510 - 5670	3 Channels	
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)			
Transmit Data Rate	<p>IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p>IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps)</p> <p>IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)</p>			
Antenna Specification	Antenna Gain: 4.35 dBi			
Antenna Designation	PIFA Antenna			



Operation Frequency:

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
52	5260
54	5270
56	5280
60	5300
62	5310
64	5320
100	5500
102	5510
104	5520
108	5540
110	5550
112	5560
116	5580
118	5590
132	5660
134	5670
136	5680
140	5700
149	5745
153	5765
157	5785
161	5805
165	5825

Remark:

1. *The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
2. *This submittal(s) (test report) is intended for FCC ID: **A3LNP900X3F** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



3. TEST METHODOLOGY

Testing was performed according to the procedures in FCC 47 CFR Part 15 Subpart E.

3.1 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.3 DESCRIPTION OF TEST MODES

The EUT (model: NP900X3F) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz:

Channel (5300MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz:

Channel (5310MHz) with 13.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz:

Channel (5500MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz:

Channel (5510MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Dynamic Frequency Selection				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSEK 30	100264	05/23/2013
Signal Generator	Agilent	E8267C	US42340162	09/17/2013



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045




No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.



5.2 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method –47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. FCC PART 15 REQUIREMENTS

7.1 DYNAMIC FREQUENCY SELECTION

LIMIT

According to §15.407 (h) and FCC 06-96 appendix “compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection”.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
Non-Occupancy Period	Yes	Yes	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 3: Interference Threshold values, Master or Client incorporating In-Service

Maximum Transmit Power	Value (see note)
≥200 Milliwatt	-64 dBm
< 200 Milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.



Table 4: DFS Response requirement values

Parameter	Value
Non-occupancy period	30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
U-NII Detection Bandwidth	Minimum 80% of the UNII 99% transmission power bandwidth. See Note 3.

The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (µsec)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.33	70%	30



DESCRIPTION OF EUT

Overview Of EUT With Respect To §15.407 (H) Requirements

The EUT operates over the 5250-5350 MHz range as a Client Device that does not have radar detection capability.

The antenna assembly utilized with the EUT has a gain of 4.35 dBi.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a architecture, with a nominal channel bandwidth of 20 MHz.

The Master Device is a Cisco Aironet 802.11a/b/g Access Point, FCC ID: LDK102062.

The rated output power of the Master unit is < 23dBm (EIRP). Therefore the required interference threshold level is -62 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is $-62 + 5 = -57$ dBm.

The calibrated conducted DFS Detection Threshold level is set to -62 dBm. The tested level is lower than the required level hence it provides margin to the limit.

Manufacturer’s Statement Regarding Uniform Channel Spreading

The end product implements an automatic channel selection feature at startup such that operation commences on channels distributed across the entire set of allowed 5GHz channels. This feature will ensure uniform spreading is achieved while avoiding non-allowed channels due to prior radar events.



TEST AND MEASUREMENT SYSTEM

System Overview

The measurement system is based on a conducted test method.

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.


The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

Conducted Method System Block Diagram

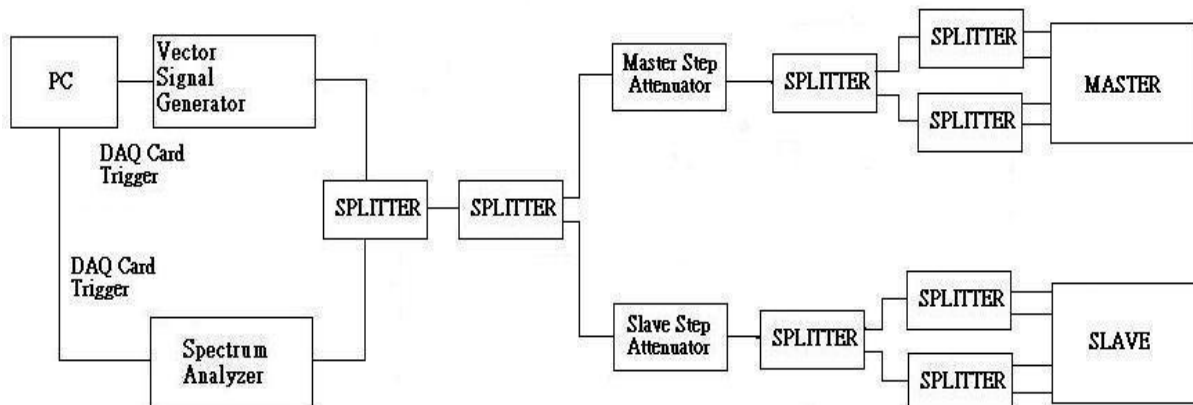



System Calibration

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of -62 dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from -62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at -62 dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at -62 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.


Adjustment Of Displayed Traffic Level

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.

If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.



Test Setup

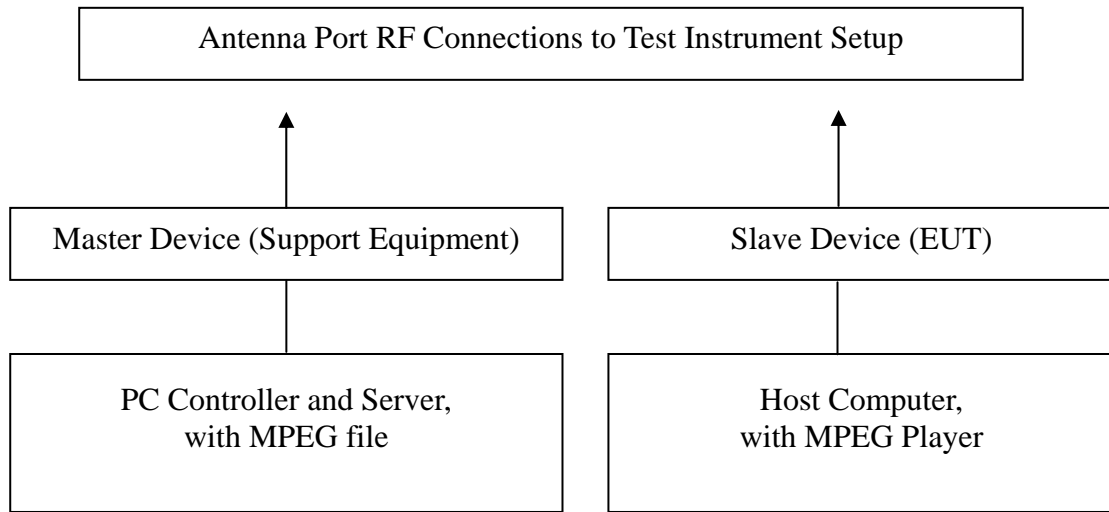

TEST RESULTS

No non-compliance noted



Test Plot


PLOTS OF RADAR WAVEFORMS

Sample of Short Pulse Radar Type 1

Agilent 07:42:53 Mar 31, 2013

R T

Mkr1 24.25 ms
-57.32 dBm

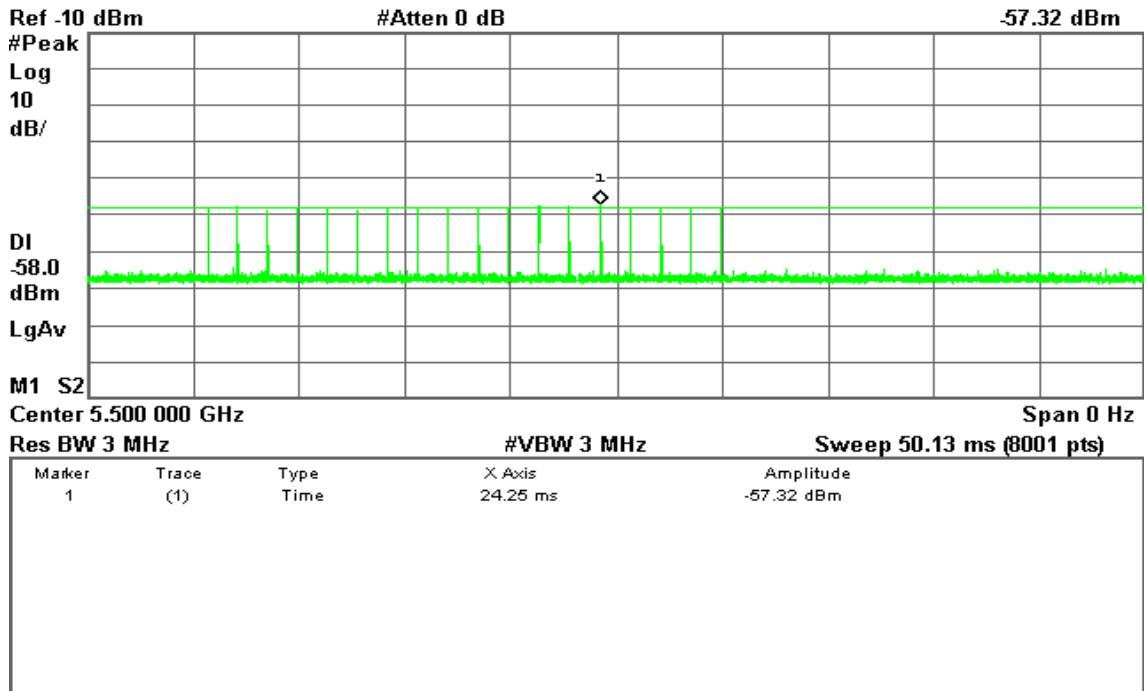


Sample of Short Pulse Radar Type 2

Agilent 07:44:15 Mar 31, 2013

R T

Mkr1 6.382 ms
-57.47 dBm

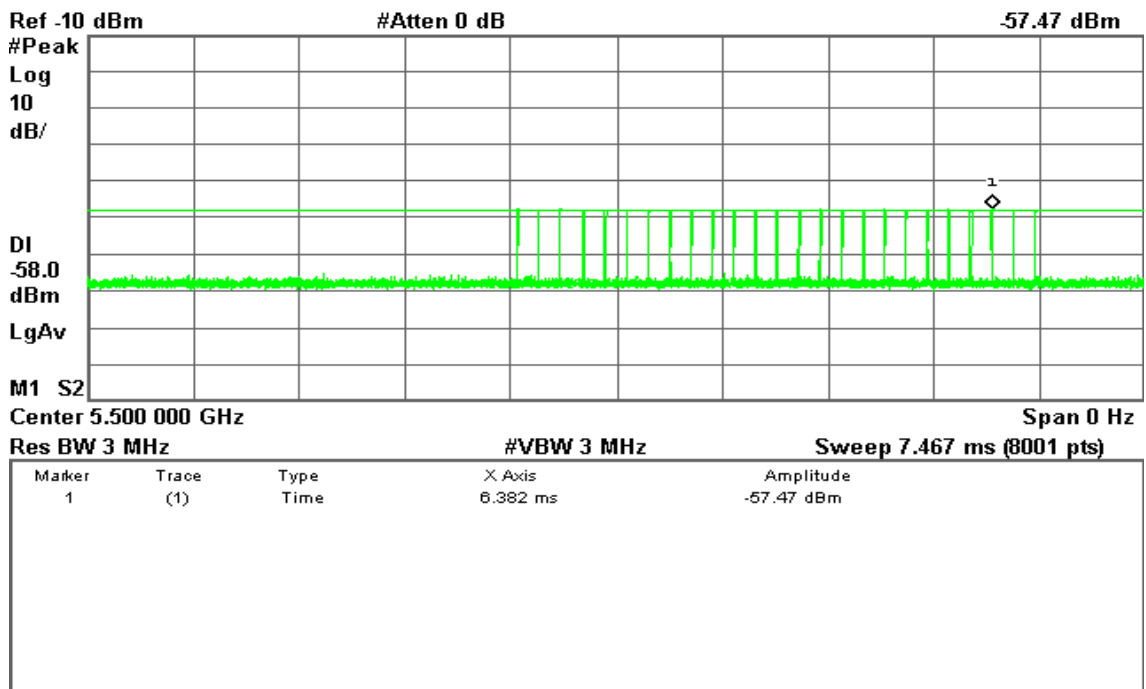




Sample of Short Pulse Radar Type 3

Agilent 07:45:28 Mar 31, 2013

R T

Mkr1 11.17 ms
-57.53 dBm

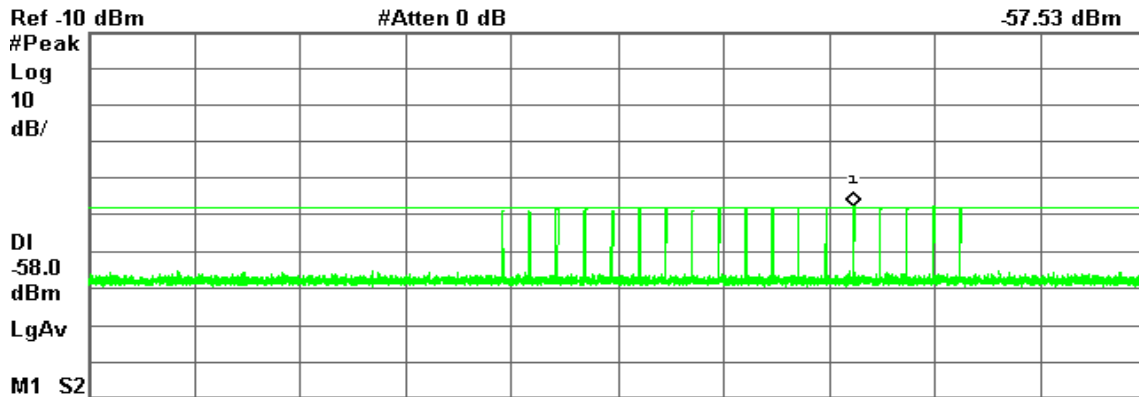

Center 5.500 000 GHz Span 0 Hz
 Res BW 3 MHz #VBW 3 MHz Sweep 15.47 ms (8001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	11.17 ms	-57.53 dBm

Sample of Short Pulse Radar Type 4

Agilent 07:47:33 Mar 31, 2013

R T

Mkr1 3.188 ms
-58.86 dBm

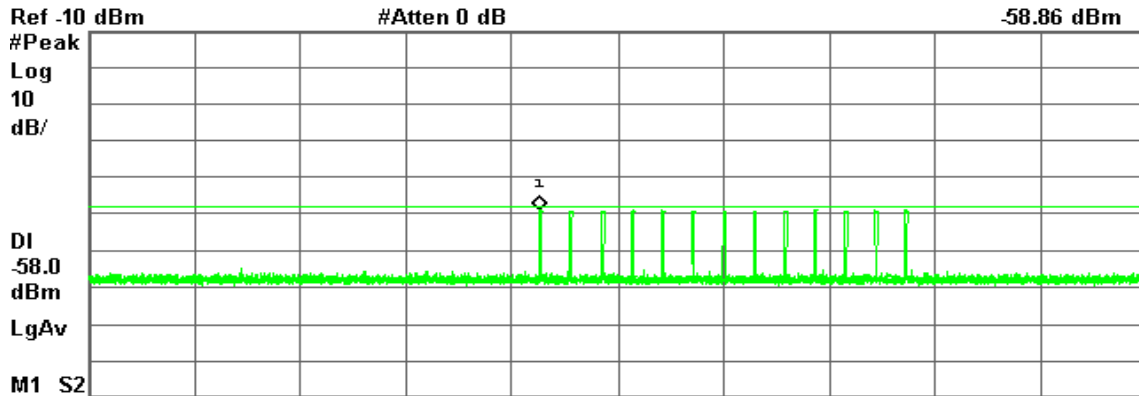

Center 5.500 000 GHz Span 0 Hz
 Res BW 3 MHz #VBW 3 MHz Sweep 7.467 ms (8001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	3.188 ms	-58.86 dBm



Sample of Long Pulse Radar Type 5

Agilent 07:40:30 Mar 31, 2013


R T

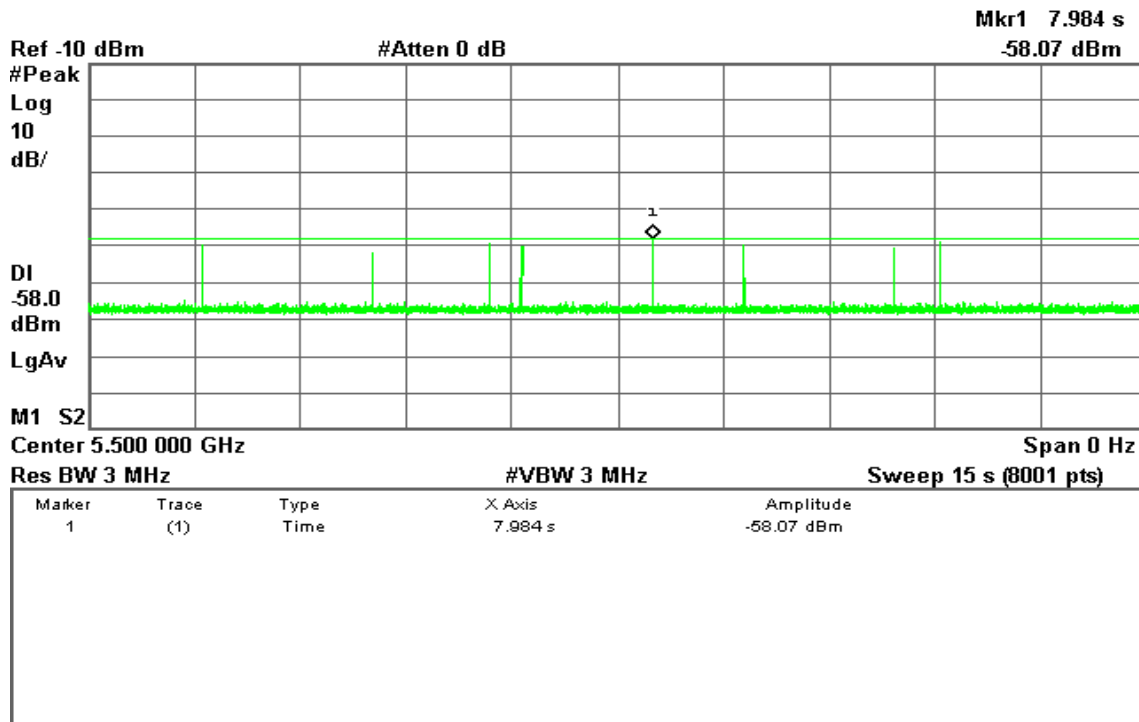

Sample of Frequency Hopping Radar Type 6

Agilent 07:51:31 Mar 31, 2013

R T

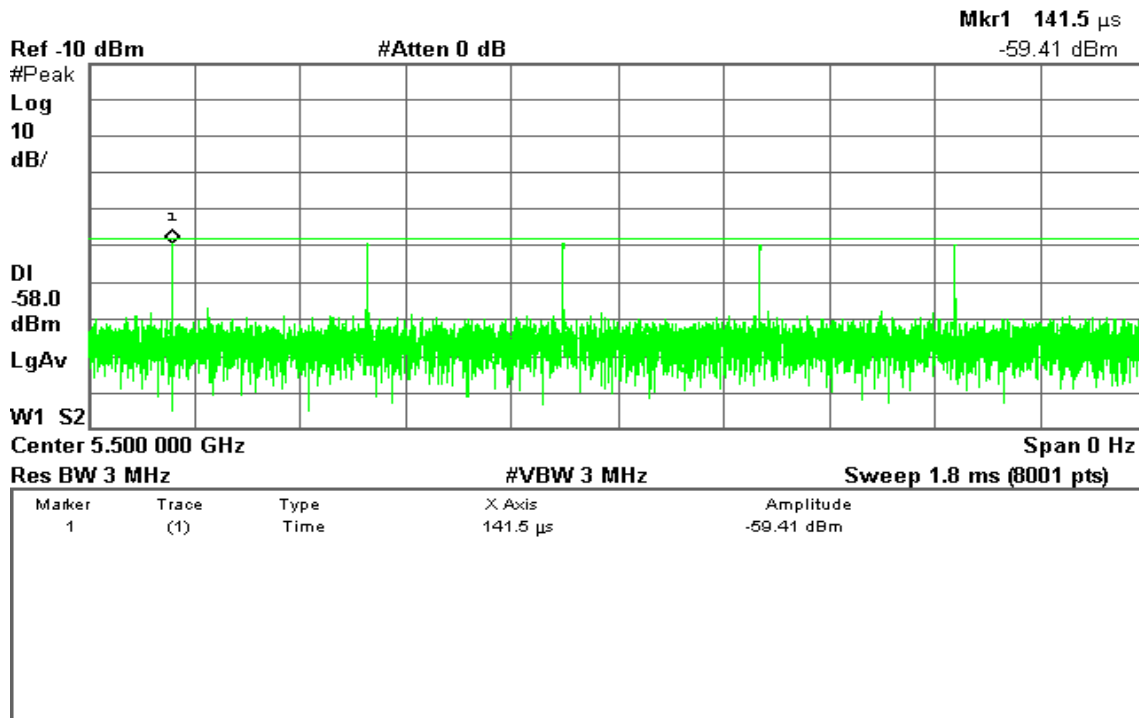




Plot of WLAN Traffic from Slave

IEEE 802.11n HT20 mode

Agilent 13:53:18 Mar 31, 2013


T

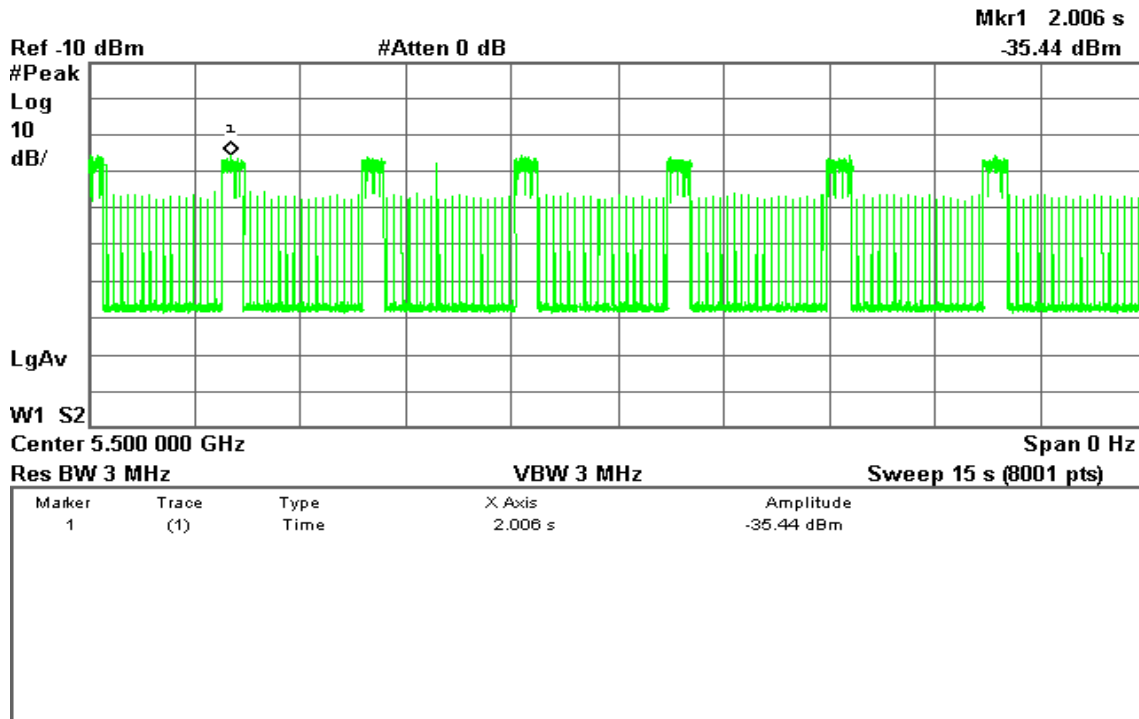

IEEE 802.11n HT40 mode

Agilent 13:48:36 Mar 31, 2013

T

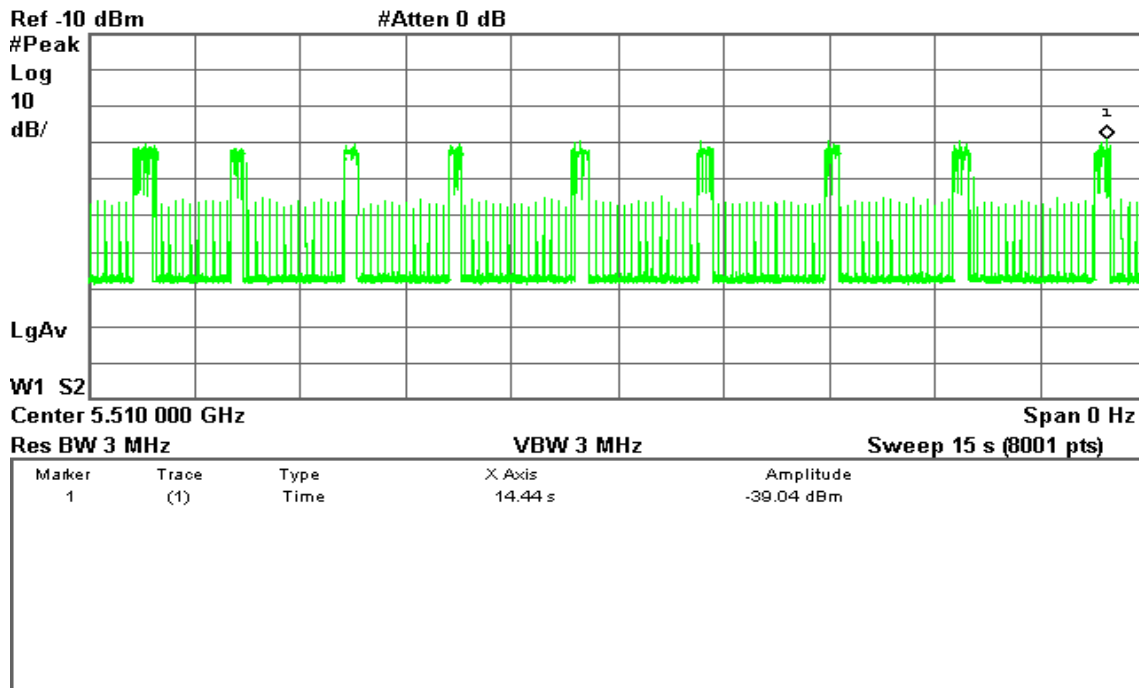



TEST CHANNEL AND METHOD

All tests were performed at a channel center frequency of 5500 MHz utilizing a conducted test method.

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

GENERAL REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and

Ends no earlier than (Reference Marker + 10 sec).



UNII Band II

IEEE 802.11n HT 20 MHz mode

Type 1 Channel Move Time Results

No non-compliance noted.


Channel Move Time (s)	Limit (s)
4.003	10

Agilent 17:13:15 Mar 30, 2013

R T

Δ Mkr2 4.003 s

-4.81 dB

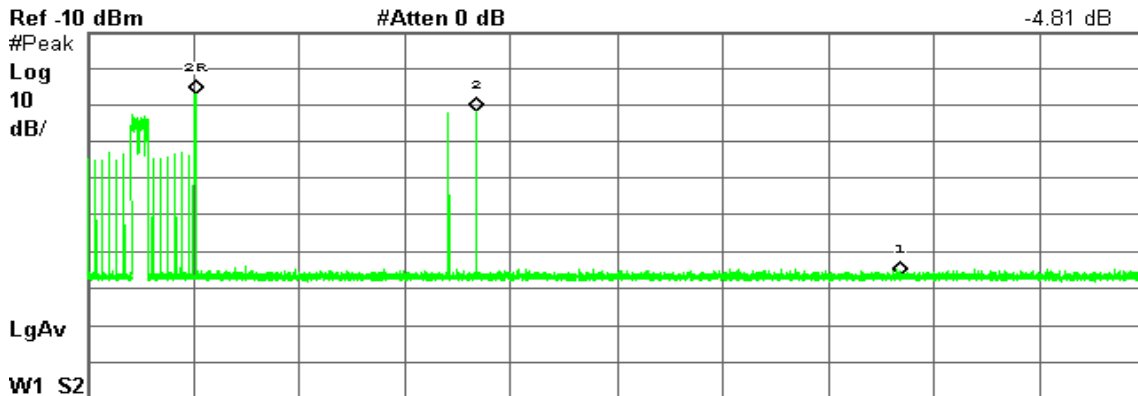

Center 5.300 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 15 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	1.526 s	-26.74 dBm
1Δ	(1)	Time	10 s	-50.10 dB
2R	(1)	Time	1.526 s	-26.74 dBm
2Δ	(1)	Time	4.003 s	-4.81 dB



IEEE 802.11n HT 40 MHz mode

Type 1 Channel Move Time Results


No non-compliance noted.

Channel Move Time (s)	Limit (s)
4.007	10

Agilent 16:54:31 Mar 30, 2013

R T

Δ Mkr2 4.007 s

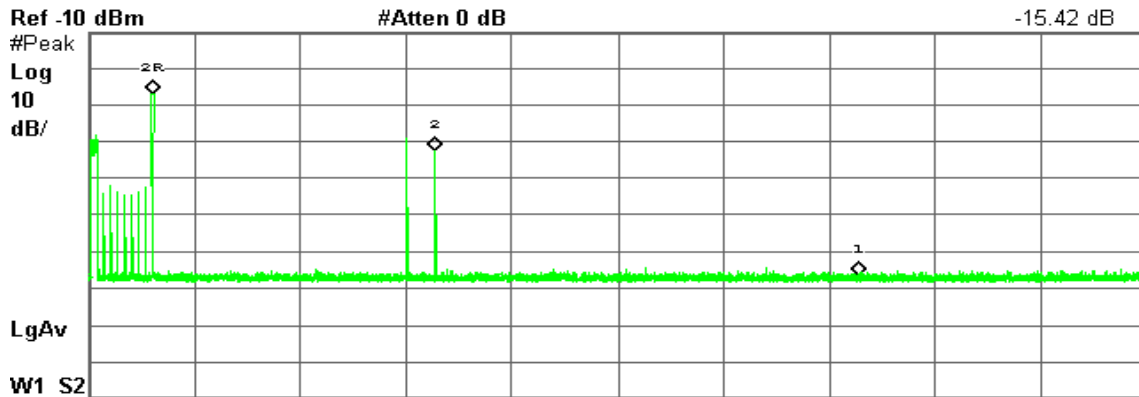

Center 5.310 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 15 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	907.5 ms	-26.86 dBm
1Δ	(1)	Time	10 s	-49.74 dB
2R	(1)	Time	907.5 ms	-26.86 dBm
2Δ	(1)	Time	4.007 s	-15.42 dB






IEEE 802.11n HT 20 MHz mode


Type 1 Channel Closing Transmission Time Results

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
3.75	60	-56.25

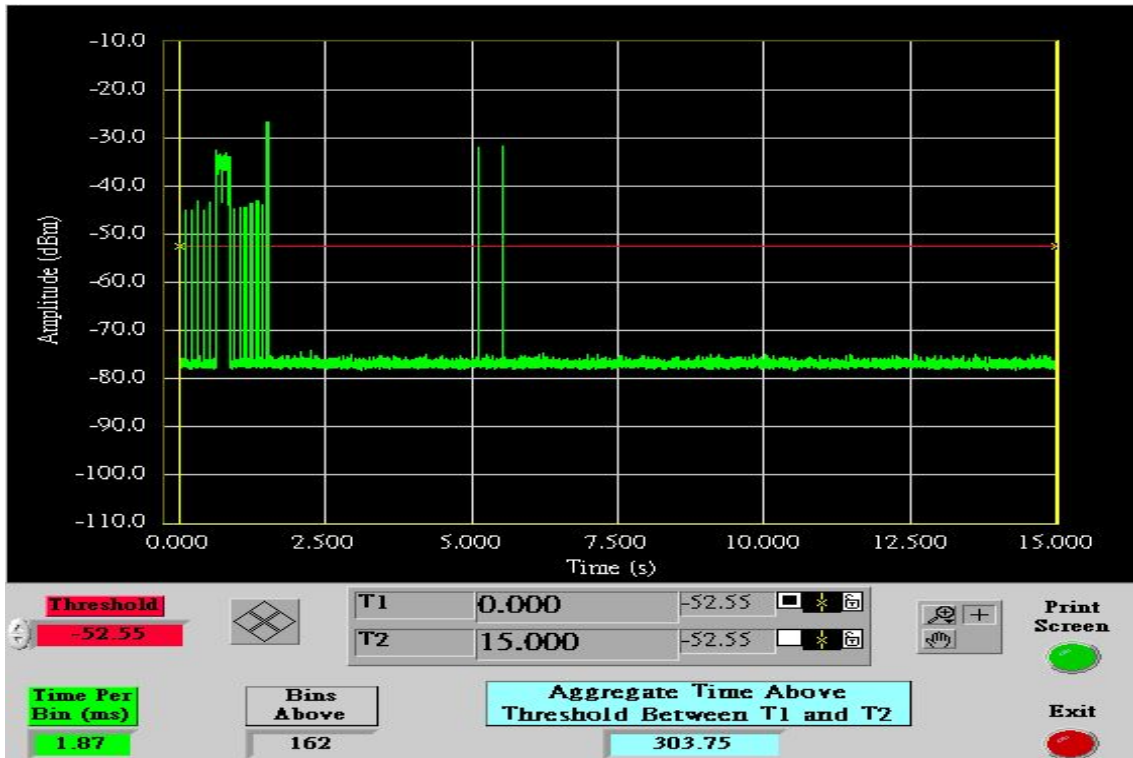

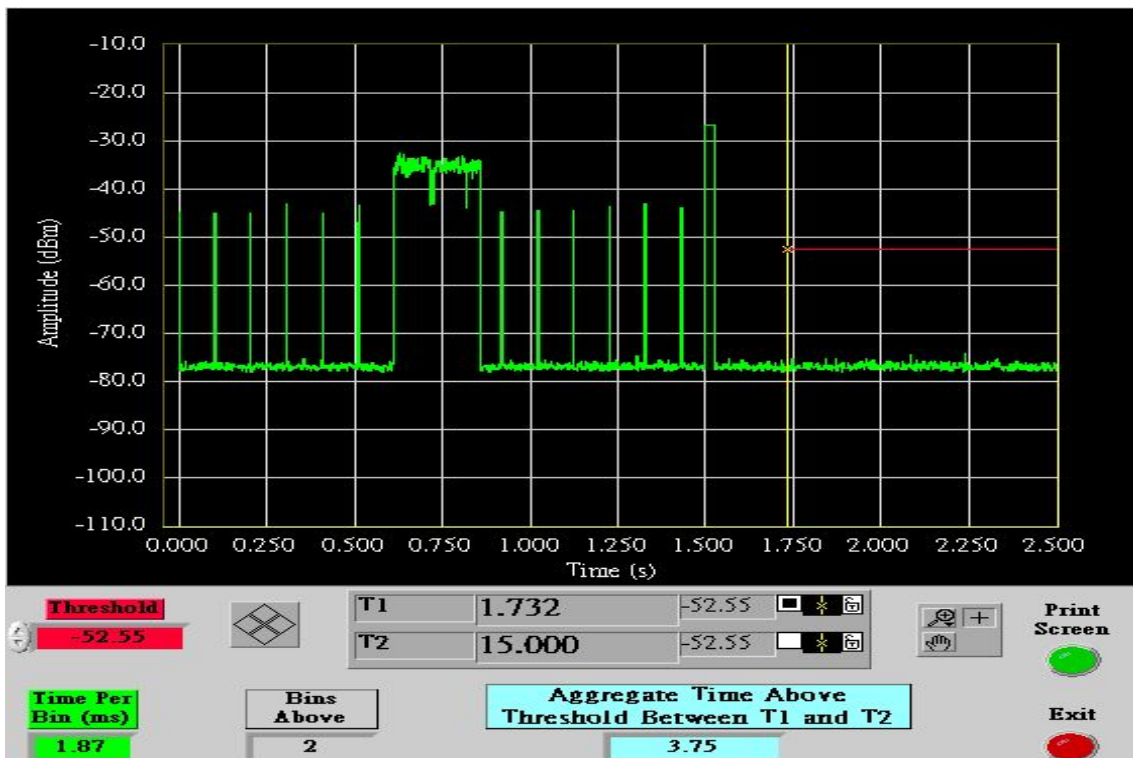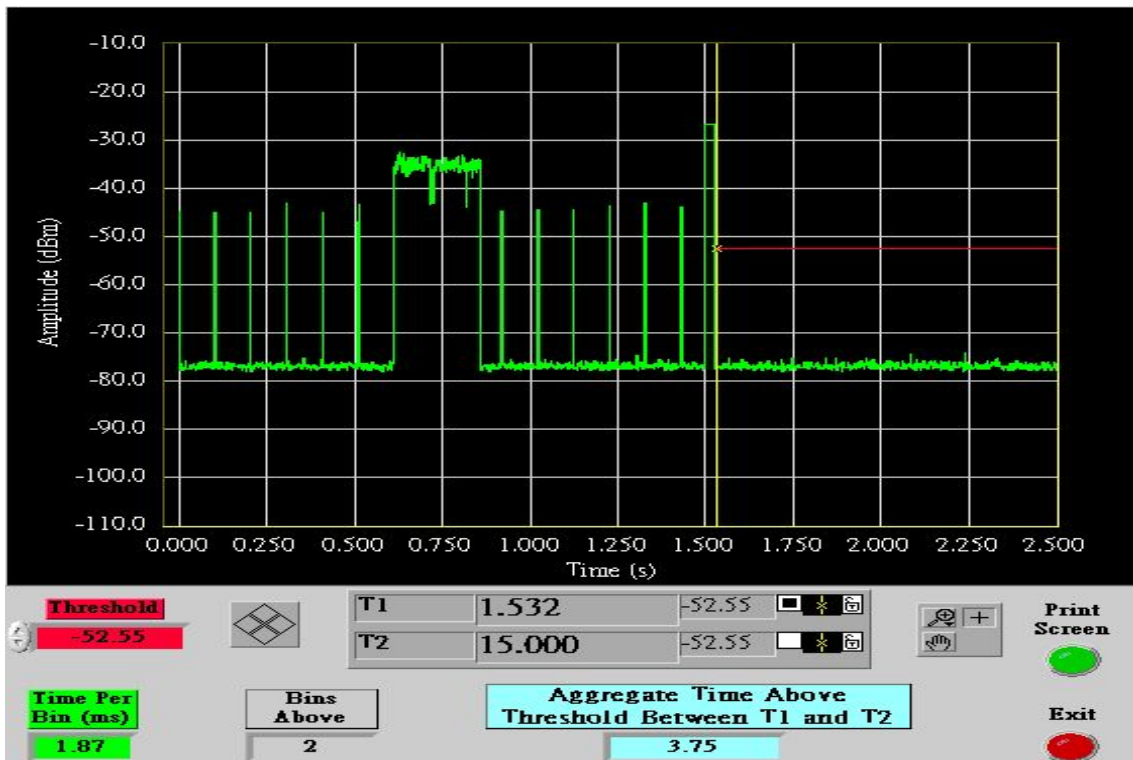

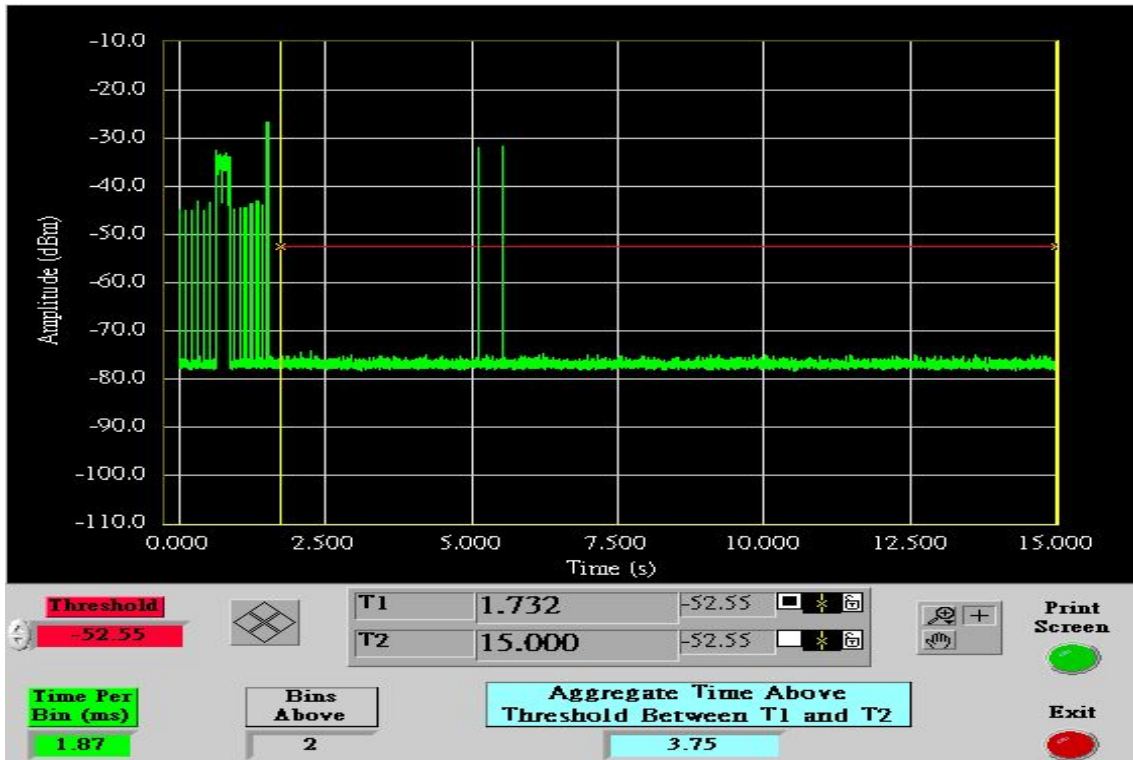






IEEE 802.11n HT 40 MHz mode


Type 1 Channel Closing Transmission Time Results

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
3.75	60	-56.25

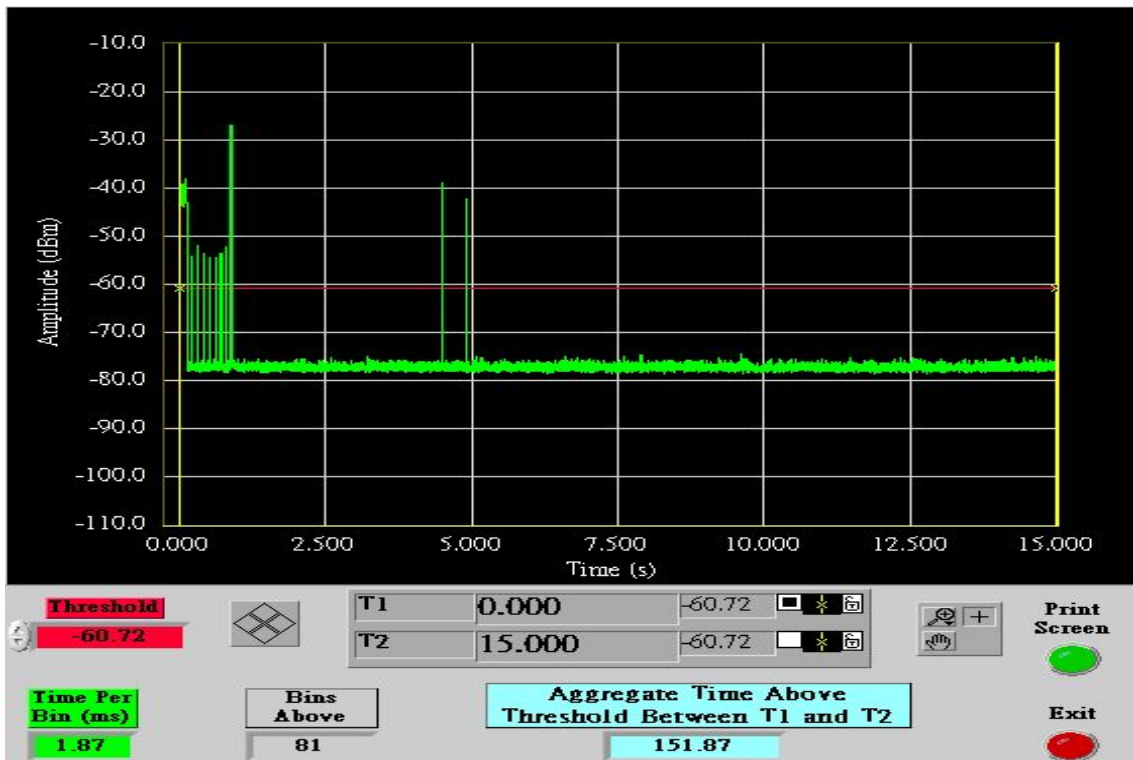

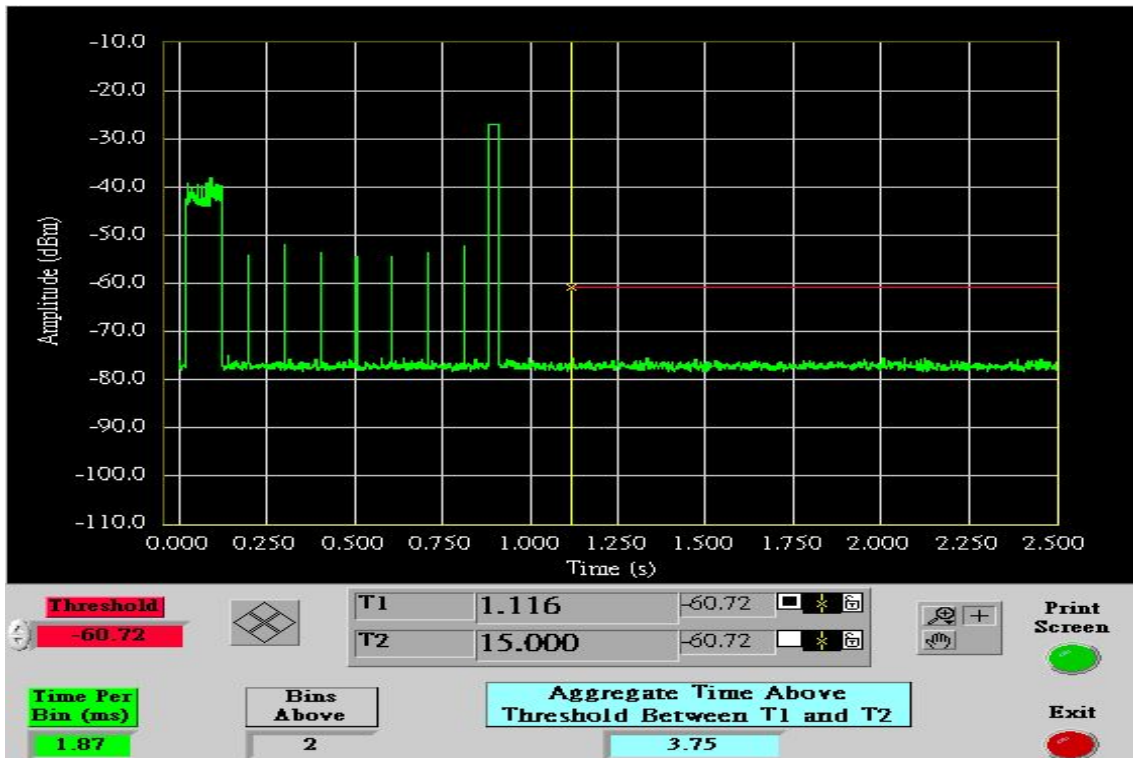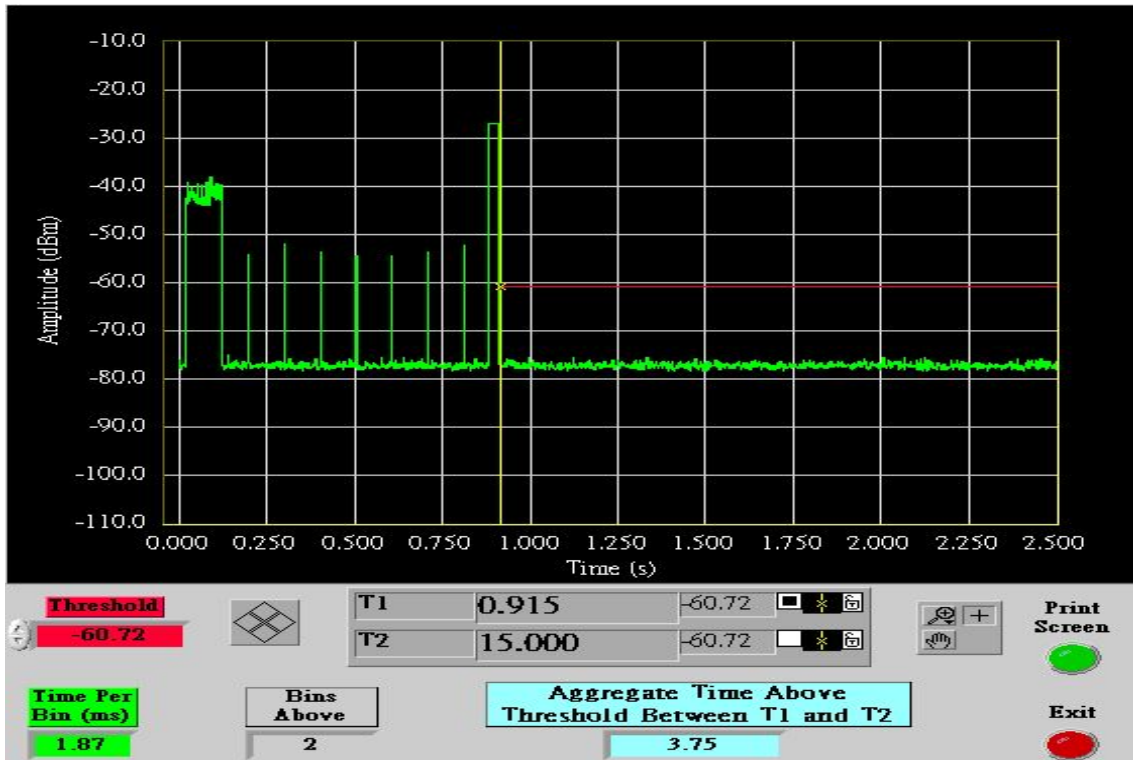

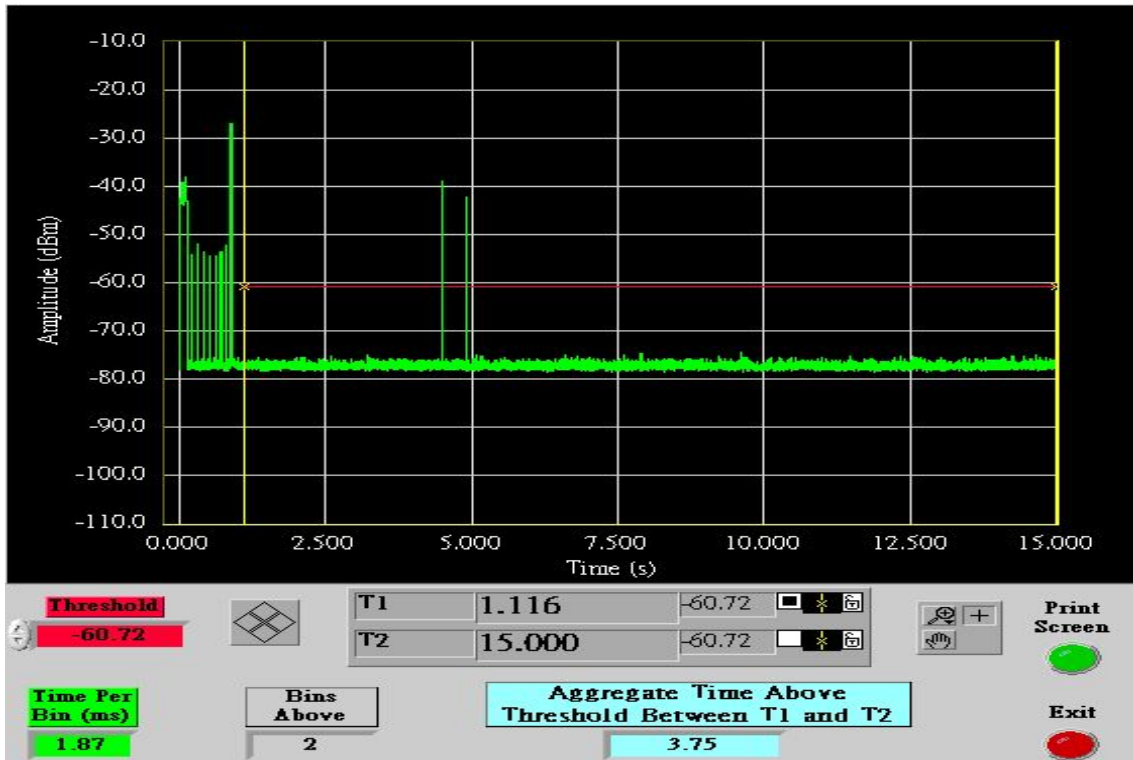



IEEE 802.11n HT 20 MHz mode


Type 5 Channel Move Time Results

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 13:19:55 Mar 31, 2013

T

Δ Mkr2 2.133 s

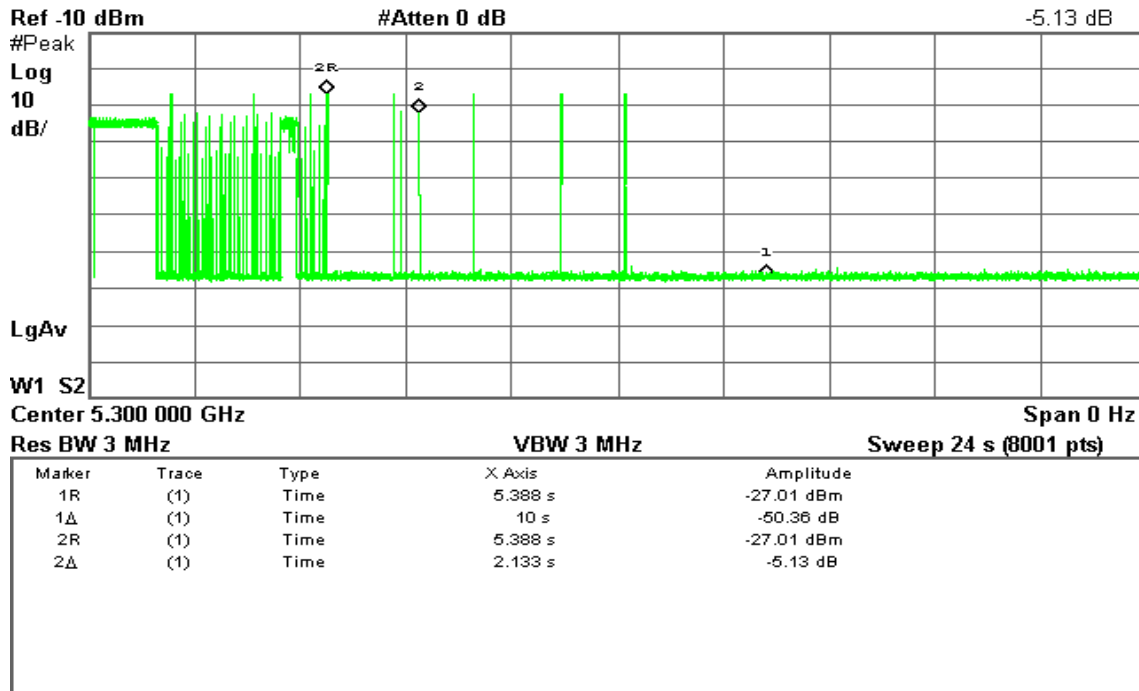



IEEE 802.11n HT 40 MHz mode


Type 5 Channel Move Time Results

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 13:38:44 Mar 31, 2013

T

Δ Mkr2 3.18 s
-11.97 dB

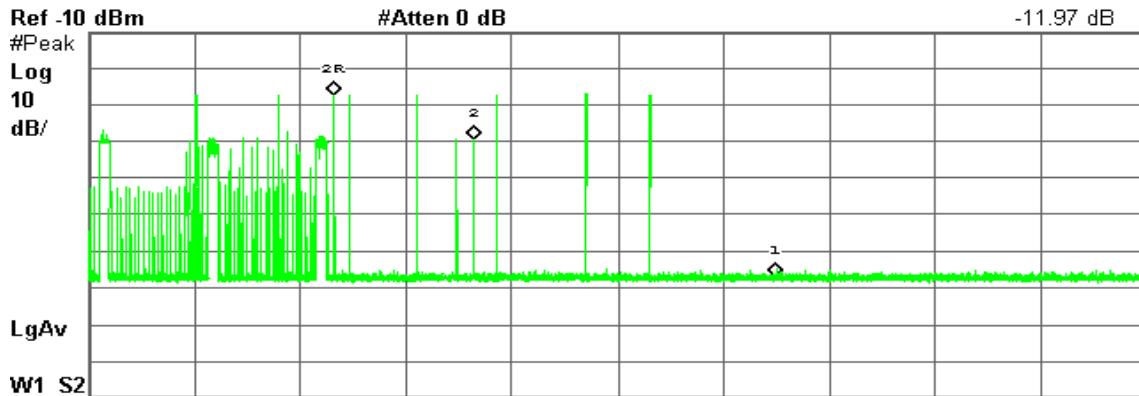

Center 5.310 000 GHz Span 0 Hz
Res BW 3 MHz VBW 3 MHz Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	5.568 s	-27.35 dBm
1Δ	(1)	Time	10 s	-49.70 dB
2R	(1)	Time	5.568 s	-27.35 dBm
2Δ	(1)	Time	3.18 s	-11.97 dB



UNII Band III

IEEE 802.11n HT 20 MHz mode

Type 1 Channel Move Time Results

No non-compliance noted.


Channel Move Time (s)	Limit (s)
0.9544	10

Agilent 17:03:11 Mar 30, 2013

R T

Δ Mkr2 954.4 ms

-9.28 dB

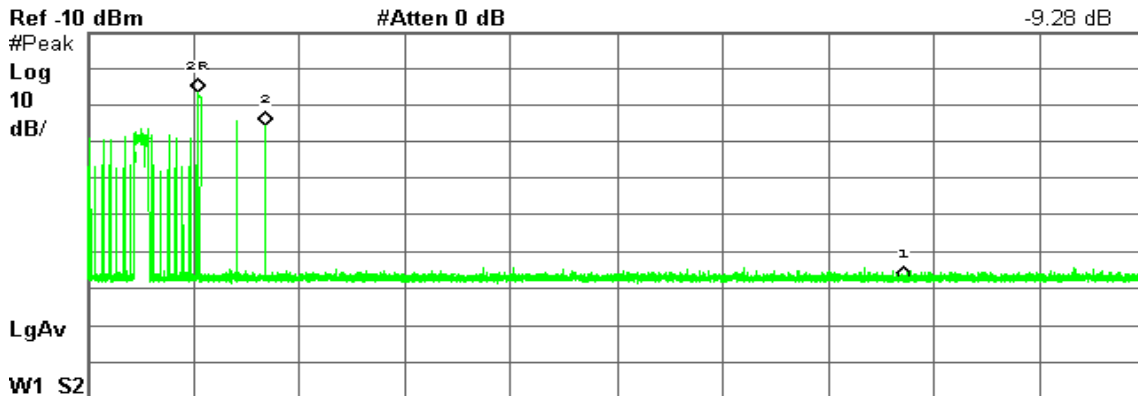

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	1.573 s	-26.26 dBm
1Δ	(1)	Time	10 s	-51.79 dB
2R	(1)	Time	1.573 s	-26.26 dBm
2Δ	(1)	Time	954.4 ms	-9.28 dB



IEEE 802.11n HT 40 MHz mode

Type 1 Channel Move Time Results

No non-compliance noted.


Channel Move Time (s)	Limit (s)
4.039	10

Agilent 16:44:32 Mar 30, 2013

R T

Δ Mkr2 4.039 s

-15.58 dB

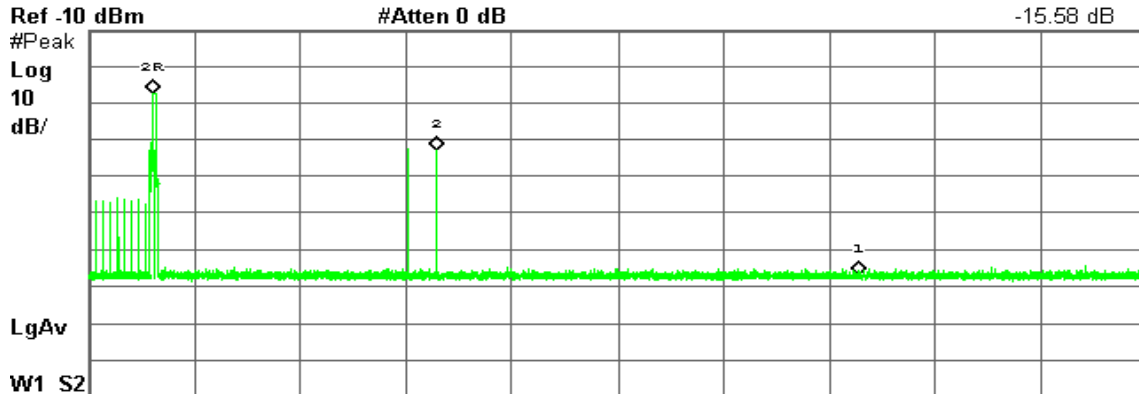

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	907.5 ms	-27.14 dBm
1Δ	(1)	Time	10 s	-49.97 dB
2R	(1)	Time	907.5 ms	-27.14 dBm
2Δ	(1)	Time	4.039 s	-15.58 dB






IEEE 802.11n HT 20 MHz mode


Type 1 Channel Closing Transmission Time Results

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
5.62	60	-54.38

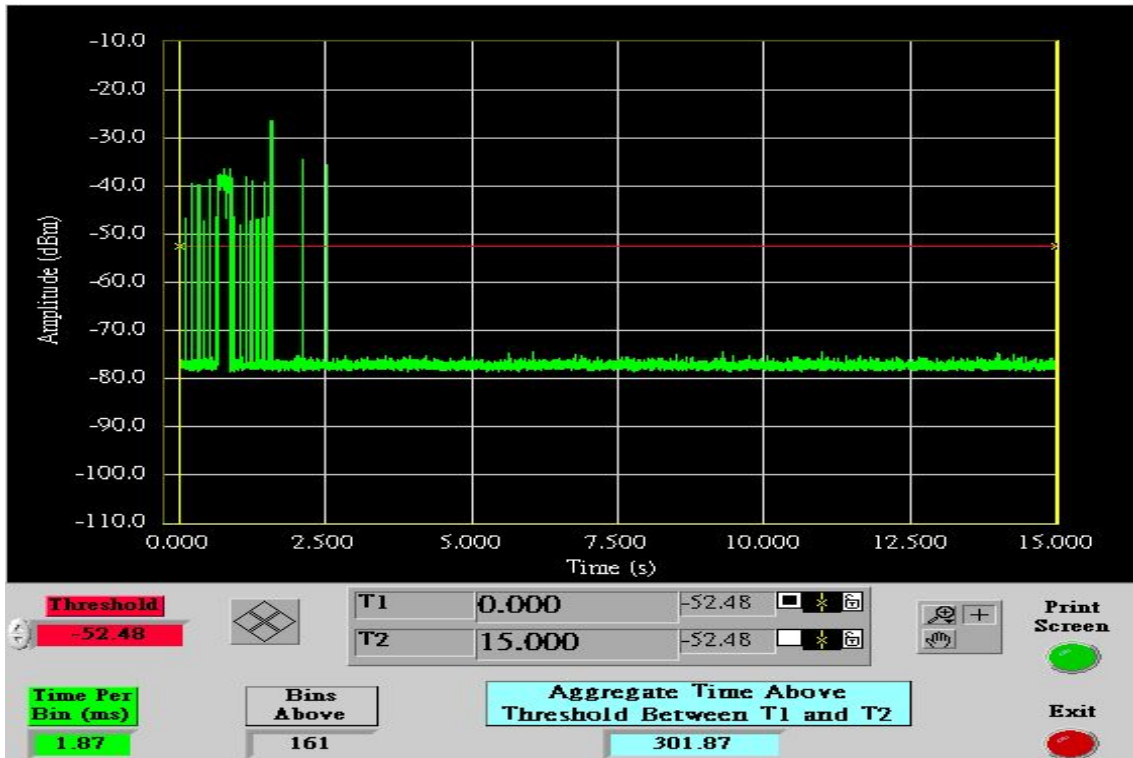

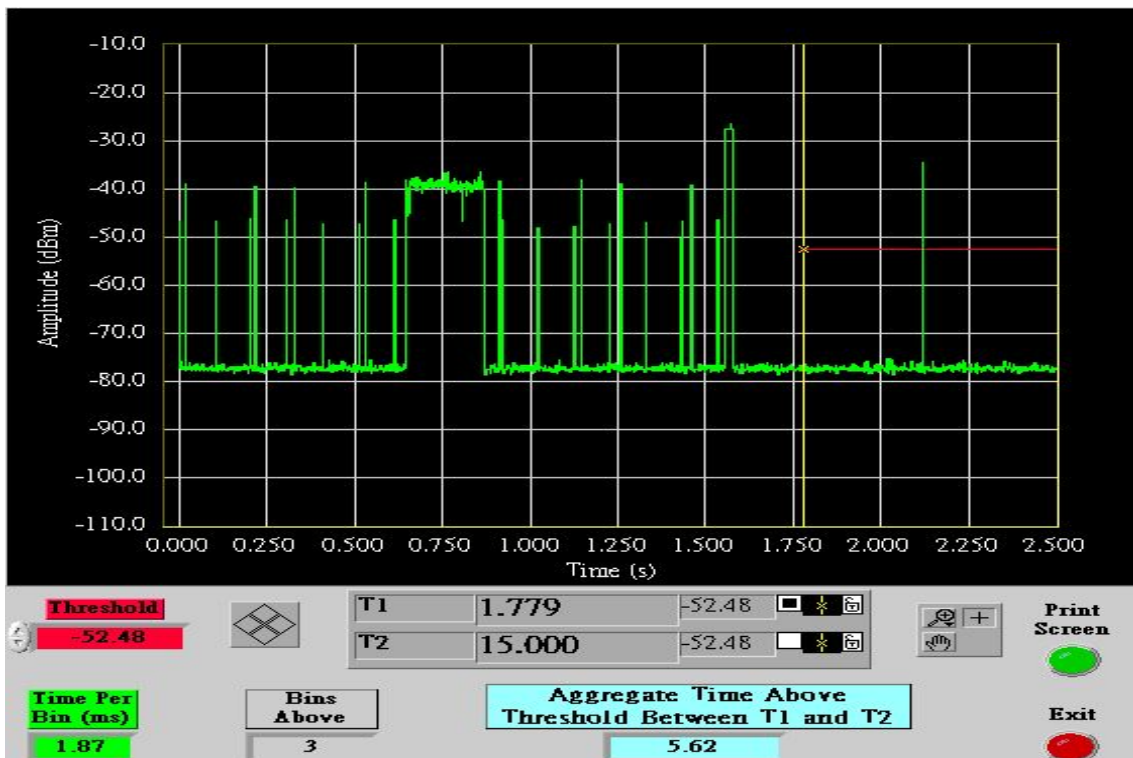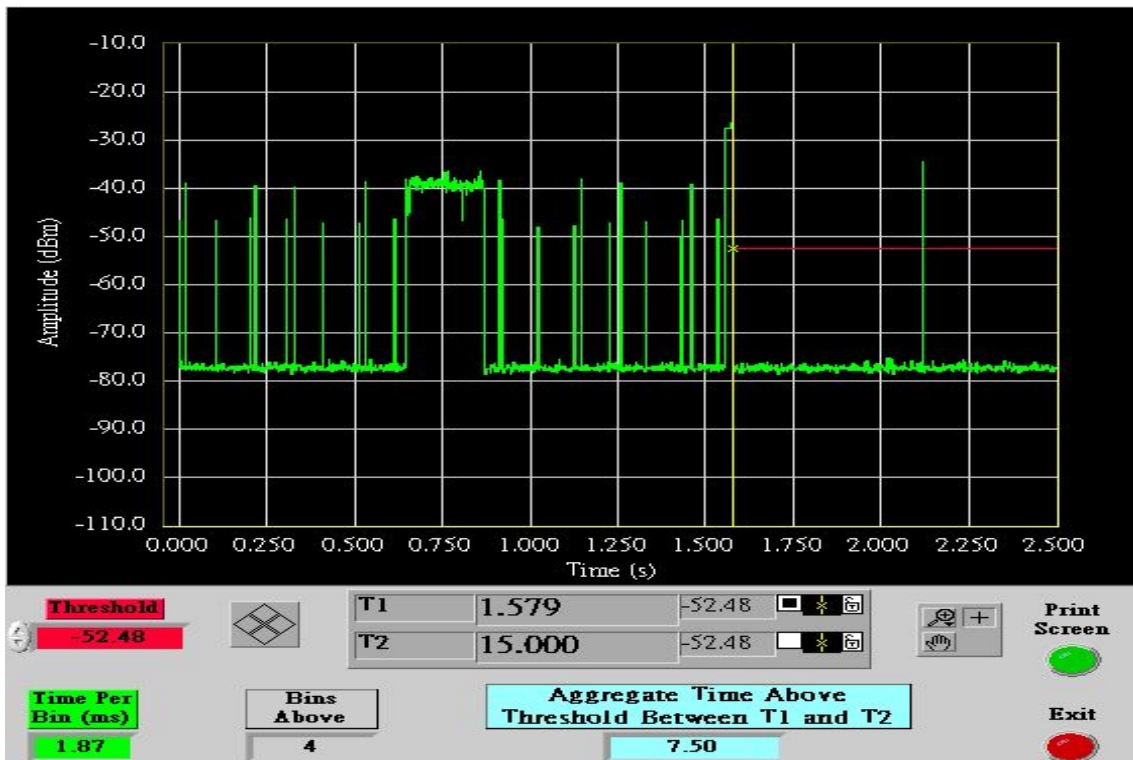

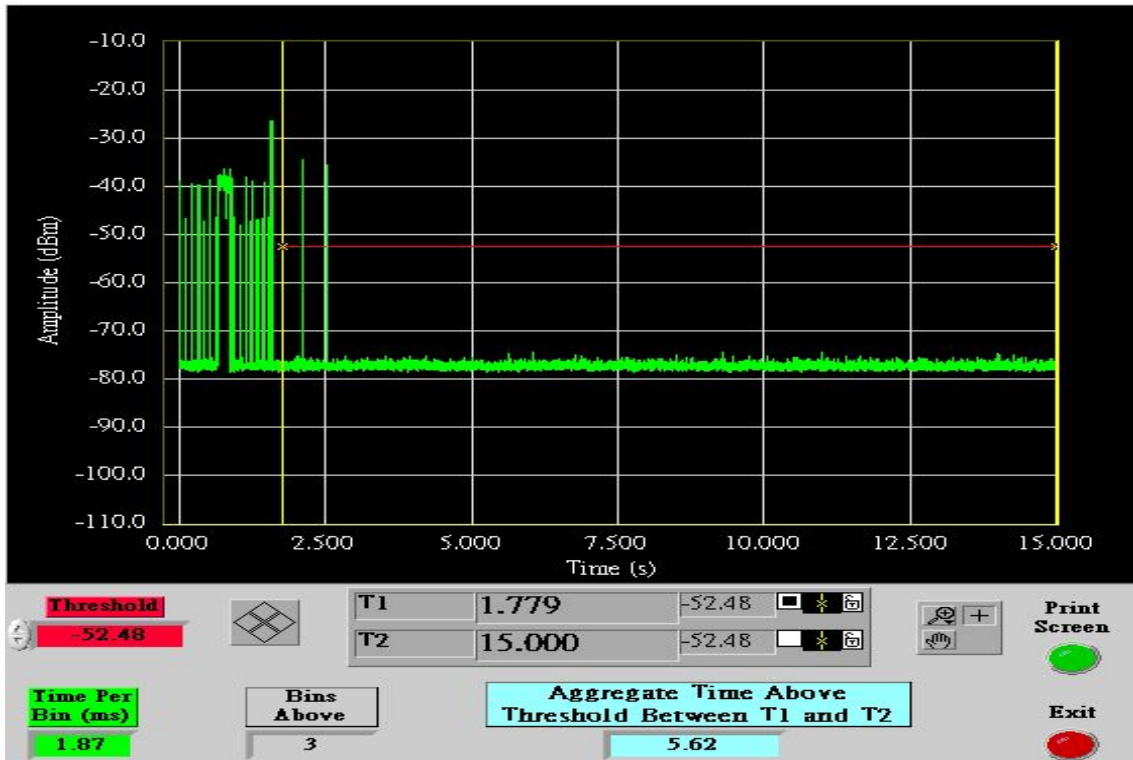






IEEE 802.11n HT 40 MHz mode


Type 1 Channel Closing Transmission Time Results

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
3.75	60	-56.25

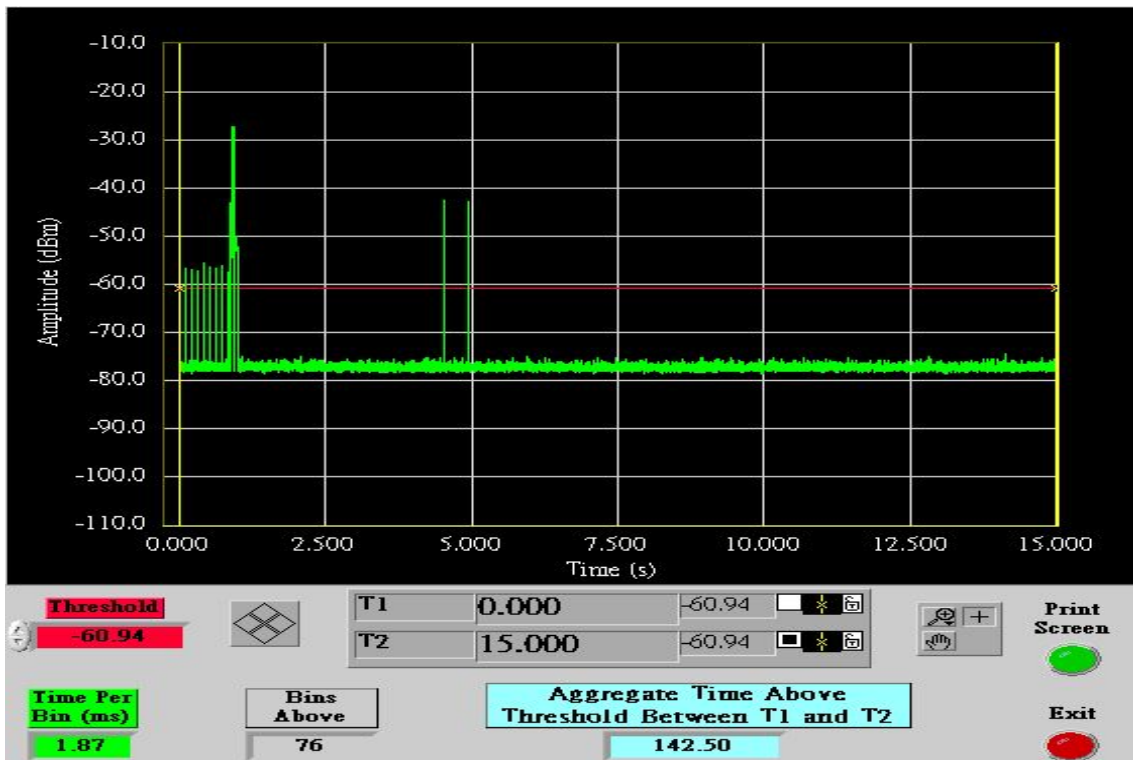

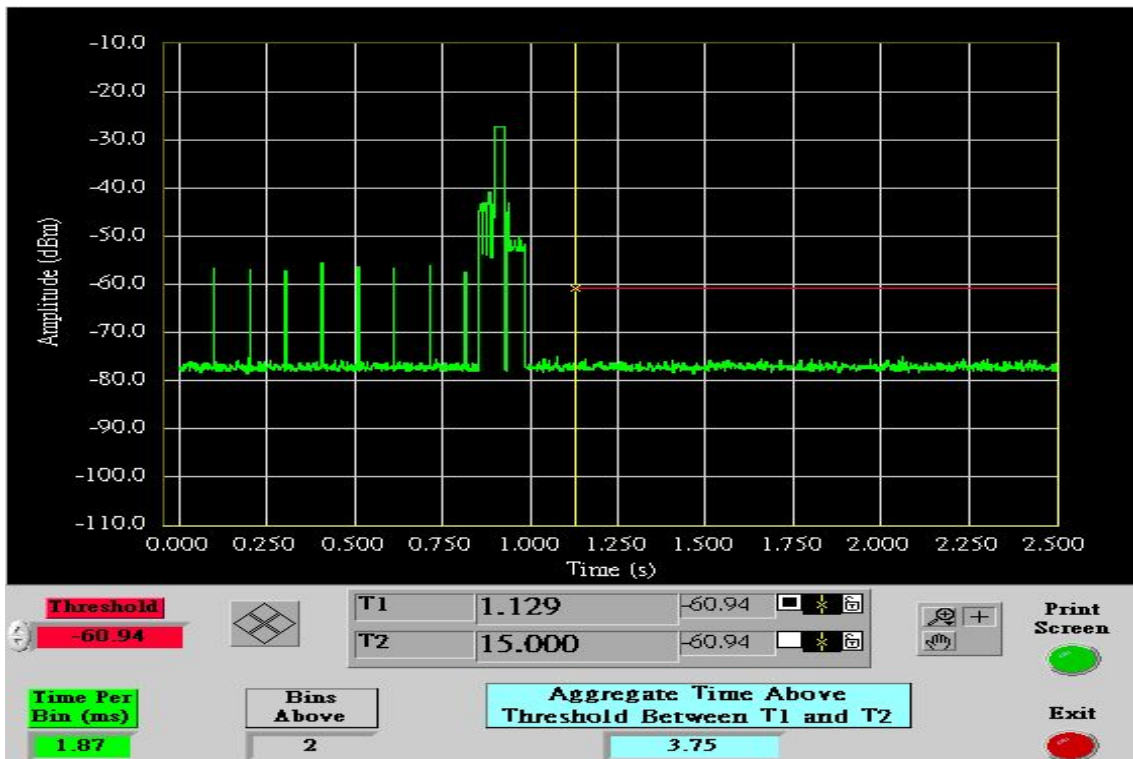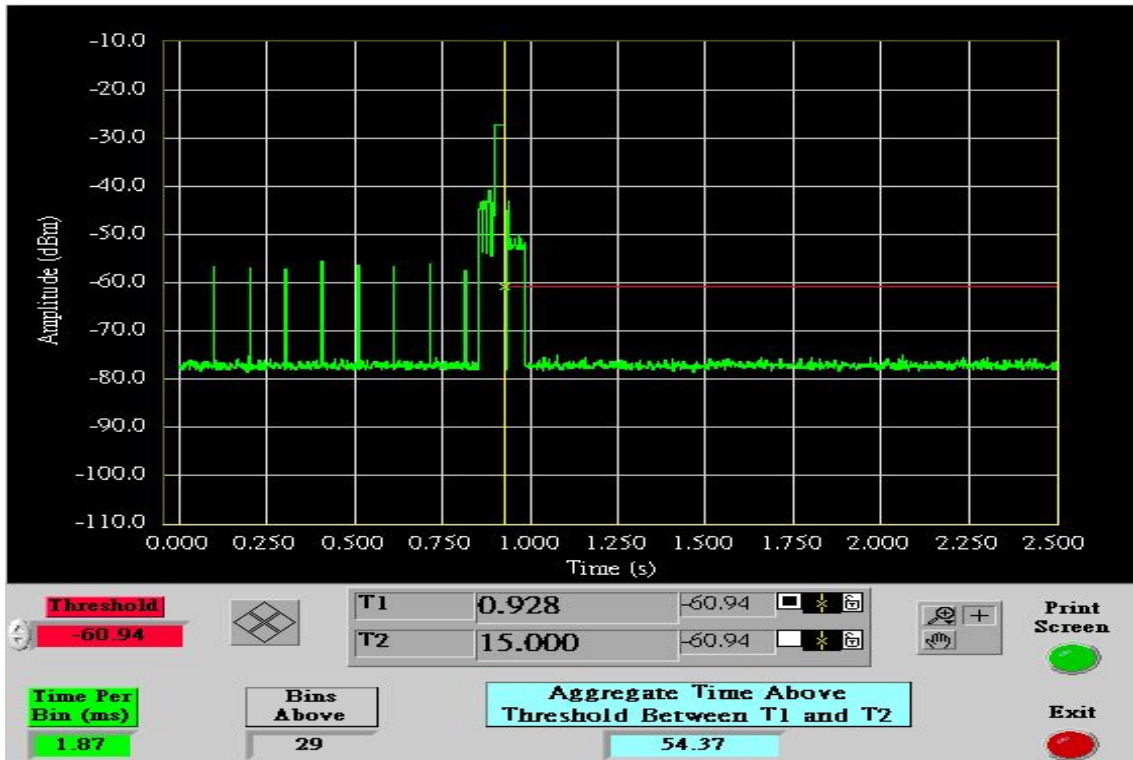

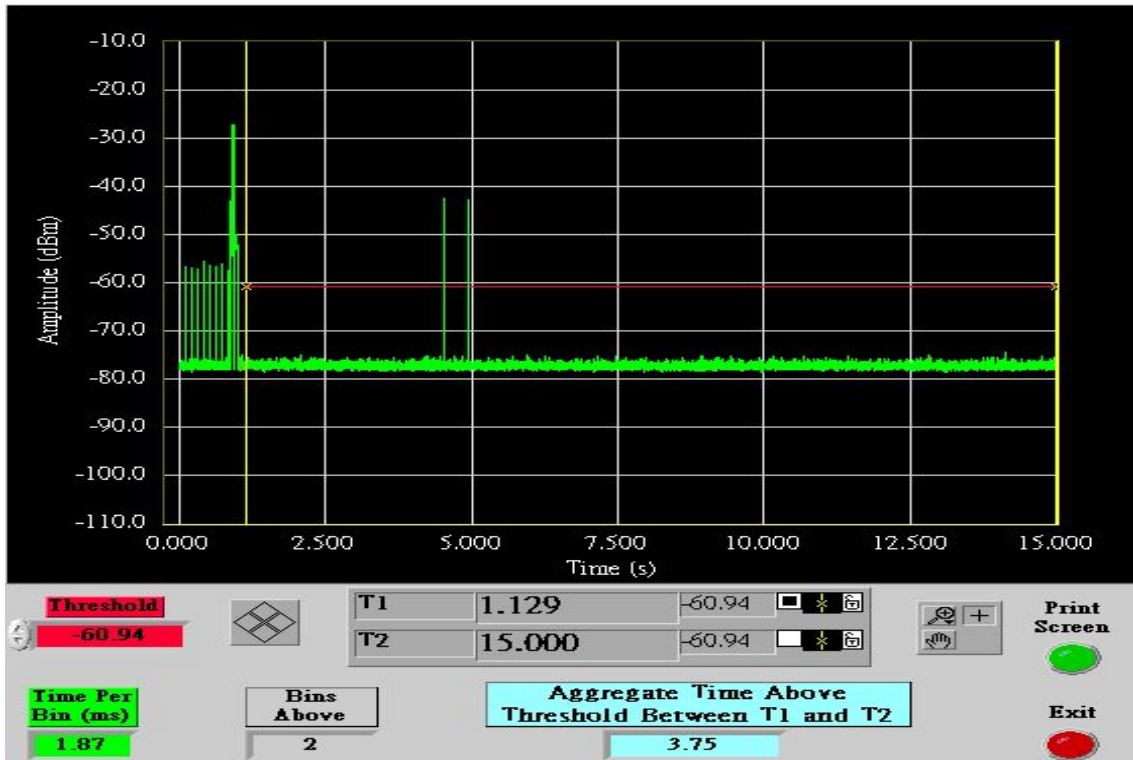



IEEE 802.11n HT 20 MHz mode

Type 5 Channel Move Time Results


No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 13:10:10 Mar 31, 2013

T

Δ Mkr2 15 ms

-11.88 dB

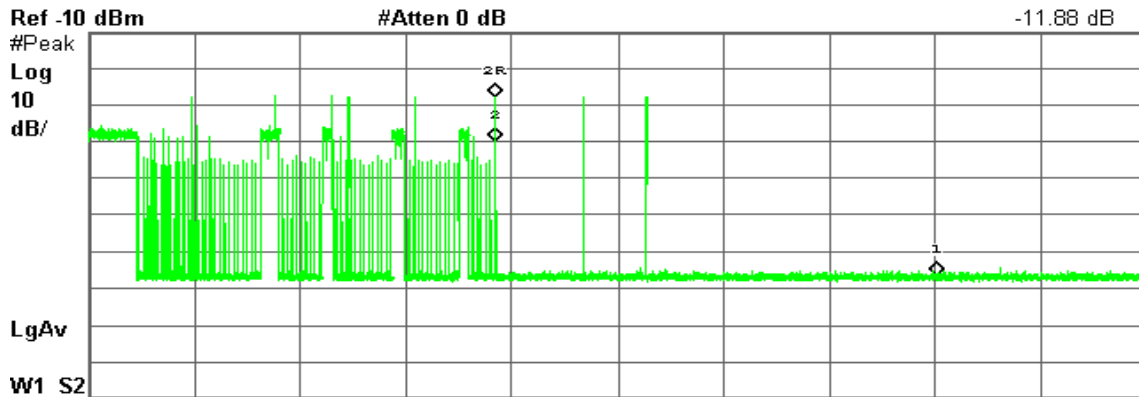

Center 5.500 000 GHz Span 0 Hz
 Res BW 3 MHz VBW 3 MHz Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	9.24 s	-27.88 dBm
1Δ	(1)	Time	10 s	-48.74 dB
2R	(1)	Time	9.24 s	-27.88 dBm
2Δ	(1)	Time	15 ms	-11.88 dB



IEEE 802.11n HT 40 MHz mode


Type 5 Channel Move Time Results

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 13:30:25 Mar 31, 2013

T

Δ Mkr2 4.026 s
-15.24 dB

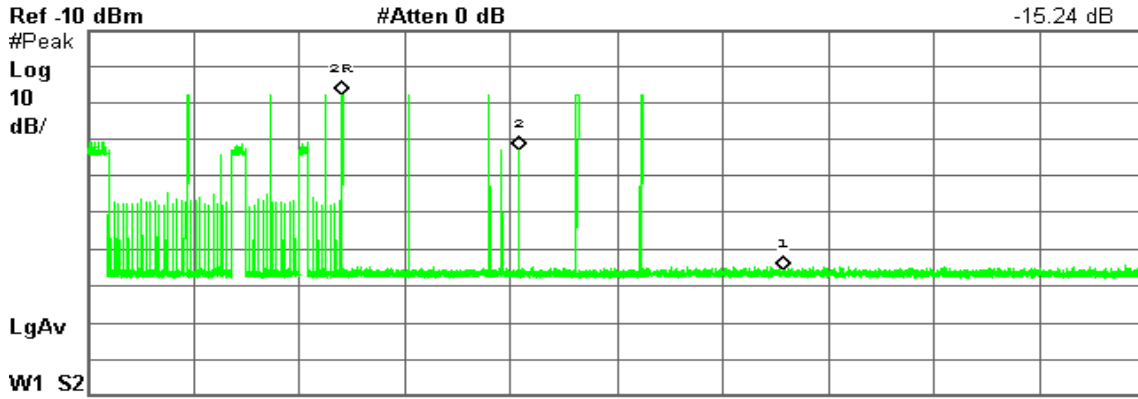

Center 5.510 000 GHz Span 0 Hz
 Res BW 3 MHz VBW 3 MHz Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	5.766 s	-27.81 dBm
1Δ	(1)	Time	10 s	-48.04 dB
2R	(1)	Time	5.766 s	-27.81 dBm
2Δ	(1)	Time	4.026 s	-15.24 dB



NON-OCCUPANCY PERIOD

UNII Band II

IEEE 802.11n HT 20 MHz mode


Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 12:13:11 Mar 31, 2013

R T

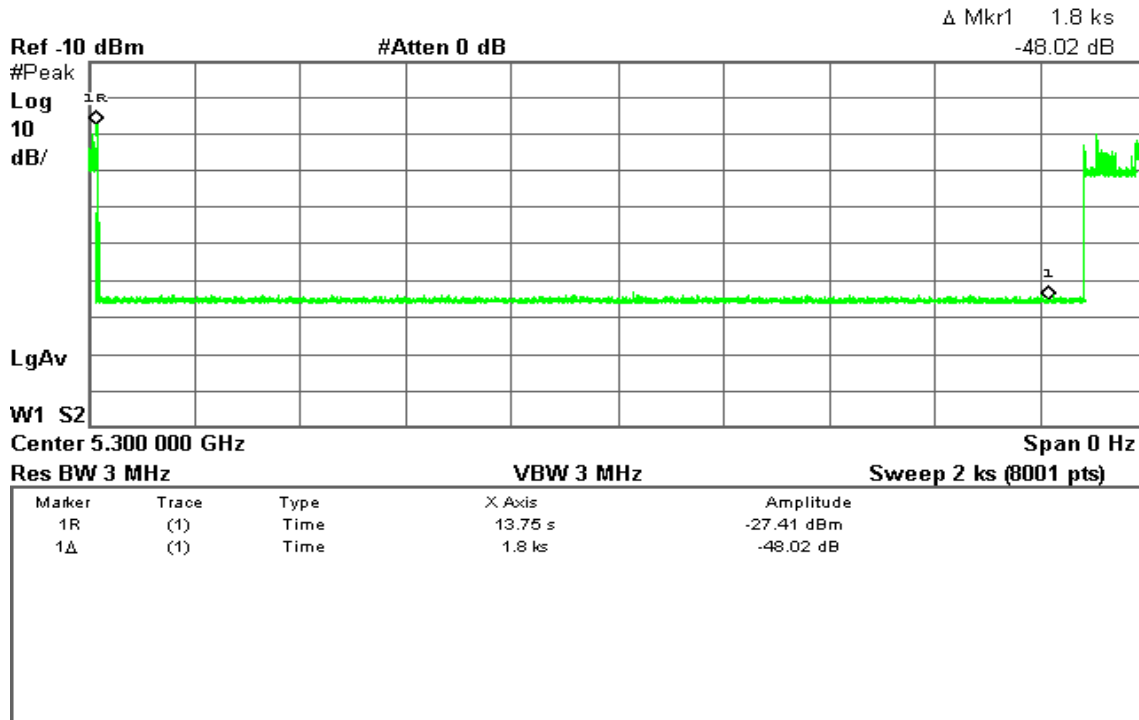



IEEE 802.11n HT 40 MHz mode

Type 1 Non-Occupancy Period Test Results


No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 11:36:01 Mar 31, 2013

R T

Δ Mkr1 1.8 ks

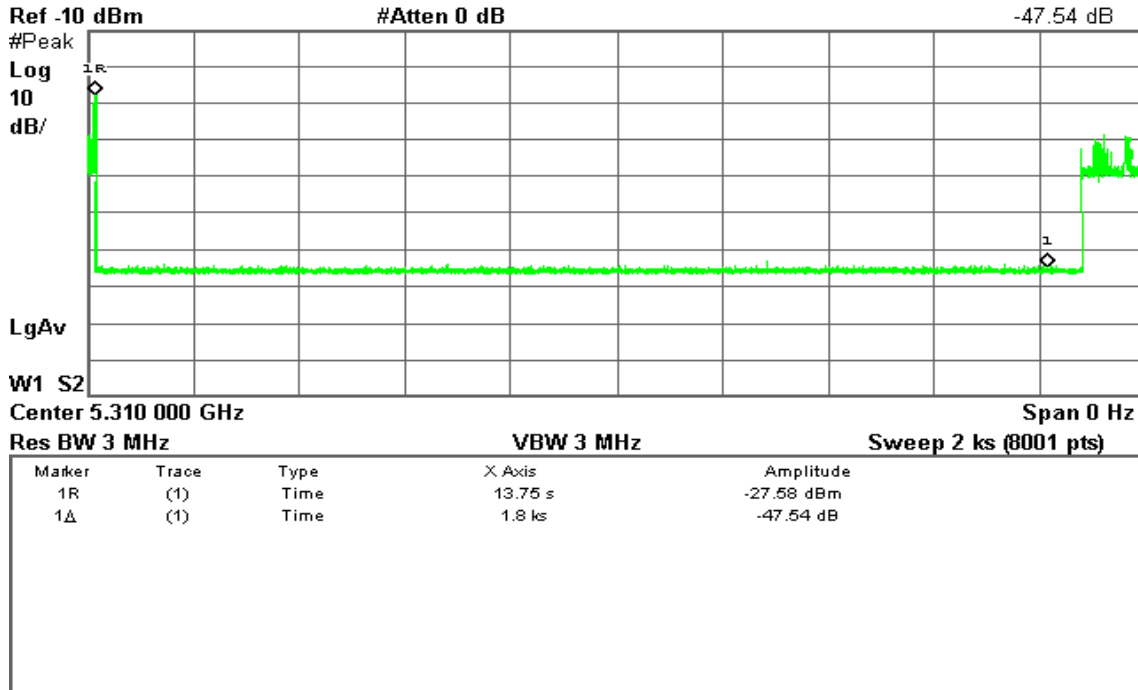



UNII Band III

IEEE 802.11n HT 20 MHz mode


Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 13:00:58 Mar 31, 2013

R T

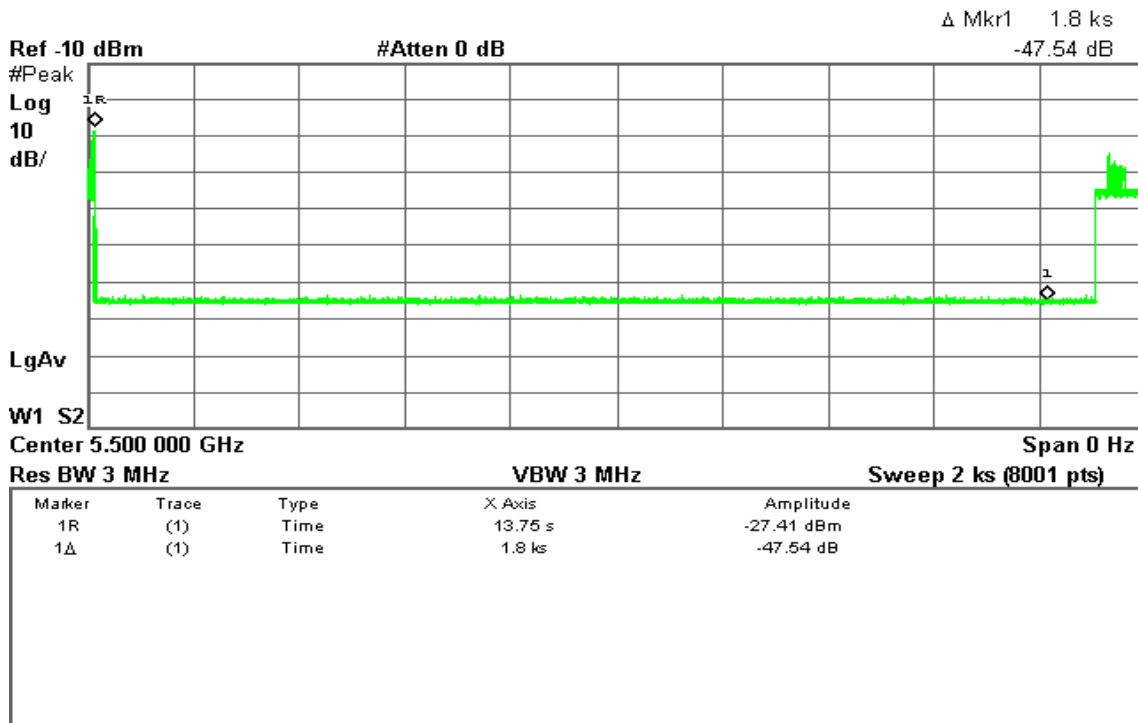



IEEE 802.11n HT 40 MHz mode


Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 17:57:07 Mar 30, 2013

R T

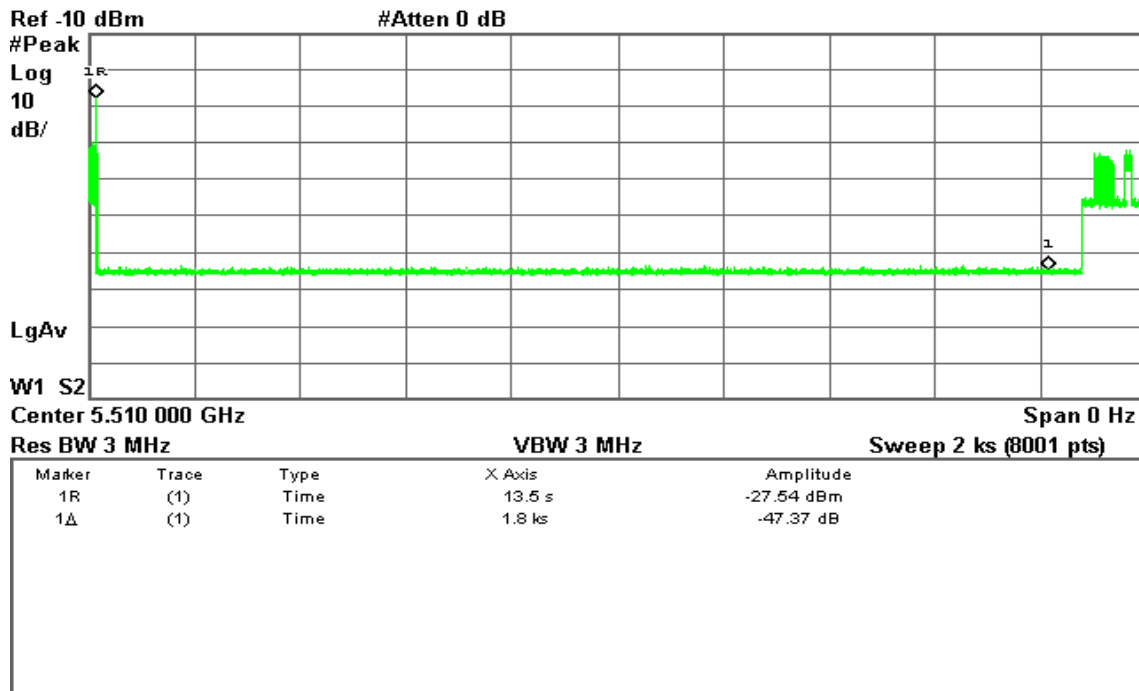



APPENDIX II PHOTOGRAPHS OF TEST SETUP

Dynamic Frequency Selection Set Up Photo

