




# TEST REPORT

<p><b>KCTL Inc.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p>	<p>Report No.: KR19-SRF0157-C Page (1) of (14)</p>	
<p><b>1. Client</b></p> <ul style="list-style-type: none"> <li>◦ Name : Samsung Electronics Co., Ltd.</li> <li>◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea</li> <li>◦ Date of Receipt : 2019-07-25</li> </ul> <p><b>2. Use of Report</b> : -</p> <p><b>3. Name of Product and Model</b> : Notebook PC / NP930XCJ</p> <p><b>4. Manufacturer and Country of Origin</b> : Samsung Electronics Co., Ltd. / Korea</p> <p><b>5. FCC ID</b> : A3LNP930XCJ</p> <p><b>6. Date of Test</b> : 2019-09-05 to 2019-09-09</p> <p><b>7. Test Standards</b> : FCC Part 15 Subpart C, 15.209</p> <p><b>8. Test Results</b> : Refer to the test result in the test report</p>		
<p>Affirmation</p>	<p>Tested by Name : Kwonse Kim (Signature)</p>	<p>Technical Manager Name : Jaehyong Lee (Signature)</p>
<p style="text-align: right;">2019-10-21</p>		
<p style="text-align: center;"><b>KCTL Inc.</b></p>		
<p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>		

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0157-C

Page (2) of (14)

**Report revision history**

Date	Revision	Page No
2019-10-14	Initial report	-
2019-10-17	Updated	4, 11
2019-10-21	Updated	4, 8
2019-10-21	Updated	8

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a General report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.*

Note. The report No. KR19-SRF0157 is superseded by the report No. KR19-SRF0157-C.



## CONTENTS

1.	General information .....	4
2.	Device information .....	4
2.1.	Accessory information .....	4
2.2.	Frequency/channel operations.....	5
2.3.	Worst-case configuration and mode .....	5
2.4.	Test setup diagram .....	5
3.	Antenna requirement .....	6
4.	Summary of tests .....	6
5.	Measurement uncertainty .....	6
6.	Test results .....	7
6.1.	Field Strength of Fundamental and Spurious Emission .....	7
6.2.	20dB Bandwidth.....	10
6.3.	AC Conducted emission .....	12
7.	Measurement equipment .....	14

## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0157-C

Page (4) of (14)

# KCTL

## 1. General information

Client : Samsung Electronics Co., Ltd.  
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,  
Rep. of Korea  
Manufacturer : Samsung Electronics Co., Ltd.  
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,  
Rep. of Korea  
Factory : SESC (Samsung Electronics Suzhou Computer)  
Address : No.198, Fangzhou Road, Suzhou Industrial Park, Jiangsu Province, 215021,  
China  
Laboratory : KCTL Inc.  
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132  
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056  
Industry Canada Registration No. : 8035A  
KOLAS No.: KT231

## 2. Device information

Equipment under test : Notebook PC  
Model : NP930XCJ  
Frequency range : 110 kHz ~ 148 kHz  
Modulation technique : AM  
Power source : AC 120 V (Output : 19V/3.42A)  
Antenna specification : Loop Coil Antenna\_Flat type  
Software version : 19H1  
Hardware version : REV1.0  
Test device serial No. : 1BGZ91ZM800067M  
Operation temperature : 10 °C ~ 35 °C

### Note:

1. Certificated module is mounted in the EUT as following.
  - Applicant : Intel Mobile Communications
  - Contains FCC ID : PD9AX201D2
  - Model : AX2201D2W
  - SAR test report number : KR19-SPF0026

### 2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source	FCC ID
Smart Phone	Samsung Electronics Co., Ltd.	SM-G960N	R39JB06Z70	DC 3.85 V	A3LSMG960KOR

## 2.2. Frequency/channel operations

This device contains the following capabilities:

WPT

Frequency (kHz)
110 ~ 148

Table 2.2.1 WPT


## 2.3. Worst-case configuration and mode

Mode 1	Test case	Description
Power Sharing mode	1	EUT position : Clamshell Charging from EUT to Phone
	2	EUT position : Clamshell Charging from AC Adaptor to EUT Charging from EUT to Phone

### Note:

- For the radiated test, test case 1, the EUT can operate power sharing mode when battery level is over 30%. The test results are not different between fully charged status and battery level 30% status (EUT), test were performed fully charged condition.
- In case of client device, each battery status was investigated then lowest condition is reported as a worst result.  
Battery status: 1% ~ 20%, 40% ~ 60%, 80% ~ 100%
- For the power sharing mode, test results of case 2 is worst case, so this test report described test case 2.

## 2.4. Test setup diagram

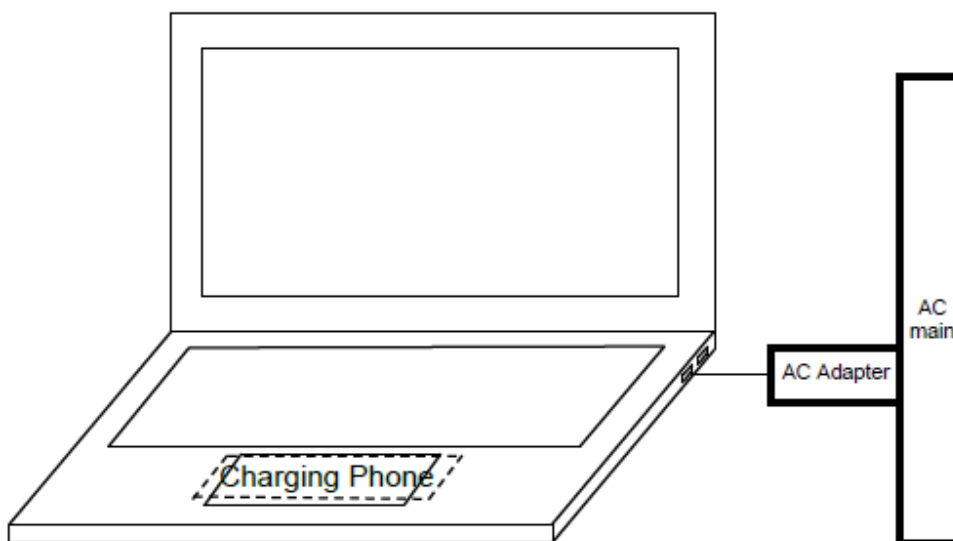

2.4.1 Test case 1 & 2\_Charging Phone

### Note:

Test case 1, EUT did not be connected to AC Adaptor in above setup diagram for the test.

### 3. Antenna requirement

#### Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached Loop Coil antenna(Internal antenna) on board.

### 4. Summary of tests

FCC Part section(s)	Parameter	Test results
15.209(a)	Field Strength of Fundamental and Spurious Emission	Pass
2.1049	20dB Bandwidth	Pass
15.203	Antenna requirement	Pass
15.207(a)	Conducted Emission	Pass <sup>Note.1</sup>

#### Notes:

1. For the AC line conducted test, all test case was performed with connected with AC adaptor.
2. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation.
3. The test procedure(s) in this report were performed in accordance as following.
  - ◆ ANSI C63.10-2013
4. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded uncertainty ( $\pm$ )	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.28 dB
Conducted emissions	9 kHz ~ 150 kHz	3.66 dB
	150 kHz ~ 30 MHz	3.26 dB

## 6. Test results

### 6.1. Field Strength of Fundamental and Spurious Emission

#### Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

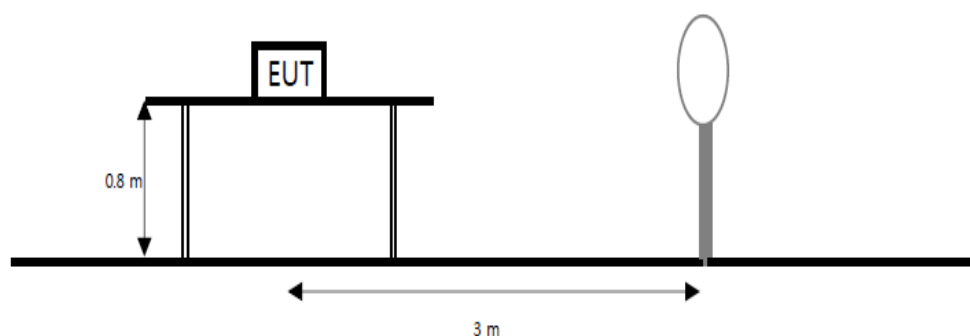

#### Limit

According to section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

**Test procedure**

ANSI C63.10-2013

**Test settings****Test Procedures for emission from 9 kHz to 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode.
- e. Below 30 MHz frequency range, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported and the worse orientations of Face-on and Face-off were set for final test.
  - Face-on = Parallel , Face-off = Perpendicular

**Notes:**

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$

Where:

- $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters

2. The test measurement distance is 3 meter
3. Limit (dB( $\mu$ V/m)) =
  - For 0.009 MHz - 0.490 MHz,  $20 \cdot \log(2400/F(\text{kHz}))$  dB( $\mu$ V/m)
  - For 0.490 MHz - 1.705 MHz,  $20 \cdot \log(24000/F(\text{kHz}))$  dB( $\mu$ V/m)
  - For 1.705 MHz - 30 MHz,  $20 \cdot \log(30) = 29.54$  dB( $\mu$ V/m)



**Test results****Radiated Emissions Fundamental & 9 kHz to 30 MHz (Power sharing mode Test case 2)**

[Face-on]


Frequency	Reading	Detector	Ant. Factor	Amp. + Cable	Distance factor	Factor	Result at 3m	Result at 30m or 300m	Limit at 30m or 300m	Margin
(MHz)	(dB( $\mu V$ ))	Mode	(dB)	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
0.122	81.30	AV	19.52	-31.72	-80.00	-92.20	69.10	-10.90	25.88	36.78
0.366	62.20	AV	19.36	-31.56	-80.00	-92.20	50.00	-30.00	16.33	46.33
0.609	51.40	QP	19.29	-31.29	-40.00	-52.00	39.40	-0.60	31.91	32.51
0.855	48.40	QP	19.32	-31.32	-40.00	-52.00	36.40	-3.60	28.96	32.56
1.101	44.20	QP	19.31	-31.21	-40.00	-51.90	32.30	-7.70	26.77	34.47

[Face-off]

Frequency	Reading	Detector	Ant. Factor	Amp. + Cable	Distance factor	Factor	Result at 3m	Result at 300m	Limit at 300m	Margin
(MHz)	(dB( $\mu V$ ))	Mode	(dB)	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
0.122	76.10	AV	19.52	-31.72	-80.00	-92.20	63.90	-16.10	25.88	41.98


**Note:**

- Factor(dB) = Antenna Factor + Amp. Gain + Cable Loss + distance factor(dB)
- 80dB is distance factor =  $40 \cdot \log(3/300)$ , -40dB is distance factor =  $40 \cdot \log(3/30)$

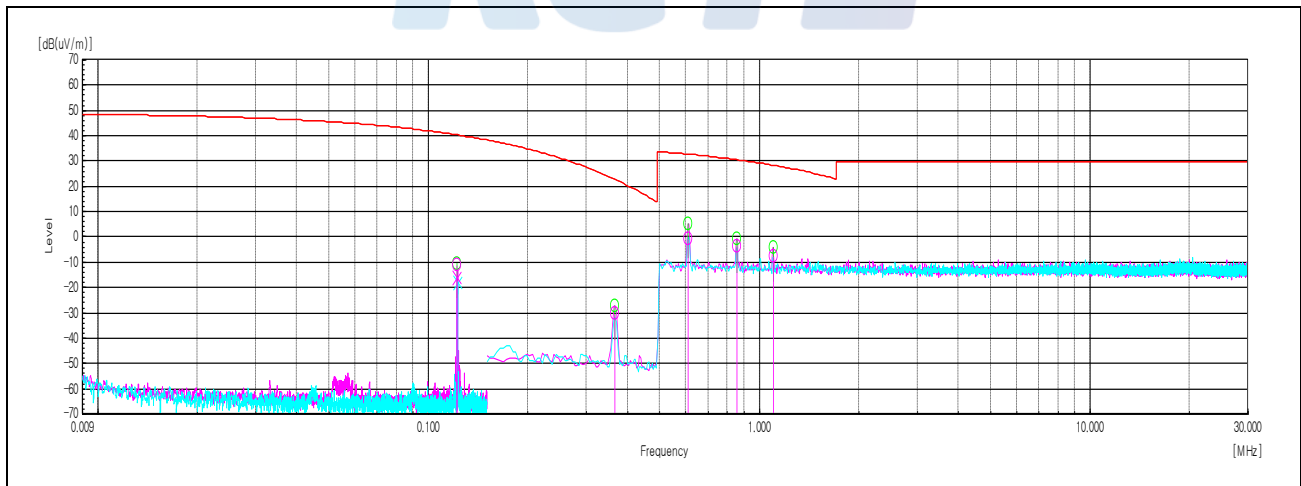

## 6.2. 20dB Bandwidth

### Test setup

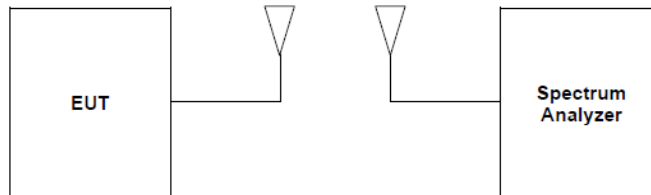

### Limit

For reporting purpose only

### Test settings

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0157-C


Page (11) of (14)



## Test results

Frequency (kHz)	20dB Bandwidth (kHz)	Limit
110 ~ 148	12.74	Reporting purpose only

## Test Plots

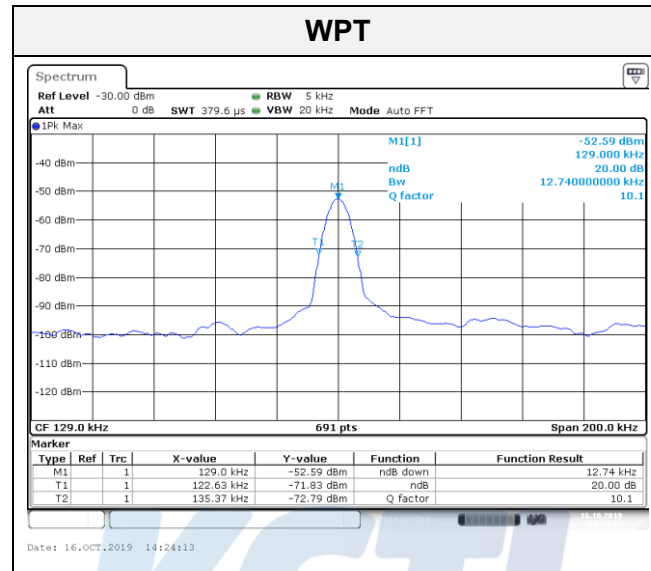


## Note:

Because the measured signal is CW or CW-like, adjusting the RBW per ANSI C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

### 6.3. AC Conducted emission

#### Test setup

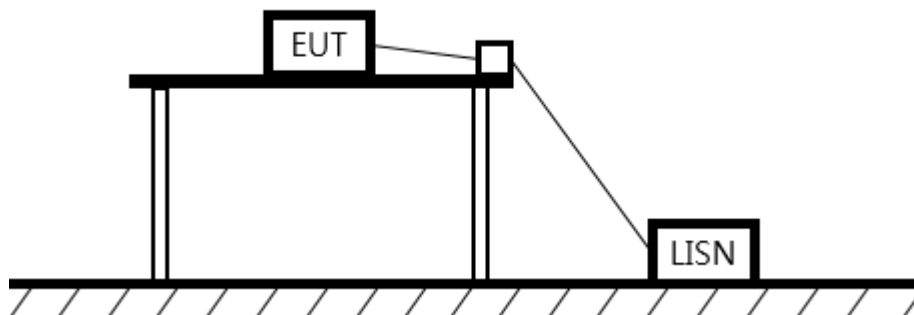

#### Limit

According to 15.207(a), For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

#### Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

**Test results**

**Power Sharing mode Test case 2**

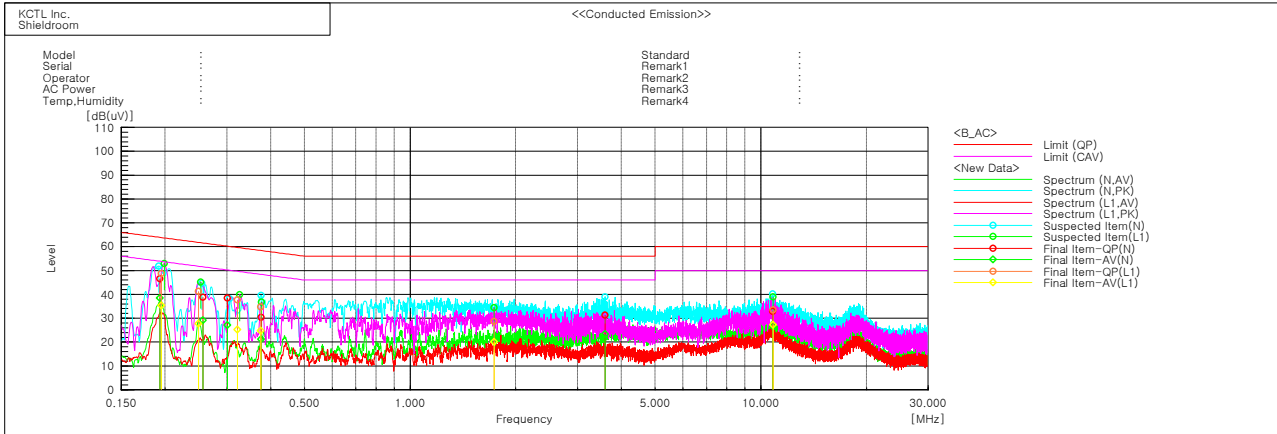

Final Result

--- N Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19309	36.6	28.4	10.0	46.6	38.4	63.9	53.9	17.3	15.5
2	0.25607	29.2	19.5	9.6	38.8	29.1	61.6	51.6	22.8	22.5
3	0.3009	28.7	17.4	9.7	38.4	27.1	60.2	50.2	21.8	23.1
4	0.37533	20.5	11.3	9.8	30.3	21.1	58.4	48.4	28.1	27.3
5	3.59764	21.5	13.7	9.7	31.2	23.4	56.0	46.0	24.8	22.6
6	10.80384	22.9	16.6	9.9	32.8	26.5	60.0	50.0	27.2	23.5

--- L1 Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19501	38.6	25.3	10.1	48.7	35.4	63.8	53.8	15.1	18.4
2	0.24877	31.5	17.9	9.7	41.2	27.6	61.8	51.8	20.6	24.2
3	0.32152	27.9	15.4	9.8	37.7	25.2	59.7	49.7	22.0	24.5
4	0.37518	24.8	14.9	9.9	34.7	24.8	58.4	48.4	23.7	23.6
5	1.73565	18.8	10.3	9.8	28.6	20.1	56.0	46.0	27.4	25.9
6	10.82974	23.5	17.3	9.9	33.4	27.2	60.0	50.0	26.6	22.8

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0157-C

Page (14) of (14)

**7. Measurement equipment**

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
SIGNAL GENERATOR	R&S	SMR40	100007	20.05.13
VECTOR SIGNAL GENERATOR	R&S	SMBV100A	257566	20.07.16
Spectrum Analyzer	R&S	FSV40	100989	20.01.04
COAXIAL FIXED ATTENUATOR	AGILENT	8491A	MY52461848	20.05.04
EMI TEST RECEIVER	R&S	ESC17	100732	20.08.22
EMI TEST RECEIVER	R&S	ESC13	100710	20.08.22
TWO-LINE V-NETWORK	R&S	ENV216	101584	20.04.05
LOOP Antenna	R&S	HFH2-Z2	892665/035	20.08.24
AMPLIFIER	SONOMA INSTRUMENT	310N	284608	20.08.22
Antenna Mast	MATURO	EAS 1.5	042/8941211	-
Antenna Mast	MATURO	EAS 1.5	043/8941211	-
Turn Table	MATURO	TT 0.8 PF	041/8941211	-
Cable Assembly	gigalane	RG-400	-	-

End of test report

