



ELEMENT SUWON
 13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
 Gyeonggi-do, 16954 South Korea
 Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

MEASUREMENT REPORT
FCC PART 15.247 WLAN OFDMA

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 03/26/2024 – 04/24/2024
Test Report Issue Date:
 05/02/2024
Test Site/Location:
 Element lab., Gyeonggi-do, South Korea
Test Report Serial No.:
 1M2401250007-04-R1.A3L

FCC ID:	A3LNP960XMA
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: NP960XMA
Additional Model(s): NP960XMB, NP964XMA, NP964XMB
EUT Type: Portable Computing Devcie
Frequency Range: 2412 – 2472MHz
Modulation Type: OFDMA
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
Test Procedure(s): ANSI C63.10-2013, , KDB 484596 D01 v02r03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2401250007-04-R1.A3L) supersedes and replaces the previously issued test report (S/N: 1M2401250007-04.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 1 of 104

TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	6
2.4	Antenna Description	6
2.5	Software and Firmware	7
2.6	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Emissions.....	8
3.3	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY.....	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS.....	12
7.1	Summary	12
7.2	6dB Bandwidth Measurement	15
7.3	Output Power Measurement.....	28
7.4	Power Spectral Density	32
7.5	Conducted Band Edge Emissions	44
7.6	Conducted Spurious Emissions.....	57
7.7	Radiated Emission Measurements.....	77
8.0	CONCLUSION	104

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 2 of 104

MEASUREMENT REPORT

Channel Bandwidth [MHz]	IEEE Mode	Tones	Tx Frequency [MHz]	Antenna-2				MIMO			
				Avg. Conducted		Peak Conducted		Avg. Conducted		Peak Conducted	
				Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	802.11ax/be OFDMA	26T	2412 - 2472	27.67	14.42	97.72	19.90	55.15	17.42	207.82	23.18
	802.11ax/be OFDMA	52T	2412 - 2472	27.54	14.40	98.40	19.93	54.91	17.40	250.66	23.99
	802.11be OFDMA	52+26T	2412 - 2472	28.12	14.49	97.72	19.90	48.42	16.85	147.08	21.68
	802.11ax/be OFDMA	106T	2412 - 2472	27.04	14.32	98.63	19.94	54.71	17.38	156.05	21.93
	802.11be OFDMA	106+26T	2412 - 2472	24.83	13.95	79.62	19.01	47.67	16.78	212.38	23.27
	802.11ax/be OFDMA	242T	2412 - 2472	28.12	14.49	89.54	19.52	52.00	17.16	187.96	22.74

EUT Overview

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 3 of 104

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 4 of 104

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Computing Device FCC ID: A3LNP960XMA**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 1105D, 1123F, 1224R

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5 and 6 GHz), Bluetooth (1x, EDR, LE)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Bandwidth	Tone Type	Tone Size	ANT2	MIMO (1+2)
			Duty Cycle [%]	Duty Cycle [%]
20MHz	RU	26T	98.91	99.47
		52T	99.49	99.51
		106T	99.18	98.89
		242T	98.58	97.96
	MRU	52+26T	98.43	98.11
		106+26T	98.35	98.12

Table 2-2. Measured Duty Cycles

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 5 of 104



2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11ax	✗	✓	✓	✓	✓	✓
	11be	✗	✓	✓	✓	✓	✓

Table 2-3. Antenna Configuration

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index	HE	EHT	Spatial Stream	OFDMA (802.11ax/be)												OFDMA (802.11be)					
				26T			52T			106T			242T			52+26T		106+26T			
				0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
0	0	1	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	2.6	2.5	2.3
1	1	1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	5.3	5	4.5
2	2	1	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	7.9	7.5	6.8
3	3	1	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	10.6	10	9
4	4	1	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	15.9	15	13.5
5	5	1	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	21.2	20	18
6	6	1	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	23.8	22.5	20.3
7	7	1	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	26.5	25	22.5
8	8	1	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	31.8	30	27
9	9	1	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	35.3	33.3	30
10	10	1	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	39.7	37.5	33.8
11	11	1	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	44.1	41.7	37.5
12	12	1	1	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	47.6	45	40.5
13	13	1	1	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	52.9	50	45
0	0	2	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	5.3	5	4.5
1	1	2	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	10.6	10	9
2	2	2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	15.9	15	13.5
3	3	2	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	21.2	20	18
4	4	2	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	31.8	30	27
5	5	2	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117	275.3	260	234	42.4	40	36
6	6	2	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	47.6	45	40.5
7	7	2	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	52.9	50	45
8	8	2	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5	412.9	390	351	63.5	60	54
9	9	2	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195	458.8	433.3	390	70.6	66.7	60
10	10	2	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4	516.2	487.5	438.8	79.4	75	67.5
11	11	2	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8	573.5	541.7	487.5	88.2	83.3	75
12	12	2	2	31.8	30	27	63.5	60	54	135	127.5	114.8	309.7	292.5	263.3	619.4	585	526.5	95.3	90	81
13	13	2	2	35.3	33.3	30	70.6	66.7	60	150	141.7	127.5	344.1	325	292.5	688.2	650	585	105.9	100	90

Table 2-4. Supported Data Rates

2.3 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 7.5 for radiated emissions test setups, and 7.2, 7.3 and 7.4 for antenna port conducted emissions test setups.

2.4 Antenna Description

This device is only used with its integral antennas as shown in the documentation of this filing. The antenna gains for this device are as shown in the table below:

Frequency [GHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Directional Gain [dBi]
2.400 – 2.483.5	-1.62	-1.82	1.29

Table 2-5. Antenna Peak Gain

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 6 of 104



2.5 Software and Firmware

The test was conducted with firmware version REV0.1 and software version Windows 11 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 7 of 104

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 8 of 104

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 9 of 104

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.37
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	4.84

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 10 of 104

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	7/6/2023	Annual	7/3/2024	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	7/4/2023	Annual	7/3/2024	1839097
Anritsu	TOSLKF50A-40	Calibration Kit	N/A	-	N/A	1825024
Com-Power	AL-130R	Active Loop Antenna	10/21/2022	Biennial	10/20/2024	10160045
Fairview Microwave	FM2CP1122-10	Coupler	7/4/2023	Annual	7/3/2024	1946
Keysight Technologies	N9030B	PXA Signal Analyzer	4/6/2023	Annual	4/5/2024	MY57142018
Mini-Circuits	BW-N10W5+	Attenuator	4/6/2023	Annual	4/5/2024	TEMPNO.01-151
Rohde & Schwarz	TS-PR1840	Preamplifier	7/6/2023	Annual	7/5/2024	100049
Rohde & Schwarz	ESW	EMI TEST Receiver	7/5/2023	Annual	7/4/2024	101761
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	4/6/2023	Annual	4/5/2024	101250
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	1/13/2023	Annual	1/12/2024	102151
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	6/1/2023	Biennial	5/31/2025	9162-217
Sunol Sciences	DRH-118	Horn Antenna	1/26/2023	Biennial	1/25/2025	A102416-1
Anritsu	MA24106A	Power Sensor	7/4/2023	Annual	7/3/2024	1244512

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 11 of 104

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics CO., Ltd.
 FCC ID: A3LNP960XMA
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2(a)]	6dB Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4(b)]	Transmitter Output Power	shall not exceed 1 W		PASS	Section 7.3
15.247(e)	RSS-247 [5.2(b)]	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Section 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5 .
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.6.4.
- 6) 802.11ax/be OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 12 of 104



7) Data was leveraged from model NP960XMA for the certification of NP960XMB. See Table 7-2 for spot-check results.

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: NP960XMA	Variant Model: NP960XMB	Deviation	Max Deviation	Pass/Fail
15.247(b)(3)	Conducted Output Power	20MHz, Ch.6, 802.11b	dBm	N/A	17.88	17.01	0.87	3	PASS
15.209	Radiated Spurious Emissions	20MHz, Ch.6, 802.11b	dBm	53.98	31.04	34.01	2.97	3	PASS
15.209	Radiated Band Edge Emissions	20MHz, Ch.13, 802.11be	dBm	53.98	51.95	51.42	0.53	3	PASS

Table 7-2. Summary of Spot-checks

2.4GHz WIFI (20MHz 802.11b MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2437	6	Average	13.73	14.25	17.01	30.00	-12.99	1.29	18.30	36.02	-17.72

Table 7-3. Conducted Output Power Measurements (Spot-check)


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	-	-	-82.59	9.60	0.00	34.01	53.98	-19.97
4874.00	Peak	H	-	-	-70.22	9.60	0.00	46.38	73.98	-27.60

Table 7-4. Radiated Measurements MIMO (Spot-check)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 13 of 104

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

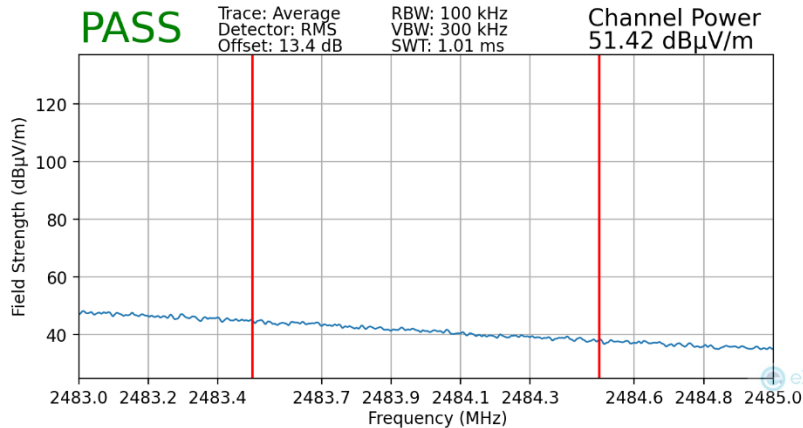

Plot 7-1. Radiated Restricted Upper Band Edge Measurement MIMO (Average) - (Spot-check)

- 8) Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.
- 9) All test cases were performed to verify the variant EUT is still in compliance with the spot checked results to the reference device and was performed using the guidance of ANSI C63.10-2013.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 14 of 104

7.2 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


1. Based on preliminary measurements, it was determined that, of all the tone configurations, the 26T configuration produced the worst case 6dB Bandwidth measurement. Only the worst case data is included in this section.
2. The 6dB bandwidth for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 15 of 104

7.2.1 SISO Antenna-2 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	be	26T	MCS0	2.149	0.500
2437	6	be	26T	MCS0	2.121	0.500
2462	11	be	26T	MCS0	2.125	0.500
2412	1	be	242T	MCS0	19.03	0.500
2437	6	be	242T	MCS0	19.00	0.500
2462	11	be	242T	MCS0	19.04	0.500

Table 7-5. Conducted 6dB Bandwidth Measurements SISO ANT2

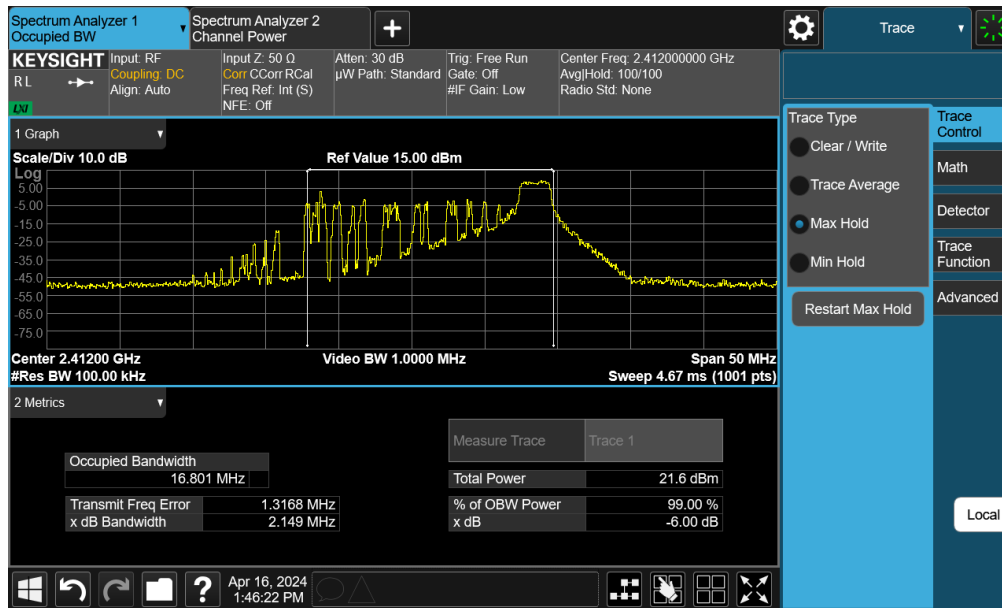


Plot 7-2. 6dB Bandwidth Plot SISO ANT2 (802.11be OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 16 of 104

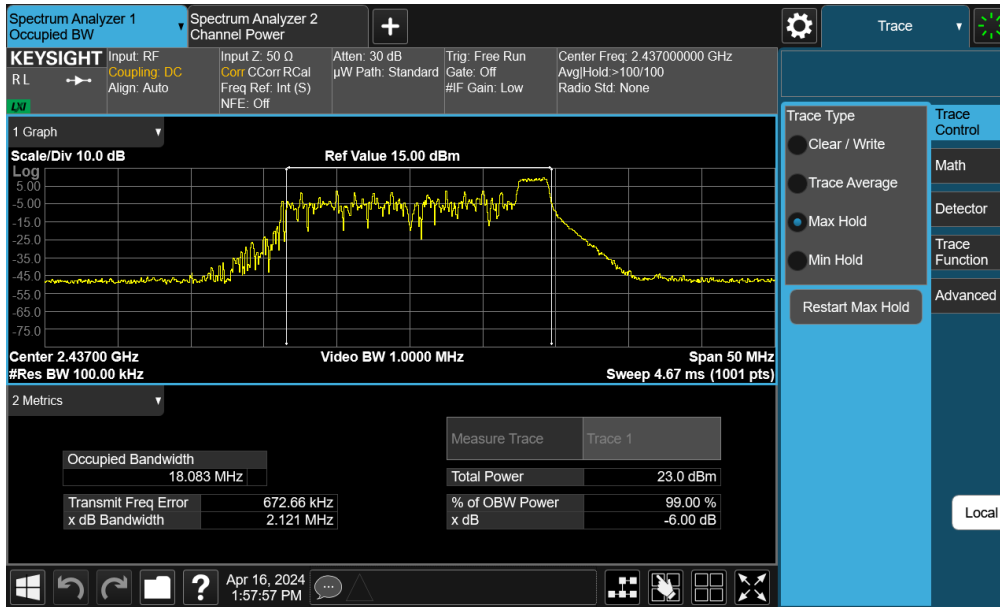


Plot 7-3. 6dB Bandwidth Plot SISO ANT2 (802.11be OFDMA – 26 Tones – Ch. 6)

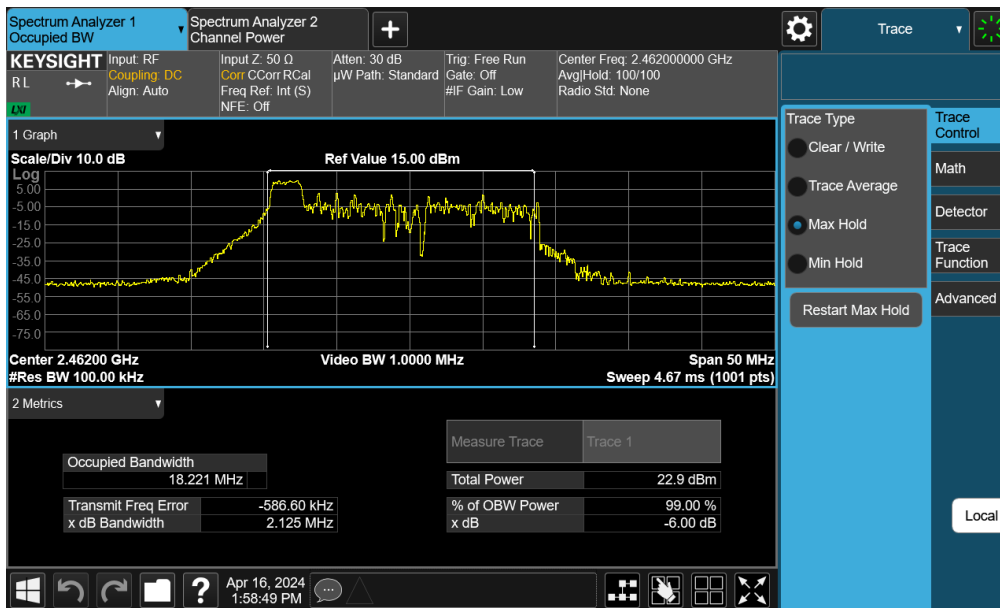


Plot 7-4. 6dB Bandwidth Plot SISO ANT2 (802.11be OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP960XMA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 17 of 104	

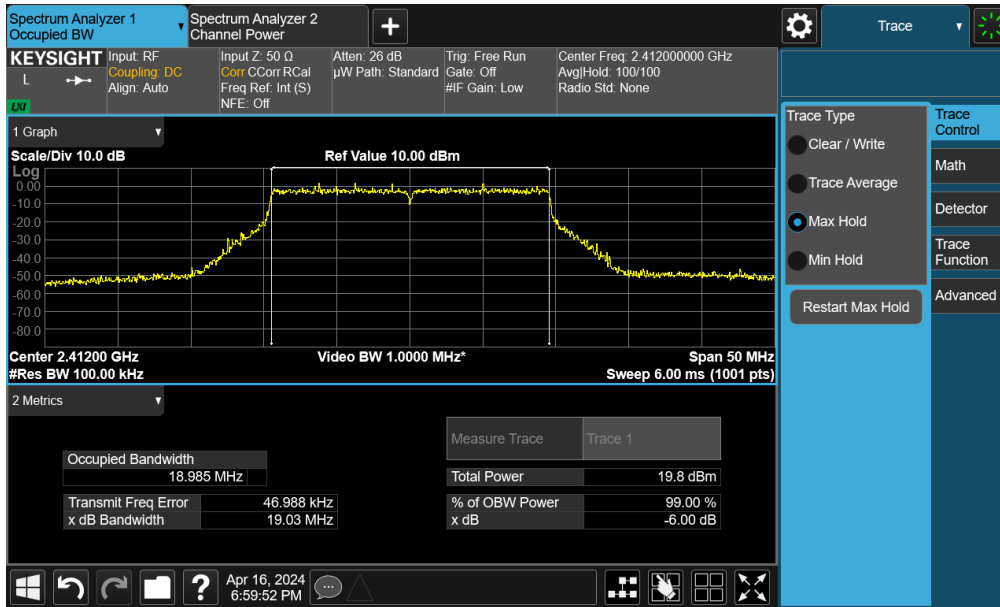


Plot 7-5. 6dB Bandwidth Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 1)

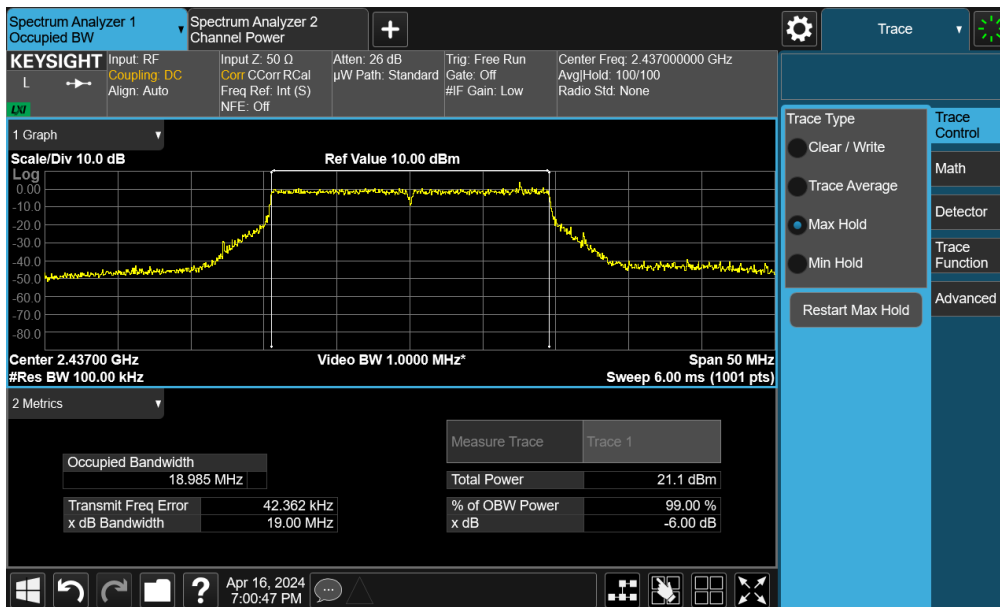


Plot 7-6. 6dB Bandwidth Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP960XMA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device		Page 18 of 104

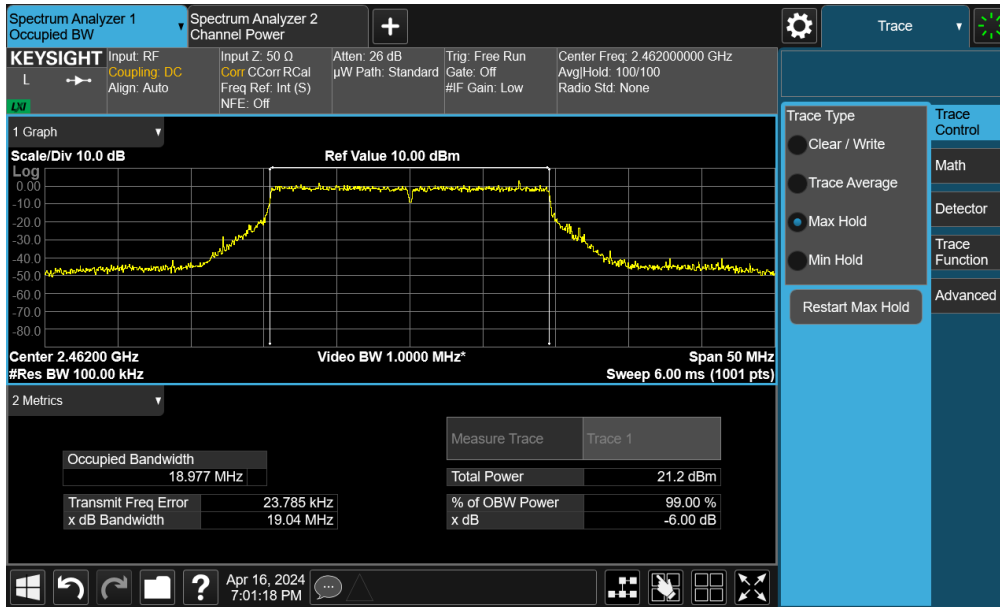


Plot 7-7. 6dB Bandwidth Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 19 of 104

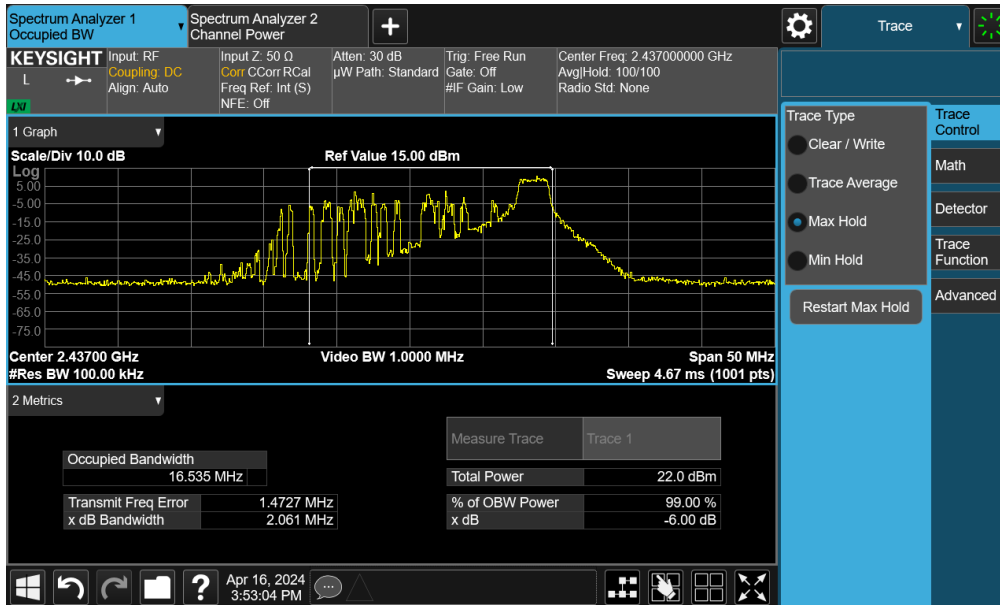


Plot 7-9. 6dB Bandwidth Plot MIMO ANT1 (802.11be OFDMA – 26Tones – Ch. 6)

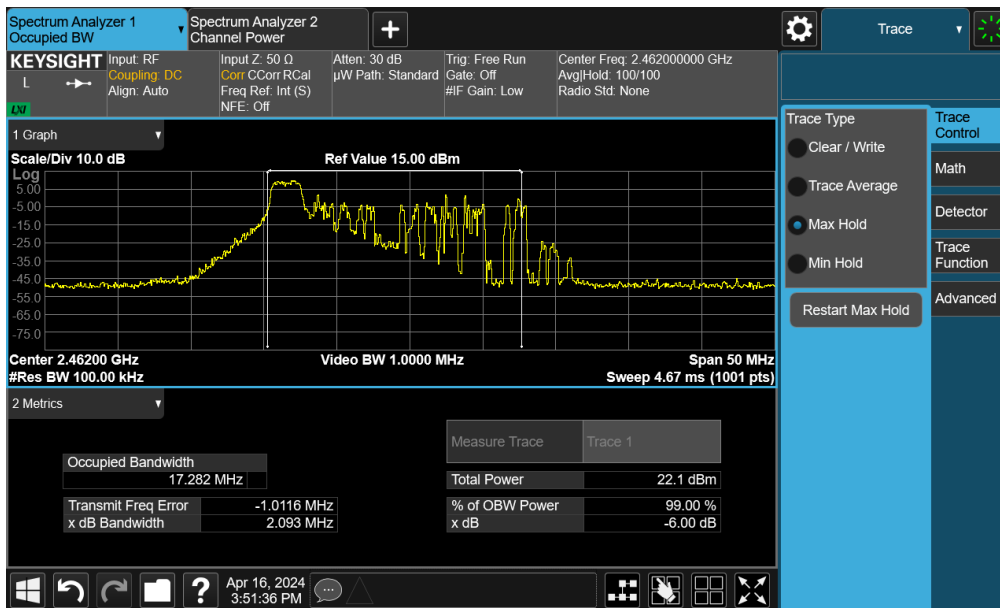


Plot 7-10. 6dB Bandwidth Plot MIMO ANT1 (802.11be OFDMA – 26Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 21 of 104

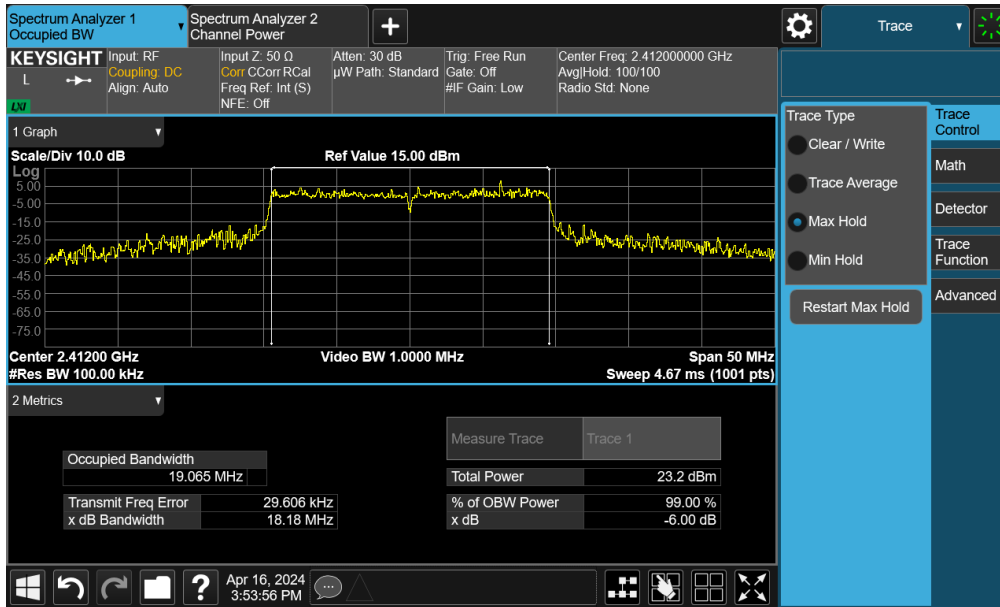


Plot 7-11. 6dB Bandwidth Plot MIMO ANT1 (802.11be OFDMA – 242Tones – Ch. 1)

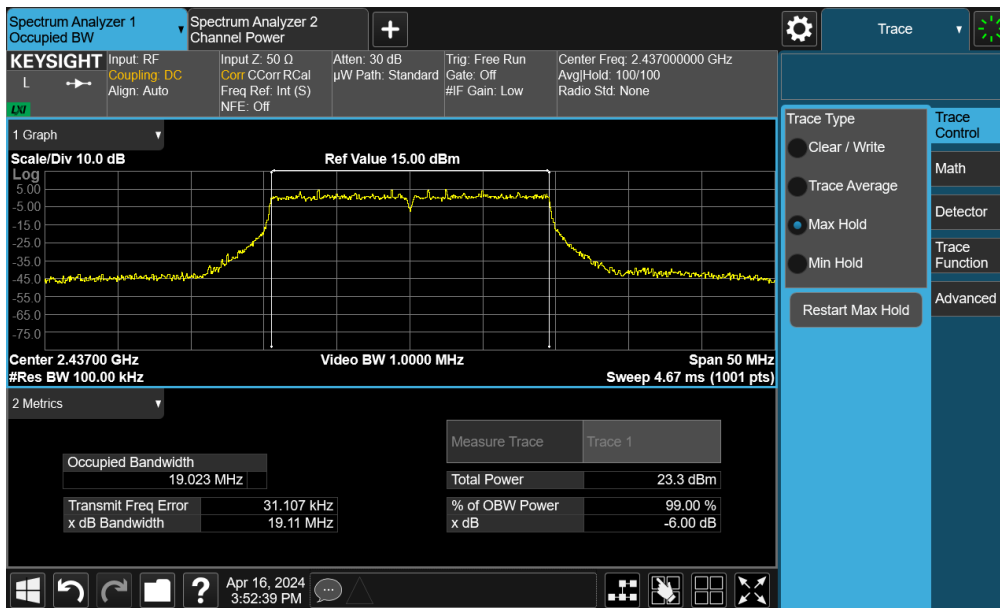

Plot 7-12. 6dB Bandwidth Plot MIMO ANT1 (802.11be OFDMA – 242Tones – Ch. 6)

FCC ID: A3LNP960XMA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 22 of 104	

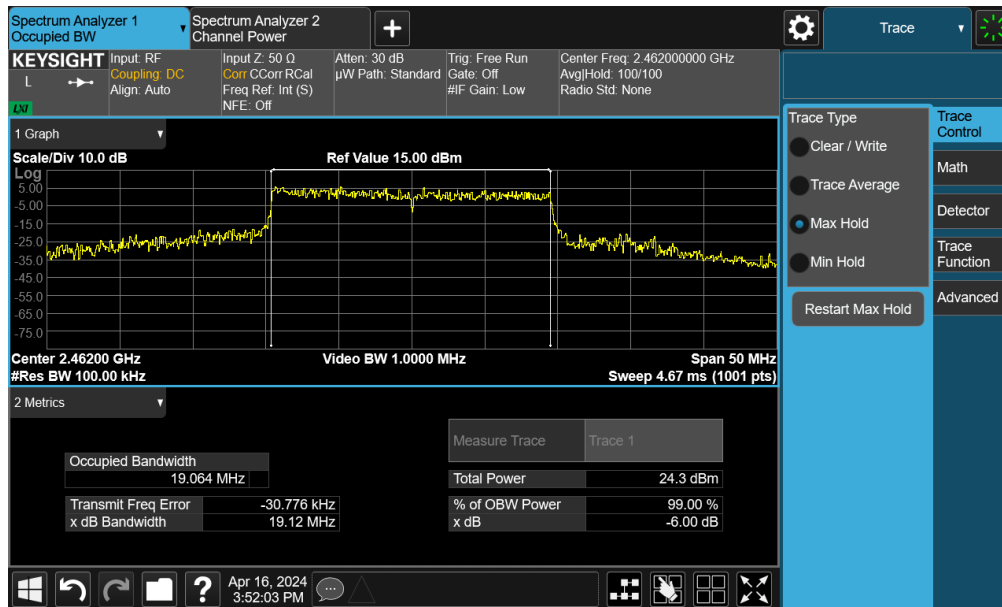


Plot 7-13. 6dB Bandwidth Plot MIMO ANT1 (802.11be OFDMA – 242Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 23 of 104


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	be	26T	MCS0	2.118	0.500
2437	6	be	26T	MCS0	2.101	0.500
2462	11	be	26T	MCS0	2.045	0.500
2412	1	be	242T	MCS0	19.08	0.500
2437	6	be	242T	MCS0	19.11	0.500
2462	11	be	242T	MCS0	18.96	0.500

Table 7-7. Conducted 6dB Bandwidth Measurements MIMO – Ant2

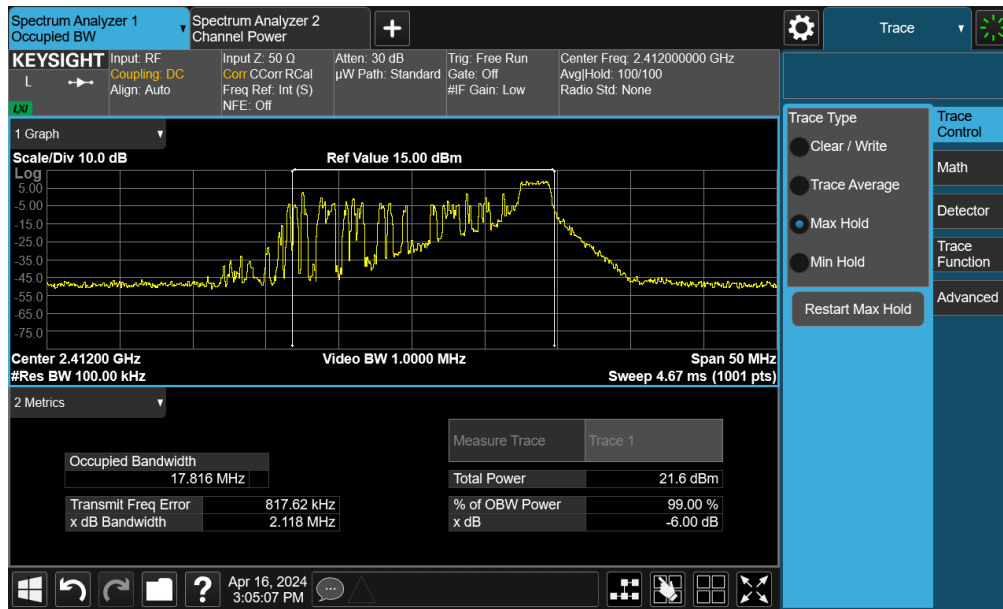


Plot 7-14. 6dB Bandwidth Plot MIMO ANT2 (802.11be OFDMA – 26Tones – Ch. 1)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 24 of 104

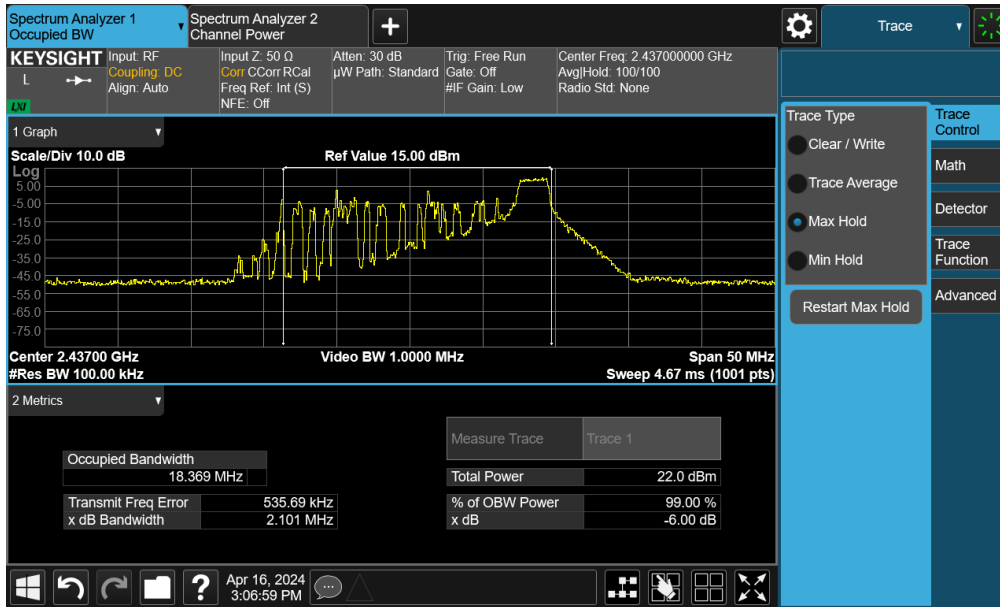


Plot 7-15. 6dB Bandwidth Plot MIMO ANT2 (802.11be OFDMA – 26Tones – Ch. 6)

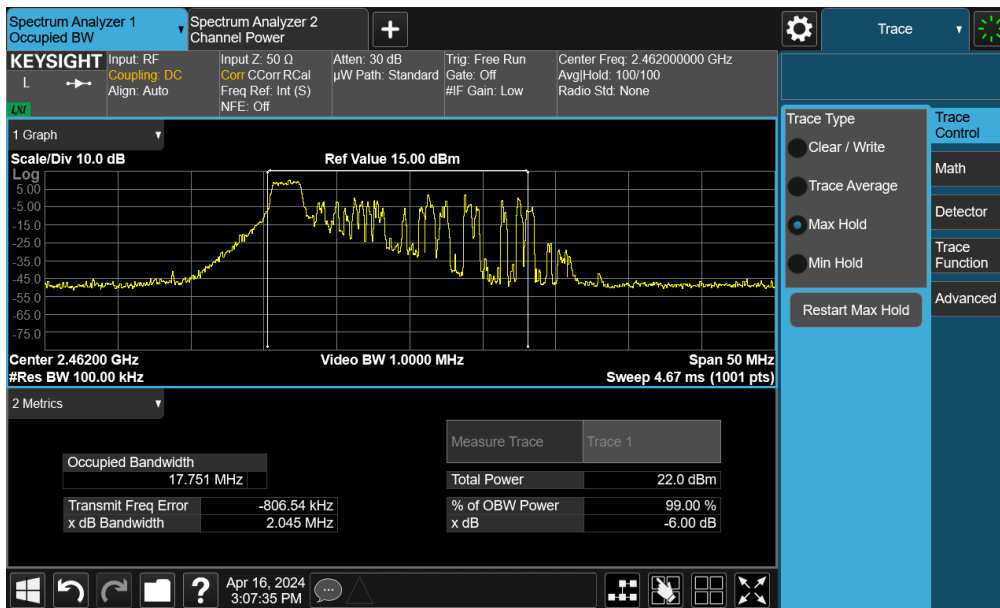


Plot 7-16. 6dB Bandwidth Plot MIMO ANT2 (802.11be OFDMA – 26Tones – Ch. 11)

FCC ID: A3LNP960XMA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device		Page 25 of 104

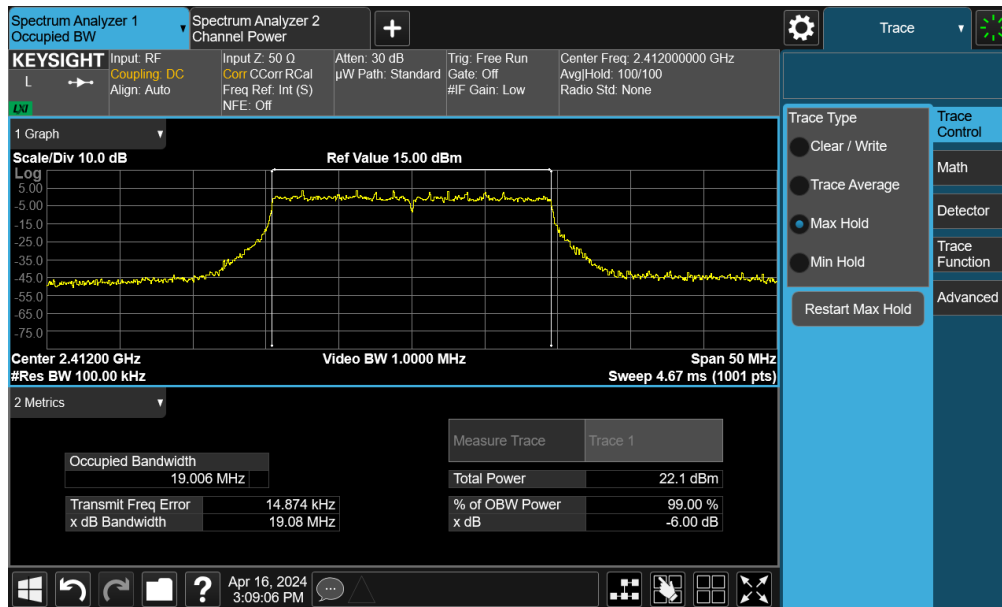


Plot 7-17. 6dB Bandwidth Plot MIMO ANT2 (802.11be OFDMA – 242Tones – Ch. 1)

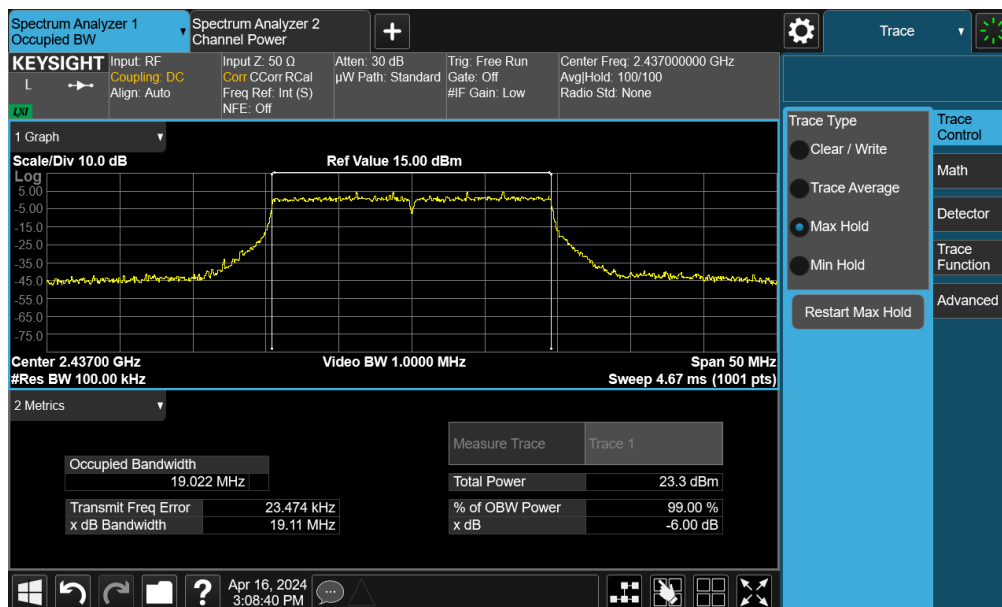

Plot 7-18. 6dB Bandwidth Plot MIMO ANT2 (802.11be OFDMA – 242Tones – Ch. 6)

FCC ID: A3LNP960XMA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device		Page 26 of 104

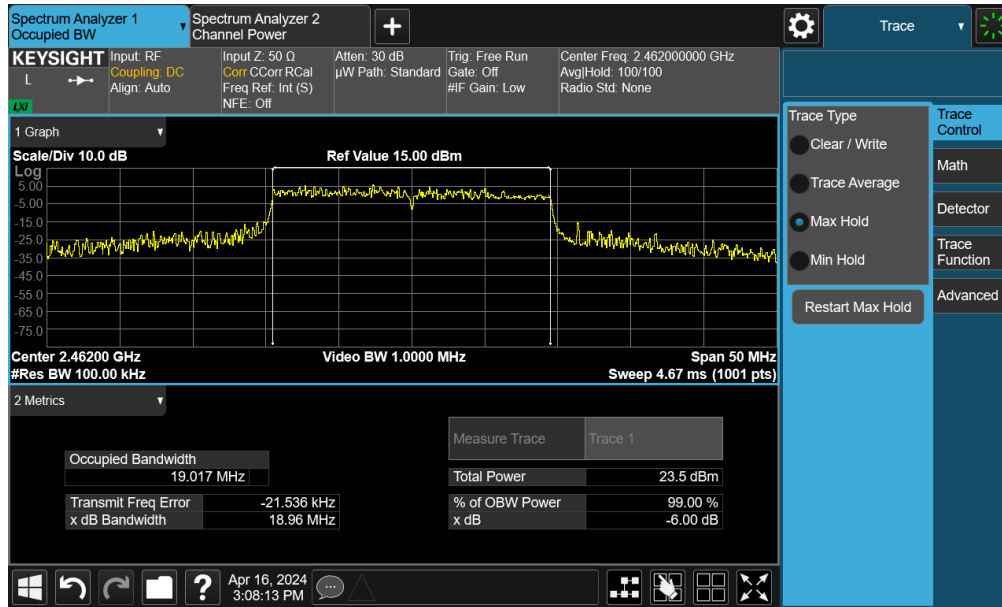

Plot 7-19. 6dB Bandwidth Plot MIMO ANT2 (802.11be OFDMA – 242Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 27 of 104

7.3 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt per 15.247 and RSS-247. The e.i.r.p. shall not exceed 4 W per RSS-247.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 28 of 104

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	26T	0	14.42	19.90	30.00	-15.58	-10.10	-1.82	12.60	36.02	-23.42
			4	14.10	19.43	30.00	-15.90	-10.57	-1.82	12.28	36.02	-23.74
			8	14.20	19.60	30.00	-15.80	-10.40	-1.82	12.38	36.02	-23.64
2437	6	26T	0	14.37	19.20	30.00	-15.63	-10.80	-1.82	12.55	36.02	-23.47
			4	14.37	19.21	30.00	-15.63	-10.79	-1.82	12.55	36.02	-23.47
			8	14.26	19.76	30.00	-15.74	-10.24	-1.82	12.44	36.02	-23.58
2462	11	26T	0	14.26	19.78	30.00	-15.74	-10.22	-1.82	12.44	36.02	-23.58
			4	14.01	19.11	30.00	-15.99	-10.89	-1.82	12.19	36.02	-23.83
			8	14.10	19.12	30.00	-15.90	-10.88	-1.82	12.28	36.02	-23.74
2467	12	26T	0	5.63	10.81	30.00	-24.37	-19.19	-1.82	3.81	36.02	-32.21
			4	4.90	9.94	30.00	-25.10	-20.06	-1.82	3.08	36.02	-32.94
			8	5.12	10.08	30.00	-24.88	-19.92	-1.82	3.30	36.02	-32.72
2472	13	26T	0	-3.18	2.25	30.00	-33.18	-27.75	-1.82	-5.00	36.02	-41.02
			4	-3.40	1.85	30.00	-33.40	-28.15	-1.82	-5.22	36.02	-41.24
			8	-3.50	1.22	30.00	-33.50	-28.78	-1.82	-5.32	36.02	-41.34

Table 7-8. Conducted Output Power Measurements SISO ANT2 (26 Tones)

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	52T	37	14.34	19.36	30.00	-15.66	-10.64	-1.82	12.52	36.02	-23.50
			38	14.27	19.22	30.00	-15.73	-10.78	-1.82	12.45	36.02	-23.57
			40	14.08	19.01	30.00	-15.92	-10.99	-1.82	12.26	36.02	-23.76
2437	6	52T	37	14.18	18.89	30.00	-15.82	-11.11	-1.82	12.36	36.02	-23.66
			38	14.29	19.01	30.00	-15.71	-10.99	-1.82	12.47	36.02	-23.55
			40	14.30	19.63	30.00	-15.70	-10.37	-1.82	12.48	36.02	-23.54
2462	11	52T	37	14.39	19.93	30.00	-15.61	-10.07	-1.82	12.57	36.02	-23.45
			38	14.40	19.20	30.00	-15.60	-10.80	-1.82	12.58	36.02	-23.44
			40	14.29	19.01	30.00	-15.71	-10.99	-1.82	12.47	36.02	-23.55
2467	12	52T	37	5.92	10.92	30.00	-24.08	-19.08	-1.82	4.10	36.02	-31.92
			38	5.48	10.80	30.00	-24.52	-19.20	-1.82	3.66	36.02	-32.36
			40	5.74	10.51	30.00	-24.26	-19.49	-1.82	3.92	36.02	-32.10
2472	13	52T	37	-3.02	2.10	30.00	-33.02	-27.90	-1.82	-4.84	36.02	-40.86
			38	-3.45	1.42	30.00	-33.45	-28.58	-1.82	-5.27	36.02	-41.29
			40	-3.31	1.71	30.00	-33.31	-28.29	-1.82	-5.13	36.02	-41.15

Table 7-9. Conducted Output Power Measurements SISO ANT2 (52 Tones)

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	106T	53	14.31	19.41	30.00	-15.69	-10.59	-1.82	12.49	36.02	-23.53
			54	14.08	19.94	30.00	-15.92	-10.06	-1.82	12.26	36.02	-23.76
2437	6	106T	53	14.32	19.33	30.00	-15.68	-10.67	-1.82	12.50	36.02	-23.52
			54	14.11	19.52	30.00	-15.89	-10.48	-1.82	12.29	36.02	-23.73
2462	11	106T	53	14.02	19.32	30.00	-15.98	-10.68	-1.82	12.20	36.02	-23.82
			54	14.05	19.85	30.00	-15.95	-10.15	-1.82	12.23	36.02	-23.79
2467	12	106T	53	5.82	10.89	30.00	-24.18	-19.11	-1.82	4.00	36.02	-32.02
			54	5.61	10.27	30.00	-24.39	-19.73	-1.82	3.79	36.02	-32.23
2472	13	106T	53	-3.15	2.15	30.00	-33.15	-27.85	-1.82	-4.97	36.02	-40.99
			54	-3.18	2.07	30.00	-33.18	-27.93	-1.82	-5.00	36.02	-41.02

Table 7-10. Conducted Output Power Measurements SISO ANT2 (106 Tones)

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	242T	61	14.01	19.52	30.00	-15.99	-10.48	-1.82	12.19	36.02	-23.83
2437	6	242T	61	13.79	18.97	30.00	-16.21	-11.03	-1.82	11.97	36.02	-24.05
2462	11	242T	61	14.49	19.49	30.00	-15.51	-10.51	-1.82	12.67	36.02	-23.35
2467	12	242T	61	5.44	10.52	30.00	-24.56	-19.48	-1.82	3.62	36.02	-32.40
2472	13	242T	61	-3.32	1.78	30.00	-33.32	-28.22	-1.82	-5.14	36.02	-41.16

Table 7-11. Conducted Output Power Measurements SISO ANT2 (242 Tones)

Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	52+26T	71	14.49	19.56	30.00	-15.51	-10.44	-1.82	12.67	36.02	-23.35
2437	6	52+26T	71	14.33	19.85	30.00	-15.67	-10.15	-1.82	12.51	36.02	-23.51
2462	11	52+26T	71	14.49	19.90	30.00	-15.51	-10.10	-1.82	12.67	36.02	-23.35
2467	12	52+26T	71	5.47	10.35	30.00	-24.53	-19.65	-1.82	3.65	36.02	-32.37
2472	13	52+26T	71	-3.34	1.60	30.00	-33.34	-28.40	-1.82	-5.16	36.02	-41.18

Table 7-12. Conducted Output Power Measurements SISO ANT2 (52+26 Tones)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 29 of 104

Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers (dBm)	Peak Conducted Powers (dBm)	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	106+26T	82	13.72	18.69	30.00	-16.28	-11.31	-1.82	11.90	36.02	-24.12
			83	13.54	18.54	30.00	-16.46	-11.46	-1.82	11.72	36.02	-24.30
2437	6	106+26T	82	13.80	18.51	30.00	-16.20	-11.49	-1.82	11.98	36.02	-24.04
			83	13.95	19.01	30.00	-16.05	-10.99	-1.82	12.13	36.02	-23.89
2462	11	106+26T	82	13.88	18.99	30.00	-16.12	-11.01	-1.82	12.06	36.02	-23.96
			83	13.51	18.58	30.00	-16.49	-11.42	-1.82	11.69	36.02	-24.33
2467	12	106+26T	82	5.95	11.05	30.00	-24.05	-18.95	-1.82	4.13	36.02	-31.89
			83	5.87	10.82	30.00	-24.13	-19.18	-1.82	4.05	36.02	-31.97
2472	13	106+26T	82	-3.21	2.02	30.00	-33.21	-27.98	-1.82	-5.03	36.02	-41.05
			83	-3.44	1.83	30.00	-33.44	-28.17	-1.82	-5.26	36.02	-41.28

Table 7-13. Conducted Output Power Measurements SISO ANT2 (106+26 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	26T	0	14.20	19.99	14.28	19.62	17.25	22.82	30.00	-12.75	-7.18	1.29	18.54	36.02	-17.48
			4	14.04	19.71	13.94	19.82	17.00	22.78	30.00	-13.00	-7.22	1.29	18.29	36.02	-17.73
			8	14.07	20.21	14.12	19.80	17.11	23.02	30.00	-12.89	-6.98	1.29	18.40	36.02	-17.62
			0	14.38	20.15	14.14	19.62	17.27	22.90	30.00	-12.73	-7.10	1.29	18.56	36.02	-17.46
2437	6	26T	4	14.08	20.05	13.97	19.82	17.04	22.95	30.00	-12.96	-7.05	1.29	18.33	36.02	-17.69
			8	14.42	20.08	14.39	20.12	17.42	23.11	30.00	-12.58	-6.89	1.29	18.71	36.02	-17.31
			0	14.32	20.05	14.42	20.28	17.38	23.18	30.00	-12.62	-6.82	1.29	18.67	36.02	-17.35
			4	14.24	19.72	14.02	19.52	17.14	22.63	30.00	-12.86	-7.37	1.29	18.43	36.02	-17.59
2462	11	26T	8	14.28	19.66	14.32	19.82	17.31	22.75	30.00	-12.69	-7.25	1.29	18.60	36.02	-17.42
			0	4.52	9.76	5.74	10.98	8.36	13.42	30.00	-21.64	-16.58	1.29	9.65	36.02	-26.37
			4	4.80	9.56	4.88	9.87	7.85	12.73	30.00	-22.15	-17.27	1.29	9.14	36.02	-26.88
			8	4.86	9.67	5.29	10.50	8.09	13.12	30.00	-21.91	-16.88	1.29	9.38	36.02	-26.64
2467	12	26T	0	-3.19	1.52	-3.13	2.15	-0.15	4.86	30.00	-30.15	-25.14	1.29	1.14	36.02	-34.88
			4	-3.37	1.37	-3.55	1.30	-0.45	4.45	30.00	-30.45	-25.55	1.29	0.84	36.02	-35.18
			8	-4.72	0.52	-3.56	1.54	-1.09	4.07	30.00	-31.09	-25.92	1.29	0.20	36.02	-35.82
			0	-3.19	1.52	-3.13	2.15	-0.15	4.86	30.00	-30.15	-25.14	1.29	1.14	36.02	-34.88
2472	13	26T	4	-3.37	1.37	-3.55	1.30	-0.45	4.45	30.00	-30.45	-25.55	1.29	0.84	36.02	-35.18
			8	-4.72	0.52	-3.56	1.54	-1.09	4.07	30.00	-31.09	-25.92	1.29	0.20	36.02	-35.82
			0	-3.19	1.52	-3.13	2.15	-0.15	4.86	30.00	-30.15	-25.14	1.29	1.14	36.02	-34.88
			4	-3.37	1.37	-3.55	1.30	-0.45	4.45	30.00	-30.45	-25.55	1.29	0.84	36.02	-35.18

Table 7-14. Conducted Output Power Measurements MIMO (26 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	52T	37	13.78	20.34	14.41	20.70	17.12	23.53	30.00	-12.88	-6.47	1.29	18.41	36.02	-17.61
			38	14.02	20.81	14.17	20.66	17.11	23.75	30.00	-12.89	-6.25	1.29	18.40	36.02	-17.62
			40	14.08	20.74	13.98	20.28	17.04	23.53	30.00	-12.96	-6.47	1.29	18.33	36.02	-17.69
			37	14.46	20.91	14.22	20.48	17.35	23.71	30.00	-12.65	-6.29	1.29	18.64	36.02	-17.38
2437	6	52T	38	14.37	20.98	14.37	20.80	17.38	23.90	30.00	-12.62	-6.10	1.29	18.67	36.02	-17.35
			40	14.29	20.88	14.26	20.77	17.29	23.84	30.00	-12.71	-6.16	1.29	18.58	36.02	-17.44
			37	14.30	20.91	14.47	21.05	17.40	23.99	30.00	-12.60	-6.01	1.29	18.69	36.02	-17.33
			38	14.02	20.55	14.28	20.58	17.16	23.58	30.00	-12.84	-6.42	1.29	18.45	36.02	-17.57
2462	11	52T	40	14.15	20.65	13.96	20.35	17.07	23.51	30.00	-12.93	-6.49	1.29	18.36	36.02	-17.66
			37	5.14	10.21	5.94	10.99	8.57	13.63	30.00	-21.43	-16.37	1.29	9.86	36.02	-26.16
			38	5.21	10.34	5.50	10.16	8.37	13.26	30.00	-21.63	-16.74	1.29	9.66	36.02	-26.36
			40	5.08	10.20	5.75	10.68	8.44	13.46	30.00	-21.56	-16.54	1.29	9.73	36.02	-26.29
2467	12	52T	37	-3.32	1.68	-3.11	1.98	-0.20	4.84	30.00	-30.20	-25.16	1.29	1.09	36.02	-34.93
			38	-3.44	1.64	-3.55	1.62	-0.48	4.64	30.00	-30.48	-25.36	1.29	0.81	36.02	-35.21
			40	-4.48	0.53	-3.53	1.68	-0.97	4.15	30.00	-30.97	-25.85	1.29	0.32	36.02	-35.70
			37	-3.32	1.68	-3.11	1.98	-0.20	4.84	30.00	-30.20	-25.16	1.29	1.09	36.02	-34.93

Table 7-15. Conducted Output Power Measurements MIMO (52 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106T	53	13.52	18.29	13.48	18.39	16.51	21.35	30.00	-12.91	-8.31	1.29	18.38	36.02	-17.64
			54	14.15	18.77	13.96	18.47	17.07	21.63	30.00	-12.93	-8.37	1.29	18.36	36.02	-17.66
			53	14.46	19.03	14.25	18.72	17.37	21.89	30.00	-12.63	-8.11	1.29	18.66	36.02	-17.36
2462	11	106T	54	14.17	18.78	14.41	19.06	17.30	21.93	30.00	-12.70	-8.07	1.29	18.59	36.02	-17.43
			53	14.30	18.77	14.44	19.03	17.38	21.91	30.00	-12.62	-8.09	1.29	18.67	36.02	-17.35
			54	14.12	18.38	14.02	18.71	17.08	21.56	30.00	-12.92	-8.44	1.29	18.37	36.02	-17.65
2467	12	106T	53	5.36	10.31	5.77	10.71	8.58	13.52	30.00	-21.42	-16.48	1.29	9.87	36.02	-26.15
			54	5.14	10.44	5.19	10.53	8.18	13.50	30.00	-21.82	-16.50	1.29	9.47	36.02	-26.55
			53	-3.37	1.99	-3.08	2.15	-0.21	5.08	30.00	-30.21	-24.92	1.29	1.08	36.02	-34.94
2472	13	106T	54	-4.00	1.08	-3.51	1.74	-0.74	4.43	30.00	-30.74	-25.57	1.29	0.55	36.02	-35.47

Table 7-16. Conducted Output Power Measurements MIMO (106 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	242T	61	13.52	18.29	13.48	18.39	16.51	21.35	30.00	-13.49	-8.65	1.29	17.80	36.02	-18.22
2437	6	242T	61	13.78	19.68	14.49	19.78	17.16	22.74	30.00	-12.84	-7.26	1.29	18.45	36.02	-17.57
2462	11	242T	61	13.55	18.39	13.50	18.77	16.54	21.59	30.00	-13.46	-8.41	1.29	17.83	36.02	-18.19
2467	12	242T	61	5.06	10.19	5.36	10.35	8.22	13.28	30.00	-21.78	-16.72	1.29	9.51	36.02	-26.51
2472	13	242T	61	-3.80	1.33	-3.39	1.65	-0.58	4.50	30.00	-30.58	-25.50	1.29	0.71	36.02	-35.31

Table 7-17. Conducted Output Power Measurements MIMO (242 Tones)

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	52+26T	71	13.43	18.16	13.65	18.65	16.55	21.42	30.00	-13.45	-8.58	1.29	17.84	36.02	-18.18
2437	6	52+26T	71	13.82	18.25	13.86	18.68	16.85	21.48	30.00	-13.15	-8.52	1.29	18.14	36.02	-17.88
2462	11	52+26T	71	13.35	18.72	13.65										



Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]				Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]		
				Antenna-1		Antenna-2									MIMO	
				AVG	PEAK	AVG	PEAK								AVG	PEAK
2412	1	106+26T	82	13.65	18.81	13.68	18.69	16.68	21.76	30.00	-13.32	-8.24	1.29	17.97	36.02	-18.05
			83	13.60	18.60	13.58	18.68	16.60	21.65	30.00	-13.40	-8.35	1.29	17.89	36.02	-18.13
			82	13.63	18.60	13.68	18.80	16.67	21.71	30.00	-13.33	-8.29	1.29	17.96	36.02	-18.06
2437	6	106+26T	83	13.53	18.25	13.78	18.73	16.67	21.51	30.00	-13.33	-8.49	1.29	17.96	36.02	-18.06
			82	13.64	18.97	13.90	18.93	16.78	21.96	30.00	-13.22	-8.04	1.29	18.07	36.02	-17.95
			83	13.57	18.48	13.47	21.52	16.53	23.27	30.00	-13.47	-6.73	1.29	17.82	36.02	-18.20
2467	12	106+26T	82	5.41	10.39	5.58	10.66	8.51	13.54	30.00	-21.49	-16.46	1.29	9.80	36.02	-26.22
			83	5.21	10.26	5.33	10.43	8.28	13.36	30.00	-21.72	-16.64	1.29	9.57	36.02	-26.45
			82	-3.39	1.99	-3.14	1.75	-0.25	4.88	30.00	-30.25	-25.12	1.29	1.04	36.02	-34.98
2472	13	106+26T	82	-3.76	1.56	-3.45	1.65	-0.59	4.62	30.00	-30.59	-25.38	1.29	0.70	36.02	-35.32

Table 7-19. Conducted Output Power Measurements MIMO (106+26 Tones)

Note:

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 14.20 dBm for Antenna 1 and 14.28 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(14.20 \text{ dBm} + 14.28 \text{ dBm}) = (26.30 \text{ mW} + 26.79 \text{ mW}) = 53.09 \text{ mW} = 17.25 \text{ dBm}$$

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 31 of 104

7.4 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tones configurations, and RU indices were investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD
ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Based on preliminary measurements, it was determined that, of all of the tone configurations, the 26T configuration produced the worst case power spectral density measurement for partial loaded case. Therefore, only the 26 Tone configuration and 242 Tone data is included in this section.
2. The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 32 of 104

7.4.1 SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	be	26T	MCS0	-1.98	8.00	-9.98	Pass
2437	6	be	26T	MCS0	-1.77	8.00	-9.77	Pass
2462	11	be	26T	MCS0	-2.71	8.00	-10.71	Pass
2412	1	be	242T	MCS0	-9.34	8.00	-17.34	Pass
2437	6	be	242T	MCS0	-8.36	8.00	-16.36	Pass
2462	11	be	242T	MCS0	-9.10	8.00	-17.10	Pass

Table 7-20. Conducted Power Spectral Density Measurements SISO ANT2

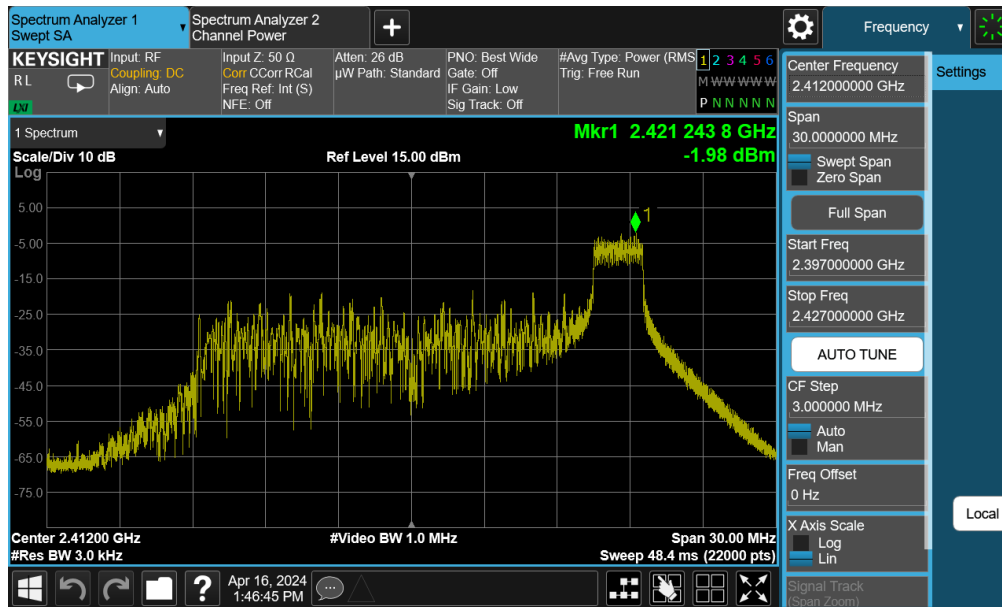


Plot 7-20. Power Spectral Density Plot SISO ANT2 (802.11be OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 33 of 104

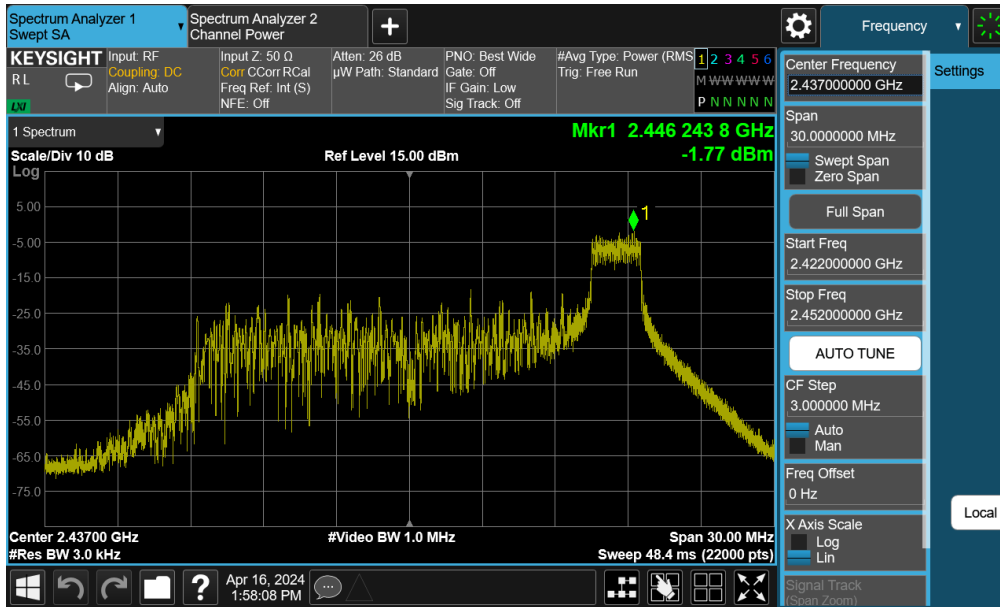


Plot 7-21. Power Spectral Density Plot SISO ANT2 (802.11 be OFDMA – 26 Tones – Ch. 6)

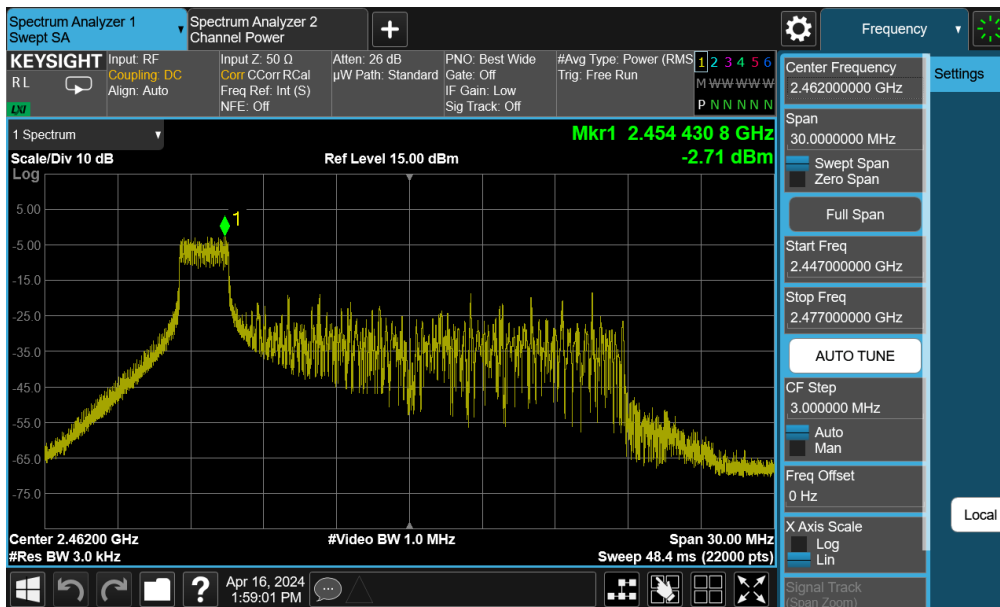


Plot 7-22. Power Spectral Density Plot SISO ANT2 (802.11 be OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 34 of 104

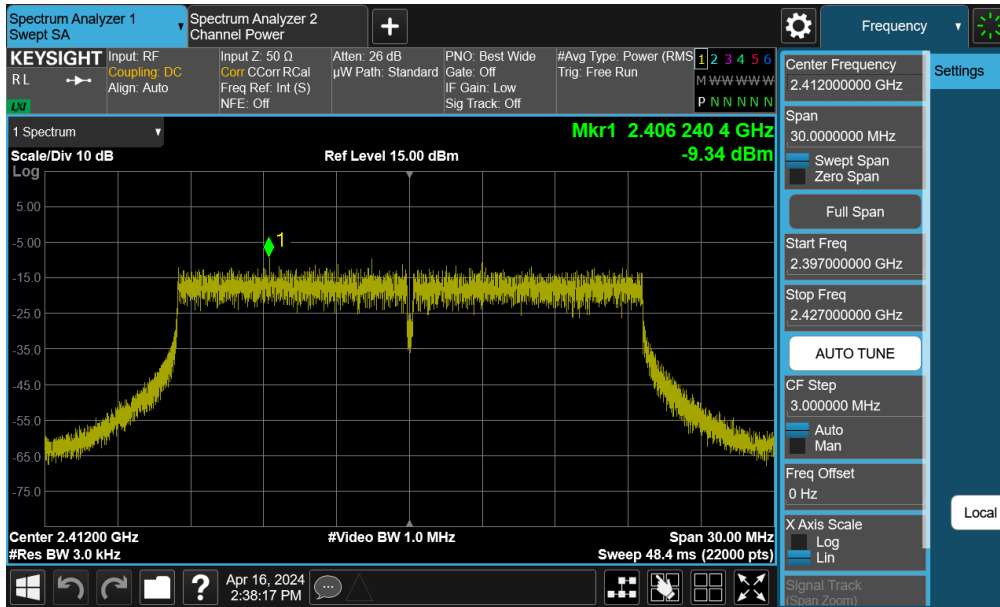


Plot 7-23. Power Spectral Density Plot SISO ANT2 (802.11 be OFDMA – 242 Tones – Ch. 1)

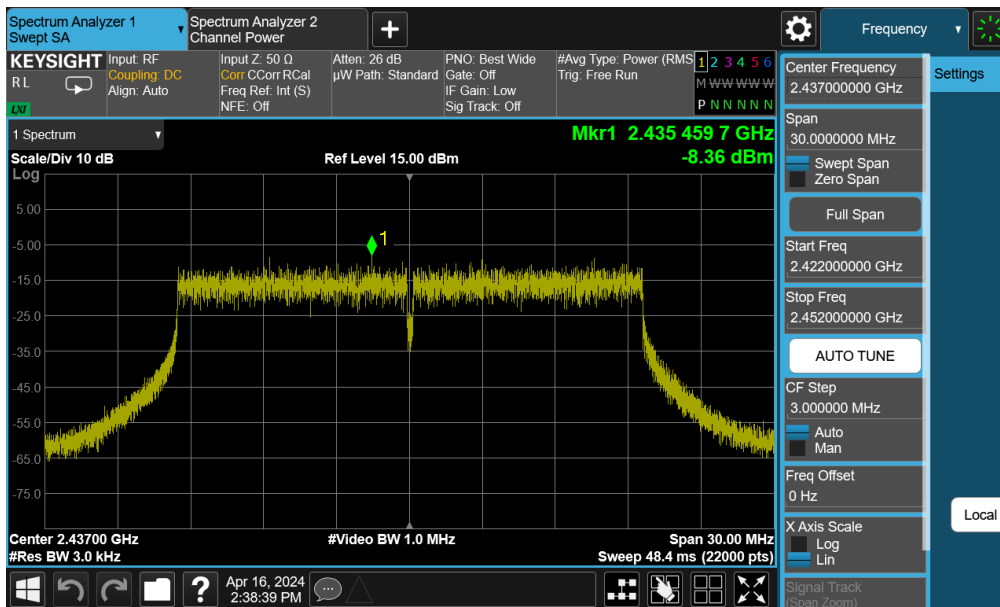

Plot 7-24. Power Spectral Density Plot SISO ANT2 (802.11 be OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 35 of 104

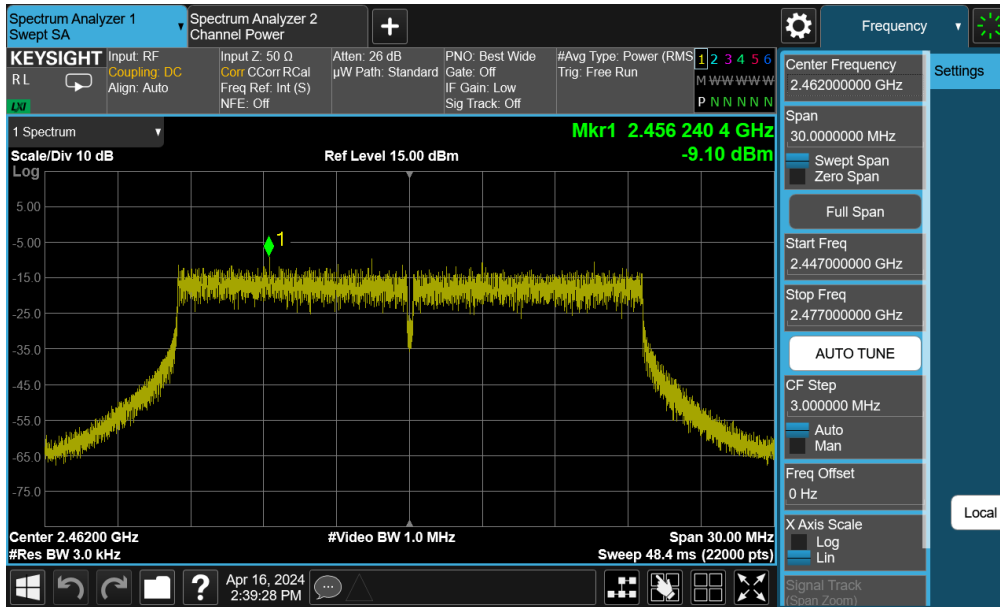


Plot 7-25. Power Spectral Density Plot SISO ANT2 (802.11 be OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 36 of 104

7.4.2 MIMO Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	be	26T	MCS0	-2.56	-2.79	0.34	8.00	-7.66	Pass
2437	6	be	26T	MCS0	-1.88	-2.11	1.02	8.00	-6.98	Pass
2462	11	be	26T	MCS0	-2.68	-2.94	0.20	8.00	-7.80	Pass
2412	1	be	242T	MCS0	-9.49	-9.42	-6.44	8.00	-14.44	Pass
2437	6	be	242T	MCS0	-8.43	-8.34	-5.37	8.00	-13.37	Pass
2462	11	be	242T	MCS0	-9.17	-9.15	-6.15	8.00	-14.15	Pass

Table 7-21. Conducted Power Spectral Density Measurements MIMO

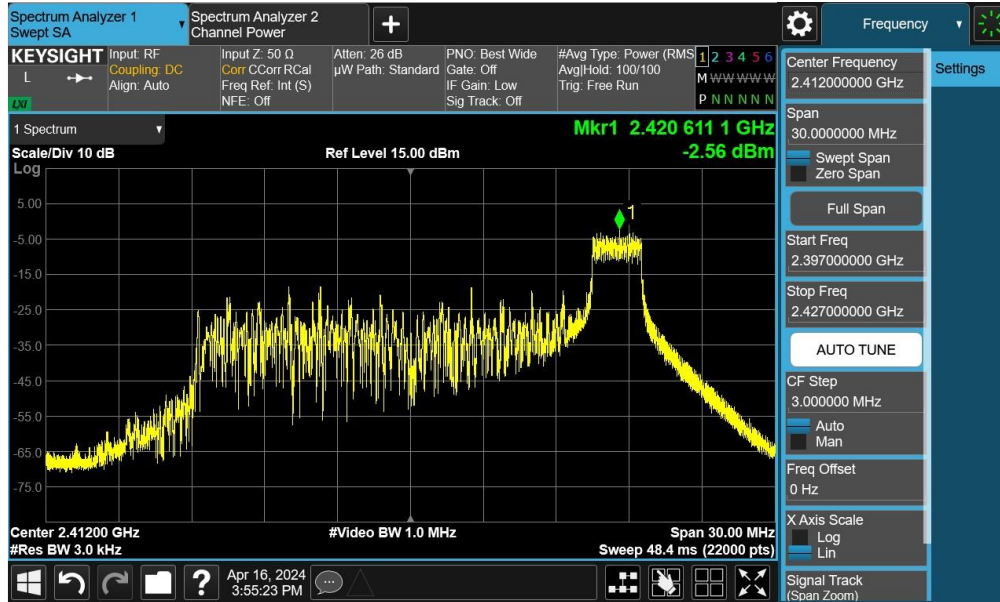


Plot 7-26. Power Spectral Density Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 37 of 104

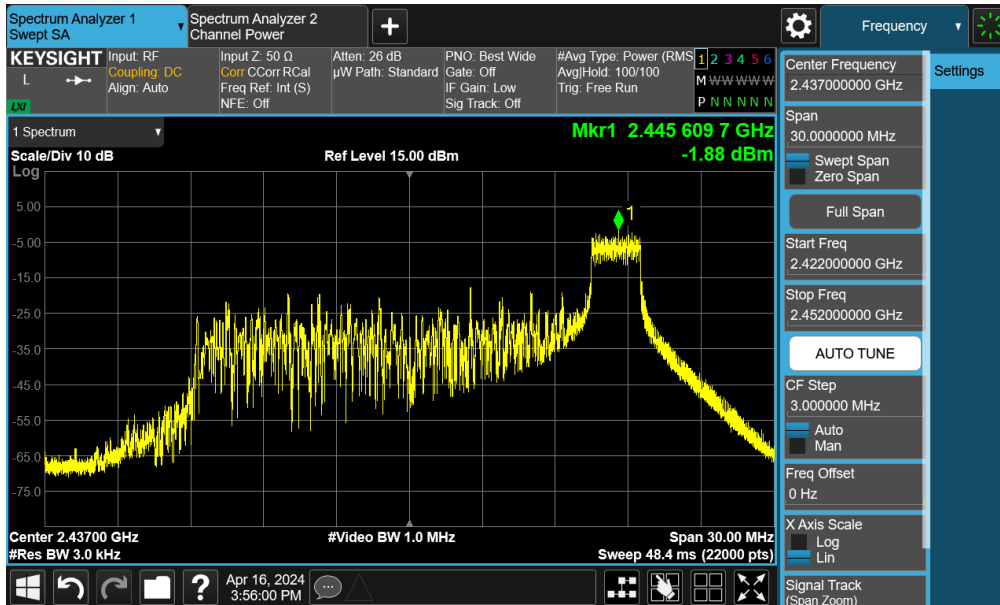


Plot 7-27. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 6)

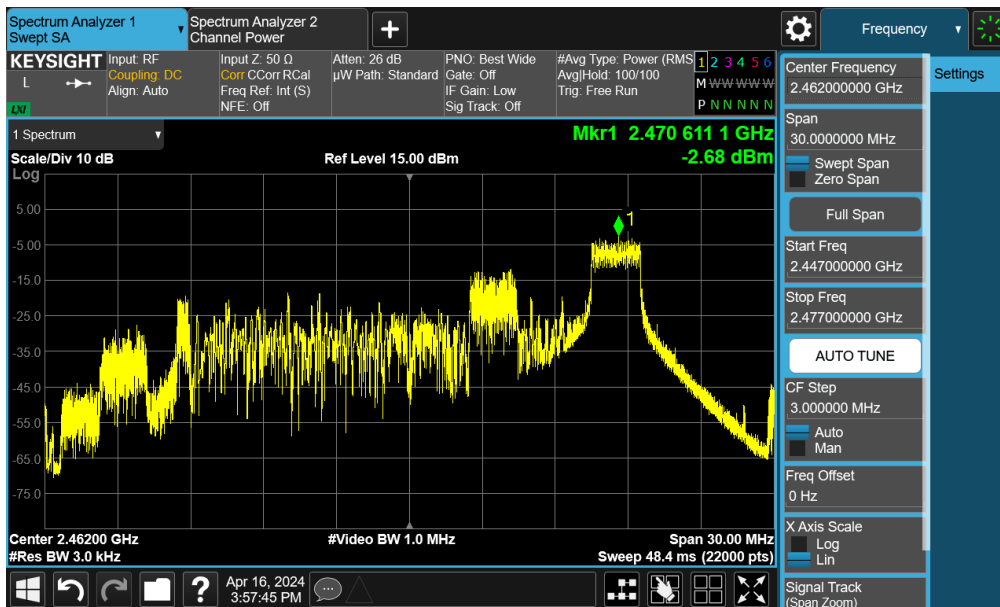


Plot 7-28. Power Spectral Density Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 38 of 104

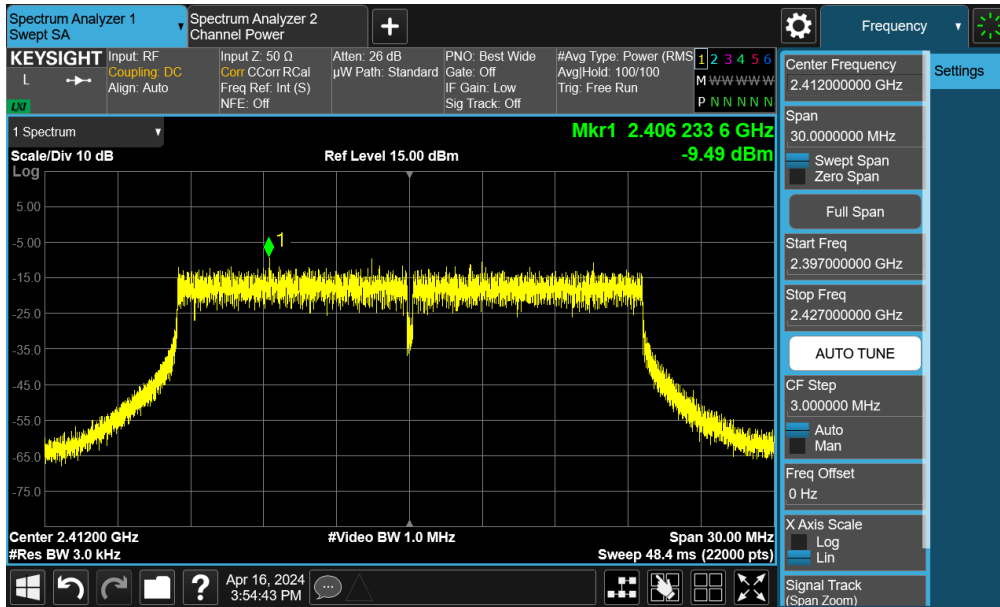


Plot 7-29. Power Spectral Density Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 1)

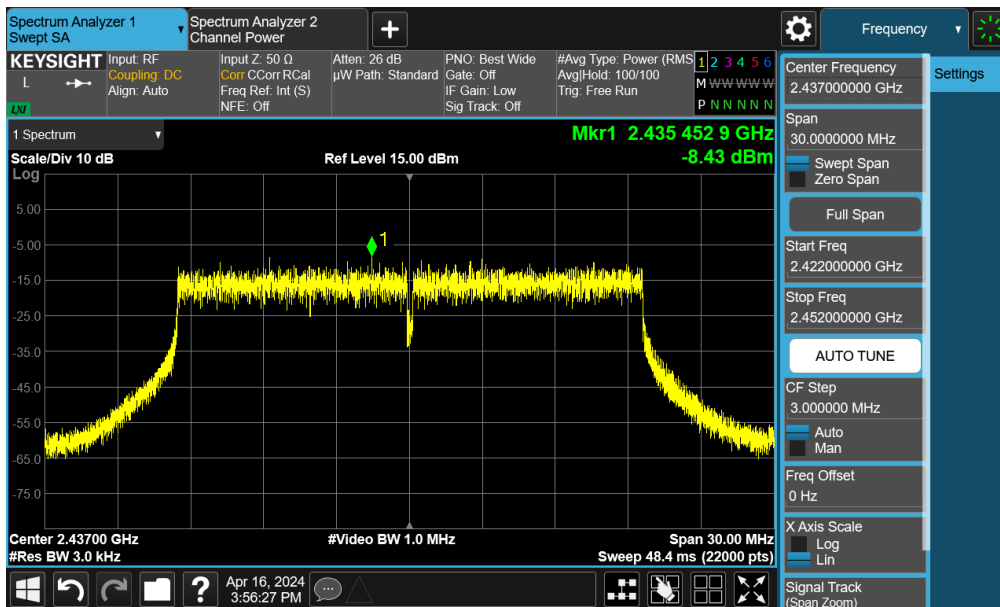


Plot 7-30. Power Spectral Density Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 39 of 104

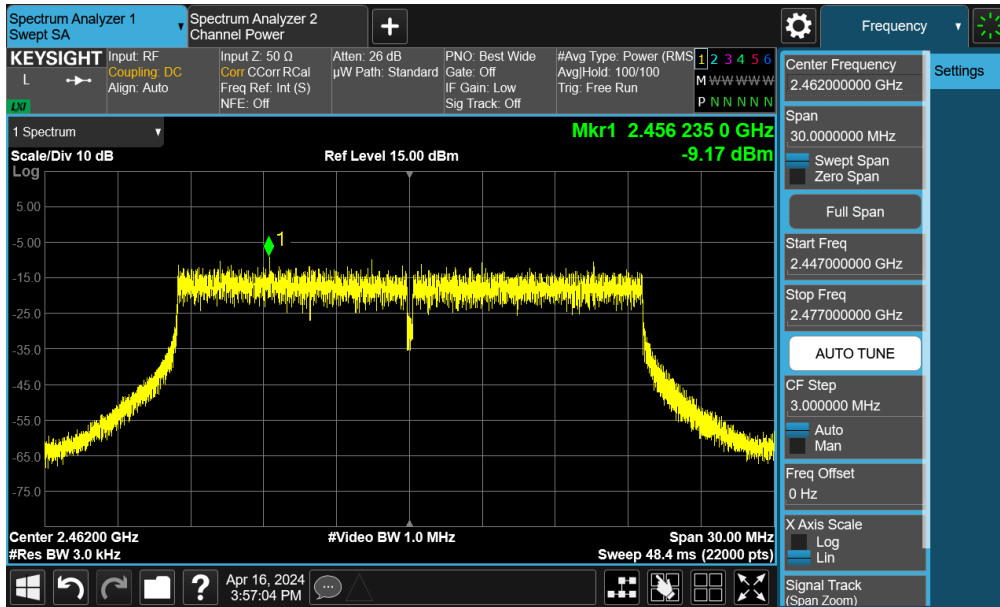


Plot 7-31. Power Spectral Density Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 11)

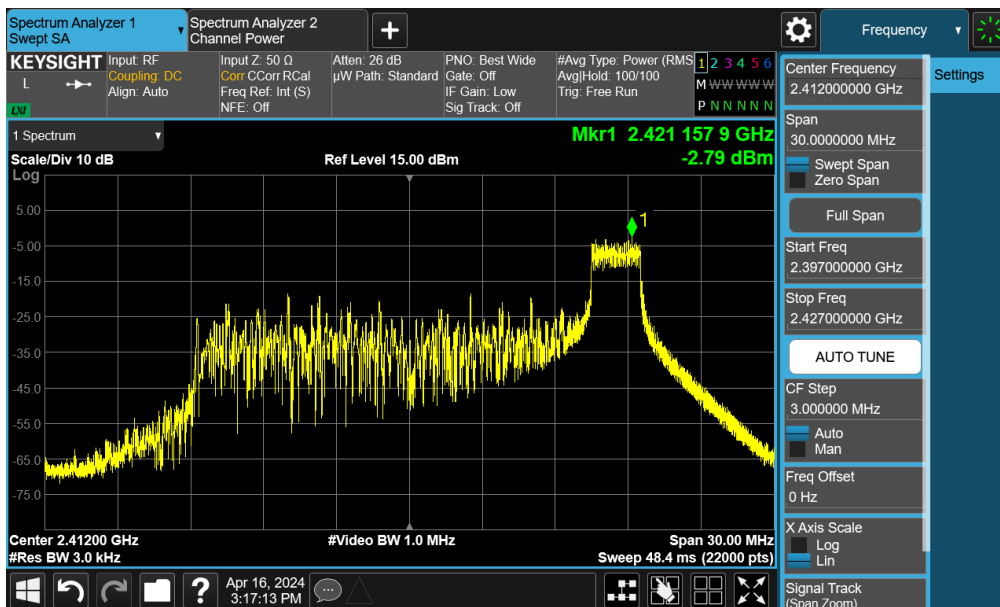


Plot 7-32. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 40 of 104

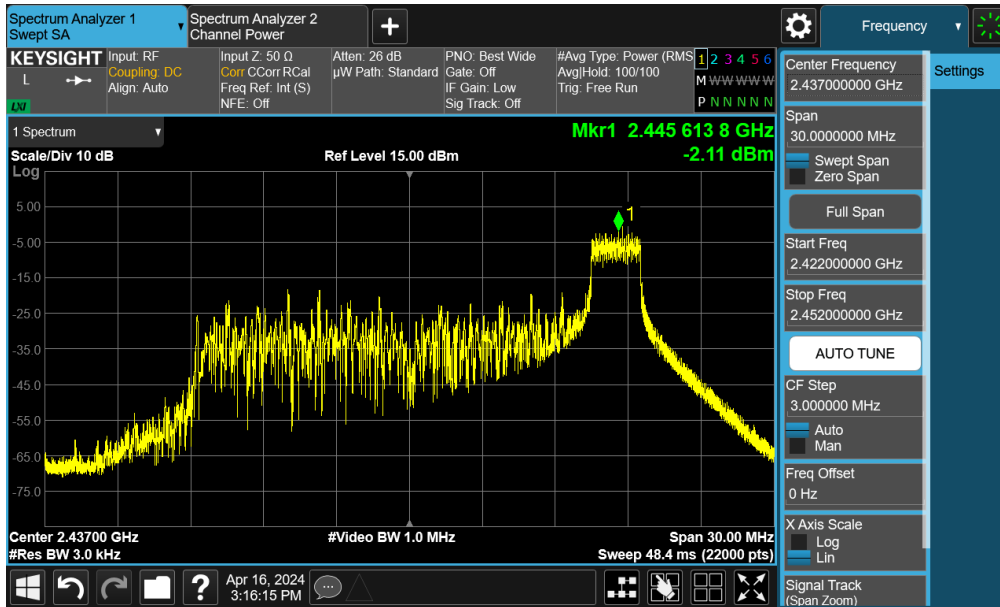


Plot 7-33. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 6)

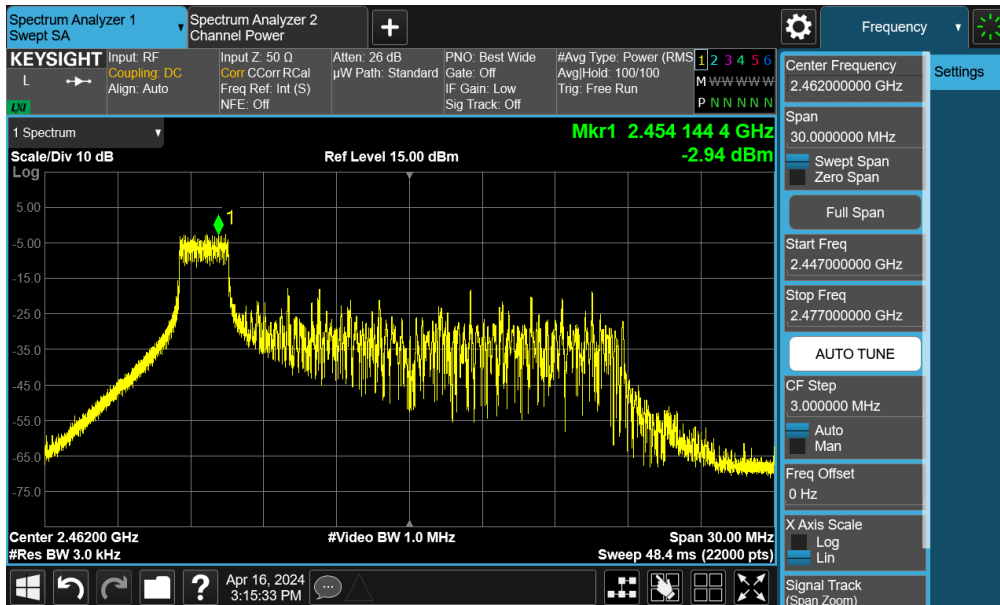


Plot 7-34. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 41 of 104

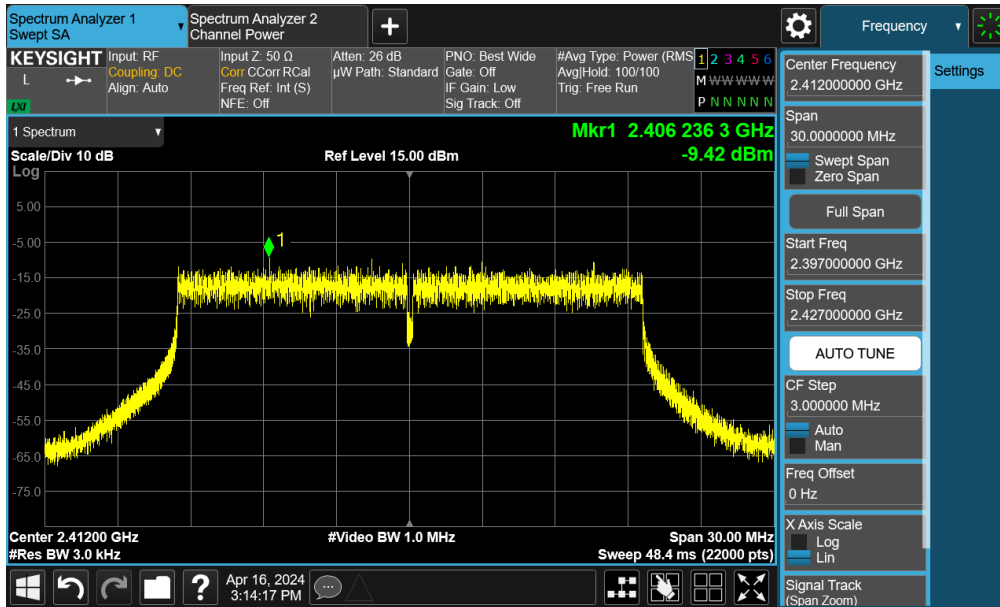


Plot 7-35. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 1)

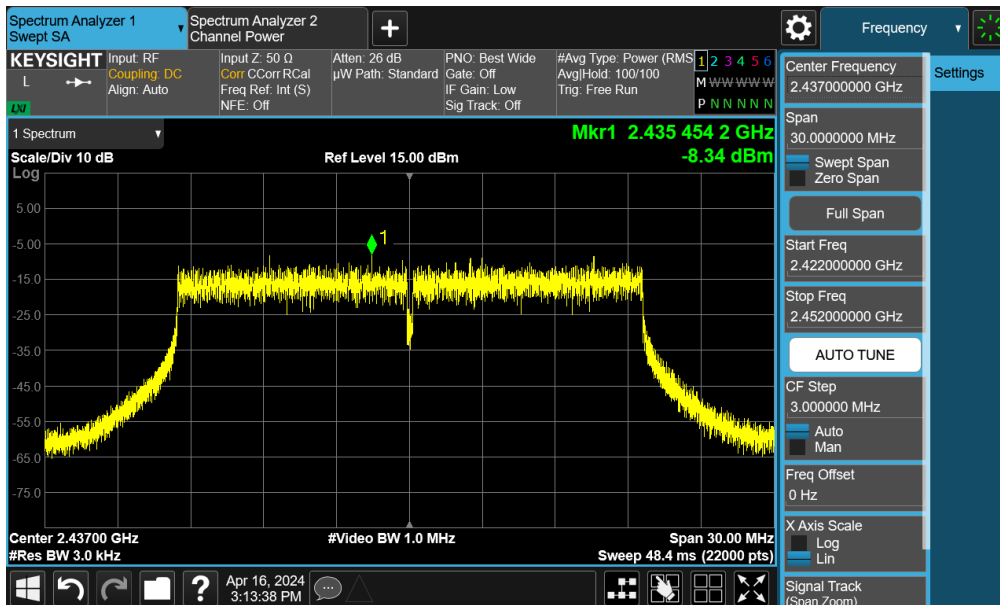

Plot 7-36. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 42 of 104

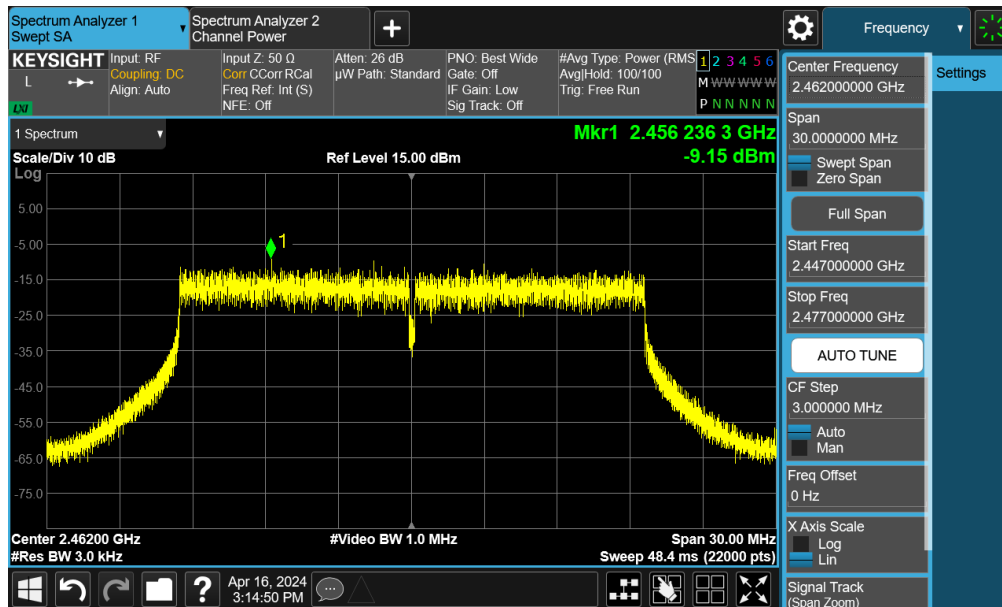

Plot 7-37. Power Spectral Density Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 11)

Note:

Per ANSI C63.10-2013 Section 14.3.1, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -7.04 dBm for Antenna 1 and -9.14 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-2.56 \text{ dBm} + (-2.79) \text{ dBm}) = (0.55 \text{ mW} + 0.53 \text{ mW}) = 1.08 \text{ mW} = 0.34 \text{ dBm}$$

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 43 of 104

7.5 Conducted Band Edge Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS0 in 802.11be mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 44 of 104


7.5.1 SISO Antenna-2 Conducted Band Edge Emissions

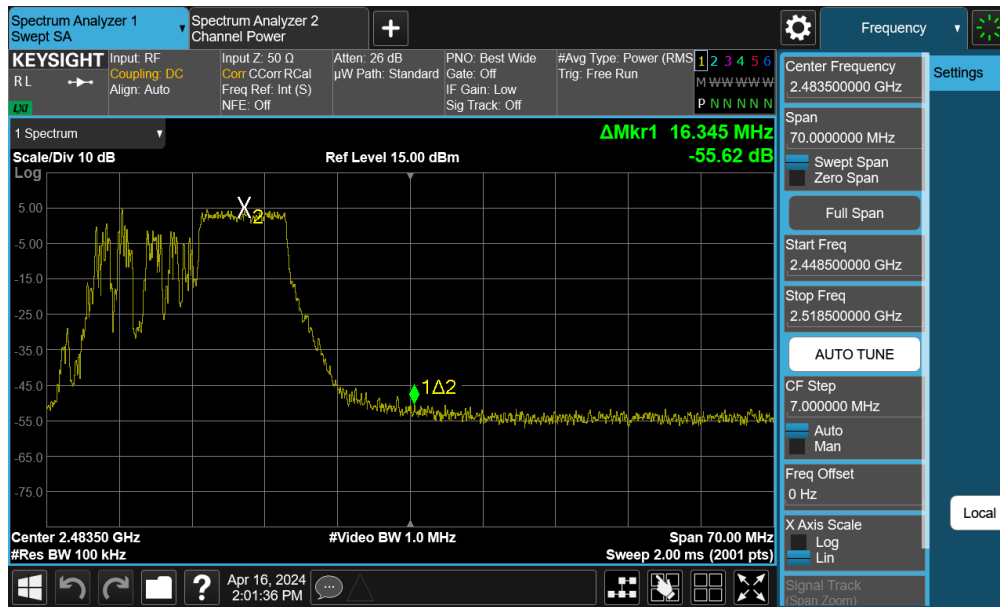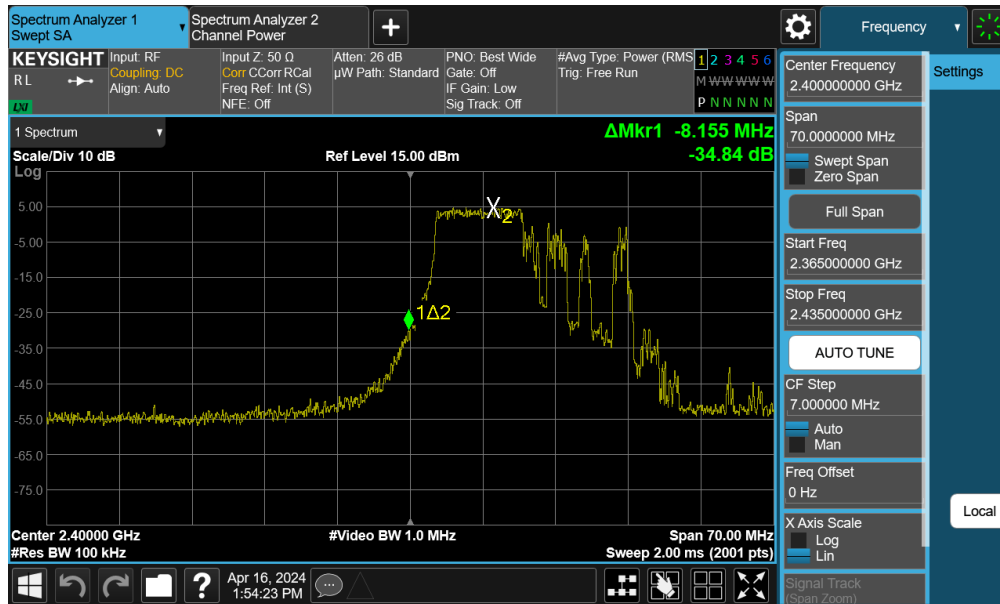

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 45 of 104

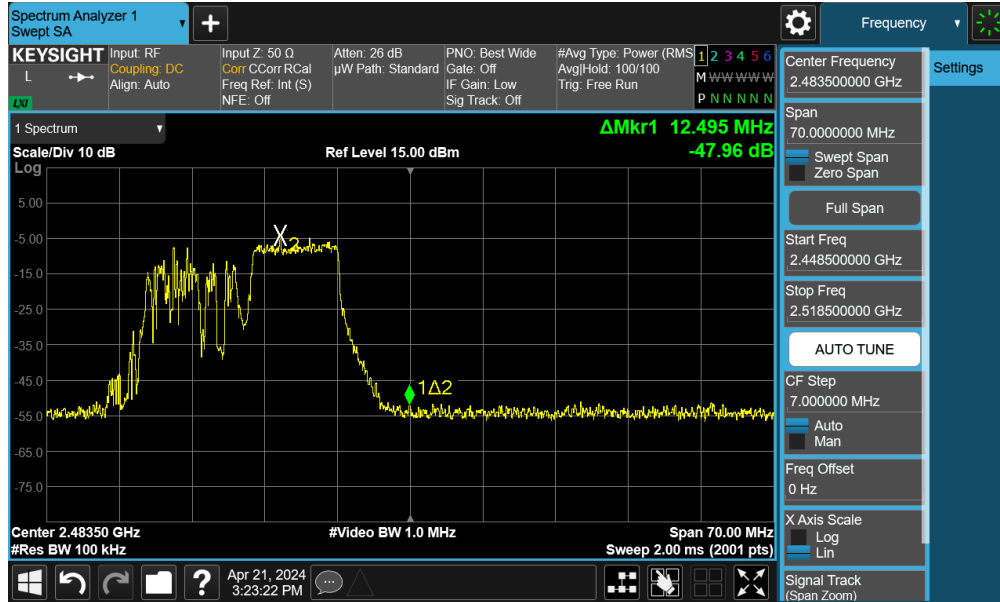


Plot 7-40. Band Edge Plot SISO ANT2 (802.11be OFDMA – 106 Tones – Ch. 12)

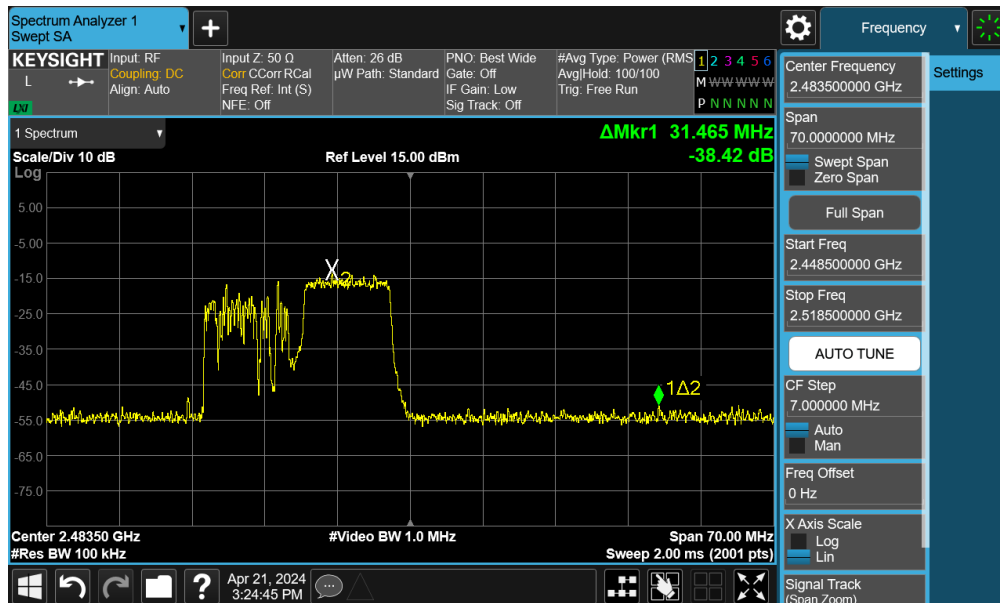


Plot 7-41. Band Edge Plot SISO ANT2 (802.11be OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 46 of 104

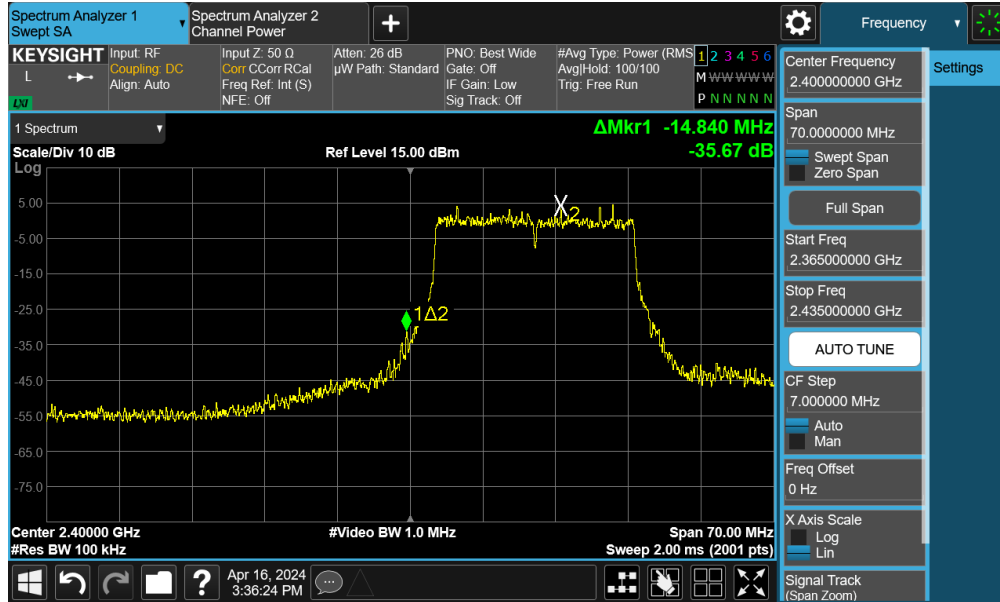


Plot 7-42. Band Edge Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 1)

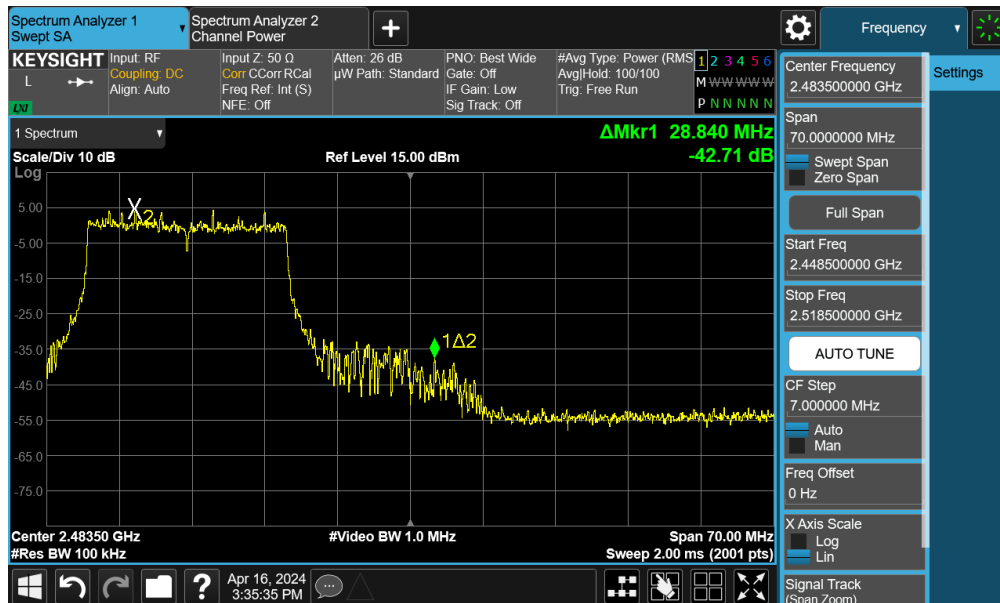


Plot 7-43. Band Edge Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 47 of 104

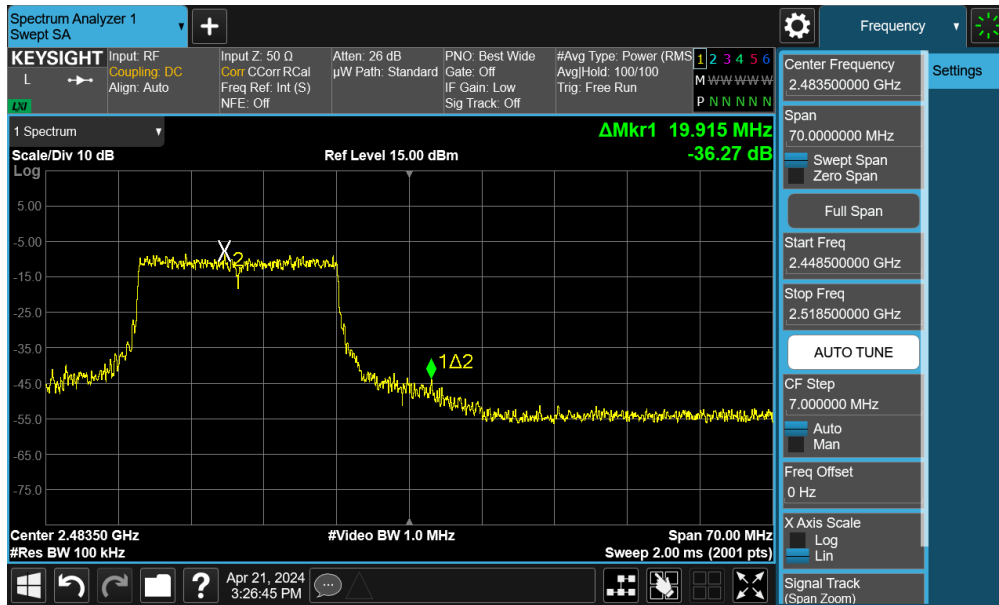



Plot 7-44. Band Edge Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 12)

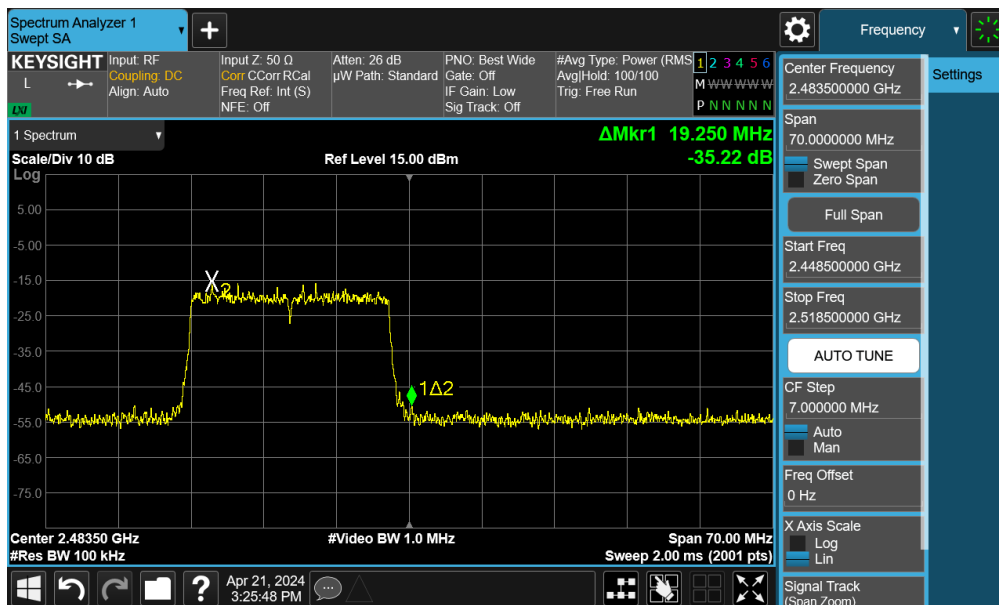


Plot 7-45. Band Edge Plot SISO ANT2 (802.11be OFDMA – 242 Tones – Ch. 13)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 48 of 104


7.5.2 MIMO Antenna-1 Conducted Band Edge Emissions

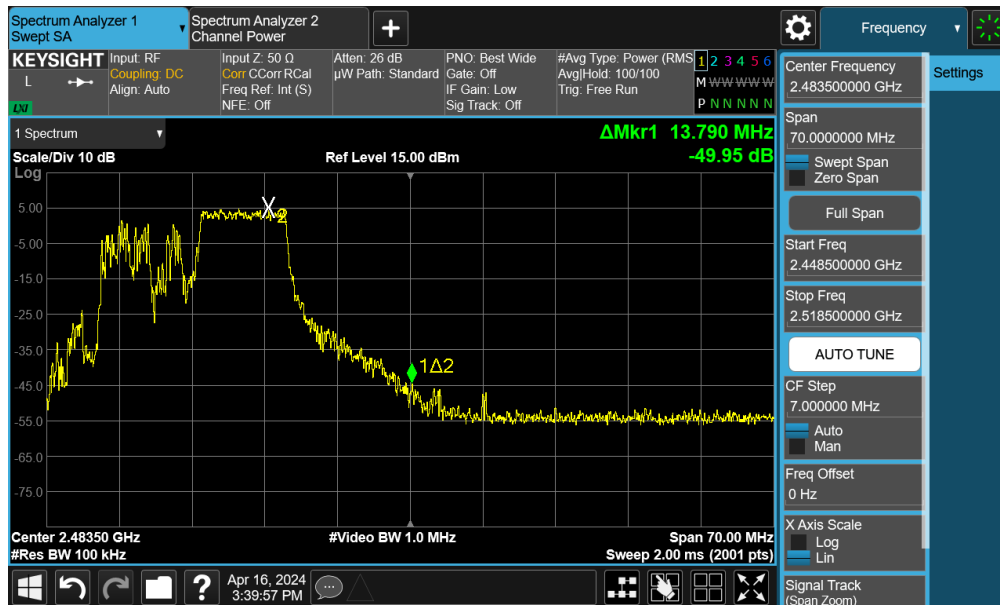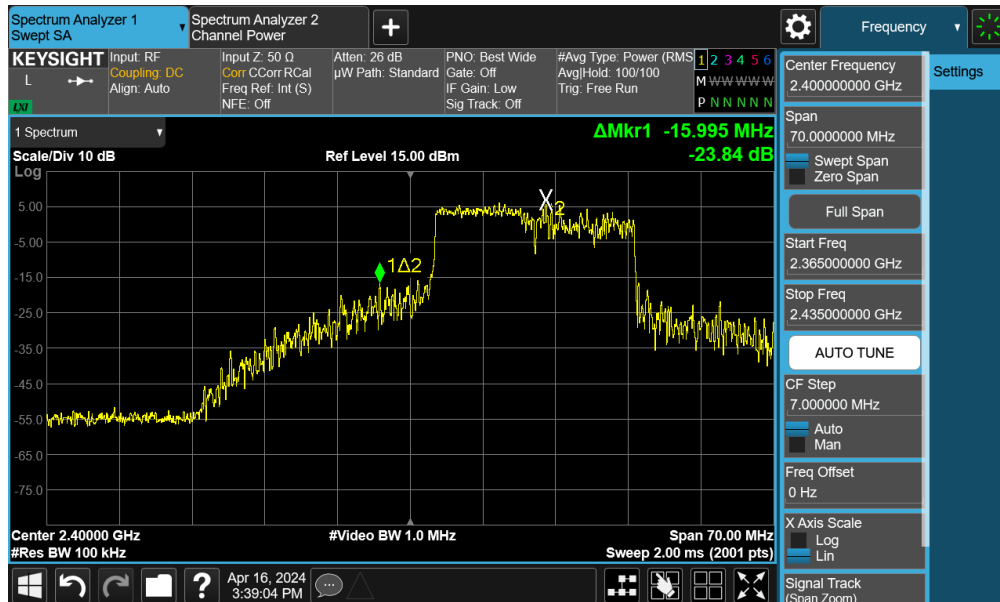

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 49 of 104

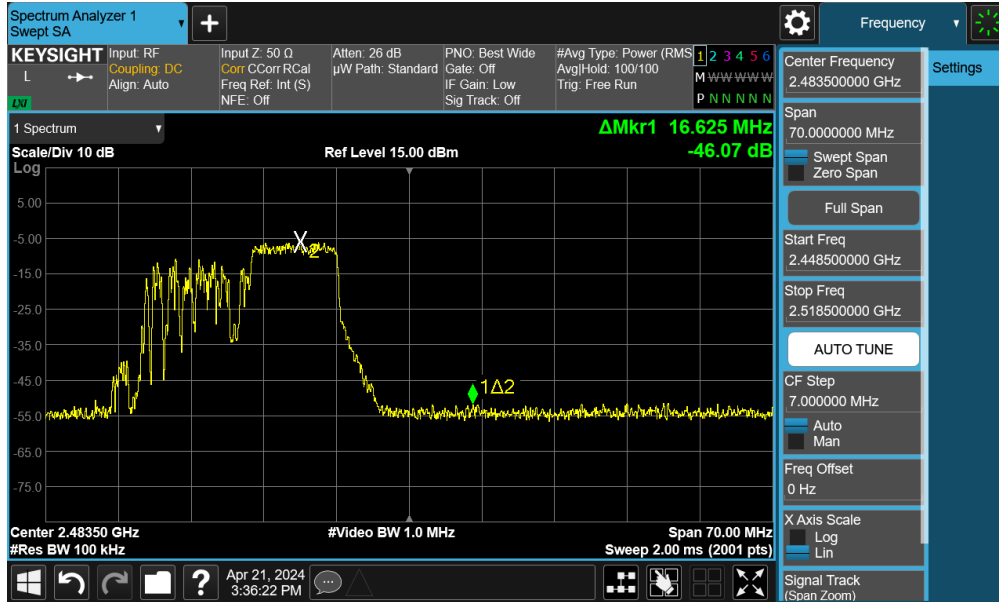

Plot 7-48. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106 Tones – Ch. 12)

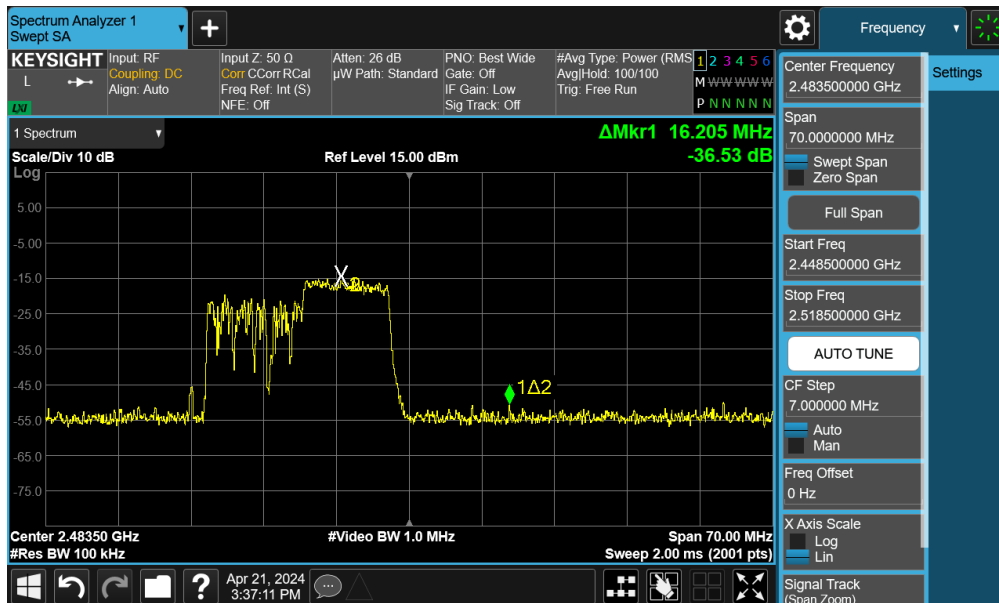

Plot 7-49. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LNP960XMA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401250007-04-R1.A3L	Test Dates: 03/26/2024 – 04/24/2024	EUT Type: Portable Computing Device	Page 50 of 104