



## TEST REPORT

### PART 22 & 27 MEASUREMENT REPORT

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do, 16677, Korea

**Date of Testing:**  
 07/16/2024 - 09/25/2024  
**Test Site/Location:**  
 Element Lab., Suwon,  
 Yongin-si, Gyeonggi-do, Korea  
**Test Report Serial No.:**  
 8K24083001-00.A3L

<b>FCC ID:</b>	<b>A3LRF4461D-13A</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

**Application Type:** Class II Permissive Change  
**Model:** RF4461d-13A  
**EUT Type:** RRU(RF4461d)  
**FCC Classification:** Licensed Non-Broadcast Station Transmitter  
**FCC Rule Part(s):** 22 & 27  
**Test Procedure(s):** ANSI C63.26-2015, KDB 971168 D01 v03r01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Prepared by Jonathan Jang  
 Test Engineer






Reviewed by Jayden Kwak  
 Technical Manager

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 1 of 82	

## TABLE OF CONTENTS


1.0	REVISION RECORD .....	4
2.0	INTRODUCTION .....	5
2.1	Scope .....	5
2.2	Element Test Location.....	5
2.3	Test Facility / Accreditation .....	5
3.0	PRODUCT INFORMATION.....	6
3.1	Equipment Description .....	6
3.2	Device Capabilities.....	6
3.3	Test Configuration .....	7
3.4	EMI Suppression Device(s)/Modifications .....	7
4.0	DESCRIPTION OF TESTS .....	8
4.1	Measurement Procedure.....	8
4.2	Radiated Emissions.....	9
4.3	Measurement Software .....	9
4.4	Environmental Conditions .....	9
5.0	MEASUREMENT UNCERTAINTY .....	10
6.0	TEST EQUIPMENT CALIBRATION DATA .....	11
7.0	SAMPLE CALCULATIONS .....	12
8.0	TEST RESULTS .....	13
8.1	Summary .....	13
8.2	Occupied Bandwidth .....	14
8.3	Equivalent Radiated Power .....	19
8.4	Peak To Average Ratio .....	28
8.5	Band Edge Emissions at Antenna Terminal .....	32
8.6	Spurious and Harmonic Emissions at Antenna Terminal .....	40
8.7	Radiated spurious emission .....	61
9.0	CONCLUSION.....	77
10.0	APPENDIX. A .....	78
10.1	Conducted Average Output Power.....	78

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 2 of 82	





## MEASUREMENT REPORT

### FCC Part 22 & 27





Mode	FCC Rule Part	Tx Frequency (MHz)	Total Power		Emission Designator	Modulation
			Max. Power (dBm)	Max. Power (W)		
n13_1C_5M	27	746 – 756	48.95	78.58	4M48G7D	QPSK
			49.02	79.73	4M48W7D	QAM
n13_1C_10M			51.98	157.79	9M30G7D	QPSK
			52.04	160.07	9M31W7D	QAM
n13_2C_5M+5M			51.97	157.24	9M44G7D	QPSK
			51.96	156.97	9M46W7D	QAM
B5_1C_5M	22	869 - 894	52.40	173.79	4M49G7D	QPSK
			52.48	177.14	4M51W7D	QAM
n5_1C_5M			52.49	177.52	4M48G7D	QPSK
			52.49	177.42	4M49W7D	QAM
n5_3C_5M+5M+5M			52.19	165.62	14M4G7D	QPSK
			52.26	168.33	14M4W7D	QAM

#### EUT Overview

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 3 of 82

## 1.0 REVISION RECORD

Issue Number	Issued Date	Revision History
8K24083001-00.A3L	09/27/2024	Initial Issue

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 4 of 82

## 2.0 INTRODUCTION

### 2.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



### 2.2 Element Test Location

These measurement tests were conducted at the Element Materials Technology Suwon. Ltd. facility located at (P143) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do 16954, Korea.

### 2.3 Test Facility / Accreditation

Measurements were performed at Element Materials Technology Suwon Lab located in Yongin-si, Gyeonggi, Korea.

- Element Materials Technology Suwon is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
  - Designation Number / CABID: KR0169
  - Test Firm Registration Number of FCC: 417945
  - Test Firm Registration Number of IC: 26168

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 5 of 82

## 3.0 PRODUCT INFORMATION



### 3.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung RRU(RF4461d) FCC ID: A3LRF4461D-13A**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22 and Part 27.

### 3.2 Device Capabilities

This device supports the following conditional features and filter information declared by the manufacture.

EUT Type	RRU (RF4461d)		
Model Name	RF4461d-13A		
Test Device Serial No	S619403855		
Device Capabilities:	LTE, NR, DSS, NB-IoT Guard Band/In-Band		
Operating Band/Frequency Range:	Band	Tx (Downlink)	Rx (Uplink)
	B13/n13:	746 MHz to 756 MHz	777 MHz to 787 MHz
	B5/n5:	869 MHz to 894 MHz	824 MHz to 849 MHz
Supported Modulation	LTE, NR, DSS: QPSK, 16QAM, 64QAM, 256QAM NB-IoT: QPSK(N-TM)		
LTE B13/NR n13 Supported Number of Carriers and Channel Bandwidth	5/10 MHz for LTE B13/NR n13 with up to 2CC aggregation of Max. Bandwidth 10 MHz and 200 kHz for NB-IoT Guard Band/In-Band		
LTE B5/NR n5 Supported Number of Carriers and Channel Bandwidth	5/10/15/20/25 MHz for LTE B5/NR n5 with up to 3CC aggregation of Max. Bandwidth 25 MHz 10MHz bandwidth for DSS n5(B5) with up to 2CC aggregated of Max. Bandwidth 20 MHz		
Multi-Band operation Supported Number of Carriers and Channel Bandwidth	5/10 MHz for LTE B13/NR n13 with NB-IoT Guard Band/In Band and 5/10/15/20/25 MHz for LTE B5/NR n5 with up to 5CC aggregation of Max 35 MHz		
Maximum Output Power	B13/n13	2TRx: Max. 60W/Path, 120W/Unit 4TRx: Max. 40W/Path, 160W/Unit	
	B5/n5	2TRx: Max. 60W/Path, 120W/Unit 4TRx: Max. 40W/Path, 160W/Unit	
	B13/n13 & B5/n5 Multi-Band	2TRx: Max. 120W/Path, 240W/Unit 4TRx: Max. 80W/Path, 320W/Unit	
Number of Antenna ports	2TRx, 4TRx Configuration		
Supported Configurations	Single carrier, Multi-carrier, multi-band operation		
Input Voltage:	-48 VDC		
Maximum antenna gain	Antenna is not provided by manufacture		

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 6 of 82	

### 3.3 Test Configuration

The setup is as follows:

- a) The EUT (“RRU(RF4461d)”) and a Data Unit (DU) are each powered by -48V DC power supply.
- b) The DU is connected to a test laptop via an ethernet cable acting as backhaul.
- c) DU connects to the EUT through a fiber optic cable.
- d) An RF cable connects the signal analyzer and the EUT Ports for respective measurement.

The EUT was tested per the guidance of ANSI C63.26-2015 and KDB 971168 D01 v03r01. See Section 8.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

Distribution unit (DU) which were used in test, that authorized under the SDoC procedure.

The following information is about configurations of carrier frequency and output power per port declared by the manufacturer.

\* Abbreviations:

- 1C: Single carrier operation
- 2C: Contiguous 2 carriers in multi-carrier operation
- 3C: Contiguous 3 carriers in multi-carrier operation
- 3NC: Non-contiguous 3 carriers in multi-carrier operation



Configuration	No. of Carriers	Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)			4Tx Rated Power (W per Unit)
			Lowest	Middle	Highest	
n13_1C_5M	1	5	748.5	751.0	753.5	80
n13_1C_10M	1	10	-	751.0	-	160
n13_2C_5M+5M	2	10	-	751.0	-	160
B5_1C_5M	1	5	871.5	881.5	891.5	160
n5_1C_5M	1	5	871.5	881.5	891.5	160
n5_3C_5M+5M+5M	3	15	876.5	881.5	886.5	160
n5_3NC_5M+5M+5M			871.5	881.5	891.5	
Multi band operation n13_1C_10M + n5_3NC_5M+5M+5M	4	25	751.0			160
			871.5	881.5	891.5	160

#### Notes:

1. To add NR Radio Access Technology on n13 and NR Multi-carrier operational up to 3CC on n5 and LTE, NR 5MHz Bandwidth carrier up to 40W on B5/n5 as described in this Class II Permissive Change test report.

### 3.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 7 of 82

## 4.0 DESCRIPTION OF TESTS

### 4.1 Measurement Procedure

The measurement procedures described in the document titled “American National Standard for Compliance Testing of Transmitter Used in Licensed Radio Service” (ANSI C63.26-2015) and the guidance provided in KDB 842590 D01 v01r01 were used in the measurement of the EUT.

Occupied Bandwidth:

KDB 971168 D01 v03r01 – Section 4.3  
ANSI C63.26-2015 – Section 5.4.4

Conducted Power Measurement and EIRP and PSD

KDB 971168 D01 v03r01 – Section 5.3  
KDB 971168 D01 v03r01 – Section 5.4  
KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements  
ANSI C63.26-2015 – Section 5.2.5  
ANSI C63.26-2015 – Section 5.2.4

Peak-to-Average Power Ratio:

KDB 971168 D01 v03r01 – Section 5.7  
ANSI C63.26-2015 – Section 5.2.3.4

Channel Edge Emissions at Antenna Terminal

KDB 971168 D01 v03r01 – Section 6  
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements  
a) Absolute Emission Limits  
iii) Measure and add  $10 \log(N_{ANT})$  dB  
ANSI C63.26-2015 – Section 5.7

Spurious and Harmonic Emissions at Antenna Terminal



KDB 971168 D01 v03r01 – Section 6  
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements  
a) Absolute Emission Limits  
iii) Measure and add  $10 \log(N_{ANT})$  dB  
ANSI C63.26-2015 – Section 5.7

Radiated unwanted emission

KDB 971168 D01 v03r01 – Section 7  
ANSI C63.26-2015 – Section 5.8

Frequency Stability / Temperature Variation

KDB 971168 D01 v03r01 – Section 9  
ANSI C63.26-2015 – Section 5.6

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 8 of 82	



## 4.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi- anechoic chamber which is shielded from any ambient interference.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. For frequencies above 1GHz, linearly polarized Vivaldi antennas were used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.



Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and Vivaldi antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the polarity of the receive antenna to produce the worst-case emissions

## 4.3 Measurement Software

Test item	Name	Version
Conducted Measurement	Node B automation	1.0

## 4.4 Environmental Conditions



The temperature is controlled within the range of 15°C to 35°C. The relative humidity is controlled within the range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 9 of 82	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (<18GHz)	4.82
Radiated Disturbance (<40GHz)	4.96

FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 10 of 82	

## 6.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacture	Model	Description	Cal Date	Cal interval	Cal Due	Serial Number
Rohde & Schwarz	FSW43	Signal Analyzer	04/08/2024	Annual	04/07/2025	101250
AC POWER KOREA	ACPD-60150	DC Power Supply	01/10/2024	Annual	01/09/2025	DC-1
SUKSAN TECHNOLOGY	SE-CT-10	Temperature Chamber	07/08/2024	Annual	07/07/2025	191021
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	01/11/2024	Annual	01/10/2025	102131
Rohde & Schwarz	VULB9162	Broadband TRILOG Antenna	06/01/2023	Biennial	05/31/2025	9162-217
Sunol sciences	DRH-118	Horn Antenna	07/13/2023	Biennial	07/12/2025	A102416-1
K&L MICROWAVE	13SH10-1000/U1000-N/N	High Pass Filter	07/10/2024	Annual	07/09/2025	3
REACHLINE	250W18NN-40	ATTENUATOR	10/12/2023	Annual	10/11/2024	PK00413
REACHLINE	250W18NN-40	ATTENUATOR	10/12/2023	Annual	10/11/2024	PK00415
REACHLINE	250W18NN-40	ATTENUATOR	10/12/2023	Annual	10/11/2024	PK00416
REACHLINE	250W18NN-40	ATTENUATOR	10/12/2023	Annual	10/11/2024	PK00420

**Table 6-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. All testing was performed before the calibration due date.

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 11 of 82	

## 7.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 4M48G7D**

Occupied Bandwidth = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation



**Emission Designator = 4M48W7D**

Occupied Bandwidth = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 12 of 82

## 8.0 TEST RESULTS

### 8.1 Summary



Company Name: SAMSUNG Electronics Co., Ltd.  
 FCC ID: A3LRF4461D-13A  
 FCC Classification: Licensed Non-Broadcast Station Transmitter  
 Mode(s): LTE, NR

FCC Part Section(s)	Test Description	Limit	Test Condition	Test Result	Reference
§ 2.1046	Conducted Average Output Power	N/A	CONDUCTED	PASS	Annex 1
§ 2.1049	Occupied Bandwidth	N/A		PASS	Section 8.2
§ 2.1046, §22.913(a) § 27.50(b)	Equivalent Radiated Power	≤ 1000W/MHz ERP		PASS	Section 8.3 (Note 4)
§22.913 § 2.1046,	Peak-to-average ratio	≤ 13 dB		PASS	Section 8.4
§2.1051 §22.917 §27.53(c), (f)	Band Edge Emissions at Antenna Terminal	< 43 + log <sub>10</sub> (P[Watts]) at Band Edge and all out-of-band emissions		PASS	Section 8.5
	Spurious and Harmonic Emissions at Antenna Terminal			PASS	Section 8.6
§ 2.1055 § 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block	PASS	(Note 5)	
§2.1053 §22.917 §27.53(c)	Radiated unwanted emission	< 43 + log <sub>10</sub> (P[Watts]) at Band Edge and all out-of-band emissions	RADIATED	PASS	Section 8.8

**Table 8-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) The maximum antenna gain and Limit are determined at the time of licensing depending on the geographical Location of the base station.
- 5) This is a variant report for carrier configuration added by software without hardware change. The test item does not affect those operation. And it was performed in the original report.

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 13 of 82	

## 8.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 4.3

ANSI C63.26-2015 – Section 5.4.4


### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-1. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 14 of 82	

Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	4.47	<b>4.48</b>	4.47	4.47
	1	4.47	4.48	4.47	4.46
	2	4.46	4.47	4.47	4.46
	3	4.45	4.47	4.48	4.47
Mid	0	4.46	4.47	4.46	4.46
	1	4.47	4.47	4.47	4.48
	2	4.46	4.48	4.47	4.47
	3	4.47	4.47	4.47	4.47
High	0	4.47	4.48	4.47	4.46
	1	<b>4.48</b>	4.47	4.47	4.47
	2	4.46	4.48	4.47	4.47
	3	4.47	4.48	4.46	4.47



**Table 8-2. Occupied Bandwidth Summary Data (n13\_1C\_5M)**

Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Mid	0	9.28	9.23	9.29	9.28
	1	9.28	9.22	<b>9.31</b>	9.28
	2	9.28	9.22	9.29	9.28
	3	<b>9.30</b>	9.22	9.29	9.27

**Table 8-3. Occupied Bandwidth Summary Data (n13\_1C\_10M)**

Channel	Port	OBW (MHz)	
		QPSK	16QAM
Mid	0	<b>9.44</b>	9.45
	1	9.42	9.44
	2	9.42	9.44
	3	9.42	<b>9.46</b>

**Table 8-4. Occupied Bandwidth Summary Data (n13\_2C\_5M+5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 15 of 82	

Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	4.48	4.49	<b>4.51</b>	4.48
	1	4.47	4.48	4.50	4.48
	2	4.47	4.47	4.47	4.49
	3	4.48	4.48	4.48	4.48
Mid	0	4.48	4.47	4.48	4.49
	1	<b>4.49</b>	4.46	4.49	4.49
	2	4.48	4.47	4.48	4.48
	3	4.48	4.47	4.47	4.48
High	0	4.48	4.47	4.47	4.48
	1	4.47	4.48	4.50	4.49
	2	4.47	4.47	4.48	4.48
	3	4.47	4.49	4.48	4.47



**Table 8-5. Occupied Bandwidth Summary Data (B5\_1C\_5M)**

Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	<b>4.48</b>	4.48	4.47	4.47
	1	4.46	4.47	4.47	4.47
	2	4.47	4.48	4.46	4.49
	3	4.47	4.47	4.48	4.48
Mid	0	4.48	4.48	4.46	4.48
	1	4.48	4.48	4.47	4.48
	2	4.48	4.47	4.47	4.46
	3	4.47	4.48	4.48	4.47
High	0	4.45	4.48	4.46	4.46
	1	4.47	4.47	4.47	4.48
	2	4.48	4.46	4.47	4.47
	3	4.46	<b>4.49</b>	4.47	4.47


**Table 8-6. Occupied Bandwidth Summary Data (n5\_1C\_5M)**

Channel	Port	OBW (MHz)	
		QPSK	16QAM
Low	0	14.37	14.39
	1	14.39	14.38
	2	<b>14.40</b>	14.38
	3	14.38	14.39
Mid	0	14.36	<b>14.42</b>
	1	14.40	14.38
	2	14.38	14.40
	3	14.39	14.40
High	0	14.37	14.35
	1	14.37	14.37
	2	14.37	14.36
	3	14.37	14.36

**Table 8-7. Occupied Bandwidth Summary Data (n5\_3C\_5M+5M+5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 16 of 82	



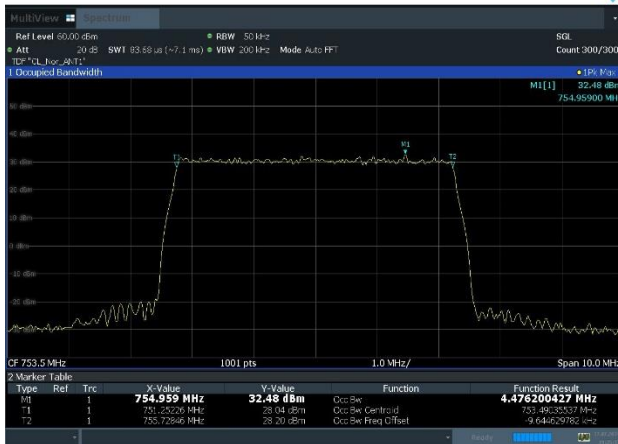


Plot 8-1. Occupied Bandwidth Plot  
(n13\_1C\_5M\_QPSK - High Channel, Port 1)



Plot 8-2. Occupied Bandwidth Plot  
(n13\_1C\_5M\_16QAM - Low Channel, Port 0)




Plot 8-3. Occupied Bandwidth Plot  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 3)

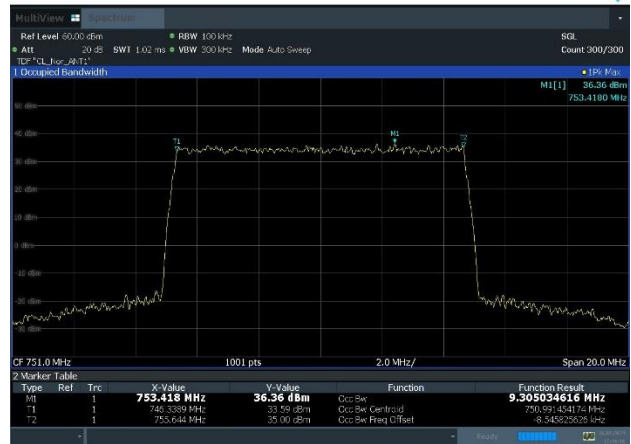

Plot 8-4. Occupied Bandwidth Plot  
(n13\_1C\_10M\_64QAM - Mid Channel, Port 1)



Plot 8-5. Occupied Bandwidth Plot  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 0)

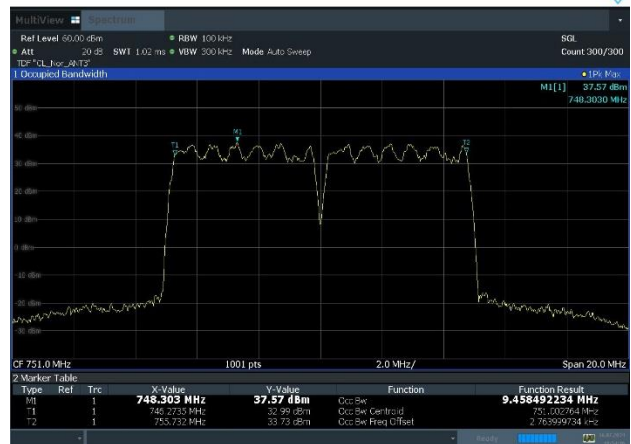

Plot 8-6. Occupied Bandwidth Plot  
(n13\_2C\_5M+5M\_16QAM - Mid Channel, Port 3)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 17 of 82



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 18 of 82

### 8.3 Equivalent Radiated Power

#### Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Description


KDB 971168 D01 v03r01 – Section 5  
 KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements  
 ANSI C63.26-2015 – Section 5.2.4.4.1

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:



1. Conducted power measurements are performed using the signal analyzer’s “SA” measurement capability for signals with continuous operation.
2. Set span to 2 × to 3 × the OBW.
3. Set RBW = 1 MHz (the reference bandwidth)
4. Set VBW ≥ 3 × RBW.
5. Set number of measurement points in sweep ≥ 2 × span / RBW.
6. Sweep time:
  - a) Set ≥ auto-couple, and enable trace averaging, or
  - b) Set ≥ [10 × (number of points in sweep) × (transmission symbol period)] and enable a single sweep (automation-compatible) measurement. The sweep time should never be faster than the auto-coupled sweep time.
7. Detector = power averaging (rms).
8. The trace was allowed to stabilize
9. Use the peak marker function to determine the maximum amplitude level. (=P<sub>Meas</sub>)
10. The relevant equation for determining the maximum EIRP from the measured RF output power is given in Equation as follows:  

$$\text{EIRP} = P_{\text{Meas}} + G_T$$
 where  
 G<sub>T</sub>: gain of the transmitting antenna, in dBi (EIRP).

#### Test Setup



**Figure 8-2. Test Instrument & Measurement Setup**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 19 of 82	

**Limit**

**Band(n) 5 operation under Part 22**

§ 22.913(a) (3)

Must not exceed an effective radiated power (ERP) of 1000 watts/MHz

**Band(n) 13 operation under Part 27**

§ 27.50(b) (2)



Fixed and base stations transmitting a signal in the 746-757 MHz and 776-787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz

Note: The maximum antenna gain and ERP limit are determined at the time of licensing depending on the geographical location of the base station. For limit, an estimated calculate maximum permissible ERP reported.

**Test Notes**

1. For test results, an estimated calculated maximum permissible EIRP reported. And the required reduction measurements will be performed when after the installation.
2. Consider the following factors for MIMO:  
The output power per each port is measured as dBm/MHz or dBm, the output powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01 - Section E) 2).
3. The output power per port (dBm/MHz or dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO Conducted Power (mW). We convert this back to logarithmic scale for further output power calculations.
4. Sample Calculation:  
Let us assume the following numbers:
  - a) Total MIMO Conducted Power as 21200.18 milliWatts
  - b)

	Factors	Value	Unit
Summed MIMO Conducted Power (linear sum)		21200.18	mW/
Summed MIMO Conducted Power (dBm)	= 10 * log (21200.18) =	43.26	dBm

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 20 of 82	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	37.30	<b>37.17</b>	36.96	37.01
	1	37.07	<b>37.23</b>	36.93	36.91
	2	37.14	<b>37.26</b>	37.12	37.19
	3	37.03	<b>37.31</b>	37.05	37.04
MIMO Conducted Power (mW/MHz)		20686.31	<b>21200.18</b>	20119.85	20226.76
MIMO Conducted Power (dBm/MHz)		43.16	<b>43.26</b>	43.04	43.06
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	36.88	37.07	36.77	36.92
	1	36.97	37.13	36.96	36.95
	2	37.03	37.26	36.99	37.01
	3	37.03	37.15	36.89	37.06
MIMO Conducted Power (mW/MHz)		19945.88	20766.56	19606.14	19979.92
MIMO Conducted Power (dBm/MHz)		43.00	43.17	42.92	43.01
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	37.04	37.13	36.97	37.13
	1	37.06	37.12	37.07	37.13
	2	37.10	37.33	37.09	37.23
	3	37.11	37.35	37.14	37.15
MIMO Conducted Power (mW/MHz)		20408.89	21156.50	20363.57	20800.78
MIMO Conducted Power (dBm/MHz)		43.10	43.25	43.09	43.18



**Table 8-8. Effective Radiated Power Table (n13\_1C\_5M)**

Middle Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	36.89	<b>37.75</b>	36.96	37.09
	1	36.89	<b>37.73</b>	37.04	36.93
	2	36.95	<b>37.89</b>	36.96	36.81
	3	36.94	<b>37.77</b>	37.00	37.07
MIMO Conducted Power (mW/MHz)		19670.66	<b>24021.76</b>	20001.97	19939.20
MIMO Conducted Power (dBm/MHz)		42.94	<b>43.81</b>	43.01	43.00

**Table 8-9. Effective Radiated Power Table (n13\_1C\_10M)**

Middle Channel	Port	QPSK	16QAM
Conducted Power (dBm/MHz)	0	37.03	<b>37.30</b>
	1	37.06	<b>37.19</b>
	2	37.09	<b>37.20</b>
	3	37.13	<b>37.28</b>
MIMO Conducted Power (mW/MHz)		20409.19	<b>21200.04</b>
MIMO Conducted Power (dBm/MHz)		43.10	<b>43.26</b>

**Table 8-10. Effective Radiated Power Table (n13\_2C\_5M+5M)**



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 21 of 82	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	40.54	<b>40.96</b>	40.51	40.63
	1	40.88	<b>41.34</b>	41.07	40.99
	2	40.39	<b>40.72</b>	40.37	40.39
	3	40.00	<b>40.31</b>	40.21	40.17
MIMO Conducted Power (mW/MHz)		44509.73	<b>48631.38</b>	45424.59	45460.19
MIMO Conducted Power (dBm/MHz)		46.48	<b>46.87</b>	46.57	46.58
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	40.58	40.79	40.58	40.43
	1	40.83	41.21	40.93	40.82
	2	40.30	40.62	40.37	40.30
	3	40.20	40.08	39.84	39.86
MIMO Conducted Power (mW/MHz)		44721.24	46928.40	44344.34	43516.90
MIMO Conducted Power (dBm/MHz)		46.51	46.71	46.47	46.39
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	40.56	40.71	40.87	40.66
	1	40.96	41.00	41.09	40.85
	2	40.24	40.28	40.38	40.28
	3	39.99	40.30	40.33	40.47
MIMO Conducted Power (mW/MHz)		44395.28	45746.47	46774.73	45612.03
MIMO Conducted Power (dBm/MHz)		46.47	46.60	46.70	46.59

**Table 8-11. Effective Radiated Power Table (B5\_1C\_5M)**



Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	40.43	40.67	40.31	40.19
	1	41.02	41.03	40.68	40.73
	2	40.28	40.65	40.25	40.19
	3	40.22	40.42	40.01	40.04
MIMO Conducted Power (mW/MHz)		44873.73	46974.49	43050.48	42817.35
MIMO Conducted Power (dBm/MHz)		46.52	46.72	46.34	46.32
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	40.82	40.55	40.43	40.62
	1	41.21	41.22	40.97	40.98
	2	40.67	40.68	40.49	40.49
	3	40.47	40.28	40.18	40.34
MIMO Conducted Power (mW/MHz)		48102.14	46954.48	45160.93	46074.66
MIMO Conducted Power (dBm/MHz)		46.82	46.72	46.55	46.63
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/MHz)	0	40.71	<b>40.94</b>	40.62	40.70
	1	40.93	<b>41.28</b>	41.07	41.06
	2	40.52	<b>40.67</b>	40.43	40.42
	3	40.35	<b>40.59</b>	40.41	40.43
MIMO Conducted Power (mW/MHz)		46275.27	<b>48967.40</b>	46359.19	46569.54
MIMO Conducted Power (dBm/MHz)		46.65	<b>46.90</b>	46.66	46.68


**Table 8-12. Effective Radiated Power Table (n5\_1C\_5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 22 of 82	


Low Channel	Port	QPSK	16QAM
Conducted Power (dBm/MHz)	0	35.37	35.22
	1	35.51	35.53
	2	35.57	35.53
	3	35.52	35.61
MIMO Conducted Power (mW/MHz)		14170.11	14111.20
MIMO Conducted Power (dBm/MHz)		41.51	41.50
Mid Channel	Port	QPSK	16QAM
Conducted Power (dBm/MHz)	0	35.52	35.49
	1	35.49	35.51
	2	35.56	35.64
	3	35.59	35.68
MIMO Conducted Power (mW/MHz)		14324.41	14458.94
MIMO Conducted Power (dBm/MHz)		41.56	41.60
High Channel	Port	QPSK	16QAM
Conducted Power (dBm/MHz)	0	<b>35.50</b>	35.31
	1	<b>35.50</b>	35.60
	2	<b>35.71</b>	35.56
	3	<b>35.80</b>	35.72
MIMO Conducted Power (mW/MHz)		<b>14622.08</b>	14357.03
MIMO Conducted Power (dBm/MHz)		<b>41.65</b>	41.57

**Table 8-13. Effective Radiated Power Table (n5\_3C\_5M+5M+5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 23 of 82

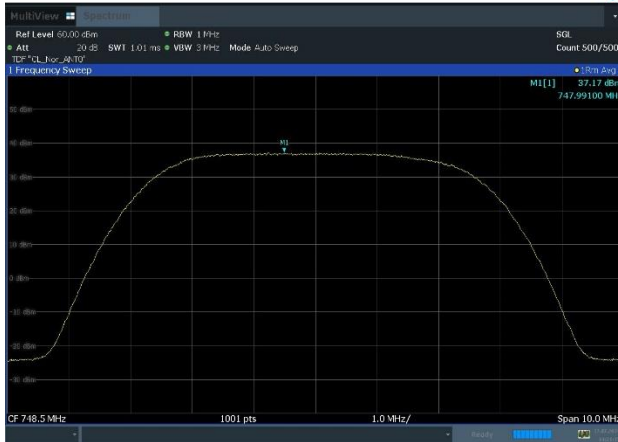

Plot 8-13. Equivalent Radiated Power Plot (n13\_1C\_5M\_16QAM - Low Channel, Port 0)

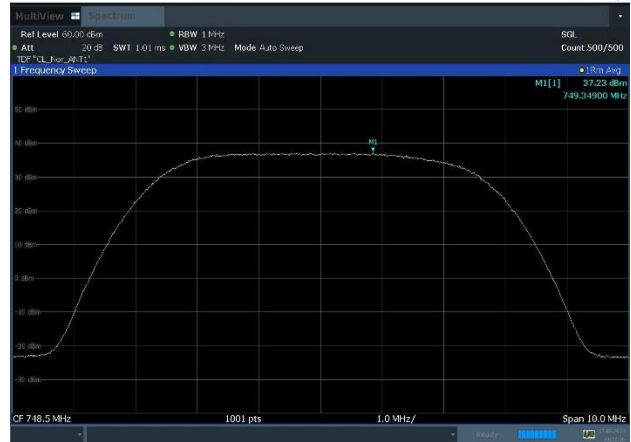


Plot 8-14. Equivalent Radiated Power Plot (n13\_1C\_5M\_16QAM - Low Channel, Port 1)




Plot 8-15. Equivalent Radiated Power Plot (n13\_1C\_5M\_16QAM - Low Channel, Port 2)



Plot 8-16. Equivalent Radiated Power Plot (n13\_1C\_5M\_16QAM - Low Channel, Port 3)

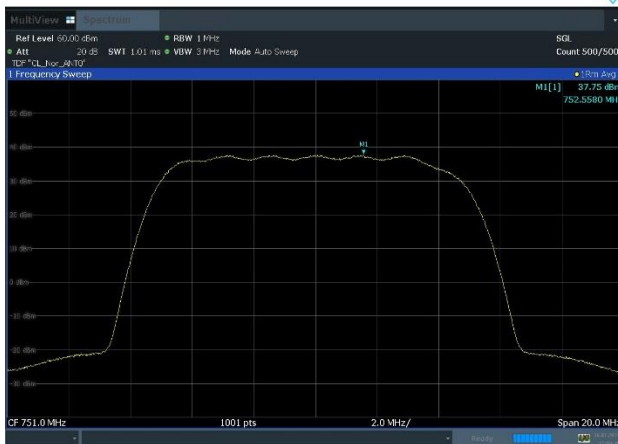


Plot 8-17. Equivalent Radiated Power Plot (n13\_1C\_10M\_16QAM - Mid Channel, Port 0)

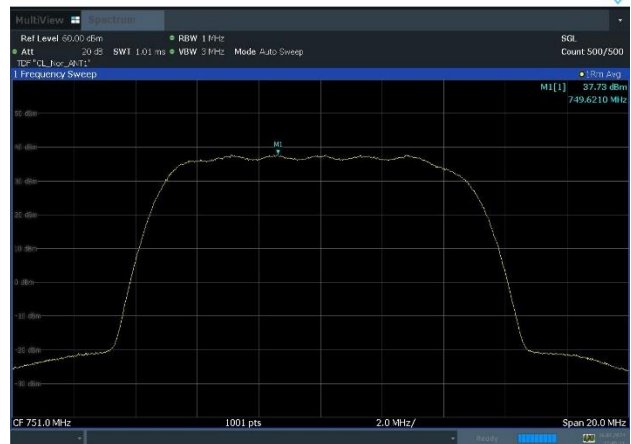


Plot 8-18. Equivalent Radiated Power Plot (n13\_1C\_10M\_16QAM - Mid Channel, Port 1)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 24 of 82	




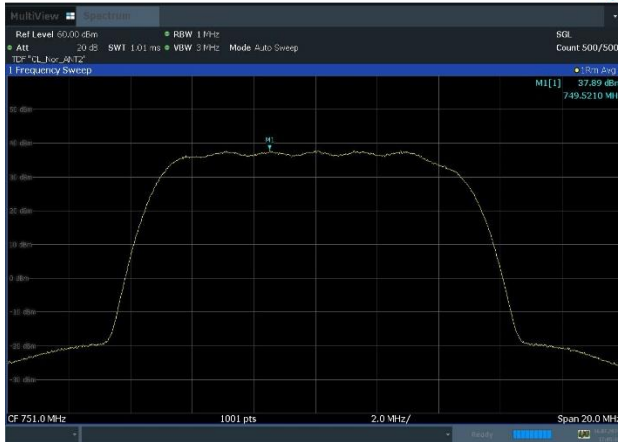


Plot 8-19. Equivalent Radiated Power Plot  
(n13\_1C\_10M\_16QAM – Mid Channel, Port 2)

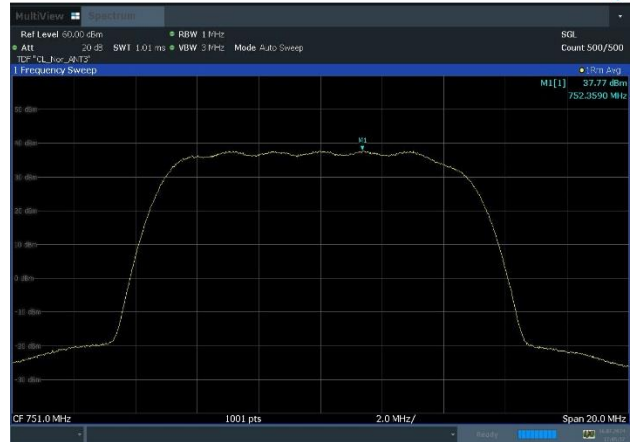


Plot 8-20. Equivalent Radiated Power Plot  
(n13\_1C\_10M\_16QAM – Mid Channel, Port 3)

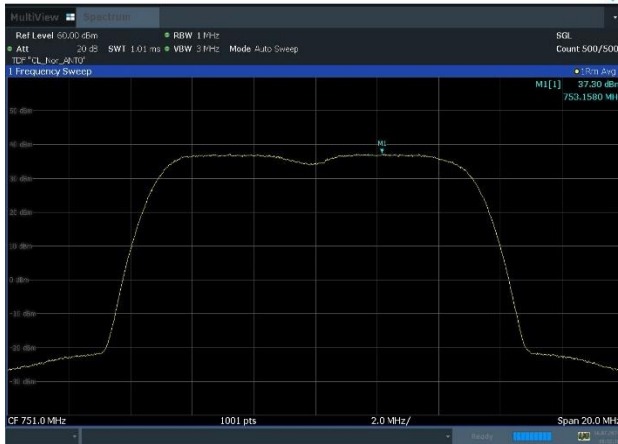


Plot 8-21. Equivalent Radiated Power Plot  
(n13\_2C\_5M+5M\_16QAM - Mid Channel, Port 0)

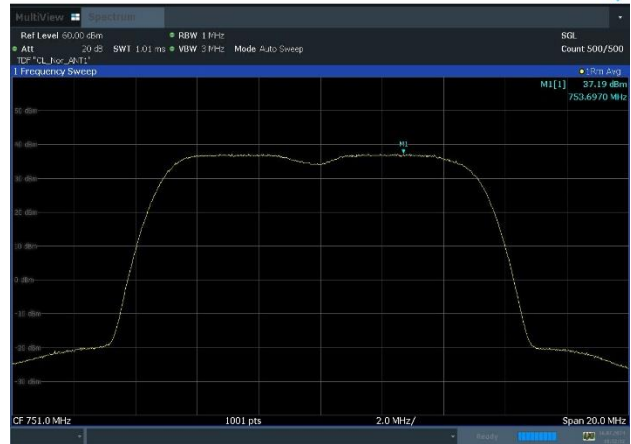

Plot 8-22. Equivalent Radiated Power Plot  
(n13\_2C\_5M+5M\_16QAM - Mid Channel, Port 1)

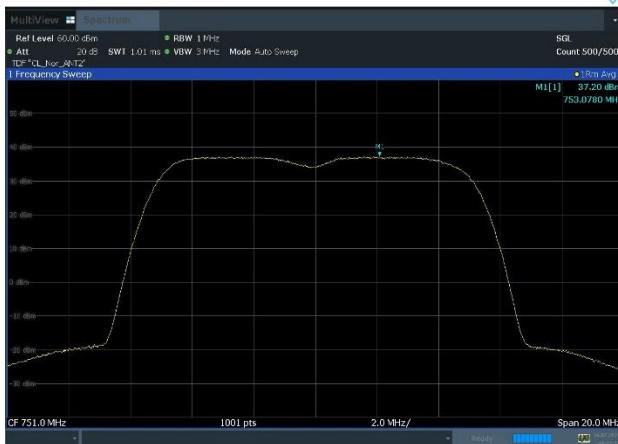

Plot 8-23. Equivalent Radiated Power Plot  
(n13\_2C\_5M+5M\_16QAM - Mid Channel, Port 2)

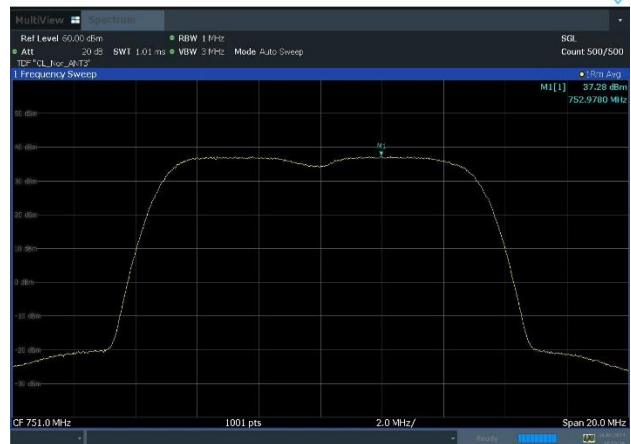


Plot 8-24. Equivalent Radiated Power Plot  
(n13\_2C\_5M+5M\_16QAM - Mid Channel, Port 3)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 25 of 82	




Plot 8-25. Equivalent Radiated Power Plot  
(B5\_1C\_5M\_16QAM - Low Channel, Port 0)

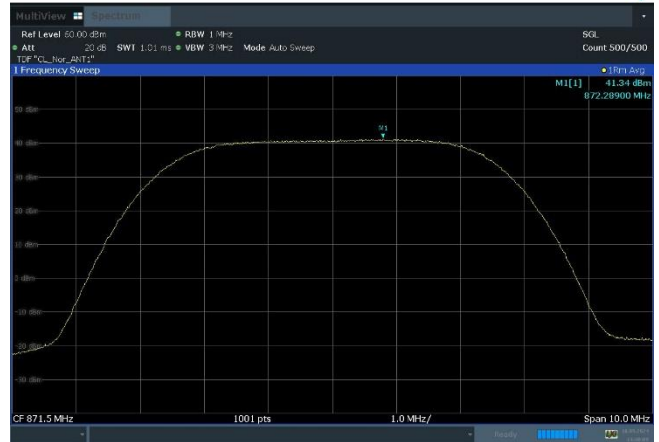


Plot 8-26. Equivalent Radiated Power Plot  
(B5\_1C\_5M\_16QAM - Low Channel, Port 1)




Plot 8-27. Equivalent Radiated Power Plot  
(B5\_1C\_5M\_16QAM - Low Channel, Port 2)

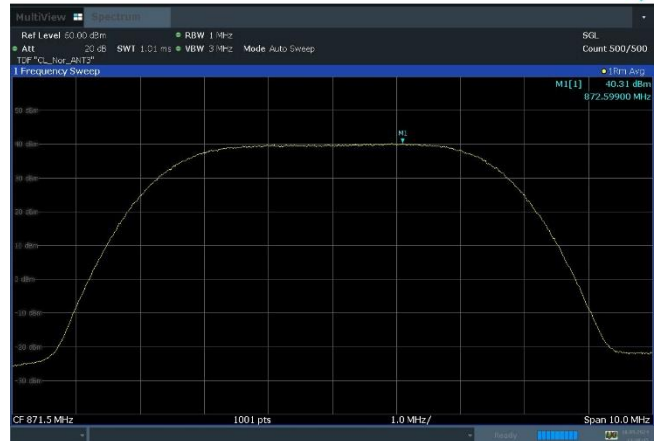

Plot 8-28. Equivalent Radiated Power Plot  
(B5\_1C\_5M\_16QAM - Low Channel, Port 3)

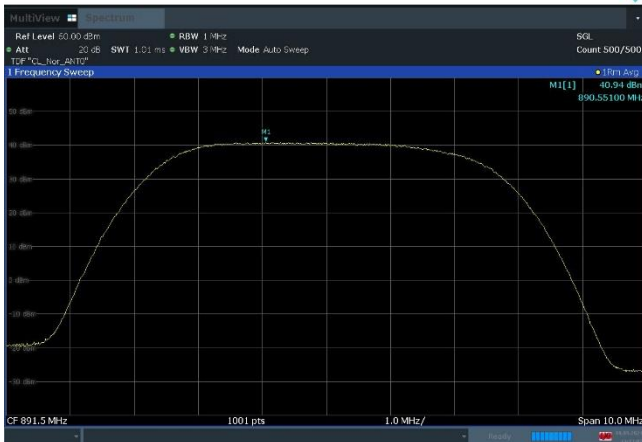


Plot 8-29. Equivalent Radiated Power Plot  
(n5\_1C\_5M\_16QAM - High Channel, Port 0)

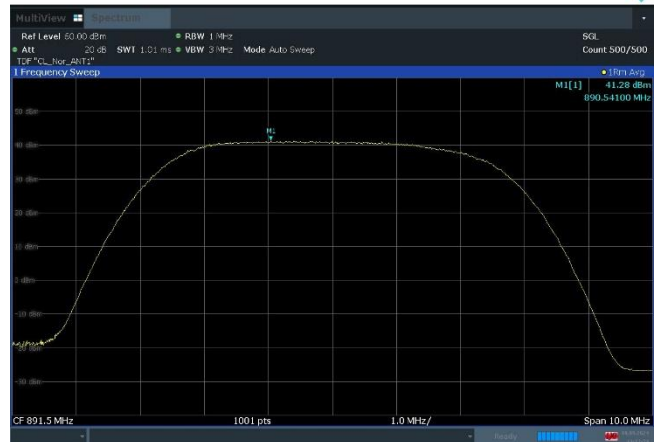


Plot 8-30. Equivalent Radiated Power Plot  
(n5\_1C\_5M\_16QAM - High Channel, Port 1)


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 26 of 82	

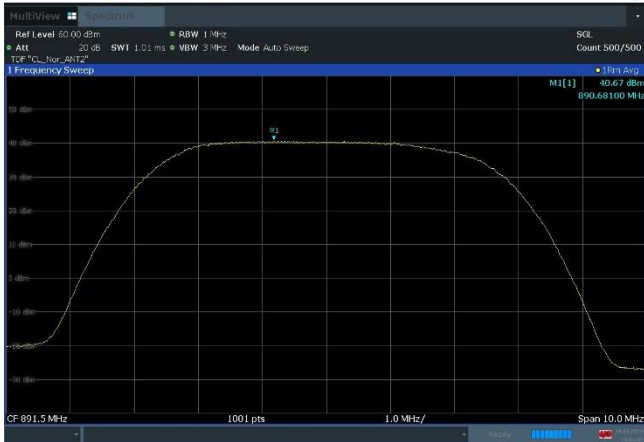


Plot 8-31. Equivalent Radiated Power Plot  
(n5\_1C\_5M\_16QAM - High Channel, Port 2)

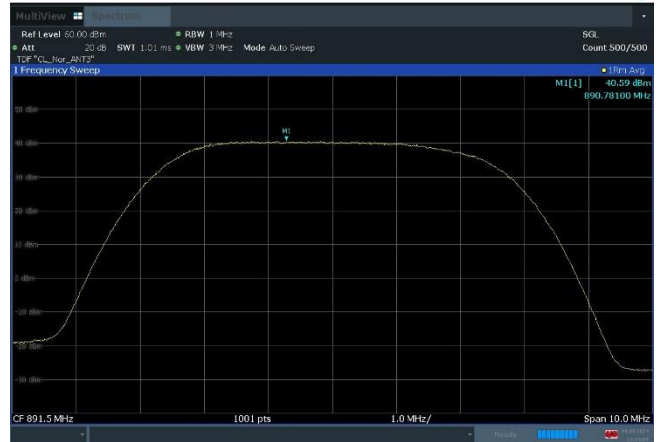


Plot 8-32. Equivalent Radiated Power Plot  
(n5\_1C\_5M\_16QAM - High Channel, Port 3)

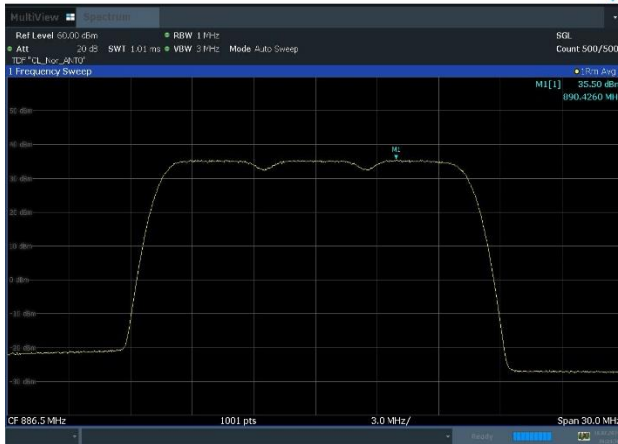


Plot 8-33. Equivalent Radiated Power Plot  
(n5\_3C\_5M+5M+5M\_QPSK - High Channel, Port 0)

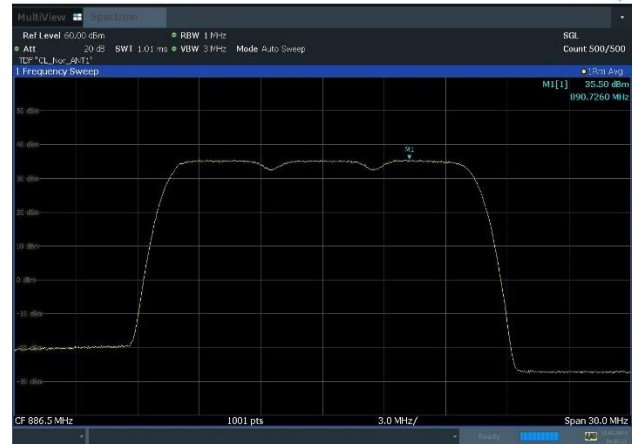

Plot 8-34. Equivalent Radiated Power Plot  
(n5\_3C\_5M+5M+5M\_QPSK - High Channel, Port 1)

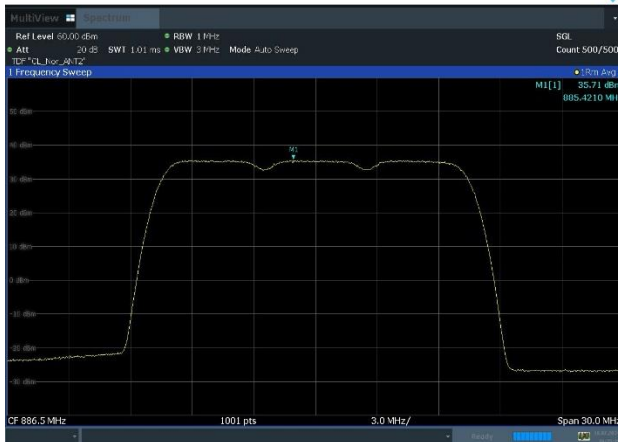

Plot 8-35. Equivalent Radiated Power Plot  
(n5\_3C\_5M+5M+5M\_QPSK - High Channel, Port 2)

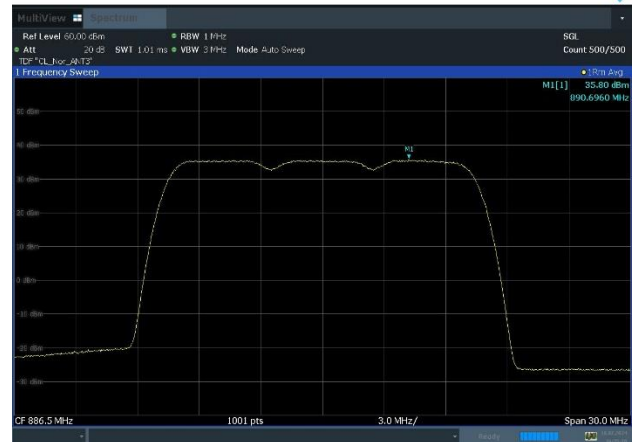

Plot 8-36. Equivalent Radiated Power Plot  
(n5\_3C\_5M+5M+5M\_QPSK - High Channel, Port 3)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 27 of 82	

## 8.4 Peak To Average Ratio

### Test Overview

The peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7


ANSI C63.26-2015 – Section 5.2.3.4

### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's CCDF function is enabled.
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

### Test Setup

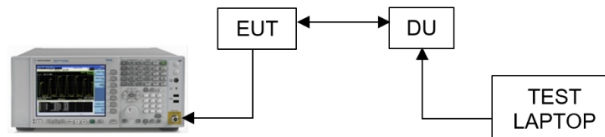



**Figure 8-3. Test Instrument & Measurement Setup**

### Limit

§22.913 (d)

The peak-to-average power ratio (PAPR) limit shall not exceed 13 dB for more than 0.1% of the time.

FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 28 of 82	

Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low	0	8.26	8.42	8.50	8.44	≤ 13
	1	8.26	8.42	8.48	8.44	≤ 13
	2	8.22	8.40	8.48	8.44	≤ 13
	3	8.22	8.42	8.46	8.44	≤ 13
Mid	0	8.32	8.36	8.50	8.44	≤ 13
	1	8.32	8.38	8.48	8.46	≤ 13
	2	8.32	8.38	8.48	8.44	≤ 13
	3	8.34	8.38	<b>8.52</b>	8.46	≤ 13
High	0	8.28	8.36	8.50	8.46	≤ 13
	1	8.30	8.38	8.48	8.46	≤ 13
	2	8.28	8.38	8.50	8.46	≤ 13
	3	8.28	8.38	8.48	8.46	≤ 13



**Table 8-14. Peak To Average Power Ratio Summary Data (n13\_1C\_5M)**

Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Mid	0	8.34	8.32	<b>8.42</b>	8.38	≤ 13
	1	8.34	8.30	8.42	8.40	≤ 13
	2	7.64	7.60	7.64	7.64	≤ 13
	3	7.64	7.62	7.64	7.64	≤ 13

**Table 8-15. Peak To Average Power Ratio Summary Data (n13\_1C\_10M)**

Channel	Port	PAPR (dB)		Limit (dB)
		QPSK	16QAM	
Mid	0	8.42	8.46	≤ 13
	1	8.42	<b>8.48</b>	≤ 13
	2	7.64	7.68	≤ 13
	3	7.64	7.68	≤ 13

**Table 8-16. Peak To Average Power Ratio Summary Data (n13\_2C\_5M+5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 29 of 82

Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low	0	8.42	8.44	8.36	8.46	≤ 13
	1	8.42	8.42	8.36	8.42	≤ 13
	2	7.66	7.68	7.66	7.68	≤ 13
	3	7.66	7.68	7.68	7.70	≤ 13
Mid	0	8.44	8.44	8.36	8.44	≤ 13
	1	8.42	8.44	8.34	8.42	≤ 13
	2	7.68	7.70	7.68	7.70	≤ 13
	3	7.66	7.68	7.66	7.68	≤ 13
High	0	8.46	8.42	8.34	8.48	≤ 13
	1	8.46	8.42	8.34	<b>8.52</b>	≤ 13
	2	7.76	7.76	7.74	7.78	≤ 13
	3	7.78	7.76	7.74	7.78	≤ 13



**Table 8-17. Peak To Average Power Ratio Summary Data (B5\_1C\_5M)**

Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low	0	8.40	8.48	8.42	8.44	≤ 13
	1	8.40	8.46	8.40	8.44	≤ 13
	2	7.66	7.68	7.68	7.68	≤ 13
	3	7.66	7.68	7.68	7.68	≤ 13
Mid	0	8.42	8.48	8.40	8.44	≤ 13
	1	8.42	8.48	8.40	8.44	≤ 13
	2	7.68	7.68	7.68	7.68	≤ 13
	3	7.68	7.70	7.68	7.68	≤ 13
High	0	8.46	8.44	8.38	8.46	≤ 13
	1	<b>8.48</b>	8.46	8.40	8.46	≤ 13
	2	7.78	7.78	7.76	7.76	≤ 13
	3	7.80	7.78	7.76	7.76	≤ 13

**Table 8-18. Peak To Average Power Ratio Summary Data (n5\_1C\_5M)**

Channel	Port	PAPR (dB)		Limit (dB)
		QPSK	16QAM	
Low	0	<b>8.48</b>	8.48	≤ 13
	1	8.44	8.42	≤ 13
	2	8.04	8.04	≤ 13
	3	8.06	8.06	≤ 13
Mid	0	8.46	8.46	≤ 13
	1	8.46	8.46	≤ 13
	2	7.70	7.70	≤ 13
	3	7.72	7.70	≤ 13
High	0	8.38	8.44	≤ 13
	1	8.42	8.44	≤ 13
	2	7.94	8.00	≤ 13
	3	8.00	8.00	≤ 13

**Table 8-19. Peak To Average Power Ratio Summary Data (n5\_3C\_5M+5M+5M)**

FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 30 of 82	



Plot 8-37. Peak To Average Power Ratio Plot (n13\_1C\_5M\_64QAM - Mid Channel, Port 3)




Plot 8-38. Peak To Average Power Ratio Plot (n13\_1C\_10M\_64QAM - Mid Channel, Port 0)



Plot 8-39. Peak To Average Power Ratio Plot (n13\_2C\_5M+5M\_16QAM - Mid Channel, Port 1)



Plot 8-40. Peak To Average Power Ratio Plot (B5\_1C\_5M\_256QAM - High Channel, Port 1)

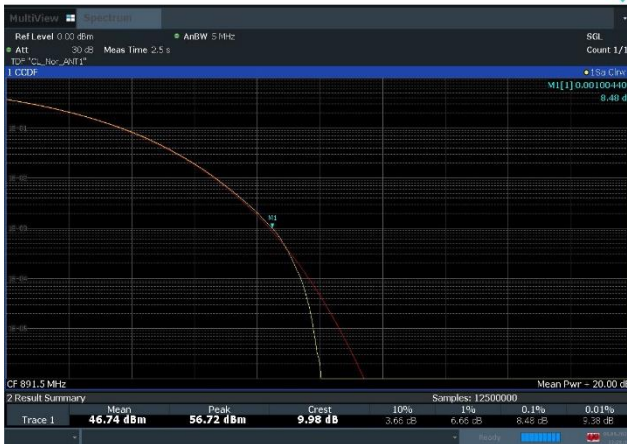

Plot 8-41. Peak To Average Power Ratio Plot (n5\_1C\_5M\_QPSK - High Channel, Port 1)



Plot 8-42. Peak To Average Power Ratio Plot (n5\_3C\_5M+5M+5M\_QPSK - Low Channel, Port 0)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 31 of 82

## 8.5 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

iii) Measure and add  $10 \log(N_{ANT})$  dB

ANSI C63.26-2015 – Section 5.7.3

### Test Setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW: Please see test notes below.
4.  $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Limit

§22.917(a), §27.53(c)

The power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm.

### Test Setup






Figure 8-4. Test Instrument & Measurement Setup

FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 32 of 82	





**Test Notes**

1. Per Part 22, In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz.
2. Per Part 27, Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed
3. Detect with a margin of under 1dB to limit, the integration method was performed using the spectrum analyzer's band power functions according to ANSI C63.26-2015 – Section 5.7 and using the method KDB 971168 D01 v03r01 - Section E) 3) ii). The integration value was set to a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter.
4. The limits were adjusted by a factor of  $[-10 \cdot \log(4)]$  dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911. MIMO Factor calculation as below:  
 $MIMO \text{ Factor} = 10 \cdot \log(4) = 6.02 \text{ dB}$

Frequency range	Basic Limit (dBm/MHz)	MIMO Factor (dB)	RBW Factor (dB)	Adjusted limit (dBm)
Low band edge – 0.1MHz, 1MHz	-13.00	6.02	0	-19.02
High band edge + 0.1MHz, 1MHz	-13.00	6.02	0	-19.02

Note: Adjusted limit (dBm/MHz) = Basic limit (dBm/1MHz) - MIMO Factor - RBW Factor

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 33 of 82	

Edge	Port	Measured Range	Max. Value (dBm)				Limit (dBm)	Worst Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	745.9 to 746 MHz	-25.61	-25.94	-25.89	-25.86	-19.02	-6.59
	1	745.9 to 746 MHz	-25.77	-25.30	-25.33	-25.21	-19.02	-6.19
	2	745.9 to 746 MHz	-25.10	-26.50	-25.97	-25.64	-19.02	-6.08
	3	745.9 to 746 MHz	<b>-24.95</b>	-25.74	-25.34	-25.66	-19.02	<b>-5.93</b>
High	0	756 to 756.1 MHz	-26.97	-26.87	-27.51	<b>-24.85</b>	-19.02	<b>-5.83</b>
	1	756 to 756.1 MHz	-26.19	-25.65	-27.16	-26.94	-19.02	-6.63
	2	756 to 756.1 MHz	-26.33	-26.90	-26.11	-25.19	-19.02	-6.17
	3	756 to 756.1 MHz	-26.72	-26.69	-27.34	-26.01	-19.02	-6.99



**Table 8-20. Band Edge Emission Summary Data (n13\_1C\_5M)**

Edge	Port	Measured Range	Max. Value (dBm)				Limit (dBm)	Worst Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	745.9 to 746 MHz	-21.62	-22.85	-21.79	-22.86	-19.02	-2.60
	1	745.9 to 746 MHz	-21.83	-22.22	-21.14	-21.71	-19.02	-2.12
	2	745.9 to 746 MHz	-22.45	-21.88	-21.19	-21.04	-19.02	-2.02
	3	745.9 to 746 MHz	-22.03	-21.83	-21.52	<b>-20.48</b>	-19.02	<b>-1.46</b>
High	0	756 to 756.1 MHz	-23.38	-25.83	<b>-22.85</b>	-23.13	-19.02	<b>-3.83</b>
	1	756 to 756.1 MHz	-23.41	-26.34	-23.65	-23.16	-19.02	-4.14
	2	756 to 756.1 MHz	-22.46	-25.42	-22.85	-24.07	-19.02	-3.44
	3	756 to 756.1 MHz	-22.89	-24.87	-24.55	-23.63	-19.02	-3.87

**Table 8-21. Band Edge Emission Summary Data (n13\_1C\_10M)**

Edge	Port	Measured Range	Max. Value (dBm)		Limit (dBm)	Worst Margin (dB)
			QPSK	16QAM		
Low	0	745.9 to 746 MHz	-23.23	-24.26	-19.02	-4.21
	1	745.9 to 746 MHz	-22.85	-23.13	-19.02	-3.83
	2	745.9 to 746 MHz	-22.82	-23.03	-19.02	-3.80
	3	745.9 to 746 MHz	<b>-22.22</b>	-23.76	-19.02	<b>-3.20</b>
High	0	756 to 756.1 MHz	-25.74	-24.92	-19.02	-5.90
	1	756 to 756.1 MHz	-25.19	-24.42	-19.02	-5.40
	2	756 to 756.1 MHz	-24.30	-24.68	-19.02	-5.28
	3	756 to 756.1 MHz	-24.39	<b>-24.09</b>	-19.02	<b>-5.07</b>

**Table 8-22. Band Edge Emission Summary Data (n13\_2C\_5M+5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 34 of 82	

Edge	Port	Measured Range	Max. Value (dBm)				Limit (dBm)	Worst Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	868 to 869 MHz	-24.85	-25.70	-24.75	-23.74	-19.02	-4.72
	1	868 to 869 MHz	-23.48	-24.45	-23.51	<b>-22.76</b>	-19.02	-3.74
	2	868 to 869 MHz	-25.92	-24.88	-24.89	-24.11	-19.02	-5.09
	3	868 to 869 MHz	-24.36	-25.30	-25.48	-24.25	-19.02	-5.23
High	0	894 to 895 MHz	-25.82	-24.53	-25.48	-24.73	-19.02	-5.51
	1	894 to 895 MHz	-24.14	<b>-23.31</b>	-25.01	-25.30	-19.02	-4.29
	2	894 to 895 MHz	-25.65	-25.47	-25.42	-24.28	-19.02	-5.26
	3	894 to 895 MHz	-25.61	-25.38	-24.49	-24.56	-19.02	-5.47



**Table 8-23. Band Edge Emission Summary Data (B5\_1C\_5M)**

Edge	Port	Measured Range	Max. Value (dBm)				Limit (dBm)	Worst Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	868 to 869 MHz	-23.17	-24.11	-23.98	-23.50	-19.02	-4.15
	1	868 to 869 MHz	<b>-22.48</b>	-22.50	-23.88	-23.71	-19.02	-3.46
	2	868 to 869 MHz	-24.04	-22.96	-24.44	-24.83	-19.02	-3.94
	3	868 to 869 MHz	-24.82	-23.80	-25.79	-25.09	-19.02	-4.78
High	0	894 to 895 MHz	-25.63	-25.49	-24.93	-26.99	-19.02	-5.91
	1	894 to 895 MHz	-25.46	-25.71	-24.53	-24.59	-19.02	-5.51
	2	894 to 895 MHz	-24.61	-25.54	<b>-24.32</b>	-25.62	-19.02	-5.30
	3	894 to 895 MHz	-26.66	-24.56	-24.52	-25.47	-19.02	-5.50

**Table 8-24. Band Edge Emission Summary Data (n5\_1C\_5M)**

Edge	Port	Measured Range	Max. Value (dBm)		Limit (dBm)	Worst Margin (dB)
			QPSK	16QAM		
Low	0	868 to 869 MHz	-23.03	-23.00	-19.02	-3.98
	1	868 to 869 MHz	-24.06	<b>-22.46</b>	-19.02	<b>-3.44</b>
	2	868 to 869 MHz	-22.86	-23.16	-19.02	-3.84
	3	868 to 869 MHz	-22.55	-23.04	-19.02	-3.53
High	0	894 to 895 MHz	<b>-26.58</b>	-27.94	-19.02	<b>-7.56</b>
	1	894 to 895 MHz	-26.89	-27.28	-19.02	-7.87
	2	894 to 895 MHz	-27.91	-28.18	-19.02	-8.89
	3	894 to 895 MHz	-27.06	-27.64	-19.02	-8.04

**Table 8-25. Band Edge Emission Summary Data (n5\_3C\_5M+5M+5M)**



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 35 of 82	


Edge	Port	Measured Range	Max. Value (dBm)	Limit (dBm)	Worst Margin (dB)
			QPSK		
Low	0	868 to 869 MHz	<b>-21.16</b>	<b>-19.02</b>	<b>-2.14</b>
	1	868 to 869 MHz	-22.81	-19.02	-3.79
	2	868 to 869 MHz	-21.27	-19.02	-2.25
	3	868 to 869 MHz	-21.82	-19.02	-2.80
High	0	894 to 895 MHz	-27.36	-19.02	-8.34
	1	894 to 895 MHz	-26.92	-19.02	-7.90
	2	894 to 895 MHz	<b>-26.49</b>	<b>-19.02</b>	<b>-7.47</b>
	3	894 to 895 MHz	-26.90	-19.02	-7.88

**Table 8-26. Band Edge Emission Summary Data (n5\_3NC\_5M+5M+5M)**


Edge	Port	Measured Range	Max. Value (dBm)	Limit (dBm)	Worst Margin (dB)
			QPSK		
1 <sup>st</sup> carrier Low	0	745.9 to 746 MHz	-21.94	-19.02	-2.92
	1	745.9 to 746 MHz	-21.67	-19.02	-2.65
	2	745.9 to 746 MHz	-22.73	-19.02	-3.71
	3	745.9 to 746 MHz	<b>-20.57</b>	-19.02	<b>-1.55</b>
1 <sup>st</sup> carrier High	0	756 to 756.1 MHz	<b>-22.57</b>	-19.02	<b>-3.55</b>
	1	756 to 756.1 MHz	-22.92	-19.02	-3.90
	2	756 to 756.1 MHz	-24.31	-19.02	-5.29
	3	756 to 756.1 MHz	-23.30	-19.02	-4.28
2 <sup>nd</sup> carrier Low	0	868 to 869 MHz	-21.49	-19.02	-2.47
	1	868 to 869 MHz	<b>-21.40</b>	-19.02	<b>-2.38</b>
	2	868 to 869 MHz	-21.92	-19.02	-2.90
	3	868 to 869 MHz	-21.89	-19.02	-2.87
2 <sup>nd</sup> carrier High	0	894 to 895 MHz	-27.33	-19.02	-8.31
	1	894 to 895 MHz	<b>-26.44</b>	-19.02	<b>-7.42</b>
	2	894 to 895 MHz	-26.85	-19.02	-7.83
	3	894 to 895 MHz	-26.96	-19.02	-7.94

**Table 8-27. Band Edge Emission Summary Data (Multi band operation n13\_1C\_10M + n5\_3C\_5M+5M+5M)**


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 36 of 82	

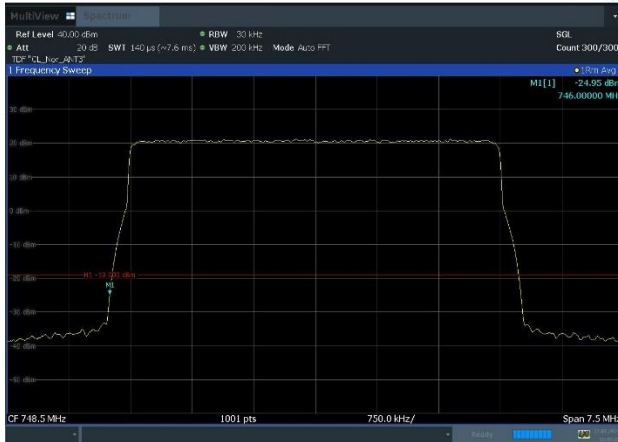


Plot 8-43. Band Edge Emission Summary Data Plot (n13\_1C\_5M\_QPSK - Low edge, Port 3)

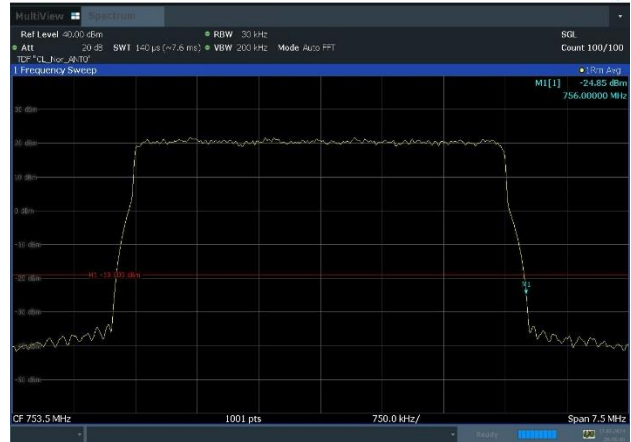


Plot 8-44. Band Edge Emission Summary Data Plot (n13\_1C\_5M\_256QAM - High edge, Port 0)

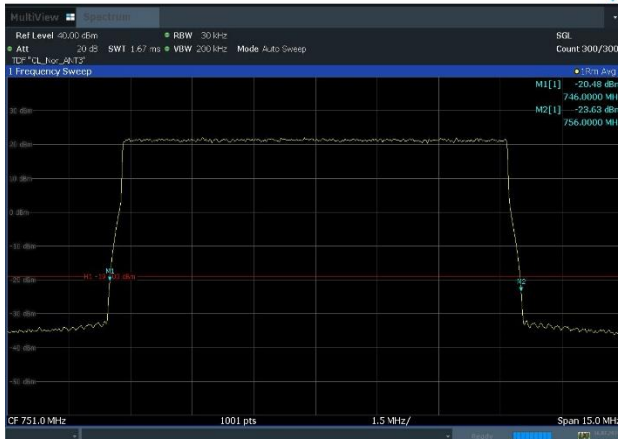


Plot 8-45. Band Edge Emission Summary Data Plot (n13\_1C\_10M\_256QAM - Low edge, Port 3)

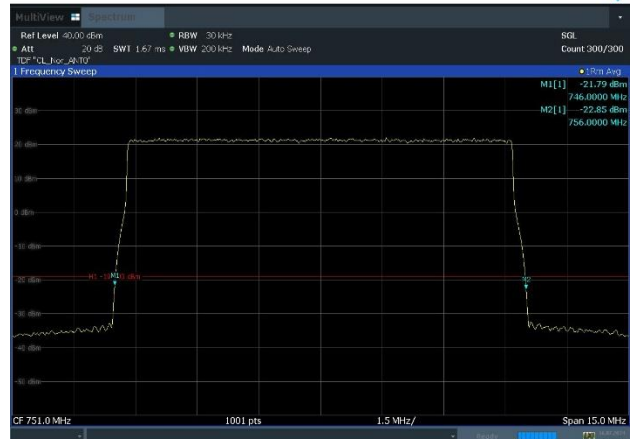

Plot 8-46. Band Edge Emission Summary Data Plot (n13\_1C\_10M\_64QAM - High edge, Port 0)

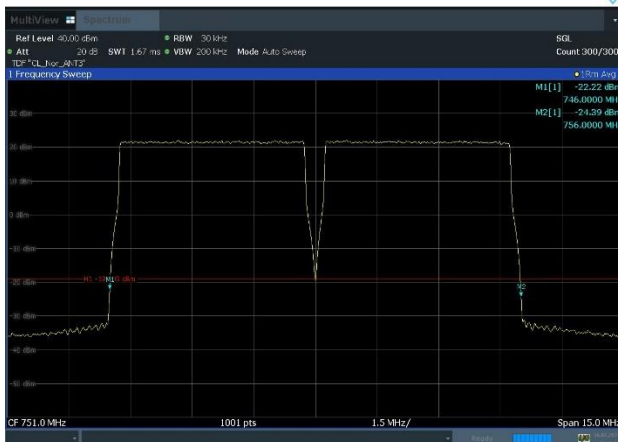


Plot 8-47. Band Edge Emission Summary Data Plot (n13\_2C\_5M+5M\_QPSK - Low edge, Port 3)

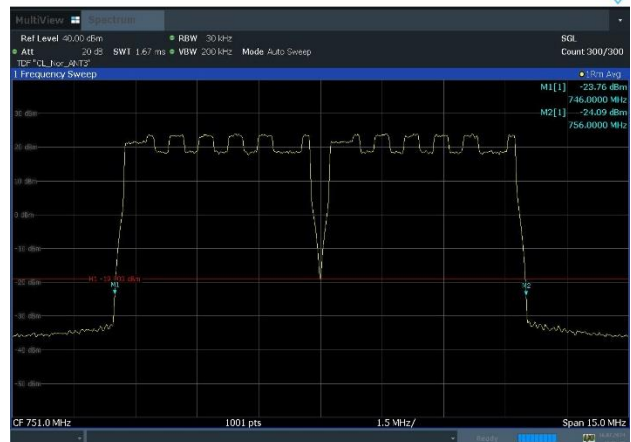


Plot 8-48. Band Edge Emission Summary Data Plot (n13\_2C\_5M+5M\_16QAM - High edge, Port 0)


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 37 of 82	

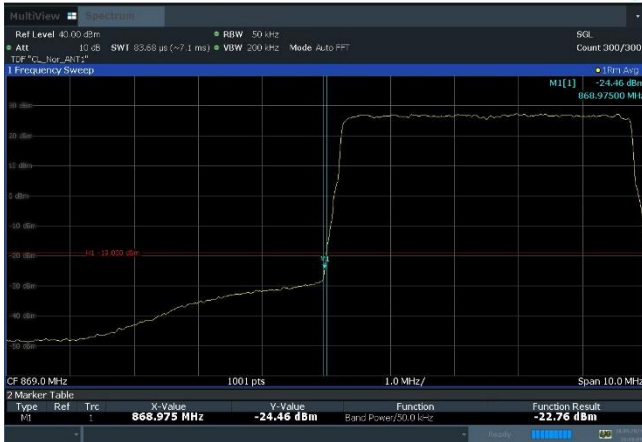

Plot 8-49. Band Edge Emission Summary Data Plot (B5\_1C\_5M\_256QAM - Low edge, Port 1)

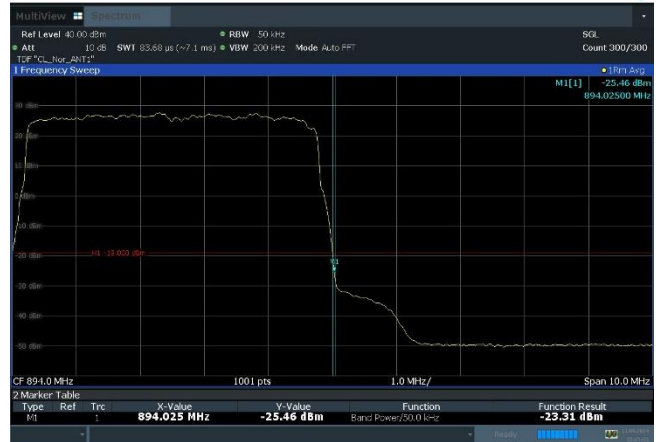

Plot 8-50. Band Edge Emission Summary Data Plot (n5\_1C\_5M\_16QAM - High edge, Port 1)

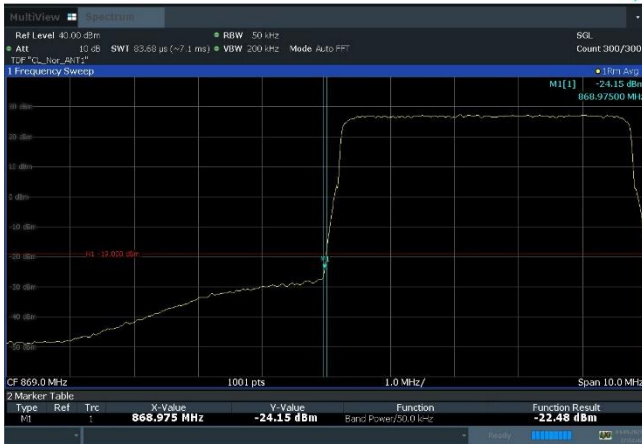


Plot 8-51. Band Edge Emission Summary Data Plot (n5\_1C\_5M\_QPSK - Low edge, Port 1)



Plot 8-52. Band Edge Emission Summary Data Plot (n5\_1C\_5M\_64QAM - High edge, Port 2)



Plot 8-53. Band Edge Emission Summary Data Plot (n5\_3C\_5M+5M+5M\_16QAM - Low edge, Port 1)

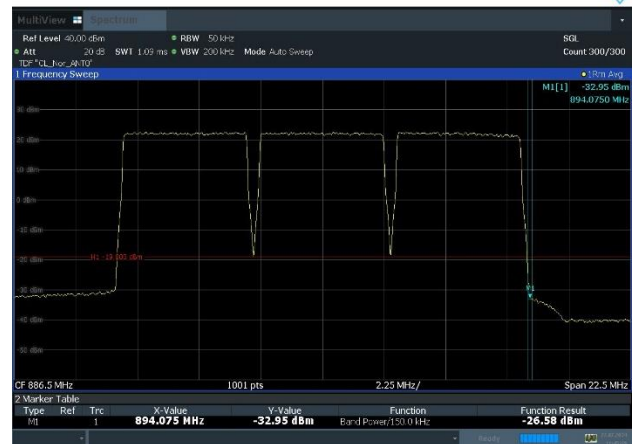


Plot 8-54. Band Edge Emission Summary Data Plot (n5\_3C\_5M+5M+5M\_QPSK - High edge, Port 0)


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 38 of 82	




Plot 8-55. Band Edge Emission Summary Data Plot (n5\_3NC\_5M+5M+5M\_QPSK - Low edge, Port 0)

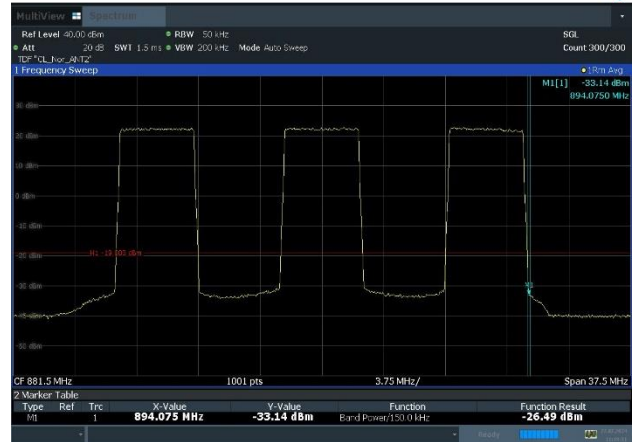

Plot 8-56. Band Edge Emission Summary Data Plot (n5\_3NC\_5M+5M+5M\_QPSK - High edge, Port 2)

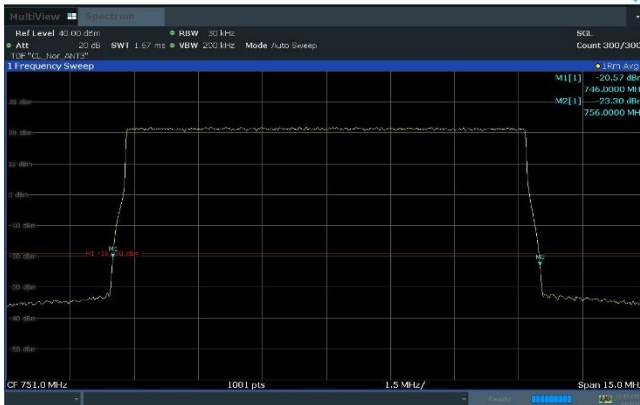

Plot 8-57. Band Edge Emission Summary Data Plot (Multi band operation n13\_1C\_10M + n5\_3C\_5M+5M+5M\_QPSK - 1<sup>st</sup> carrier Low Edge, Port 3)

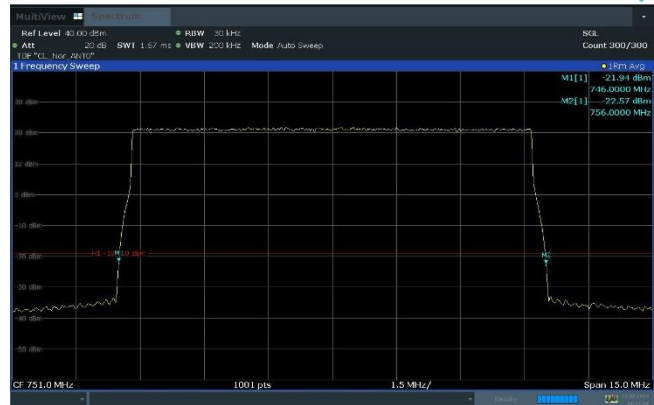

Plot 8-58. Band Edge Emission Summary Data Plot (Multi band operation n13\_1C\_10M + n5\_3C\_5M+5M+5M\_QPSK - 1<sup>st</sup> carrier High Edge, Port 0)



Plot 8-59. Band Edge Emission Summary Data Plot (Multi band operation n13\_1C\_10M + n5\_3C\_5M+5M+5M\_QPSK - 2<sup>nd</sup> carrier Low Edge, Port 1)



Plot 8-60. Band Edge Emission Summary Data Plot (Multi band operation n13\_1C\_10M + n5\_3C\_5M+5M+5M\_QPSK - 2<sup>nd</sup> carrier High Edge, Port 1)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 39 of 82

## 8.6 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

iii) Measure and add  $10 \log(N_{ANT})$  dB

ANSI C63.26-2015 – Section 5.7



### Test Setting

1. Start frequency was set to 9 kHz and stop frequency was set to at least  $10 \times$  the fundamental frequency excluding the frequency range of the band edge measurement.
2. RBW: Please see test notes below.
3. VBW  $\geq 3 \times$  RBW
4. Detector = RMS
5. Number of sweep points  $\geq 2 \times$  Span/RBW
6. Trace mode = trace average
7. Sweep time = auto couple
8. The trace was allowed to stabilize

### Limit

§22.917(a), §27.53(c)


The power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm.

FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 40 of 82	



### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 8-5. Test Instrument & Measurement Setup**

### Test Notes



- Per Part 22, In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz.
- Per Part 27, Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed
- All modes of operation were investigated and the worst configuration result plots are reported in each operating frequency band.
- The limits were adjusted by a factor of  $[-10 \cdot \log(4)]$  dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911. MIMO Factor calculation as below:  
 $MIMO\ Factor = 10 \cdot \log(4) = 6.02\ dB$
- Narrower RBW parameter is applied according to Section 5.7 of ANSI C63.26-2015 for some edge channels due to improving measurement accuracy. RBW Factor calculation as below:
  - RBW Factor =  $10 \cdot \log(0.1/0.001) = 20\ dB$
  - RBW Factor =  $10 \cdot \log(0.1/0.01) = 10\ dB$

Frequency range	Basic Limit (dBm/MHz)	MIMO Factor (dB)	References RBW (MHz)	Measurement RBW (MHz)	RBW Factor (dB)	Adjusted limit (dBm)
9 kHz to 150 kHz	-13.00	6.02	0.1	0.001	20	-39.02
150 kHz to 30 MHz				0.01	10	-29.02
30 MHz to 1 GHz				0.1	0	-19.02
1 GHz to 10 GHz				1		

Note: Adjusted limit (dBm/MHz) = Basic limit (dBm/1MHz) - MIMO Factor - RBW Factor



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 41 of 82	

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Worst Margin(dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	9 kHz to 150 kHz	-70.17	-70.68	-69.11	-70.08	-39.02	-30.09
		150 kHz to 30 MHz	-51.10	-51.46	-50.87	-50.61	-29.02	-21.59
		30 MHz to 745.9 MHz	-29.09	-29.96	-28.87	-29.28	-19.02	-9.85
		756.1 MHz to 1 GHz	-35.74	-35.94	-35.66	-35.79	-19.02	-16.64
		1 GHz to 3 GHz	-35.54	-35.43	-35.69	-35.58	-19.02	-16.41
		3 GHz to 10 GHz	-32.41	-32.31	-32.55	-32.69	-19.02	-13.29
	1	9 kHz to 150 kHz	-69.92	-70.92	-70.19	-70.74	-39.02	-30.90
		150 kHz to 30 MHz	-51.29	-51.36	-51.22	-51.07	-29.02	-22.05
		30 MHz to 745.9 MHz	-29.61	-29.70	-28.64	-29.38	-19.02	-9.62
		756.1 MHz to 1 GHz	-35.57	-35.30	-34.95	-34.59	-19.02	-15.57
		1 GHz to 3 GHz	-35.51	-35.81	-35.69	-35.59	-19.02	-16.49
		3 GHz to 10 GHz	-32.36	-32.60	-32.52	-32.67	-19.02	-13.34
	2	9 kHz to 150 kHz	-71.00	-70.52	-69.21	-70.54	-39.02	-30.19
		150 kHz to 30 MHz	-50.95	-50.69	-51.02	-51.74	-29.02	-21.67
		30 MHz to 745.9 MHz	-27.42	-28.86	-27.83	-29.39	-19.02	-8.40
		756.1 MHz to 1 GHz	-34.06	-33.90	-33.02	-34.67	-19.02	-14.00
		1 GHz to 3 GHz	-35.82	-35.81	-35.75	-35.65	-19.02	-16.63
		3 GHz to 10 GHz	-33.37	-33.41	-33.24	-33.13	-19.02	-14.11
	3	9 kHz to 150 kHz	-70.59	-70.06	-70.08	-69.98	-39.02	-30.96
		150 kHz to 30 MHz	-51.27	-50.88	-50.90	-51.22	-29.02	-21.86
30 MHz to 745.9 MHz		-28.73	-28.30	-28.57	-28.97	-19.02	-9.28	
756.1 MHz to 1 GHz		-34.18	-34.94	-35.07	-34.98	-19.02	-15.16	
1 GHz to 3 GHz		-35.73	-35.60	-35.90	-35.75	-19.02	-16.58	
3 GHz to 10 GHz		-32.47	-32.29	-32.71	-32.61	-19.02	-13.27	
Middle	0	9 kHz to 150 kHz	-69.98	-70.21	-70.08	-70.33	-39.02	-30.96
		150 kHz to 30 MHz	-50.89	-51.16	-51.16	-51.10	-29.02	-21.87
		30 MHz to 745.9 MHz	-35.52	-34.78	-35.31	-34.67	-19.02	-15.65
		756.1 MHz to 1 GHz	-34.77	-34.58	-35.09	-34.46	-19.02	-15.44
		1 GHz to 3 GHz	-35.44	-35.22	-35.38	-35.48	-19.02	-16.20
		3 GHz to 10 GHz	-32.51	-32.65	-32.39	-32.74	-19.02	-13.37
	1	9 kHz to 150 kHz	-70.68	-70.66	-69.65	-70.27	-39.02	-30.63
		150 kHz to 30 MHz	-50.96	-51.32	-51.03	-51.16	-29.02	-21.94
		30 MHz to 745.9 MHz	-34.85	-34.53	-34.59	-33.45	-19.02	-14.43
		756.1 MHz to 1 GHz	-35.19	-34.03	-34.55	-34.44	-19.02	-15.01
		1 GHz to 3 GHz	-35.79	-35.69	-35.64	-35.77	-19.02	-16.62
		3 GHz to 10 GHz	-32.38	-32.45	-32.55	-32.75	-19.02	-13.36
	2	9 kHz to 150 kHz	-70.55	-70.51	-70.10	-70.55	-39.02	-31.08
		150 kHz to 30 MHz	-50.77	-51.36	-50.64	-50.78	-29.02	-21.62
		30 MHz to 745.9 MHz	-31.51	-30.86	-31.88	-30.19	-19.02	-11.17
		756.1 MHz to 1 GHz	-31.06	-29.89	-31.81	-31.05	-19.02	-10.87
		1 GHz to 3 GHz	-35.63	-35.82	-35.87	-35.81	-19.02	-16.61
		3 GHz to 10 GHz	-33.47	-33.55	-33.37	-33.42	-19.02	-14.35
	3	9 kHz to 150 kHz	-70.31	-70.28	-70.28	-70.42	-39.02	-31.00
		150 kHz to 30 MHz	-50.84	-50.97	-50.86	-51.33	-29.02	-21.82
30 MHz to 745.9 MHz		-34.02	-33.67	-32.95	-33.95	-19.02	-13.93	
756.1 MHz to 1 GHz		-34.11	-34.29	-33.01	-33.54	-19.02	-13.99	
1 GHz to 3 GHz		-35.62	-35.87	-35.32	-35.58	-19.02	-16.30	
3 GHz to 10 GHz		-32.37	-32.64	-32.85	-32.72	-19.02	-13.35	
High	0	9 kHz to 150 kHz	-70.48	-70.20	-69.03	-69.78	-39.02	-30.01
		150 kHz to 30 MHz	-51.28	-50.92	-50.73	-50.70	-29.02	-21.68
		30 MHz to 745.9 MHz	-35.48	-35.39	-35.82	-35.87	-19.02	-16.37
		756.1 MHz to 1 GHz	-28.56	-28.48	-28.16	-28.38	-19.02	-9.14
		1 GHz to 3 GHz	-35.32	-35.38	-35.66	-35.43	-19.02	-16.30
		3 GHz to 10 GHz	-32.36	-32.64	-32.49	-32.63	-19.02	-13.34

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 42 of 82	

1	9 kHz to 150 kHz	-71.10	-70.42	-69.23	-70.16	-39.02	-30.21	
	150 kHz to 30 MHz	-51.31	-51.02	-51.48	-51.54	-29.02	-22.00	
	30 MHz to 745.9 MHz	-35.04	-35.16	-35.16	-34.41	-19.02	-15.39	
	756.1 MHz to 1 GHz	-28.66	-29.49	-29.32	-26.67	-19.02	-7.65	
	1 GHz to 3 GHz	-35.76	-35.78	-35.76	-35.81	-19.02	-16.74	
	3 GHz to 10 GHz	-32.71	-32.44	-32.71	-32.59	-19.02	-13.42	
	2	9 kHz to 150 kHz	-70.88	-70.79	-69.97	<b>-70.69</b>	-39.02	-30.95
		150 kHz to 30 MHz	-50.61	-50.42	-50.66	<b>-50.94</b>	-29.02	-21.40
		30 MHz to 745.9 MHz	-33.16	-31.22	-31.24	<b>-31.30</b>	-19.02	-12.20
		756.1 MHz to 1 GHz	-28.65	-27.14	-26.82	<b>-26.41</b>	-19.02	<b>-7.39</b>
		1 GHz to 3 GHz	-35.75	-35.84	-35.61	<b>-35.93</b>	-19.02	-16.59
	3 GHz to 10 GHz	-33.51	-33.50	-33.14	<b>-33.40</b>	-19.02	-14.12	
	3	9 kHz to 150 kHz	-69.98	-70.10	-69.71	-69.59	-39.02	-30.57
		150 kHz to 30 MHz	-51.02	-50.53	-50.82	-50.43	-29.02	-21.41
		30 MHz to 745.9 MHz	-34.41	-35.13	-34.38	-34.43	-19.02	-15.36
		756.1 MHz to 1 GHz	-28.56	-30.06	-28.11	-27.66	-19.02	-8.64
		1 GHz to 3 GHz	-35.84	-35.83	-36.02	-35.80	-19.02	-16.78
	3 GHz to 10 GHz	-32.83	-32.84	-32.79	-32.59	-19.02	-13.57	

**Table 8-28. Conducted Spurious Emission Summary Data (n13\_1C\_5M)**



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 43 of 82	

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Worst Margin(dB)
			QPSK	16QAM	64QAM	256QAM		
Middle	0	9 kHz to 150 kHz	-67.93	-67.57	-67.43	-67.27	-39.02	-28.25
		150 kHz to 30 MHz	-50.88	-50.68	-51.03	-50.91	-29.02	-21.66
		30 MHz to 745.9 MHz	-29.40	-28.73	-27.20	-27.29	-19.02	-8.18
		756.1 MHz to 1 GHz	-28.52	-29.71	-26.51	-26.98	-19.02	-7.49
		1 GHz to 3 GHz	-35.57	-35.46	-35.52	-35.41	-19.02	-16.39
		3 GHz to 10 GHz	-31.95	-32.48	-32.67	-32.49	-19.02	-12.93
	1	9 kHz to 150 kHz	<b>-67.76</b>	-67.73	-68.43	-67.79	-39.02	-28.71
		150 kHz to 30 MHz	<b>-50.96</b>	-51.53	-51.87	-51.49	-29.02	-21.94
		30 MHz to 745.9 MHz	<b>-28.32</b>	-26.86	-27.55	-28.32	-19.02	-7.84
		756.1 MHz to 1 GHz	<b>-25.44</b>	-29.09	-26.92	-27.33	-19.02	<b>-6.42</b>
		1 GHz to 3 GHz	<b>-35.79</b>	-35.79	-35.60	-35.84	-19.02	-16.58
		3 GHz to 10 GHz	<b>-32.18</b>	-32.50	-32.79	-32.48	-19.02	-13.16
	2	9 kHz to 150 kHz	-69.02	-68.07	-68.70	-68.43	-39.02	-29.05
		150 kHz to 30 MHz	-50.60	-51.38	-51.05	-50.89	-29.02	-21.58
		30 MHz to 745.9 MHz	-27.52	-28.34	-27.21	-26.90	-19.02	-7.88
		756.1 MHz to 1 GHz	-25.73	-27.66	-26.57	-26.97	-19.02	-6.71
		1 GHz to 3 GHz	-35.94	-35.61	-35.62	-35.69	-19.02	-16.59
		3 GHz to 10 GHz	-33.26	-33.06	-33.43	-33.32	-19.02	-14.04
	3	9 kHz to 150 kHz	-68.62	-67.96	-68.81	-68.13	-39.02	-28.94
		150 kHz to 30 MHz	-51.15	-50.72	-50.63	-50.88	-29.02	-21.61
		30 MHz to 745.9 MHz	-27.09	-26.23	-28.02	-26.49	-19.02	-7.21
		756.1 MHz to 1 GHz	-26.32	-27.46	-27.31	-27.79	-19.02	-7.30
		1 GHz to 3 GHz	-35.77	-35.61	-35.65	-35.72	-19.02	-16.59
		3 GHz to 10 GHz	-32.44	-32.61	-32.41	-32.68	-19.02	-13.39



**Table 8-29. Conducted Spurious Emission Summary Data (n13\_1C\_10M)**

Channel	Port	Measurement Range	Level (dBm)		Limit (dBm)	Worst Margin(dB)
			QPSK	16QAM		
Middle	0	9 kHz to 150 kHz	-66.96	-67.09	-39.02	-27.94
		150 kHz to 30 MHz	-50.95	-51.41	-29.02	-21.93
		30 MHz to 745.9 MHz	-28.84	-27.92	-19.02	-8.90
		756.1 MHz to 1 GHz	-27.56	-28.34	-19.02	-8.54
		1 GHz to 3 GHz	-35.44	-35.58	-19.02	-16.42
		3 GHz to 10 GHz	-32.51	-32.63	-19.02	-13.49
	1	9 kHz to 150 kHz	-67.68	-67.73	-39.02	-28.66
		150 kHz to 30 MHz	-51.35	-51.41	-29.02	-22.33
		30 MHz to 745.9 MHz	-26.50	-27.72	-19.02	-7.48
		756.1 MHz to 1 GHz	-27.24	-26.14	-29.02	-7.12
		1 GHz to 3 GHz	-35.82	-35.55	-19.02	-16.53
		3 GHz to 10 GHz	-32.68	-32.67	-19.02	-13.65
	2	9 kHz to 150 kHz	<b>-68.34</b>	-67.98	-39.02	-28.96
		150 kHz to 30 MHz	<b>-50.86</b>	-50.91	-29.02	-21.84
		30 MHz to 745.9 MHz	<b>-27.79</b>	-27.73	-19.02	-8.71
		756.1 MHz to 1 GHz	<b>-26.10</b>	-27.20	-29.02	<b>-7.08</b>
		1 GHz to 3 GHz	<b>-35.62</b>	-35.78	-19.02	-16.60
		3 GHz to 10 GHz	<b>-33.31</b>	-33.42	-19.02	-14.29
	3	9 kHz to 150 kHz	-68.22	-67.50	-39.02	-28.48
		150 kHz to 30 MHz	-51.17	-51.26	-29.02	-22.15
		30 MHz to 745.9 MHz	-27.37	-27.55	-19.02	-8.35
		756.1 MHz to 1 GHz	-27.61	-26.52	-19.02	-7.50
		1 GHz to 3 GHz	-35.72	-35.59	-19.02	-16.57
		3 GHz to 10 GHz	-32.79	-32.91	-19.02	-13.77

**Table 8-30. Conducted Spurious Emission Summary Data (n13\_2C\_5M+5M)**



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)	Page 44 of 82	

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Worst Margin(dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	9 kHz to 150 kHz	<b>-67.69</b>	-67.56	-67.81	-67.16	-39.02	-28.14
		150 kHz to 30 MHz	<b>-51.29</b>	-51.15	-51.21	-51.12	-29.02	-22.10
		30 MHz to 868 MHz	<b>-27.98</b>	-28.96	-28.13	-28.36	-19.02	<b>-8.96</b>
		895 MHz to 1 GHz	<b>-38.74</b>	-38.80	-38.81	-38.63	-19.02	-19.61
		1 GHz to 3 GHz	<b>-35.53</b>	-35.60	-35.83	-35.75	-19.02	-16.51
		3 GHz to 10 GHz	<b>-32.47</b>	-32.34	-32.50	-32.85	-19.02	-13.32
	1	9 kHz to 150 kHz	-68.60	-68.64	-68.45	-67.60	-39.02	-28.58
		150 kHz to 30 MHz	-52.31	-52.49	-52.48	-52.22	-29.02	-23.20
		30 MHz to 868 MHz	-33.27	-33.16	-32.24	-33.32	-19.02	-13.22
		895 MHz to 1 GHz	-38.63	-38.77	-38.28	-38.65	-19.02	-19.26
		1 GHz to 3 GHz	-35.55	-35.46	-35.28	-35.53	-19.02	-16.26
		3 GHz to 10 GHz	-32.93	-32.52	-32.53	-32.52	-19.02	-13.50
	2	9 kHz to 150 kHz	-68.15	-67.81	-67.58	-67.25	-39.02	-28.23
		150 kHz to 30 MHz	-50.97	-50.60	-51.05	-51.09	-29.02	-21.58
		30 MHz to 868 MHz	-36.98	-37.38	-36.93	-37.19	-19.02	-17.91
		895 MHz to 1 GHz	-38.78	-38.68	-38.78	-38.99	-19.02	-19.66
		1 GHz to 3 GHz	-35.44	-35.51	-35.09	-35.74	-19.02	-16.07
		3 GHz to 10 GHz	-33.41	-33.15	-32.93	-33.29	-19.02	-13.91
	3	9 kHz to 150 kHz	-67.88	-68.13	-67.75	-67.37	-39.02	-28.35
		150 kHz to 30 MHz	-50.84	-51.16	-50.94	-50.85	-29.02	-21.82
		30 MHz to 868 MHz	-37.09	-36.44	-36.88	-36.66	-19.02	-17.42
		895 MHz to 1 GHz	-39.52	-39.69	-39.20	-39.29	-19.02	-20.18
		1 GHz to 3 GHz	-35.61	-35.59	-35.49	-35.66	-19.02	-16.47
		3 GHz to 10 GHz	-32.71	-32.59	-32.46	-32.59	-19.02	-13.44
Middle	0	9 kHz to 150 kHz	-68.10	-67.85	-67.78	-67.34	-39.02	-28.32
		150 kHz to 30 MHz	-50.99	-51.46	-51.54	-50.43	-29.02	-21.41
		30 MHz to 868 MHz	-34.18	-34.93	-34.53	-34.76	-19.02	-15.16
		895 MHz to 1 GHz	-38.36	-37.63	-38.78	-38.13	-19.02	-18.61
		1 GHz to 3 GHz	-35.80	-35.55	-35.70	-35.77	-19.02	-16.53
		3 GHz to 10 GHz	-32.36	-32.09	-32.39	-32.60	-19.02	-13.07
	1	9 kHz to 150 kHz	-69.30	-68.17	-68.64	-68.23	-39.02	-29.15
		150 kHz to 30 MHz	-52.40	-52.64	-52.09	-52.12	-29.02	-23.07
		30 MHz to 868 MHz	-33.27	-33.16	-32.24	-33.32	-19.02	-13.22
		895 MHz to 1 GHz	-38.54	-36.88	-38.42	-37.01	-19.02	-17.86
		1 GHz to 3 GHz	-35.62	-35.28	-35.60	-35.67	-19.02	-16.26
		3 GHz to 10 GHz	-32.30	-32.46	-32.59	-32.59	-19.02	-13.28
	2	9 kHz to 150 kHz	-68.43	-68.55	-68.08	-67.97	-39.02	-28.95
		150 kHz to 30 MHz	-51.25	-51.25	-50.99	-51.07	-29.02	-21.97
		30 MHz to 868 MHz	-36.98	-37.38	-36.93	-37.19	-19.02	-17.91
		895 MHz to 1 GHz	-38.78	-38.68	-38.78	-38.99	-19.02	-19.66
		1 GHz to 3 GHz	-35.69	-35.66	-35.64	-35.35	-19.02	-16.33
		3 GHz to 10 GHz	-32.74	-33.00	-32.96	-32.79	-19.02	-13.72
	3	9 kHz to 150 kHz	-68.22	-68.35	-68.33	-68.03	-39.02	-29.01
		150 kHz to 30 MHz	-51.11	-51.29	-50.89	-51.35	-29.02	-21.87
		30 MHz to 868 MHz	-37.09	-36.44	-36.88	-36.66	-19.02	-17.42
		895 MHz to 1 GHz	-39.52	-39.69	-39.20	-39.29	-19.02	-20.18
		1 GHz to 3 GHz	-35.26	-35.37	-35.38	-35.56	-19.02	-16.24
		3 GHz to 10 GHz	-32.37	-32.13	-31.99	-32.19	-19.02	-12.97
High	0	9 kHz to 150 kHz	-68.51	-68.42	-67.45	-67.41	-39.02	-28.39
		150 kHz to 30 MHz	-51.06	-51.27	-51.43	-51.12	-29.02	-22.04
		30 MHz to 868 MHz	-35.65	-34.64	-35.76	-35.49	-19.02	-15.62
		895 MHz to 1 GHz	-35.12	-34.29	-33.07	-35.64	-19.02	-14.05
		1 GHz to 3 GHz	-35.86	-35.85	-35.92	-35.76	-19.02	-16.74
		3 GHz to 10 GHz	-32.03	-32.17	-32.28	-32.22	-19.02	-13.01



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 45 of 82	

1	9 kHz to 150 kHz	-69.15	-68.82	-68.63	-68.82	-39.02	-29.61	
	150 kHz to 30 MHz	-52.01	-52.33	-52.56	-52.44	-29.02	-22.99	
	30 MHz to 868 MHz	-34.43	-34.18	-34.25	-34.87	-19.02	-15.16	
	895 MHz to 1 GHz	-35.16	-35.42	-35.16	-35.88	-19.02	-16.14	
	1 GHz to 3 GHz	-35.25	-35.29	-35.57	-35.49	-19.02	-16.23	
	3 GHz to 10 GHz	-32.31	-32.20	-32.64	-32.40	-19.02	-13.18	
	2	9 kHz to 150 kHz	-68.67	-68.43	-68.10	-67.65	-39.02	-28.63
		150 kHz to 30 MHz	-51.46	-51.18	-50.91	-50.94	-29.02	-21.89
		30 MHz to 868 MHz	-37.28	-37.03	-36.91	-37.46	-19.02	-17.89
		895 MHz to 1 GHz	-35.09	-35.80	-34.82	-33.45	-19.02	-14.43
		1 GHz to 3 GHz	-35.62	-35.73	-35.60	-35.86	-19.02	-16.58
		3 GHz to 10 GHz	-32.53	-32.93	-32.93	-32.57	-19.02	-13.51
	3	9 kHz to 150 kHz	-68.21	-68.01	-67.91	-67.50	-39.02	-28.48
		150 kHz to 30 MHz	-51.06	-51.14	-50.88	-51.47	-29.02	-21.86
		30 MHz to 868 MHz	-37.15	-37.68	-37.59	-37.38	-19.02	-18.13
		895 MHz to 1 GHz	-35.13	-36.15	-35.74	-33.61	-19.02	-14.59
		1 GHz to 3 GHz	-35.69	-35.63	-35.56	-35.57	-19.02	-16.54
		3 GHz to 10 GHz	-32.06	-32.18	-31.98	-32.28	-19.02	-12.96

**Table 8-31. Conducted Spurious Emission Summary Data (B5\_1C\_5M)**



FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 46 of 82	

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Worst Margin(dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	9 kHz to 150 kHz	-67.66	-67.66	-68.32	-67.43	-39.02	-28.41
		150 kHz to 30 MHz	-51.48	-50.76	-50.99	-51.61	-29.02	-21.74
		30 MHz to 868 MHz	-24.23	-26.80	-26.80	-29.76	-19.02	-5.21
		895 MHz to 1 GHz	-38.29	-39.01	-38.30	-38.75	-19.02	-19.27
		1 GHz to 3 GHz	-35.51	-35.80	-35.65	-35.77	-19.02	-16.49
		3 GHz to 10 GHz	-32.49	-32.50	-32.56	-32.79	-19.02	-13.47
	1	9 kHz to 150 kHz	<b>-67.97</b>	-67.65	-69.00	-68.63	-39.02	-28.63
		150 kHz to 30 MHz	<b>-52.89</b>	-52.86	-52.54	-52.60	-29.02	-23.52
		30 MHz to 868 MHz	<b>-23.57</b>	-24.04	-26.89	-26.88	-19.02	<b>-4.55</b>
		895 MHz to 1 GHz	<b>-38.06</b>	-37.94	-38.63	-38.55	-19.02	-18.92
		1 GHz to 3 GHz	<b>-35.52</b>	-35.56	-35.54	-35.43	-19.02	-16.41
		3 GHz to 10 GHz	<b>-32.86</b>	-33.07	-32.48	-32.79	-19.02	-13.46
	2	9 kHz to 150 kHz	-67.41	-67.27	-68.32	-67.71	-39.02	-28.25
		150 kHz to 30 MHz	-51.03	-51.42	-50.66	-50.79	-29.02	-21.64
		30 MHz to 868 MHz	-31.84	-32.12	-30.99	-31.10	-19.02	-11.97
		895 MHz to 1 GHz	-38.94	-39.05	-38.79	-39.10	-19.02	-19.77
		1 GHz to 3 GHz	-35.71	-35.85	-35.54	-35.78	-19.02	-16.52
		3 GHz to 10 GHz	-33.18	-33.04	-33.03	-33.07	-19.02	-14.01
	3	9 kHz to 150 kHz	-67.65	-66.88	-68.57	-67.96	-39.02	-27.86
		150 kHz to 30 MHz	-51.03	-51.05	-50.98	-51.17	-29.02	-21.96
		30 MHz to 868 MHz	-30.42	-31.84	-32.07	-32.38	-19.02	-11.40
		895 MHz to 1 GHz	-39.42	-39.57	-39.58	-39.53	-19.02	-20.40
		1 GHz to 3 GHz	-35.68	-35.23	-35.01	-35.54	-19.02	-15.99
		3 GHz to 10 GHz	-32.72	-32.74	-32.68	-32.53	-19.02	-13.51
Middle	0	9 kHz to 150 kHz	-68.03	-67.45	-68.36	-67.95	-39.02	-28.43
		150 kHz to 30 MHz	-51.01	-51.52	-51.37	-51.57	-29.02	-21.99
		30 MHz to 868 MHz	-34.38	-34.29	-34.52	-34.19	-19.02	-15.17
		895 MHz to 1 GHz	-38.18	-38.10	-38.25	-38.16	-19.02	-19.08
		1 GHz to 3 GHz	-35.73	-35.57	-35.57	-35.60	-19.02	-16.55
		3 GHz to 10 GHz	-32.16	-32.36	-32.27	-32.59	-19.02	-13.14
	1	9 kHz to 150 kHz	-68.42	-68.29	-68.50	-68.34	-39.02	-29.27
		150 kHz to 30 MHz	-52.19	-52.58	-52.49	-52.16	-29.02	-23.14
		30 MHz to 868 MHz	-32.34	-33.94	-32.65	-33.96	-19.02	-13.32
		895 MHz to 1 GHz	-37.10	-38.23	-38.30	-38.69	-19.02	-18.08
		1 GHz to 3 GHz	-35.45	-35.54	-35.44	-35.43	-19.02	-16.41
		3 GHz to 10 GHz	-32.46	-32.72	-32.50	-32.79	-19.02	-13.44
	2	9 kHz to 150 kHz	-68.02	-67.16	-67.74	-67.43	-39.02	-28.14
		150 kHz to 30 MHz	-50.89	-51.00	-51.23	-51.05	-29.02	-21.87
		30 MHz to 868 MHz	-36.82	-36.61	-36.62	-36.81	-19.02	-17.59
		895 MHz to 1 GHz	-38.96	-38.99	-38.86	-39.02	-19.02	-19.84
		1 GHz to 3 GHz	-35.71	-35.42	-35.50	-35.55	-19.02	-16.40
		3 GHz to 10 GHz	-32.90	-33.20	-32.36	-33.17	-19.02	-13.34
	3	9 kHz to 150 kHz	-67.25	-68.12	-68.16	-68.02	-39.02	-28.23
		150 kHz to 30 MHz	-50.73	-51.48	-51.33	-51.23	-29.02	-21.71
		30 MHz to 868 MHz	-36.86	-37.29	-35.60	-36.72	-19.02	-16.58
		895 MHz to 1 GHz	-39.60	-39.45	-39.06	-39.23	-19.02	-20.04
		1 GHz to 3 GHz	-35.45	-35.49	-35.38	-35.52	-19.02	-16.36
		3 GHz to 10 GHz	-32.18	-32.46	-32.48	-32.44	-19.02	-13.16
High	0	9 kHz to 150 kHz	-67.74	-67.69	-68.40	-68.26	-39.02	-28.67
		150 kHz to 30 MHz	-51.06	-51.38	-51.62	-51.35	-29.02	-22.04
		30 MHz to 868 MHz	-34.93	-35.26	-35.07	-35.81	-19.02	-15.91
		895 MHz to 1 GHz	-33.16	-34.25	-35.05	-33.45	-19.02	-14.14
		1 GHz to 3 GHz	-35.77	-35.73	-35.73	-35.66	-19.02	-16.64
		3 GHz to 10 GHz	-32.53	-32.51	-32.58	-32.79	-19.02	-13.49



FCC ID: A3LRF4461D-13A		MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 47 of 82	

1	9 kHz to 150 kHz	-68.32	-68.21	-68.53	-69.00	-39.02	-29.19	
	150 kHz to 30 MHz	-52.40	-52.31	-52.32	-52.46	-29.02	-23.29	
	30 MHz to 868 MHz	-34.59	-34.07	-34.14	-34.85	-19.02	-15.05	
	895 MHz to 1 GHz	-36.35	-36.55	-36.72	-37.37	-19.02	-17.33	
	1 GHz to 3 GHz	-35.34	-35.57	-35.67	-35.22	-19.02	-16.20	
	3 GHz to 10 GHz	-32.65	-32.52	-32.44	-32.75	-19.02	-13.42	
	2	9 kHz to 150 kHz	-67.68	-67.78	-68.79	-68.28	-39.02	-28.66
		150 kHz to 30 MHz	-51.57	-51.25	-51.12	-50.65	-29.02	-21.63
		30 MHz to 868 MHz	-36.69	-36.60	-36.66	-37.44	-19.02	-17.58
		895 MHz to 1 GHz	-34.88	-34.14	-34.65	-33.62	-19.02	-14.60
		1 GHz to 3 GHz	-35.73	-35.82	-35.75	-35.64	-19.02	-16.62
		3 GHz to 10 GHz	-32.81	-32.97	-32.98	-32.82	-19.02	-13.79
	3	9 kHz to 150 kHz	-67.09	-66.83	-68.33	-67.66	-39.02	-27.81
		150 kHz to 30 MHz	-51.21	-51.58	-50.87	-51.22	-29.02	-21.85
		30 MHz to 868 MHz	-37.15	-37.34	-37.36	-36.91	-19.02	-17.89
		895 MHz to 1 GHz	-35.45	-34.60	-34.23	-35.61	-19.02	-15.21
		1 GHz to 3 GHz	-35.54	-35.04	-35.59	-35.31	-19.02	-16.02
		3 GHz to 10 GHz	-31.85	-31.81	-32.38	-32.45	-19.02	-12.79

**Table 8-32. Conducted Spurious Emission Summary Data (n5\_1C\_5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 48 of 82





Channel	Port	Measurement Range	Level (dBm)		Limit (dBm)	Worst Margin(dB)
			QPSK	16QAM		
Low	0	9 kHz to 150 kHz	-70.84	-71.26	-39.02	-31.82
		150 kHz to 30 MHz	-51.02	-50.96	-29.02	-21.94
		30 MHz to 868 MHz	-31.31	-31.48	-19.02	-12.29
		895 MHz to 1 GHz	-37.33	-37.21	-19.02	-18.19
		1 GHz to 3 GHz	-35.52	-35.47	-19.02	-16.45
		3 GHz to 10 GHz	-32.68	-32.64	-19.02	-13.62
	1	9 kHz to 150 kHz	-71.49	-70.91	-39.02	-31.89
		150 kHz to 30 MHz	-50.94	-51.17	-29.02	-21.92
		30 MHz to 868 MHz	-31.42	-31.61	-19.02	-12.40
		895 MHz to 1 GHz	-37.72	-38.09	-19.02	-18.70
		1 GHz to 3 GHz	-35.71	-35.58	-19.02	-16.56
		3 GHz to 10 GHz	-32.50	-32.74	-19.02	-13.48
	2	9 kHz to 150 kHz	-71.52	<b>-71.18</b>	-39.02	-32.16
		150 kHz to 30 MHz	-51.02	<b>-50.86</b>	-29.02	-21.84
		30 MHz to 868 MHz	-31.35	<b>-31.16</b>	-19.02	<b>-12.14</b>
		895 MHz to 1 GHz	-37.76	<b>-38.87</b>	-19.02	-18.74
		1 GHz to 3 GHz	-35.64	<b>-35.57</b>	-19.02	-16.55
		3 GHz to 10 GHz	-33.27	<b>-33.42</b>	-19.02	-14.25
	3	9 kHz to 150 kHz	-71.43	-71.27	-39.02	-32.25
		150 kHz to 30 MHz	-50.87	-51.12	-29.02	-21.85
		30 MHz to 868 MHz	-30.78	-31.18	-19.02	-11.76
		895 MHz to 1 GHz	-38.90	-38.47	-19.02	-19.45
		1 GHz to 3 GHz	-35.89	-35.70	-19.02	-16.68
		3 GHz to 10 GHz	-32.62	-32.59	-19.02	-13.57
Middle	0	9 kHz to 150 kHz	-70.75	-71.00	-39.02	-31.73
		150 kHz to 30 MHz	-46.46	-50.62	-29.02	-17.44
		30 MHz to 868 MHz	-32.42	-32.75	-19.02	-13.40
		895 MHz to 1 GHz	-37.79	-36.79	-19.02	-17.77
		1 GHz to 3 GHz	-35.48	-35.61	-19.02	-16.46
		3 GHz to 10 GHz	-32.59	-32.22	-19.02	-13.20
	1	9 kHz to 150 kHz	-71.52	-71.54	-39.02	-32.50
		150 kHz to 30 MHz	-46.32	-51.42	-29.02	-17.30
		30 MHz to 868 MHz	-32.88	-32.28	-19.02	-13.26
		895 MHz to 1 GHz	-37.48	-38.16	-19.02	-18.46
		1 GHz to 3 GHz	-35.73	-35.65	-19.02	-16.63
		3 GHz to 10 GHz	-32.61	-32.39	-19.02	-13.37
	2	9 kHz to 150 kHz	-71.31	-71.50	-39.02	-32.29
		150 kHz to 30 MHz	-46.53	-51.14	-29.02	-17.51
		30 MHz to 868 MHz	-34.21	-34.48	-19.02	-15.19
		895 MHz to 1 GHz	-38.11	-36.99	-19.02	-17.97
		1 GHz to 3 GHz	-35.84	-35.65	-19.02	-16.63
		3 GHz to 10 GHz	-32.92	-33.57	-19.02	-13.90
	3	9 kHz to 150 kHz	-70.52	-71.36	-39.02	-31.50
		150 kHz to 30 MHz	-45.85	-50.83	-29.02	-16.83
		30 MHz to 868 MHz	-33.30	-33.40	-19.02	-14.28
		895 MHz to 1 GHz	-37.10	-36.59	-19.02	-17.57
		1 GHz to 3 GHz	-35.67	-35.59	-19.02	-16.57
		3 GHz to 10 GHz	-32.85	-32.74	-19.02	-13.72
High	0	9 kHz to 150 kHz	-71.07	-71.25	-39.02	-32.05
		150 kHz to 30 MHz	-50.88	-50.98	-29.02	-21.86
		30 MHz to 868 MHz	-33.49	-33.60	-19.02	-14.47
		895 MHz to 1 GHz	-36.86	-36.34	-19.02	-17.32
		1 GHz to 3 GHz	-35.58	-35.53	-19.02	-16.51
		3 GHz to 10 GHz	-32.64	-32.42	-19.02	-13.40
FCC ID: A3LRF4461D-13A			<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 49 of 82		

	1	9 kHz to 150 kHz	-71.53	-70.83	-39.02	-31.81
		150 kHz to 30 MHz	-51.09	-50.92	-29.02	-21.90
		30 MHz to 868 MHz	-32.29	-31.63	-19.02	-12.61
		895 MHz to 1 GHz	-37.78	-36.42	-19.02	-17.40
		1 GHz to 3 GHz	-35.79	-35.75	-19.02	-16.73
		3 GHz to 10 GHz	-32.71	-32.67	-19.02	-13.65
	2	9 kHz to 150 kHz	-71.60	-70.82	-39.02	-31.80
		150 kHz to 30 MHz	-50.66	-50.86	-29.02	-21.64
		30 MHz to 868 MHz	-35.00	-35.33	-19.02	-15.98
		895 MHz to 1 GHz	-36.39	-36.83	-19.02	-17.37
		1 GHz to 3 GHz	-35.57	-35.88	-19.02	-16.55
		3 GHz to 10 GHz	-33.24	-33.35	-19.02	-14.22
	3	9 kHz to 150 kHz	-70.86	-71.30	-39.02	-31.84
		150 kHz to 30 MHz	-50.71	-50.53	-29.02	-21.51
		30 MHz to 868 MHz	-34.65	-34.61	-19.02	-15.59
		895 MHz to 1 GHz	-36.36	-36.54	-19.02	-17.34
		1 GHz to 3 GHz	-35.37	-35.53	-19.02	-16.35
		3 GHz to 10 GHz	-32.80	-32.39	-19.02	-13.37

**Table 8-33. Conducted Spurious Emission Summary Data (n5\_3C\_5M+5M+5M)**



Channel	Port	Measurement Range	Level (dBm)		Limit (dBm)	Worst Margin(dB)
			QPSK			
Middle	0	9 kHz to 150 kHz	-70.76		-39.02	-31.74
		150 kHz to 30 MHz	-49.23		-29.02	-20.21
		30 MHz to 868 MHz	-30.58		-19.02	-11.56
		895 MHz to 1 GHz	-35.91		-19.02	-16.89
		1 GHz to 3 GHz	-35.49		-19.02	-16.47
		3 GHz to 10 GHz	-32.54		-19.02	-13.52
	1	9 kHz to 150 kHz	<b>-71.15</b>		-39.02	-32.13
		150 kHz to 30 MHz	<b>-49.68</b>		-29.02	-20.66
		30 MHz to 868 MHz	<b>-29.67</b>		-19.02	<b>-10.65</b>
		895 MHz to 1 GHz	<b>-36.19</b>		-19.02	-17.17
		1 GHz to 3 GHz	<b>-35.71</b>		-19.02	-16.69
		3 GHz to 10 GHz	<b>-32.58</b>		-19.02	-13.56
	2	9 kHz to 150 kHz	-71.20		-39.02	-32.18
		150 kHz to 30 MHz	-49.70		-29.02	-20.68
		30 MHz to 868 MHz	-31.42		-19.02	-12.40
		895 MHz to 1 GHz	-35.63		-19.02	-16.61
		1 GHz to 3 GHz	-35.67		-19.02	-16.65
		3 GHz to 10 GHz	-33.12		-19.02	-14.10
	3	9 kHz to 150 kHz	-71.33		-39.02	-32.31
		150 kHz to 30 MHz	-50.08		-29.02	-21.06
		30 MHz to 868 MHz	-31.13		-19.02	-12.11
		895 MHz to 1 GHz	-36.47		-19.02	-17.45
		1 GHz to 3 GHz	-35.57		-19.02	-16.55
		3 GHz to 10 GHz	-32.24		-19.02	-13.22


**Table 8-34. Conducted Spurious Emission Summary Data (n5\_3NC\_5M+5M+5M)**

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>			<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)		Page 50 of 82	


Channel	Port	Measurement Range	Level (dBm)	Limit (dBm)	Worst Margin(dB)
			QPSK		
Middle	0	9 kHz to 150 kHz	-67.34	-39.02	-28.32
		150 kHz to 30 MHz	-44.64	-29.02	-15.62
		30 MHz to 745.9 MHz	-28.92	-19.02	-9.90
		756.1 MHz to 868 MHz	-27.16	-19.02	-8.14
		895 MHz to 1 GHz	-35.57	-19.02	-16.55
		1 GHz to 3 GHz	-35.62	-19.02	-16.60
		3 GHz to 10 GHz	-32.41	-19.02	-13.39
	1	9 kHz to 150 kHz	-67.03	-39.02	-28.01
		150 kHz to 30 MHz	-45.12	-29.02	-16.10
		30 MHz to 745.9 MHz	-27.67	-19.02	-8.65
		756.1 MHz to 868 MHz	-28.80	-19.02	-9.78
		895 MHz to 1 GHz	-36.85	-19.02	-17.83
		1 GHz to 3 GHz	-35.90	-19.02	-16.88
	2	3 GHz to 10 GHz	-32.71	-19.02	-13.69
		9 kHz to 150 kHz	<b>-67.79</b>	-39.02	-28.77
		150 kHz to 30 MHz	<b>-45.01</b>	-29.02	-15.99
		30 MHz to 745.9 MHz	<b>-27.03</b>	-19.02	-8.01
		756.1 MHz to 868 MHz	<b>-26.45</b>	-19.02	<b>-7.43</b>
		895 MHz to 1 GHz	<b>-36.42</b>	-19.02	-17.40
		1 GHz to 3 GHz	<b>-35.64</b>	-19.02	-16.62
	3	3 GHz to 10 GHz	<b>-33.54</b>	-19.02	-14.52
		9 kHz to 150 kHz	-67.47	-39.02	-28.45
		150 kHz to 30 MHz	-45.12	-29.02	-16.10
		30 MHz to 745.9 MHz	-27.73	-19.02	-8.71
		756.1 MHz to 868 MHz	-26.59	-19.02	-7.57
		895 MHz to 1 GHz	-37.40	-19.02	-18.38
		1 GHz to 3 GHz	-35.75	-19.02	-16.73
		3 GHz to 10 GHz	-32.47	-19.02	-13.45

**Table 8-35. Conducted Spurious Emission Summary Data  
(Multi band operation n13\_1C\_10M + n5\_3C\_5M+5M+5M)**


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT (Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 51 of 82	

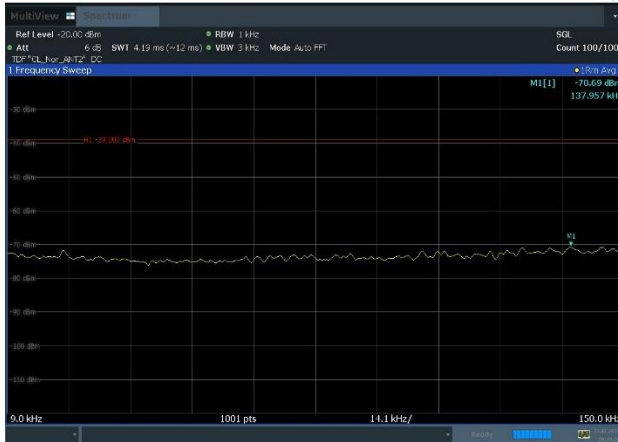

Plot 8-61. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n13\_1C\_5M\_256QAM - High Channel, Port 2)

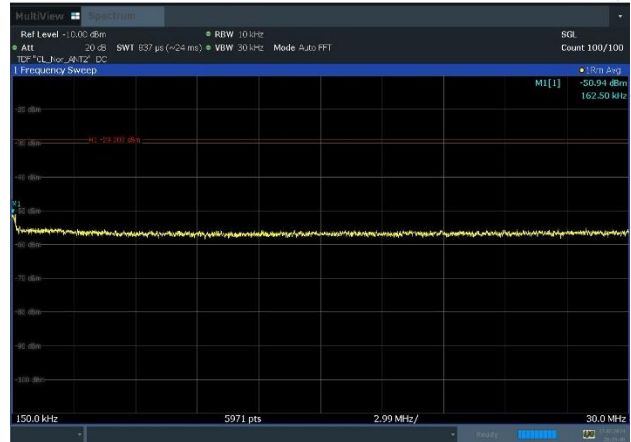


Plot 8-62. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n13\_1C\_5M\_256QAM - High Channel, Port 2)

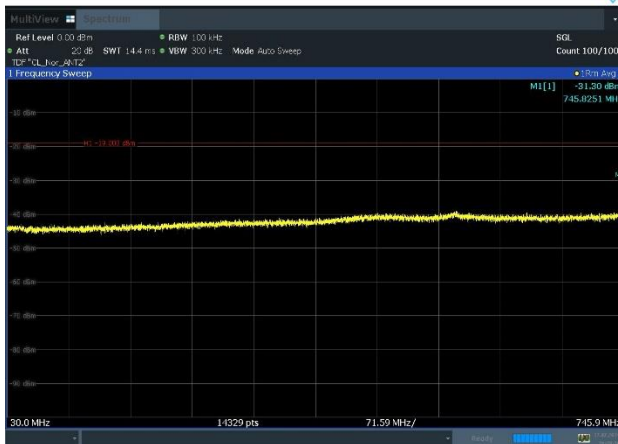


Plot 8-63. Conducted Spurious Emission Plot  
30 MHz to 745.9 MHz  
(n13\_1C\_5M\_256QAM - High Channel, Port 2)



Plot 8-64. Conducted Spurious Emission Plot  
756.1 MHz to 1 GHz  
(n13\_1C\_5M\_256QAM - High Channel, Port 2)

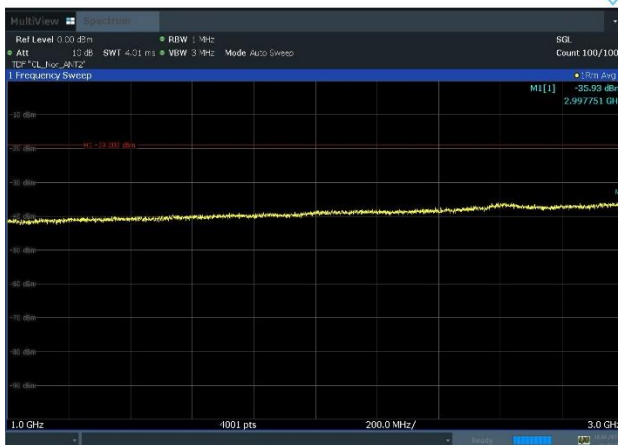


Plot 8-65. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n13\_1C\_5M\_256QAM - High Channel, Port 2)

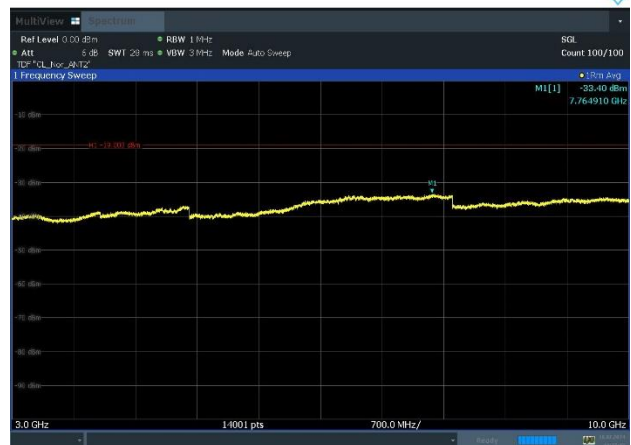


Plot 8-66. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n13\_1C\_5M\_256QAM - High Channel, Port 2)


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 52 of 82	

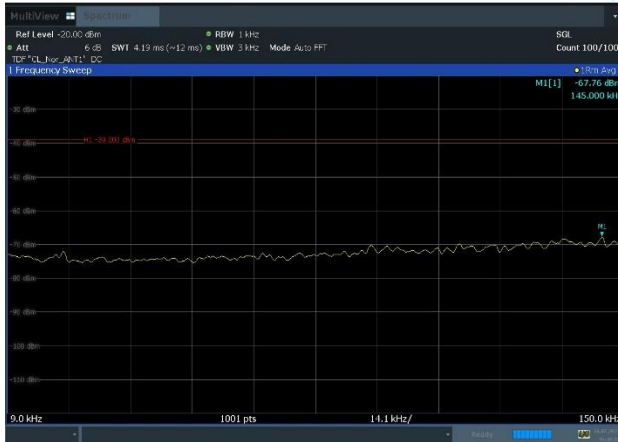


Plot 8-67. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 1)

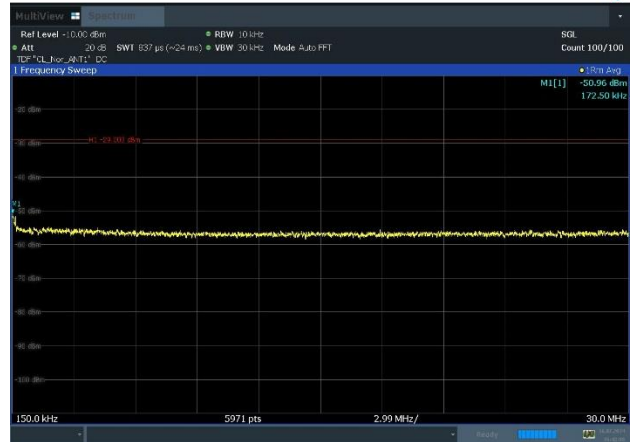


Plot 8-68. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 1)

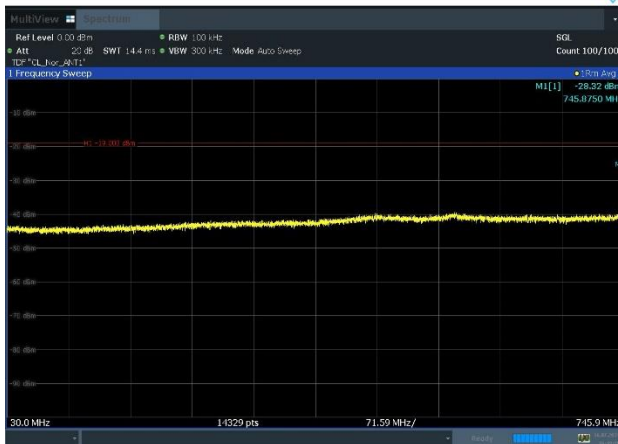


Plot 8-69. Conducted Spurious Emission Plot  
30 MHz to 745.9 MHz  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 1)

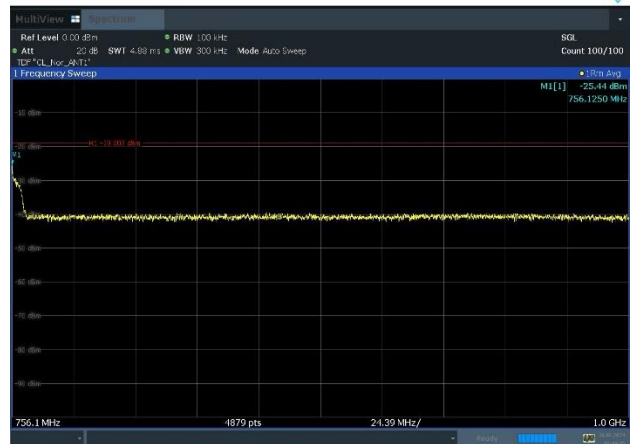

Plot 8-70. Conducted Spurious Emission Plot  
756.1 MHz to 1 GHz  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 1)

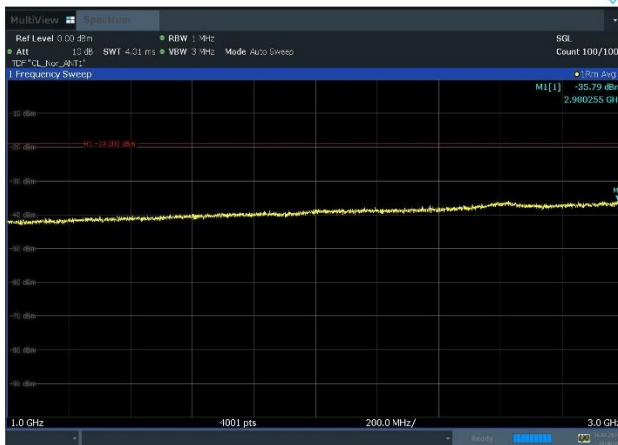

Plot 8-71. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 1)

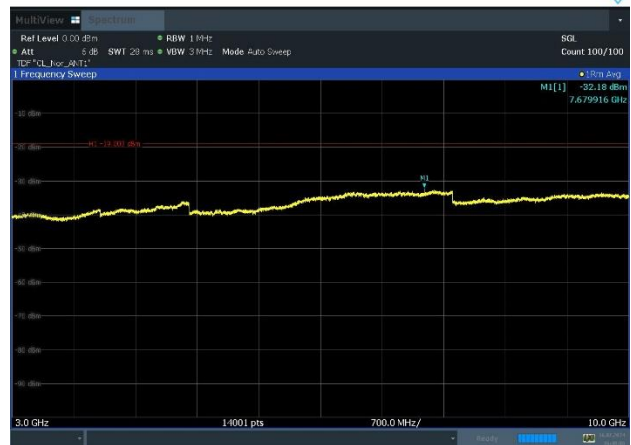


Plot 8-72. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n13\_1C\_10M\_QPSK - Mid Channel, Port 1)


FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24083001-00.A3L	Test Dates: 07/16/2024 - 09/25/2024	EUT Type: RRU(RF4461d)		Page 53 of 82




Plot 8-73. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 2)

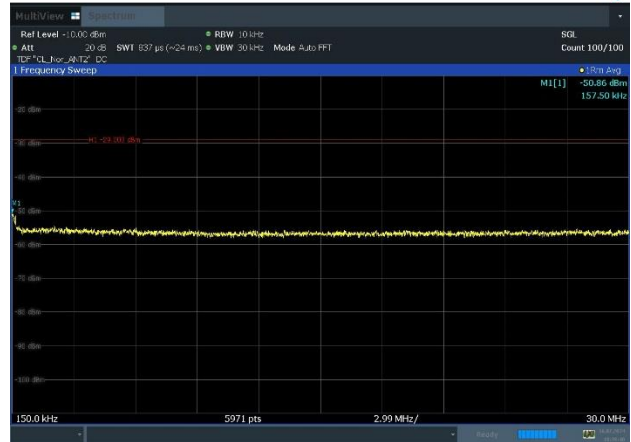


Plot 8-74. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 2)

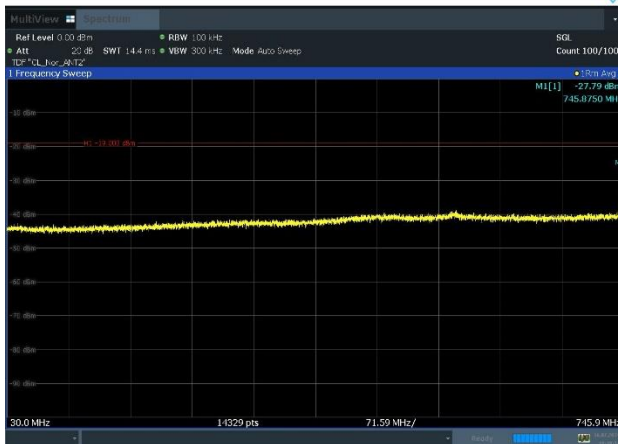


Plot 8-75. Conducted Spurious Emission Plot  
30 MHz to 745.9 MHz  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 2)

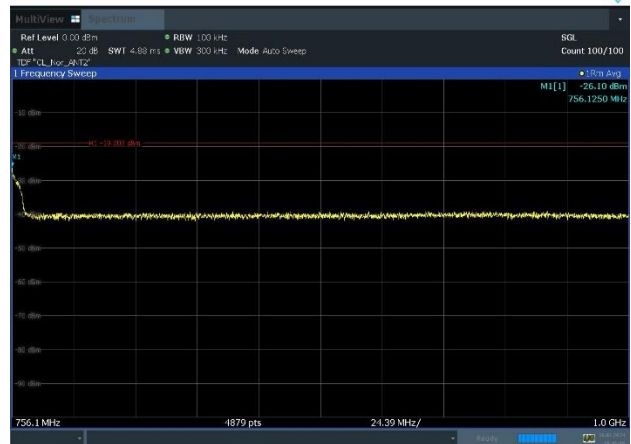

Plot 8-76. Conducted Spurious Emission Plot  
756.1 MHz to 1 GHz  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 2)

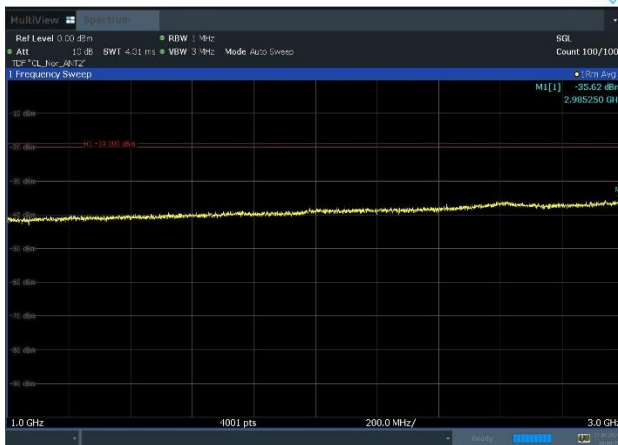

Plot 8-77. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 2)

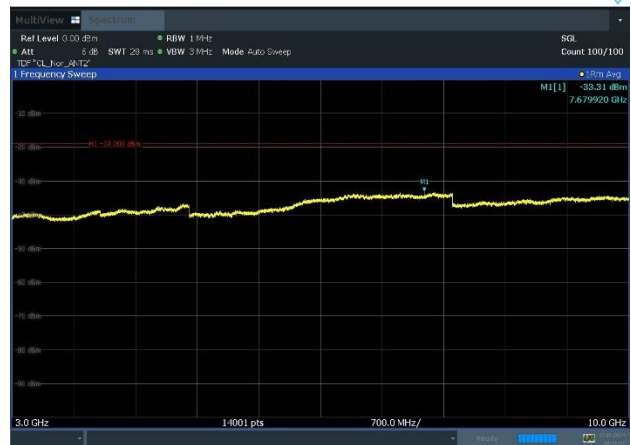

Plot 8-78. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n13\_2C\_5M+5M\_QPSK - Mid Channel, Port 2)

FCC ID: A3LRF4461D-13A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24083001-00.A3L	<b>Test Dates:</b> 07/16/2024 - 09/25/2024	<b>EUT Type:</b> RRU(RF4461d)	Page 54 of 82	