

## Nemko Korea Co., Ltd.

155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-852 KOREA, REPUBLIC OF

TEL:+82 31 330 1700 FAX:+82 31 330 2332

### FCC and IC EVALUATION REPORT FOR CERTIFICATION

#### Applicant :

Samsung Electronics Co., Ltd.

129,samsung-ro, Yeongtong-gu, Suwon-si,

Gyeonggi-do, Korea 443-742

Attn. : Mr. Jaywoo, Lee

Dates of Issue : February 3, 2014

Test Report No. : NK-14-R-004

Test Site : Nemko Korea Co., Ltd.

FCC ID  
IC

Brand Name

Contact Person

A3LRMCTPH  
649E-RMCTPH

SAMSUNG

Samsung Electronics Co., Ltd.  
129,samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, Korea 443-742  
Mr. Jaywoo, Lee  
Telephone No. : +82-31-277-2569

Applied Standard: FCC 47 CFR Part 15C and IC 210 Issue 8  
Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)  
EUT Type: Smart Touch Control

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003, ANSI C63.10. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Feb 3, 2014

Tested By : Wonho, Son  
Engineer



Feb 3, 2014

Reviewed By : Deokha Ryu  
Manager & Chief Engineer

# TABLE OF CONTENTS

---

<b>1. Scope</b>	<b>4</b>
<b>2. Introduction (Site Description)</b>	<b>5</b>
2.1 Test facility	5
2.2 Accreditation and listing	6
<b>3. Test Conditions &amp; EUT Information</b>	<b>7</b>
3.1 Operation During Test	7
3.2 Support Equipment	7
3.3 Setup Drawing	8
3.4 EUT Information	9
<b>4. Summary of Test Results</b>	<b>10</b>
<b>5. Recommendation / Conclusion</b>	<b>11</b>
<b>6. Antenna Requirements</b>	<b>11</b>
<b>7. Description of Test</b>	<b>12</b>
7.1 Conducted Emissions	12
7.2 Radiated Emissions	13
7.3 20 dB Bandwidth and Carrier Frequency Separation	14
7.4 Transmitter Average Time of Occupancy	14
7.5 Number of Hopping Channels	15
7.6 Maximum Peak Output Power	15
7.7 Conducted Spurious Emissions	16
<b>8. Test Data</b>	<b>17</b>
8.1 Radiated Emissions	17
8.2 20 dB Modulated Bandwidth	18
8.3 Carrier Frequency Separation	24
8.4 Transmitter Average Time of Occupancy	27

8.5 Number of Hopping Channels	29
8.6 Peak Power Output	30
8.7 Conducted Spurious Emissions	36
8.8 Radiated Spurious Emissions	52
8.9 Radiated Restricted Band Edge	54
<b>9. Test Equipment</b>	<b>55</b>
<b>10 Accuracy of Measurement</b>	<b>56</b>
<b>Appendix A: Labeling Requirement</b>	<b>58</b>
<b>Appendix B: Photographs of Test Set-up</b>	<b>59</b>
<b>Appendix C: EUT Photographs</b>	<b>60</b>

## 1. SCOPE

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15 and IC RSS-210 Issue 8.*

**Responsible Party :** Samsung Electronics Co., Ltd.

**Contact Person :** Mr. Jaywoo, Lee

**Manufacturer :** Samsung Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si,  
Gyeonggi-do, Korea 443-742

- FCC ID: A3LRMCTPH
- IC: 649E-RMCTPH
- Model: RMCTPH
- Variant Model: RMCTPH1AP1
- Brand Name: SAMSUNG
- EUT Type: Smart Touch Control
- Classification: 15C Intentional Radiator
- Applied Standard: FCC 47 CFR Part 15 subpart C and IC RSS-210 Issue 8
- Test Procedure(s): ANSI C63.4-2003, ANSI C63.10 and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"
- Dates of Test: January 03, 2014 ~ January 21, 2014
- Place of Tests: Nemko Korea Co., Ltd.

## 2. INTRODUCTION

### 2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003), the American National Standard for Testing Unlicensed Wireless Device (ANSI C63.10-2009) were used in determining radiated and conducted emissions emanating from **Samsung Electronics Co., Ltd.** FCC ID : **A3LRMCTPH** and IC : **649E-RMCTPH**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-852 KOREA, REPUBLIC OF.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilo-meters (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 2003.



Nemko Korea Co., Ltd.  
EMC Lab.

155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-852 KOREA, REPUBLIC OF  
Tel)+82-31-330-1700  
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

## 2.2 Accreditation and listing

Accreditation type	Accreditation number
	FCC part 15/18 Filing site
	CAB Accreditation for DOC
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)
 Industry Canada	Canada IC Registered site
	VCCI registration site(RE/CE/Telecom CE)
	EMC CBTL
	KCC(RRL)Designated Lab.
	SASO registered Lab and Certification Body

### 3. TEST CONDITIONS & EUT INFORMATION

#### 3.1 Operation During Test

The Laptop were used to control the EUT to transmit the wanted TX channel by the Bluetool testing program which manufacturer supported. The Laptop were removed after controlling the EUT to transmit the wanted signal. The EUT was tested at the lowest channel, middle channel and the highest channel with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.


The EUT is programmed with the following setting during the testing:

Mode	Frequency Band	Power Setting Level
GFSK/ $\pi/4$ DQPSK/ 8DPSK	2402 MHz ~ 2480 MHz	Specify Power Table index

#### 3.2 Support Equipment

Smart Touch Control (EUT)	Samsung Electronics Co., Ltd. Model: RMCTPH	FCC ID : A3LRMCTPH S/N: N/A
Laptop PC	Samsung Electronics Co., Ltd. Model : NT-R520 0.29 m UART to USB shielded conversion cable	FCC DOC S/N: ZK6V93FS800012Y
a.c.-d.c. Adaptor	Chicony Power Technology Co., Ltd. Model : AD-6019R 1.5 m unshielded power cable	FCC DOC S/N: CNBA440024ADON897I2602
a.c.-d.c. Adaptor	Samsung Electronics Co., Ltd. Model : ATADM19EBE 1.5 m unshielded power cable	FCC DOC S/N: N/A

### 3.3 Setup Drawing

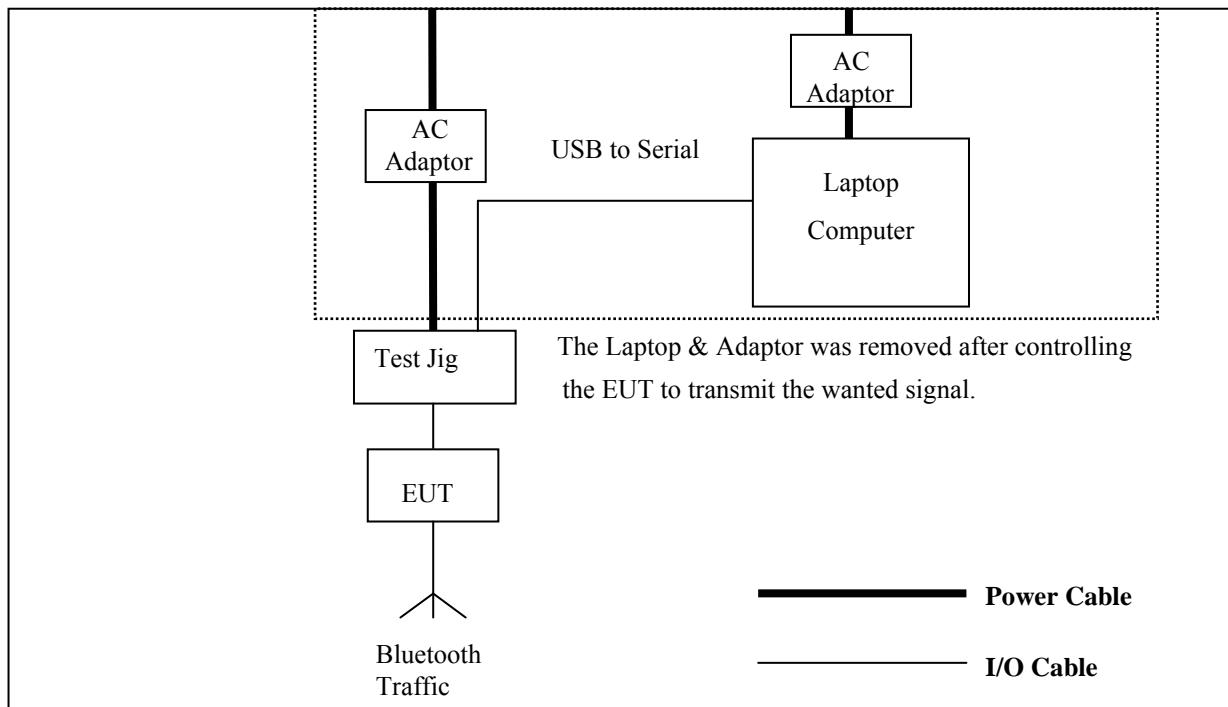

### **3.4 EUT Information**

The EUT is the Samsung Smart Touch Control FCC ID : A3LRMCTPH and IC : 649E-RMCTPH. This unit supports full qualified Bluetooth 3.0 with EDR standard system.

Specifications:

EUT Type	Smart Touch Control
Model Name	RMCTPH
Variant Model Name	RMCTPH1AP1
Brand Name	SAMSUNG
RF Frequency	2402 MHz ~ 2480 MHz
Peak Power Output (Conducted)	9.30 dBm
FCC Classification	FCC Part 15 Spread Spectrum Transmitter (DSS)
Method/System	Frequency Hopping Spread Spectrum (FHSS)
Channel Number	79
Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Gain	1.99 dBi (Peak)
Power	3.0 Vdc (Lithium Battery)
Size (W x H x D)	55 mm x 135 mm x 23 mm
Weight	66 g

## 4. SUMMARY OF TEST RESULTS

---

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	IC Paragraph No.	Result	Remark
Conducted Emission	15.207	RSS-GEN 7.2.4	N/A	Battery operation
Radiated Emission	15.209	RSS-210 A8.5	Complies	
20dB Bandwidth and Carrier Frequency Separation	15.247(a)(1)(iii)	RSS-210 A8.1	Complies	
Carrier Frequency Separation	15.247(a)(1)	RSS-210 A8.1(2)	Complies	
Transmitter Average Time of Occupancy	15.247(a)(1)(iii)	RSS-210 A8.1(4)	Complies	
Peak Power Output	15.247(b)(1)	RSS-210 A8.4(2)	Complies	
Conducted Spurious Emission	15.247(d)	RSS-210 A8.5	Complies	
Radiated Spurious Emission	15.247(d)	RSS-210 A8.5	Complies	
Number of Hopping channels	15.247(a)(1)(iii)	RSS-210 A8.1(4)	Complies	

## 5. RECOMMENDATION/CONCLUSION

---

The data collected shows that the **SAMSUNG Smart Touch Control** FCC ID : A3LRMCTPH and IC : 649E-RMCTPH is in compliance with Part 15 Subpart C 15.247 of the FCC Rules and RSS-210 of the IC.

## 6. ANTENNA REQUIREMENTS

---

### §15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the **Samsung Smart Touch Control** FCC ID : A3LRMCTPH and IC : 649E-RMCTPH is **permanently attached** and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

## 7. DESCRIPTION OF TESTS

### 7.1 Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure. It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6. A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room. Rohde & Schwarz (ESH3-Z5) and (ESH2-Z5) of the 50 ohm/50  $\mu$ H Line Impedance Stabilization Network (LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN (ESH3-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH2-Z5). Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ". If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs. All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentinefashion) to a 1 meter length. Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time. The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30). The detector functions were set to CISPR quasi-peak mode & average mode. The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

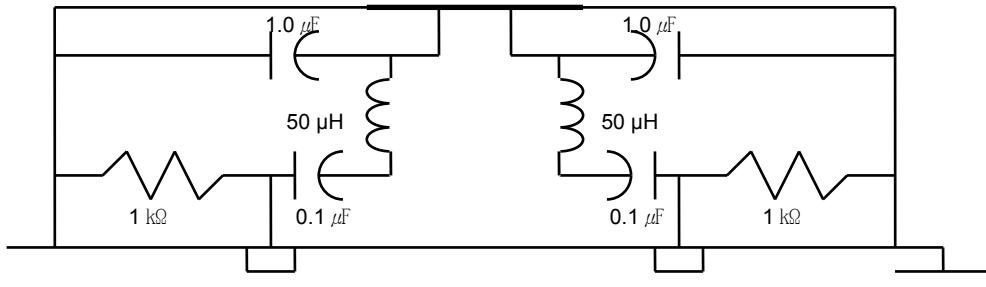


Fig. 2. LISN Schematic Diagram

## 7.2 Radiated Emissions

### Test Procedure

The measurement was performed at the test site that is specified in accordance with ANSI C63.4-2003 and ANCI C63.10-2009.

The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna and 30 to 1000 MHz using Bi-conical log Antenna. Above 1 GHz, Horn antenna was used.

The test equipment was placed on turntable with 0.8 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The receiver bandwidth was set to 120 kHz for measurements below 1 GHz. For the measurement above 1 GHz, Radiated Peak measurements were taken with RBW set to 1 MHz and VBW was set to 1 MHz with peak detector. Average measurements were taken with RBW 1 MHz and VBW was set to 1 kHz( $> 1/\tau$  Hz where  $\tau$  is pulse width on second) with peak detector.

### Radiated emission limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3


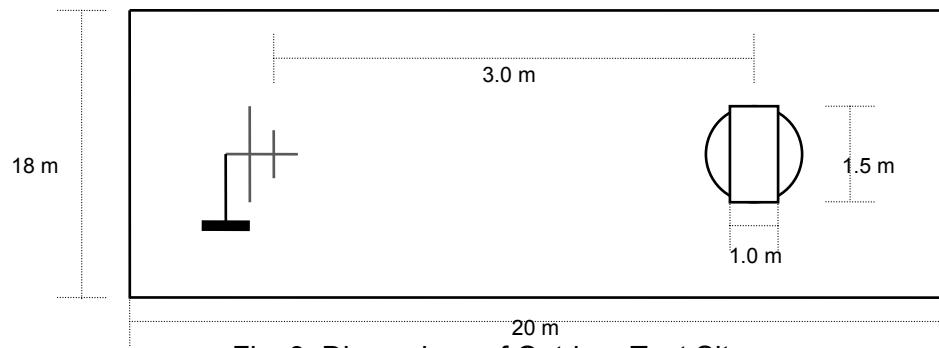


Fig. 3. Dimensions of Outdoor Test Site

### 7.3 20 dB Bandwidth and Carrier Frequency Separation

#### Test Setup



#### Test Procedure

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW


Sweep = auto

Detector function = peak

Trace = max hold

### 7.4 Transmitter Average Time of Occupancy

#### Test Setup



#### Test Procedure

The transmitter output is connected to a spectrum analyzer. The following spectrum analyzer setting is used.

Span = Zero span, centered on a hopping channel

RBW = 1 MHz, VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel


Detector function = Peak

Trace = Single sweep

Use the marker-delta function to determine the width of pulse

## 7.5 Number of Hopping Channels

### Test Setup




### Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, In either a single sweep or in multiple continuous sweeps. The RBW is set to 1 % of the span.

The spectrum analyzer is set to Max Hold.

## 7.6 Maximum Peak Output Power

### Test Setup




### Test Procedure

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer. The RBW of spectrum analyzer is set to 3 MHz and VBW is set to the 3 MHz. The sweep time is coupled.

## 7.7 Conducted Spurious Emission

### Test Setup



### Test Procedure

The transmitter is connected to the spectrum analyzer.

The RBW of spectrum analyzer is set to 100 kHz and VBW is set to the 300 kHz.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the Lowest, middle and highest channels.

## 8. TEST DATA

### 8.1 Radiated Emissions

#### FCC §15.209, IC RSS-210 A8.5

Frequency (MHz)	Reading (dB $\mu$ V/m)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
132.67	42.60	V	205	197	-27.0	15.6	43.5	27.9
191.99	38.40	H	170	301	-25.2	17.4	43.5	26.1
319.10	39.40	V	400	4	-20.2	19.2	46.0	26.8
359.99	32.70	H	100	90	-18.8	21.1	46.0	24.9
408.00	44.50	H	100	258	-17.2	27.3	46.0	18.7
432.01	39.50	H	100	250	-16.7	22.8	46.0	23.2

#### Radiated Measurements at 3 meters

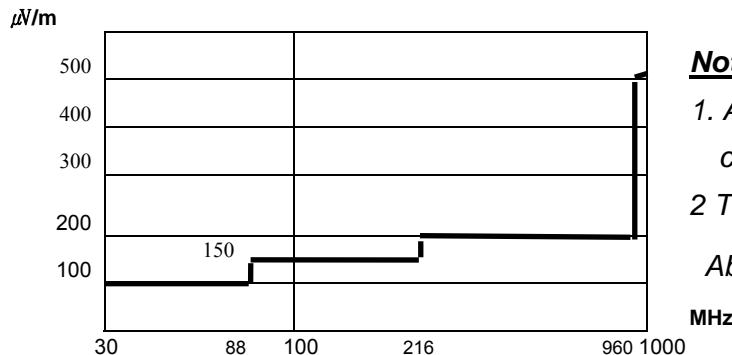


Fig. 4. Limits at 3 meters

#### Note(s)

1. All modes were measured and the worst-case emission was reported.
- 2 The radiated limits are shown on Figure 4.
- Above 1GHz the limit is 500  $\mu$ V/m.

3. \*Pol. H = Horizontal V = Vertical

4. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.

5. Measurements using CISPR quasi-peak mode below 1 GHz.

6. The radiated emissions testing were made by rotating the receive antenna with horizontal, Vertical polarization. The worst date was recorded.

## TEST DATA

---

### **8.2 20 dB Modulated Bandwidth**

#### **FCC §15.247(a)(1)(iii), IC RSS-210 A8.1**


**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

**Result:**

Modulation Mode	Frequency(MHz)	Result(kHz)	Limit(kHz)
GFSK	2402	970	Non specified
GFSK	2441	967	Non specified
GFSK	2480	969	Non specified
$\pi/4$ DQPSK	2402	1261	Non specified
$\pi/4$ DQPSK	2441	1262	Non specified
$\pi/4$ DQPSK	2480	1266	Non specified
8DPSK	2402	1260	Non specified
8DPSK	2441	1260	Non specified
8DPSK	2480	1267	Non specified

## PLOTS OF EMISSIONS

### 20 dB Bandwidth, Lowest Channel (2402 MHz, GFSK Mode)

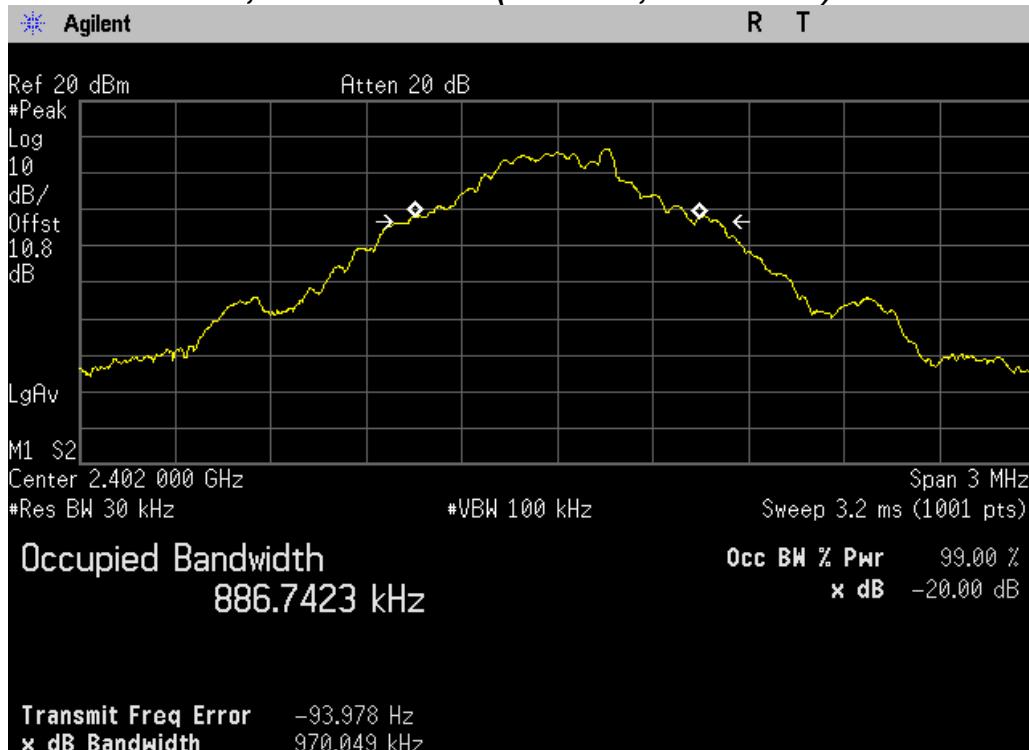


### 20 dB Bandwidth, Middle Channel (2441 MHz, GFSK Mode)




## **PLOTS OF EMISSIONS**

### **20 dB Bandwidth, Highest Channel (2480 MHz, GFSK Mode)**

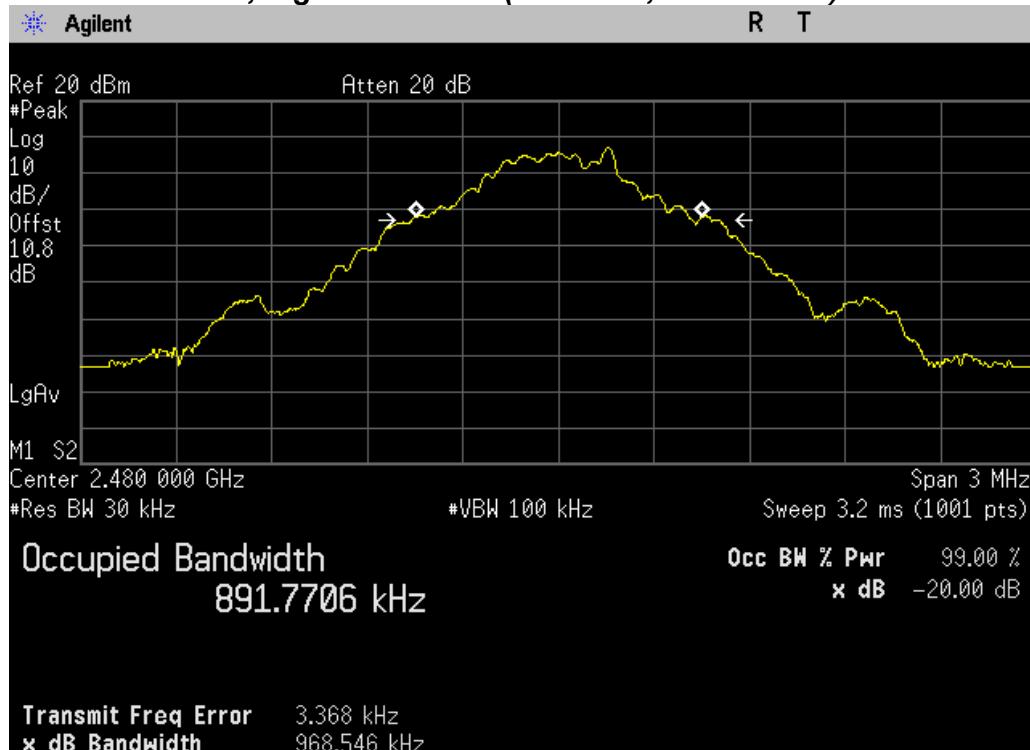


### **20 dB Bandwidth, Lowest Channel (2402 MHz, π/4DQPSK Mode)**

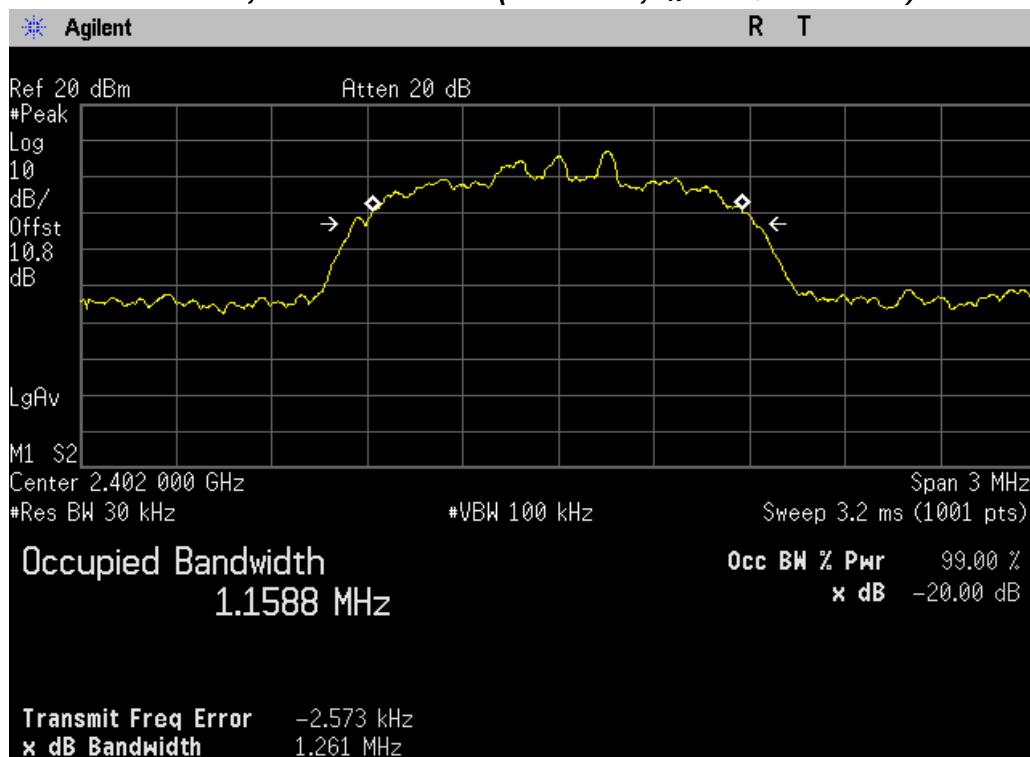


## **PLOTS OF EMISSIONS**

### **20 dB Bandwidth, Middle Channel (2441 MHz, $\pi/4$ DQPSK Mode)**

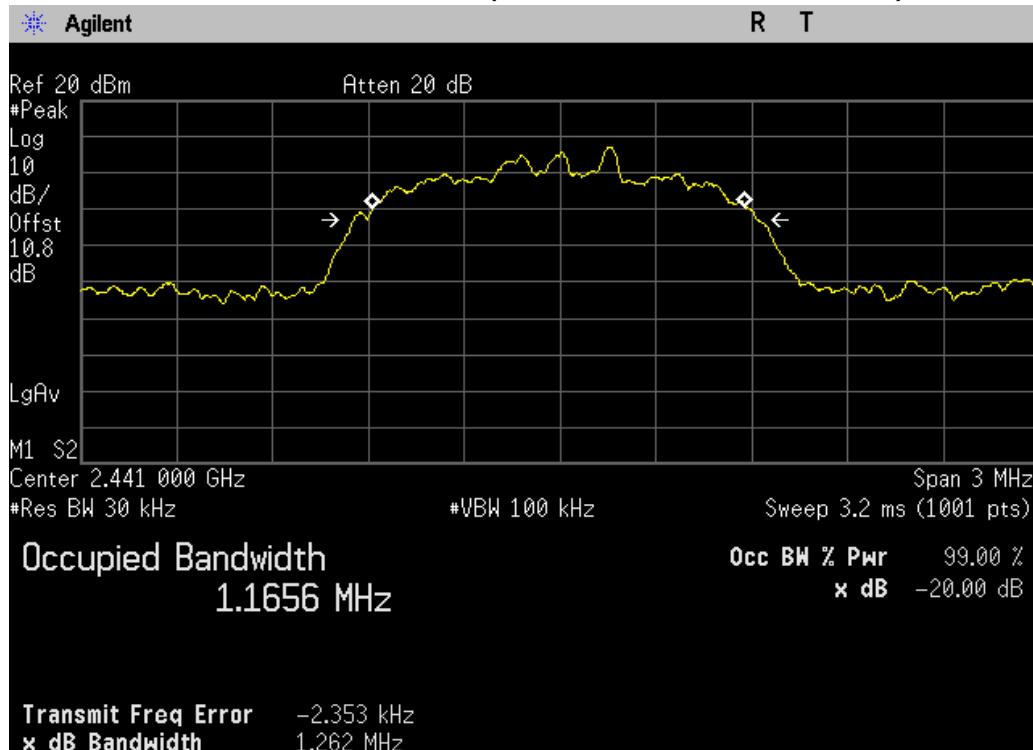


### **20 dB Bandwidth, Highest Channel (2480 MHz, $\pi/4$ DQPSK Mode)**

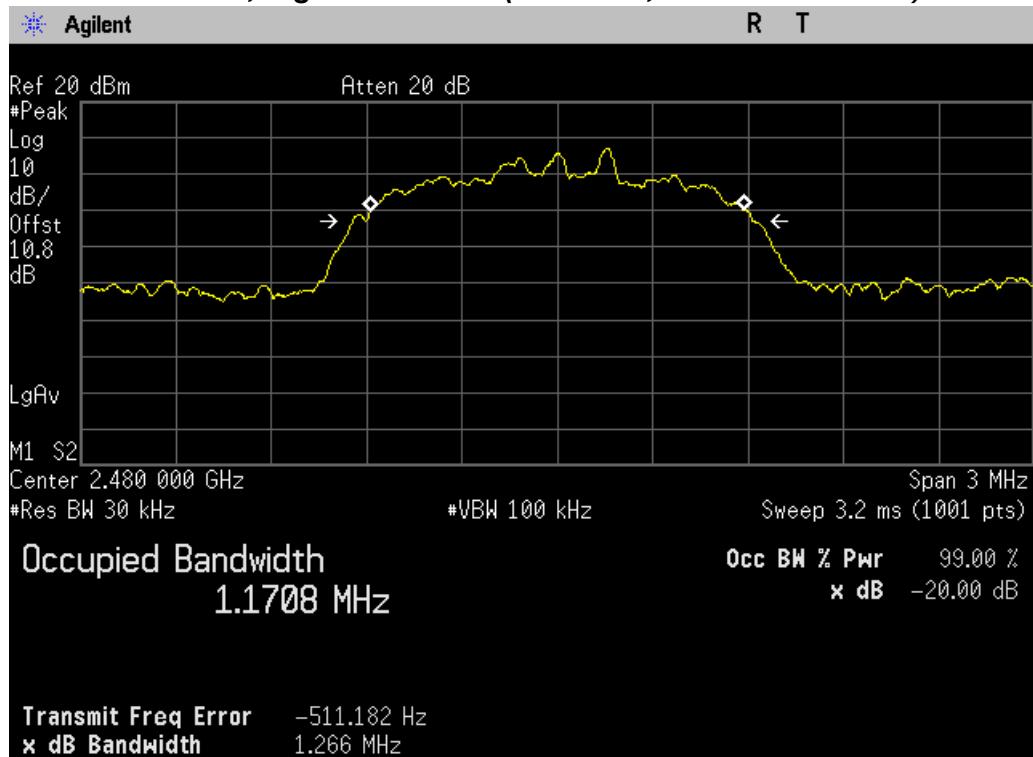


## PLOTS OF EMISSIONS


### 20 dB Bandwidth, Lowest Channel (2402 MHz, 8DPSK Mode)

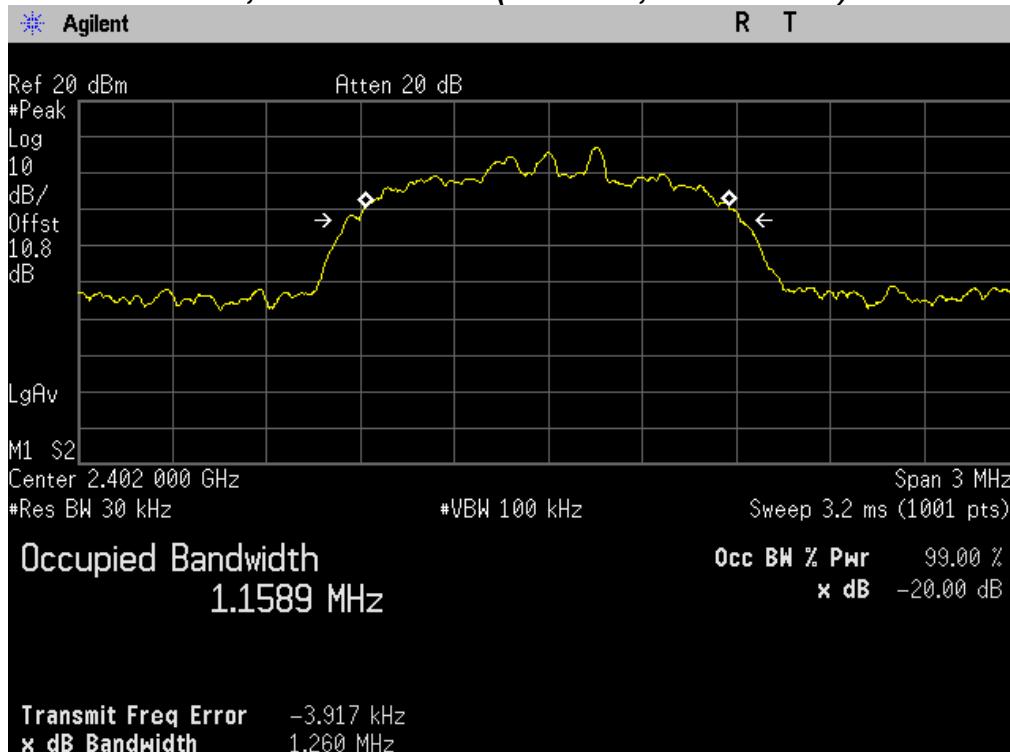

### 20 dB Bandwidth, Middle Channel (2441 MHz, 8DPSK Mode)

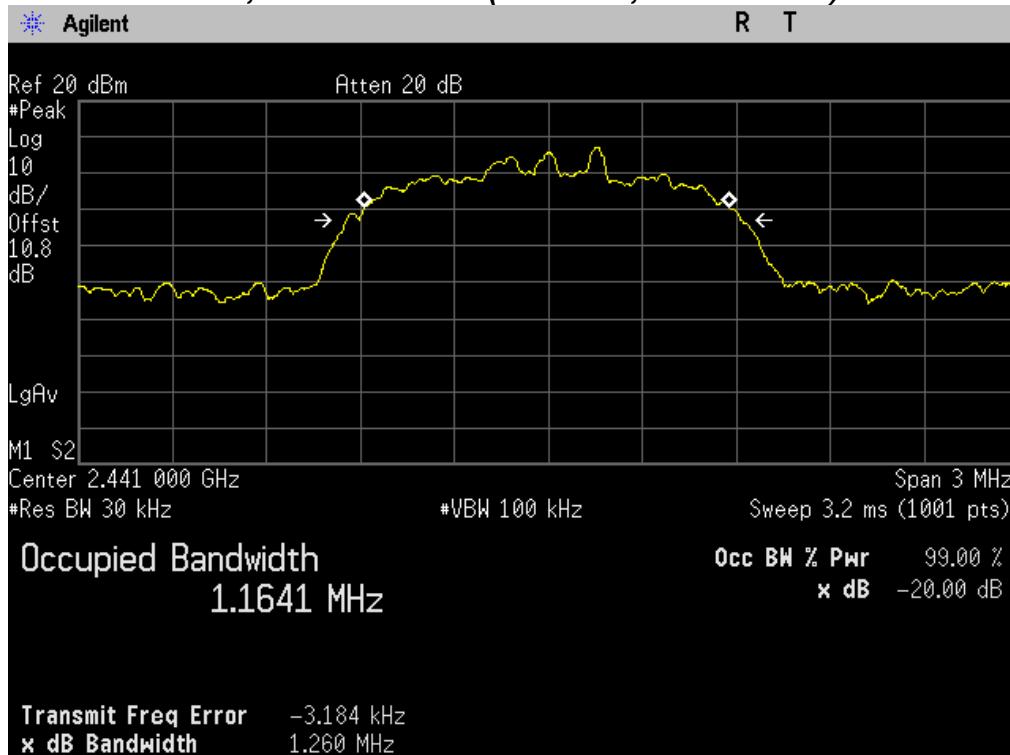

## PLOTS OF EMISSIONS

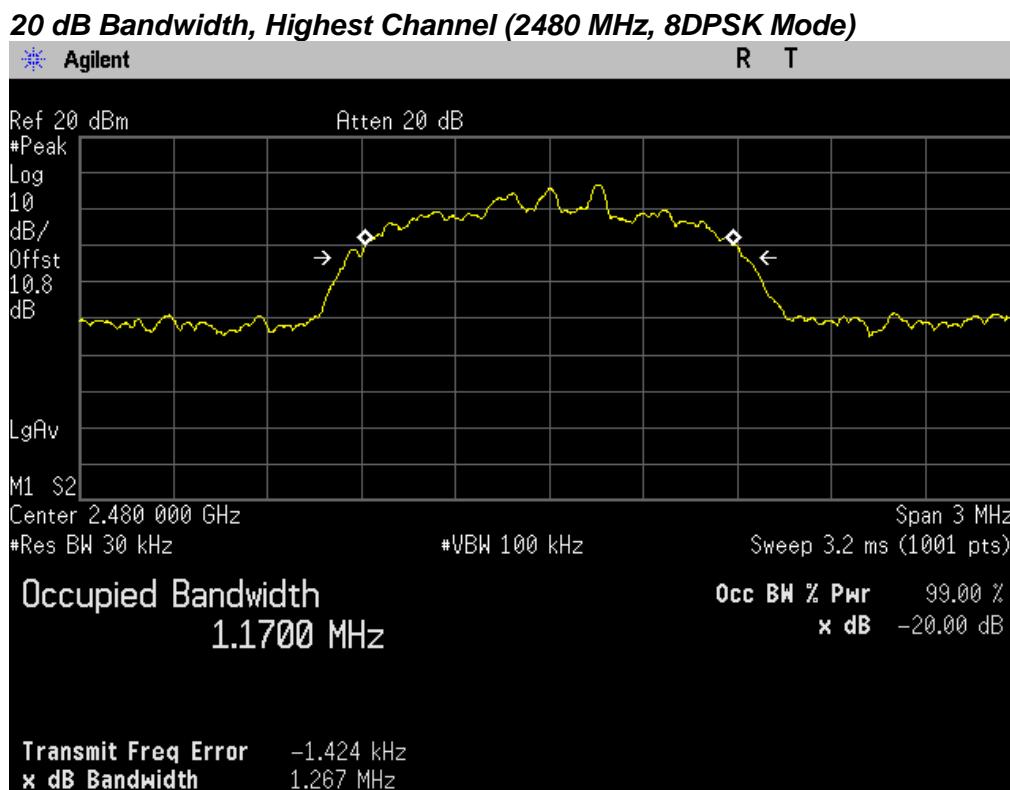

## TEST DATA

---

### 8.3 Carrier Frequency Separation

FCC §15.247(a)(1), IC RSS-210 A8.1(2)

Test Mode : Set to Hopping mode

Result:


Modulation Mode	Carrier Frequency Separation (kHz)	Limit (2 / 3 of 20dB Bandwidth) (kHz)	Margin (kHz)
GFSK	1000	647	353
$\pi/4$ DQPSK	1000	844	156
8DPSK	1000	845	155

Note(s)


The EUT complies with the minimum channel separation requirement when it is operating **1x/EDR mode using 79 channels** and when operating in **AFH mode using 20 channels**.

## **PLOTS OF EMISSIONS**

### **Carrier Frequency Separation (GFSK Mode)**

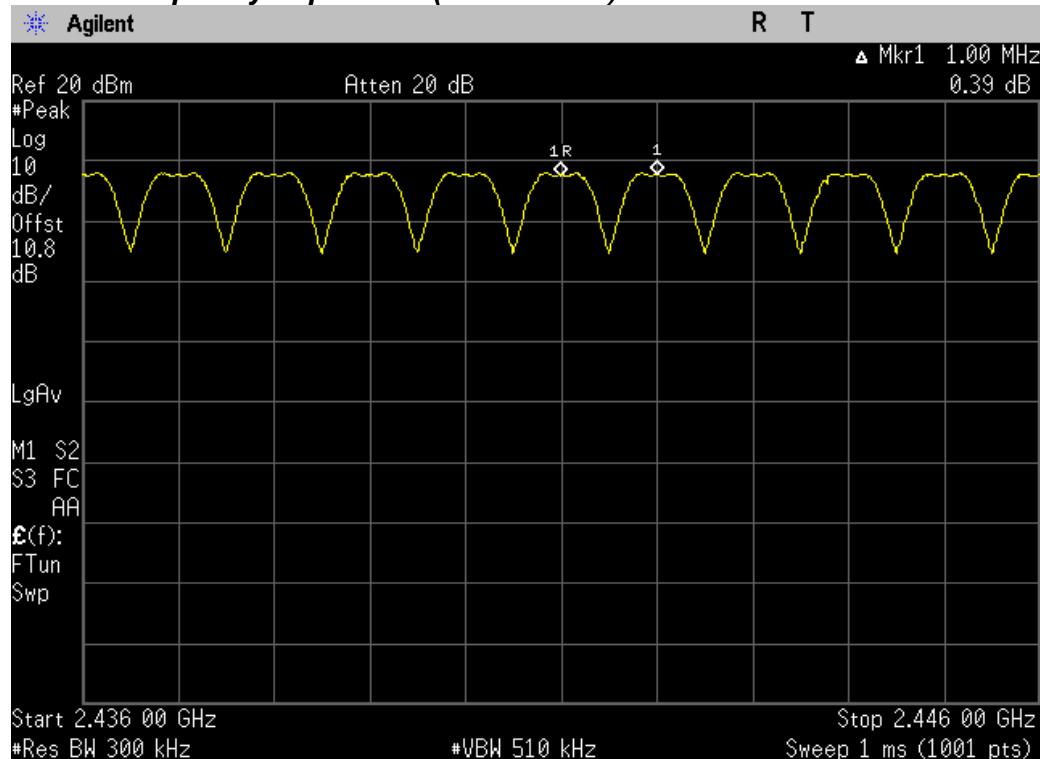


### **Carrier Frequency Separation ( $\pi/4$ DQPSK Mode)**

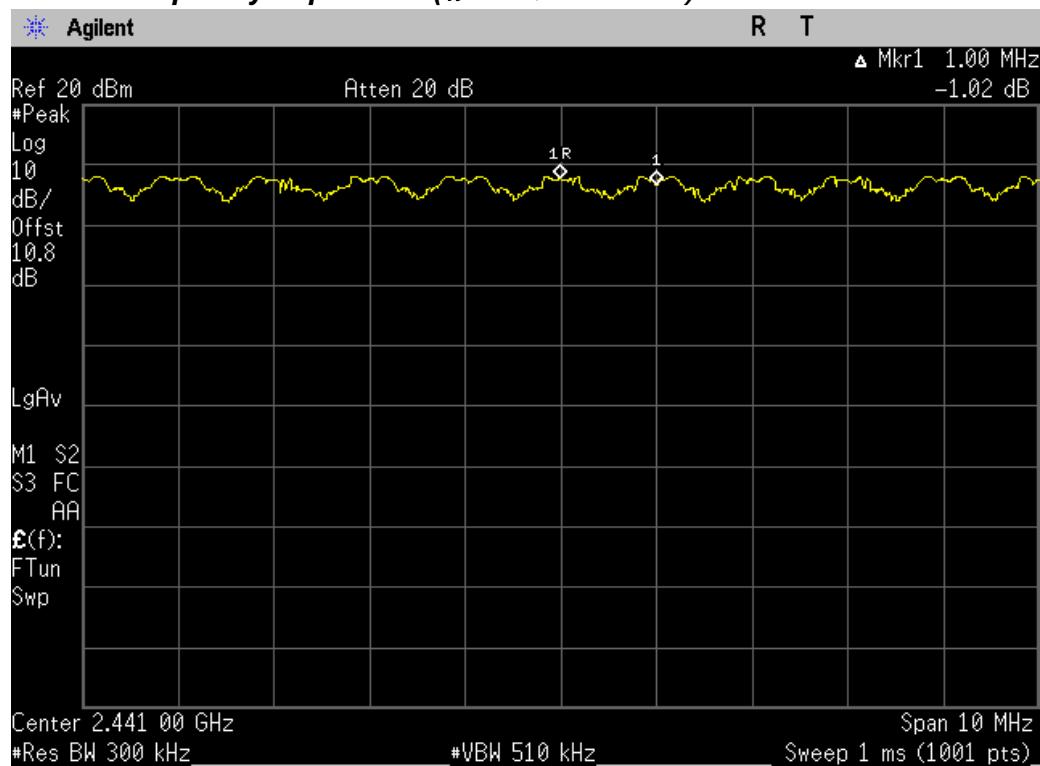

## PLOTS OF EMISSIONS

### Carrier Frequency Separation (8DPSK Mode)

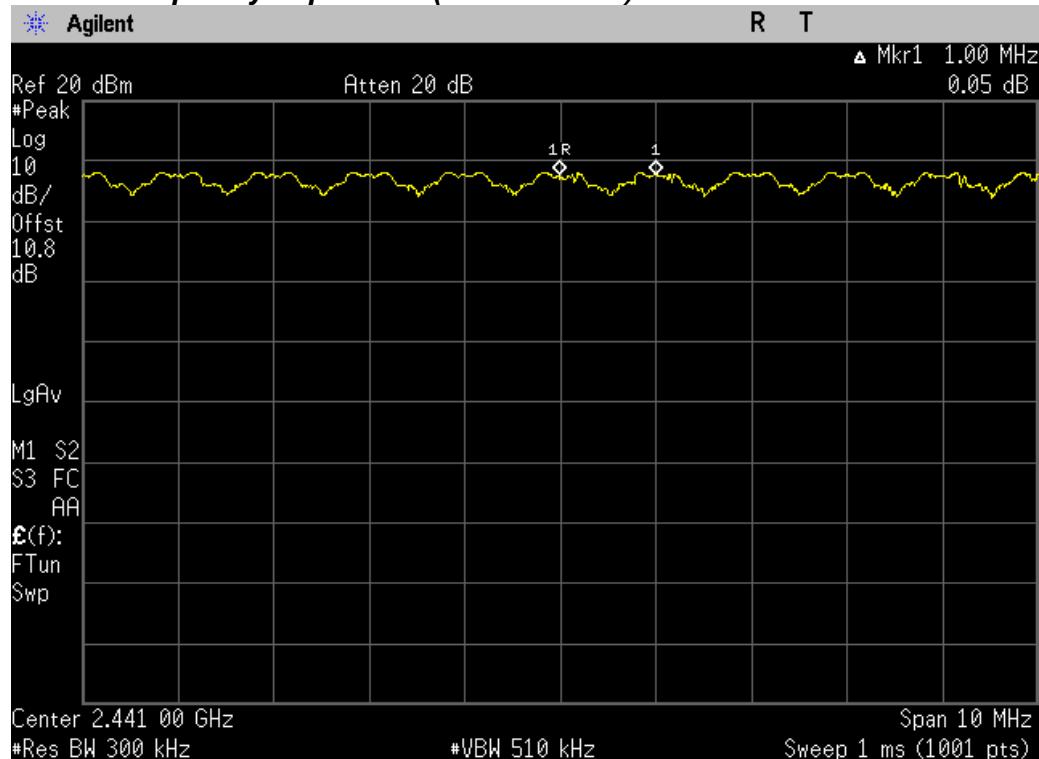

## TEST DATA


### 8.4 Transmitter Average Time of Occupancy

FCC §15.247(a)(1)(iii), IC RSS-210 A8.1(4)

Test mode : Set to Hopping mode

Result:

Mode	Pulse width (ms)	<sup>*)</sup> Numbers of slots	<sup>**) Average time of Occupancy(ms)</sup>	Limit (ms)	Margin (ms)
1x/EDR	2.88	106.7	307.3	≤400	92.70
AFH	2.88	53.3	153.5	≤400	246.5

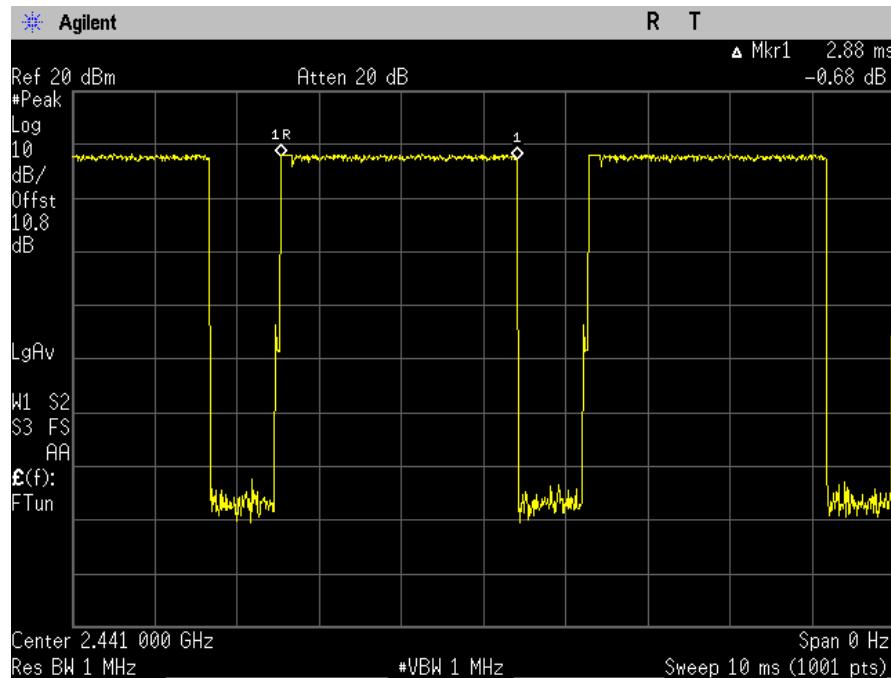

#### 1x/EDR mode

- 1) This result was measured at DH5 mode in **1x/EDR mode**, which has longest time in one transmission burst.
- 2) Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s and 79 hopping channels.
- 3) The average time of occupancy in the specified 31.6 second period (79 channels x 0.4 s) is equal to pulse width x (hopping rate / 6) / 79 x (0.4 x hopping channels).

- 4) \*) Numbers of slots in 31.6 sec =  $(1600 / 6) / 79 \times 31.6$
- 5) \*\*) Average time of Occupancy =  $2.88 \text{ ms} \times 106.7 = 307.3 \text{ ms}$

### AFH mode

- 1) This result was measured at DH5 mode in **AFH mode**, which has longest time in one transmission burst.
- 2) Bluetooth AFH mode has a channel hopping rate of 800 hops/s and 20 hopping channels.
- 3) The average time of occupancy in the specified 8 second period (20 channels  $\times$  0.4 s) is equal to pulse width  $\times$  (hopping rate / 6) / 20  $\times$  (0.4  $\times$  hopping channels).
- 4) \*) Numbers of slots in 20 sec =  $(800 / 6) / 20 \times 8$
- 5) \*\*) Average time of Occupancy =  $2.88 \text{ ms} \times 53.33 = 153.6 \text{ ms}$

## TEST DATA

### 8.5 Number of Hopping Channels


#### FCC §15.247(a)(1)(iii), IC RSS-210 A8.1(4)

Test mode : Set to Hopping mode


#### Result:

The EUT complies with the minimum number of hopping channels when it is operating **1x/EDR mode using 79 channels** and when operating in **AFH mode using 20 channels**.

**Top half of Authorized band(1x mode)**

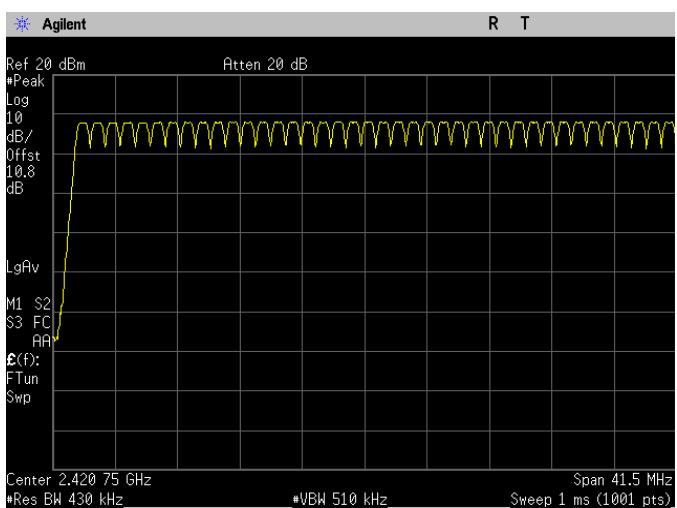

**Bottom half of Authorized band(1x mode)**

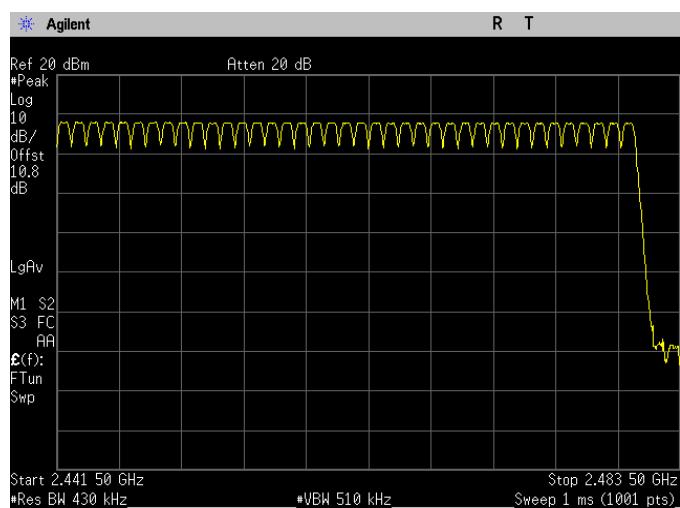

## TEST DATA

---

### 8.6 Peak Power Output

#### FCC §15.247(b)(1), IC RSS-210 A8.4(2)

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

**Result:**

Modulation	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
GFSK	2402	8.03	30.00	21.97
GFSK	2441	8.13	30.00	21.87
GFSK	2480	7.92	30.00	22.08
$\pi/4$ DQPSK	2402	8.84	30.00	21.16
$\pi/4$ DQPSK	2441	8.88	30.00	21.12
$\pi/4$ DQPSK	2480	8.56	30.00	21.44
8DPSK	2402	9.21	30.00	20.79
8DPSK	2441	9.30	30.00	20.70
8DPSK	2480	8.97	30.00	21.03


#### Note(s)

The following formula was used for spectrum offset:


$$\text{Spectrum offset (dB)} = \text{Attenuator (dB)} + \text{Cable Loss (dB)} + \text{SMA Type Connector Loss (dB)}$$

## PLOT OF TEST DATA

### Maximum Peak Output Power, Lowest channel (2402 MHz, GFSK mode)

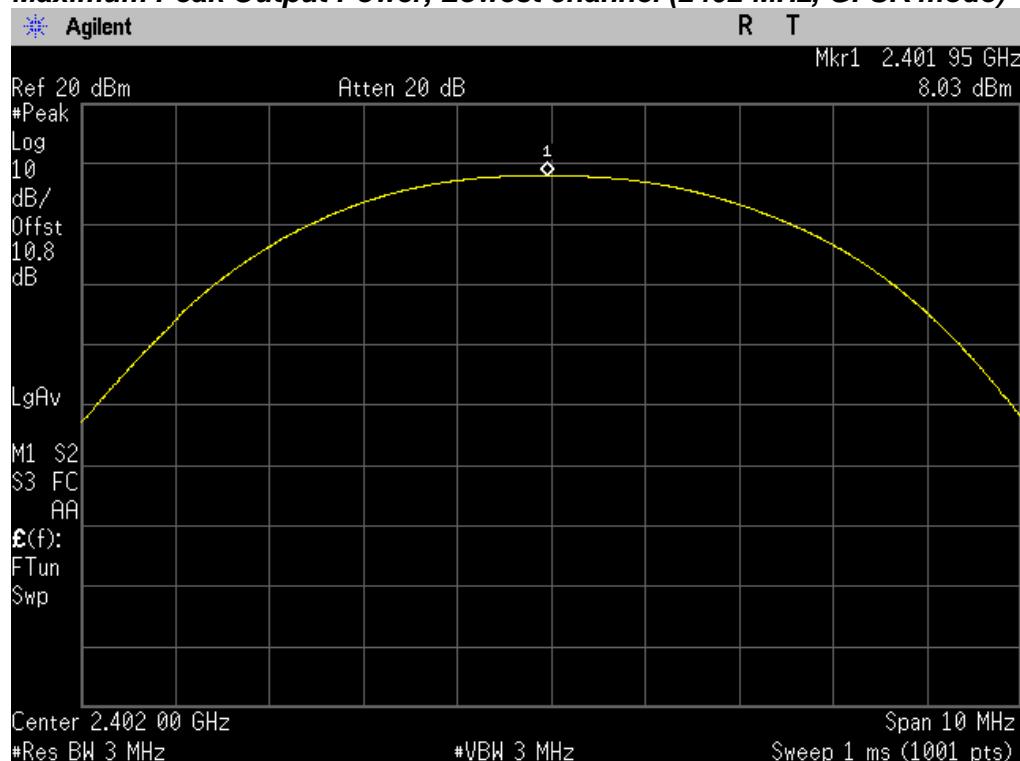


### Maximum Peak Output Power, Middle channel (2441 MHz, GFSK mode)

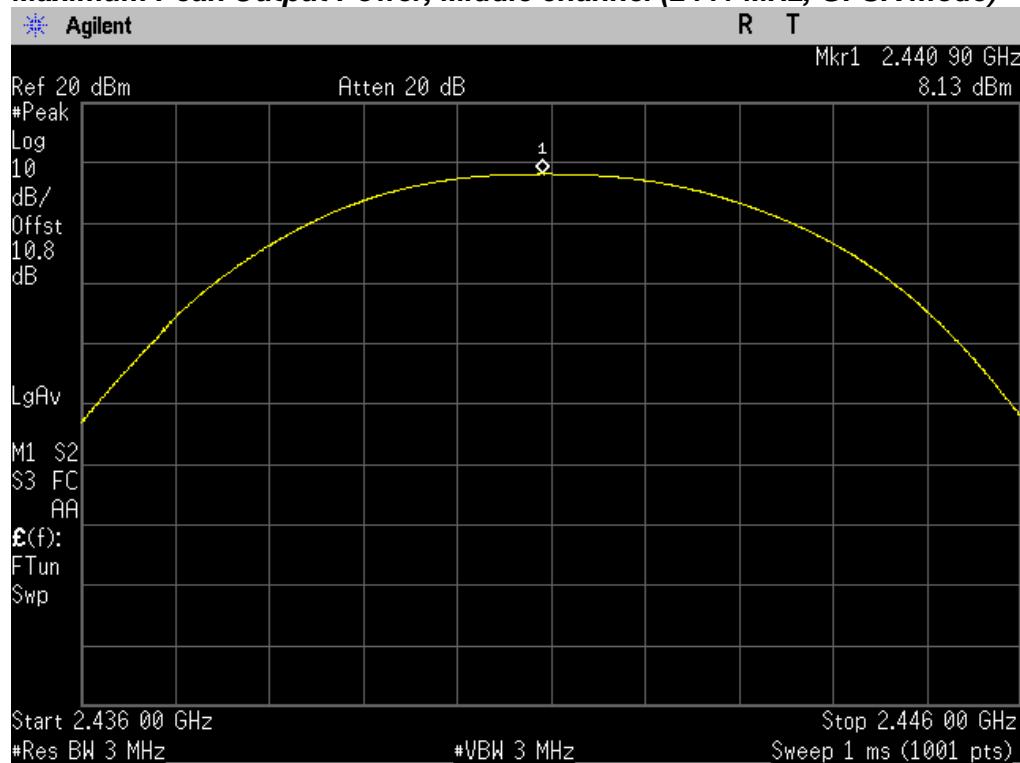


## PLOT OF TEST DATA

### Maximum Peak Output Power, Highest channel (2480 MHz, GFSK mode)

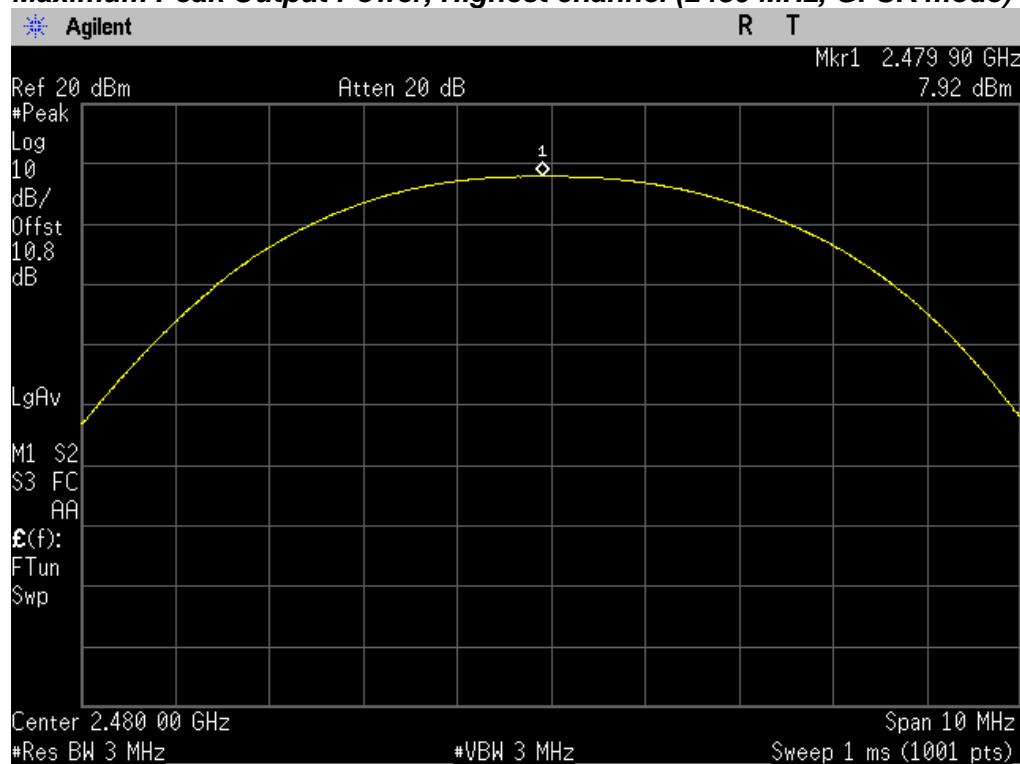


### Maximum Peak Output Power, Lowest channel (2402 MHz, $\pi/4$ DQPSK)

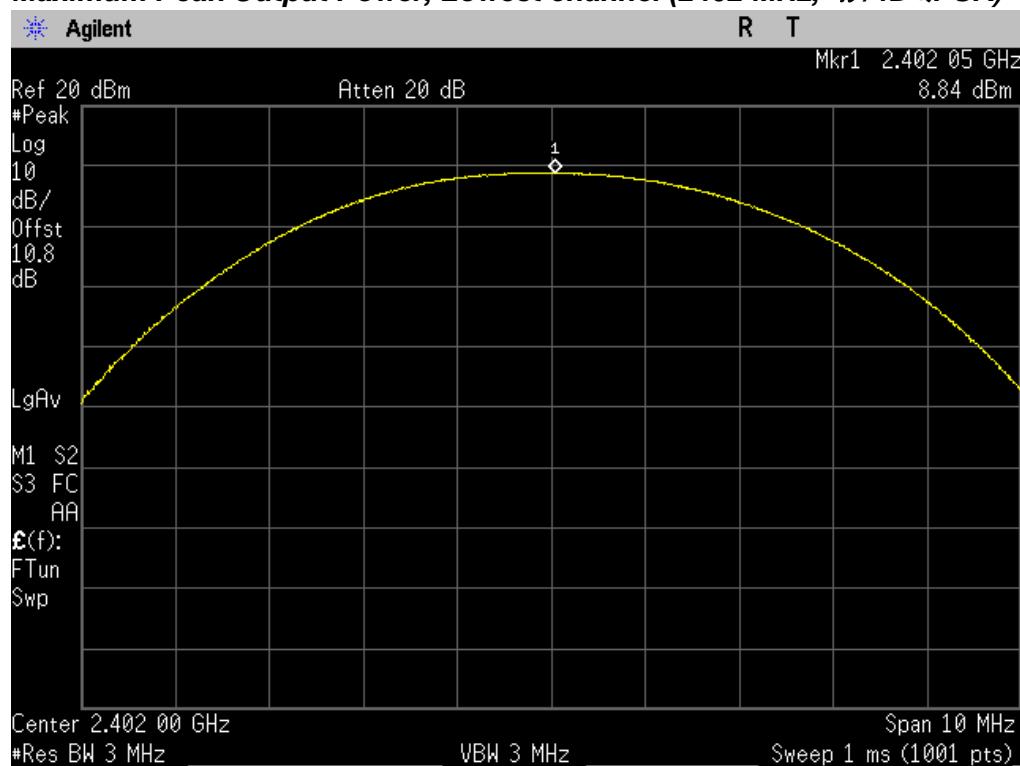


## PLOT OF TEST DATA

### Maximum Peak Output Power, Middle channel (2441 MHz, $\pi/4$ DQPSK)

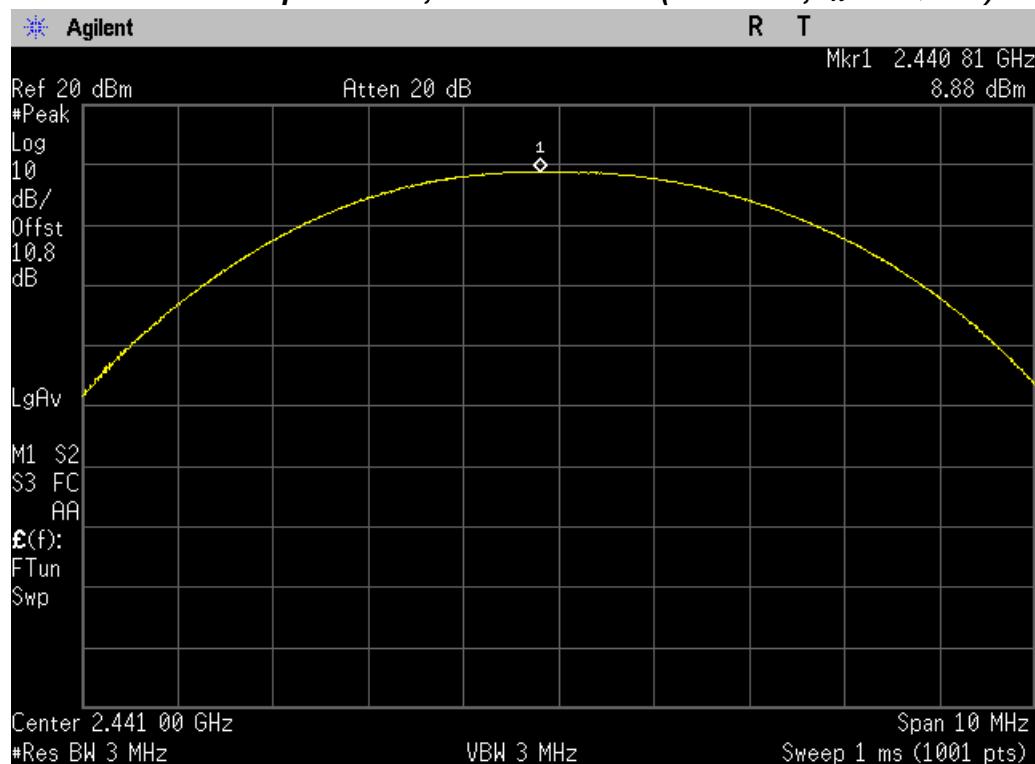


### Maximum Peak Output Power, Highest channel (2480 MHz, $\pi/4$ DQPSK)

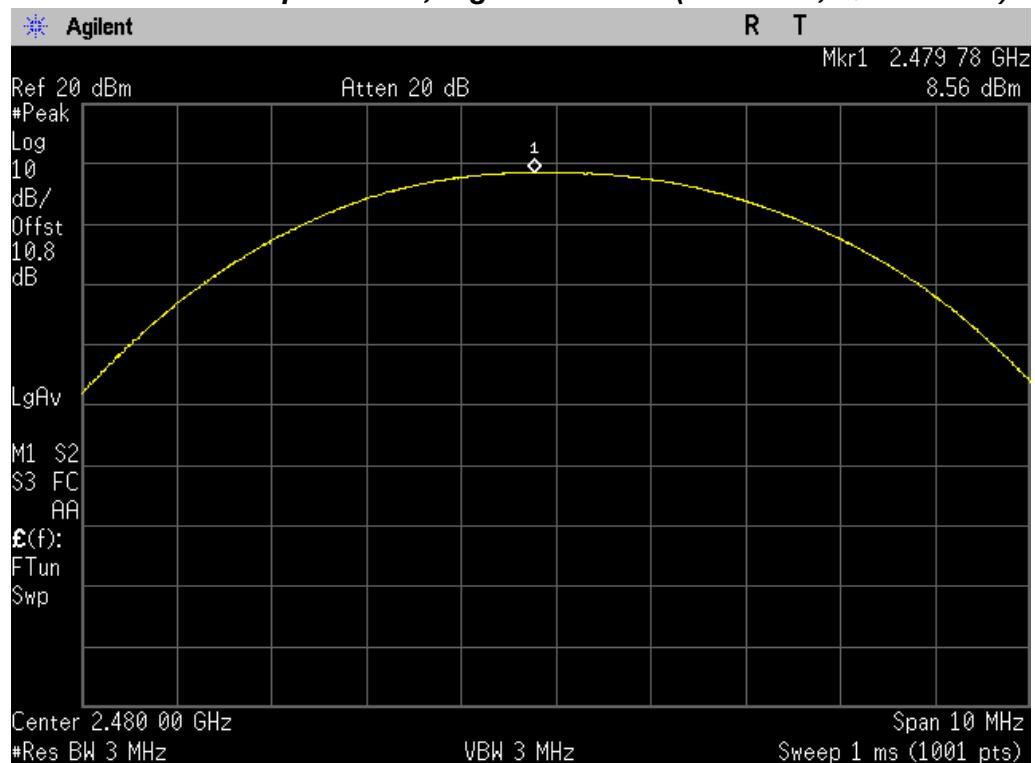


## PLOT OF TEST DATA


### Maximum Peak Output Power, Lowest channel (2402 MHz, 8DPSK)

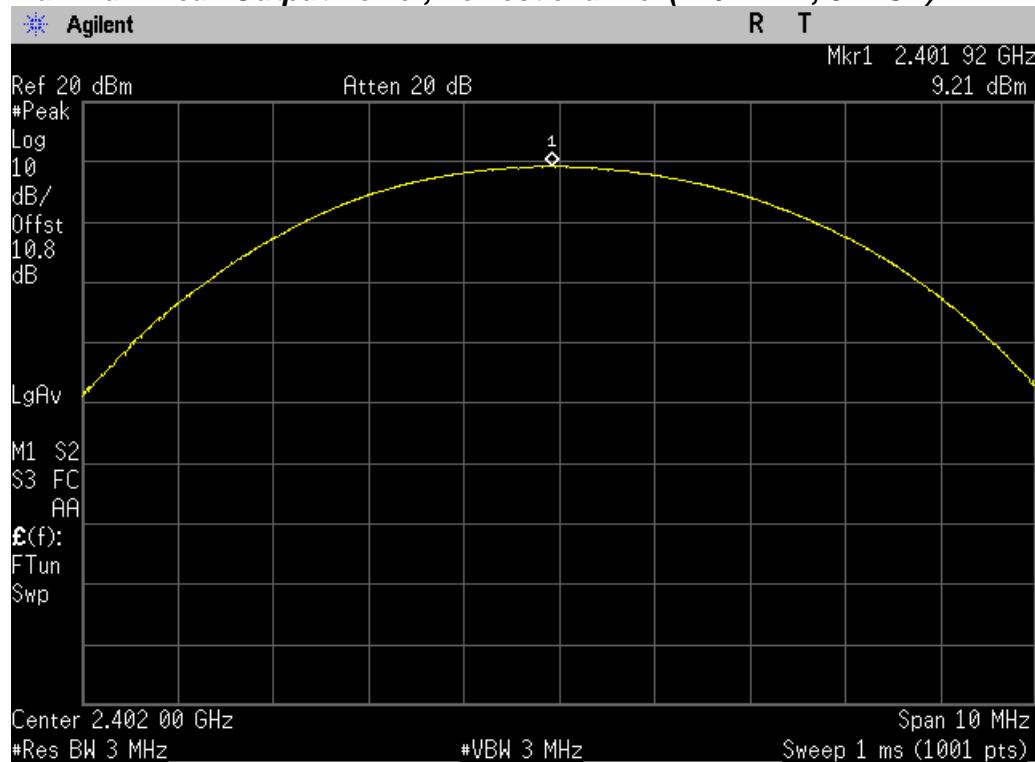

### Maximum Peak Output Power, Middle channel (2441 MHz, 8DPSK)

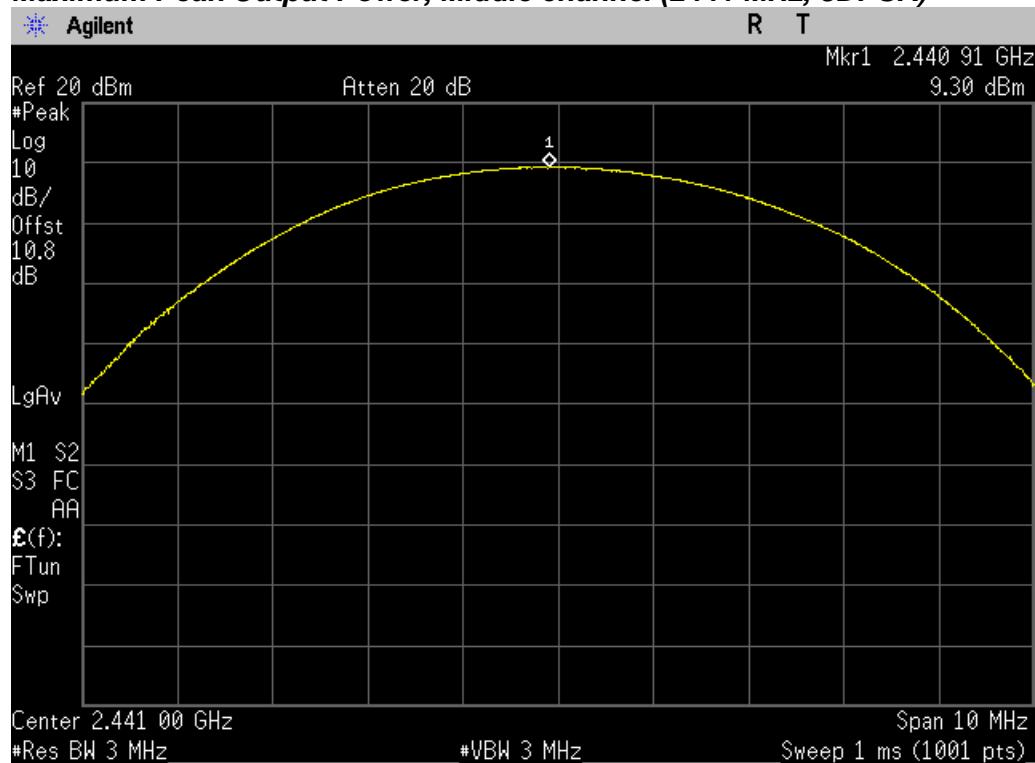

## PLOT OF TEST DATA

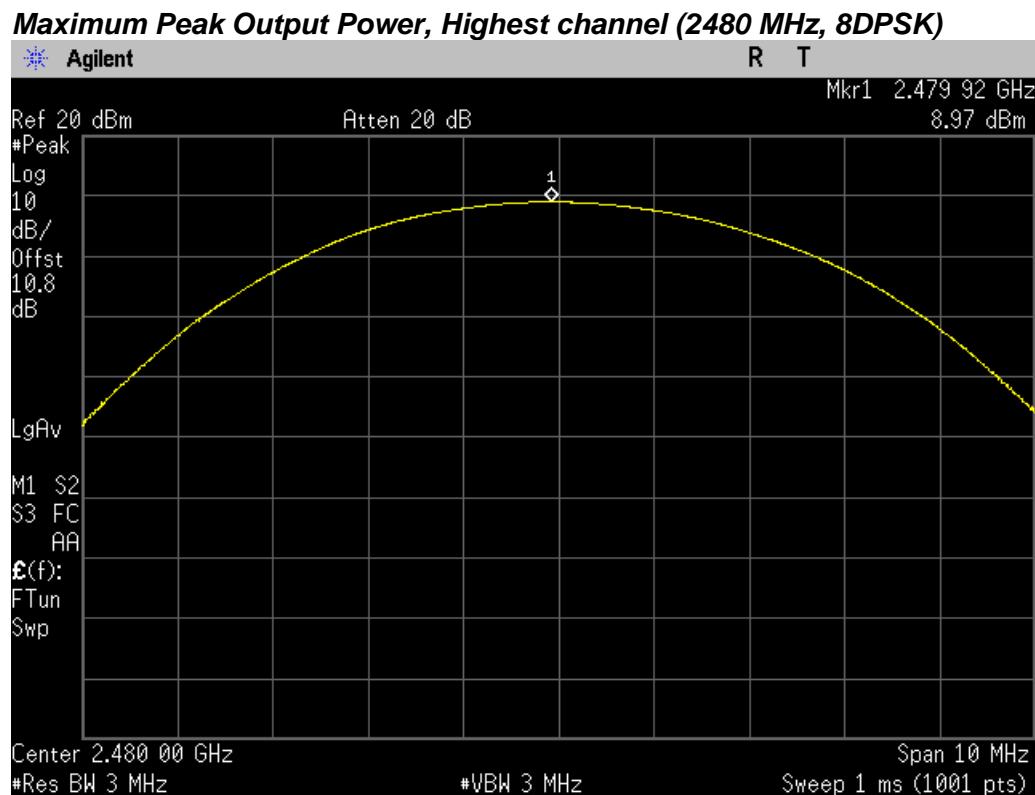

## TEST DATA

---

### 8.7 Conducted Spurious Emission

#### FCC §15.247(d), IC RSS-210 A8.5

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

**Result:**


Modulation Mode	Frequency(MHz)	Result	Limit(dBc)
GFSK	2402	More than 20 dBc	20
GFSK	2441	More than 20 dBc	20
GFSK	2480	More than 20 dBc	20
$\pi/4$ DQPSK	2402	More than 20 dBc	20
$\pi/4$ DQPSK	2441	More than 20 dBc	20
$\pi/4$ DQPSK	2480	More than 20 dBc	20
8DPSK	2402	More than 20 dBc	20
8DPSK	2441	More than 20 dBc	20
8DPSK	2480	More than 20 dBc	20

#### Note(s)


*The cable and attenuator loss from 30 MHz to 25 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.*

## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2402 MHz, GFSK Mode)

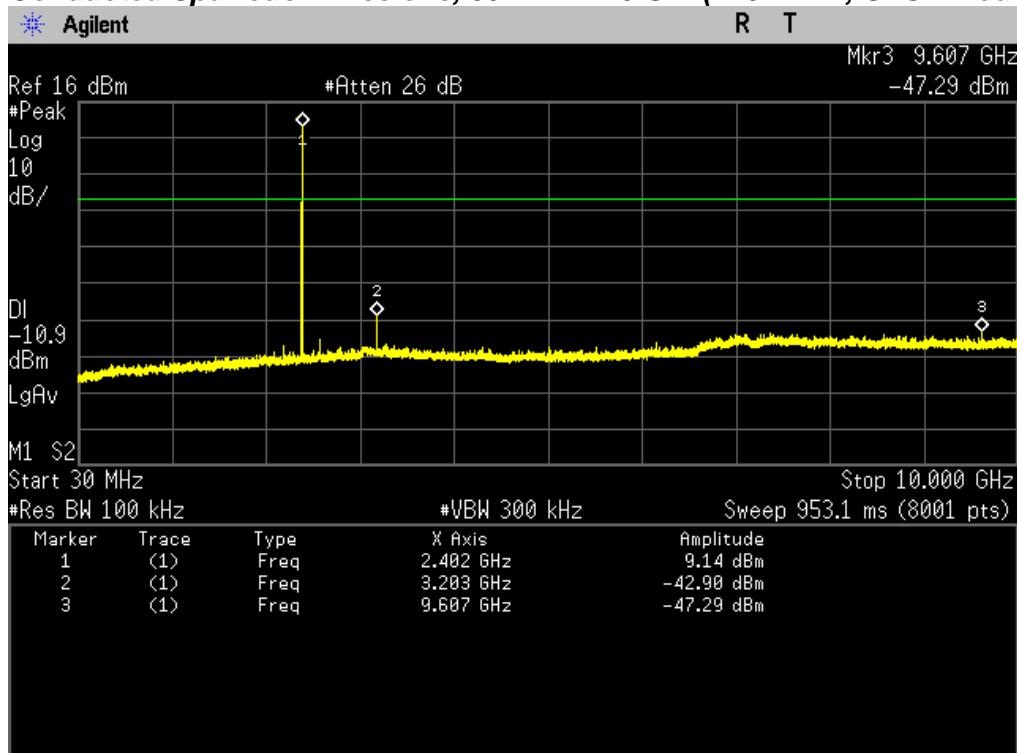


### Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2402 MHz, GFSK Mode)

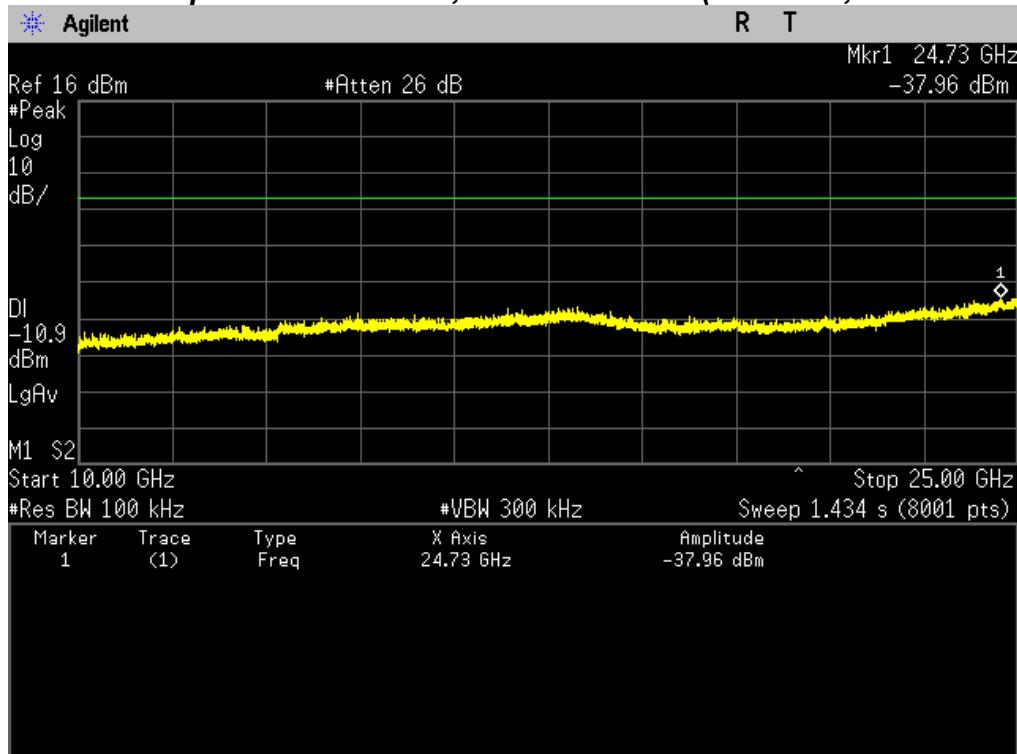


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2441 MHz, GFSK Mode)

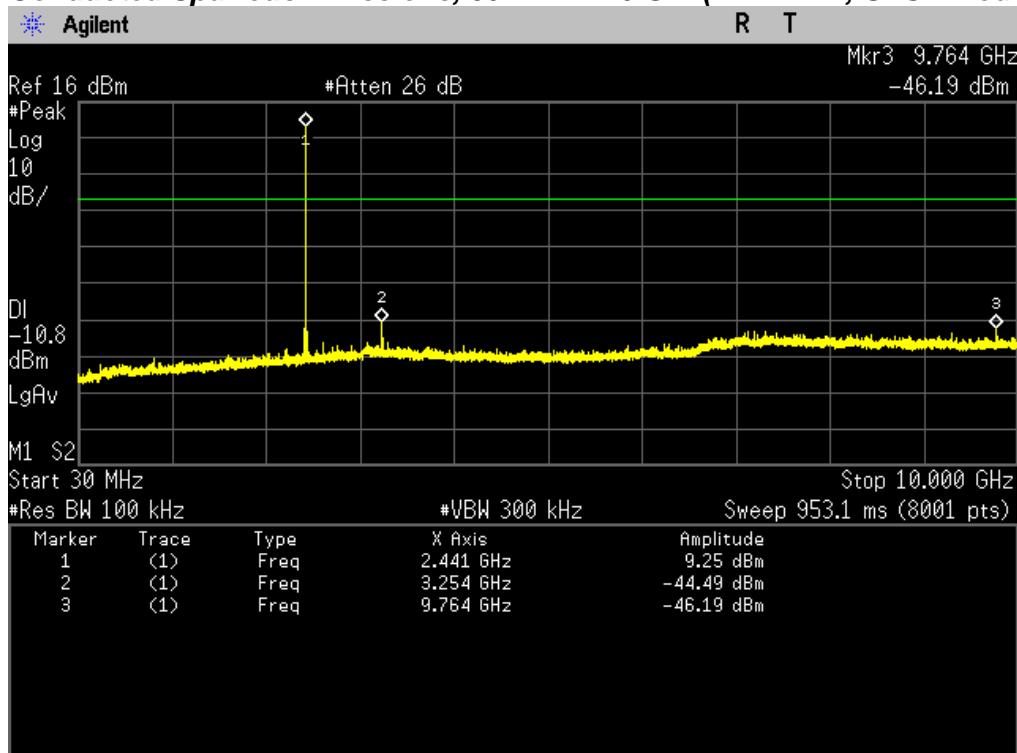


### Conducted Spurious Emissions, 10 GHz ~ 25GHz(2441 MHz, GFSK Mode)

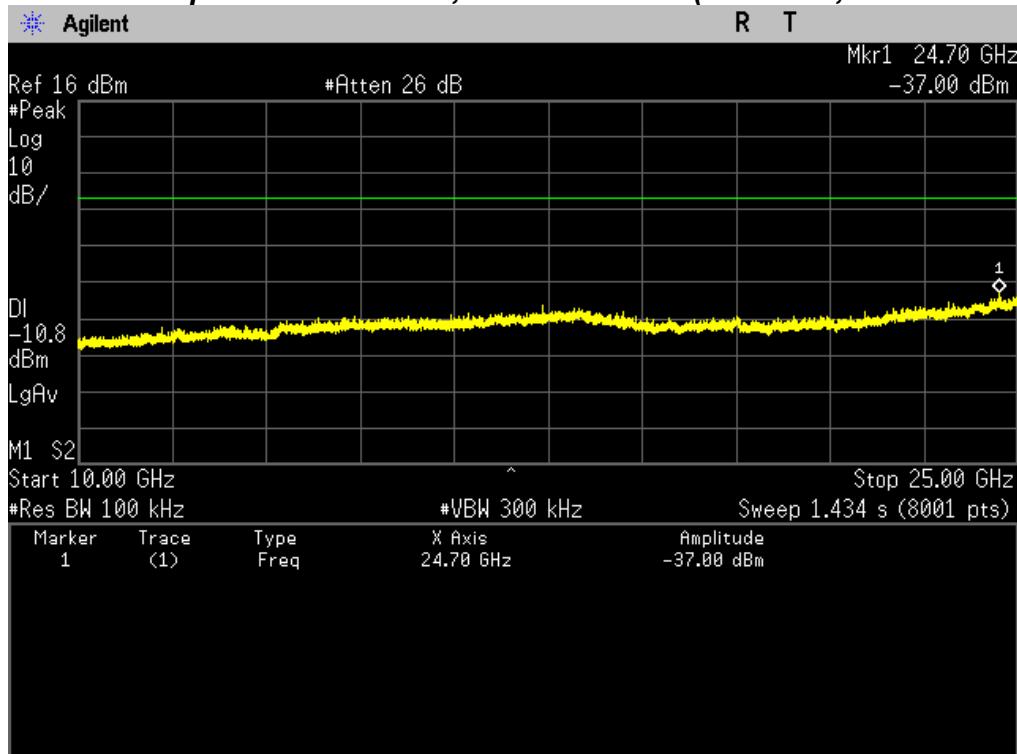


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2480 MHz, GFSK Mode)

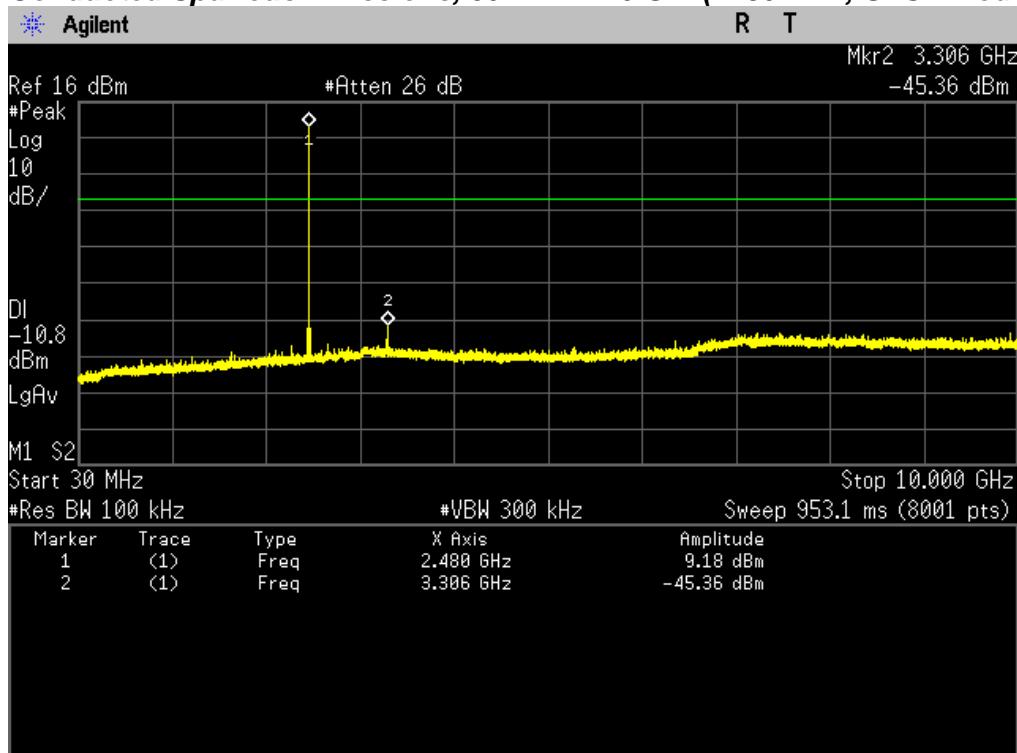


### Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2480 MHz, GFSK Mode)

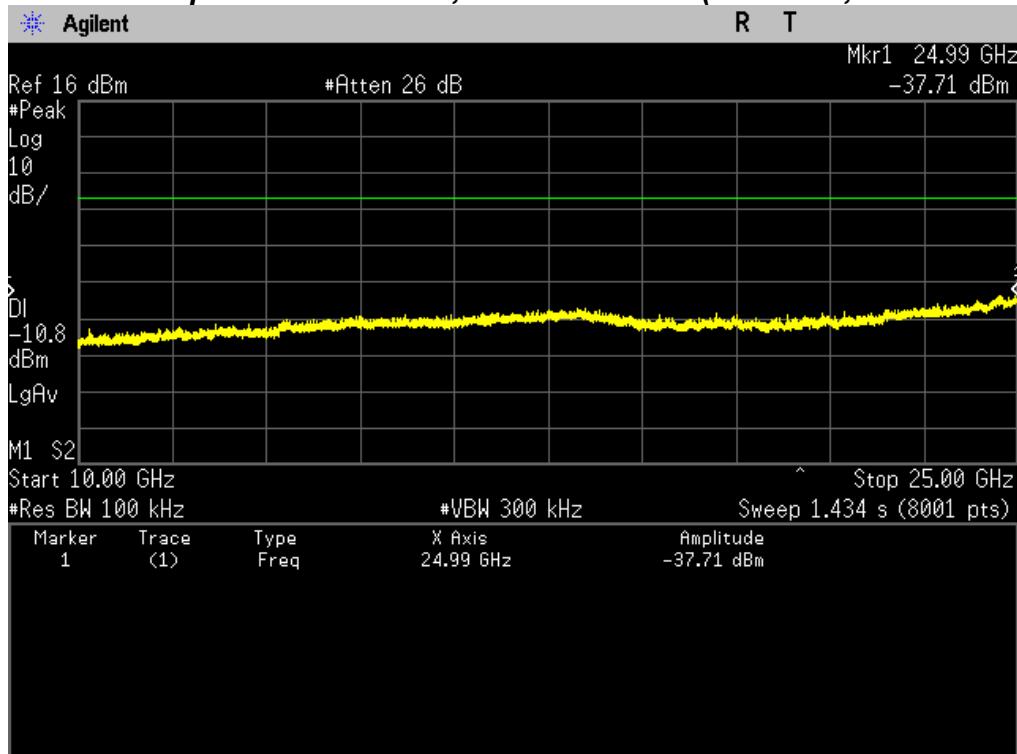


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2402 MHz, $\pi/4$ DQPSK Mode)

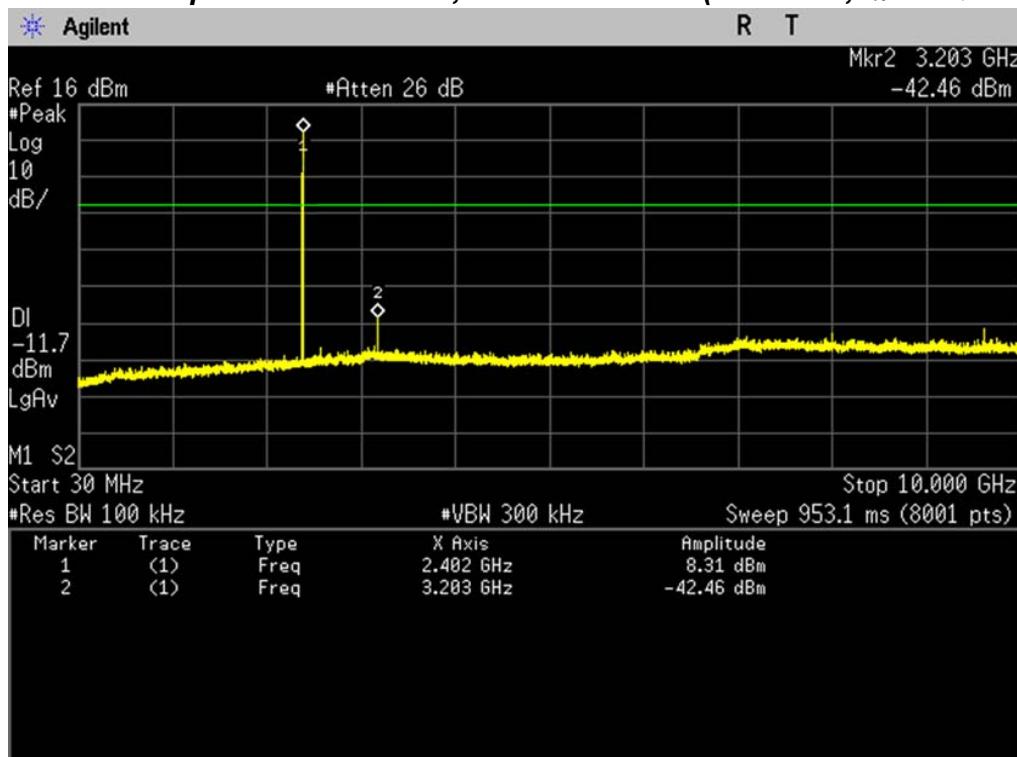


### Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2402 MHz, $\pi/4$ DQPSK Mode)

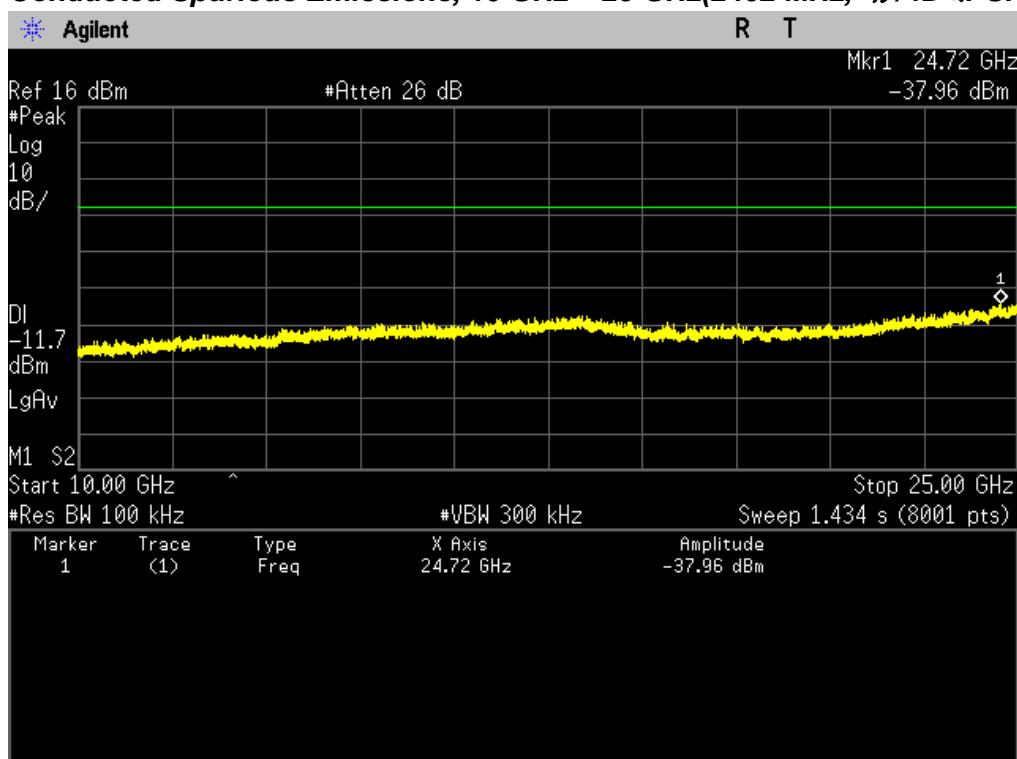


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2441 MHz, $\pi/4$ DQPSK Mode)

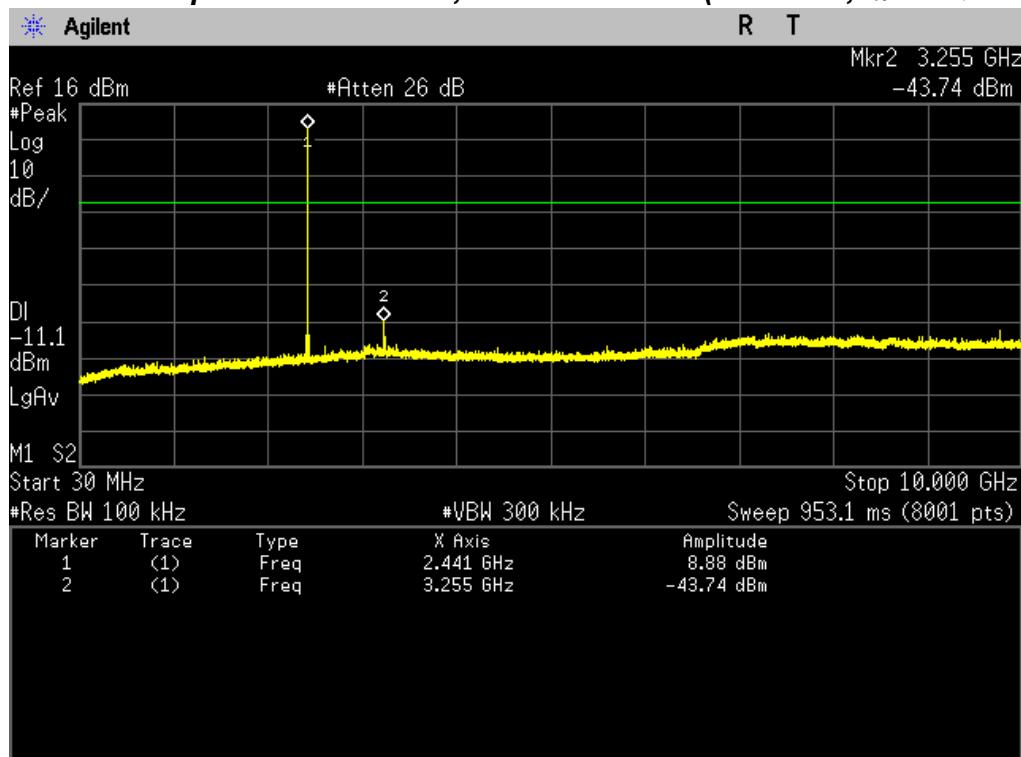


### Conducted Spurious Emissions, 10 GHz ~ 25GHz(2441 MHz, $\pi/4$ DQPSK Mode)

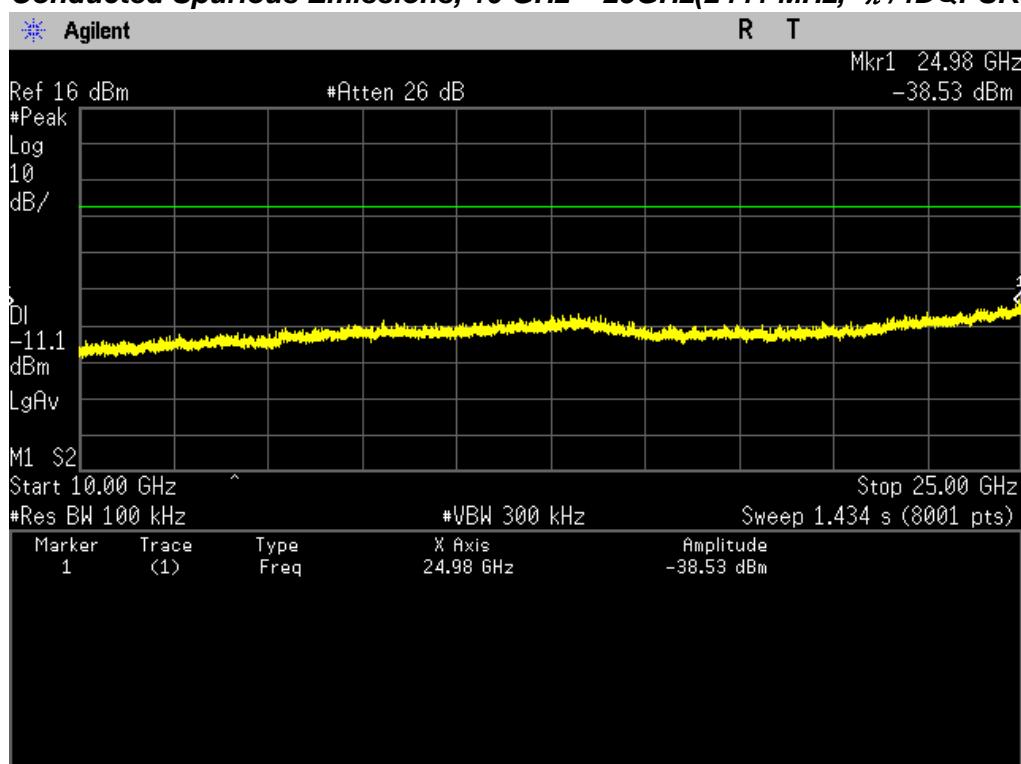


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2480 MHz, $\pi/4$ DQPSK Mode)

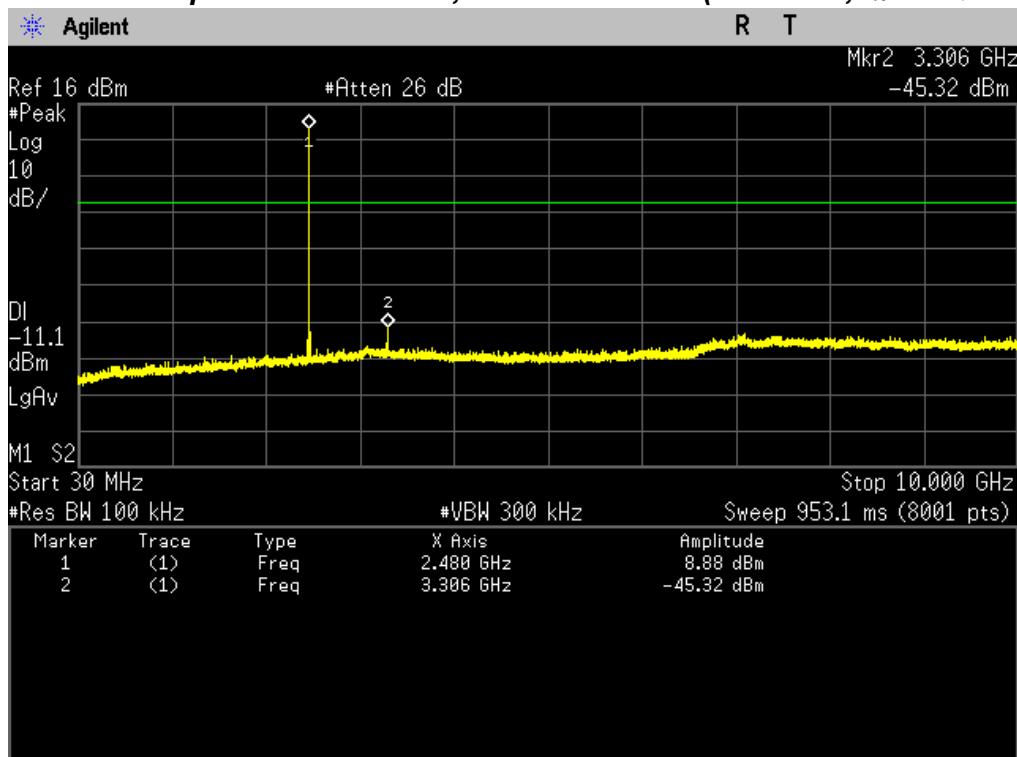


### Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2480 MHz, $\pi/4$ DQPSK Mode)

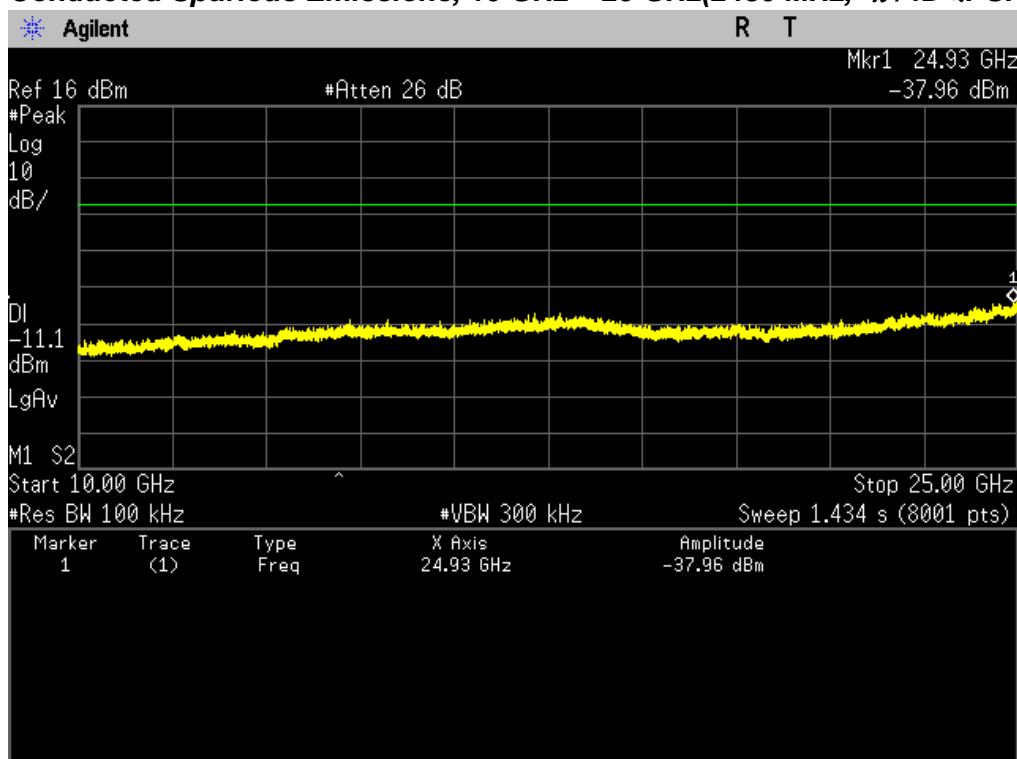


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2402 MHz, 8DPSK Mode)

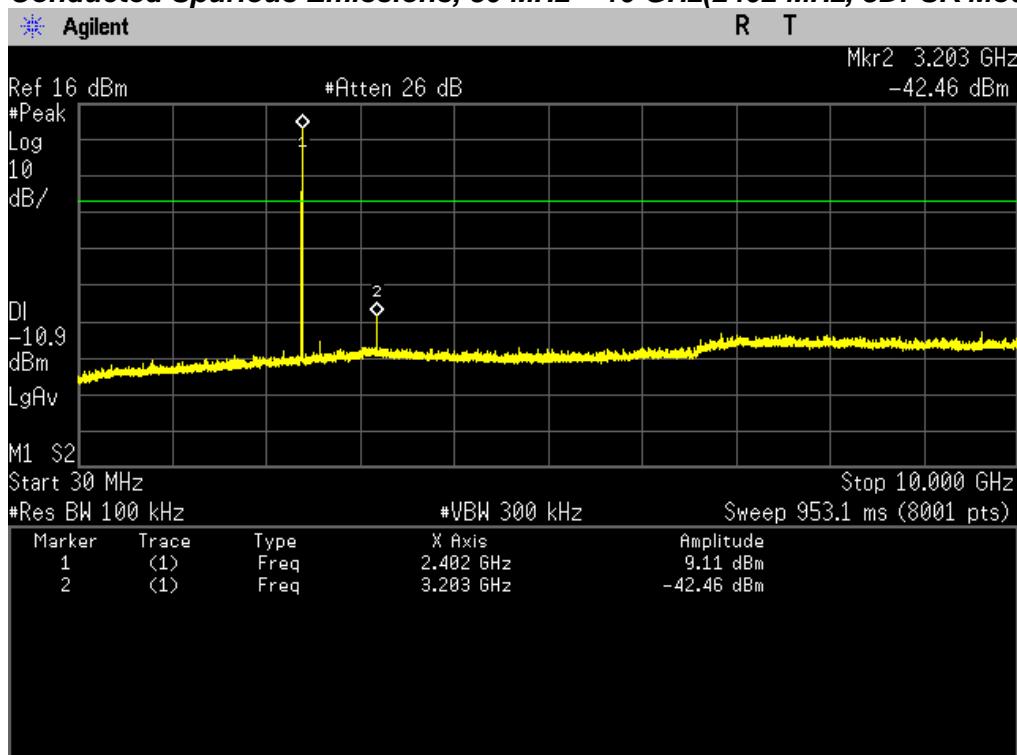


### Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2402 MHz, 8DPSK Mode)

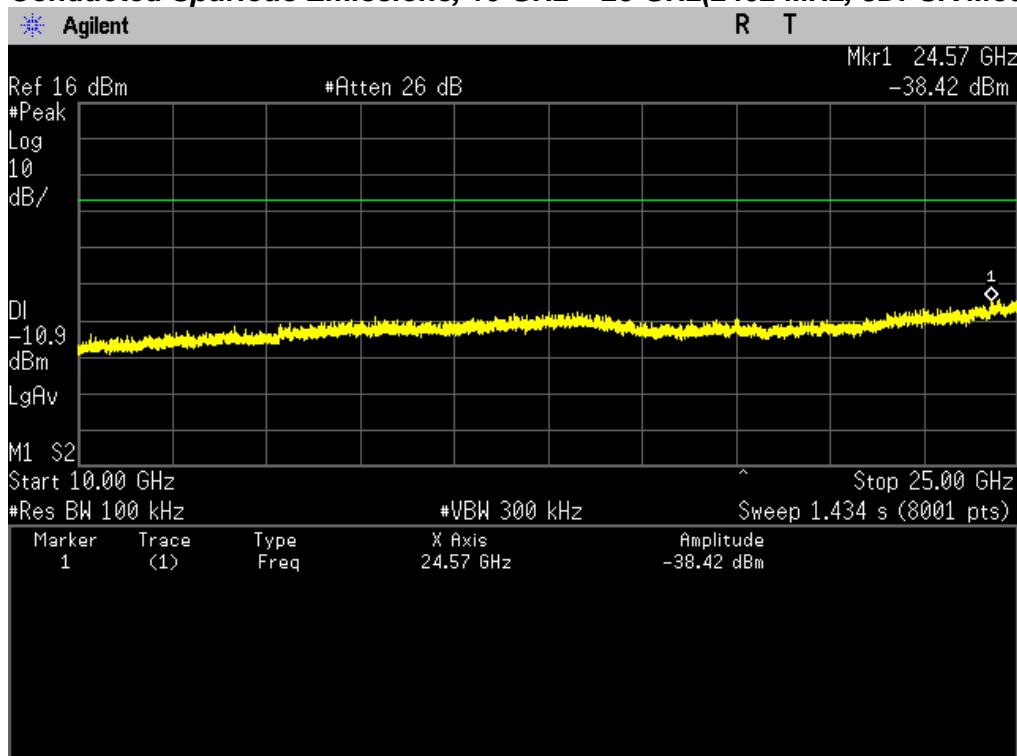


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2441 MHz, 8DPSK Mode)

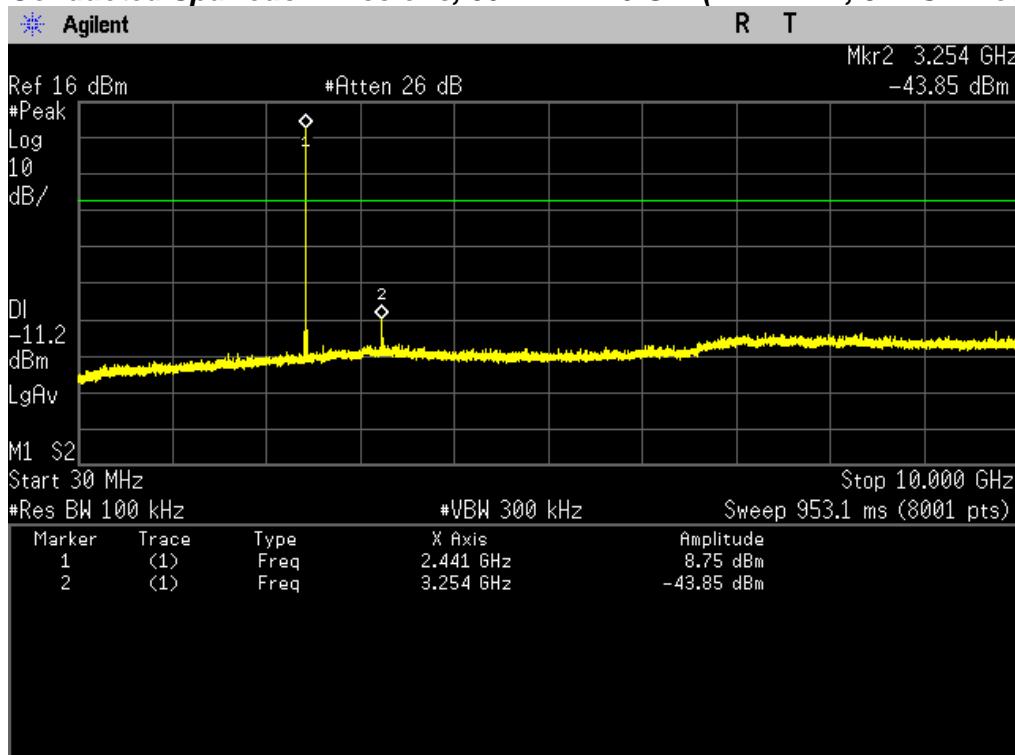


### Conducted Spurious Emissions, 10 GHz ~ 25GHz(2441 MHz, 8DPSK Mode)

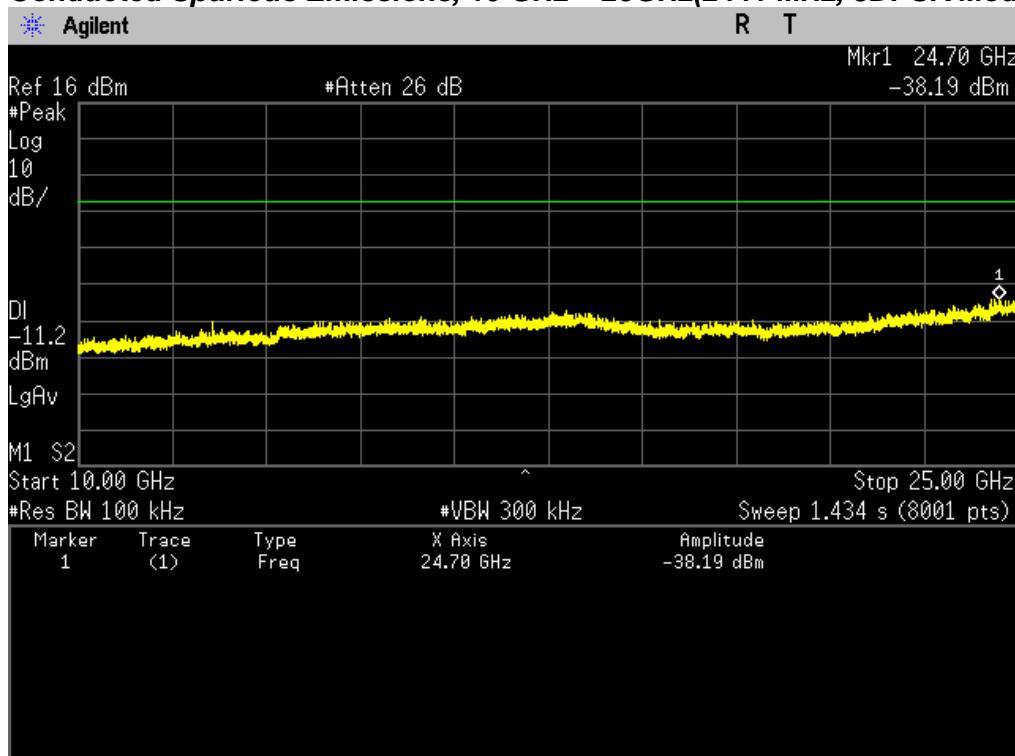


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2480 MHz, 8DPSK Mode)

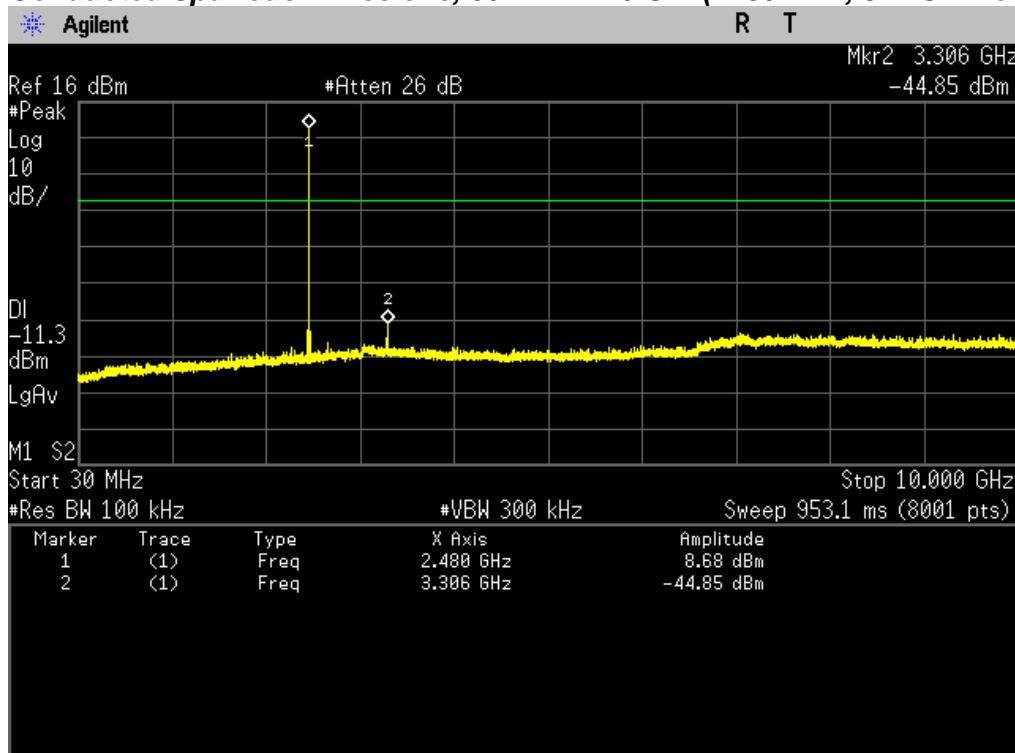


### Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2480 MHz, 8DPSK Mode)

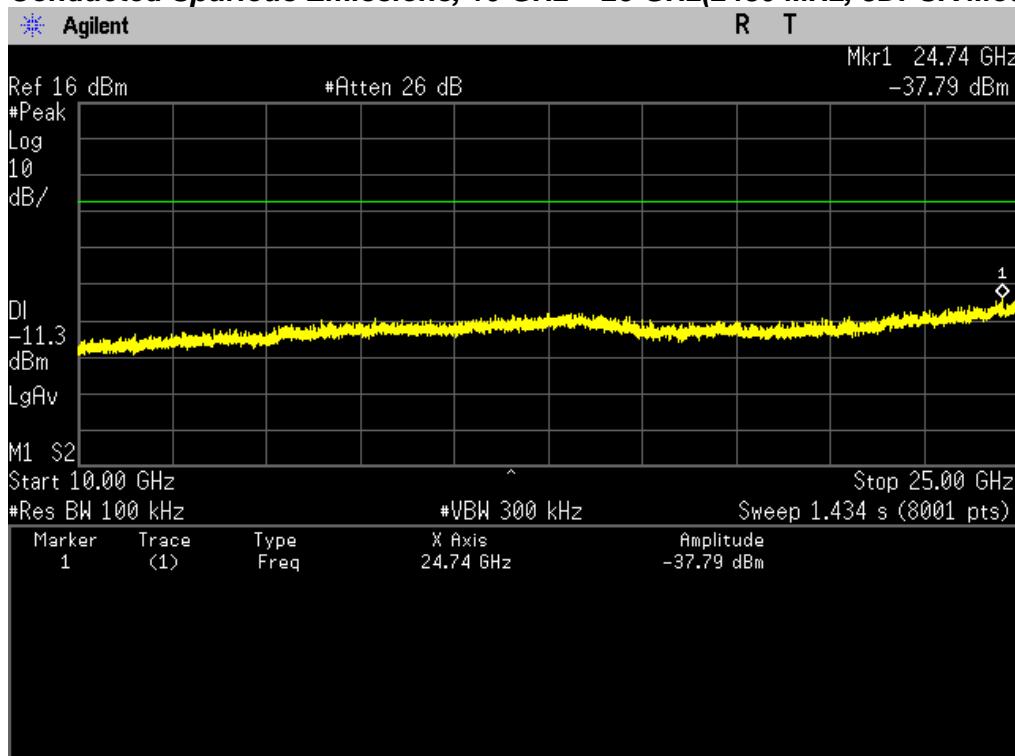


## PLOT OF TEST DATA

### Band Edge Lowest Channel(2402 MHz, GFSK)\_Non-hopping mode

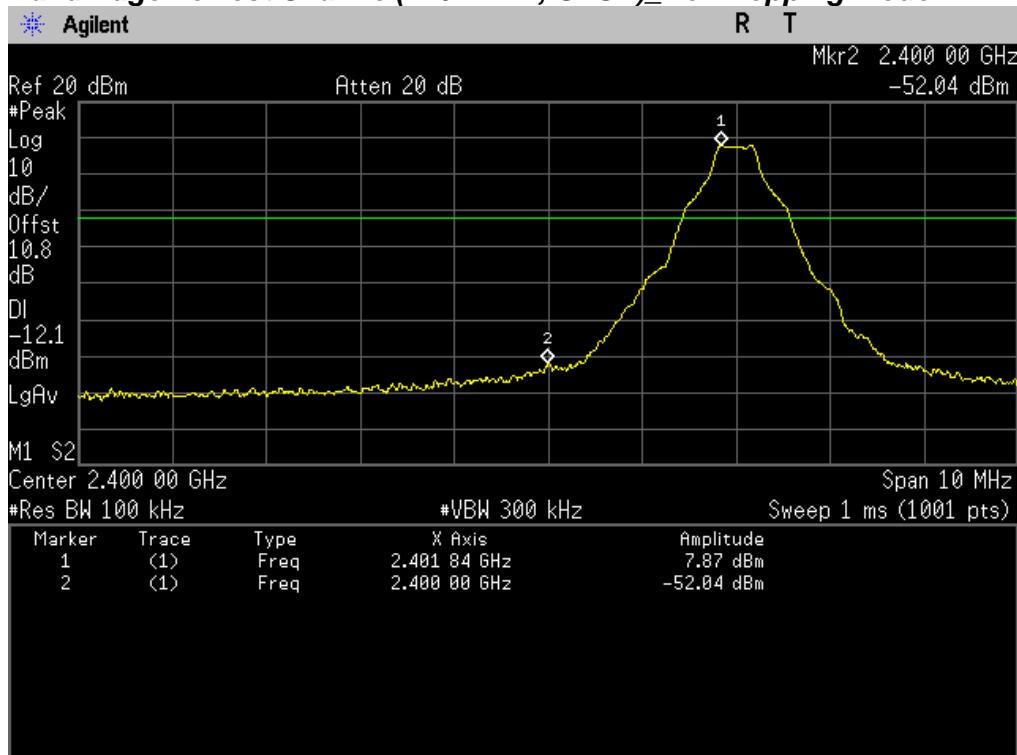


### Band Edge Lowest Channel(2402 MHz, GFSK)\_Hopping mode

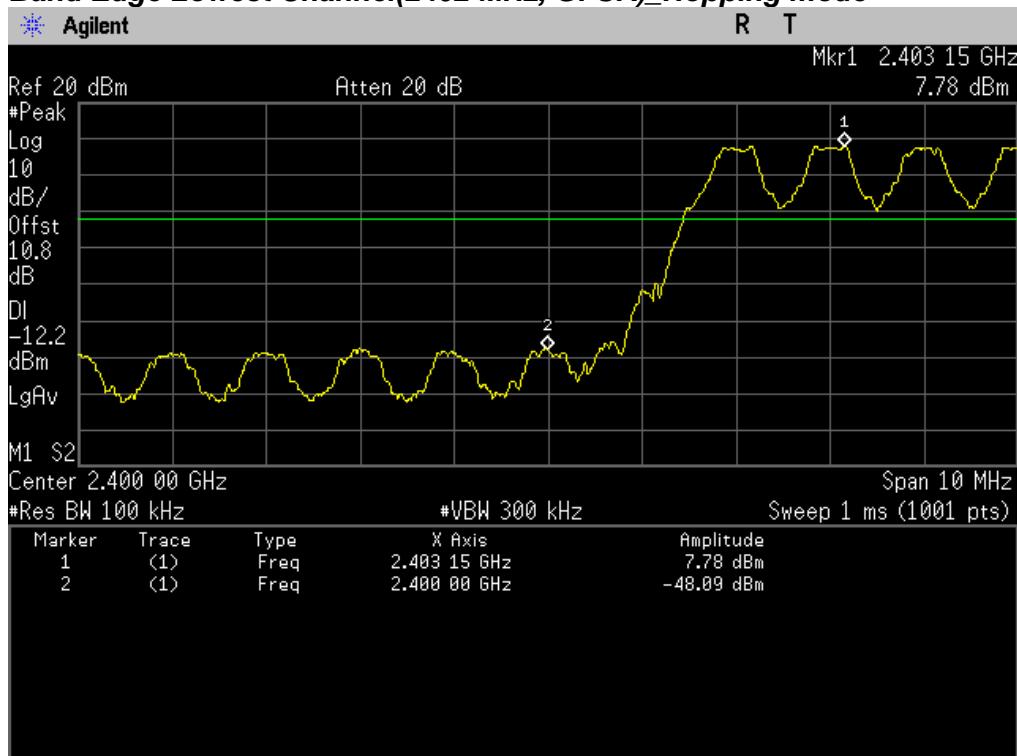


## PLOT OF TEST DATA

### Band Edge Highest Channel(2480 MHz, GFSK)\_Non-hopping mode

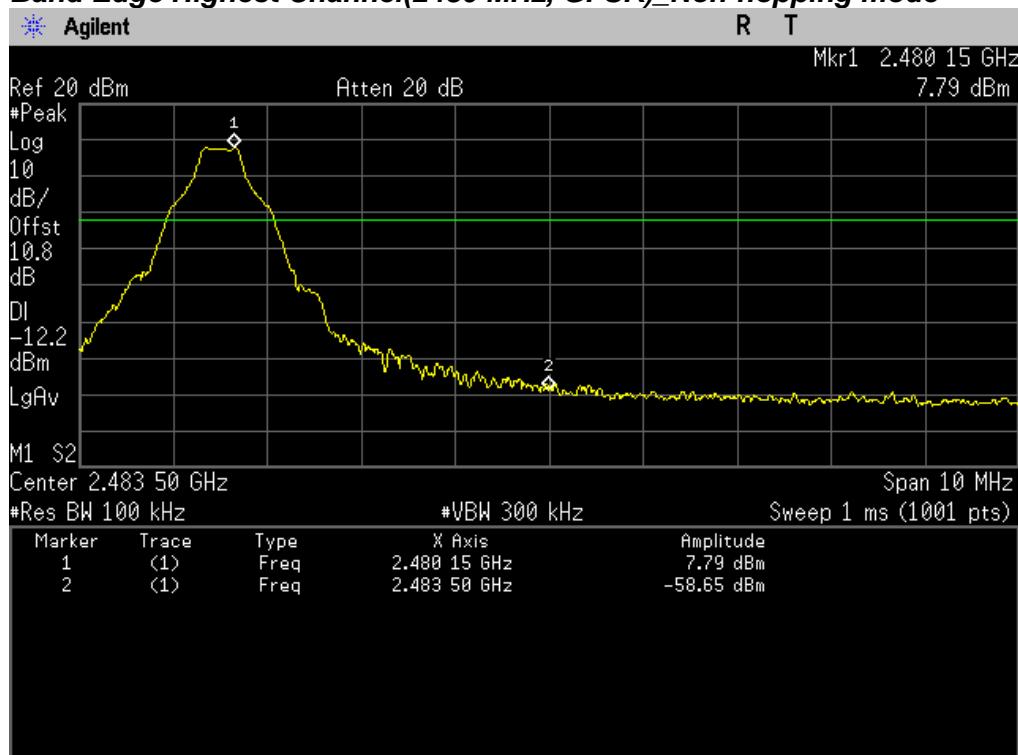


### Band Edge Highest Channel(2480 MHz, GFSK)\_Hopping mode

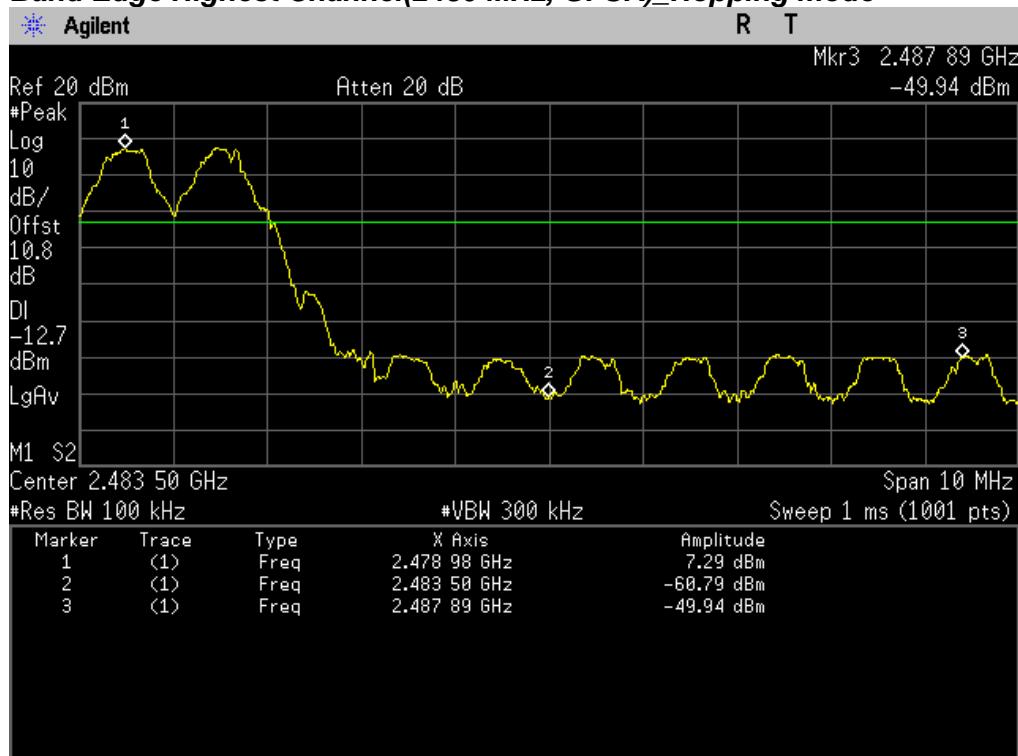


## PLOT OF TEST DATA

### Band Edge Lowest Channel(2402 MHz, $\pi/4$ DQPSK Mode)\_Non-hopping mode

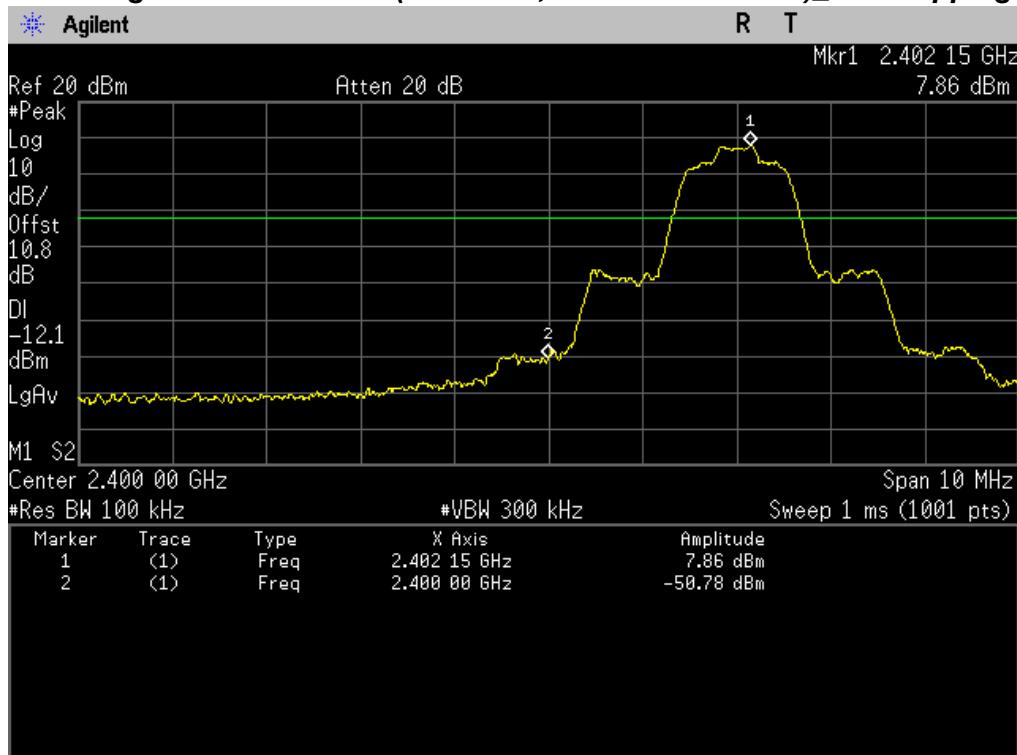


### Band Edge Lowest Channel(2402 MHz, $\pi/4$ DQPSK Mode)\_Hopping mode

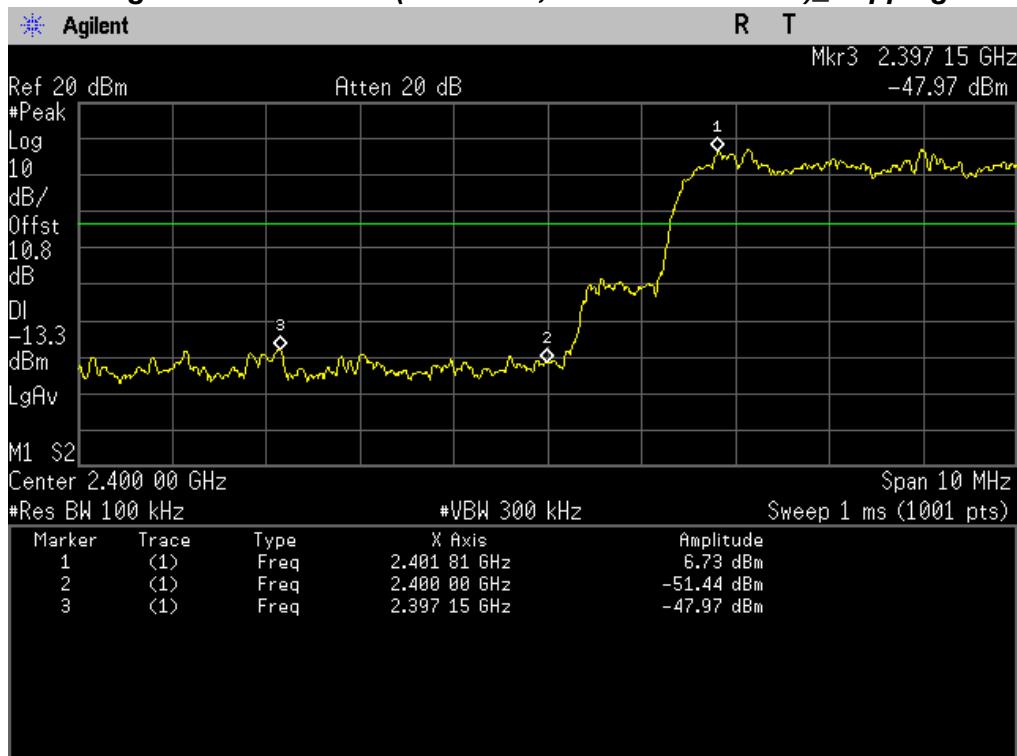


## PLOT OF TEST DATA

### Band Edge Highest Channel(2480 MHz, $\pi/4$ DQPSK Mode)\_Non-hopping mode

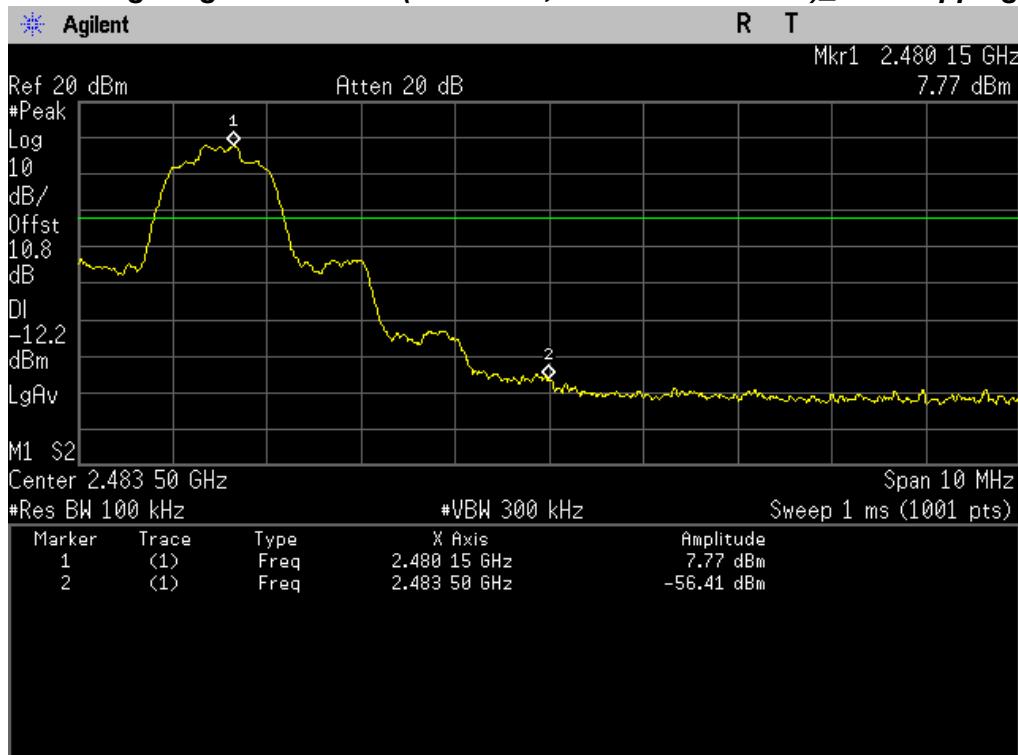


### Band Edge Highest Channel(2480 MHz, $\pi/4$ DQPSK Mode)\_Hopping mode

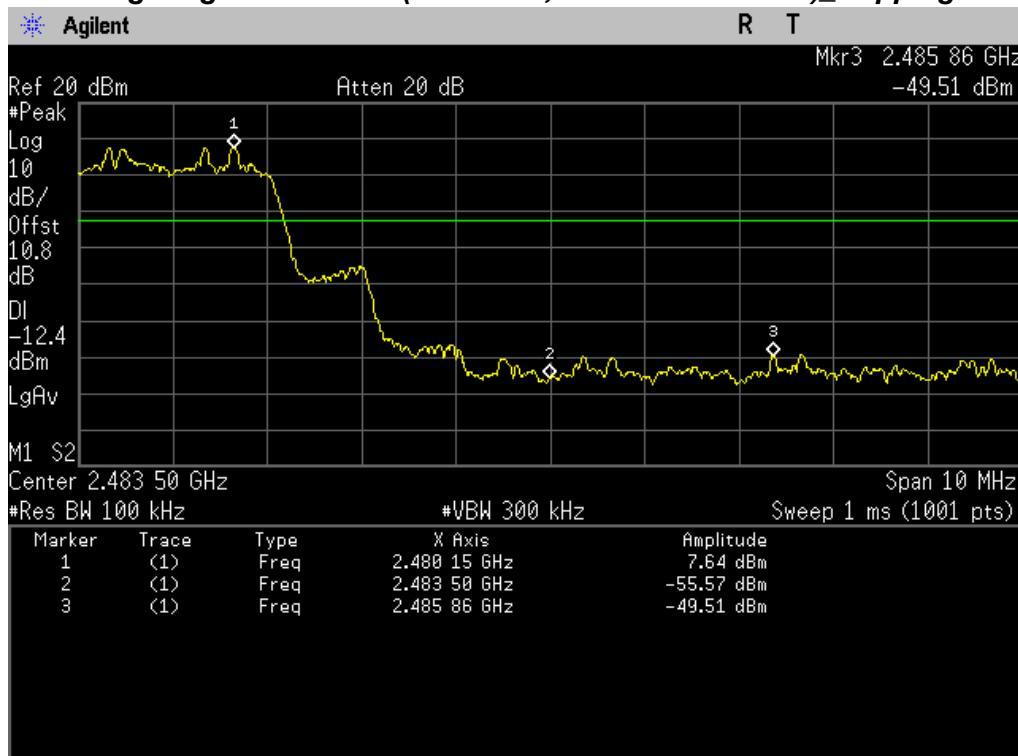

## PLOT OF TEST DATA

### Band Edge Lowest Channel(2402 MHz, 8DPSK)\_Non-hopping mode

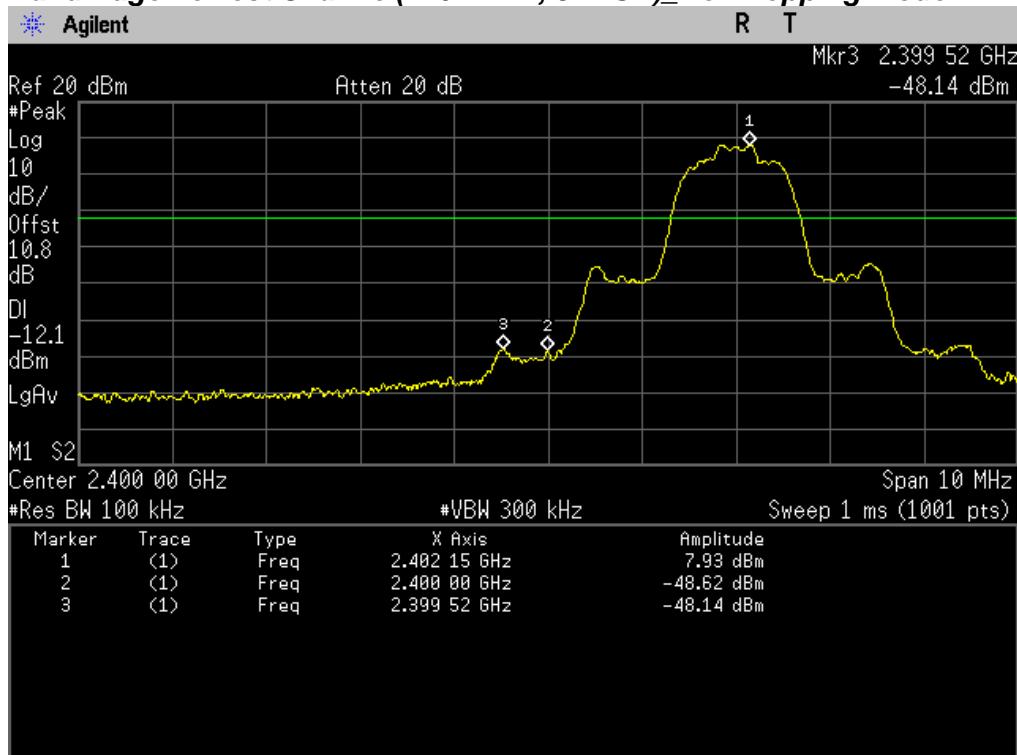


### Band Edge Lowest Channel(2402 MHz, 8DPSK)\_Hopping mode




## PLOT OF TEST DATA

### Band Edge Highest Channel(2480 MHz, 8DPSK) Non-hopping mode

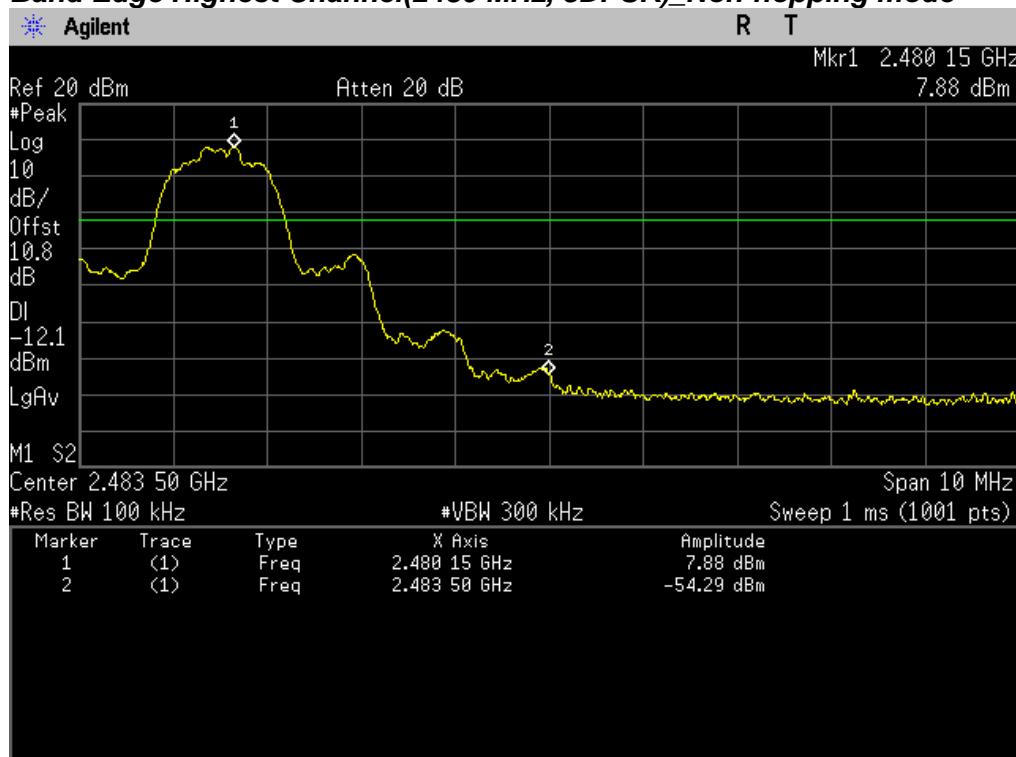

### Band Edge Highest Channel(2480 MHz, 8DPSK) Hopping mode

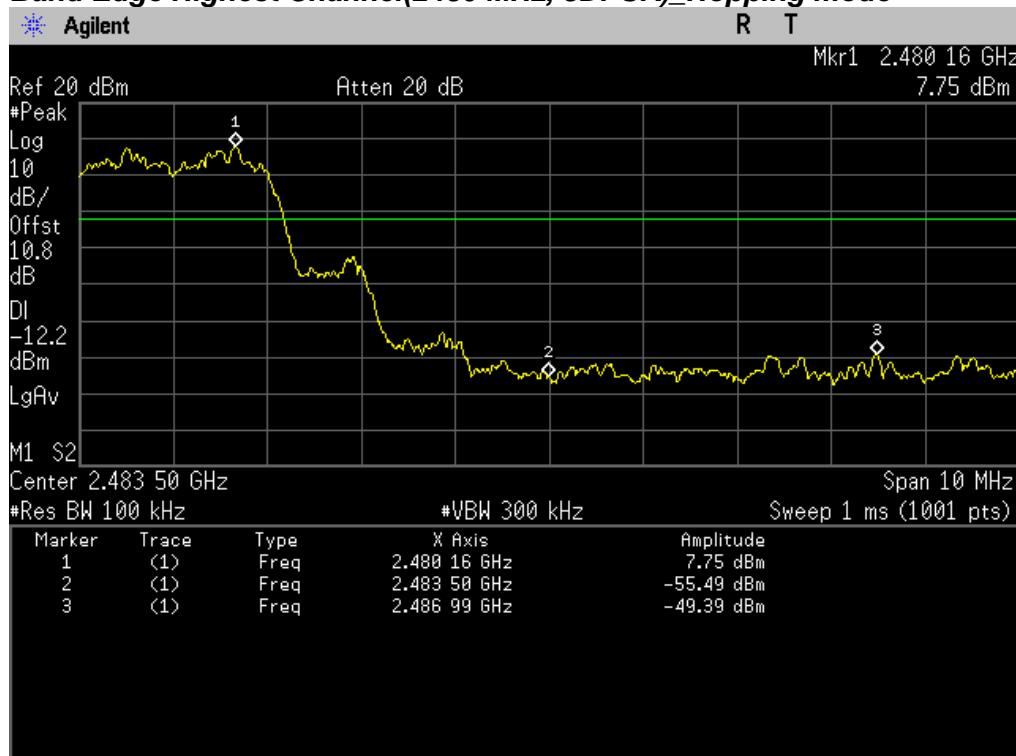

## TEST DATA

### 8.8 Radiated Spurious Emission

#### FCC §15.247(d), IC RSS-210 A8.5

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

**Result:**

#### **Lowest Channel**

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2210.25	43.2	H	peak	-1.4	41.8	74.0	32.2
2210.25	34.1	H	average	-1.4	32.7	54.0	21.3
2690.25	43.0	H	peak	0.5	43.5	74.0	30.5
2690.25	35.0	H	average	0.5	35.5	54.0	18.5
4803.96	43.5	V	peak	9.4	52.9	74.0	21.1
4803.96	36.3	V	average	9.4	45.7	54.0	8.3

#### **Middle Channel**

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2249.25	43.0	V	peak	-1.3	41.7	74.0	32.3
2249.25	35.7	V	average	-1.3	34.4	54.0	19.6
2729.00	42.1	H	peak	0.8	42.9	74.0	31.1
2729.00	34.3	H	average	0.8	35.1	54.0	18.9
3254.37	44.7	V	peak	4.8	49.5	74.0	24.5
3254.37	40.6	V	average	4.8	45.4	54.0	8.6
4882.04	42.8	V	peak	9.7	52.5	74.0	21.5
4882.04	34.6	V	average	9.7	44.3	54.0	9.7

## TEST DATA

---

### Highest Channel

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	mode	AF+CL+A mp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2288.25	42.9	V	peak	-1.2	41.7	74.0	32.3
2288.25	35.5	V	average	-1.2	34.3	54.0	19.7
2444.00	42.5	H	peak	-0.6	41.9	74.0	32.1
2444.00	34.3	H	average	-0.6	33.7	54.0	20.3
2768.25	42.6	H	peak	1.0	43.6	74.0	30.4
2768.25	33.0	H	average	1.0	34.0	54.0	20.0
4645.00	41.0	V	peak	8.7	49.7	74.0	24.3
4645.00	31.1	V	average	8.7	39.8	54.0	14.2
4960.00	42.1	V	peak	9.9	52.0	74.0	22.0
4960.00	33.7	V	average	9.9	43.6	54.0	10.4

**Notes:**

1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Other spurious was under 20 dB below Fundamental.
4. 8DPSK modulation mode was the worst condition.
5. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
6. Average emissions were measured using RBW = 1 MHz, VBW = 1 kHz ( $> 1/\tau$  Hz, where  $\tau$  is pulse width on second), Detector = Peak.
7. The spectrum was measured from 9 kHz to 10<sup>th</sup> harmonic and the worst-case emissions were reported. No significant emissions were found beyond the fourth harmonic for this device.

## TEST DATA

### 8.9 Radiated Restricted Band Edge

#### FCC §15.247(d), IC RSS-210 A8.5

Test Mode : Set to Lowest channel, Middle channel and Highest channel

#### 8DPSK

##### **Lowest Channel**

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2389.90	49.6	H	peak	-0.8	48.8	74.0	25.2
2389.99	46.4	H	average	-0.8	45.6	54.0	8.4

##### **Highest Channel**

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2483.50	65.9	H	peak	-0.3	65.6	74.0	8.4
2483.50 <sup>*)</sup>	38.5	H	average	-0.3	38.2	54.0	15.8

#### Note(s):

1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded.
4. 8DPSK modulation was the worst condition.
5. Peak emissions were measured using RBW = 1 MHz, VBW = 1 MHz, Detector = Peak.
6. Average emissions were measured using RBW = 1 MHz, VBW = 1 kHz (> 1/ $\tau$  Hz, where  $\tau$  is pulse width on second), Detector = Peak.
7. \*) Band edge measurement has been performed according to "Marker-Delta Method" in FCC Public Notice DA00-705.

## 9. TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	*Test Receiver	R & S	ESU 40	100202	Apr. 04 2013	1 year
2	Test Receiver	R & S	ESCS 30	100302	Oct. 08 2013	1 year
3	*Amplifier	R & S	SCU 01	10030	Apr. 04 2013	1 year
4	*Amplifier	Sonoma Instrument	310N	291916	Jul. 16 2013	1 year
5	*Amplifier	R & S	SCU18	10065	Apr. 05 2013	1 year
6	*Amplifier	R & S	SCU26	10011	Jul. 08 2013	1 year
7	Amplifier	R & S	SCU40	10008	Jul. 08 2013	1 year
8	*Pre Amplifier	HP	8449B	3008A00107	**Jan. 09 2014	1 year
9	*Spectrum Analyzer	Agilent	E4440A	MY44303257	Jul. 16 2013	1 year
10	*Spectrum Analyzer	Agilent	E4440A	MY44022567	Apr. 05 2013	1 year
11	*Attenuator	R & S	FSP40	100361	Apr. 04 2013	1 year
12	*Loop Antenna	FAIRVIEW	SA3N5W-06	N/A	Feb. 21 2012	2 year
13	Wideband Power Sensor	R & S	NRP-Z81	100634	Jul. 16 2013	1 year
14	*Biconical Log Antenna	ARA	LPB-2520/A	1180	Apr. 26 2012	2 year
15	*Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-474	Aug. 13 2012	2 year
16	*Horn Antenna	Q-par Angus	QSH20S20	8179	Mar. 20 2013	2 year
17	Horn Antenna	Q-par Angus	QSH22K20	8180	Mar. 20 2013	2 year
18	*Trilog-Broadband Antenna	SCHWARZBECK	VULB 9163	9163-454	Feb. 24 2012	2 year
19	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-257	Mar. 06 2013	2 year
20	LISN	R & S	ESH3-Z5	833874/006	Oct. 08 2013	1 year
21	*Controller	INNCO	CO2000-G	CO2000/562/23890210/L	N/A	N/A
22	*Open Switch And Control Unit	R & S	OSP-120	100015	N/A	N/A
23	*Turn Table	INNCO	DT3000-3T	N/A	N/A	N/A
24	*Antenna Mast	INNCO	MA4000-EP	N/A	N/A	N/A
25	*Anechoic Chamber	SY Corporation	N/A	N/A	N/A	N/A
26	*Position Controller	INNCO	CO2000	1480406/L	N/A	N/A
27	*Turn Table	INNCO	DS1200S	N/A	N/A	N/A
28	*Antenna Mast	INNCO	MA4000	N/A	N/A	N/A
29	*Anechoic Chamber	Seo-Young EMC	N/A	N/A	N/A	N/A
30	*Shielded Room	Seo-Young EMC	N/A	N/A	N/A	N/A

### Note(s)

\* Test equipment used during the test.

\*\* The calibration of the equipment was performed for one day (1/9) and they was not used to test during this period.

## 10. ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

### 1. Conducted Uncertainty Calculation

Source of Uncertainty	$Xi$	Uncertainty of $Xi$		Coverage factor $k$	$u(Xi)$ (dB)	$Ci$	$Ci u(Xi)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	$RI$	$\pm 0.1$	normal 1	1.000	0.1	1	0.1
Attenuation AMN-Receiver	$LC$	$\pm 0.08$	normal 2	2.000	0.04	1	0.04
AMN Voltage division factor	$LAMN$	$\pm 0.8$	normal 2	2.000	0.4	1	0.4
Sine wave voltage	$dVSW$	$\pm 2.00$	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	$dVPA$	$\pm 1.50$	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	$dVPR$	$\pm 1.50$	rectangular	1.732	0.87	1	0.87
Noise floor proximity	$dVNF$	$\pm 0.00$	-	-	0.00	1	0.00
AMN Impedance	$dZ$	$\pm 1.80$	triangular	2.449	0.73	1	0.73
ⓐ Mismatch	$M$	$+ 0.70$	U-Shaped	1.414	0.49	1	0.49
ⓑ Mismatch	$M$	$- 0.80$	U-Shaped	1.414	- 0.56	1	- 0.56
Measurement System Repeatability	$RS$	0.05	normal 1	1.000	0.05	1	0.05
Remark	ⓐ: AMN-Receiver Mismatch : + ⓑ: AMN-Receiver Mismatch : -						
Combined Standard Uncertainty	Normal			$\pm 1.88$			
Expended Uncertainty U	Normal ( $k = 2$ )			$\pm 3.76$			

## 2. Radiation Uncertainty Calculation

Source of Uncertainty	Xi	Uncertainty of Xi		Coverage factor $k$	$u(Xi)$ (dB)	$Ci$	$Ci u(Xi)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	<b>RI</b>	± 0.10	normal 1	1.000	0.10	1	0.10
Sine wave voltage	<b>dVsw</b>	± 2.00	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	<b>dVpa</b>	± 1.50	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	<b>dVpr</b>	± 1.50	rectangular	1.732	0.87	1	0.87
Noise floor proximity	<b>dVnf</b>	± 0.50	normal 2	2.000	0.25	1	0.25
Antenna Factor Calibration	<b>AF</b>	± 1.50	normal 2	2.000	0.75	1	0.75
Attenuation Antenna-receiver	<b>CL</b>	± 0.52	normal 2	2.000	0.26	1	0.26
Antenna Directivity	<b>AD</b>	± 1.00	rectangular	1.732	0.58	1	0.58
Antenna Factor Height Dependence	<b>AH</b>	± 0.50	rectangular	1.732	0.29	1	0.29
Antenna Phase Centre Variation	<b>AP</b>	± 0.30	rectangular	1.732	0.17	1	0.17
Antenna Factor Frequency Interpolation	<b>AI</b>	± 0.30	rectangular	1.732	0.17	1	0.17
Site Imperfections	<b>SI</b>	± 4.00	triangular	2.449	1.63	1	1.63
Measurement Distance Variation	<b>DV</b>	± 0.10	rectangular	1.732	0.06	1	0.06
Antenna Balance	<b>Dbal</b>	± 0.90	rectangular	1.732	0.52	1	0.52
Cross Polarisation	<b>DCross</b>	± 0.90	rectangular	1.732	0.52	1	0.52
④ Mismatch	<b>M</b>	+ 0.25	U-Shaped	1.414	0.18	1	0.18
⑤ Mismatch	<b>M</b>	- 0.26	U-Shaped	1.414	- 0.18	1	- 0.18
⑥ Mismatch	<b>M</b>	+ 0.98	U-Shaped	1.414	0.69	1	0.69
⑦ Mismatch	<b>M</b>	- 1.11	U-Shaped	1.414	- 0.79	1	- 0.79
Measurement System Repeatability	<b>RS</b>	0.09	normal 1	1.000	0.09	1	0.09
Remark	④: Biconical Antenna-receiver Mismatch : + (< 200 MHz) ⑤: Biconical Antenna-receiver Mismatch : - (< 200 MHz) ⑥: Log Periodic Antenna-receiver Mismatch : + ( $\geq$ 200 MHz) ⑦: Log Periodic Antenna-receiver Mismatch : - ( $\geq$ 200 MHz)						
Combined Standard Uncertainty	Normal			± 2.63 (< 200 MHz) ± 2.74 ( $\geq$ 200 MHz)			
Expendied Uncertainty U	Normal ( $k = 2$ )			± 5.26 (< 200 MHz) ± 5.48 ( $\geq$ 200 MHz)			