

TEST REPORT

of

FCC Part 15 Subpart B&C §15.247/RSS-210 Issue 7, RSS-Gen Issue 2
FCC ID/IC Certification: A3LSBH900 / 649E-SBH900

Equipment Under Test : Bluetooth Stereo Headset

Model Name : SBH900

Serial No. : N/A

Applicant : Samsung Electronics Co., Ltd.

Manufacturer : SAMSUNG ELECTRONICS HUIZHOU CO.,LTD.

Date of Test(s) : 2009-3-18 ~ 2009-3-23

Date of Issue : 2009-3-30

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2009-3-30

Duke Ko

Approved By



Date

2009-3-30

Denny Ham

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Table of contents

| | |
|---|-----------|
| 1. General information ----- | 3 |
| 2. Transmitter radiated spurious emissions and conducted spurious emission ----- | 8 |
| 3. Receiver Radiated Spurious Emission----- | 22 |
| 4. 20dB bandwidth and 99% bandwidth ----- | 24 |
| 5. Maximum peak output power ----- | 34 |
| 6. Hopping channel separation ----- | 40 |
| 7. Number of hopping frequency ----- | 43 |
| 8. Time of occupancy(Dwell time) ----- | 47 |
| 9. Antenna requirement ----- | 54 |
| 10. RF Exposure evaluation ----- | 55 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General information

1.1 Testing laboratory

SGS Testing Korea Co., Ltd.

Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

www.electrolab.kr.sgs.com

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

1.2 Details of applicant

Applicant : Samsung Electronics Co., Ltd.
Address : 416, Maetan-dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea
Contact Person : Jin-kyoung Kim
Phone No. : +82 +31 301 4187
Fax No. : +82 +31 279 7609

1.3 Description of EUT

| | |
|-----------------------------|----------------------------|
| Kind of Product | Bluetooth Stereo Headset |
| Model Name | SBH900 |
| Serial Number | N/A |
| Power Supply | DC 3.7 V |
| Frequency Range | 2402 MHz ~ 2480 MHz |
| Modulation Technique | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Number of Channels | 79 |
| Operating Conditions | -20 ~ 50 °C |
| Antenna Type | Fixed type(Chip Antenna) |
| Antenna Gain | -0.42 dBi |
| H/W Version | REV1.0 |
| S/W version | SBH900_SW01 |

1.4 Details of modification

- N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

1.5. Information about the FHSS characteristics:**1.5.1. Pseudorandom frequency hopping sequence**

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

1.5.2. Medium access protocol

The manufacturer declares that the device uses Bluetooth protocol.

1.5.3. System Receiver Input Bandwidth

Each channel bandwidth is 1MHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.6 Test equipment list

| Equipment | Manufacturer | Model | Cal Due. |
|-------------------------|----------------------------|--------------------------------------|---------------|
| Signal Generator | Agilent | E4438C | May 09, 2009 |
| Spectrum Analyzer | R&S | FSP40 | Oct. 01, 2009 |
| Bluetooth Tester | TESOM | TC-3000B | Oct. 10, 2009 |
| Directional Coupler | Narda | 4226-20 | Jan. 06, 2010 |
| High Pass Filter | Wainwright Instrument GmbH | WHK3.0/18G-11SS | Oct. 01, 2009 |
| Preamplifier | H.P. | 8447F | Jul. 03, 2009 |
| Preamplifier | Agilent | 8449B | May 09, 2009 |
| DC Power Supply | Agilent | E3631A | May 09, 2009 |
| Test Receiver | Rohde & Schwarz | ESHS10 | Jul. 21, 2009 |
| Ultra-Broadband Antenna | Rohde & Schwarz | HL562 | Oct. 02, 2009 |
| Horn Antenna | Electro-Metrics | HF906 | Nov. 13, 2009 |
| Anechoic Chamber | SY Corporation | L x W x H (9.6 m x 6.4 m x 6.6 m) | Jan. 31, 2010 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.7. Summary of test results

The EUT has been tested according to the following specifications:

| Applied standard : FCC Part15 subpart B&C, RSS-210, RSS-Gen | | | |
|--|-------------------------|--|---------------|
| Standard section | | Test item | Result |
| 15.205(a) 15.209 15.247(d) | A8.5 | Transmitter radiated spurious emissions and Conducted spurious emission | Complied |
| 15.109(a) | RSS-Gen 6 | Receiver Radiated Spurious Emission | Complied |
| 15.247(a)(1) | A8.1(1) | 20 dB bandwidth | Complied |
| 15.247(b)(1) | A8.4(2) | Maximum peak output power | Complied |
| 15.247(a)(1) | A8.1(2) | Frequency separation | Complied |
| 15.247(a)(1)(iii) | A8.1(4) | Number of hopping frequency | Complied |
| 15.247(a)(1)(iii) | A8.1(4) | Time of occupancy (Dwell time) | Complied |
| 15.247(i) 1.1307(b)(1) | RSS-Gen 5.5/ RSS-102 | RF exposure evaluation | Complied |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.8. Test report revision

| Revision | Report number | Description |
|----------|------------------------|---|
| 0 | F690501/RF-RTL002976 | Initial |
| 1 | F690501/RF-RTL002976-1 | Retest radiated spurious emissions with ear phone |
| 2 | F690501/RF-RTL002976-2 | Report remark is changed on 23 page |

1.9. Maximum output power

The EUT transmitter has a maximum peak conducted output power as follows

| Frequency Range (MHz) | Mode | Output power(dBm) | Output power(mW) |
|-----------------------|----------------|-------------------|------------------|
| 2402~2480 | Basic GFSK | 1.07 | 1.279 |
| 2402~2480 | Enhanced 8DPSK | 3.10 | 2.042 |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. Transmitter radiated spurious emissions and conducted spurious emission


2.1. Test setup

2.1.1. Transmitter radiated spurious emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

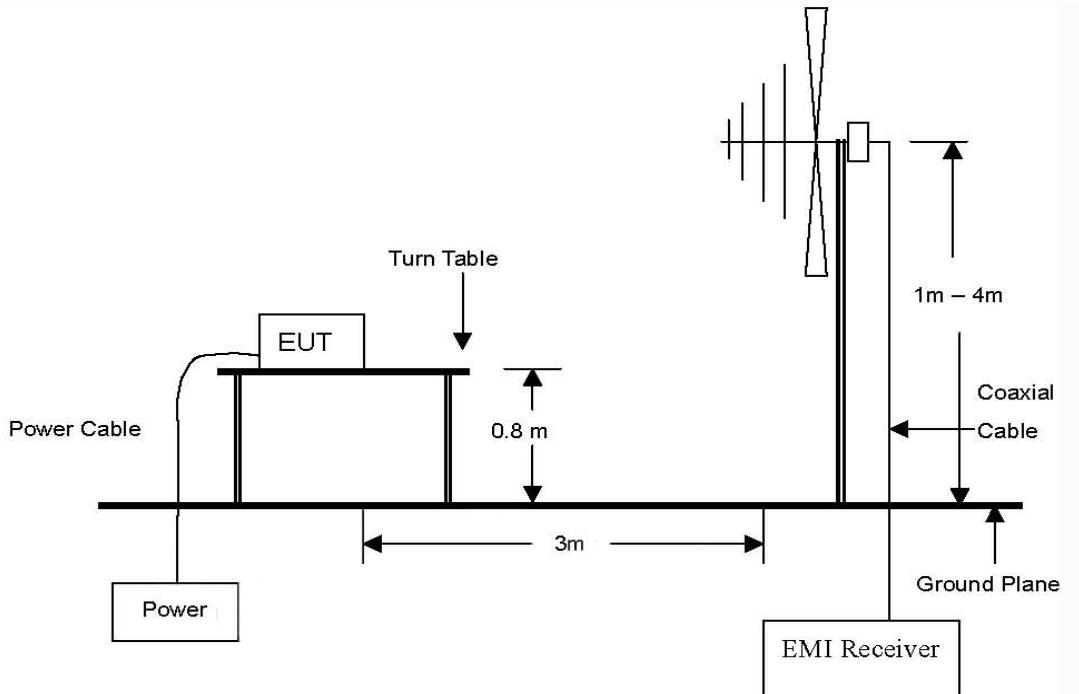


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz Emissions.

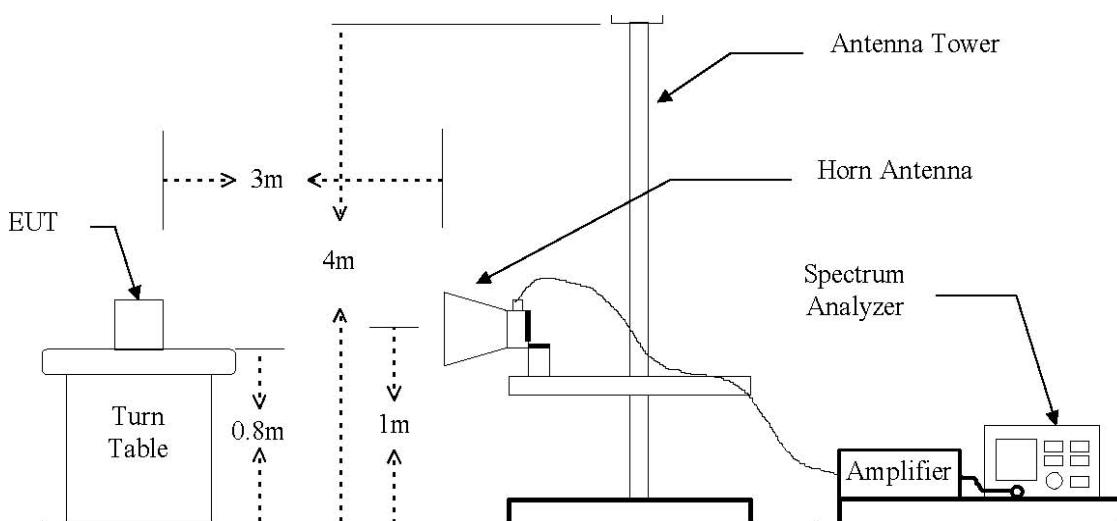

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.1.2. Conducted spurious emissions

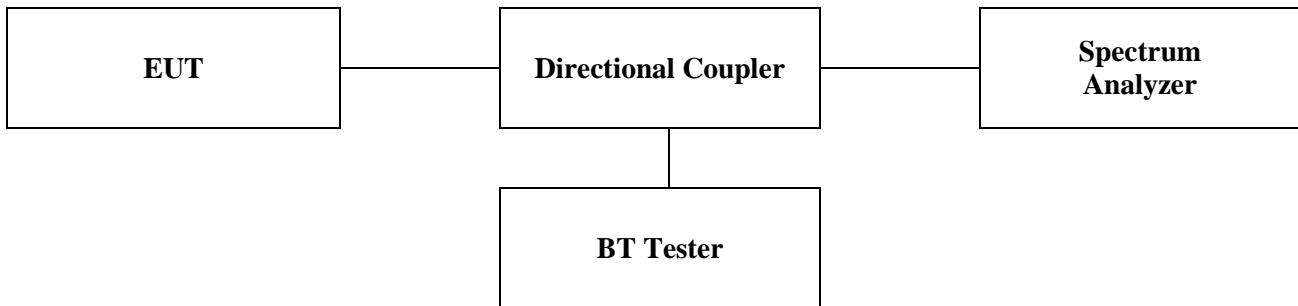

2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.109(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated (dB μ V/m) | Radiated (μ V/m) |
|-----------------|-------------------|-------------------------|-----------------------|
| 30 - 88 | 3 | 40.0 | 100 |
| 88 - 216 | 3 | 43.5 | 150 |
| 216 - 960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

2.3.1. Test procedures for radiated spurious emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

■ Note

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

2.3.2. Test procedures for conducted spurious emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test result

Ambient temperature : 23 °C

Relative humidity : 45 % R.H.

2.4.1. Spurious radiated emission (Worst case configuration_8DPSK mode)_without ear phone

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 153.67 | 4.30 | Q.P. | H | 7.67 | 1.39 | 13.36 | 43.50 | 30.14 |
| 546.53 | 4.50 | Q.P. | H | 16.19 | 2.67 | 23.36 | 46.00 | 22.64 |
| 752.65 | 4.80 | Q.P. | V | 19.40 | 3.07 | 27.27 | 46.00 | 18.73 |
| 876.33 | 5.30 | Q.P. | H | 20.69 | 3.34 | 29.33 | 46.00 | 16.67 |
| Above 900.00 | Not Detected | | | | | | | |

2.4.2. Spurious radiated emission (Worst case configuration_8DPSK mode)_with ear phone

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 146.40 | 6.76 | Q.P. | H | 7.98 | 1.36 | 16.10 | 43.50 | 27.40 |
| 568.35 | 4.82 | Q.P. | H | 16.52 | 2.69 | 24.03 | 46.00 | 21.97 |
| 641.10 | 5.38 | Q.P. | H | 17.81 | 2.84 | 26.03 | 46.00 | 19.97 |
| Above 700.00 | Not Detected | | | | | | | |

Remark:

1. All spurious emission at low, middle and high channel are almost the same below 1 GHz, so the spurious emission test result of the middle channel was chosen as representative in final test.
2. “*” means the restricted band.
3. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4.3. Spurious radiated emission

The frequency spectrum above 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits.

Operation mode: GFSK_without ear phone

A. Low Channel (2402 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2390.00* | 50.92 | Peak | V | 28.05 | -36.76 | 42.21 | 74.00 | 31.79 |
| 4803.91 | 54.97 | Peak | V | 32.95 | -36.70 | 51.22 | 74.00 | 22.78 |
| Above 4900.00 | Not Detected | | | | | | | |

B. Middle Channel (2441 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 4881.86 | 54.80 | Peak | V | 33.17 | -36.69 | 51.28 | 74.00 | 22.72 |
| Above 4900.00 | Not Detected | | | | | | | |

C. High Channel (2480 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2483.50* | 58.94 | Peak | V | 28.18 | -36.81 | 50.31 | 74.00 | 23.69 |
| 4959.70 | 56.28 | Peak | V | 33.39 | -36.68 | 52.99 | 74.00 | 21.01 |
| Above 5000.00 | Not Detected | | | | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operation mode: GFSK_with ear phone**A. Low Channel (2402 MHz)**

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|---------------------------|-----------------------|--------------------|-------------|---------------------------|-------------------------|------------------------|-----------------------|--------------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2390.00* | 48.30 | Peak | V | 28.05 | -36.76 | 39.59 | 74.00 | 34.41 |
| 4804.31 | 55.03 | Peak | V | 32.95 | -36.70 | 51.28 | 74.00 | 22.72 |
| Above 4900.00 | Not Detected | | | | | | | |

B. Middle Channel (2441 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|---------------------------|-----------------------|--------------------|-------------|---------------------------|-------------------------|------------------------|-----------------------|--------------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 4881.82 | 55.01 | Peak | V | 33.17 | -36.69 | 51.49 | 74.00 | 22.51 |
| Above 4900.00 | Not Detected | | | | | | | |

C. High Channel (2480 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|---------------------------|-----------------------|--------------------|-------------|---------------------------|-------------------------|------------------------|-----------------------|--------------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2483.50* | 53.22 | Peak | V | 28.18 | -36.81 | 44.59 | 74.00 | 29.41 |
| 4959.61 | 58.78 | Peak | V | 33.39 | -36.68 | 55.49 | 74.00 | 18.51 |
| 4959.61 | 39.61 | AVG | V | 33.39 | -36.68 | 36.32 | 54.00 | 17.68 |
| Above 5000.00 | Not Detected | | | | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operation Mode: 8DPSK_without ear phone

A. Low Channel (2402 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2390.00* | 50.92 | Peak | V | 28.05 | -36.76 | 42.21 | 74.00 | 31.79 |
| 4803.98 | 50.03 | Peak | V | 32.95 | -36.70 | 46.28 | 74.00 | 27.72 |
| Above 4900.00 | Not Detected | | | | | | | |

B. Middle Channel (2441 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 4881.81 | 48.76 | Peak | V | 33.17 | -36.69 | 45.24 | 74.00 | 28.76 |
| Above 4900.00 | Not Detected | | | | | | | |

C. High Channel (2480 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2483.50* | 54.25 | Peak | V | 28.18 | -36.81 | 45.62 | 74.00 | 28.38 |
| 4959.93 | 48.45 | Peak | V | 33.39 | -36.68 | 45.16 | 74.00 | 28.84 |
| Above 5000.00 | Not Detected | | | | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operation Mode: 8DPSK_with ear phone

A. Low Channel (2402 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2390.00* | 48.41 | Peak | V | 28.05 | -36.76 | 39.70 | 74.00 | 34.30 |
| 4803.93 | 51.15 | Peak | V | 32.95 | -36.70 | 47.40 | 74.00 | 26.60 |
| Above 4900.00 | Not Detected | | | | | | | |

B. Middle Channel (2441 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 4881.84 | 49.23 | Peak | V | 33.17 | -36.69 | 45.71 | 74.00 | 28.29 |
| Above 4900.00 | Not Detected | | | | | | | |

C. High Channel (2480 MHz)

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | Amp Gain+CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 2483.50* | 50.16 | Peak | V | 28.18 | -36.81 | 41.53 | 74.00 | 32.47 |
| 4959.86 | 51.07 | Peak | V | 33.39 | -36.68 | 47.78 | 74.00 | 26.22 |
| Above 5000.00 | Not Detected | | | | | | | |



 Remarks

1. “*” means the restricted band.
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



2.4.4. Spurious RF conducted emissions: Plot of spurious RF conducted emission**Operating Mode: GFSK**

Low Channel

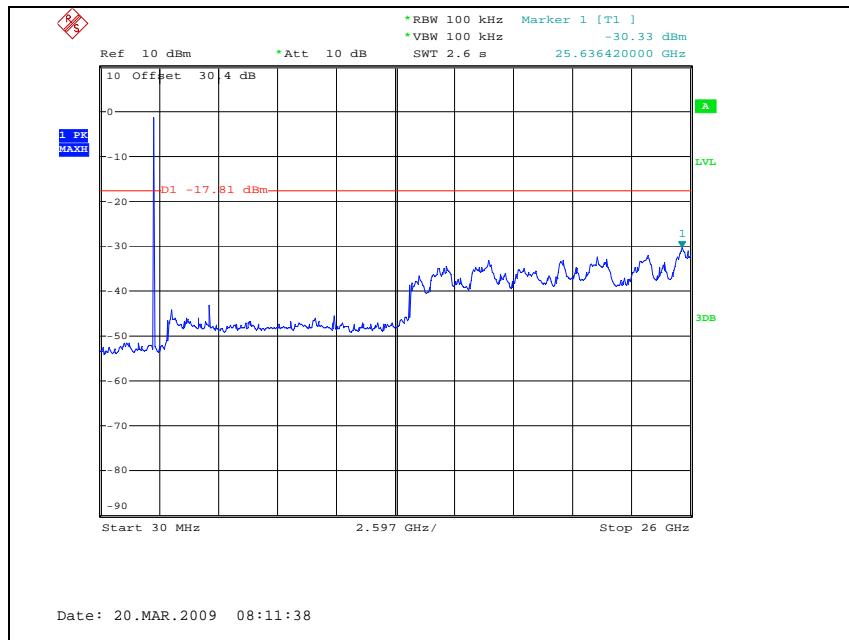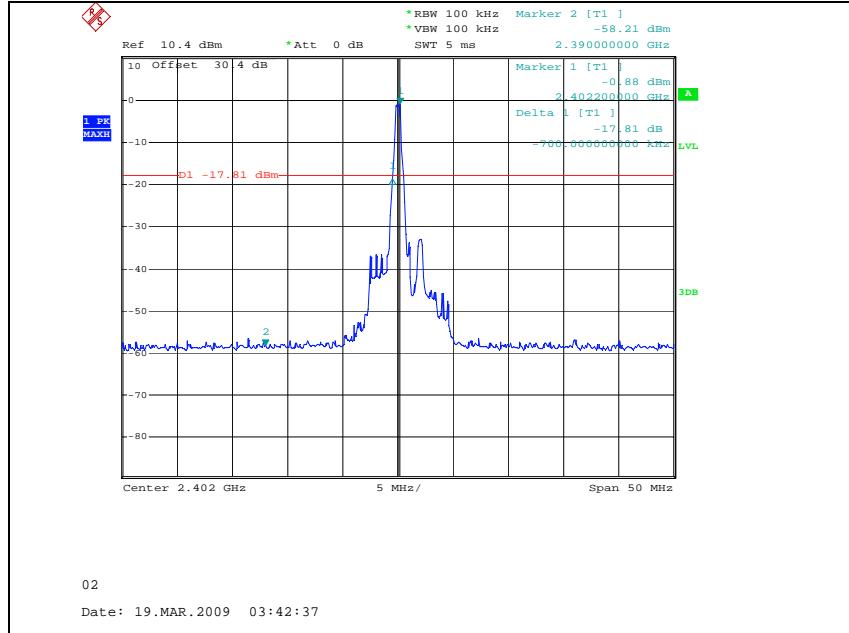



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

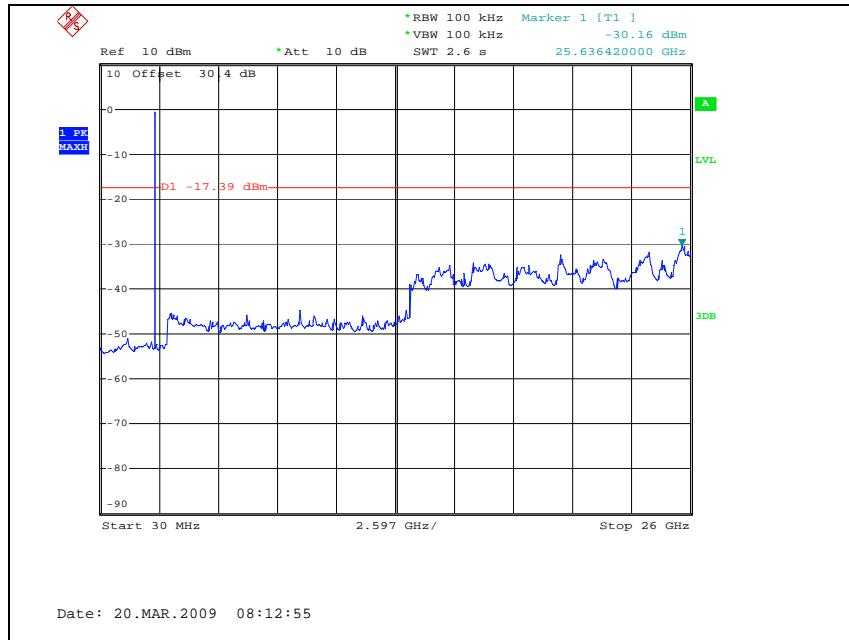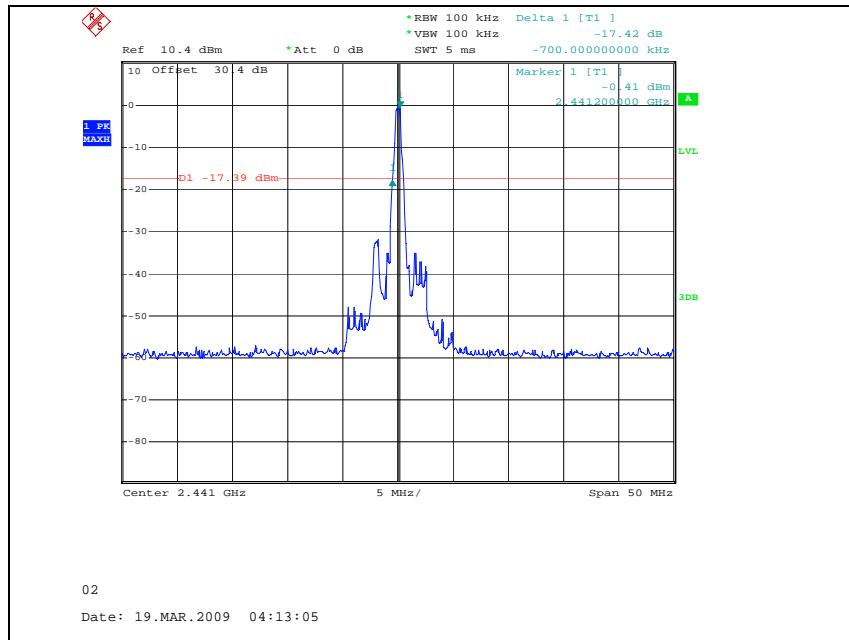

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

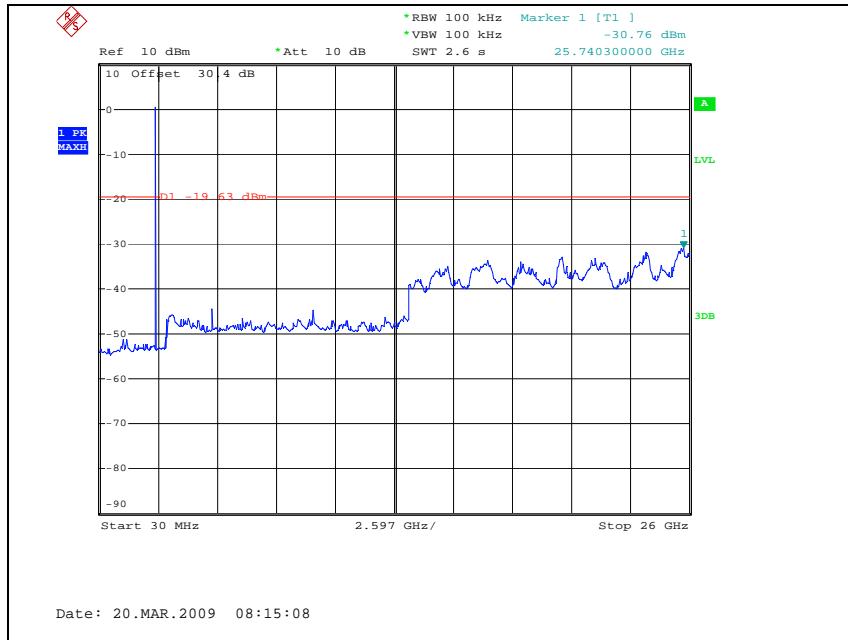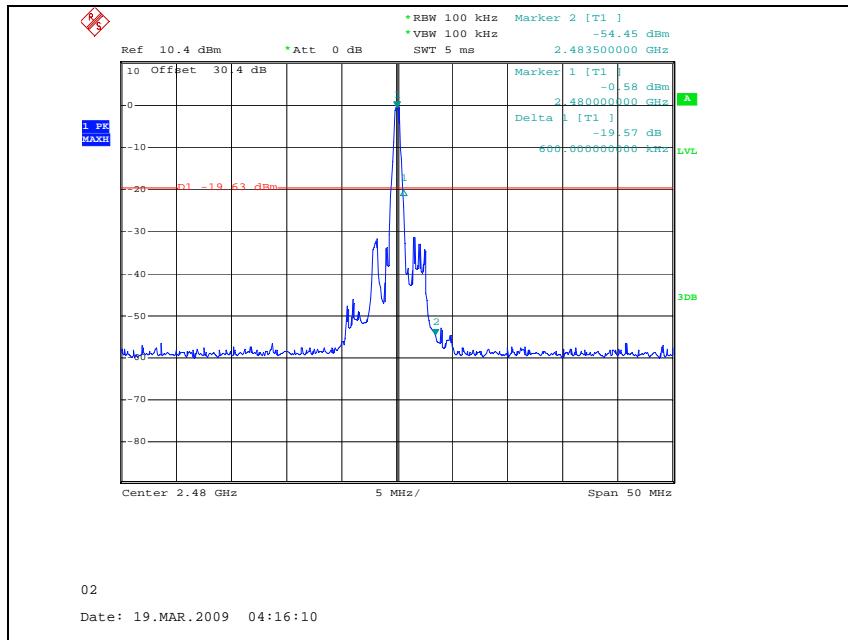

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.



18-34, Sanbon-dong, Gupno-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

Operating Mode: 8DPSK

Low Channel

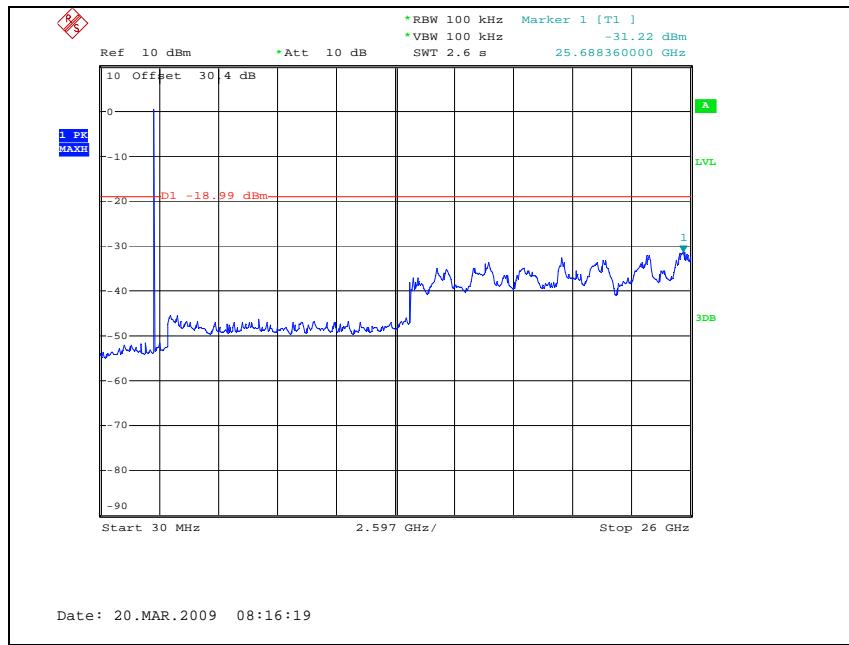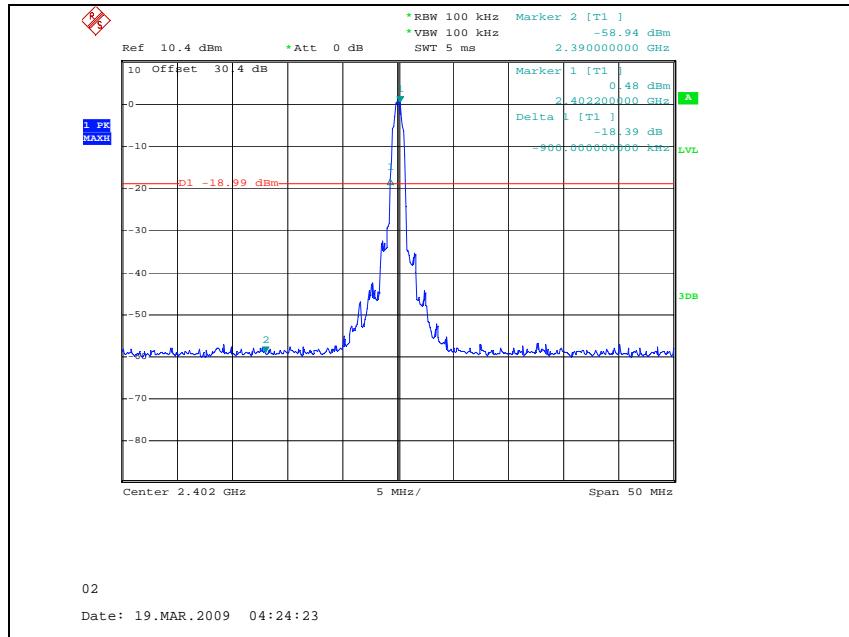

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

Middle Channel

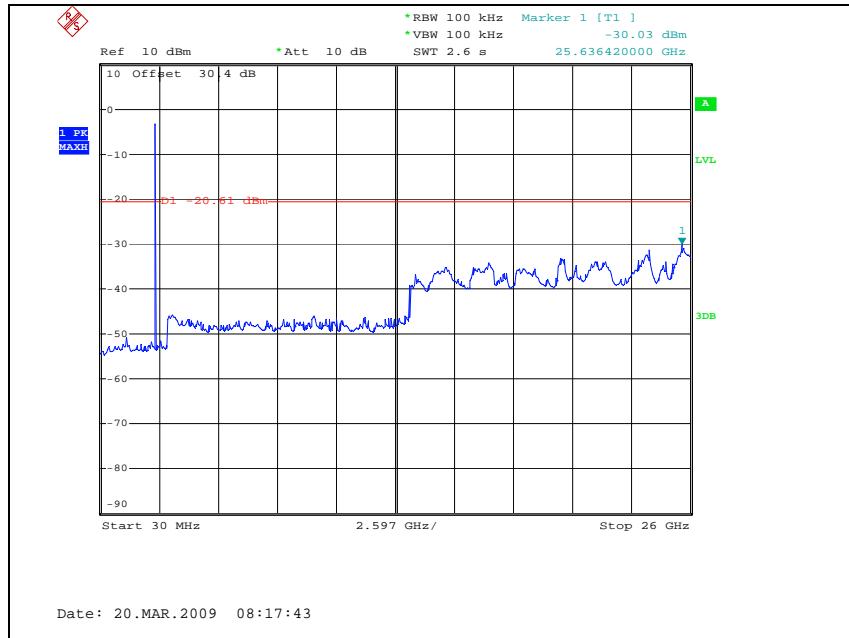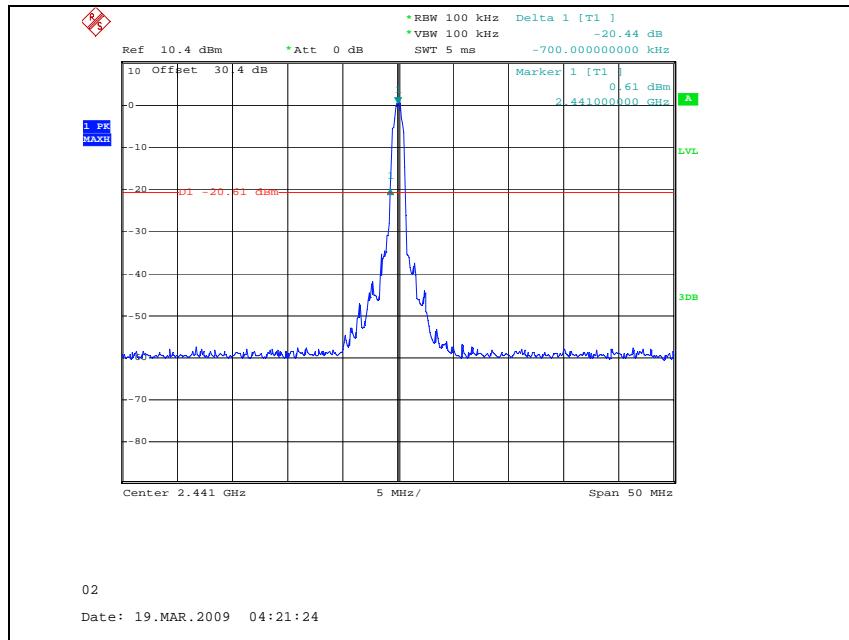

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gupno-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

High Channel

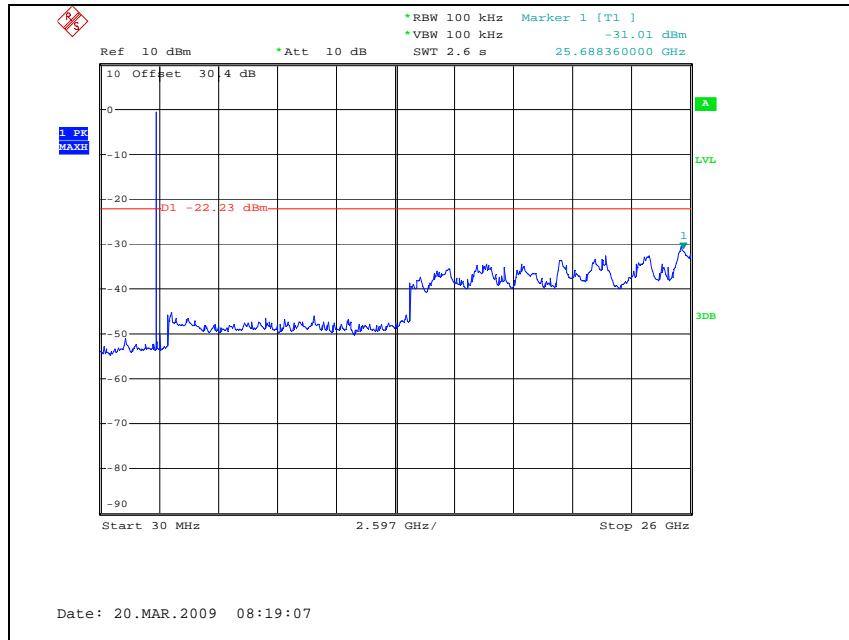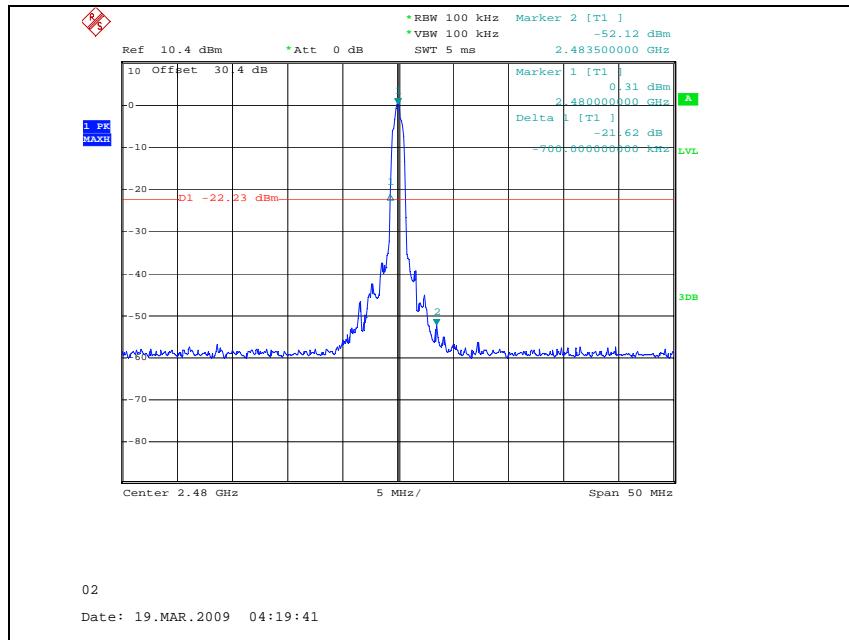

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. Receiver radiated spurious emissions

3.1. Test setup

Same as clause 3.1.

3.1.1. Receiver radiated spurious emissions

Same as clause 3.1.1.

3.2. Limit

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m) | Radiated (μV/m) |
|----------------------------|------------------------------|---|---|
| 30 - 88 | 3 | 40.0 | 100 |
| 88 – 216 | 3 | 43.5 | 150 |
| 216 – 960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

3.3. Test procedures

Same as clause 3.3.

3.3.1. Test procedures for radiated spurious emissions

Same as clause 3.3.1.

3.4. Test result

Ambient temperature : 23 °C
 Relative humidity : 45 % R.H.

3.4.1. Spurious radiated emission (Worst case configuration_8DPSK mode)_without ear phone

All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 464.08 | 8.20 | Q.P. | V | 15.07 | 2.45 | 25.72 | 46.00 | 20.28 |
| 772.05 | 4.30 | Q.P. | V | 19.48 | 3.13 | 26.91 | 46.00 | 19.09 |
| 728.40 | 4.40 | Q.P. | H | 18.94 | 3.03 | 26.37 | 46.00 | 19.63 |
| Above 800.00 | Not Detected | | | | | | | |

3.4.2. Spurious radiated emission (Worst case configuration_8DPSK mode)_with ear phone

All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

| Radiated Emissions | | | Ant | Correction Factors | | Total | Limit | |
|--------------------|----------------|-------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | AF (dB/m) | CL (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 71.23 | 5.23 | Q.P. | V | 6.53 | 0.93 | 12.69 | 40.00 | 27.31 |
| 464.08 | 11.28 | Q.P. | H | 15.07 | 2.45 | 28.80 | 46.00 | 17.20 |
| 568.35 | 10.05 | Q.P. | H | 16.52 | 2.69 | 29.26 | 46.00 | 16.74 |
| 580.48 | 9.16 | Q.P. | H | 16.70 | 2.70 | 28.56 | 46.00 | 17.44 |
| 616.85 | 4.70 | Q.P. | H | 17.32 | 2.77 | 24.79 | 46.00 | 21.21 |
| Above 700.00 | Not Detected | | | | | | | |


Remark:

1. All spurious emission at low, middle and high channel are almost the same below 1 GHz, so the spurious emission test result of the middle channel was chosen as representative in final test.
2. Any spurious emission is not detected above 1 GHz.
3. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. 20 dB bandwidth and 99% bandwidth

4.1. Test setup

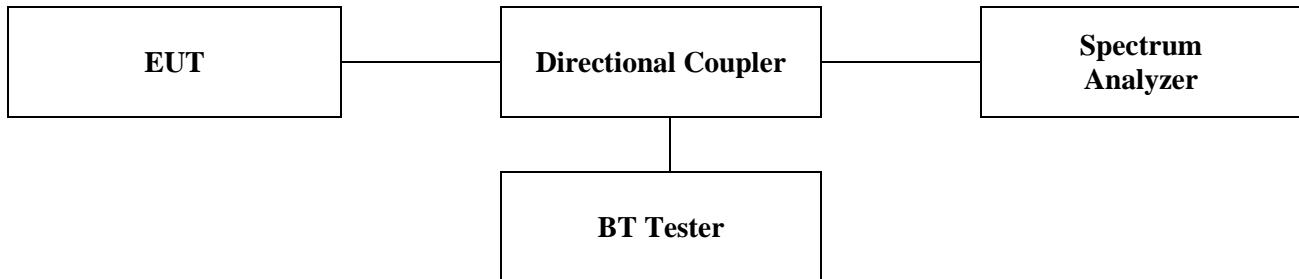

4.2. Limit

Limit: Not Applicable

4.3. Test procedure

1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=10 kHz, VBW=10 kHz, Span=5 MHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4. Test result

Ambient temperature : 24 °C

Relative humidity : 46 %


| Operation Mode | Channel frequency (MHz) | 20 dB bandwidth (MHz) | 99% bandwidth (MHz) |
|----------------|-------------------------|-----------------------|---------------------|
| GFSK | 2402 | 0.76 | 0.86 |
| | 2441 | 0.76 | 0.86 |
| | 2480 | 0.76 | 0.86 |
| 8DPSK | 2402 | 1.21 | 1.16 |
| | 2441 | 1.21 | 1.15 |
| | 2480 | 1.21 | 1.15 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


20 dB bandwidth

Operating mode: GFSK

Low channel

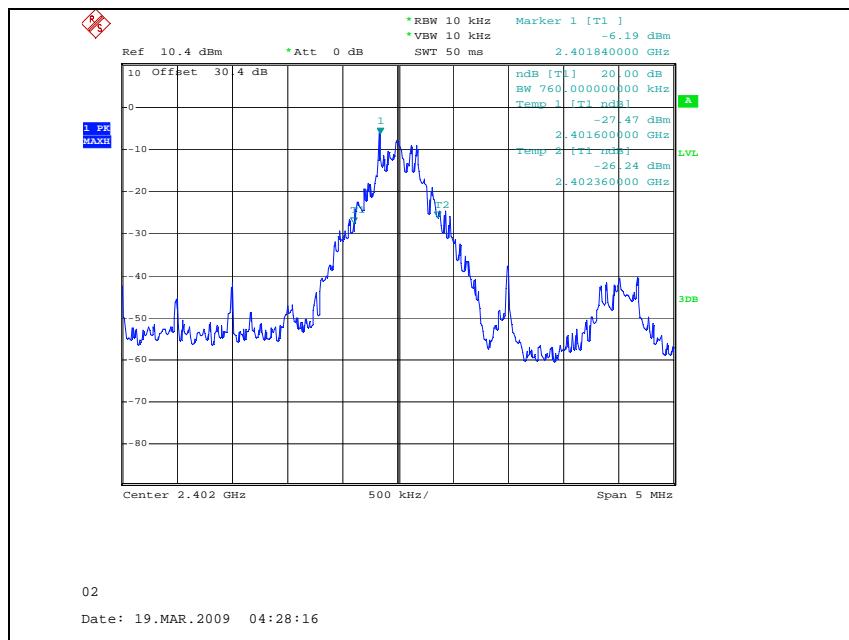

Middle channel

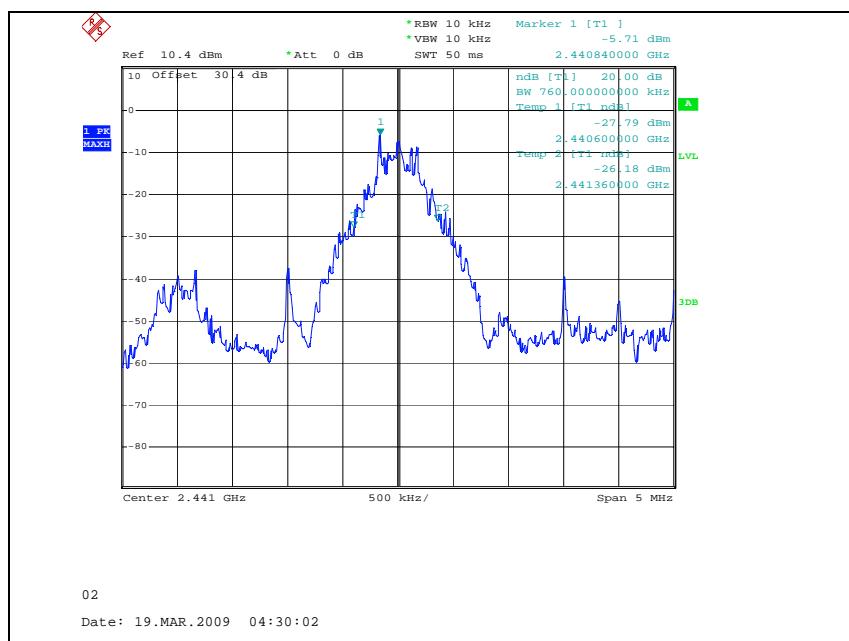

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

High channel

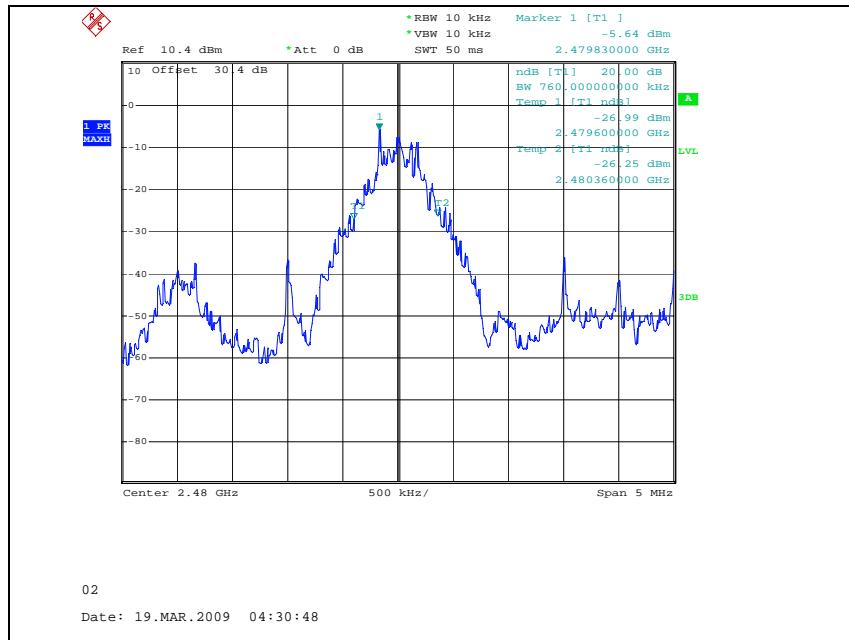

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.electrolab.kr.sgs.com

Operating mode: 8DPSK

Low channel

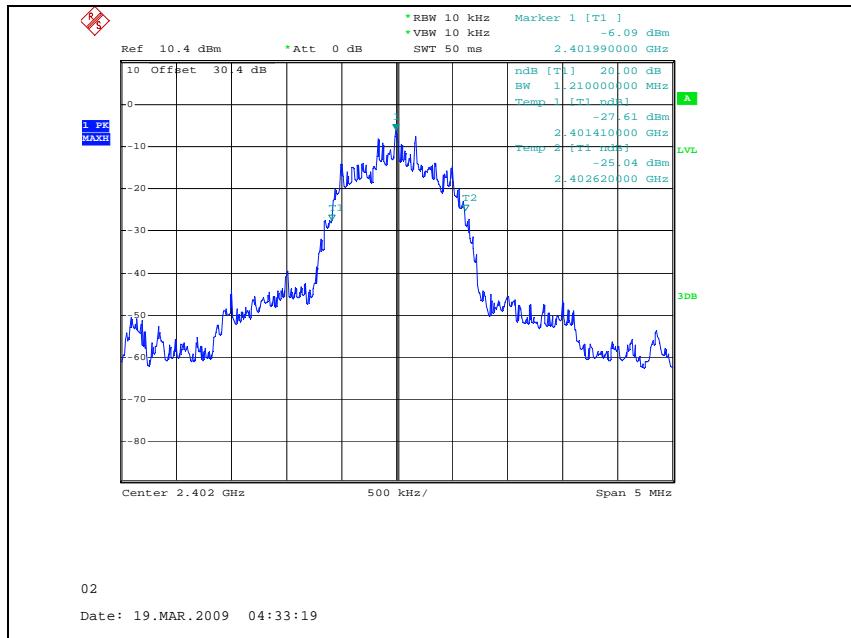

Middle channel

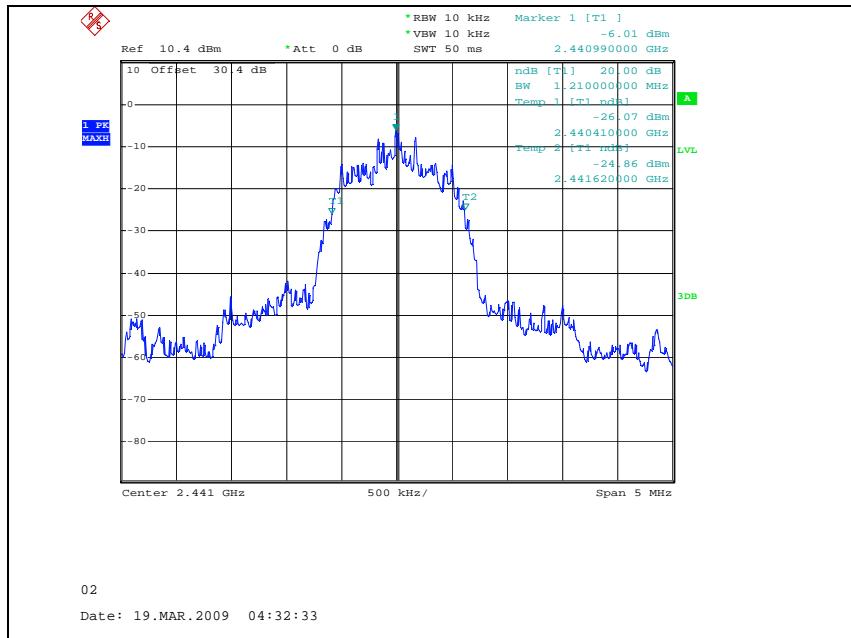

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

High channel

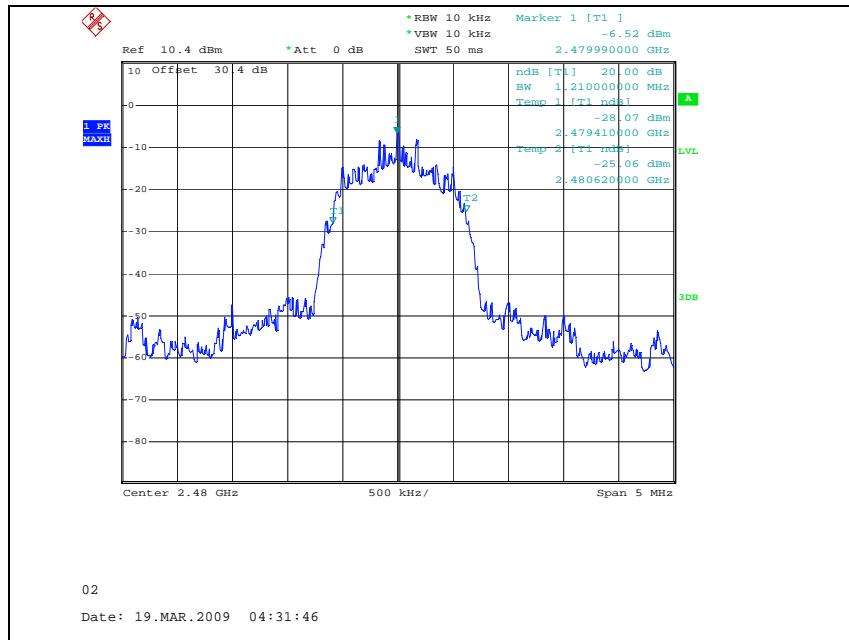

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.electrolab.kr.sgs.com

99% bandwidth**Operating mode: GFSK**

Low channel

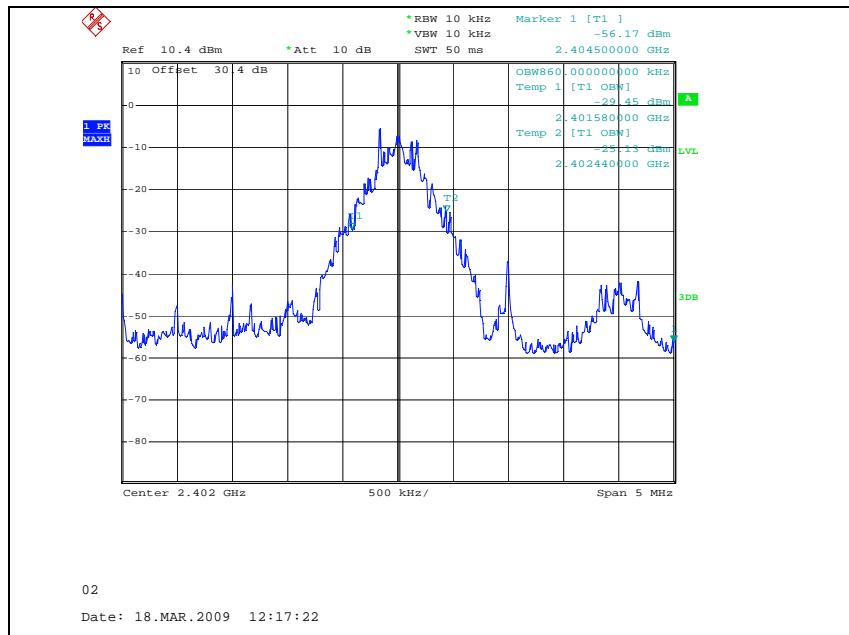


Middle channel

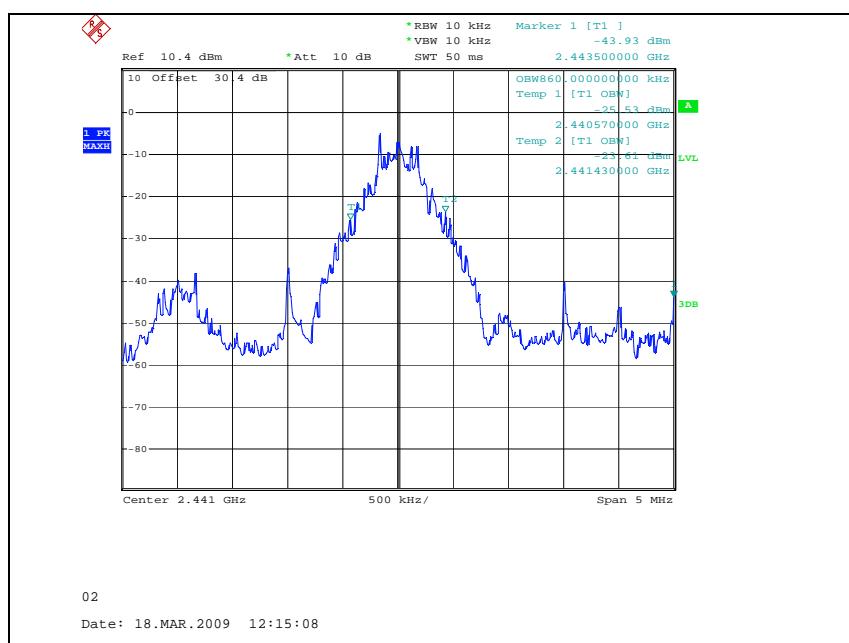

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High channel

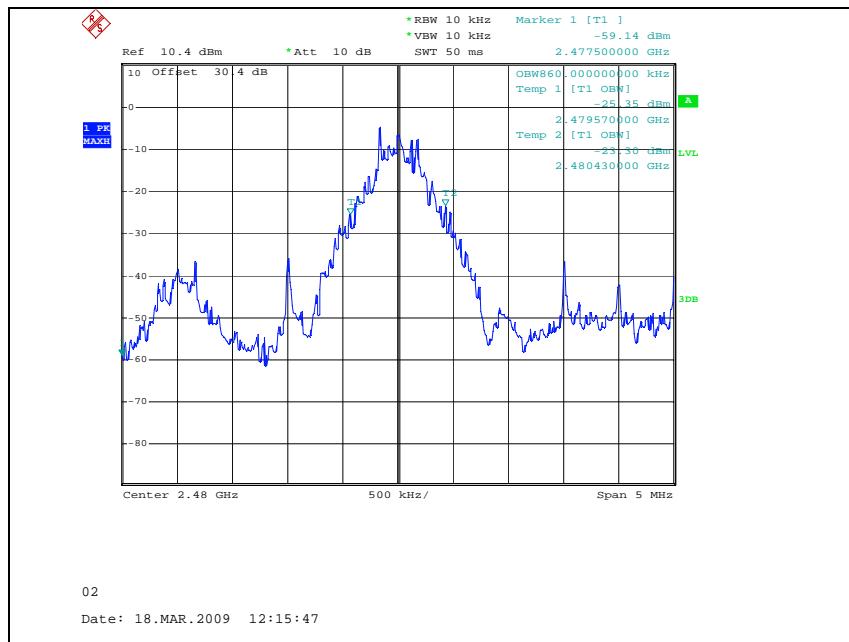

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gupno-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.electrolab.kr.sgs.com

Operating mode: 8DPSK

Low channel

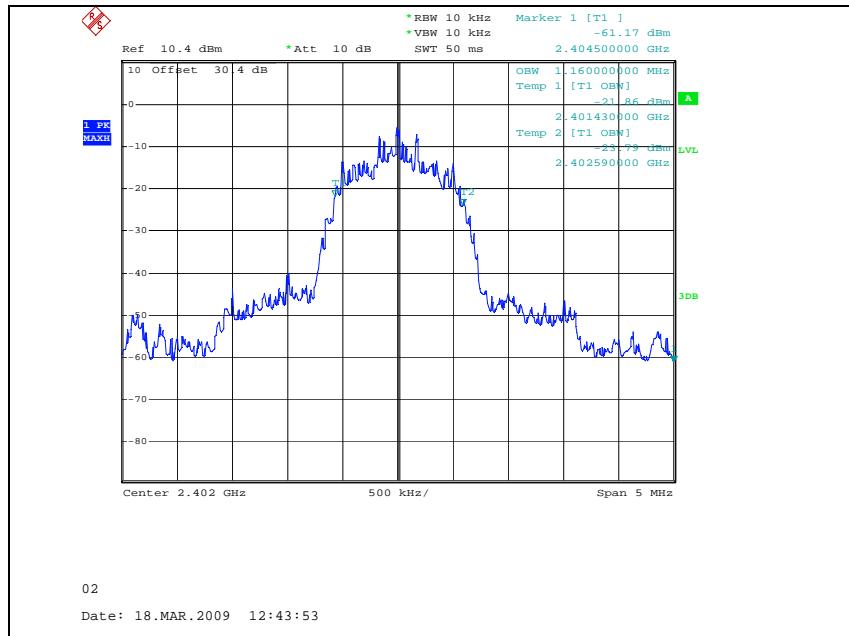


Middle channel

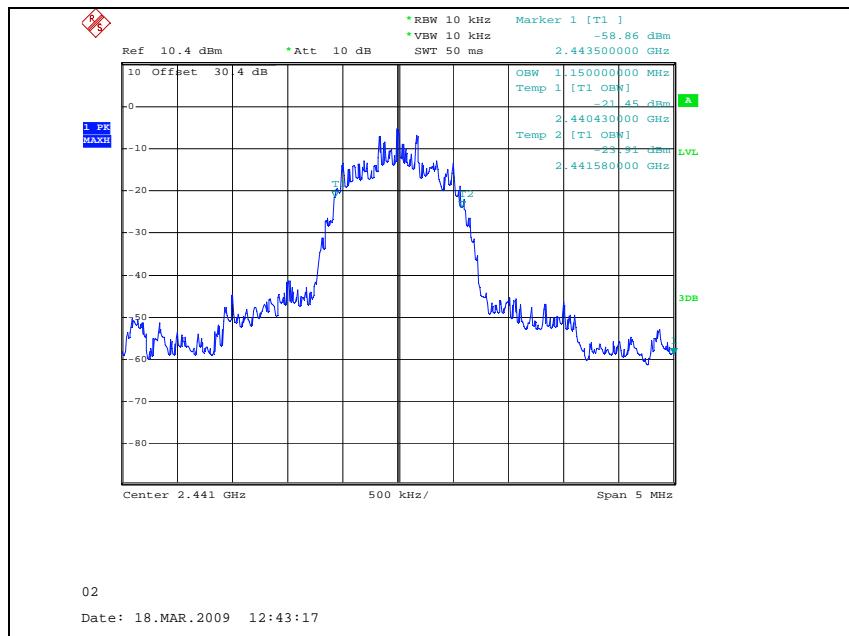

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High channel

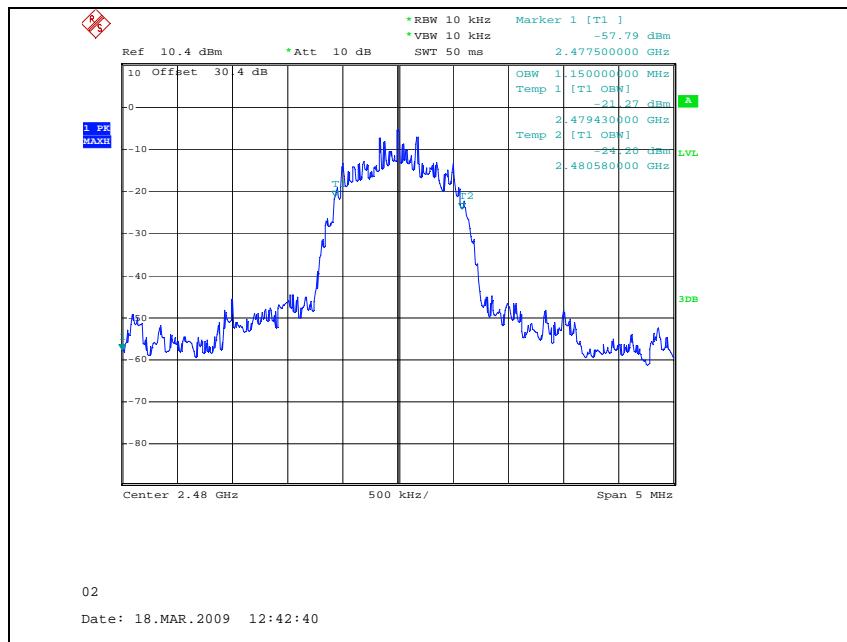

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

5. Maximum peak output power

5.1. Test setup

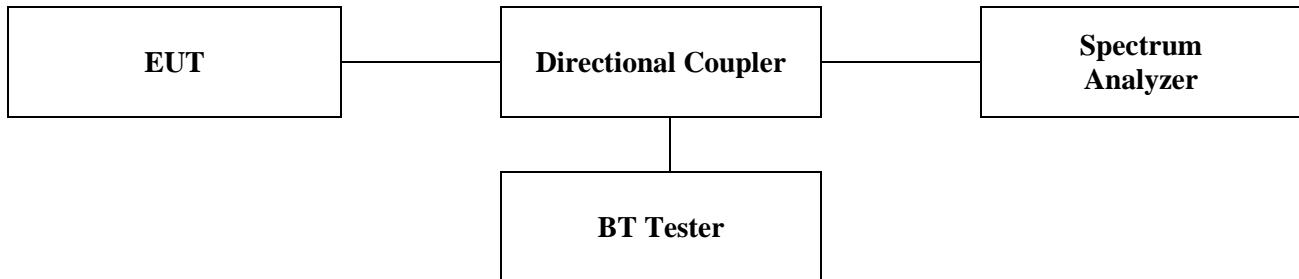

5.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

5.3. Test procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 20\text{dB BW}$
 $VBW \geq RBW$
Sweep = auto
Detector function = peak
Trace = max hold

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4. Test result

Ambient temperature : 24 °C


Relative humidity : 46 %

| Operation mode | Channel | Frequency (MHz) | Peak power (dBm) | Limit (dBm) |
|----------------|---------|-----------------|------------------|-------------|
| GFSK | Low | 2402 | 0.14 | 20.97 |
| | Middle | 2441 | 0.68 | 20.97 |
| | High | 2480 | 1.07 | 20.97 |
| 8DPSK | Low | 2402 | 2.85 | 20.97 |
| | Middle | 2441 | 3.10 | 20.97 |
| | High | 2480 | 2.99 | 20.97 |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: GFSK

Low channel

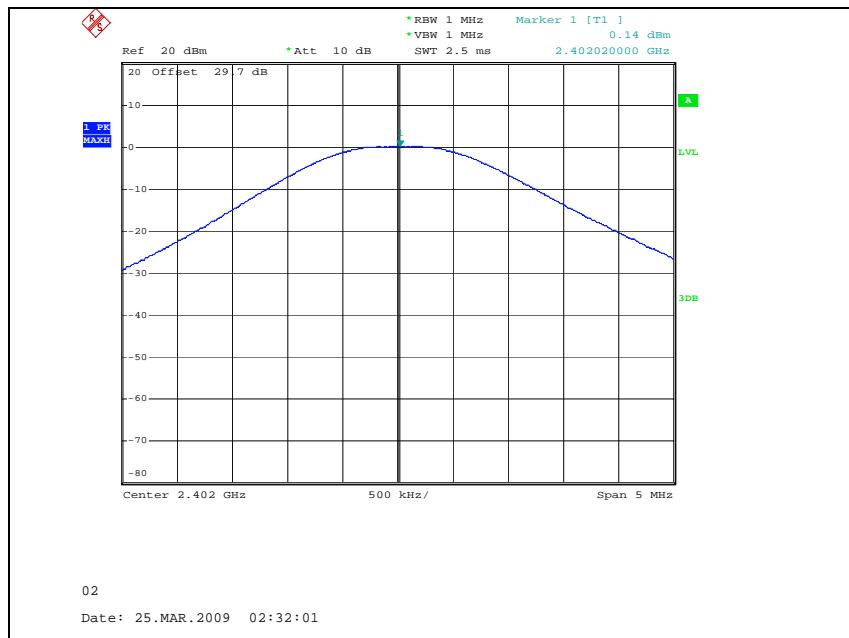

Middle channel

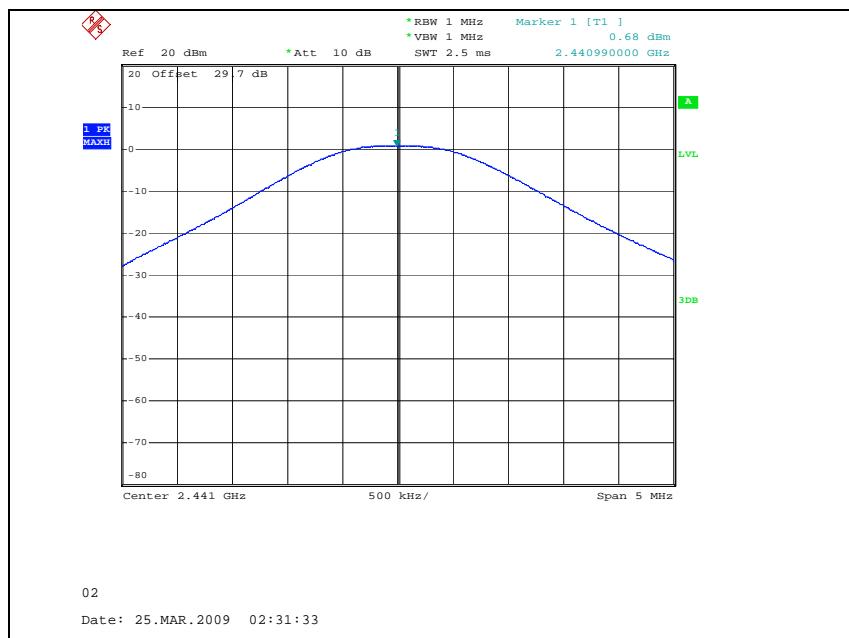

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

High channel

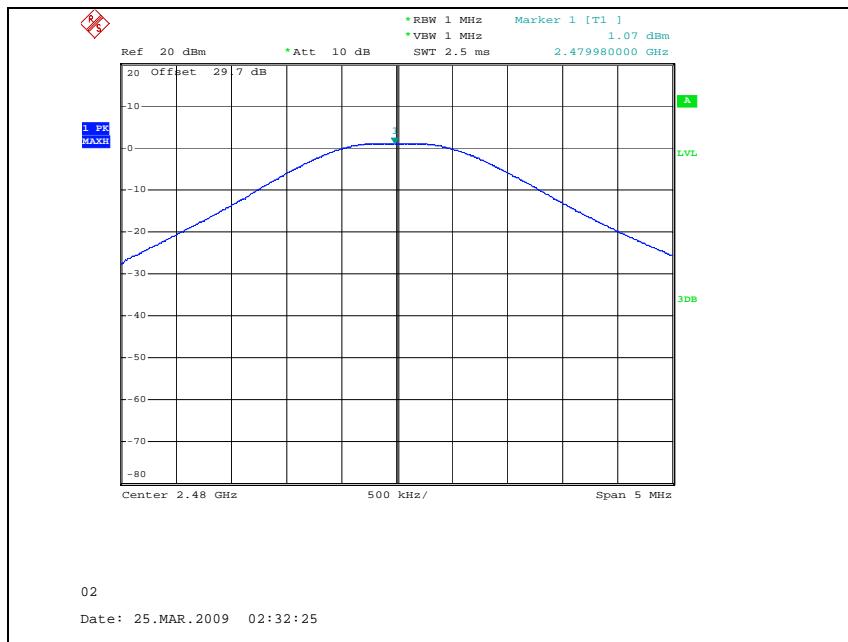

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.electrolab.kr.sgs.com

Operating mode: 8DPSK

Low channel

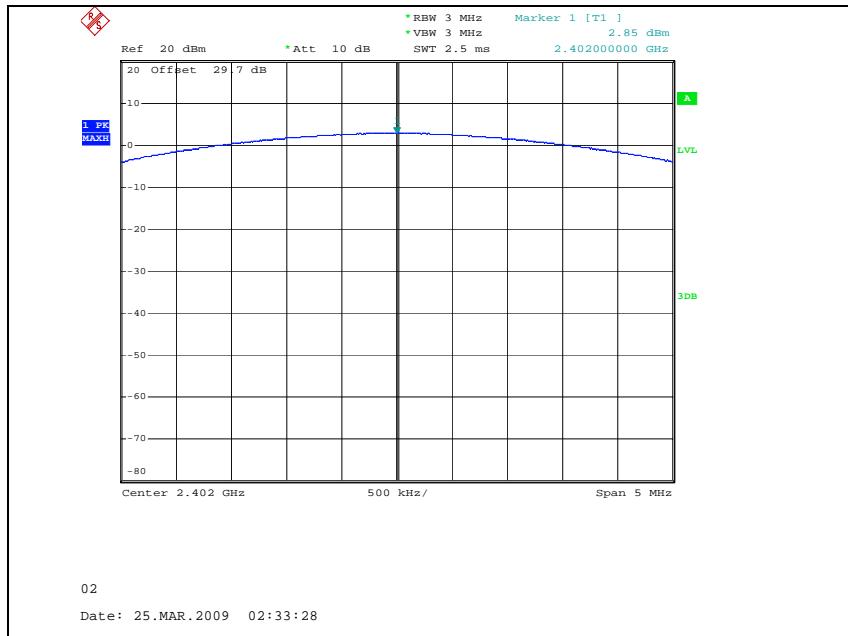

Middle channel

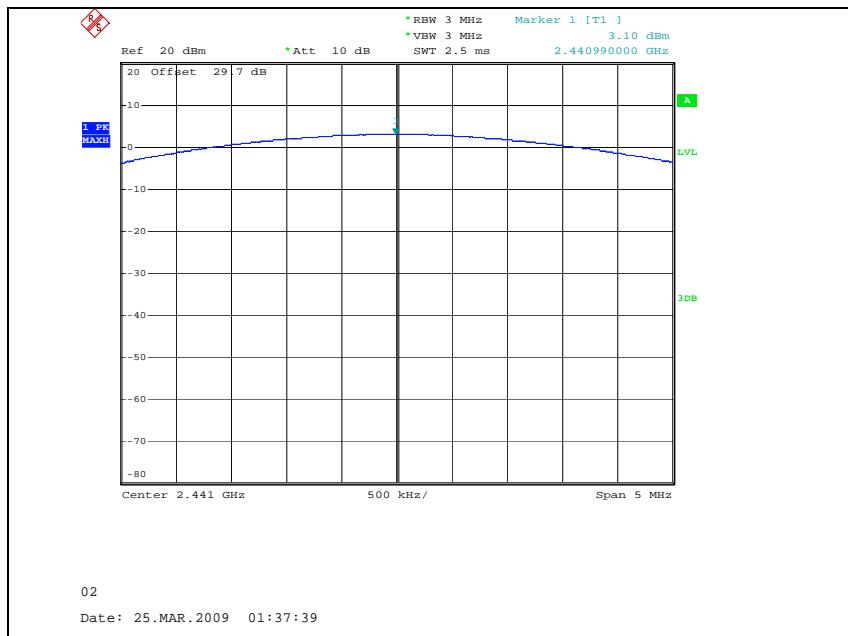

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

High channel

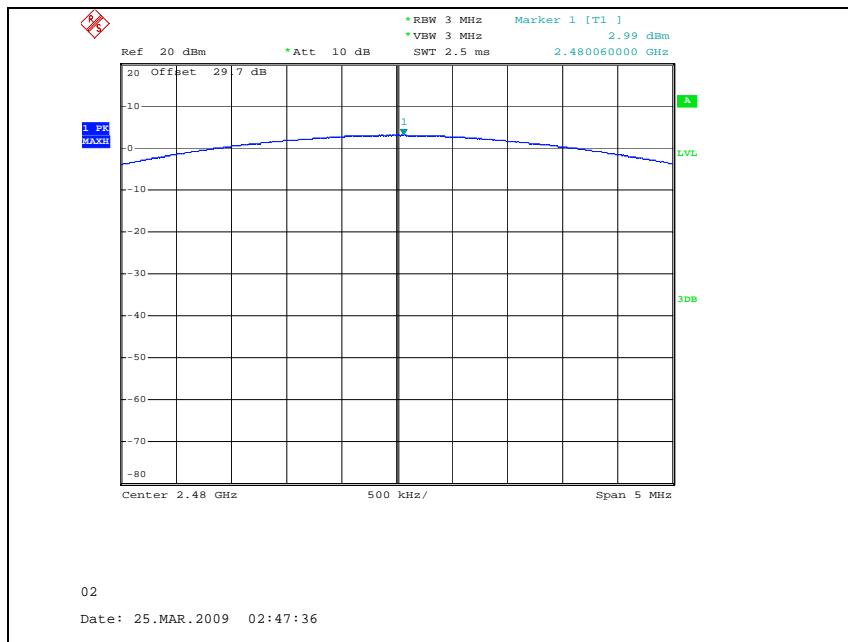

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

6. Hopping channel separation

6.1. Test setup

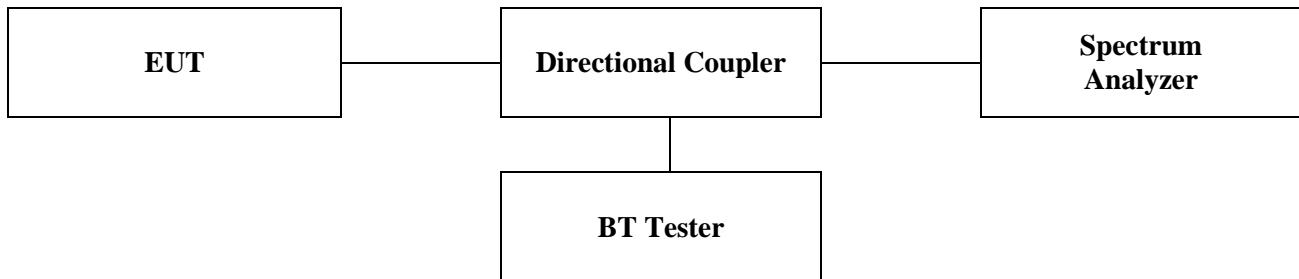

6.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2400-2483.5MHz. Band may have hopping channel carrier frequencies that are separated by 25kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

6.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=5 MHz and Sweep = auto.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4. Test result



Ambient temperature : 24 °C

Relative humidity : 46 %

| Operation Mode | Channel (Middle) | Adjacent Hopping Channel Separation (kHz) | Two-third of 20 dB Bandwidth (kHz) | Minimum Bandwidth (kHz) |
|----------------|------------------|---|------------------------------------|-------------------------|
| GFSK | 2441 MHz | 1000 | 506.667 | 25 |
| 8DPSK | 2441 MHz | 1000 | 806.667 | 25 |

■ Note

20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.

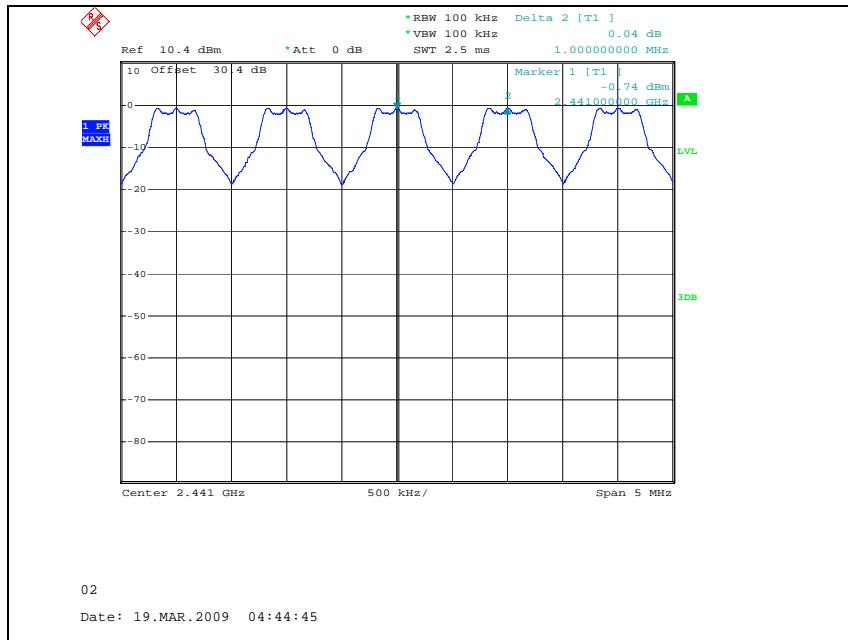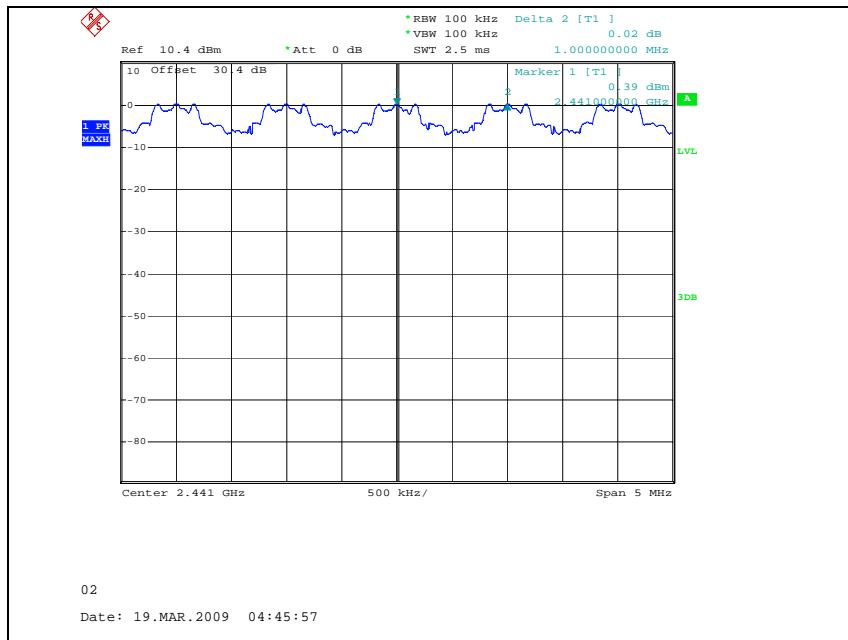Operating mode: GFSK**Operating mode: 8DPSK**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

7. Number of hopping frequency

7.1. Test setup

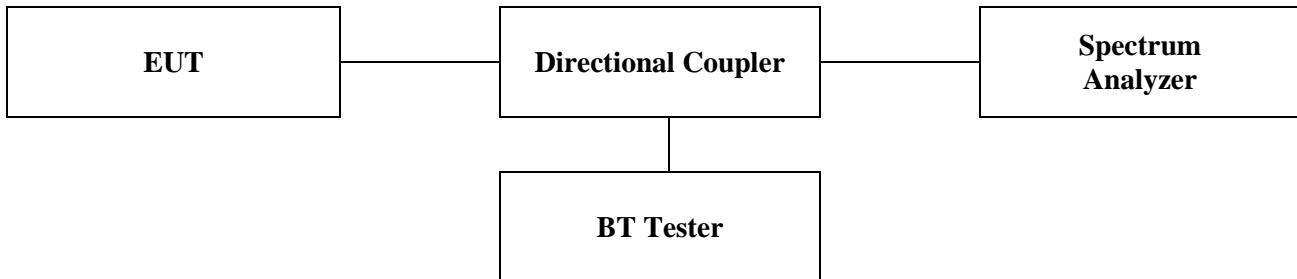

7.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies.

7.3. Test procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
3. Set spectrum analyzer Start=2400 MHz, Stop=2441.5 MHz, Sweep=auto and Start=2441.5 MHz, Stop= 2483.5 MHz, Sweep=auto.
4. Set the spectrum analyzer as RBW, VBW=300 kHz.
5. Max hold, view and count how many channel in the band.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.4. Test result

Ambient temperature : 24 °C

Relative humidity : 46 %

| Operation mode | Number of hopping frequency | Limit |
|----------------|-----------------------------|-------|
| GFSK | 79 | >= 15 |
| 8DPSK | 79 | >= 15 |



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

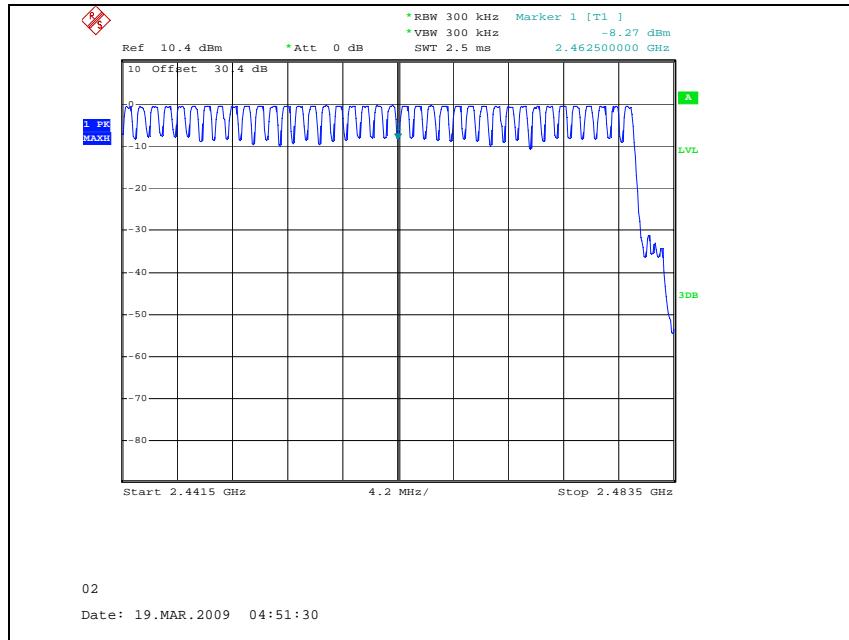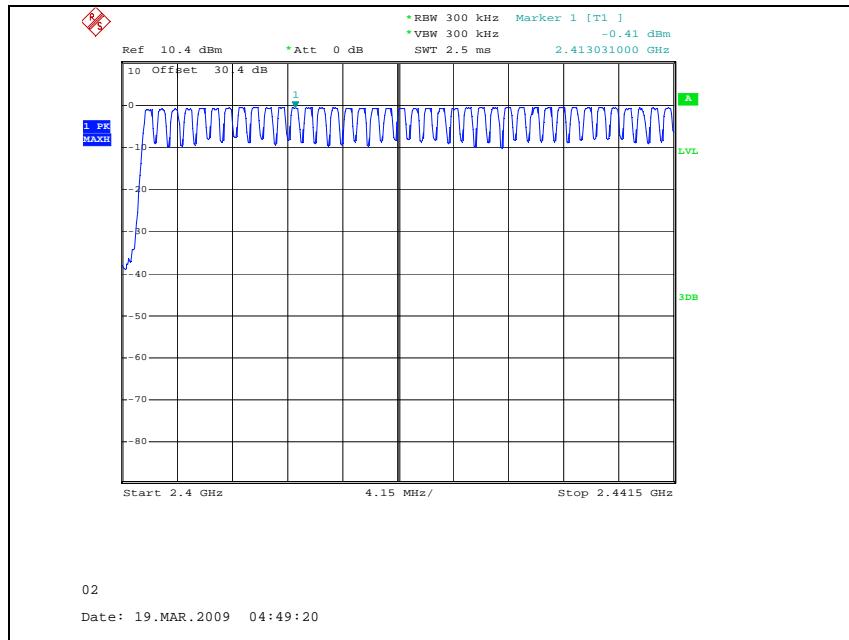Operating Mode: GFSK



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

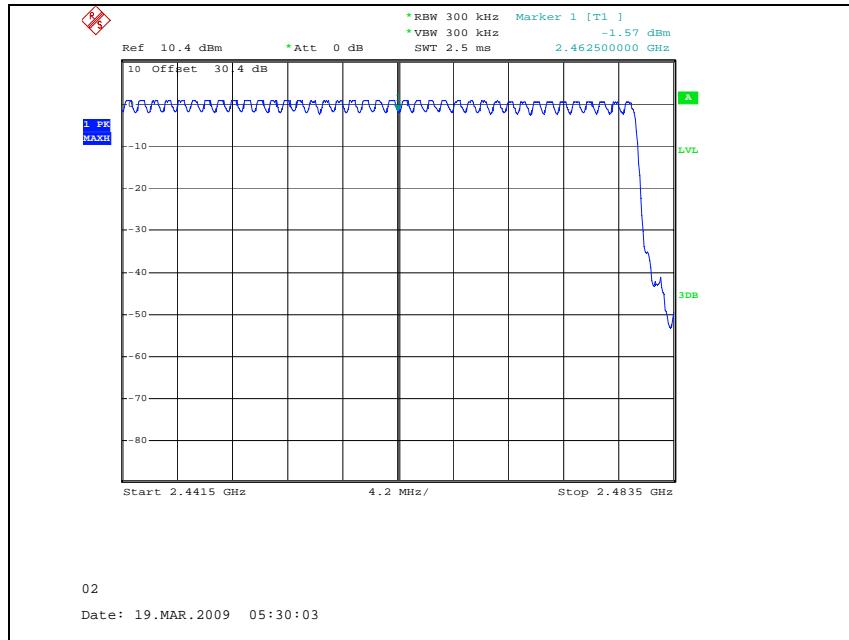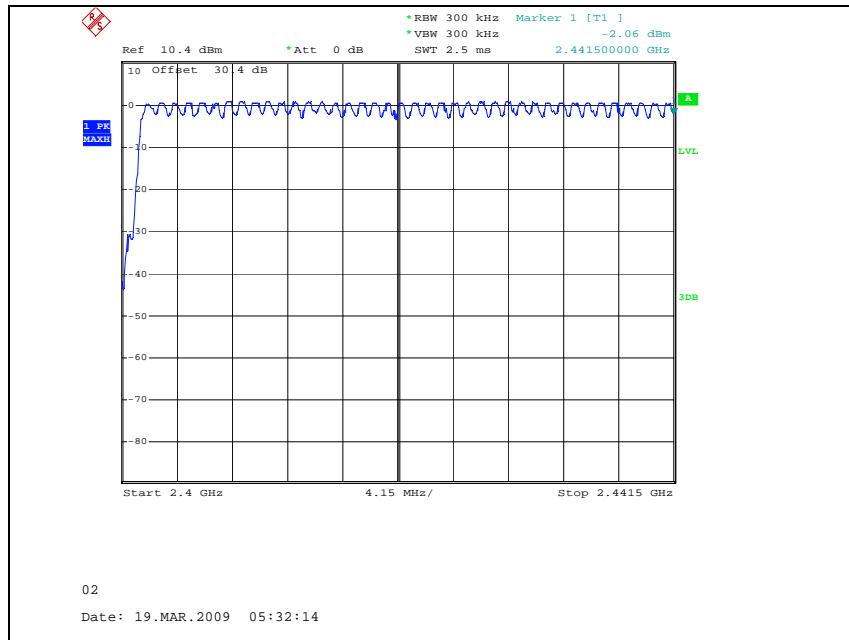Operating Mode: 8DPSK

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

8. Time of occupancy (Dwell time)

8.1. Test setup

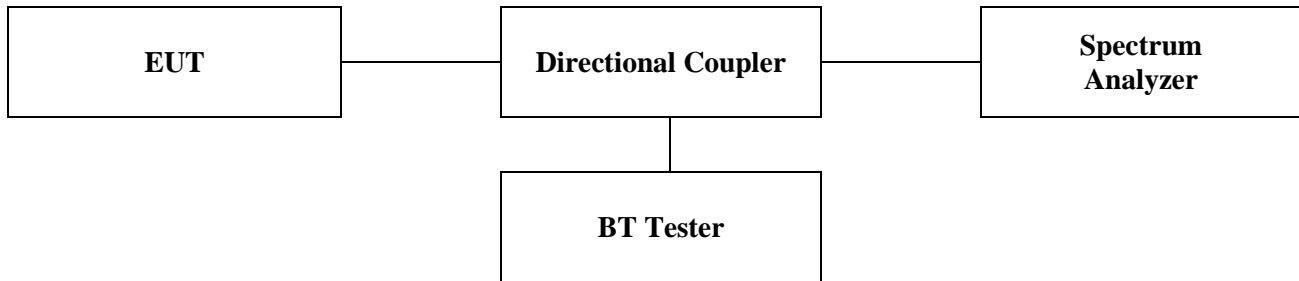

8.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time=0.4(s) \times 79 = 31.6(s)

8.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth has 3 type of payload, DH1, DH3, DH5 and 3-DH1, 3-DH3,3-DH5. The hopping rate is 1600 per second.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8.4. Test result

Ambient temperature : 24 °C

Relative humidity : 46 %

Time of occupancy on the TX channel in 31.6sec

= time domain slot length × (hop rate ÷ number of hop per channel) × 31.6

8.4.1. Operation mode : GFSK

| Frequency | Packet type | Dwell time (ms) | Time of occupancy on the Tx channel in 31.6 sec (ms) | Limit for time of occupancy on the Tx channel in 31.6 sec (ms) |
|-----------|-------------|-----------------|--|--|
| 2441 MHz | DH1 | 0.40 | 128.00 | 400 |
| 2441 MHz | DH3 | 1.66 | 265.60 | 400 |
| 2441 MHz | DH5 | 2.90 | 309.33 | 400 |


DH1 Dwell time : 0.40 (ms) × [(1600 ÷ 2) ÷ 79] × 31.6(s) = 128.00 (ms)

DH3 Dwell time : 1.66 (ms) × [(1600 ÷ 4) ÷ 79] × 31.6(s) = 265.60 (ms)


DH5 Dwell time : 2.90 (ms) × [(1600 ÷ 6) ÷ 79] × 31.6(s) = 309.33 (ms)

Operating mode:GFSK

DH1

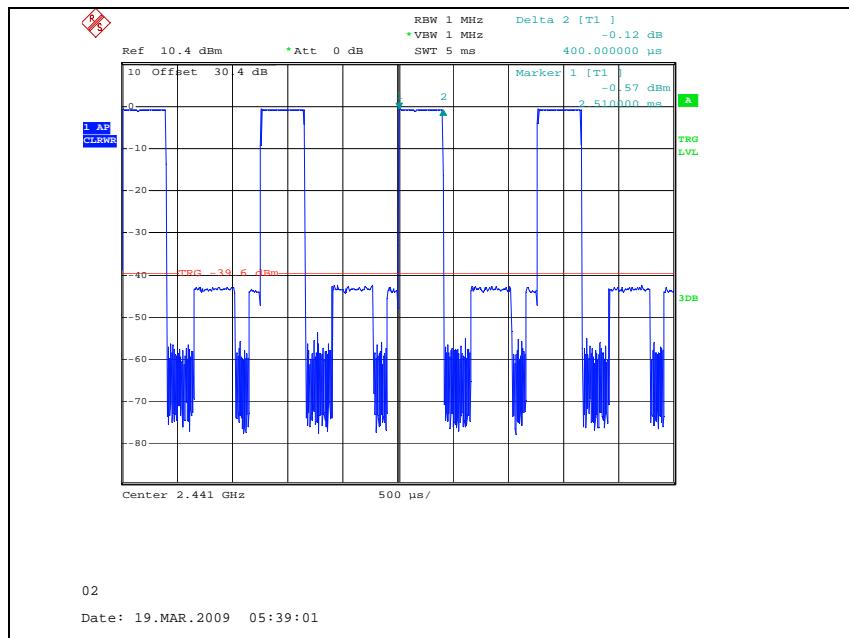

DH3

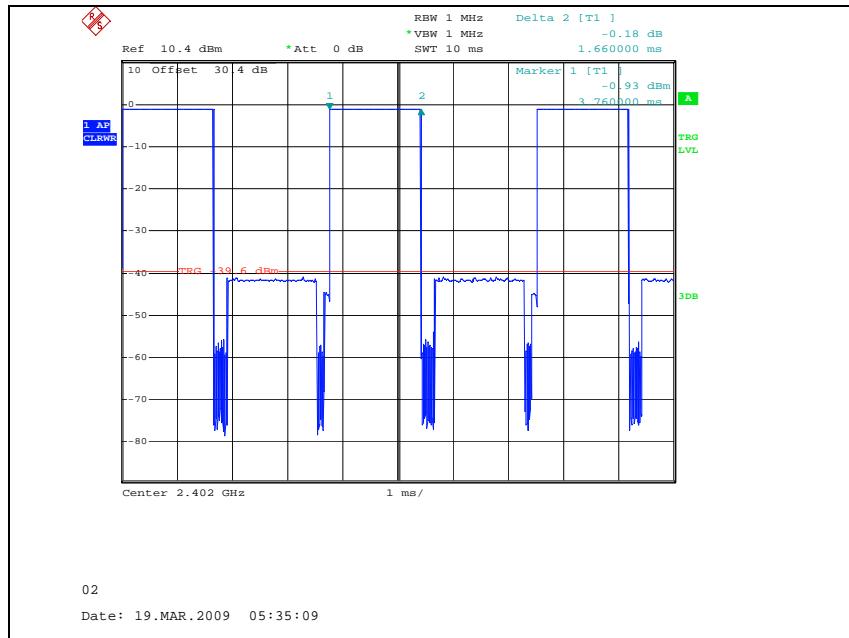

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

DH5

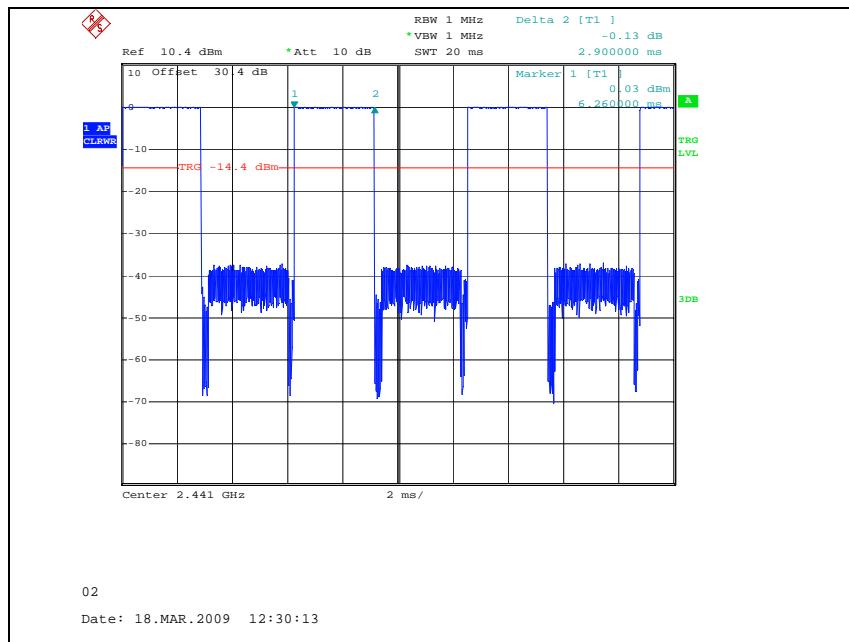

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com



8.4.2. Operation mode: 8DPSK

| Frequency | Packet type | Dwell time (ms) | Time of occupancy on the Tx channel in 31.6 sec (ms) | Limit for time of occupancy on the Tx channel in 31.6 sec (ms) |
|-----------|-------------|-----------------|--|--|
| 2441 MHz | 3-DH1 | 0.41 | 131.20 | 400 |
| 2441 MHz | 3-DH3 | 1.67 | 267.20 | 400 |
| 2441 MHz | 3-DH5 | 2.92 | 311.47 | 400 |

3-DH1 Dwell time : 0.41 (ms) \times [(1600 \div 2) \div 79] \times 31.6(s) = 131.20 (ms)


3-DH3 Dwell time : 1.67 (ms) \times [(1600 \div 4) \div 79] \times 31.6(s) = 267.20 (ms)

3-DH5 Dwell time : 2.92 (ms) \times [(1600 \div 6) \div 79] \times 31.6(s) = 311.47 (ms)

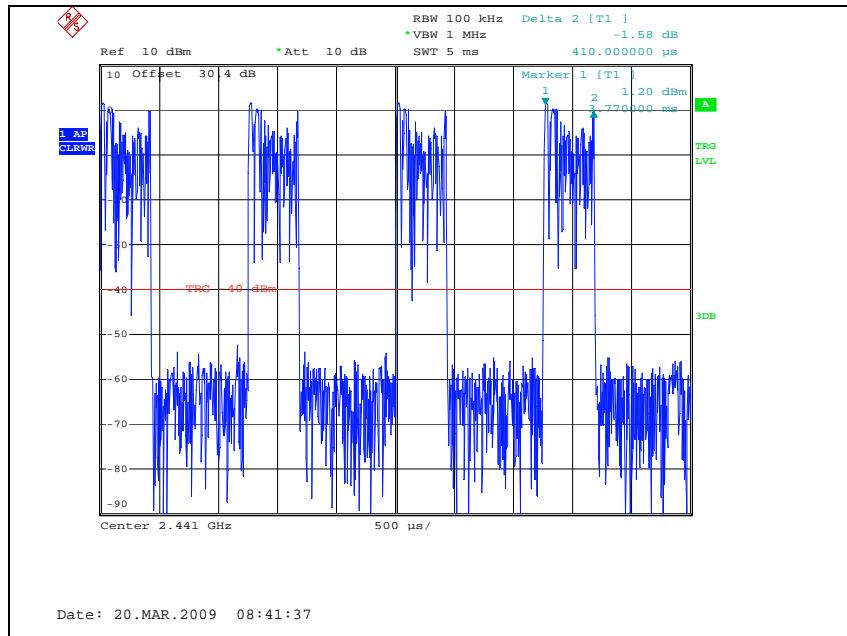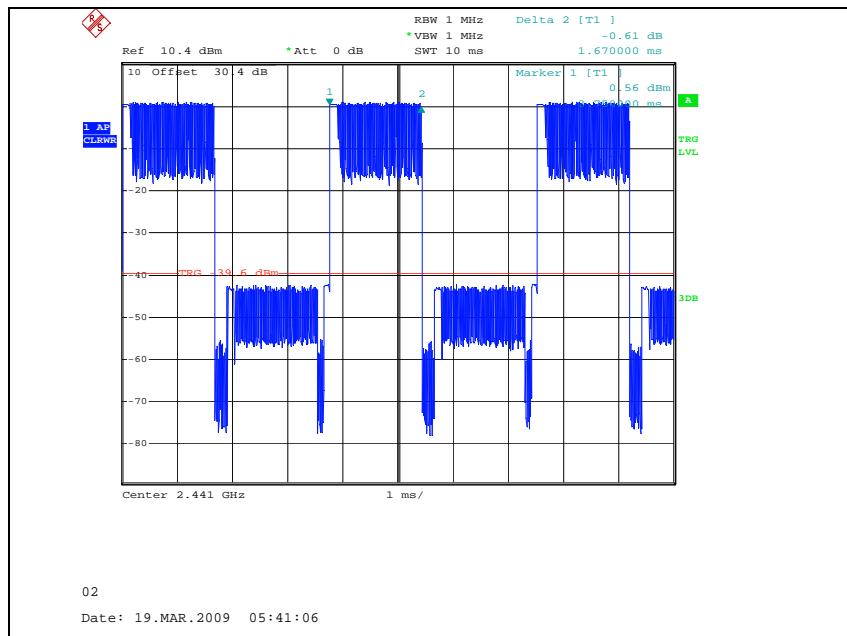Operating mode:8DPSK**3-DH1****3-DH3**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3-DHS

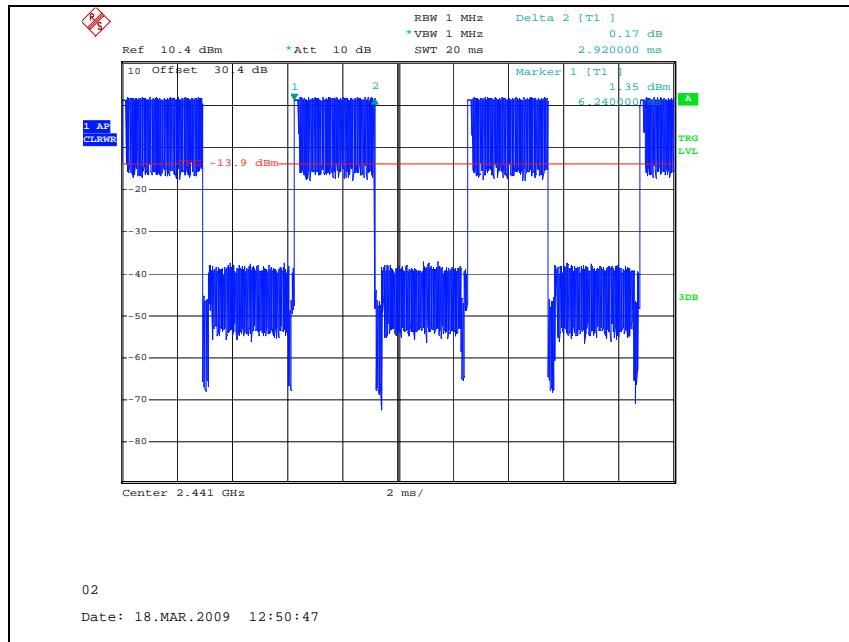

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

9. Antenna requirement

9.1. Standard applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6dBi.

9.2. Antenna connected construction

The antenna used of this product is Chip antenna.

The peak max gain of this antenna is -0.42 dBi

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

10. RF exposure evaluation

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength(V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Average time |
|---|------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational /Control Exposures | | | | |
| 300 – 1500 | -- | -- | F/300 | 6 |
| 1500 - 100000 | -- | -- | 5 | 6 |
| (B) Limits for General Population/Uncontrol Exposures | | | | |
| 300 – 1500 | -- | -- | F/1500 | 6 |
| <u>1500 - 100000</u> | -- | -- | <u>1</u> | <u>30</u> |

10.1 Friis transmission formula : $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where

Pd = power density in mW/cm²

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = distance between observation point and center of the radiator in cm

Pd the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

10.2 Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

10.2.1 Output power into antenna & RF exposure evaluation distance

| Operating mode | Channel | Frequency (MHz) | Peak output power (dBm) | Antenna gain (dBi) | Power density at 20cm (mW/cm ²) | Limit (mW/cm ²) |
|----------------|---------|-----------------|-------------------------|--------------------|---|-----------------------------|
| GFSK | Low | 2402 | 0.14 | -0.42 | 0.00019 | 1 |
| | Middle | 2441 | 0.68 | -0.42 | 0.00021 | |
| | High | 2480 | 1.07 | -0.42 | 0.00023 | |
| 8DPSK | Low | 2402 | 2.85 | -0.42 | 0.00035 | 1 |
| | Middle | 2441 | 3.10 | -0.42 | 0.00037 | |
| | High | 2480 | 2.99 | -0.42 | 0.00036 | |

■ Note

The power density Pd (4th column) at a distance of 20cm calculated from the friis transmission formula is far below the limit of 1 mW/ cm².