



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



## MEASUREMENT REPORT FCC PART 15.247 Bluetooth (Low Energy)

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro, Yeongtong-gu  
Suwon-city, Gyeonggi-do, 443-803  
Republic of Korea

**Date of Testing:**

Feb. 13 - March 1, 2013

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y1302120251.A3L

**FCC ID:**

A3LSCHI545

**APPLICANT:**

Samsung Electronics Co., Ltd.

**Application Type:**

Certification

**Model:**

SCH-I545

**EUT Type:**

Portable Handset

**Max. RF Output Power:**

3.495 mW (5.44 dBm) Peak Conducted

**Frequency Range:**

2402 - 2480 MHz

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**


Part 15.247

**Test Procedure(s):**



ANSI C63.10-2009

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2009. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
Randy Ortanez  
President



<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 1 of 43

## TABLE OF CONTENTS

FCC PART 15.247 MEASUREMENT REPORT .....	3
1.0 INTRODUCTION .....	4
1.1 SCOPE .....	4
1.2 PCTEST TEST LOCATION .....	4
2.0 PRODUCT INFORMATION .....	5
2.1 EQUIPMENT DESCRIPTION .....	5
2.2 DEVICE CAPABILITIES .....	5
2.3 TEST CONFIGURATION .....	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
2.5 LABELING REQUIREMENTS .....	5
3.0 DESCRIPTION OF TEST .....	6
3.1 EVALUATION PROCEDURE .....	6
3.2 CONDUCTED EMISSIONS .....	6
3.3 RADIATED EMISSIONS .....	7
4.0 ANTENNA REQUIREMENTS .....	8
5.0 TEST EQUIPMENT CALIBRATION DATA .....	9
6.0 TEST RESULTS .....	10
6.1 SUMMARY .....	10
6.2 6DB BANDWIDTH MEASUREMENT – BLUETOOTH (LE) .....	11
6.3 OUTPUT POWER MEASUREMENT – BLUETOOTH (LE) .....	15
6.4 POWER SPECTRAL DENSITY – BLUETOOTH (LE) .....	17
6.5 CONDUCTED EMISSIONS AT THE BAND EDGE .....	21
6.6 CONDUCTED SPURIOUS EMISSIONS .....	23
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS .....	28
6.8 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....	33
6.9 RADIATED RESTRICTED BAND EDGE MEASUREMENTS W/ WCC .....	37
6.10 LINE-CONDUCTED TEST DATA .....	41
7.0 CONCLUSION .....	43

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 2 of 43



## MEASUREMENT REPORT

### FCC Part 15.247



#### § 2.1033 General Information

**APPLICANT:** Samsung Electronics Co., Ltd.

**APPLICANT ADDRESS:** 129, Samsung-ro, Yeongtong-gu  
Suwon-city, Gyeonggi-do, 443-803, Republic of Korea

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.247

**IC SPECIFICATION(S):** RSS-210 Issue 8

**FCC ID:** A3LSCHI545

**Test Device Serial No.:** FCC#8; EMC Cond ☐ Production ☒ Pre-Production ☐ Engineering


**FCC CLASSIFICATION:** Digital Transmission System (DTS)

**DATE(S) OF TEST:** Feb. 13 - March 1, 2013

**TEST REPORT S/N:** 0Y1302120251.A3L

#### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 3 of 43

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

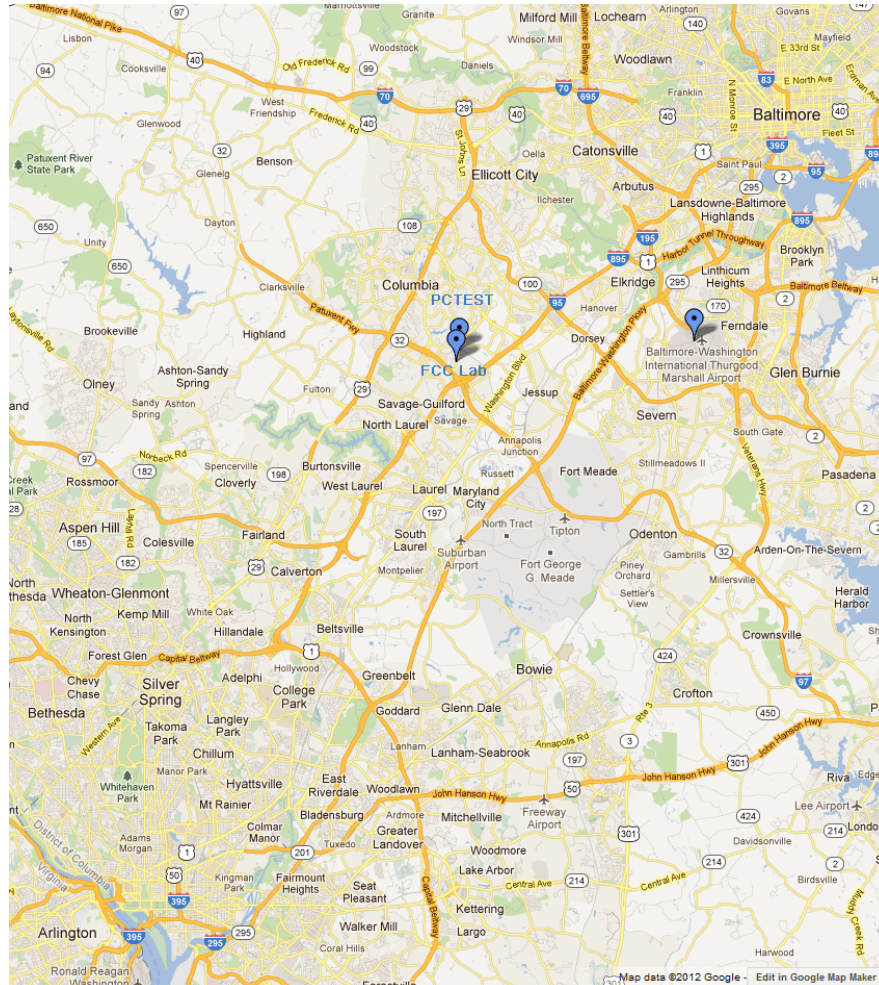


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 4 of 43

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSCHI545**. The data found in this test report was taken with the EUT operating in Bluetooth low energy mode. While in low energy mode, the Bluetooth transmitter hops pseudo-randomly between 40 channels, three of which are “advertising channels”. When the transmitter is hopping only between the three advertising channels, the EUT does not fall under the category of a “hopper” as defined in 15.247(a)(iii) which states that a “frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.” As operation on only the advertising channels does not qualify the EUT as a hopper, the EUT is certified as a DTS device in this mode. The data found in this report is representative of the device when it transmits on its advertising channels. Typical Bluetooth operation is covered under the DSS report found with this application.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 4(5,10,15,20 MHz BW), 13 (5,10 MHz BW) LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC

### 2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSCHI545 was tested per the guidance of ANSI C63.10-2009. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.

This device supports a wireless charging cover. Additional emissions testing was performed per KDB 648474 D03. The handset was placed on the representative charging pad under normal conditions and in a simulated call configuration. The additional worst case emissions are reported herein and identified as WCC.

### 2.4 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

### 2.5 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 5 of 43



## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) was used in the measurement of the **Samsung Portable Handset FCC ID: A3LSCHI545**.

Deviation from measurement procedure.....None



### 3.2 Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site.

Line conducted emissions test results are shown in Section 6.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 6 of 43

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions. To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. For average measurements above 1GHz, the analyzer was set to peak detector with a reduced VBW setting (RBW = 1MHz, VBW = 1/THz, where T = pulse width).

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 7 of 43

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”



- The antenna(s) of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **Samsung Portable Handset FCC ID: A3LSCHI545** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)
0	2402
:	:
19	2440
:	:
39	2480

**Table 4-1. Frequency / Channel Operations**

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 8 of 43





## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	BT1	Bluetooth Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	ESU40	EMI Test Receiver	1/15/2013	Annual	1/15/2014	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 5-1. Annual Test Equipment Calibration Schedule**

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 9 of 43

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSCHI545  
 FCC Classification: Digital Transmission System (DTS)  
 Number of Channels: 40

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
15.247(a)(2)	RSS-210 [A8.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.247(b)(3)	RSS-210 [A8.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 6.4
15.247(d)	RSS-210 [A8.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 6.5, 6.6
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)	RADIATED	PASS	Sections 6.7, 0
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 6.10

**Table 6-1. Summary of Test Results**

#### Notes:

1. All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Bluetooth LE Automation", Version 1.5.

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 10 of 43

## 6.2 6dB Bandwidth Measurement – Bluetooth (LE)

§15.247(a)(2); RSS-210 [A8.2]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used


ANSI C63.10-2009

### Test Settings

1. RBW = 100kHz
2. VBW = 300kHz
3. Detector = Peak
4. Trace mode = max hold
5. Sweep = auto couple
6. The trace was allowed to stabilize
7. The automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-1. Test Instrument & Measurement Setup**



### Test Notes


None

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 11 of 43


Frequency [MHz]	Channel No.	Bluetooth Mode	Measured Bandwidth [kHz]	Minimum Bandwidth [kHz]	Pass / Fail
2402	0	LE	706.0	500	Pass
2440	19	LE	713.4	500	Pass
2480	39	LE	711.0	500	Pass

**Table 6-2. Conducted Bandwidth Measurements**

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 12 of 43

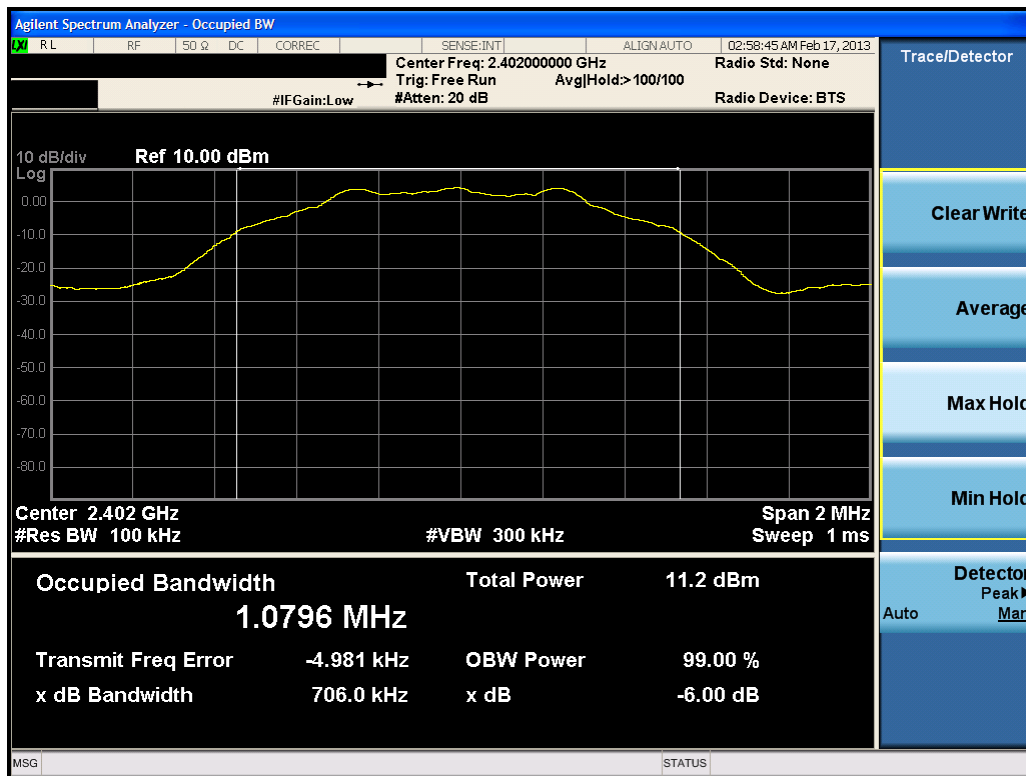


Plot 6-1. 6dB Bandwidth Plot (Bluetooth (LE) – Ch. 0)

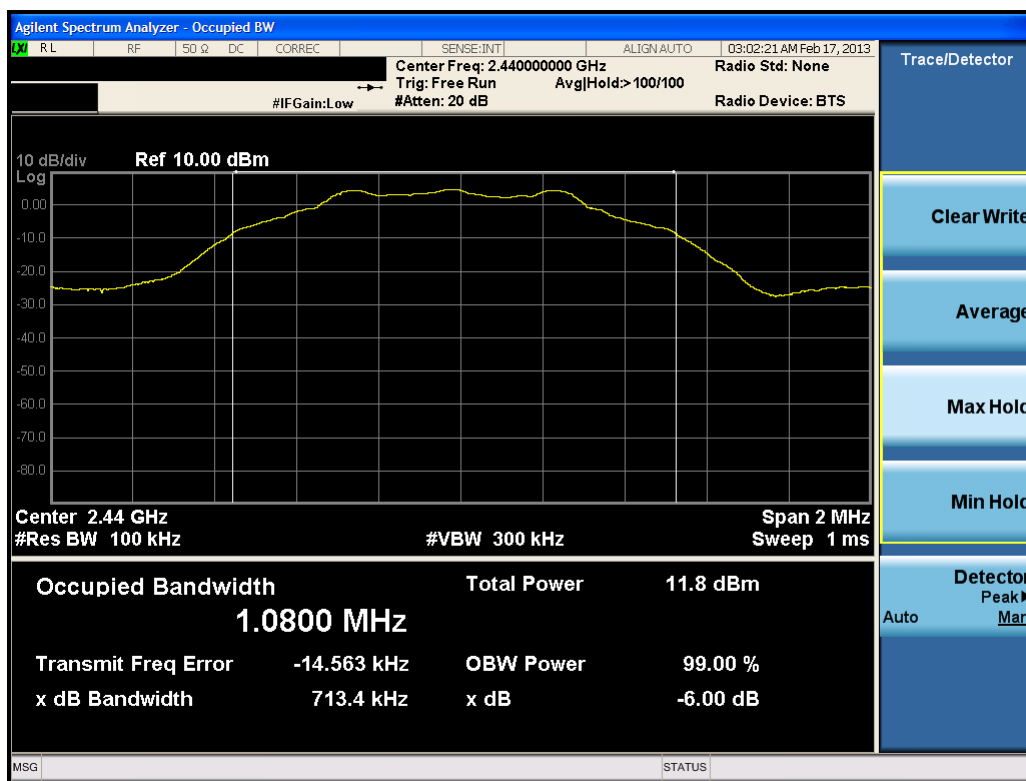

Plot 6-2. 6dB Bandwidth Plot (Bluetooth (LE) – Ch. 19)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 13 of 43

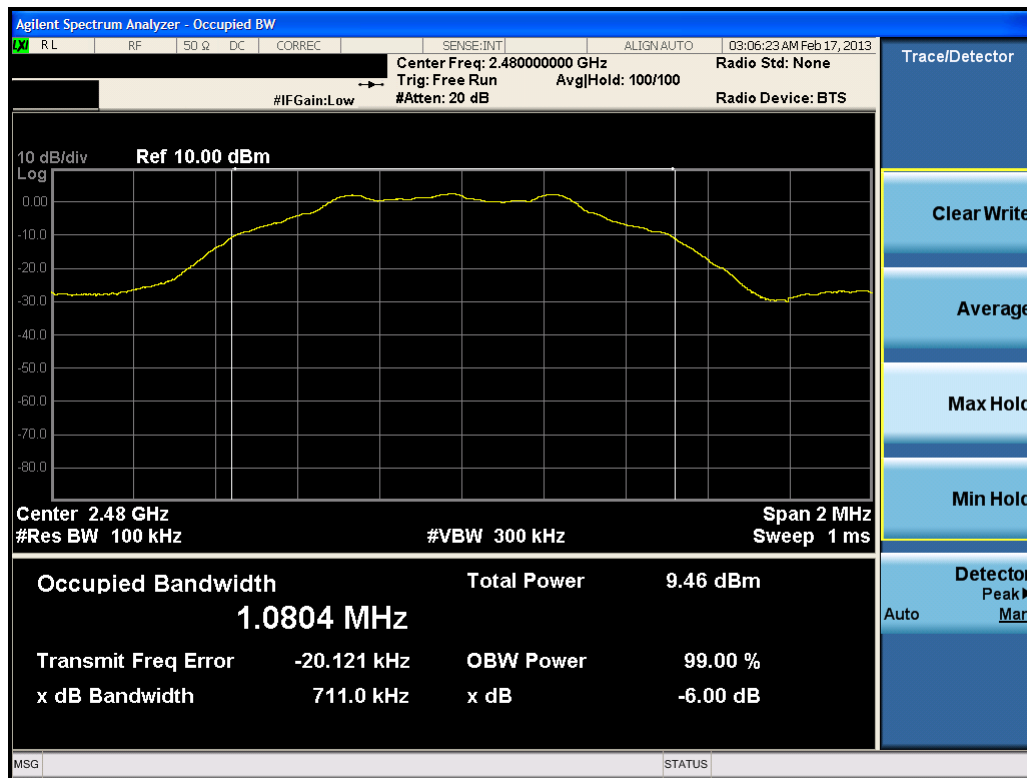

Plot 6-3. 6dB Bandwidth Plot (Bluetooth (LE) – Ch. 39)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 14 of 43



## 6.3 Output Power Measurement – Bluetooth (LE)

§15.247(b)(3); RSS-210 [A8.4]

### Test Overview and Limits

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

***The maximum permissible conducted output power is 1 Watt.***

### Test Procedure Used


ANSI C63.10-2009

### Test Settings

1. RBW = 3MHz
2. VBW = 3MHz
3. Detector = Peak
4. Trace mode = max hold
5. Sweep = auto couple
6. The trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-2. Test Instrument & Measurement Setup**



### Test Notes

None

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 15 of 43

Frequency [MHz]	Channel No.	Bluetooth Mode	Peak Conducted Power	
			[dBm]	[mW]
2402	0	LE	4.93	3.112
2440	19	LE	5.44	3.495
2480	39	LE	3.15	2.066

**Table 6-3. Conducted Output Power Measurements (Bluetooth (LE))**

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset	Page 16 of 43	

## 6.4 Power Spectral Density – Bluetooth (LE)

**§15.247(e); RSS-210 [A8.2]**

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies.

***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

### Test Procedure Used


ANSI C63.10-2009

### Test Settings

1. RBW = 3kHz
2. VBW = 10kHz
3. Span = 300kHz
4. Detector = peak
5. Sweep time = 100s
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-3. Test Instrument & Measurement Setup**



### Test Notes


None

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 17 of 43


Frequency [MHz]	Channel No.	Bluetooth Mode	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2402	0	LE	-9.48	8.0	-17.48
2440	19	LE	-8.92	8.0	-16.92
2480	39	LE	-11.26	8.0	-19.26

**Table 6-4. Conducted Power Density Measurements**

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 18 of 43

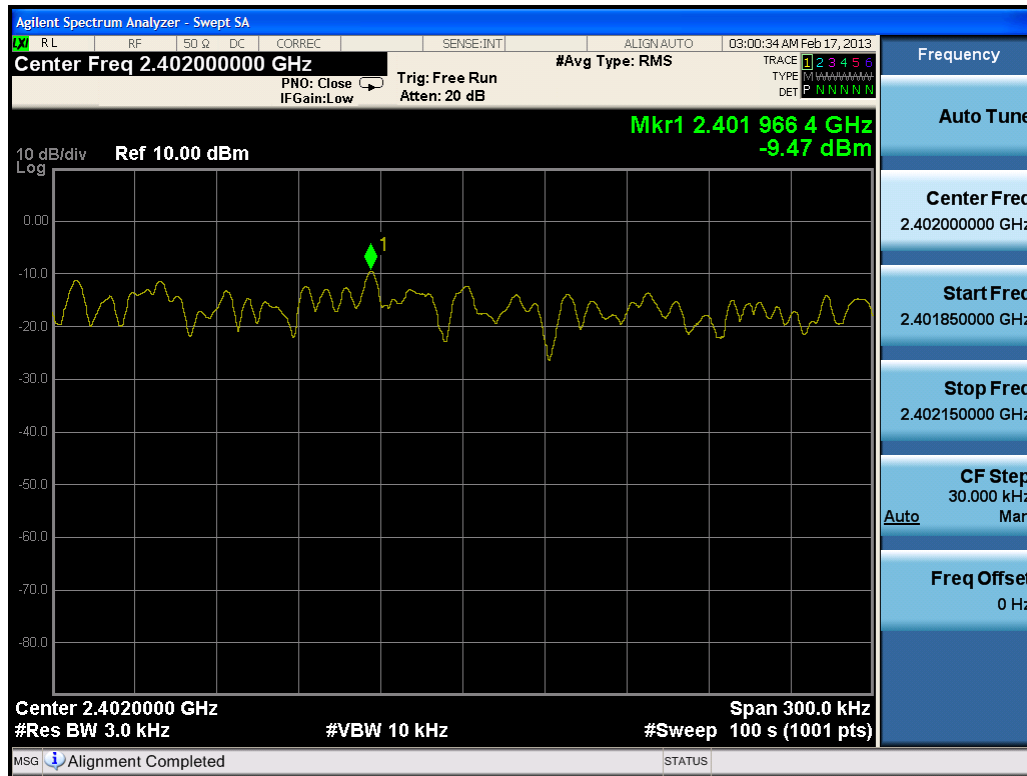


Plot 6-4. Power Spectral Density Plot (Bluetooth (LE) – Ch. 0)

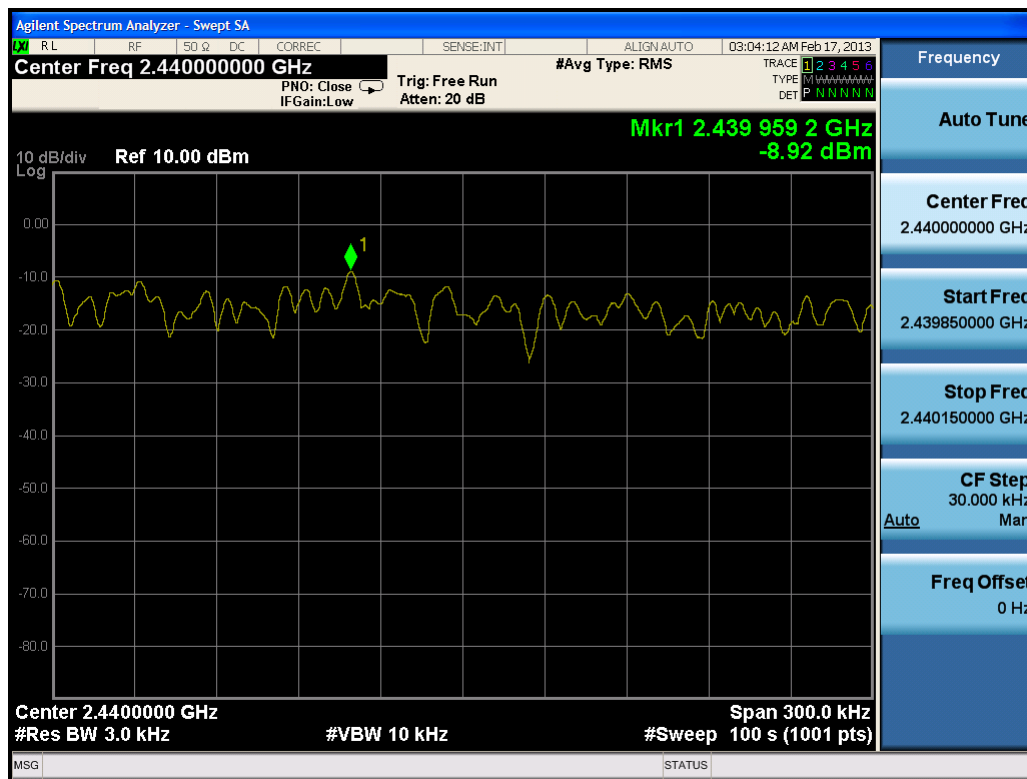

Plot 6-5. Power Spectral Density Plot (Bluetooth (LE) – Ch. 19)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 19 of 43

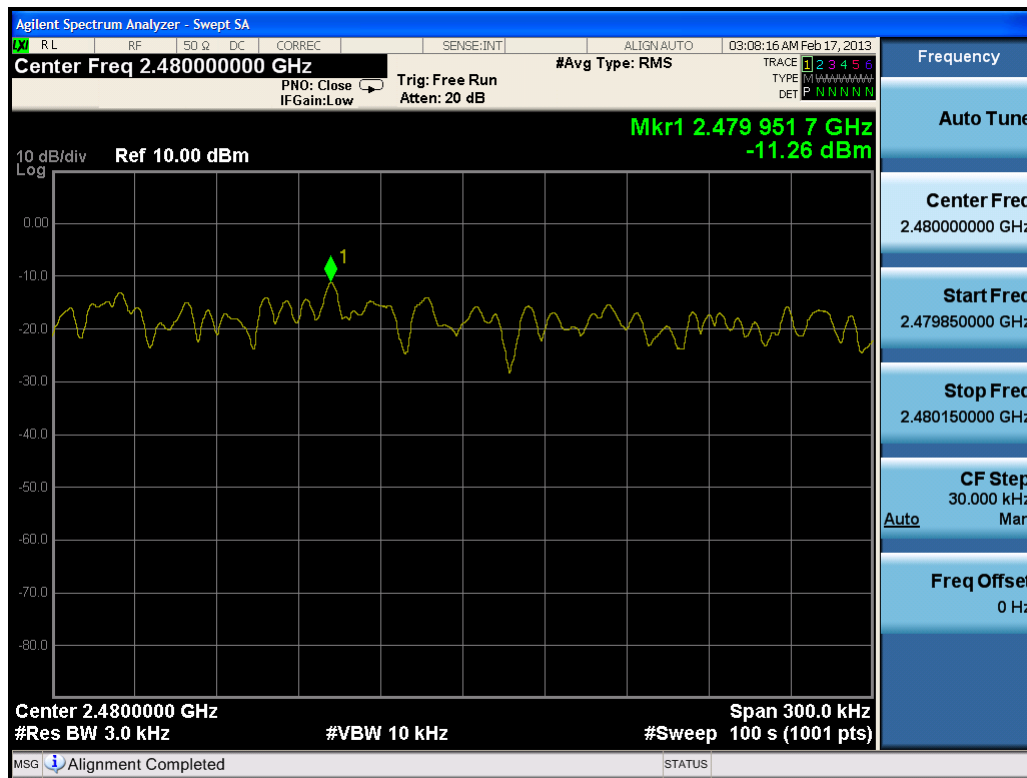

Plot 6-6. Power Spectral Density Plot (Bluetooth (LE) – Ch. 39)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 20 of 43



## 6.5 Conducted Emissions at the Band Edge

**§15.247(d); RSS-210 [A8.5]**

### Test Overview and Limit

For the following out of band conducted spurious emissions plots at the band edge, the EUT was set to transmit at maximum power with the largest packet size available. These settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.***

### Test Procedure Used


ANSI C63.10-2009

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Trace mode = max hold
7. Sweep time = auto couple
8. The trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-4. Test Instrument & Measurement Setup**


### Test Notes

None

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 21 of 43

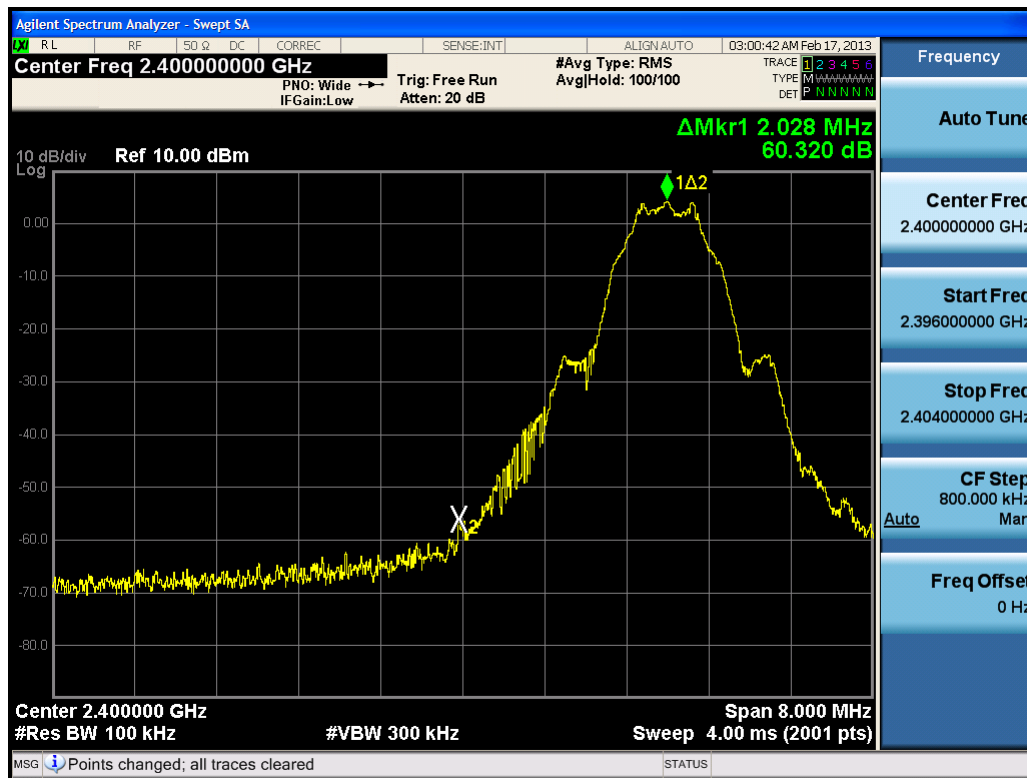

Plot 6-7. Band Edge Plot (Bluetooth (LE) – Ch. 0)

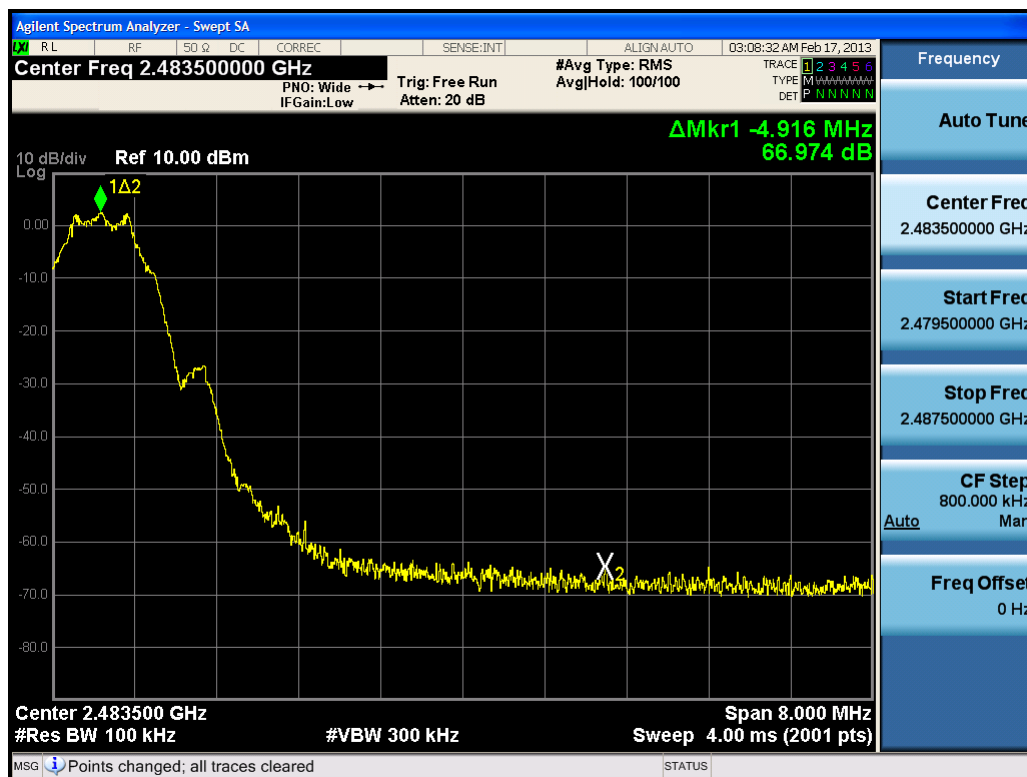

Plot 6-8. Band Edge Plot (Bluetooth (LE) – Ch. 39)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 22 of 43

## 6.6 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

### Test Overview and Limit

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.***

### Test Procedure Used


ANSI C63.10-2009

### Test Settings



1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






**Figure 6-5. Test Instrument & Measurement Setup**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 23 of 43


## Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 24 of 43

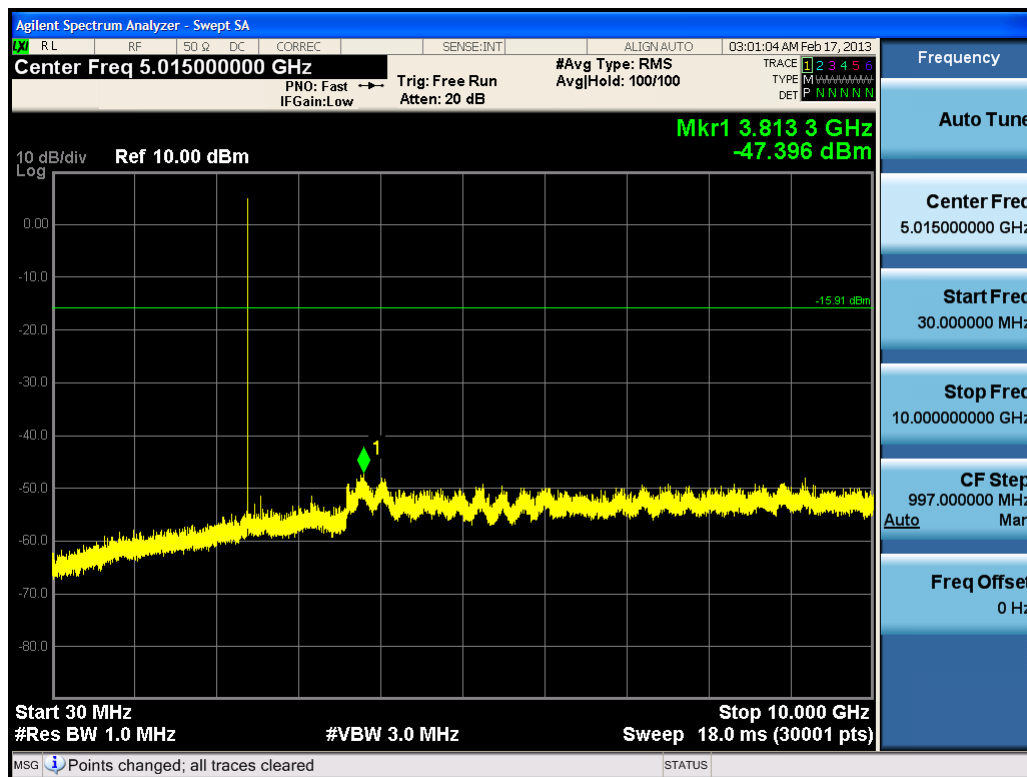


Plot 6-9. Conducted Spurious Plot (Bluetooth (LE) – Ch. 0)

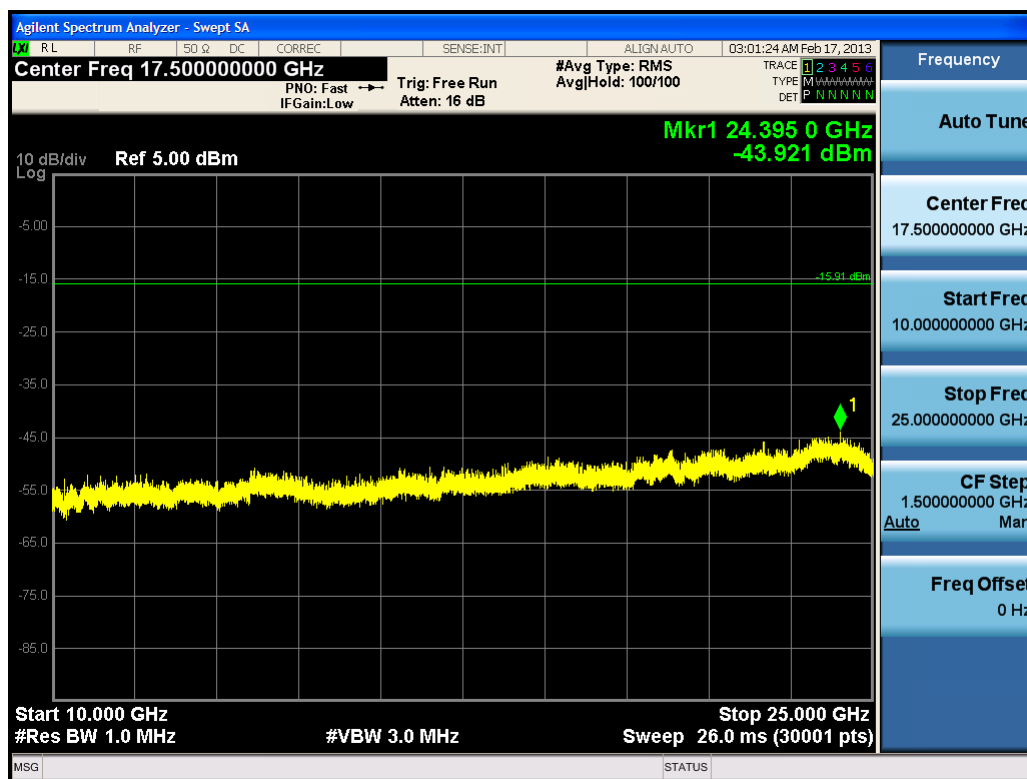


Plot 6-10. Conducted Spurious Plot (Bluetooth (LE) – Ch. 0)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 25 of 43

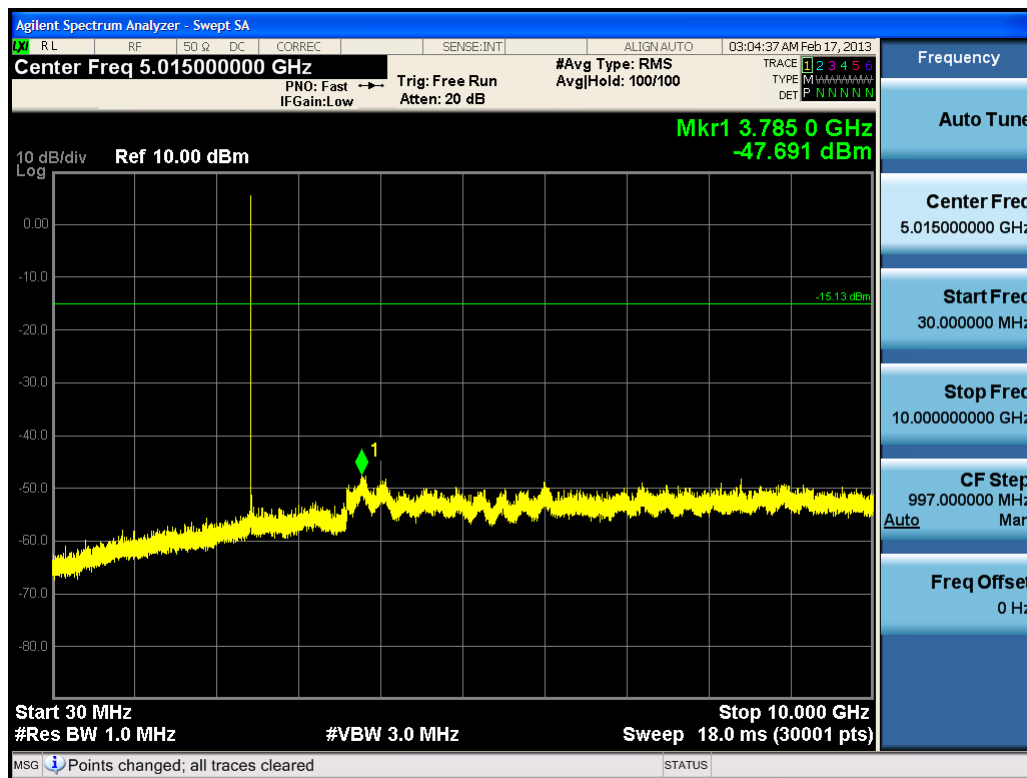


Plot 6-11. Conducted Spurious Plot (Bluetooth (LE) – Ch. 19)

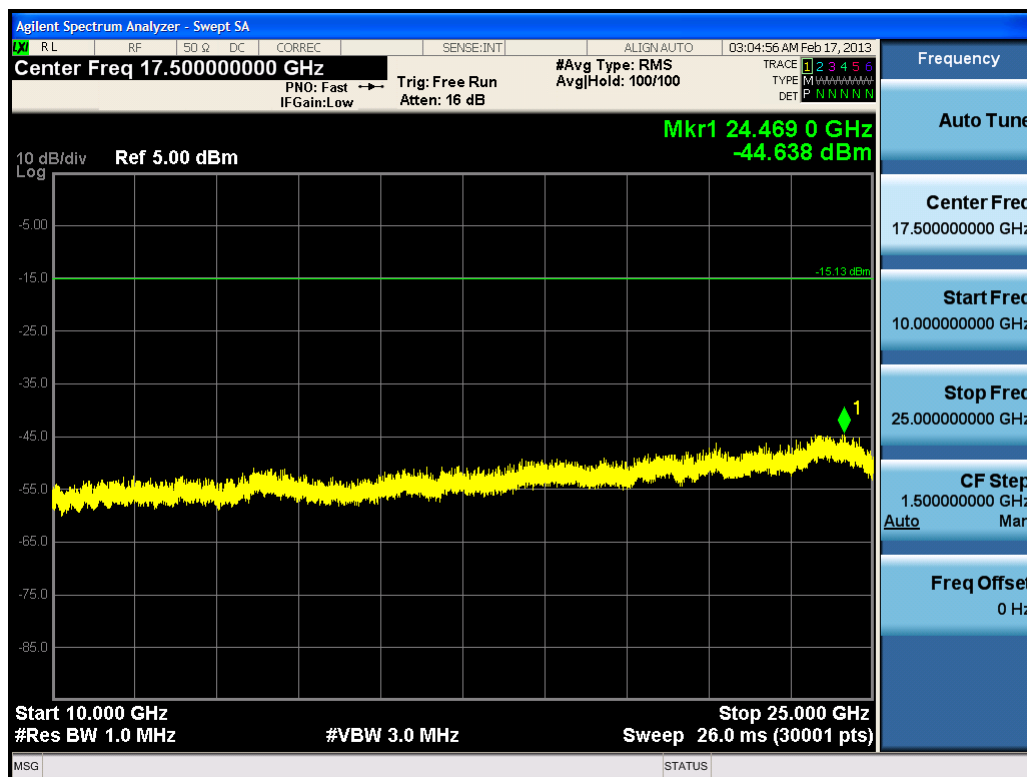


Plot 6-12. Conducted Spurious Plot (Bluetooth (LE) – Ch. 19)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 26 of 43



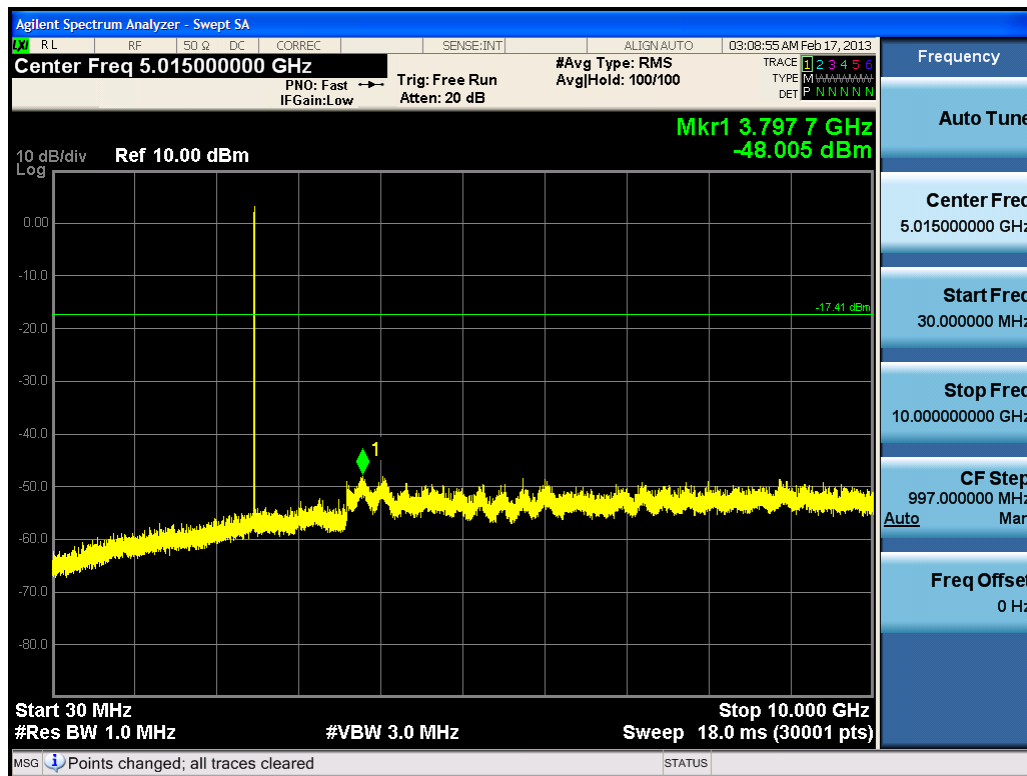

Plot 6-13. Conducted Spurious Plot (Bluetooth (LE) – Ch. 39)

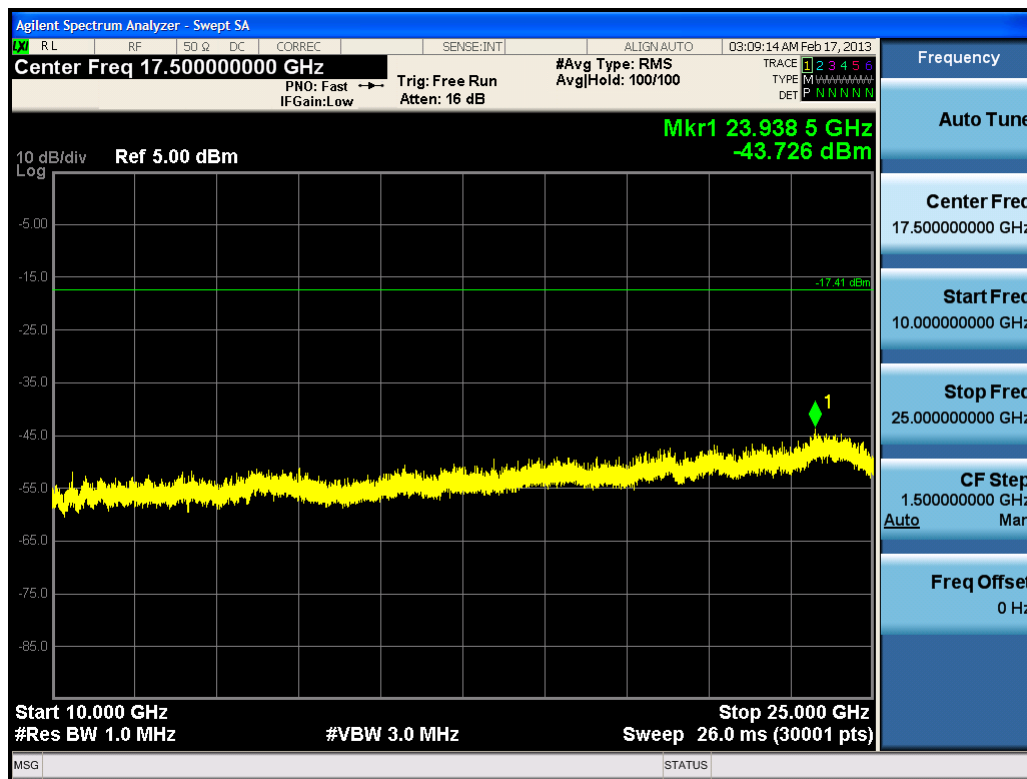

Plot 6-14. Conducted Spurious Plot (Bluetooth (LE) – Ch. 39)

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 27 of 43

## 6.7 Radiated Spurious Emission Measurements

§15.205, §15.209, §15.247(d); RSS-210 [A8.5]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-5 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-5. Radiated Limits**



### Test Procedures Used

ANSI C63.10-2009

### Test Settings

#### Average Field Strength Measurements

1. RBW = 1MHz
2. VBW = 3kHz (See Note 4 in “Test Notes” section below for reasoning)
3. Detector = peak
4. Sweep time = auto coupled
5. Number of points = 1001
6. Trace mode = max hold
7. Trace was allowed to stabilize


<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 28 of 43

## Peak Field Strength Measurements

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = peak
4. Sweep time = auto couple
5. Number of points = 1001
6. Trace mode = max hold
7. Trace was allowed to stabilize

## Test Setup

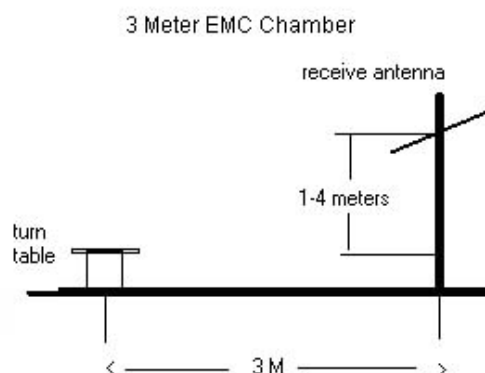

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-6. Test Instrument & Measurement Setup**

## Test Notes

1. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
2. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
3. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
4. Average measurements were recorded using a VBW of 3kHz. The rule of thumb used in order to avoid over-averaging is that the VBW must be  $\geq 1/t$ , where  $t$  = pulse width of emission. A VBW of 3kHz was found to be suitable to meet this guideline. Both average and peak measurements were made using a peak detector

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 29 of 43

5. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
7. No significant radiated band edge emissions were found in the 2310 – 2390MHz restricted band.



## **Sample Calculations**

### **Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### **Radiated Band Edge Measurement Offset**

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + 10 dB Attenuator) – Preamplifier Gain

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 30 of 43

## Radiated Spurious Emission Measurements (Cont'd)

§15.205, §15.209, §15.247(d); RSS-210 [A8.5]

Bluetooth Mode: LE  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0  
 Back Cover: Standard



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	-112.77	Avg	H	40.23	34.46	53.98	-19.52
4804.00	-99.13	Peak	H	40.23	48.10	73.98	-25.88
12010.00	-135.00	Avg	H	50.04	22.04	53.98	-31.94
12010.00	-125.00	Peak	H	50.04	32.04	73.98	-41.94

**Table 6-6. Radiated Measurements @ 3 meters**

Bluetooth Mode: LE  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2440MHz  
 Channel: 19  
 Back Cover: Standard

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	-112.88	Avg	H	40.26	34.38	53.98	-19.60
4880.00	-99.19	Peak	H	40.26	48.07	73.98	-25.91
7320.00	-135.00	Avg	H	43.70	15.70	53.98	-38.28
7320.00	-125.00	Peak	H	43.70	25.70	73.98	-48.28
12200.00	-135.00	Avg	H	50.55	22.55	53.98	-31.43
12200.00	-125.00	Peak	H	50.55	32.55	73.98	-41.43

**Table 6-7. Radiated Measurements @ 3 meters**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 31 of 43

## Radiated Spurious Emission Measurements (Cont'd)

\$15.205, \$15.209, \$15.247(d); RSS-210 [A8.5]

Bluetooth Mode: LE  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 39  
 Back Cover: Standard



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	-112.19	Avg	H	40.29	35.10	53.98	-18.88
4960.00	-99.07	Peak	H	40.29	48.22	73.98	-25.76
7440.00	-135.00	Avg	H	43.90	15.90	53.98	-38.08
7440.00	-125.00	Peak	H	43.90	25.90	73.98	-48.08
12400.00	-135.00	Avg	H	51.05	23.05	53.98	-30.93
12400.00	-125.00	Peak	H	51.05	33.05	73.98	-40.93

**Table 6-8. Radiated Measurements @ 3 meters**

Bluetooth Mode: LE  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 39  
 Back Cover: WCC

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	-112.81	Avg	H	40.29	34.48	53.98	-19.50
4960.00	-100.13	Peak	H	40.29	47.16	73.98	-26.82
7440.00	-135.00	Avg	H	43.90	15.90	53.98	-38.08
7440.00	-125.00	Peak	H	43.90	25.90	73.98	-48.08
12400.00	-135.00	Avg	H	51.05	23.05	53.98	-30.93
12400.00	-125.00	Peak	H	51.05	33.05	73.98	-40.93

**Table 6-9. Radiated Measurements @ 3 meters**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 32 of 43



## 6.8 Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

Bluetooth Mode: LE


Measurement Distance: 3 Meters

Operating Frequency: 2402MHz

Channel: 0



\*RBW 1 MHz      Marker 1 [T2 ]  
\*VBW 3 kHz      40.43 dBμV  
Ref 115 dBμV      \*Att 10 dB      SWT 20 ms      2.390000000 GHz

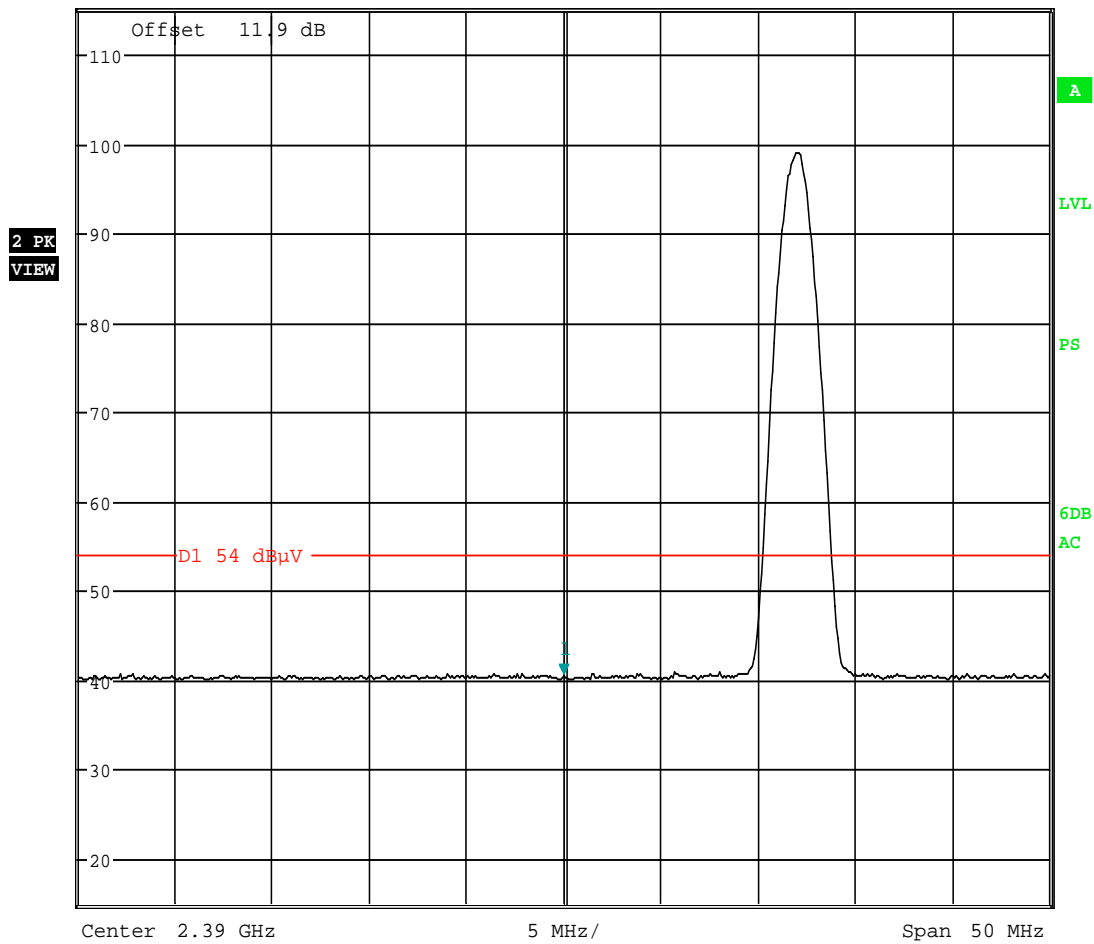

Date: 16.FEB.2013 19:31:36

**Plot 6-15. Radiated Restricted Lower Band Edge Measurement (Average)**


FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 33 of 43

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]



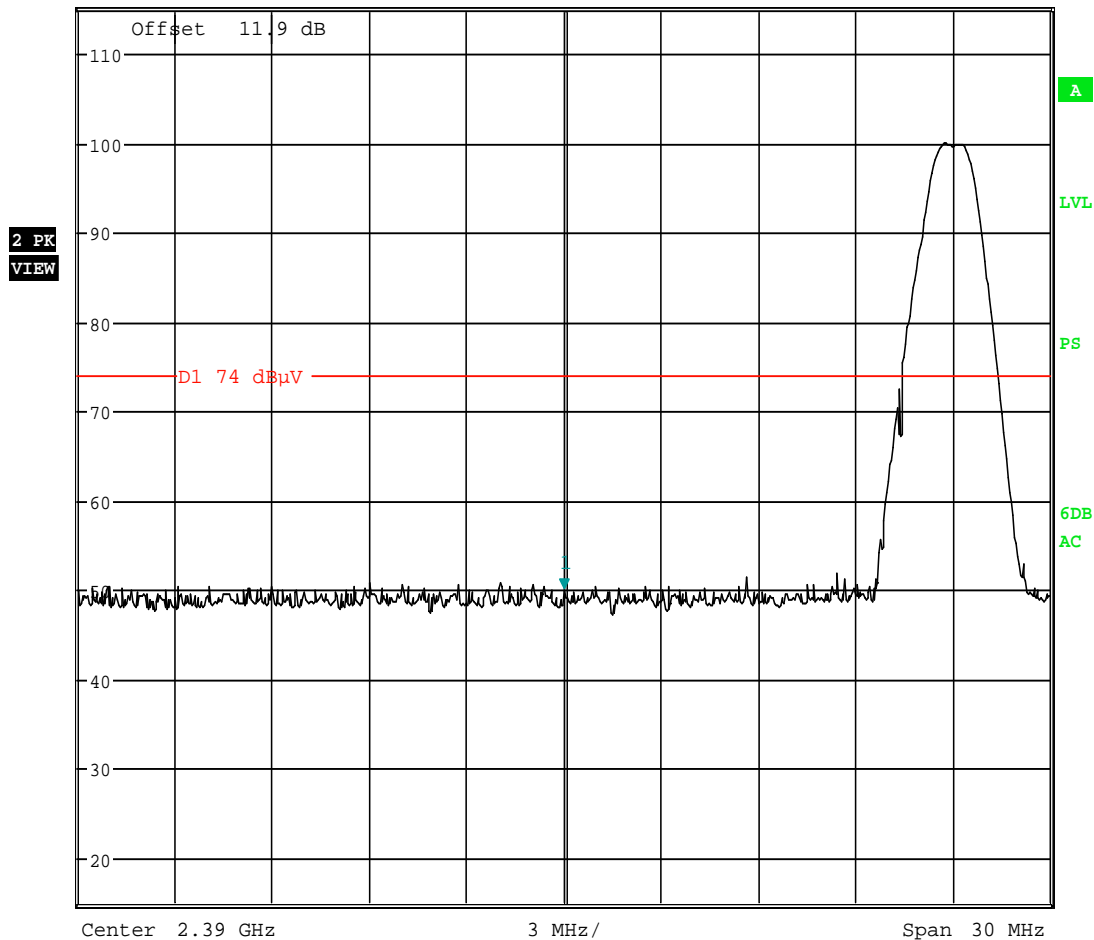

Ref 115 dBμV      \* Att 10 dB      SWT 2.5 ms      Marker 1 [T2 ]      50.03 dBμV  
 Offset 11.9 dB      \* RBW 1 MHz      \* VBW 3 MHz      2.390000000 GHz



Date: 16.FEB.2013 18:59:52

**Plot 6-16. Radiated Restricted Lower Band Edge Measurement (Peak)**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 34 of 43

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

Bluetooth Mode: LE


Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 78



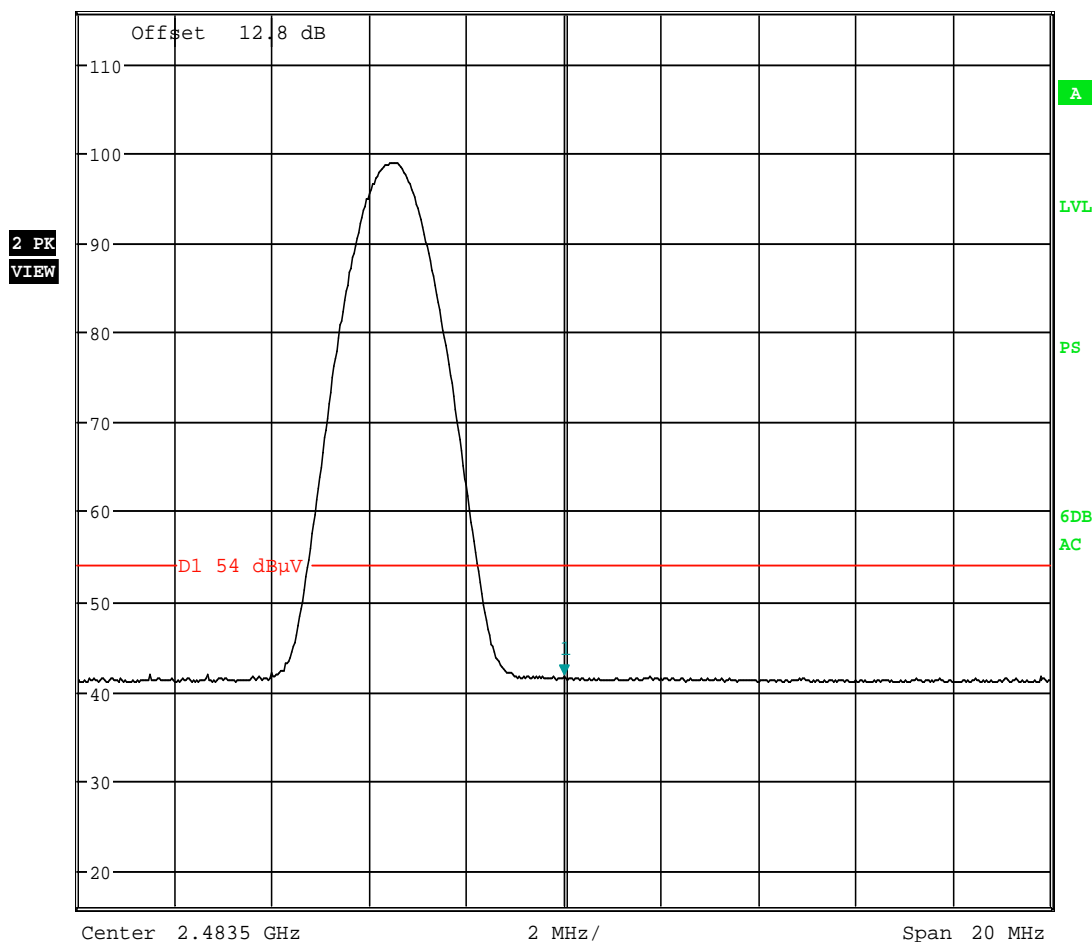

\* RBW 1 MHz      Marker 1 [T2 ]  
 \* VBW 3 kHz      41.56 dBμV  
 Ref 115.9 dBμV      \* Att 10 dB      SWT 20 ms      2.48350000 GHz




Date: 16.FEB.2013 19:25:41

**Plot 6-17. Radiated Restricted Upper Band Edge Measurement (Average)**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 35 of 43

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

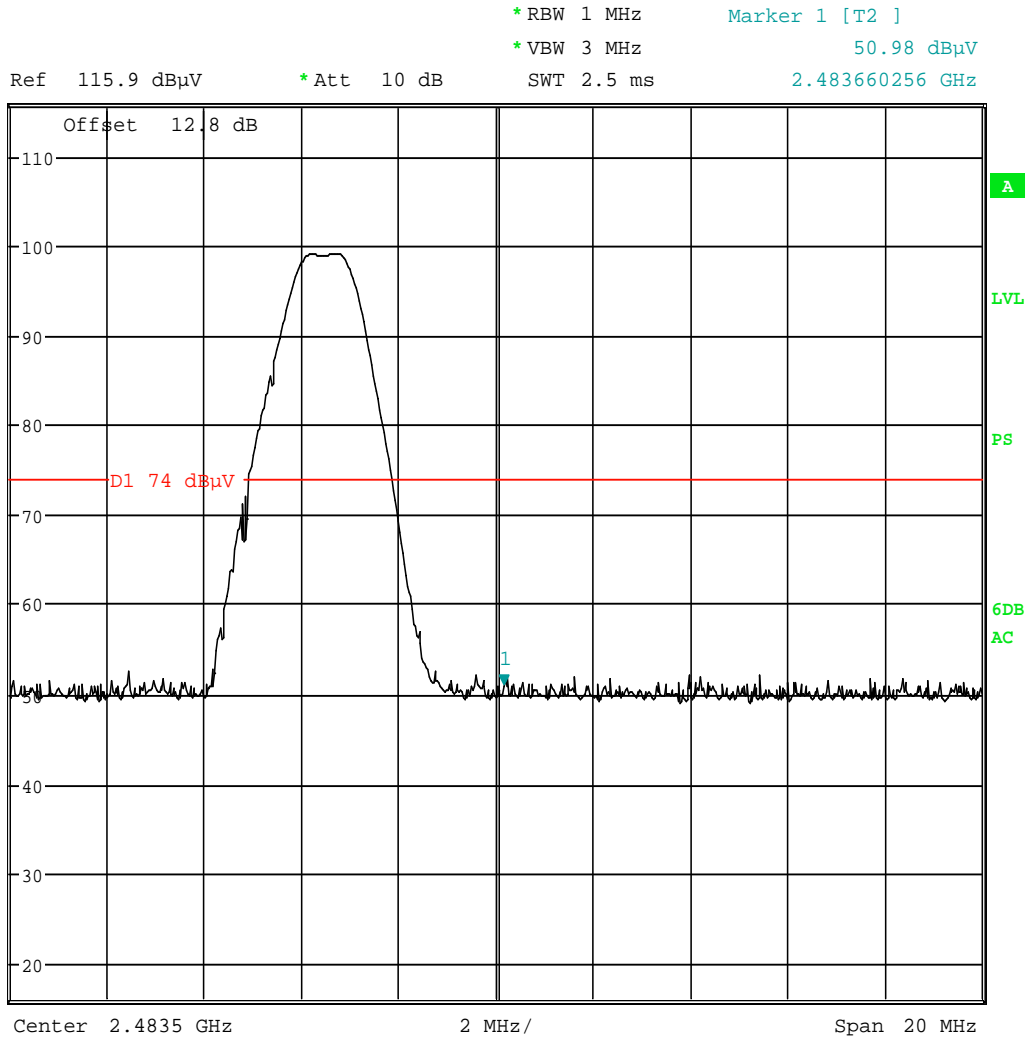

Date: 16.FEB.2013 19:28:42

**Plot 6-18. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 36 of 43

## 6.9 Radiated Restricted Band Edge Measurements w/ WCC


§15.205 / §15.209; RSS-210 [A8.5]

Bluetooth Mode: LE

Measurement Distance: 3 Meters

Operating Frequency: 2402MHz

Channel: 0

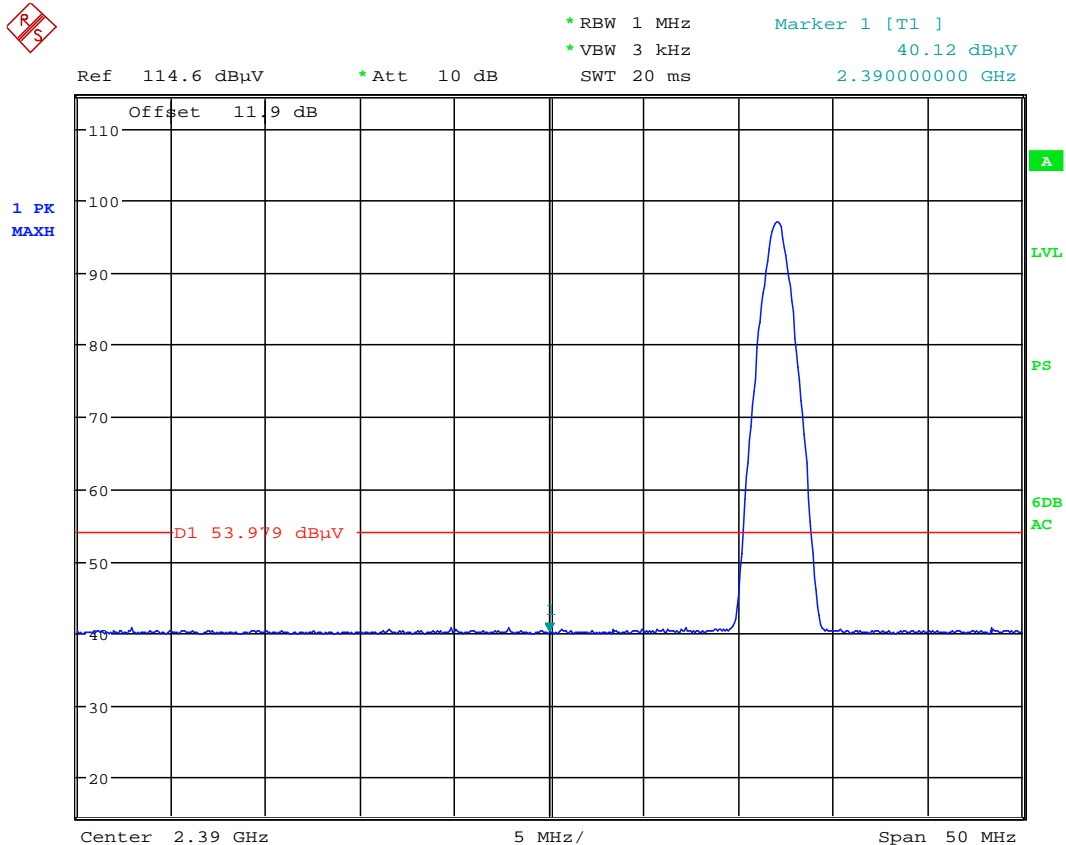


Date: 1.MAR.2013 17:04:17

**Plot 6-19. Radiated Restricted Lower Band Edge Measurement (Average)**

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 37 of 43

## Radiated Restricted Band Edge Measurements w/ WCC (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

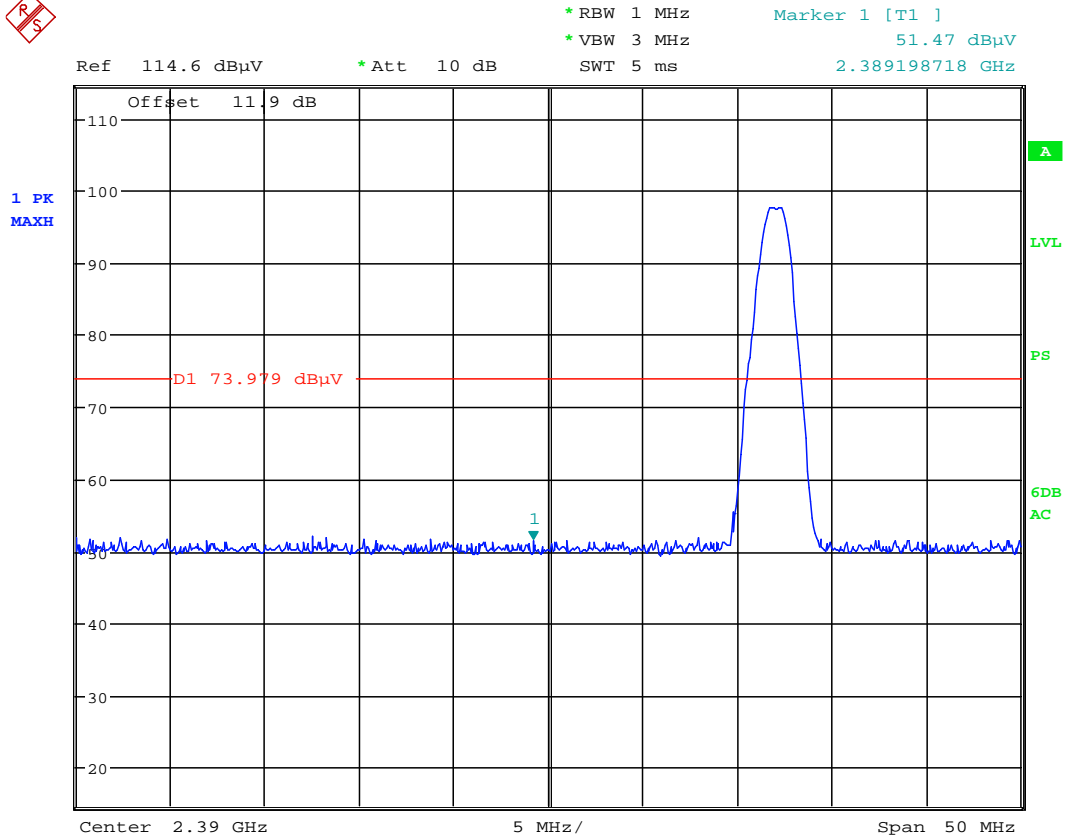

Date: 1.MAR.2013 17:05:36

**Plot 6-20. Radiated Restricted Lower Band Edge Measurement (Peak)**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 38 of 43

## Radiated Restricted Band Edge Measurements w/ WCC (Cont'd)


§15.205 / §15.209; RSS-210 [A8.5]

Bluetooth Mode: LE

Measurement Distance: 3 Meters



Operating Frequency: 2480MHz

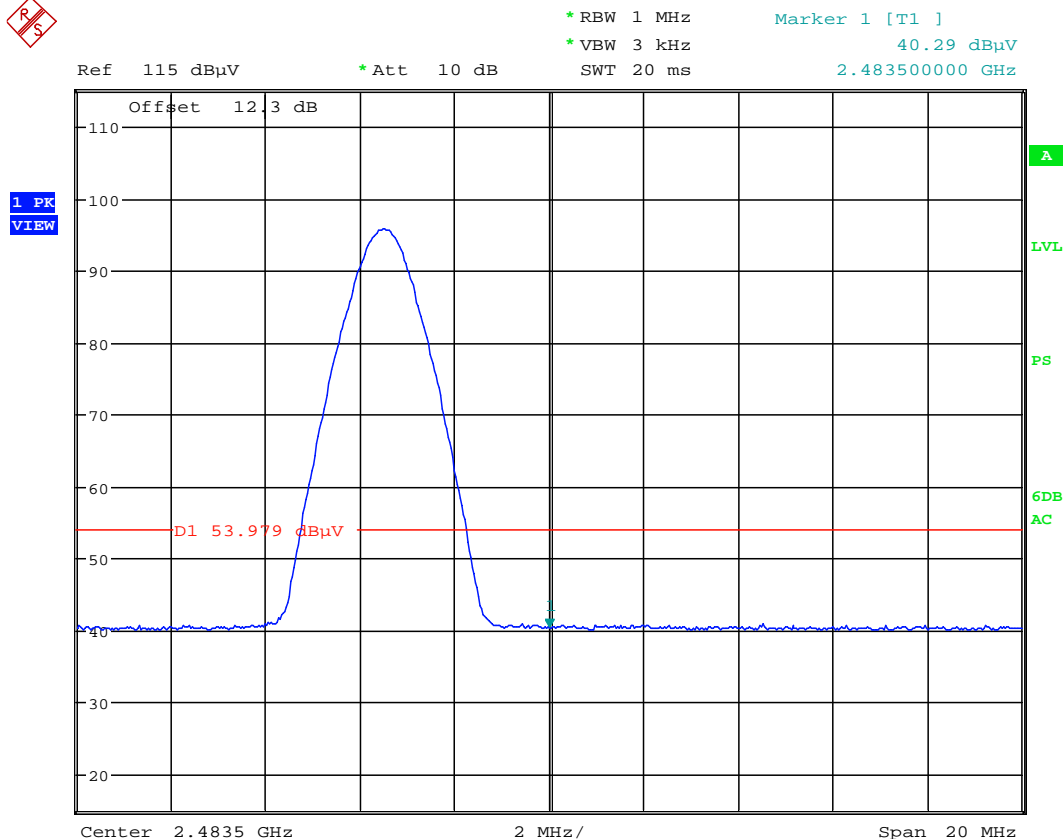Channel: 78




Date: 1.MAR.2013 16:59:59

**Plot 6-21. Radiated Restricted Upper Band Edge Measurement (Average)**

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 39 of 43

## Radiated Restricted Band Edge Measurements w/ WCC (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

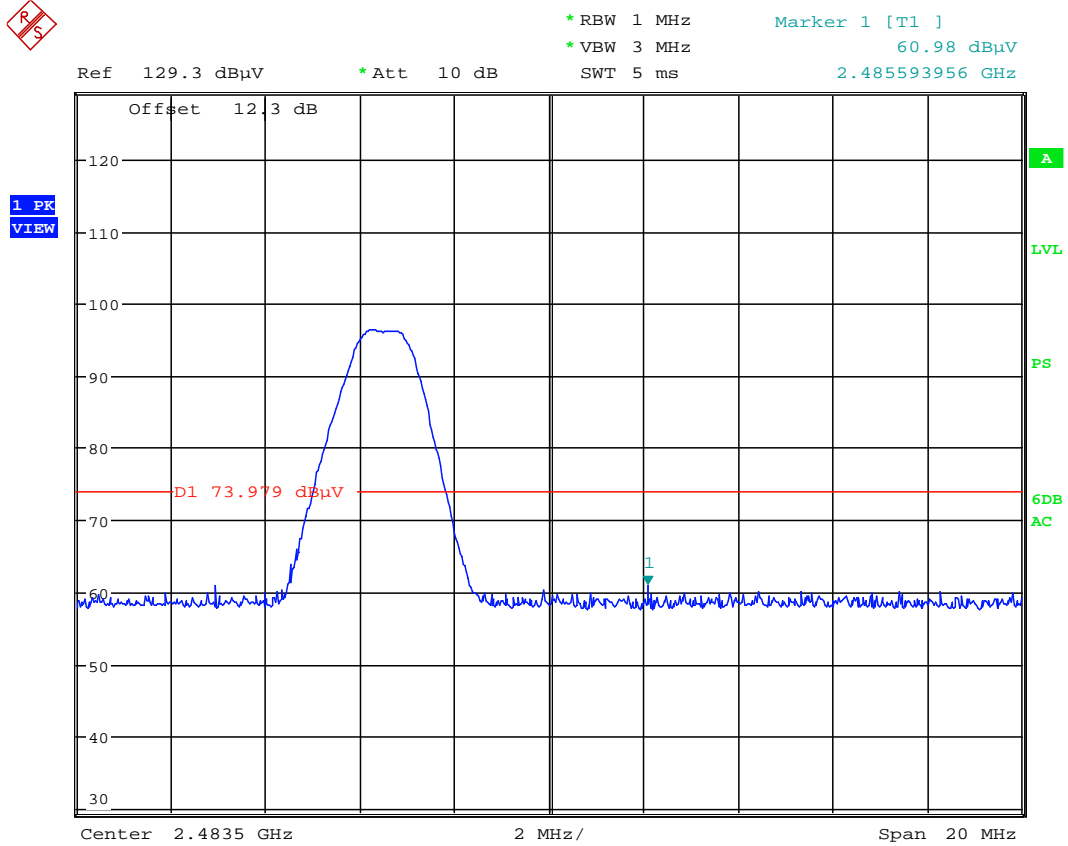

Date: 1.MAR.2013 16:58:44


**Plot 6-22. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSCHI545	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 40 of 43



## 6.10 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

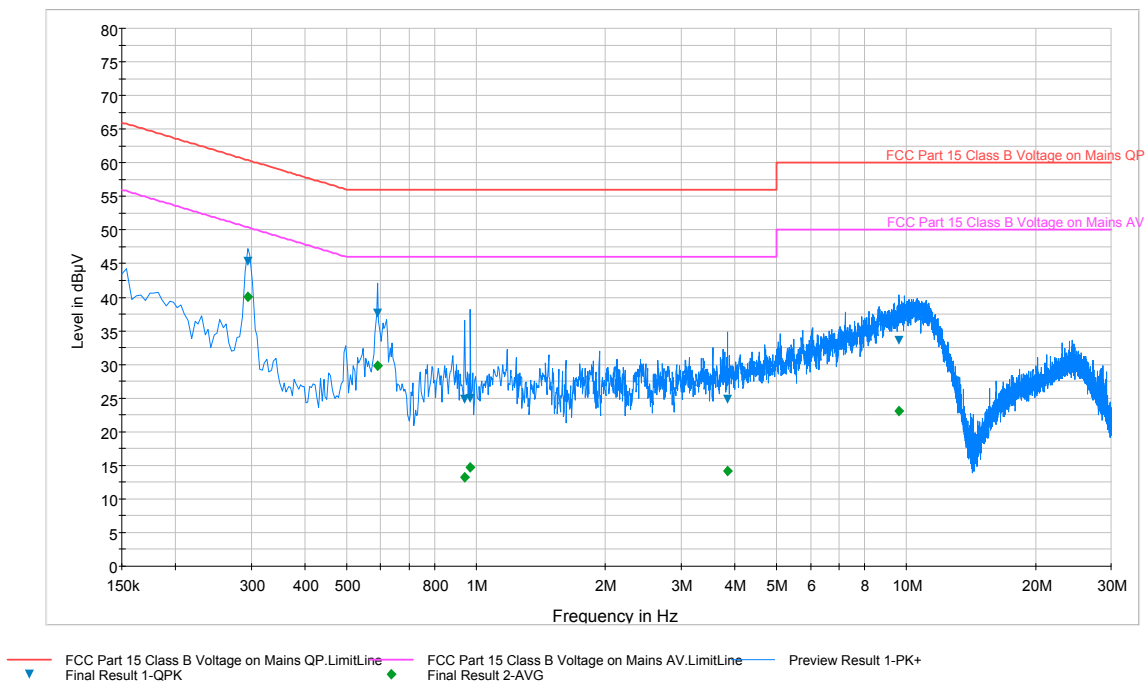



**Plot 6-23. Line Conducted Plot with Bluetooth LE (L1)**

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	L1	0.1	45.40	60.40	15.00	40.10	50.40	10.30
0.590	L1	0.1	37.70	56.00	18.30	29.80	46.00	16.20
0.942	L1	0.1	24.80	56.00	31.20	13.30	46.00	32.70
0.970	L1	0.1	24.90	56.00	31.10	14.70	46.00	31.30
3.850	L1	0.2	24.80	56.00	31.20	14.10	46.00	31.90
9.630	L1	0.4	33.60	60.00	26.40	23.10	50.00	26.90

**Table 6-10. Line Conducted Data with Bluetooth LE (L1)**


### Notes:

- All modes of operation were investigated and the worst-case emissions are reported.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AV Limit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 41 of 43

## Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

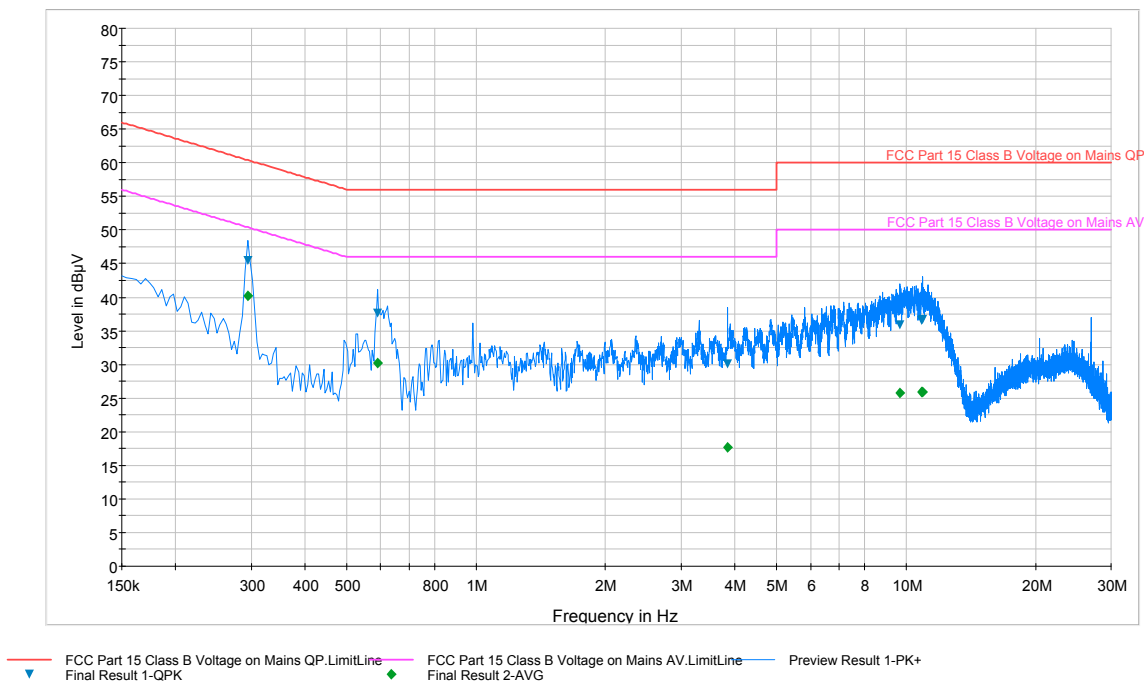



Plot 6-24. Line Conducted Plot with Bluetooth LE (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	N	0.2	45.50	60.40	14.90	40.20	50.40	10.20
0.590	N	0.1	37.70	56.00	18.30	30.20	46.00	15.80
3.846	N	0.2	30.10	56.00	25.90	17.70	46.00	28.30
9.682	N	0.4	35.90	60.00	24.10	25.80	50.00	24.20
10.850	N	0.4	36.50	60.00	23.50	25.90	50.00	24.10
10.922	N	0.4	36.60	60.00	23.40	25.90	50.00	24.10

Table 6-11. Line Conducted Data with Bluetooth LE (N)



### Notes:

- All modes of operation were investigated and the worst-case emissions are reported.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AV Limit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSCHI545		FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302120251.A3L	Test Dates: Feb. 13 - March 1, 2013	EUT Type: Portable Handset		Page 42 of 43

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSCHI545** is in compliance with Part 15C of the FCC Rules.

<b>FCC ID:</b> A3LSCHI545		<b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1302120251.A3L	<b>Test Dates:</b> Feb. 13 - March 1, 2013	<b>EUT Type:</b> Portable Handset		Page 43 of 43