

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Brain ($\sigma = 0.93$ mho/m, $\epsilon_r = 41.93$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-08-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Right Head, Touch, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.3 V/m
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.890 mW/g; SAR(10 g) = 0.658 mW/g

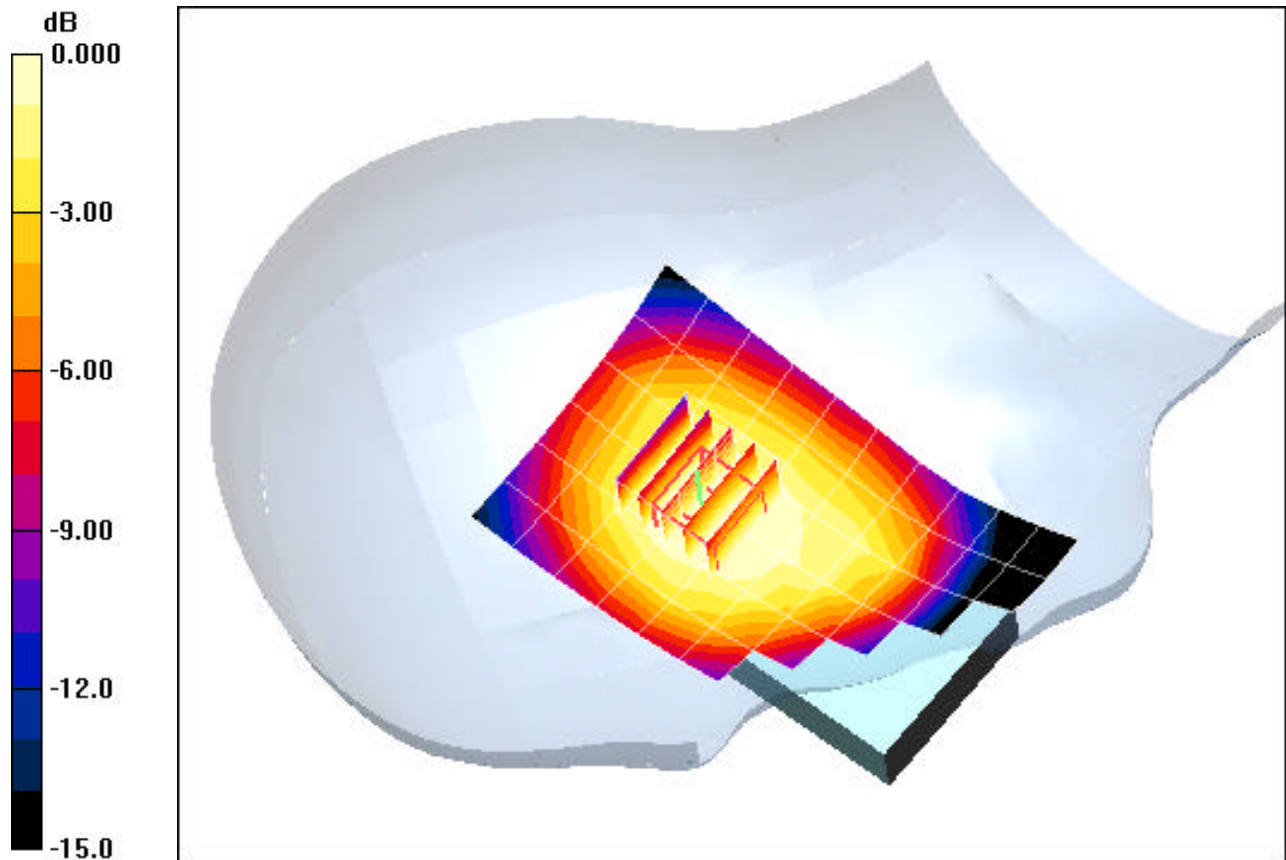

0 dB = 0.900mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Brain ($\sigma = 0.93$ mho/m, $\epsilon_r = 41.93$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-08-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Right Head, Tilt, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.0 V/m
Peak SAR (extrapolated) = 0.941 W/kg
SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.473 mW/g

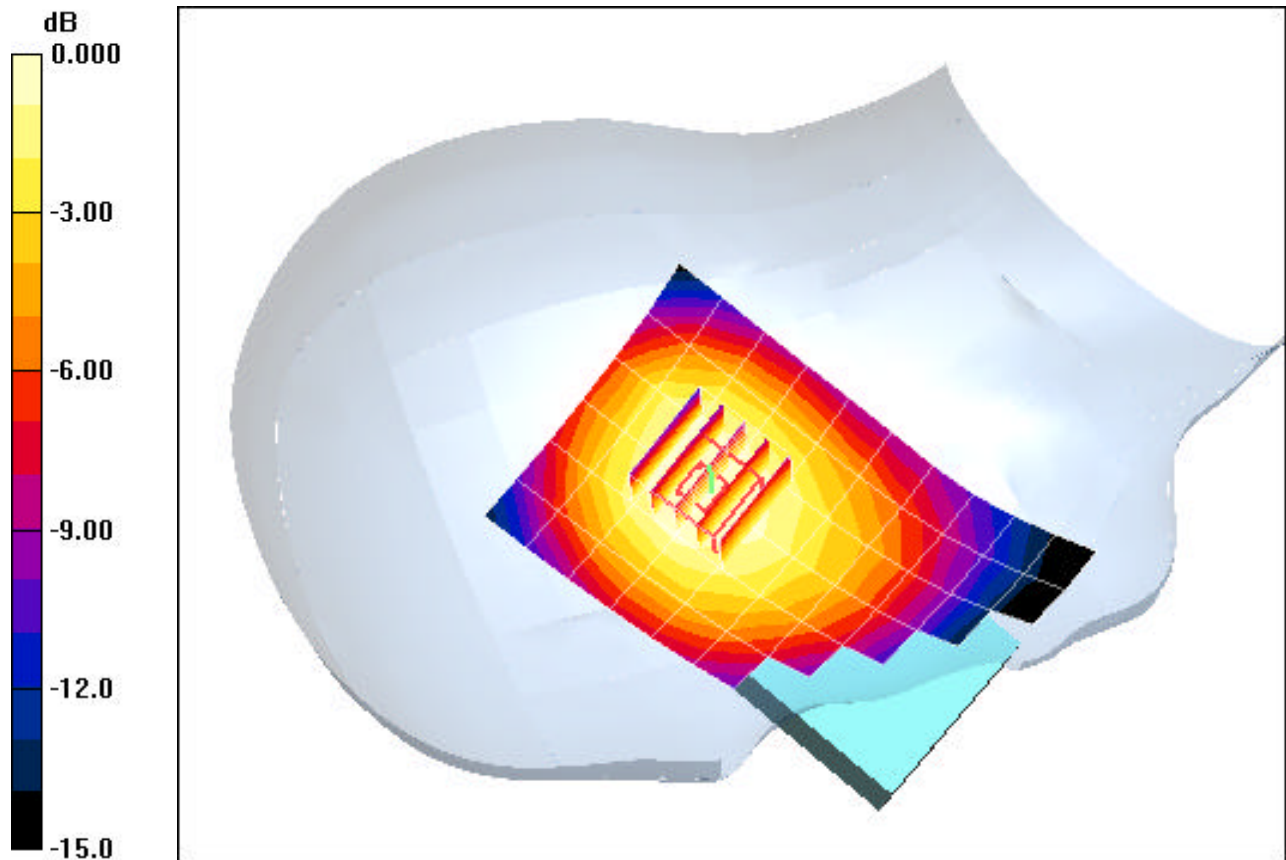

0 dB = 0.700mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm**


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Brain ($\sigma = 0.93$ mho/m, $\epsilon_r = 41.93$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 08-08-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Left Head, Touch, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.2 V/m
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.860 mW/g; SAR(10 g) = 0.648 mW/g

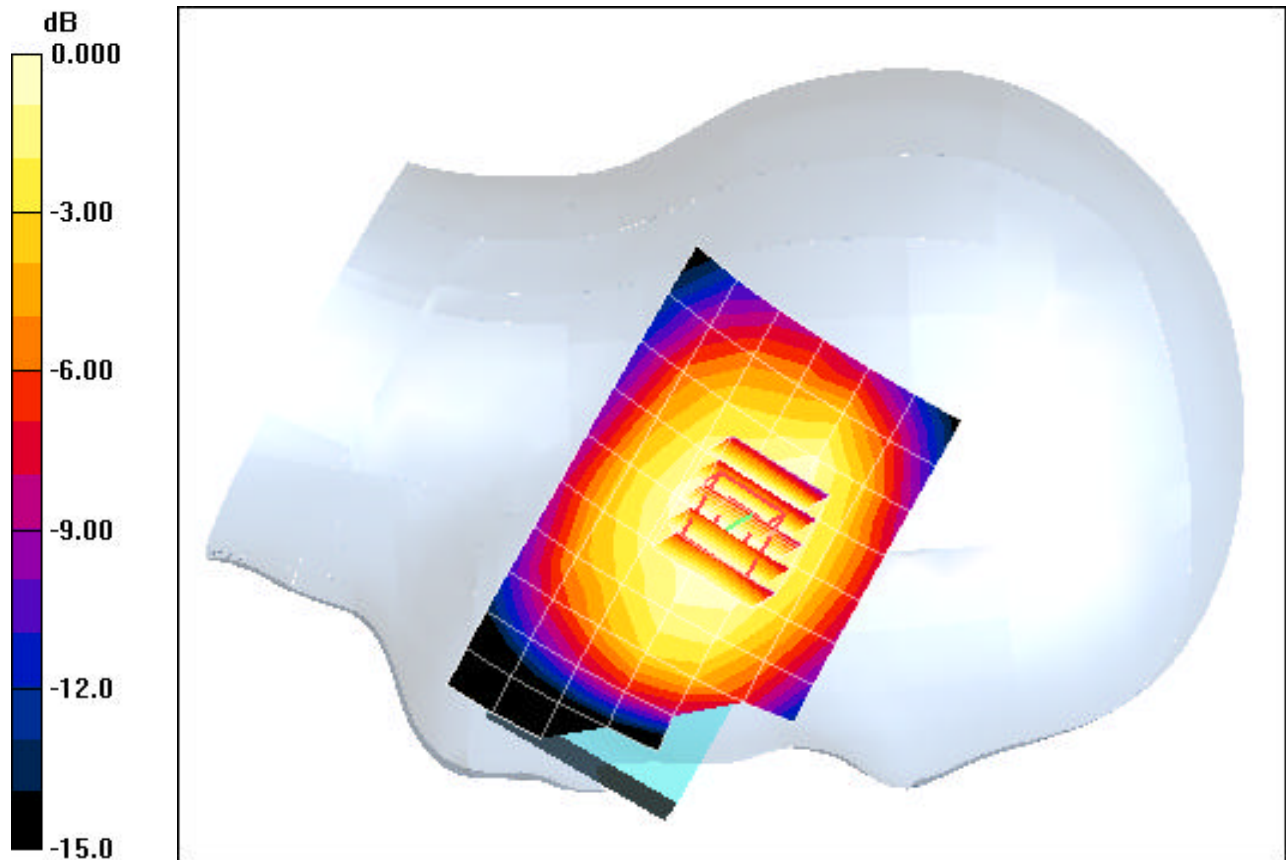

0 dB = 0.900mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Brain ($\sigma = 0.93$ mho/m, $\epsilon_r = 41.93$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 08-08-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Left Head, Tilt, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.1 V/m
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.432 mW/g

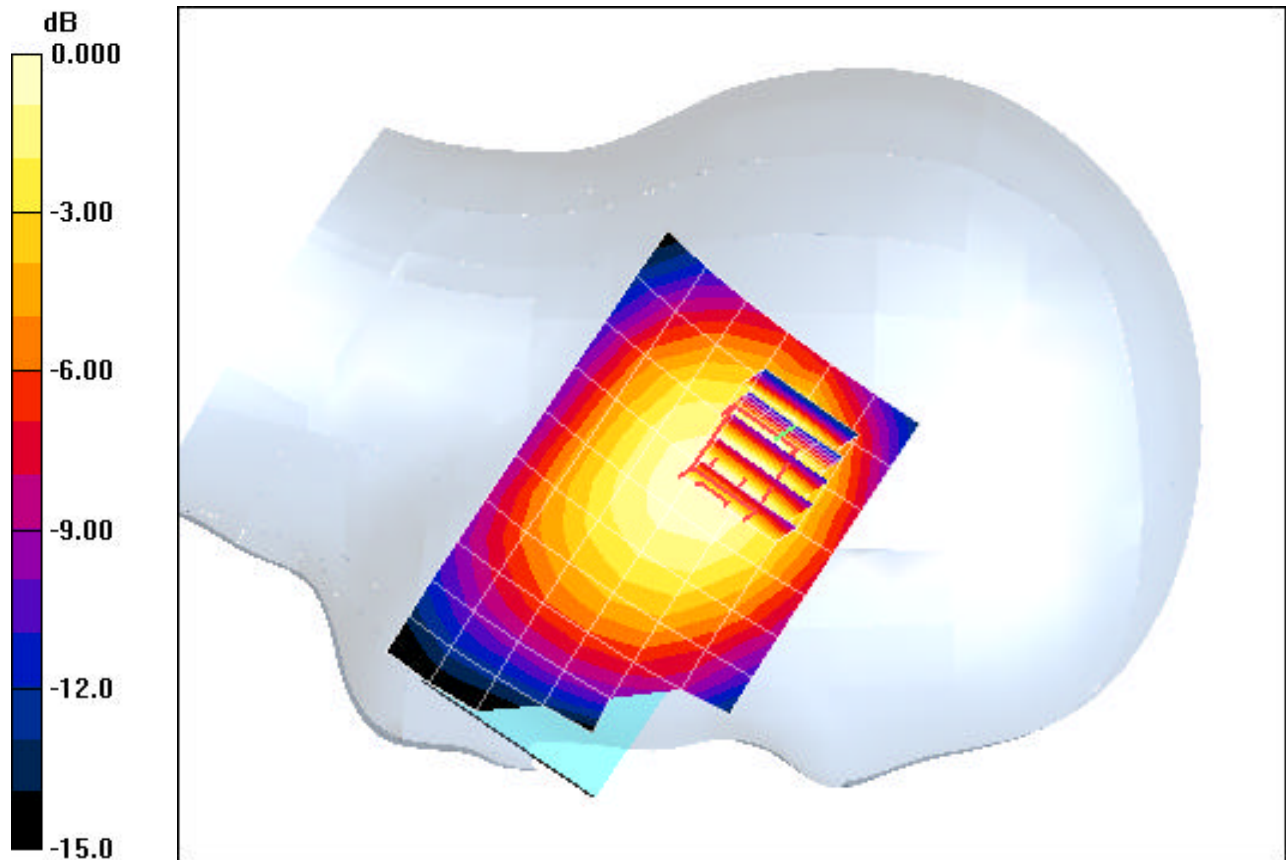

0 dB = 0.700mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm**


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain ($\sigma = 1.44 \text{ mho/m}$, $\epsilon_r = 39.61$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Right Section

Test Date: 08-08-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Right Head, Touch, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.2 V/m
Peak SAR (extrapolated) = 0.498 W/kg
SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.194 mW/g

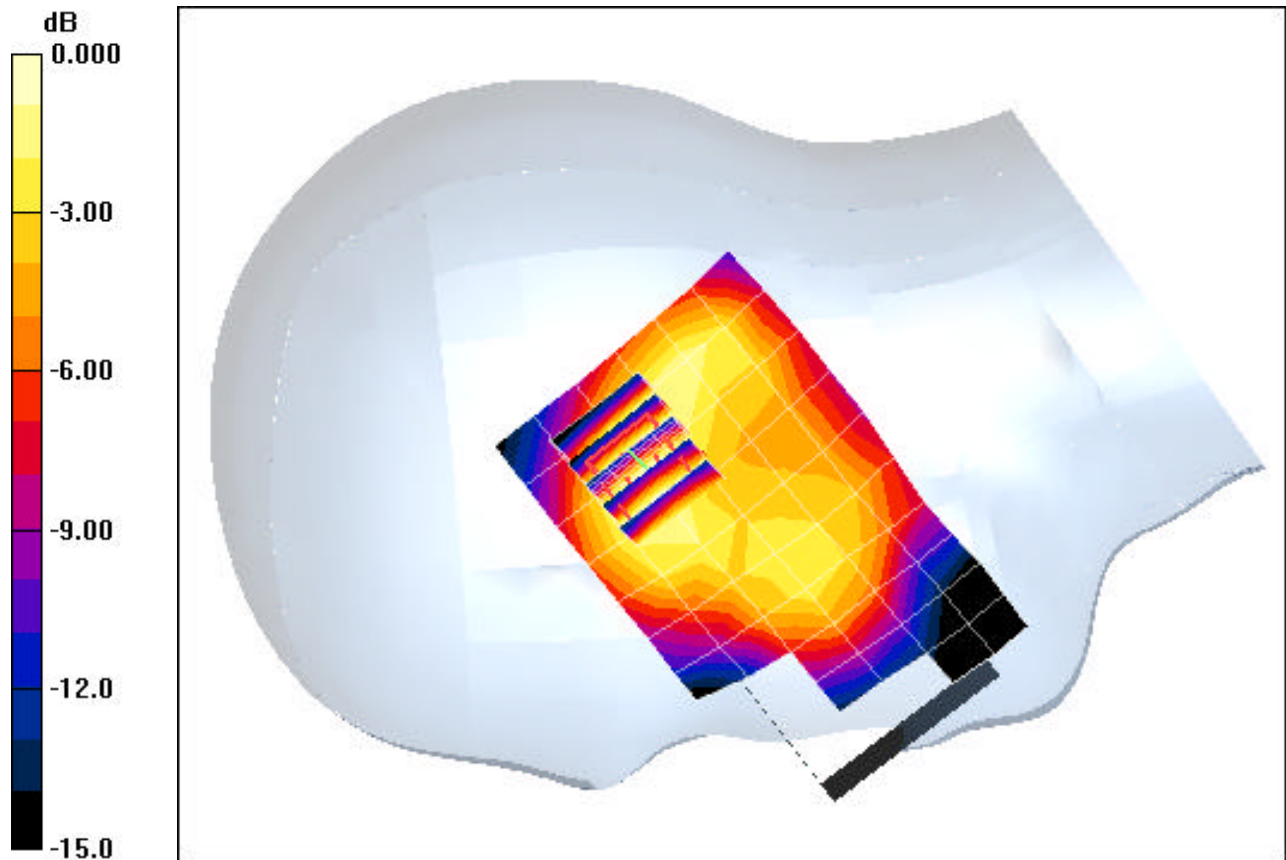

0 dB = 0.400mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain ($\sigma = 1.44$ mho/m, $\epsilon_r = 39.61$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-08-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Right Head, Tilt, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.8 V/m
Peak SAR (extrapolated) = 0.746 W/kg
SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.277 mW/g

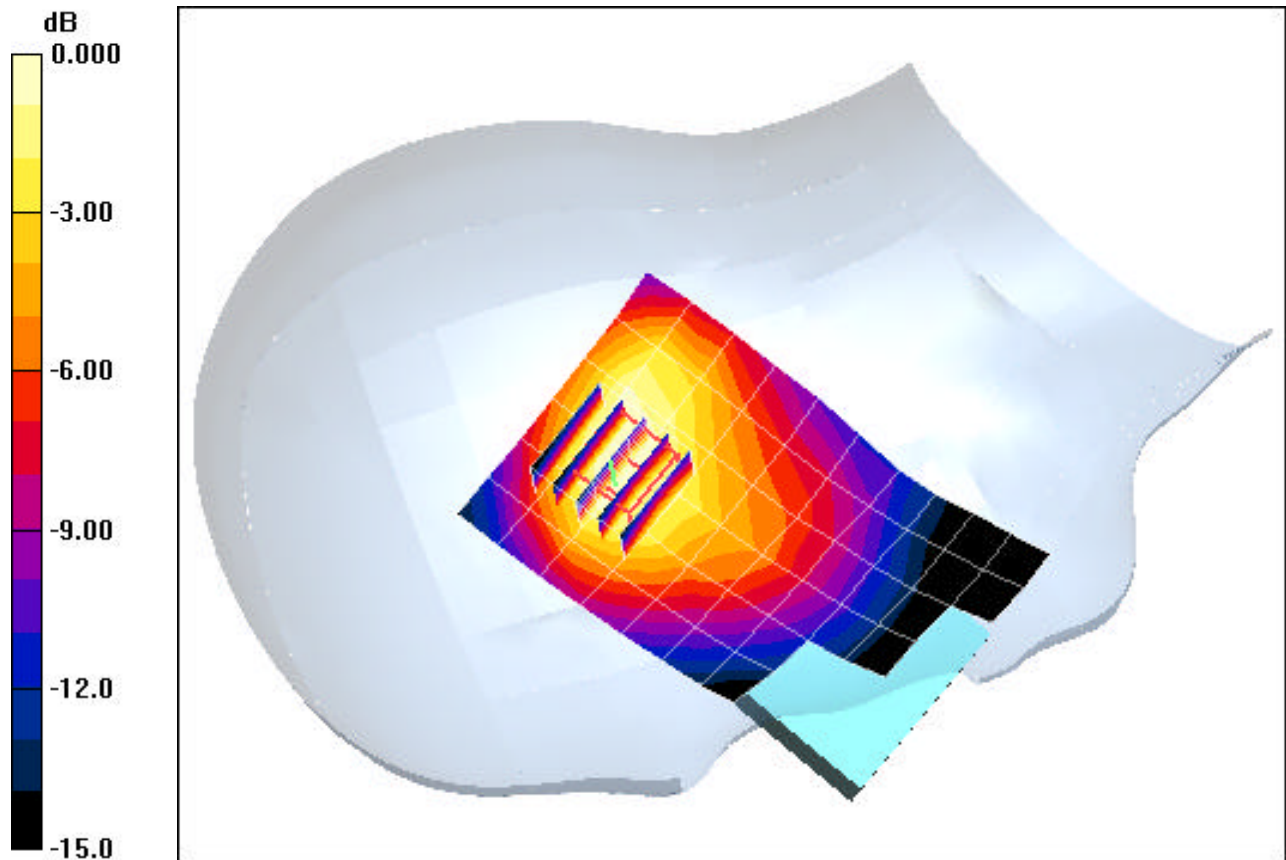

0 dB = 0.500mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain ($\sigma = 1.44 \text{ mho/m}$, $\epsilon_r = 39.61$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Left Section

Test Date: 08-08-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Left Head, Touch, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.5 V/m
Peak SAR (extrapolated) = 0.626 W/kg
SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.208 mW/g

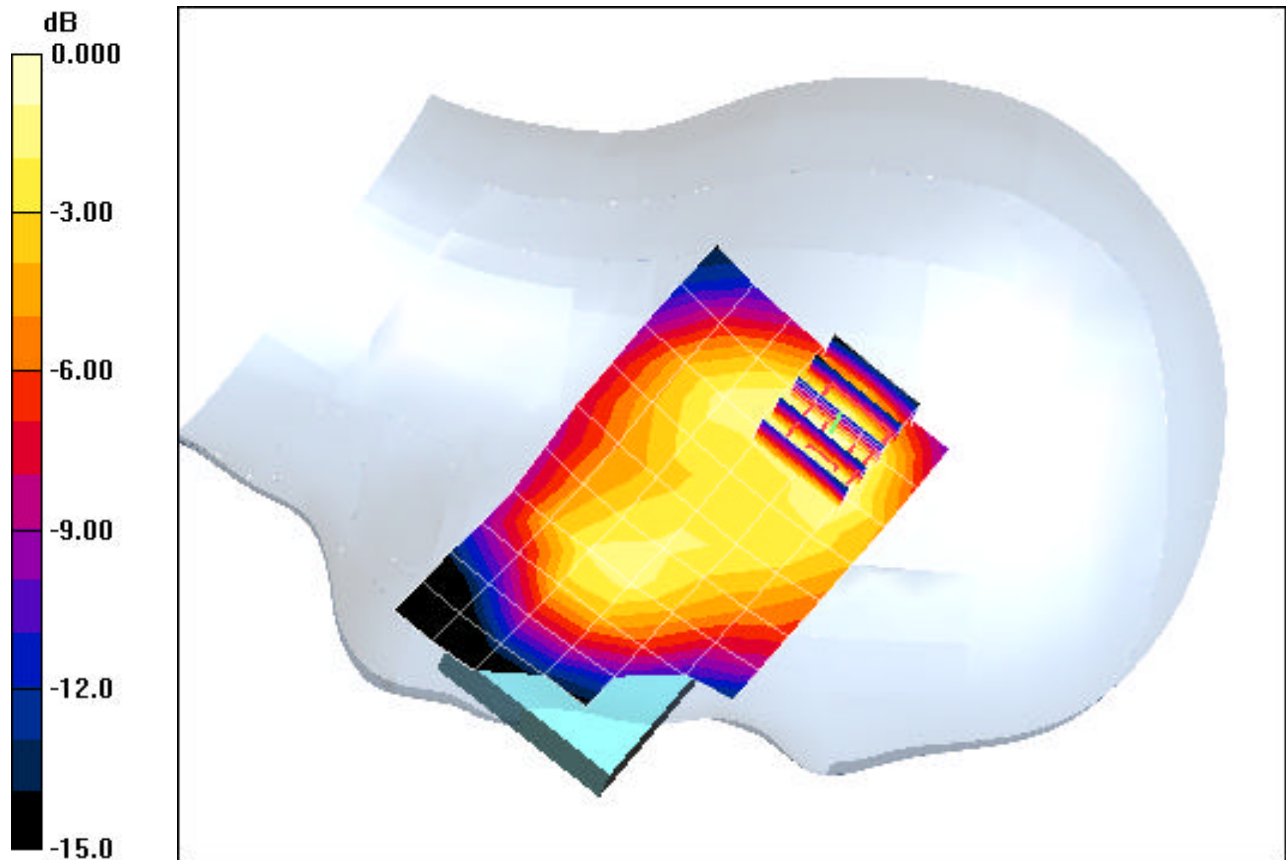

0 dB = 0.400mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain ($\sigma = 1.44$ mho/m, $\epsilon_r = 39.61$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 08-08-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Left Head, Tilt, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.3 V/m
Peak SAR (extrapolated) = 0.781 W/kg
SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.264 mW/g

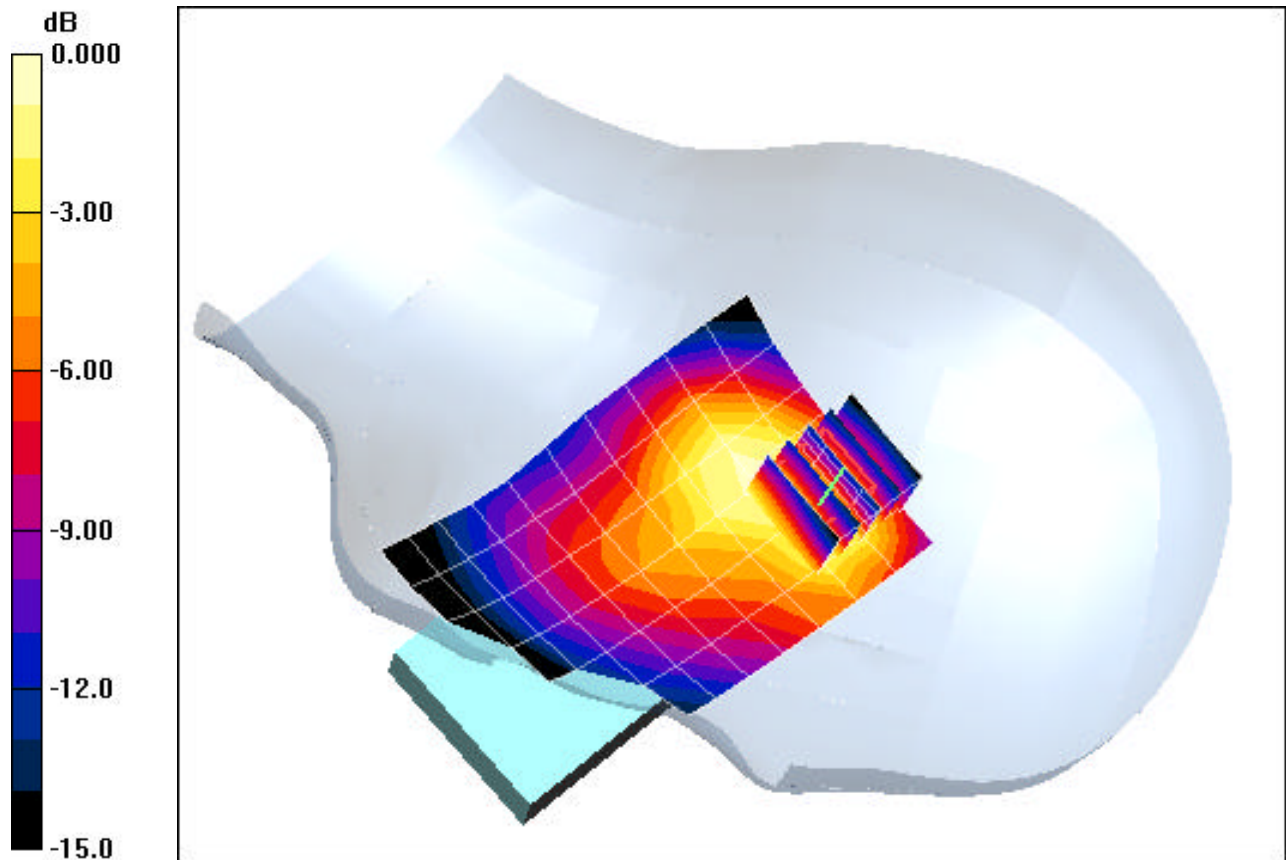

0 dB = 0.500mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C


Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Right Head, Touch, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.949 V/m
Peak SAR (extrapolated) = 0.011 W/kg
SAR(1 g) = 0.004 mW/g; SAR(10 g) = 0.00256 mW/g

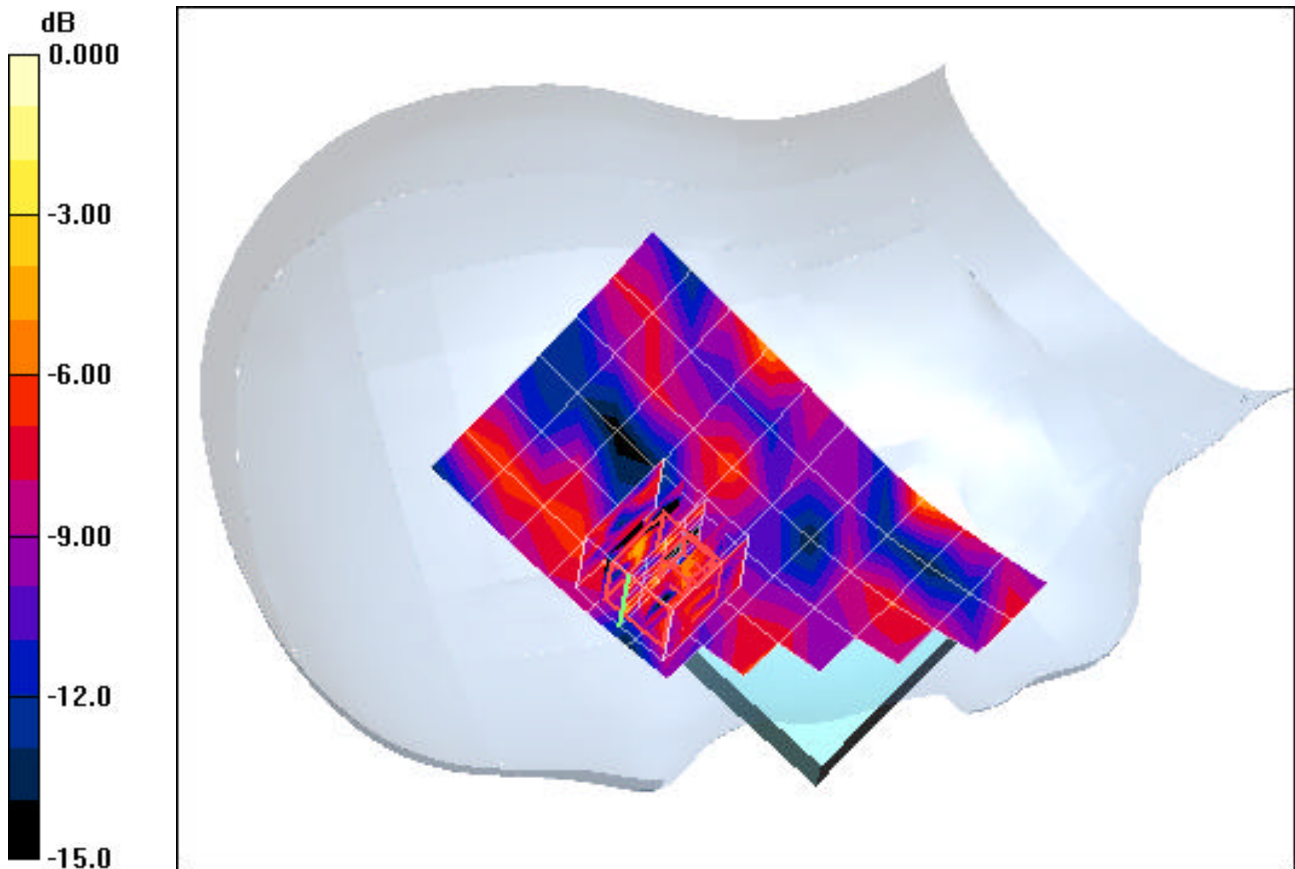

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C


Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Right Head, Tilt, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.780 V/m
Peak SAR (extrapolated) = 0.017 W/kg
SAR(1 g) = 0.001 mW/g; SAR(10 g) = 0.00029 mW/g

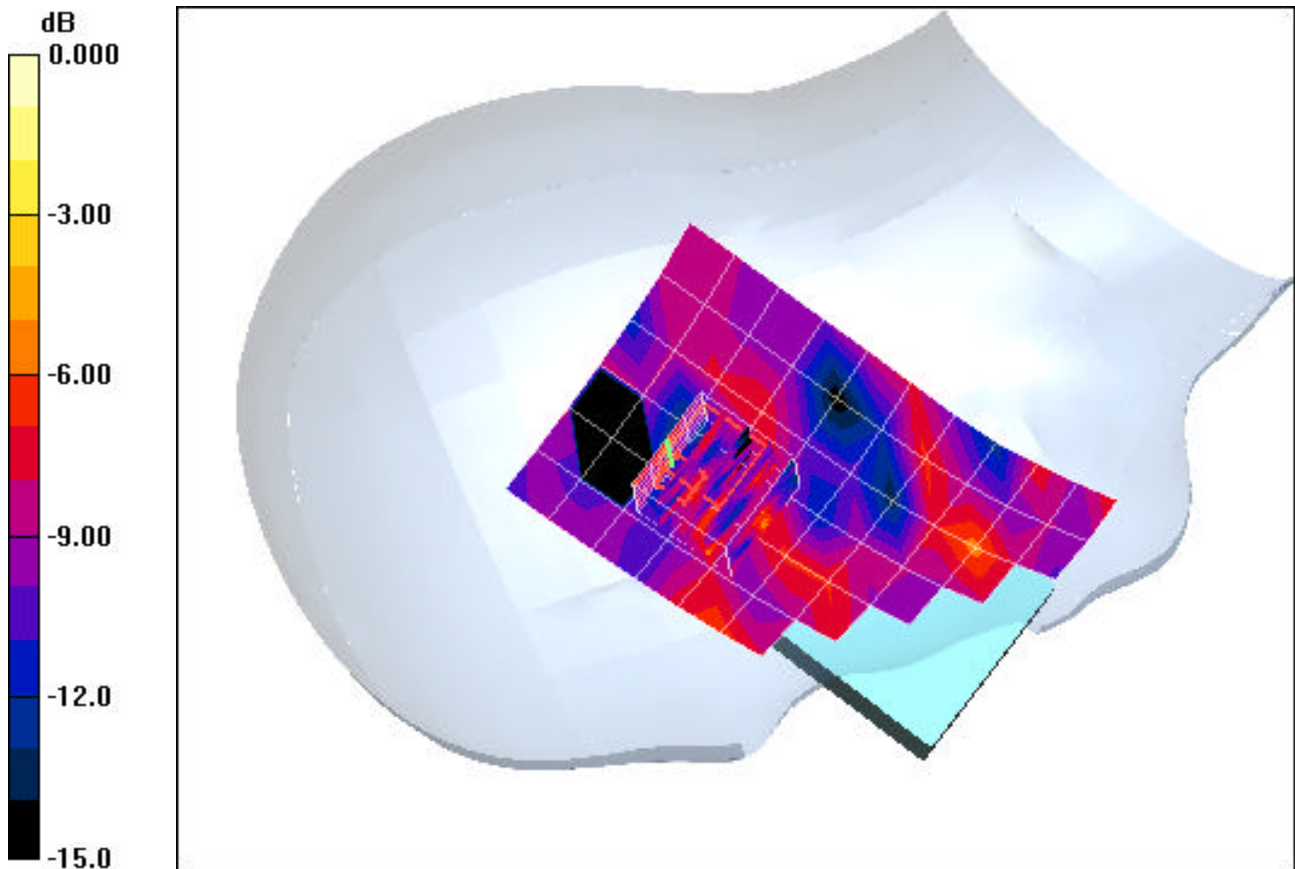

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Left Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.04 V/m

Peak SAR (extrapolated) = 0.020 W/kg

SAR(1 g) = 0.007 mW/g; SAR(10 g) = 0.00254 mW/g

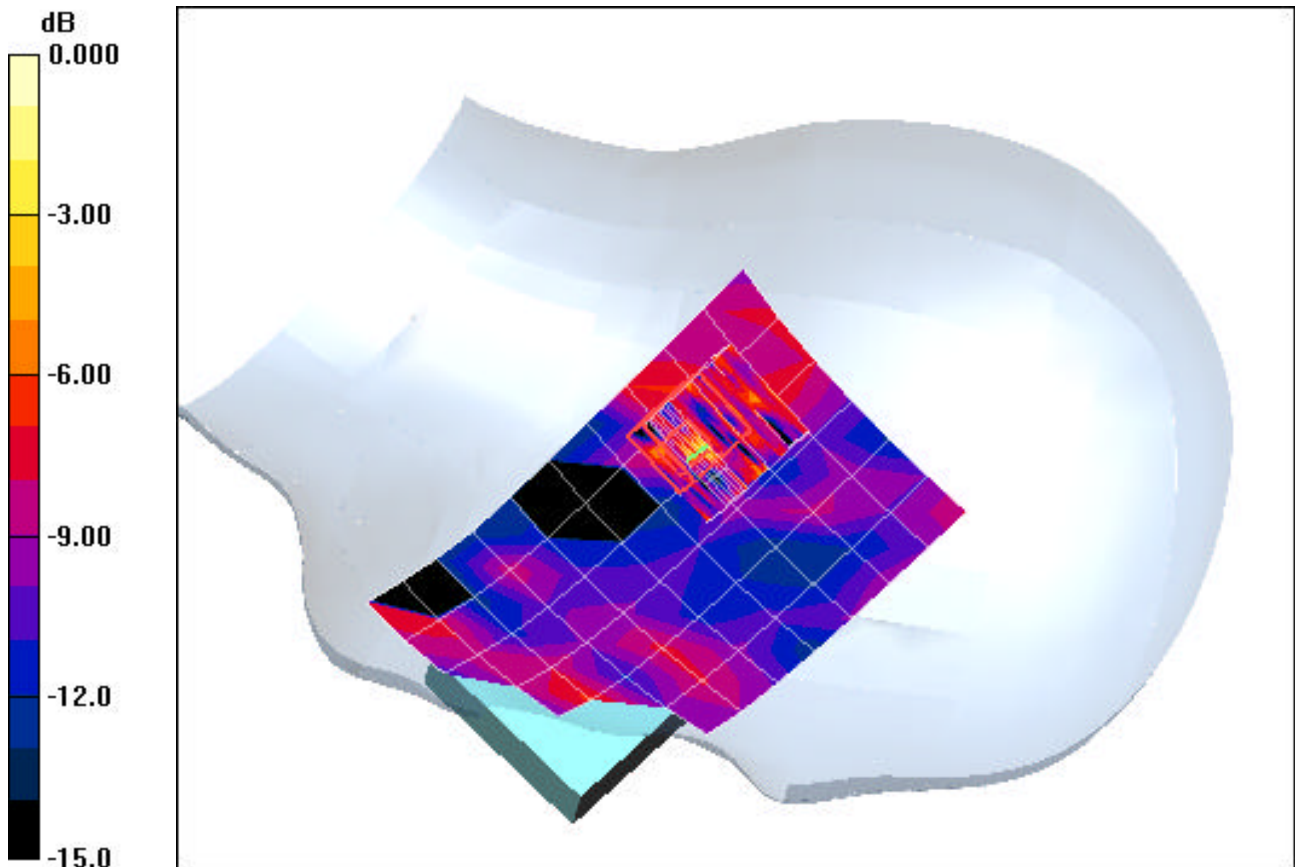

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Left Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.986 V/m

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.004 mW/g; SAR(10 g) = 0.00119 mW/g

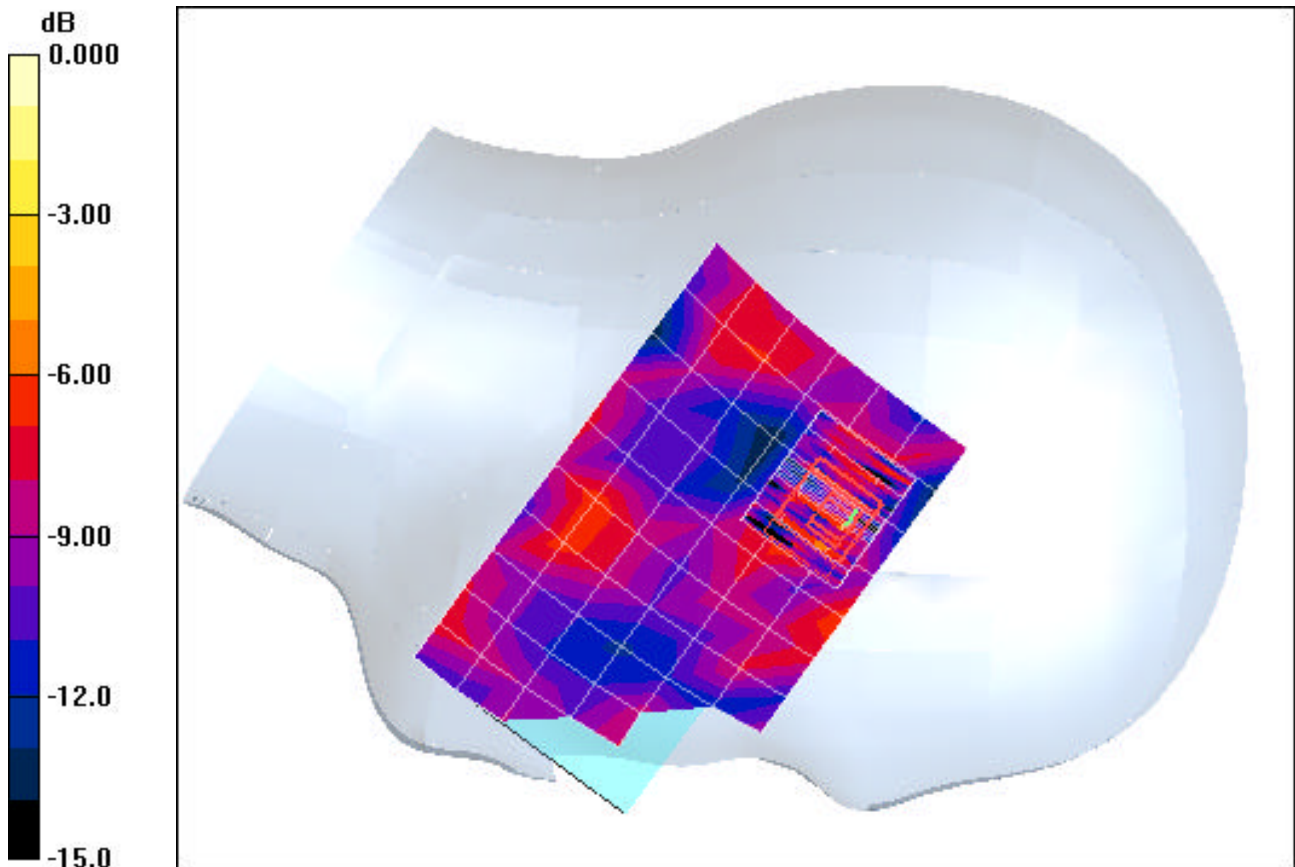

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C


Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1
Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Right Head, Touch, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.09 V/m
Peak SAR (extrapolated) = 0.007 W/kg
SAR(1 g) = 0.004 mW/g; SAR(10 g) = 0.00262 mW/g

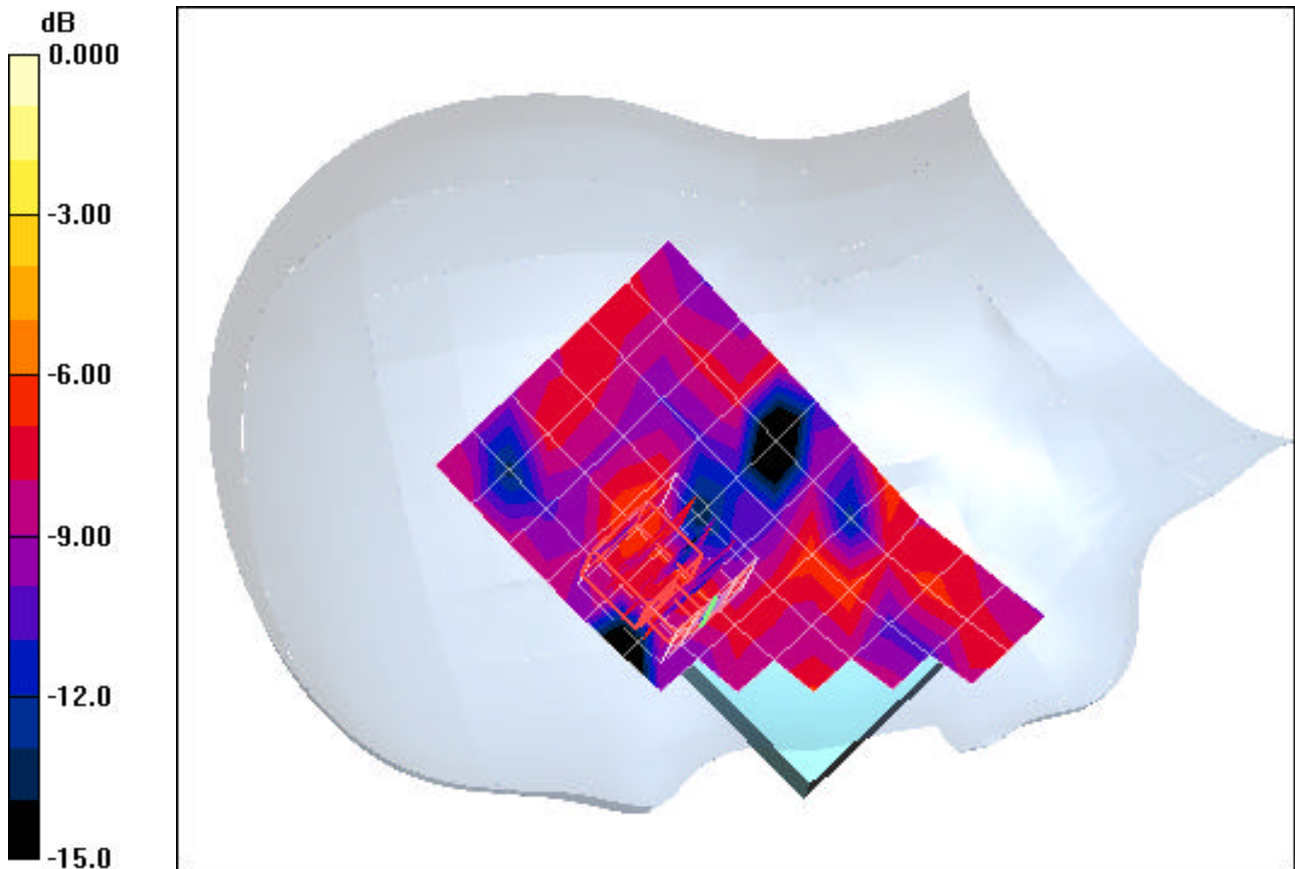

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C


Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1
Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Right Head, Tilt, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.994 V/m
Peak SAR (extrapolated) = 0.008 W/kg
SAR(1 g) = 0.005 mW/g; SAR(10 g) = 0.00392 mW/g

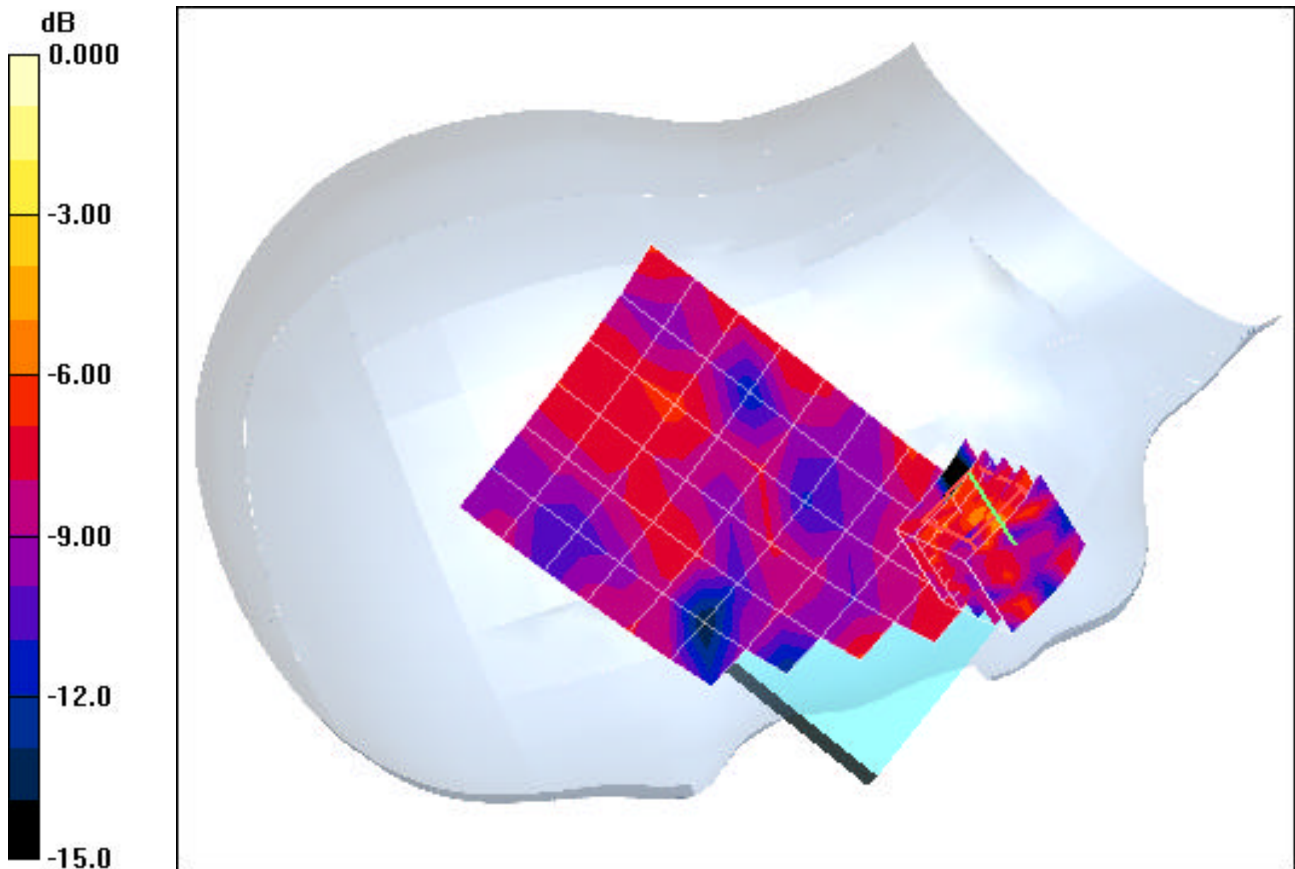

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Left Head, Touch, Mid.ch, Standard Batt.


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.01 V/m

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0.004 mW/g; SAR(10 g) = 0.00256 mW/g

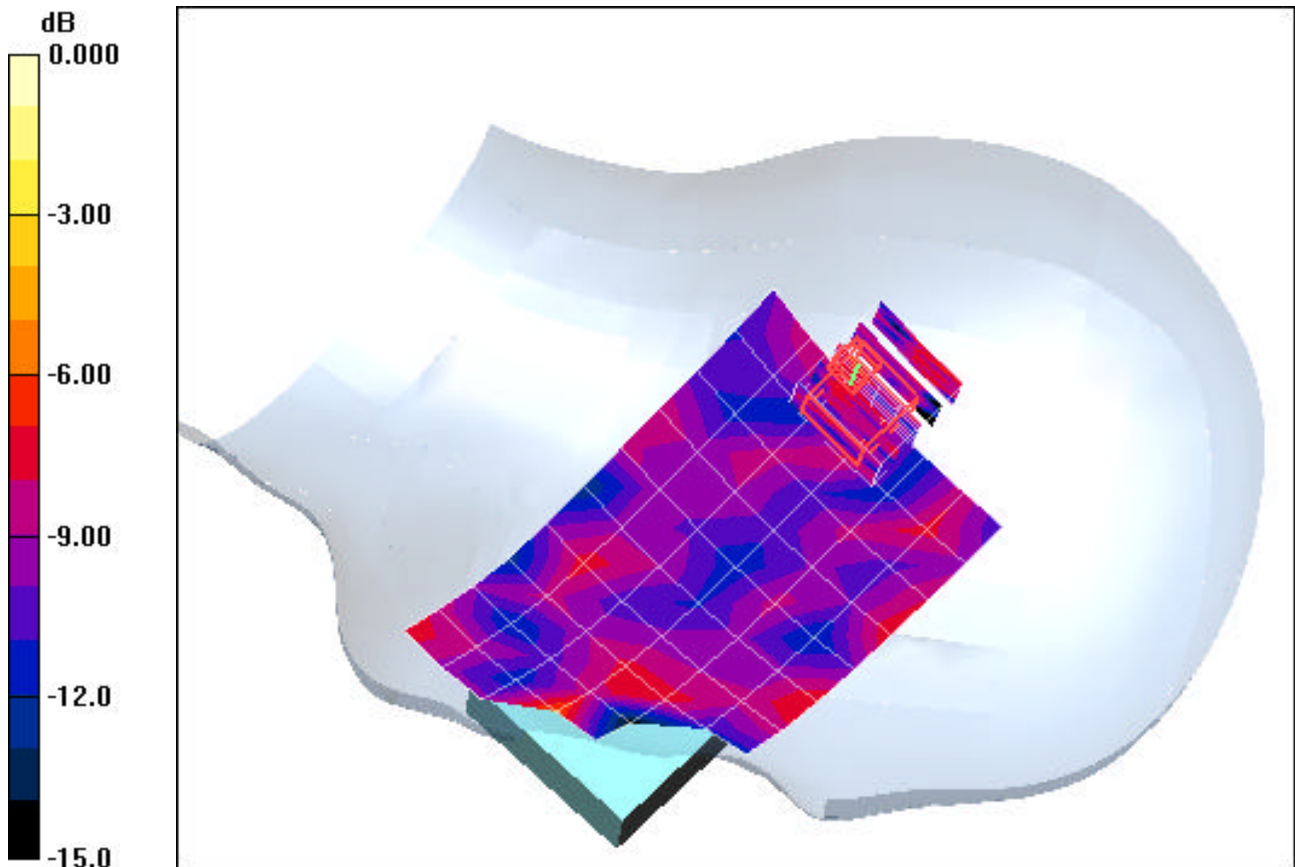

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.84$ mho/m, $\epsilon_r = 38.59$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 08-09-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Left Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.967 V/m

Peak SAR (extrapolated) = 0.005 W/kg

SAR(1 g) = 0.003 mW/g; SAR(10 g) = 0.00191 mW/g

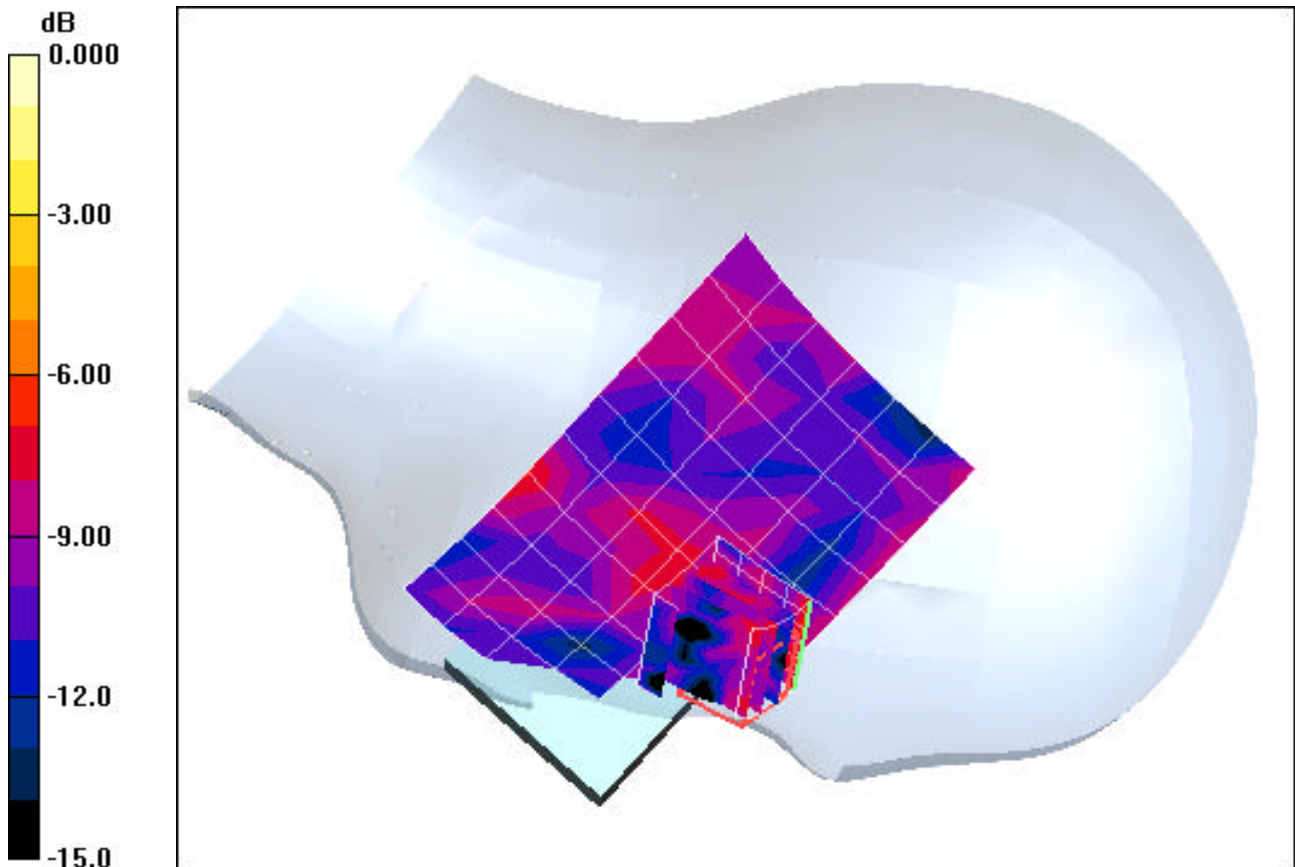

0 dB = 0.020mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.93$ mho/m, $\epsilon_r = 41.93$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 08-08-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Right Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.3 V/m

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.890 mW/g; SAR(10 g) = 0.658 mW/g

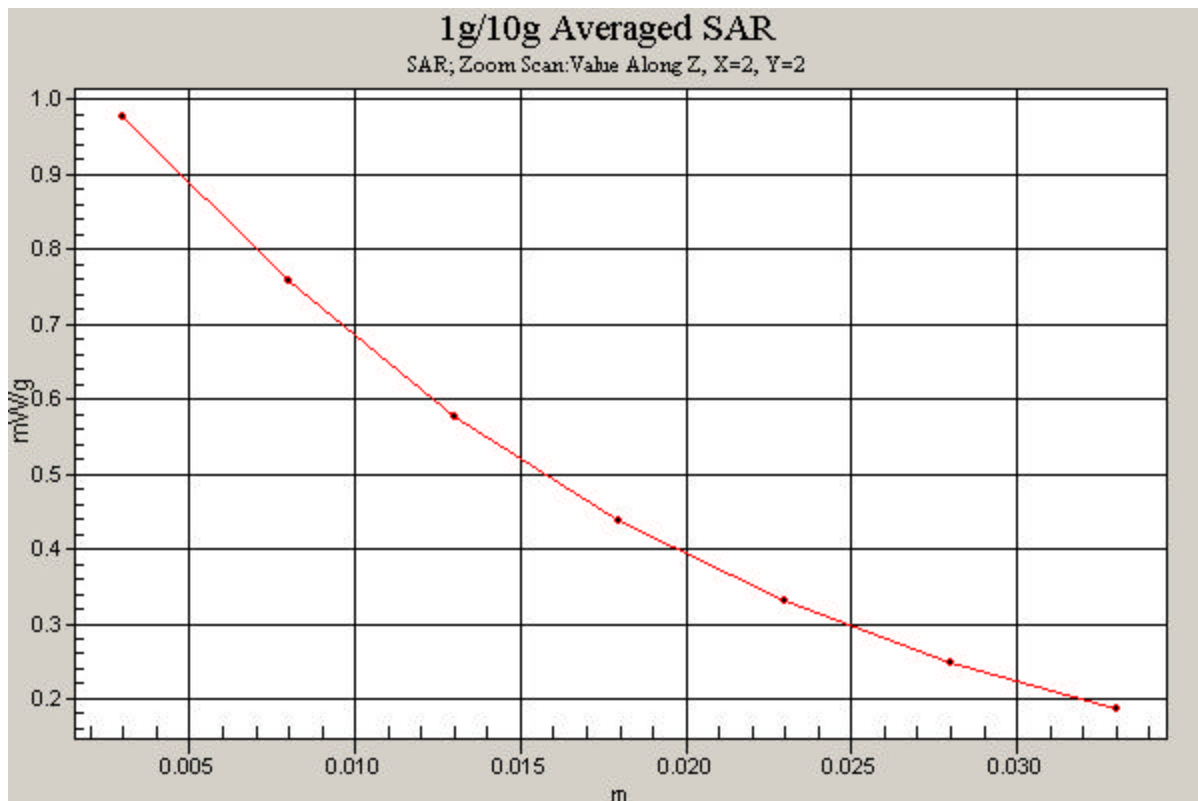

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.44$ mho/m, $\epsilon_r = 39.61$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 08-08-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Right Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.8 V/m

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.277 mW/g

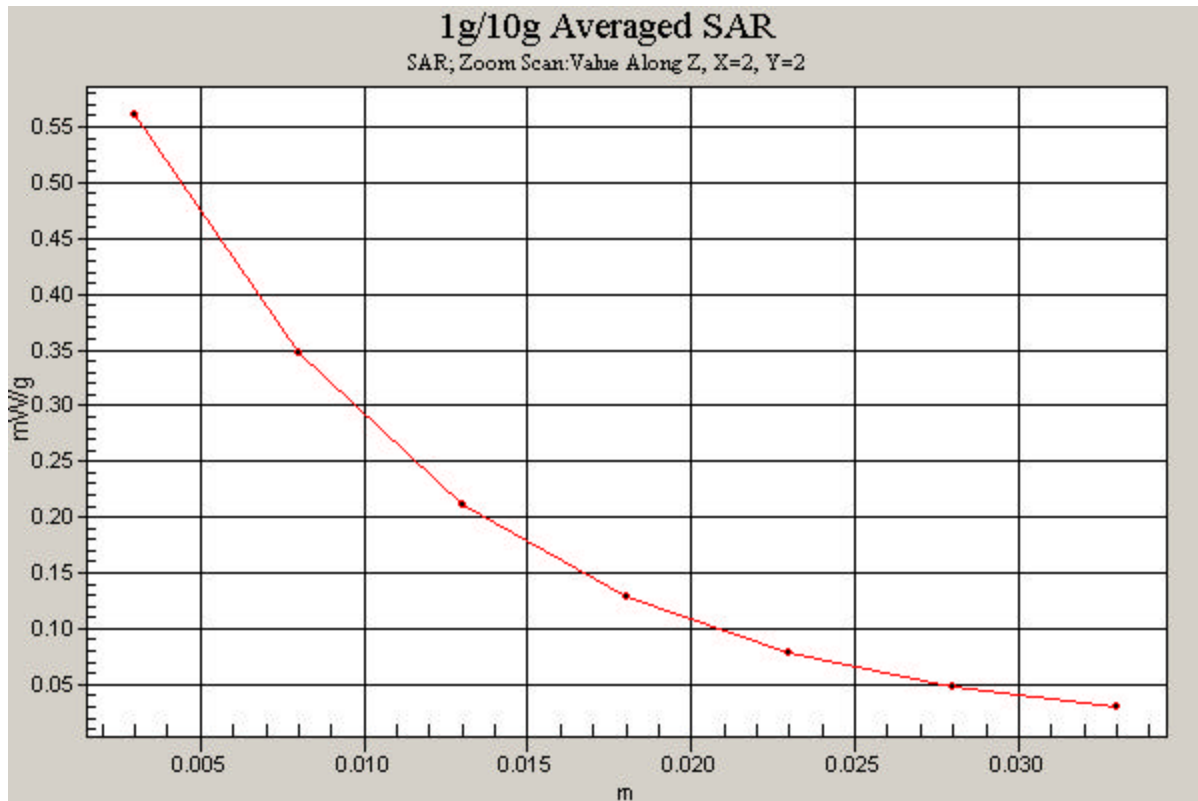

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Muscle ($\sigma = 0.99$ mho/m, $\epsilon_r = 56.94$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 08-21-2007; Ambient Temp: 23.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Body SAR, with Beltclip, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.9 V/m

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.918 mW/g

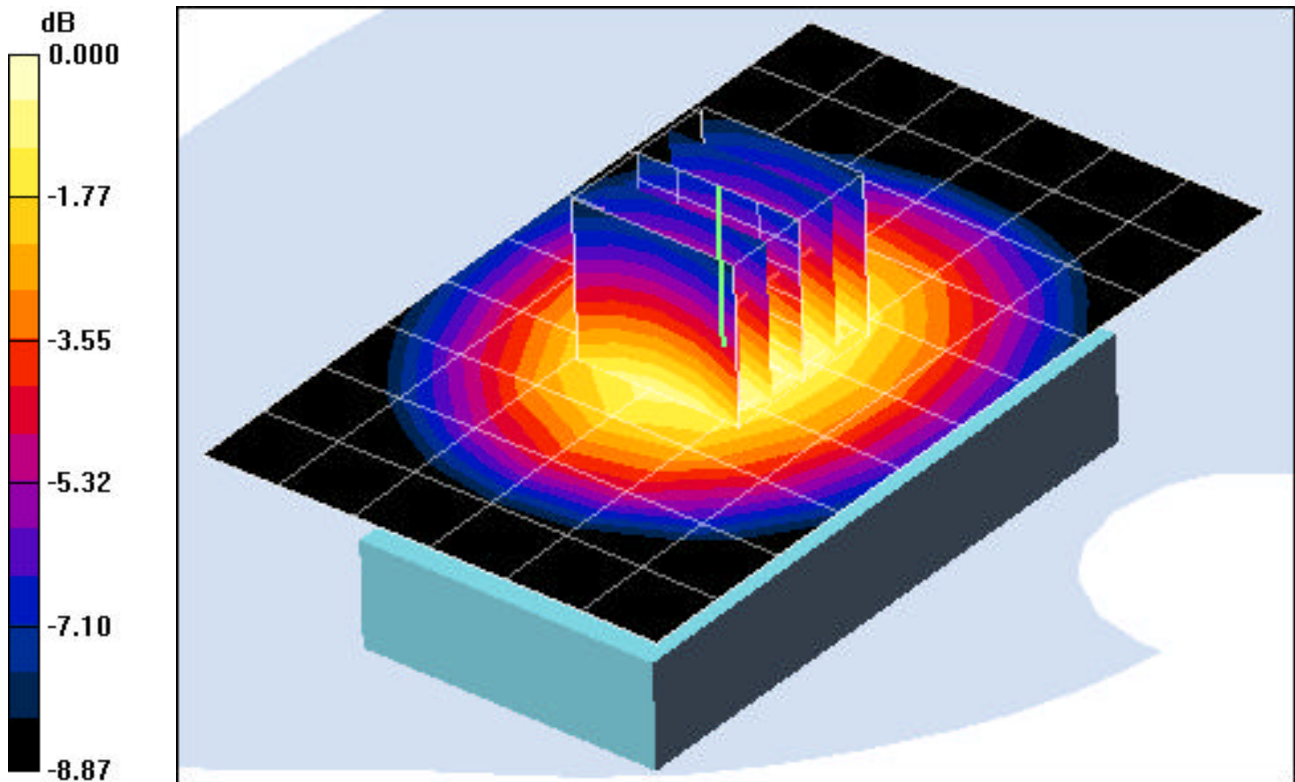

0 dB = 1.38mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Muscle ($\sigma = 0.99$ mho/m, $\epsilon_r = 56.94$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 08-21-2007; Ambient Temp: 23.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Body SAR, with Beltclip, Front side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.8 V/m

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.441 mW/g

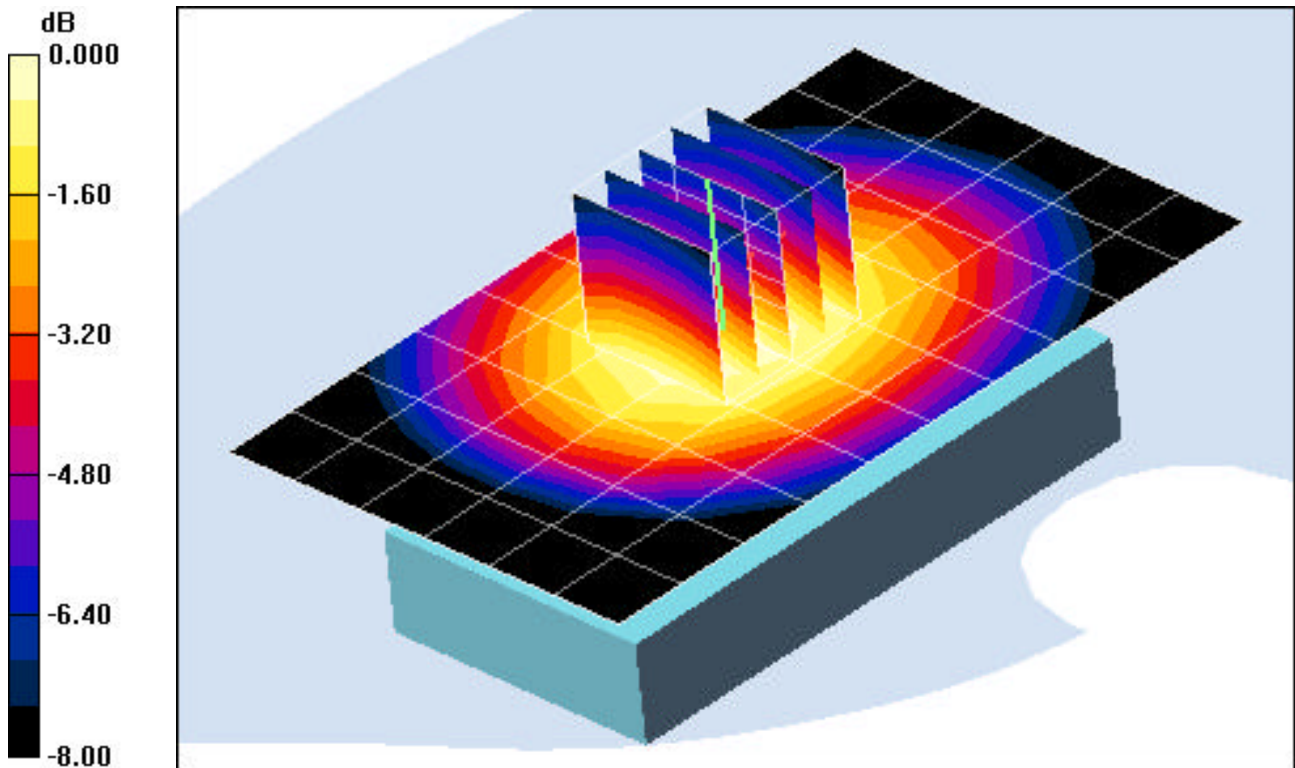

0 dB = 0.639mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 55.80$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 08-21-2007; Ambient Temp: 23.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Body SAR, with Beltclip, Back side, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.3 V/mdB
Peak SAR (extrapolated) = 0.976 W/kg
SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.354 mW/g

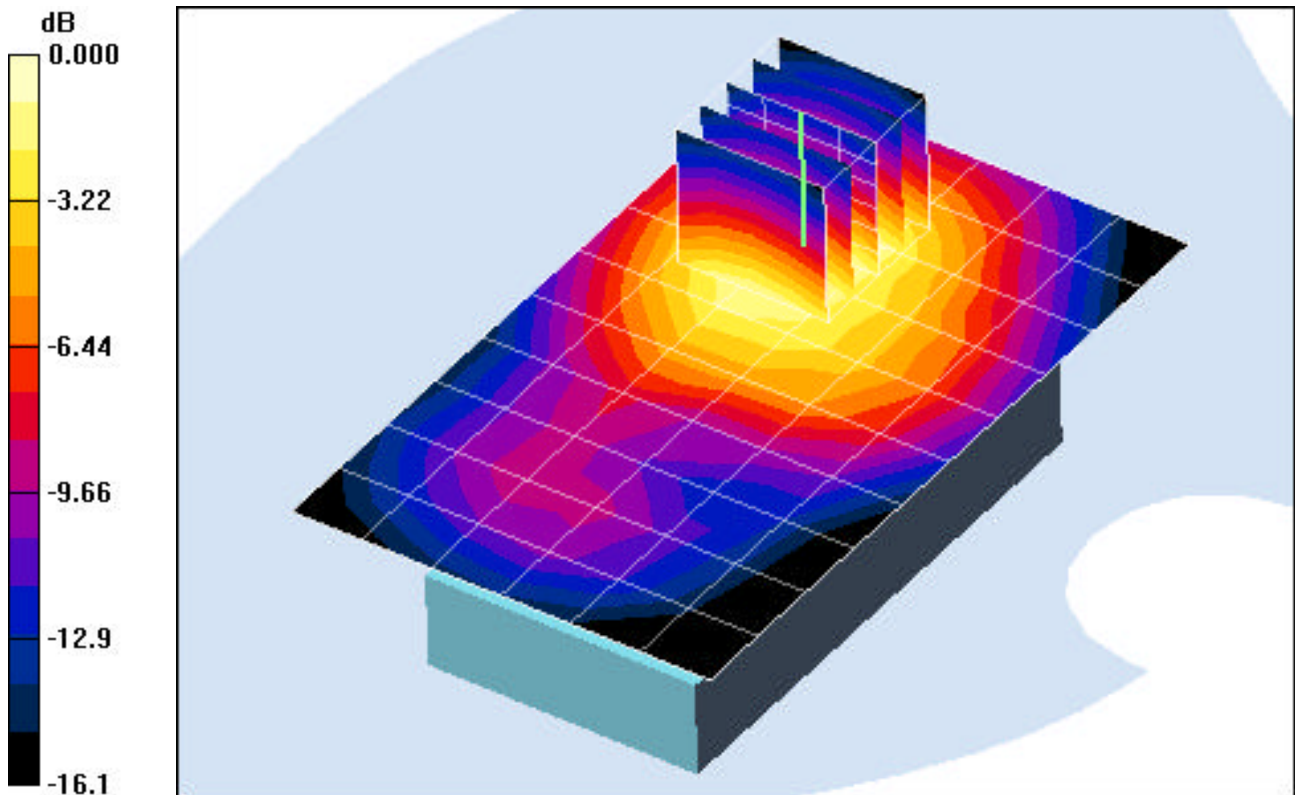

0 dB = 0.718mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 55.80$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 08-21-2007; Ambient Temp: 23.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Body SAR, with Beltclip, Front side, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.07 V/m
Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.080 mW/g

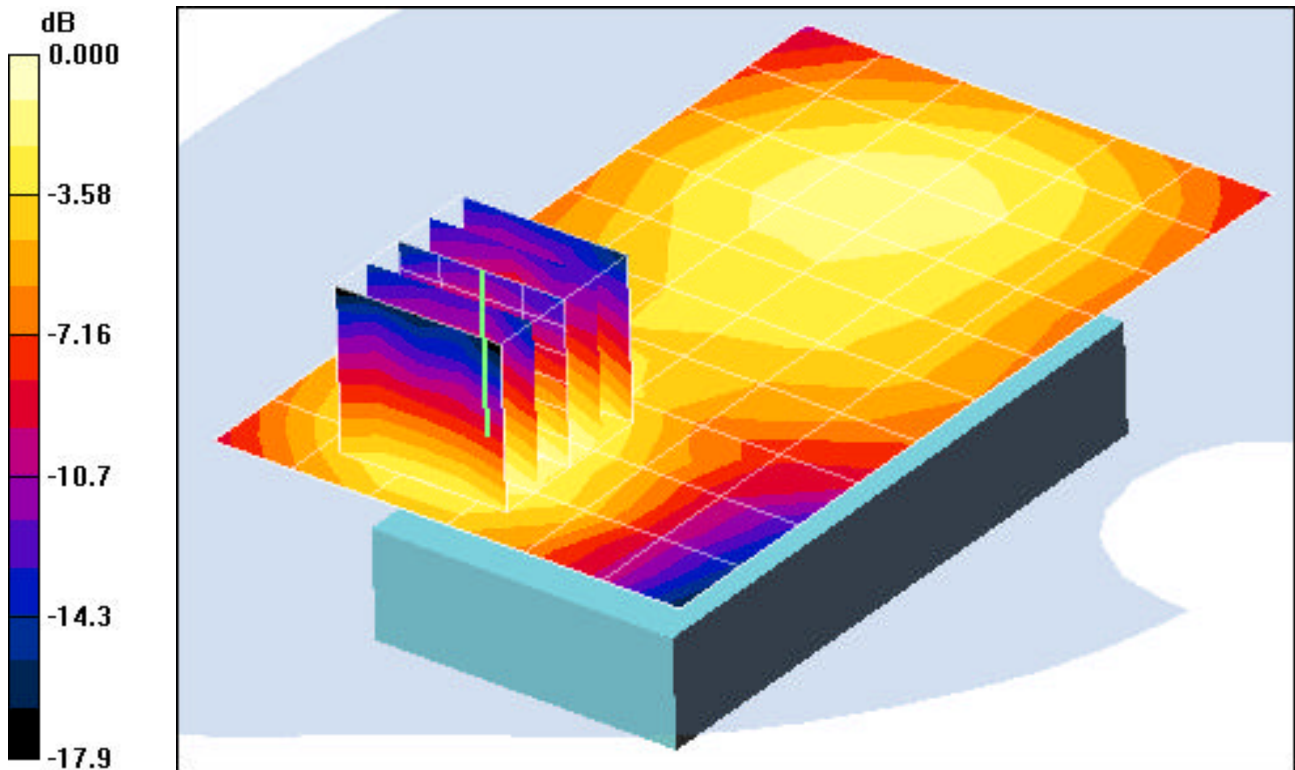

0 dB = 0.156mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.94$ mho/m, $\epsilon_r = 54.63$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 08-22-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.37, 6.37, 6.37); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WLAN 802.11 b, Body SAR, with Beltclip, Back side, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.62 V/m

Peak SAR (extrapolated) = 0.047 W/kg

SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.012 mW/g

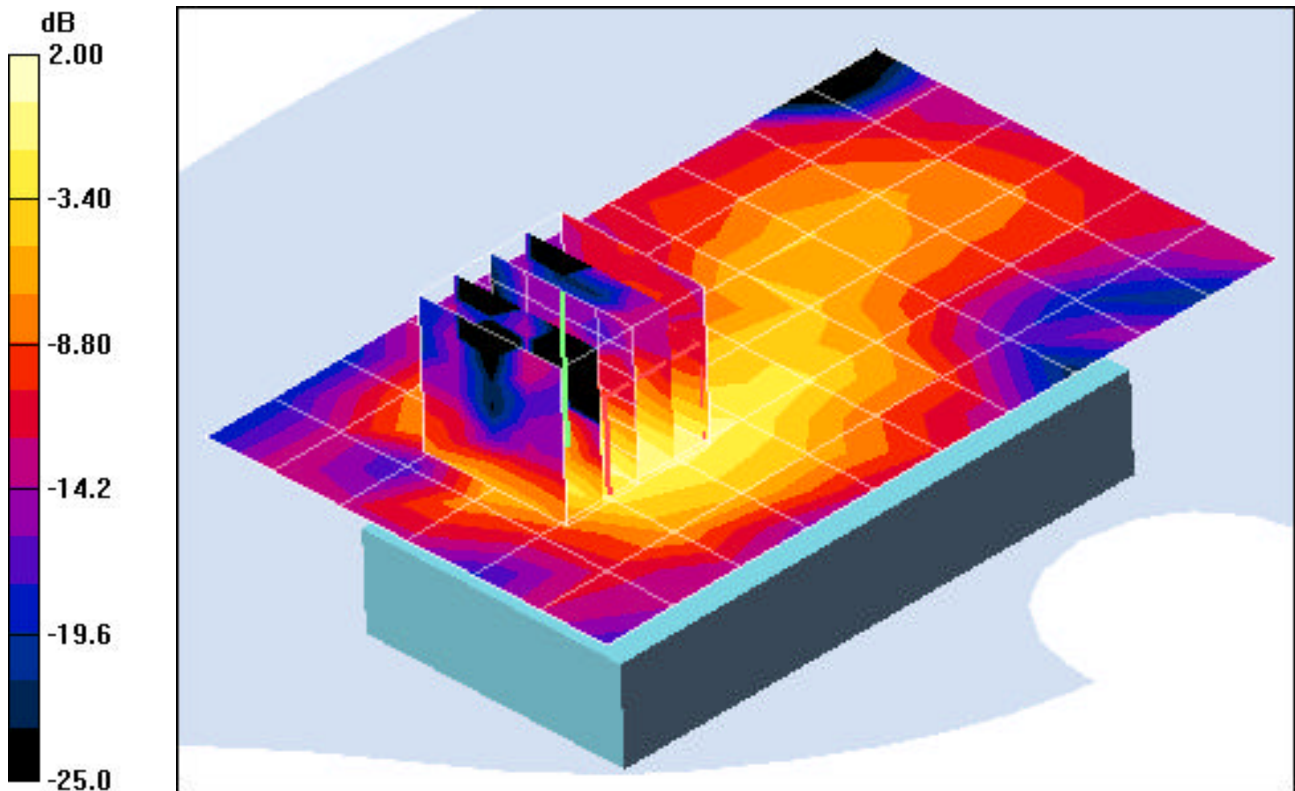

0 dB = 0.034mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.94$ mho/m, $\epsilon_r = 54.63$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 08-22-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.37, 6.37, 6.37); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WLAN 802.11 b, Body SAR, with Beltclip, Front side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.28 V/m

Peak SAR (extrapolated) = 0.008 W/kg

SAR(1 g) = 0.003 mW/g; SAR(10 g) = 0.001 mW/g

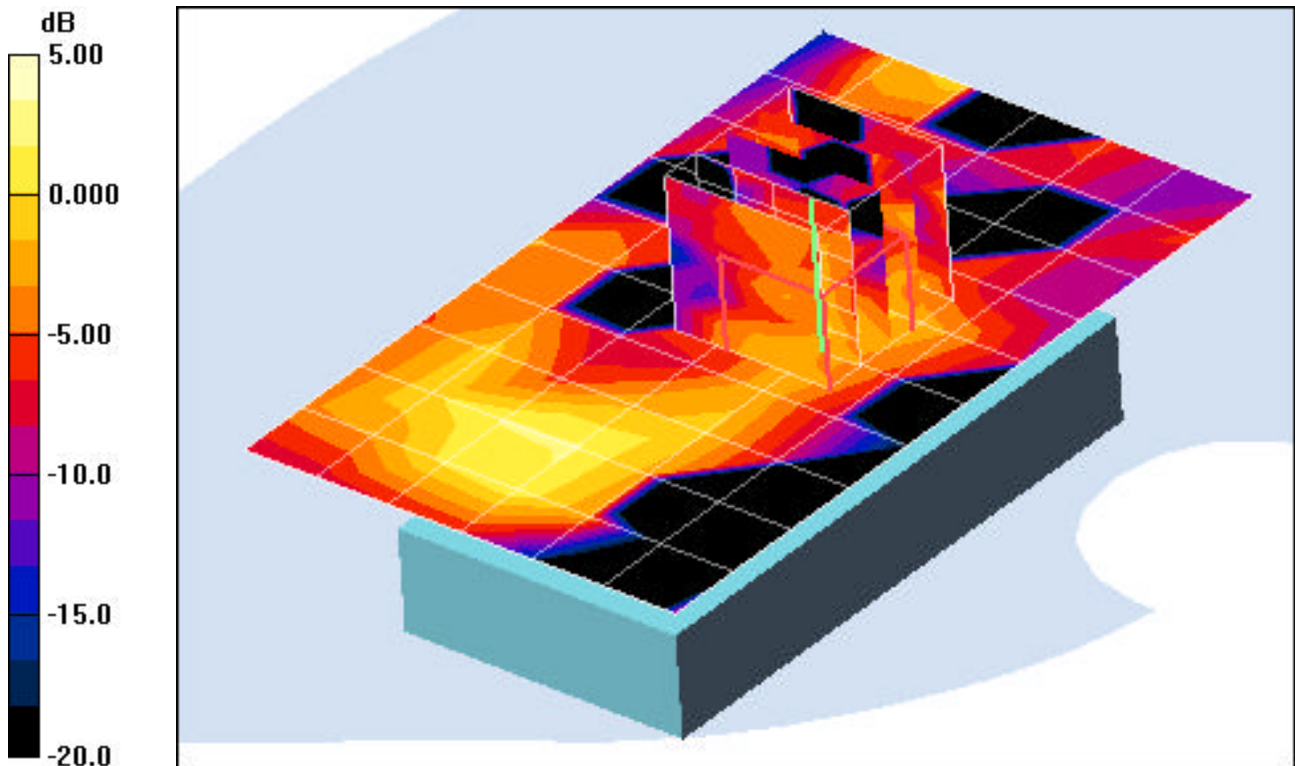

0 dB = 0.005mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.94$ mho/m, $\epsilon_r = 54.63$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 08-22-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.37, 6.37, 6.37); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Body SAR, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.04 V/m

Peak SAR (extrapolated) = 0.047 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.007 mW/g

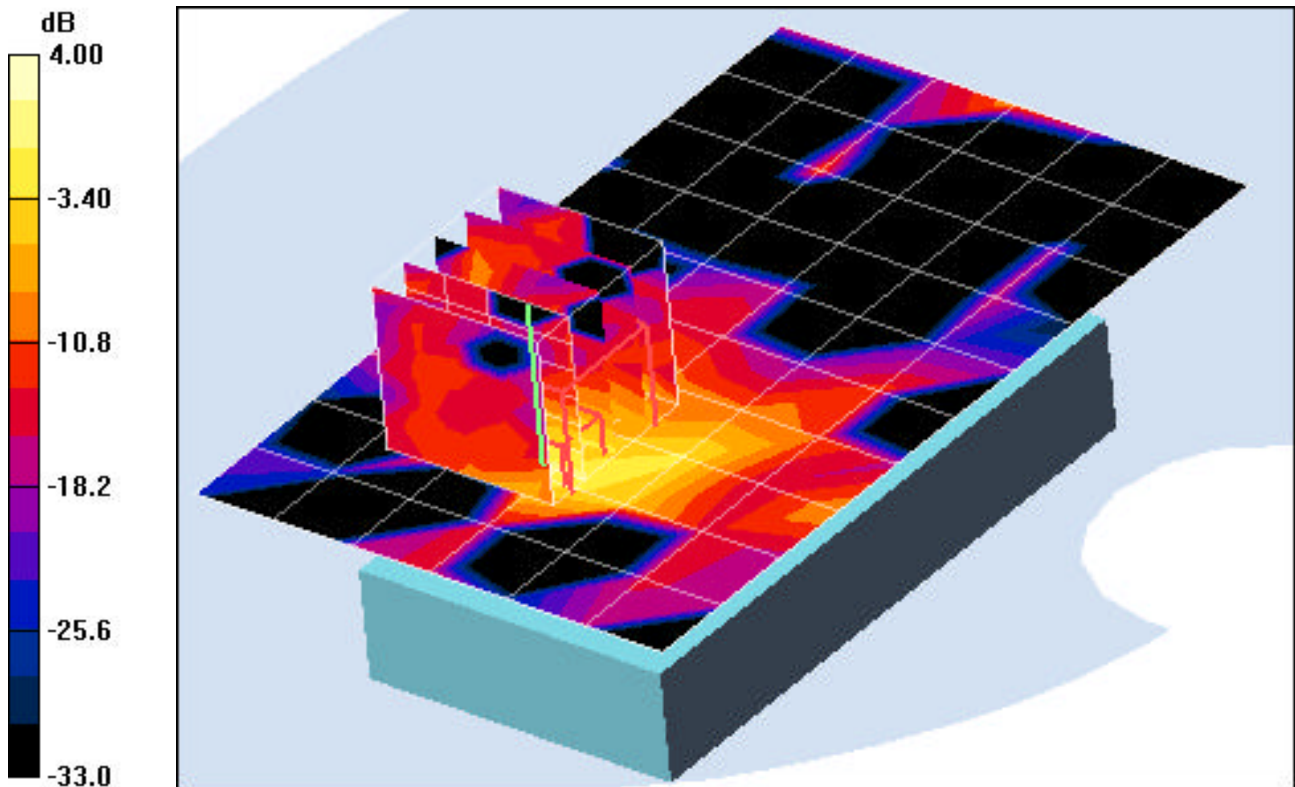

0 dB = 0.026mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.94$ mho/m, $\epsilon_r = 54.63$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 08-22-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.37, 6.37, 6.37); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Body SAR, Front side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.521 V/m

Peak SAR (extrapolated) = 0.009 W/kg

SAR(1 g) = 0.002 mW/g; SAR(10 g) = 0.0005 mW/g

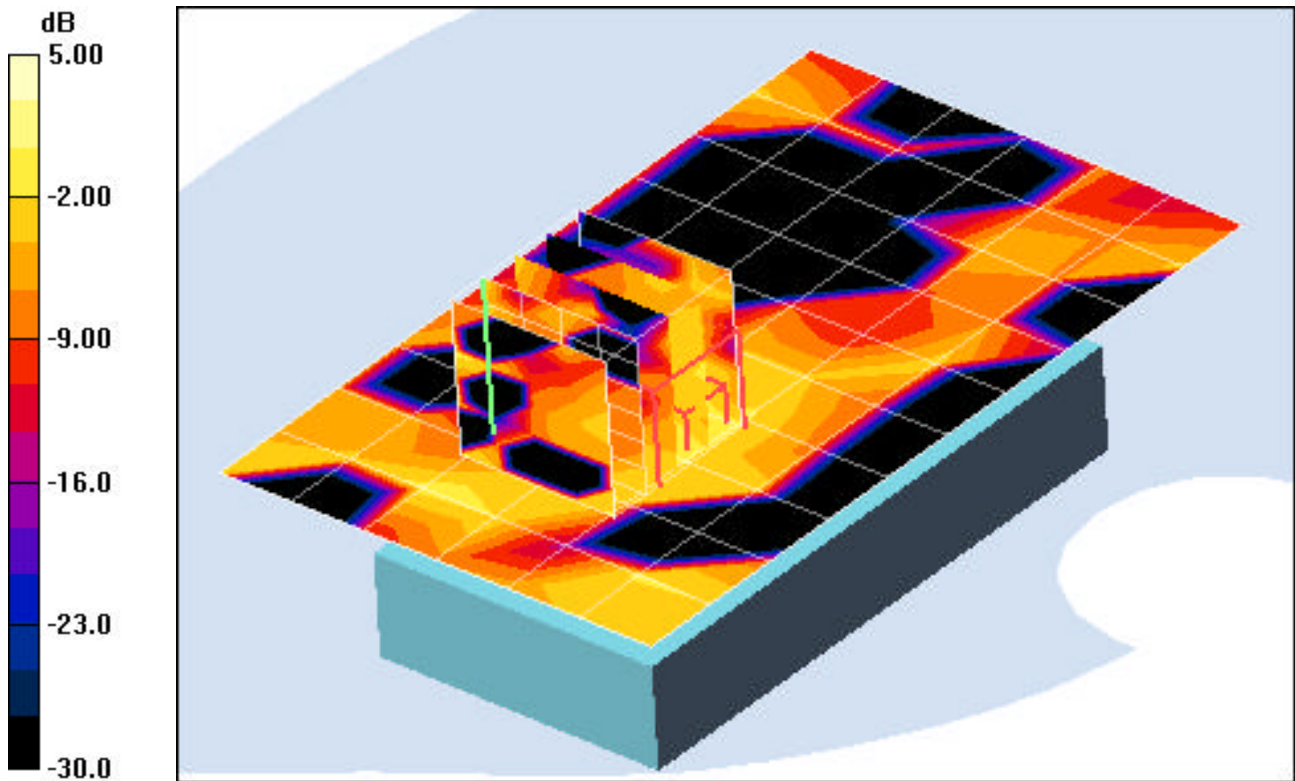

0 dB = 0.004mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Muscle ($\sigma = 0.99$ mho/m, $\epsilon_r = 56.94$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 08-21-2007; Ambient Temp: 23.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Cellular CDMA, Body SAR, with Beltclip, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.9 V/m

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.918 mW/g

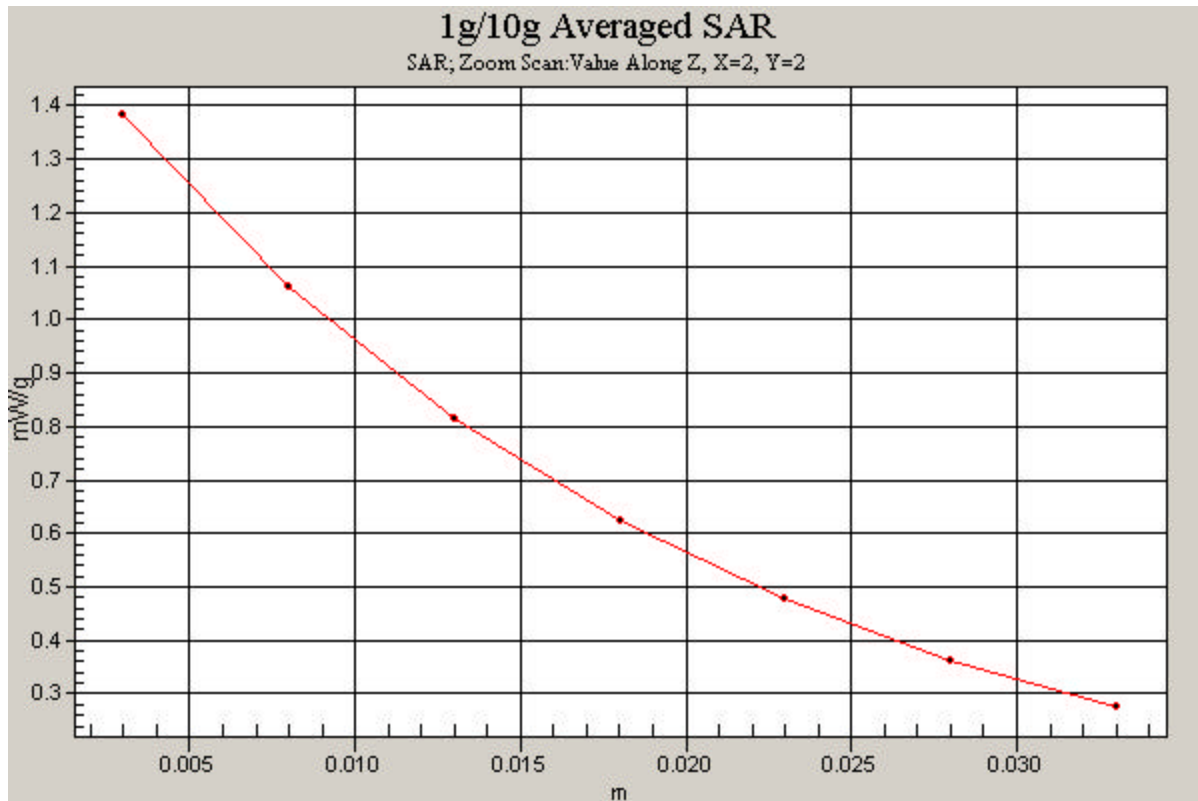

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C
Conducted Power: 25.5 dBm


Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 55.80$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 08-21-2007; Ambient Temp: 23.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS CDMA, Body SAR, with Beltclip, Back side, Mid.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.3 V/m
Peak SAR (extrapolated) = 0.976 W/kg
SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.354 mW/g

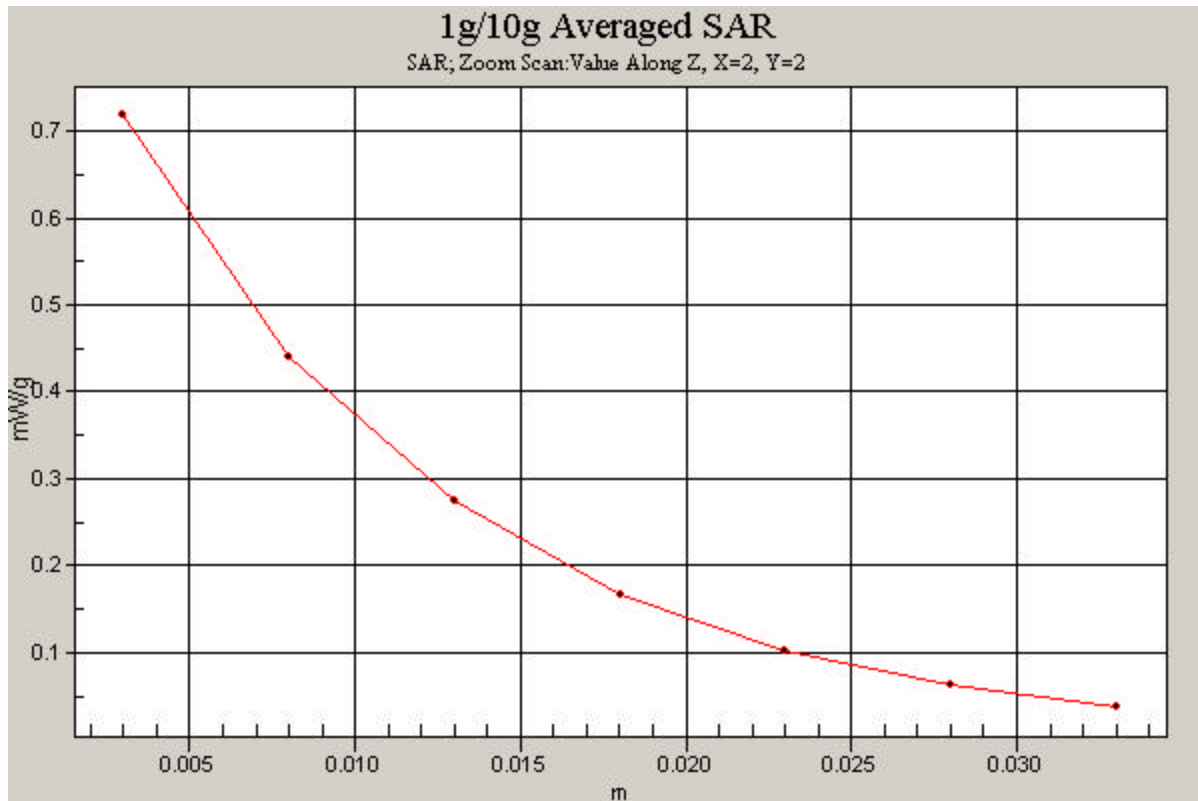

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: Cellular/PCS CDMA Phone with Bluetooth, WLAN and EvDO; Serial: FE-140-C

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.94$ mho/m, $\epsilon_r = 54.63$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Distance

Test Date: 08-22-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.37, 6.37, 6.37); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WLAN 802.11 b, Body SAR, with Beltclip, Back side, Low.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.62 V/m

Peak SAR (extrapolated) = 0.047 W/kg

SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.012 mW/g

