

FCC Test Report

APPLICANT : Samsung Electronics Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : SAMSUNG
MODEL NAME : SCH-P709E
FCC ID : A3LSCHP709E
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Jan. 08, 2014 and testing was completed on Feb. 10, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2009 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu / Manager

Jones Tsai

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District,
Shenzhen, Guangdong, P.R.C.**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Feature of Equipment Under Test..... 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT..... 6

 1.6. Test Site 7

 1.7. Applied Standards 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode 8

 2.2. Connection Diagram of Test System 9

 2.3. Support Unit used in test configuration and system..... 9

 2.4. EUT Operation Test Setup 10

3. TEST RESULT..... 11

 3.1. Test of AC Conducted Emission Measurement 11

 3.2. Test of Radiated Emission Measurement 15

4. LIST OF MEASURING EQUIPMENT 19

5. UNCERTAINTY OF EVALUATION 20

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 13.30 dB at 0.190 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 9.50 dB at 832.190 MHz

1. General Description

1.1. Applicant

Samsung Electronics Co., Ltd.

A3 Building, No.185 Kexue Avenue, Science City, Guang Zhou, PRC

1.2. Manufacturer

Samsung Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-city, Gyeonggi-do, 443-742, Korea

1.3. Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	SAMSUNG
Model Name	SCH-P709E
FCC ID	A3LSCHP709E
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 10 , EGPRS Class 10
WCDMA Operating Band(s)	FDDI/FDDII/FDDV
Wi-Fi Specification	802.11b/g/n (HT20) 802.11a/n (HT20/HT40)
Bluetooth Version	Bluetooth v3.0+EDR, Bluetooth v4.0 LE
NFC Specification	Type A/B
HW Version	P709E.03
SW Version	P709EKEUAMK1
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz ; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 871.4 MHz ~ 891.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz ; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz NFC : 13.56 MHz
Antenna Type	WWAN : LDS Antenna WLAN : FPCB Antenna Bluetooth : FPCB Antenna GPS: FPCB Antenna NFC: FPCB LOOP Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth 4.0 - LE : GFSK Bluetooth 3.0 EDR : GFSK, $\pi/4$ -DQPSK, 8-DPSK GPS : BPSK NFC: ASK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-SZ	03CH01-SZ	831040

1.7. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2009

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition	
		EMI AC	EMI RE
1.	Data application transferred mode (EUT connected with notebook)	☒	☒


Abbreviations:

- EMI AC: AC conducted emission
- EMI RE: EUT radiated emission

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC On + GPS Rx + USB Cable (Data Link with Notebook) + Earphone + SIM 1
Radiated Emission	1	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC On + GPS Rx + USB Cable (Data Link with Notebook) + Earphone + SIM 1

Remark: Link with Notebook means data application transferred mode between EUT and Notebook.

2.2. Connection Diagram of Test System

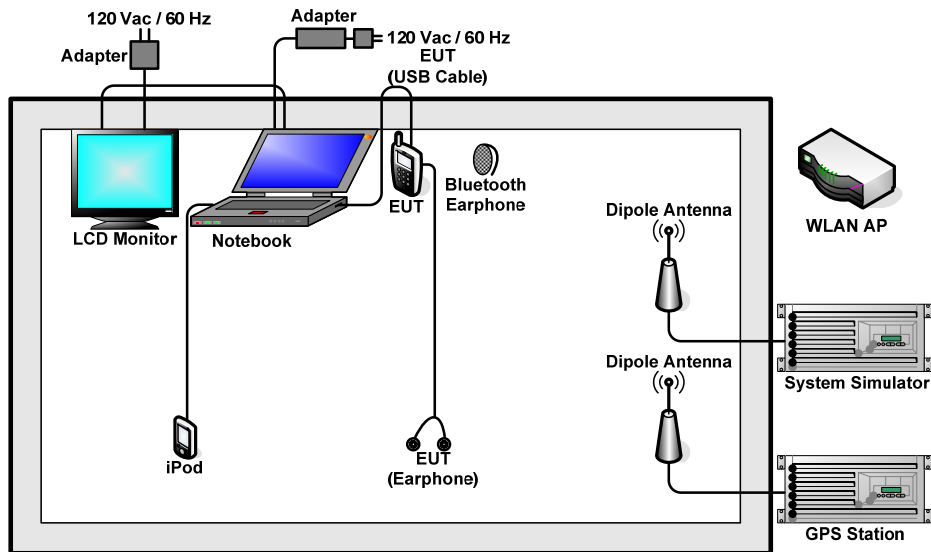

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-815	KA2DIR815A1	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
4.	GPS Station	Adivic	MP9000	N/A	N/A	Unshielded, 1.8 m
5.	LCD Monitor	DELL	IN1940MWb	FCC DoC	Shielded, 1.6m	Unshielded, 1.8m
6.	iPod nano 8GB	Apple	MC690ZP/A	FCC DoC	Shielded, 1.2 m	N/A
7.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.4. EUT Operation Test Setup

The EUT was in GSM idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Laptop and EUT via USB cable.
2. Execute "GPS Test" to make the EUT receive continuous signals from GPS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Henry Chen	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC On + GPS Rx + USB Cable (Data Link with Notebook) + Earphone + SIM 1		

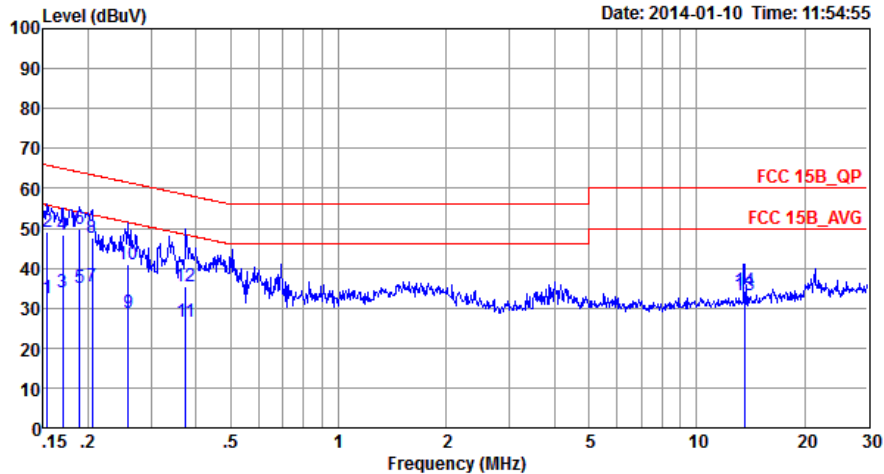


Site : C001-SZ
 Condition: FCC 15B_QP LISN_L_20130328 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	32.61	-23.17	55.78	22.20	0.06	10.35	Average
2	0.15	48.91	-16.87	65.78	38.50	0.06	10.35	QP
3	0.17	34.00	-20.94	54.94	23.61	0.06	10.33	Average
4	0.17	48.40	-16.54	64.94	38.01	0.06	10.33	QP
5	0.19	34.97	-19.09	54.06	24.59	0.07	10.31	Average
6 *	0.19	49.87	-14.19	64.06	39.49	0.07	10.31	QP
7	0.21	35.56	-17.84	53.40	25.20	0.07	10.29	Average
8	0.21	47.46	-15.94	63.40	37.10	0.07	10.29	QP
9	0.26	28.72	-22.75	51.47	18.40	0.09	10.23	Average
10	0.26	40.92	-20.55	61.47	30.60	0.09	10.23	QP
11	0.38	26.60	-21.79	48.39	16.30	0.12	10.18	Average
12	0.38	35.50	-22.89	58.39	25.20	0.12	10.18	QP
13	13.62	33.34	-16.66	50.00	22.00	0.86	10.48	Average
14	13.62	34.34	-25.66	60.00	23.00	0.86	10.48	QP



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Henry Chen	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC On + GPS Rx + USB Cable (Data Link with Notebook) + Earphone + SIM 1		

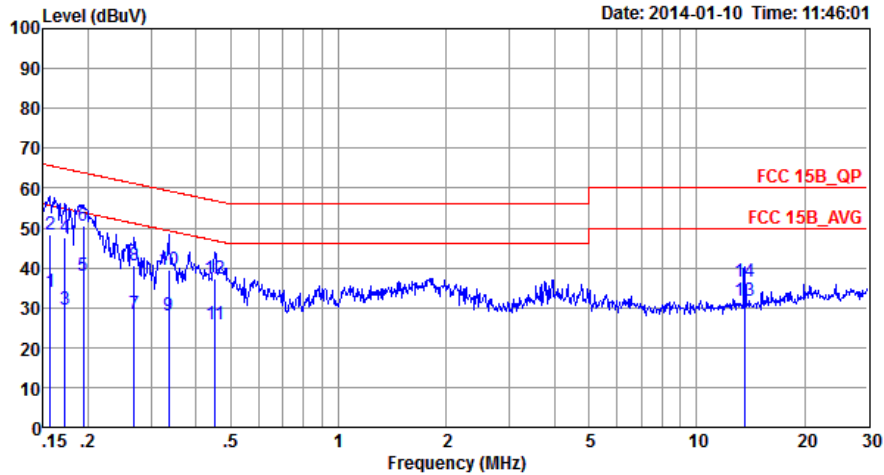

Site : C001-SZ
 Condition: FCC 15B QP LISN N_20130328 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	34.09	-21.56	55.65	23.70	0.04	10.35	Average
2	0.16	48.39	-17.26	65.65	38.00	0.04	10.35	QP
3	0.17	29.67	-25.19	54.86	19.30	0.04	10.33	Average
4	0.17	47.47	-17.39	64.86	37.10	0.04	10.33	QP
5	0.19	38.14	-15.70	53.84	27.80	0.04	10.30	Average
6 *	0.19	50.54	-13.30	63.84	40.20	0.04	10.30	QP
7	0.27	28.27	-22.89	51.16	18.00	0.04	10.23	Average
8	0.27	40.47	-20.69	61.16	30.20	0.04	10.23	QP
9	0.34	28.03	-21.28	49.31	17.80	0.04	10.19	Average
10	0.34	39.43	-19.88	59.31	29.20	0.04	10.19	QP
11	0.45	25.90	-20.95	46.85	15.70	0.04	10.16	Average
12	0.45	37.20	-19.65	56.85	27.00	0.04	10.16	QP
13	13.62	31.76	-18.24	50.00	20.80	0.48	10.48	Average
14	13.62	36.56	-23.44	60.00	25.60	0.48	10.48	QP

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

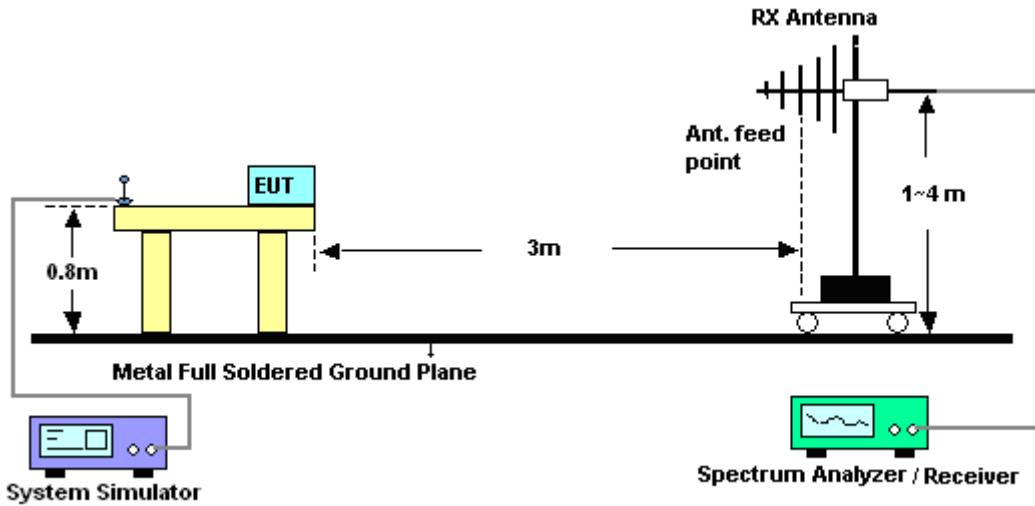


For radiated emissions above 1GHz

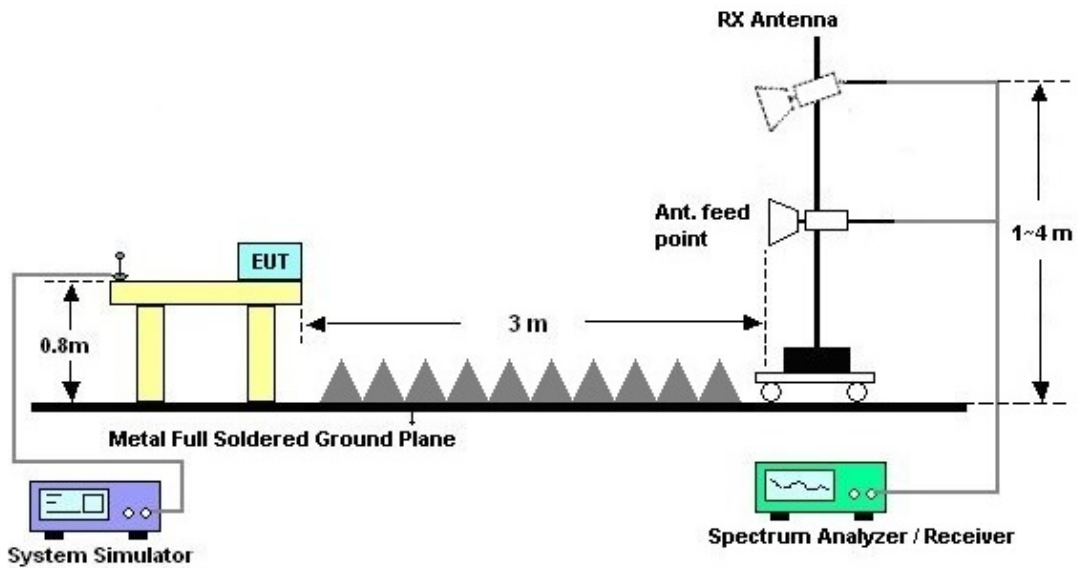



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	24~26°C
Test Engineer :	Robin Luo	Relative Humidity :	49~50%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC On + GPS Rx + USB Cable (Data Link with Notebook) + Earphone + SIM 1		
Remark :	#6 is system simulator signal which can be ignored.		

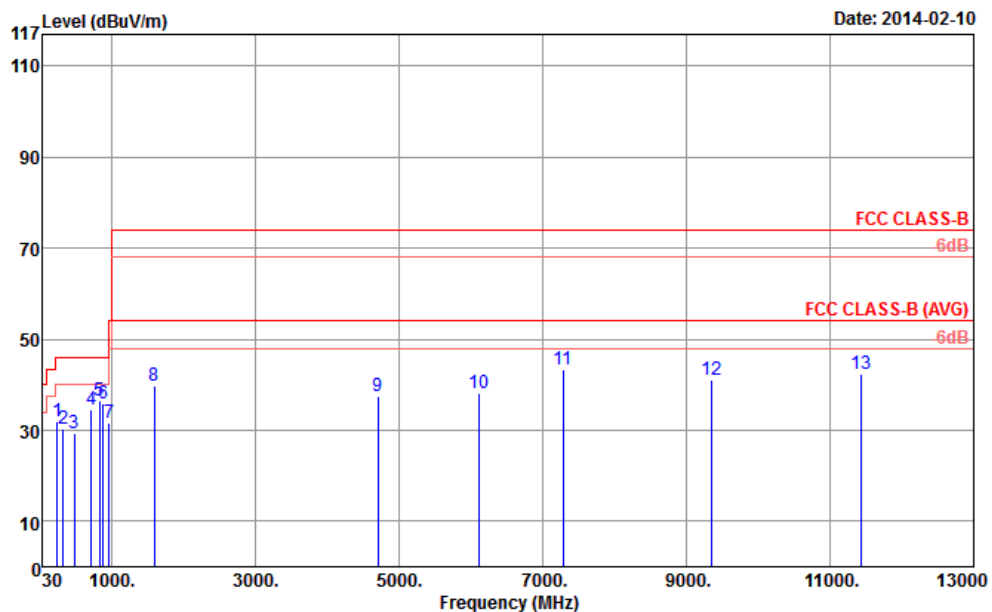


Site : 03CH01-SZ
 Condition : FCC CLASS-B 3m LF_ANT_140102 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	240.49	31.97	-14.03	46.00	48.26	12.09	1.82	30.20	---	---	Peak
2	321.00	30.39	-15.61	46.00	43.98	14.27	2.07	29.93	---	---	Peak
3	480.08	29.45	-16.55	46.00	39.57	16.80	2.48	29.40	---	---	Peak
4	719.67	34.66	-11.34	46.00	41.13	19.58	2.99	29.04	---	---	Peak
5 P	832.19	36.50	-9.50	46.00	41.61	20.50	3.28	28.89	100	360	Peak
6	881.40	35.79			40.57	20.76	3.29	28.83	---	---	Peak
7	960.23	31.48	-22.52	54.00	35.47	21.30	3.43	28.72	---	---	Peak
8	1588.00	39.75	-34.25	74.00	64.64	27.76	4.49	57.14	---	---	Peak
9	4704.00	37.34	-36.66	74.00	53.02	33.56	8.23	57.47	---	---	Peak
10	6110.00	37.99	-36.01	74.00	50.65	34.00	9.37	56.03	---	---	Peak
11	7280.00	43.31	-30.69	74.00	56.66	33.87	9.98	57.20	---	---	Peak
12	9350.00	40.96	-33.04	74.00	48.82	36.33	11.58	55.77	---	---	Peak
13	11436.00	42.41	-31.59	74.00	47.79	37.69	13.38	56.45	---	---	Peak



Test Mode :	Mode 1	Temperature :	24~26°C
Test Engineer :	Robin Luo	Relative Humidity :	49~50%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC On + GPS Rx + USB Cable (Data Link with Notebook) + Earphone + SIM 1		
Remark :	#6 is system simulator signal which can be ignored.		

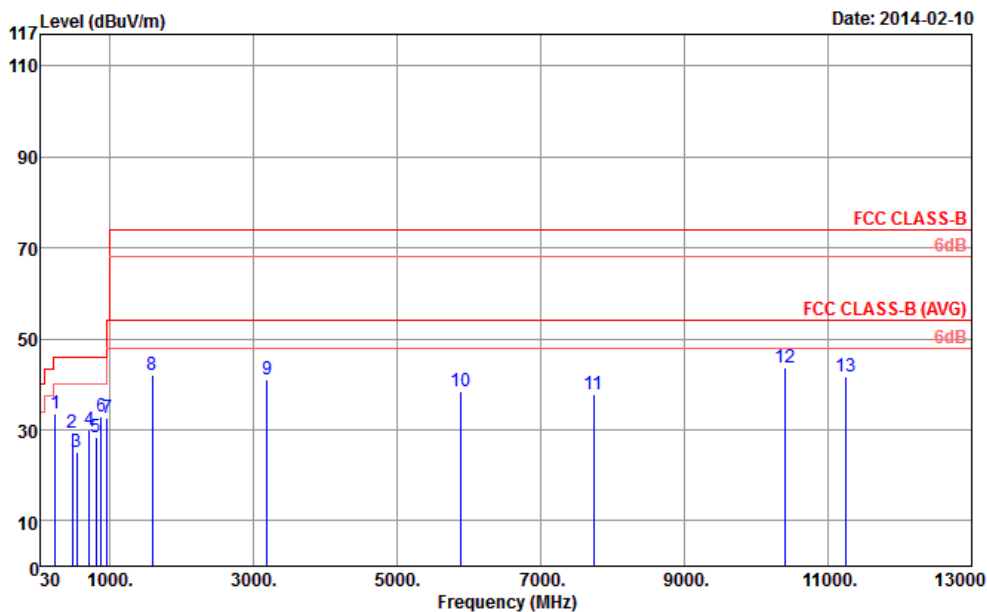

Site : 03CH01-SZ
 Condition : FCC CLASS-B 3m LF_ANT_140102 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 P	239.52	33.72	-12.28	46.00	50.00	12.10	1.82	30.20	100	0	Peak
2	480.08	29.33	-16.67	46.00	39.45	16.80	2.48	29.40	---	---	Peak
3	538.28	25.20	-20.80	46.00	34.17	17.68	2.63	29.28	---	---	Peak
4	719.67	29.82	-16.18	46.00	36.29	19.58	2.99	29.04	---	---	Peak
5	809.88	28.37	-17.63	46.00	33.60	20.50	3.19	28.92	---	---	Peak
6	881.40	32.86			37.64	20.76	3.29	28.83	---	---	Peak
7	960.23	32.68	-21.32	54.00	36.67	21.30	3.43	28.72	---	---	Peak
8	1594.00	42.00	-32.00	74.00	66.89	27.76	4.49	57.14	---	---	Peak
9	3192.00	40.92	-33.08	74.00	58.60	33.04	6.57	57.29	---	---	Peak
10	5876.00	38.37	-35.63	74.00	51.14	34.00	9.19	55.96	---	---	Peak
11	7740.00	37.94	-36.06	74.00	49.79	34.42	10.36	56.63	---	---	Peak
12	10392.00	43.69	-30.31	74.00	50.96	36.77	12.86	56.90	---	---	Peak
13	11238.00	41.55	-32.45	74.00	47.46	37.37	13.31	56.59	---	---	Peak

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
ESCIO Test Receiver	R&S	ESCI	100724	9kHz~3GHz	Mar. 29, 2013	Jan. 10, 2014	Mar. 28, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 28, 2013	Jan. 10, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 28, 2013	Jan. 10, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000089 1	100Vac~250Vac	Dec. 17, 2013	Jan. 10, 2014	Dec. 16, 2014	Conduction (CO01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	Apr. 04, 2013	Feb. 10, 2014	Apr. 03, 2014	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Dec. 25, 2013	Feb. 10, 2014	Dec. 24, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Feb. 10, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz Gain 30db	Mar. 29, 2013	Feb. 10, 2014	Mar. 28, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 29, 2013	Feb. 10, 2014	Mar. 28, 2014	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Feb. 10, 2014	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Feb. 10, 2014	NCR	Radiation (03CH01-SZ)

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.31
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.90
---	------