

6.4 Peak Power Spectral Density – 802.11a/n/ac §15.407 (a)(1)(2),(5) / RSS-210 [A9.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 v01r03, was used to measure the power spectral density.

In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 4dBm/MHz.

In the 5.25 – 5.35GHz and the 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

Test Procedure Used

KDB 789033 v01r03 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run since the EUT was operating at a duty cycle $\geq 98\%$
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

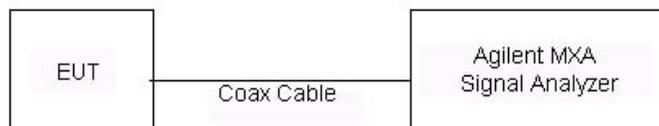


Figure 6-3. Test Instrument & Measurement Setup

Test Notes


None

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 30 of 76 | |


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm] | Max Permissible Power Density [dBm/MHz] | Margin [dB] |
|----------|-----------------|-------------|-------------|------------------|------------------------------|---|-------------|
| Band I | 5180 | 36 | a | 6 | -4.286 | 4.0 | -8.29 |
| | 5200 | 40 | a | 6 | -3.903 | 4.0 | -7.90 |
| | 5240 | 48 | a | 6 | -4.134 | 4.0 | -8.13 |
| | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | -4.379 | 4.0 | -8.38 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | -3.899 | 4.0 | -7.90 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | -4.653 | 4.0 | -8.65 |
| | 5190 | 38 | n (40MHz) | 13.5/15 (MCS0) | -7.269 | 4.0 | -11.27 |
| | 5230 | 46 | n (40MHz) | 13.5/15 (MCS0) | -7.078 | 4.0 | -11.08 |
| | 5210 | 42 | ac (80MHz) | 29.3/32.5 (MCS0) | -8.433 | 4.0 | -12.43 |
| Band II | 5260 | 52 | a | 6 | -3.872 | 11.0 | -14.87 |
| | 5280 | 56 | a | 6 | -4.135 | 11.0 | -15.14 |
| | 5320 | 64 | a | 6 | -3.538 | 11.0 | -14.54 |
| | 5260 | 52 | n (20MHz) | 6.5/7.2 (MCS0) | -4.167 | 11.0 | -15.17 |
| | 5280 | 56 | n (20MHz) | 6.5/7.2 (MCS0) | -4.301 | 11.0 | -15.30 |
| | 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | -3.648 | 11.0 | -14.65 |
| | 5270 | 54 | n (40MHz) | 13.5/15 (MCS0) | -7.189 | 11.0 | -18.19 |
| | 5310 | 62 | n (40MHz) | 13.5/15 (MCS0) | -7.224 | 11.0 | -18.22 |
| | 5290 | 58 | ac (80MHz) | 29.3/32.5 (MCS0) | -9.792 | 11.0 | -20.79 |
| Band III | 5500 | 100 | a | 6 | -4.407 | 11.0 | -15.41 |
| | 5580 | 116 | a | 6 | -3.366 | 11.0 | -14.37 |
| | 5700 | 140 | a | 6 | -3.280 | 11.0 | -14.28 |
| | 5500 | 100 | n (20MHz) | 6.5/7.2 (MCS0) | -4.697 | 11.0 | -15.70 |
| | 5580 | 116 | n (20MHz) | 6.5/7.2 (MCS0) | -3.611 | 11.0 | -14.61 |
| | 5700 | 140 | n (20MHz) | 6.5/7.2 (MCS0) | -3.478 | 11.0 | -14.48 |
| | 5510 | 102 | n (40MHz) | 13.5/15 (MCS0) | -7.901 | 11.0 | -18.90 |
| | 5550 | 110 | n (40MHz) | 13.5/15 (MCS0) | -7.225 | 11.0 | -18.23 |
| | 5670 | 134 | n (40MHz) | 13.5/15 (MCS0) | -6.820 | 11.0 | -17.82 |
| | 5530 | 106 | ac (80MHz) | 29.3/32.5 (MCS0) | -9.262 | 11.0 | -20.26 |

Table 6-7. Conducted Power Spectral Density Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 31 of 76 | |

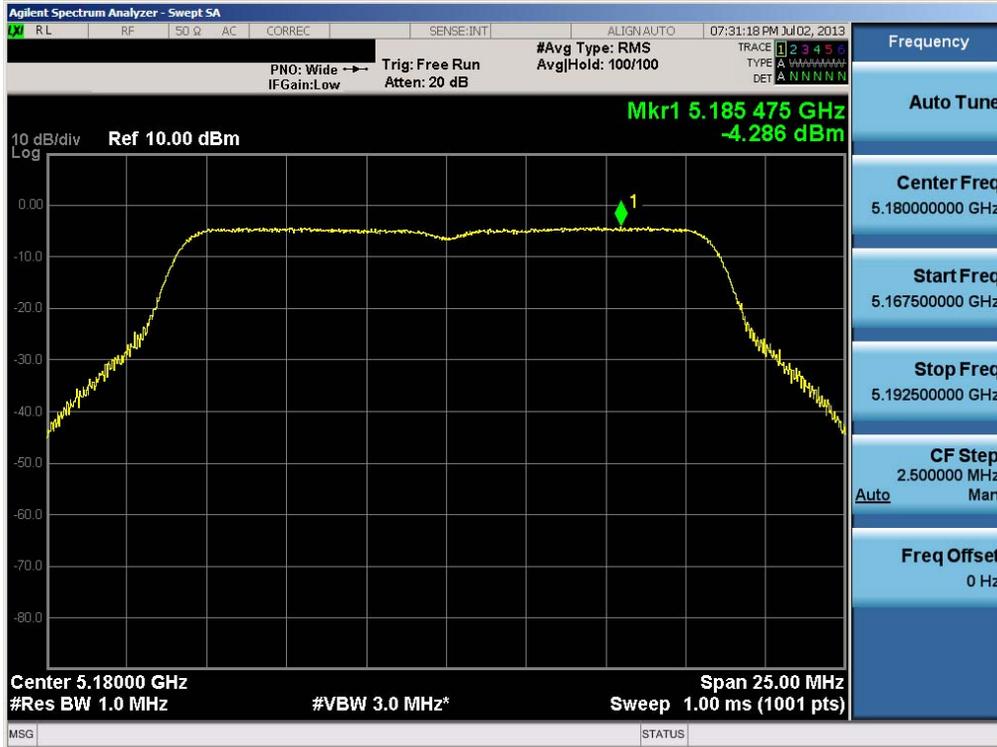


Plot 6-31. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

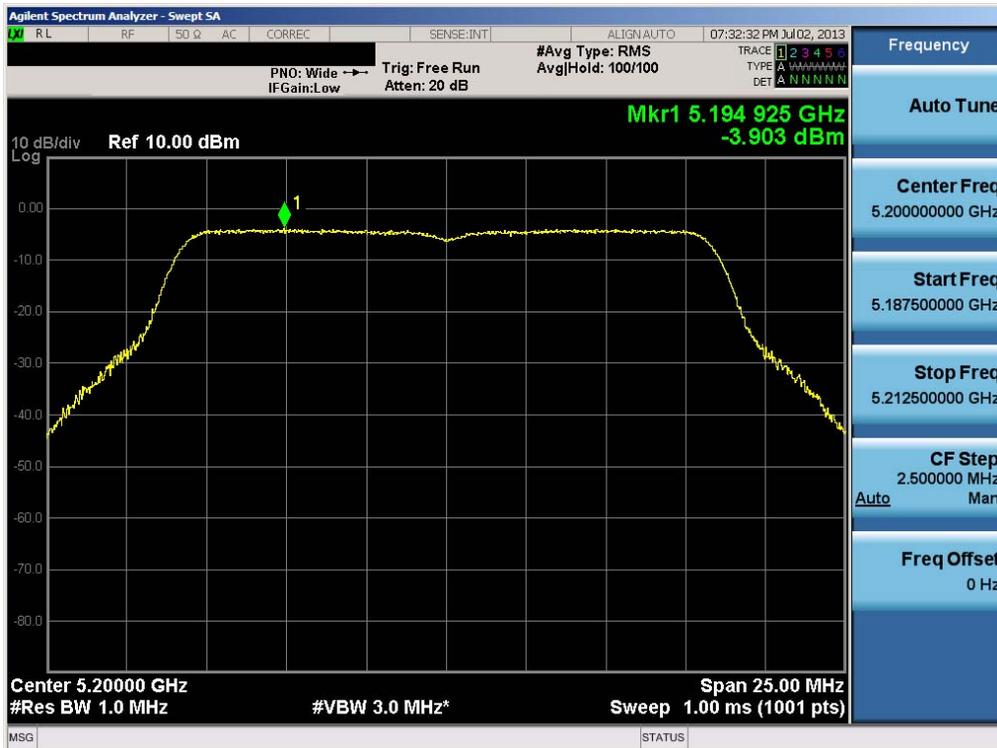


Plot 6-32. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 32 of 76 |

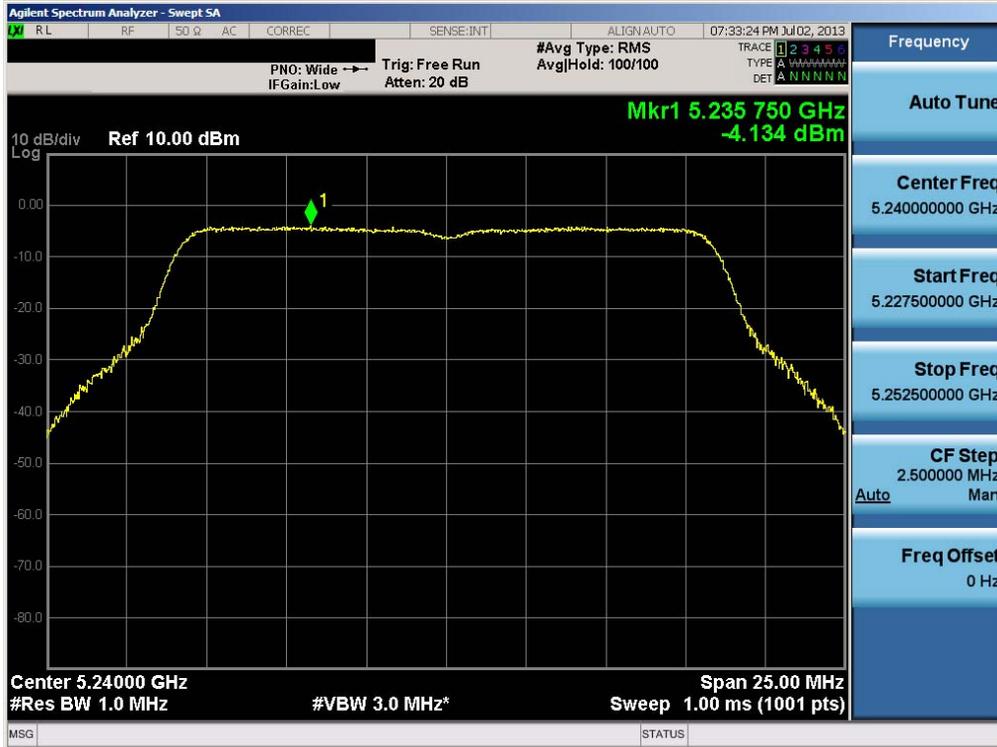


Plot 6-33. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

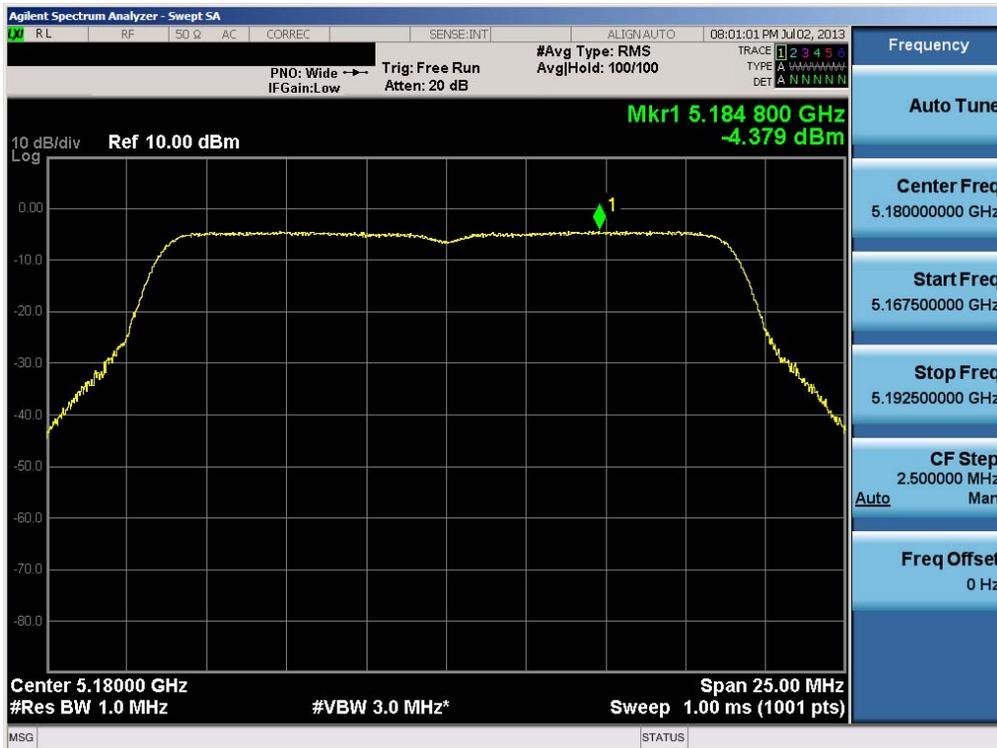


Plot 6-34. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 33 of 76 |

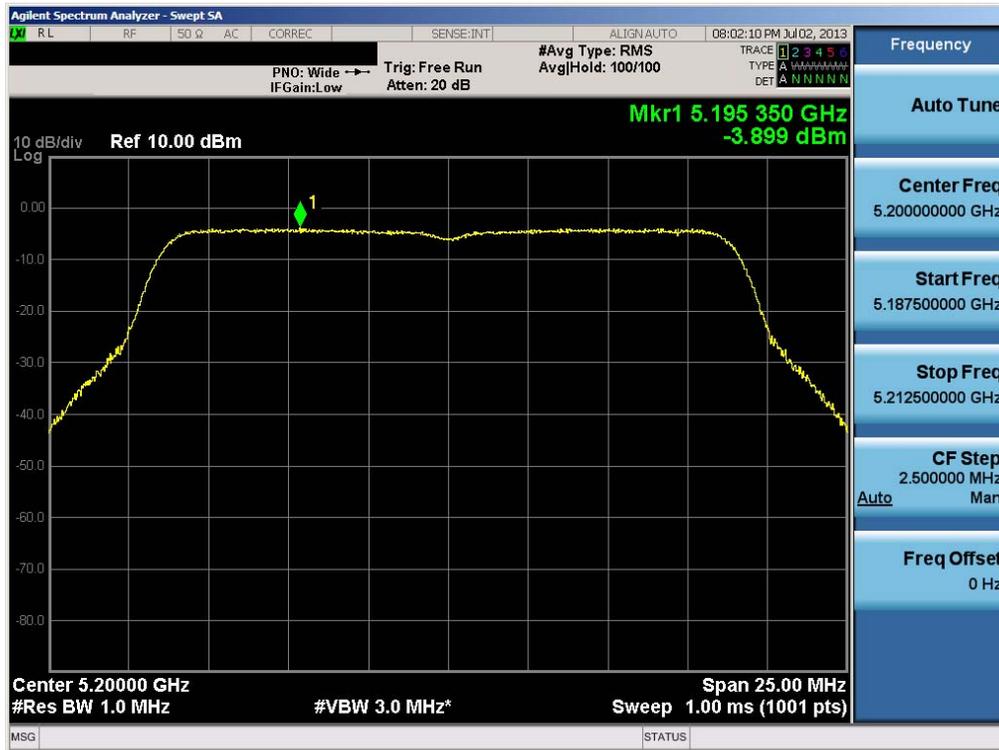


Plot 6-35. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

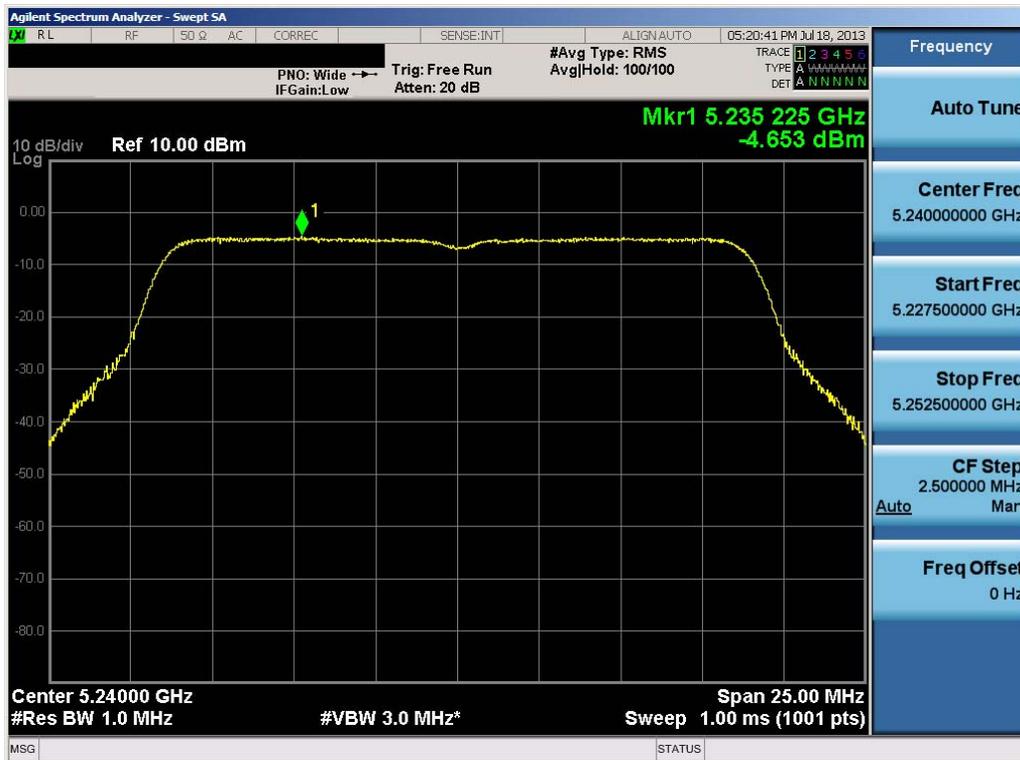


Plot 6-36. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

| | | | | |
|--------------------------------------|-------------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 34 of 76 |

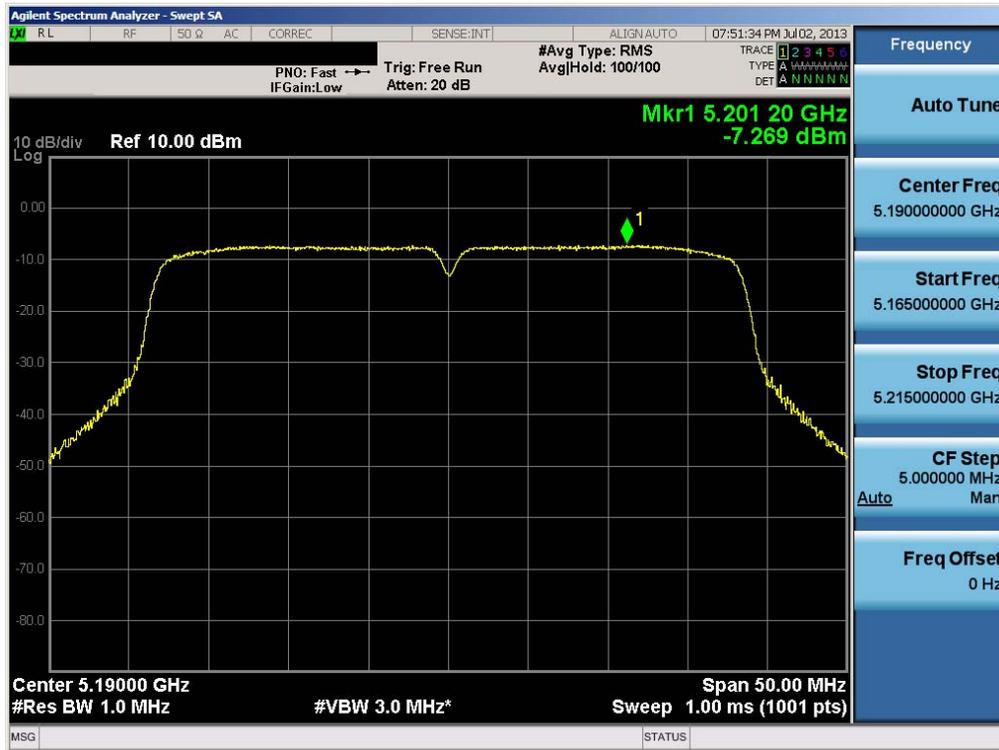


Plot 6-37. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

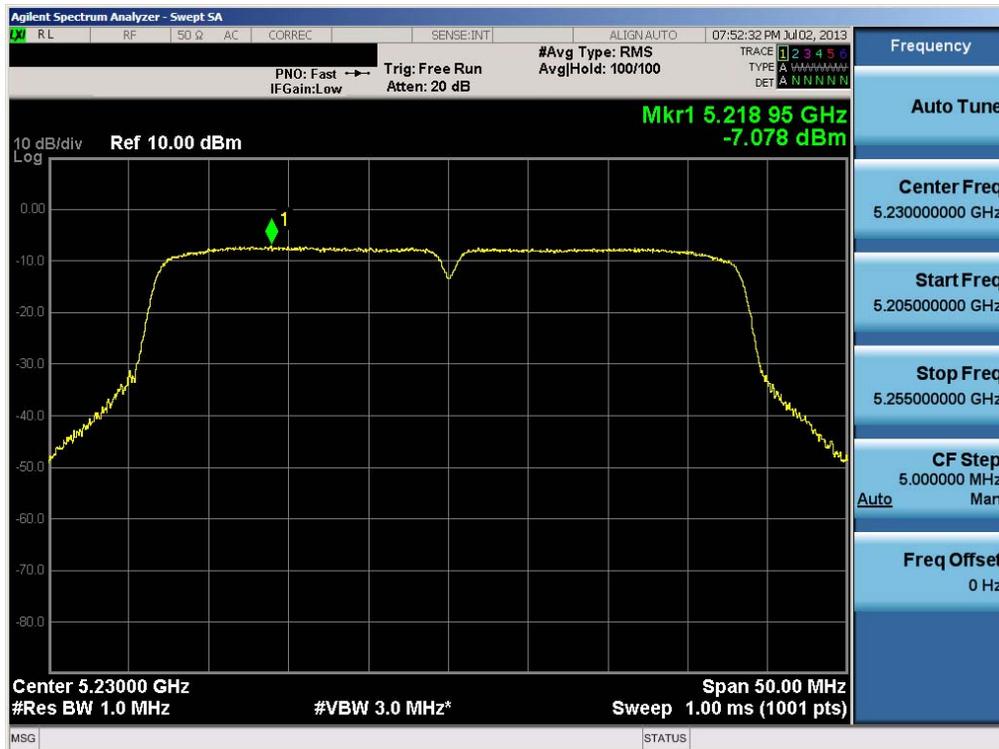

Plot 6-38. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

| | | | | |
|--------------------------------------|---|--|----------------|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 35 of 76 |

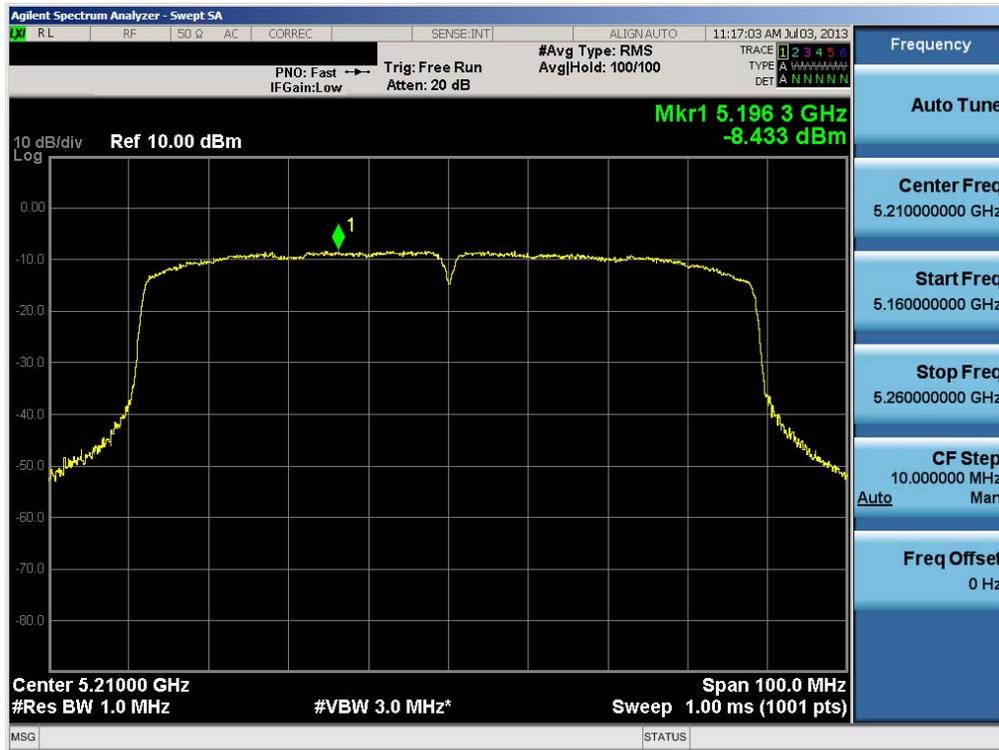


Plot 6-39. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)




Plot 6-40. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

| | | | | |
|--------------------------------------|---|--|----------------|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 36 of 76 |

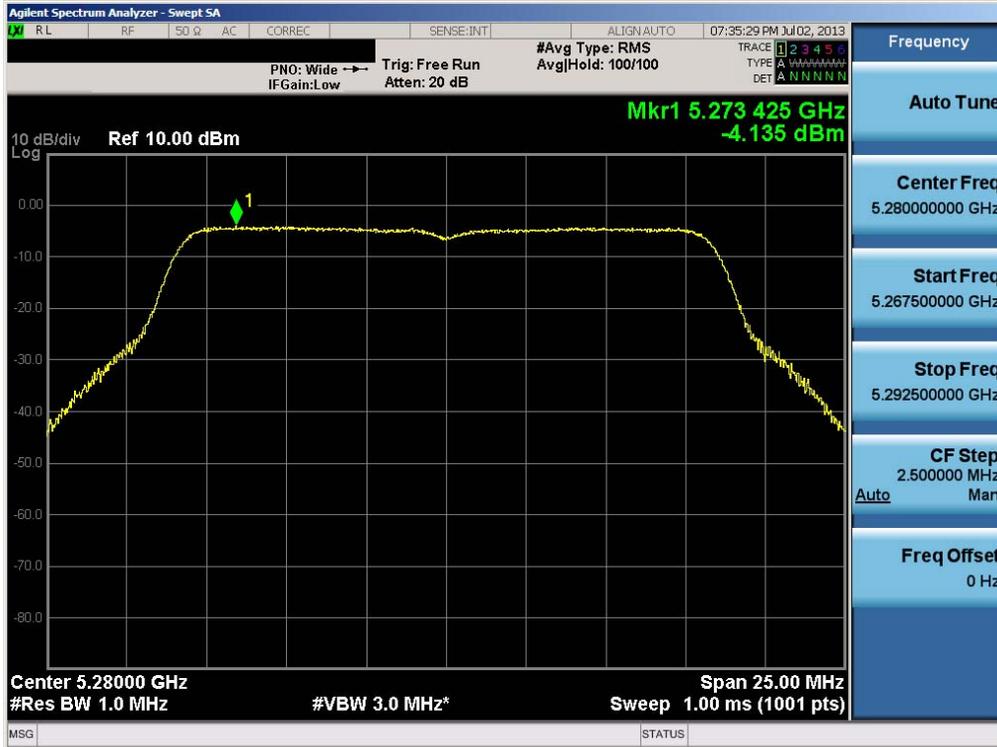


Plot 6-41. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

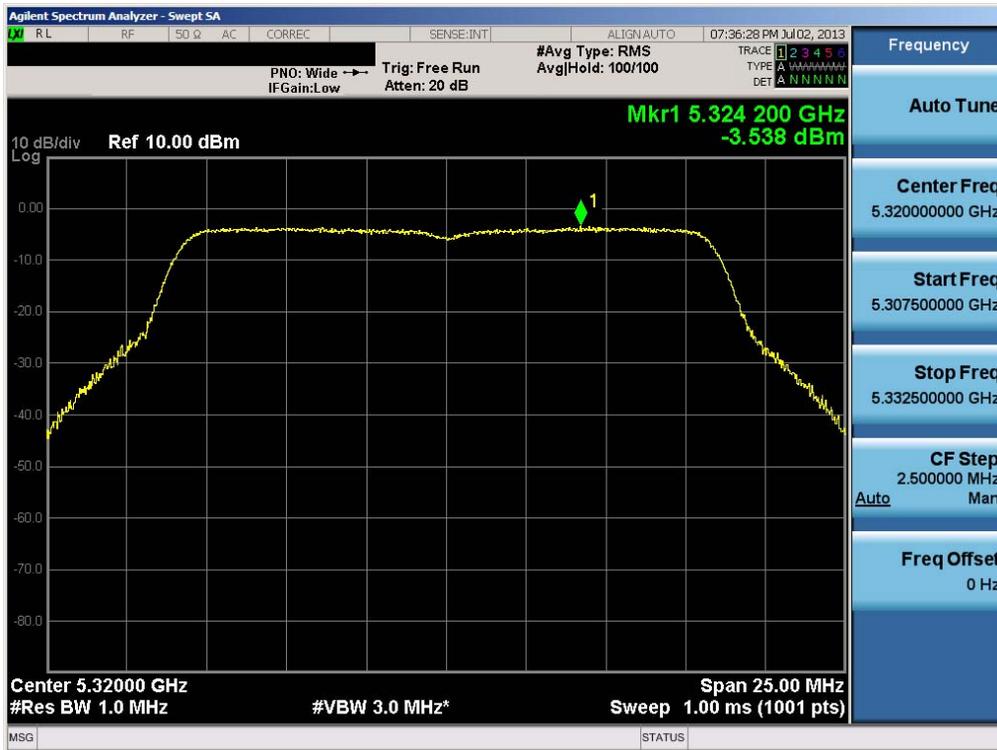


Plot 6-42. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 37 of 76 |

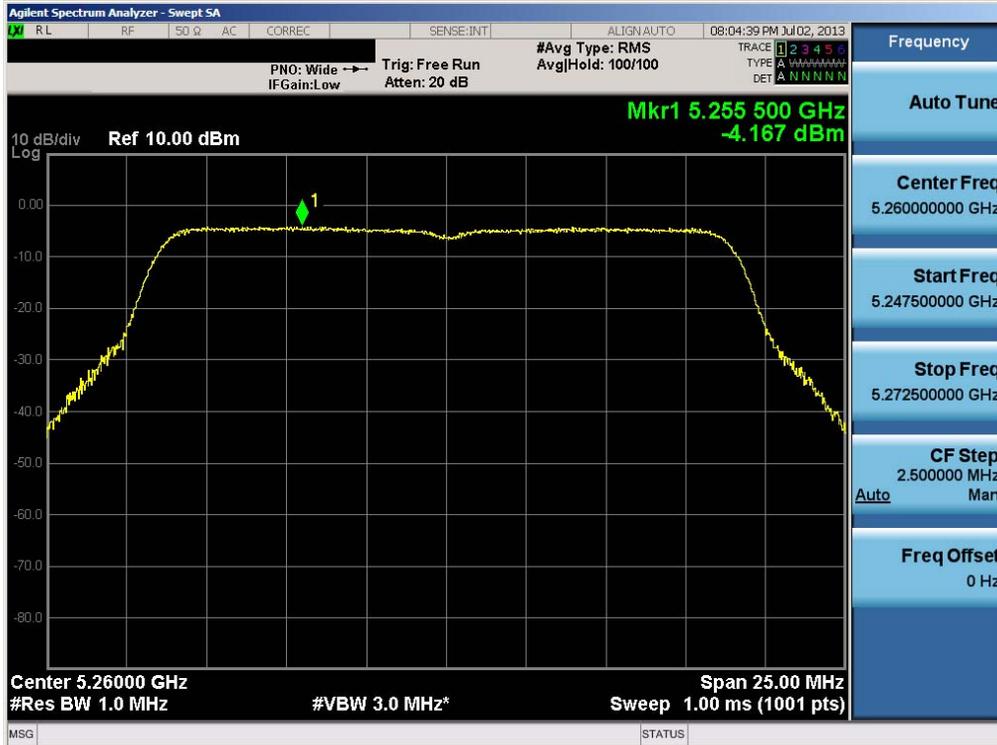


Plot 6-43. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

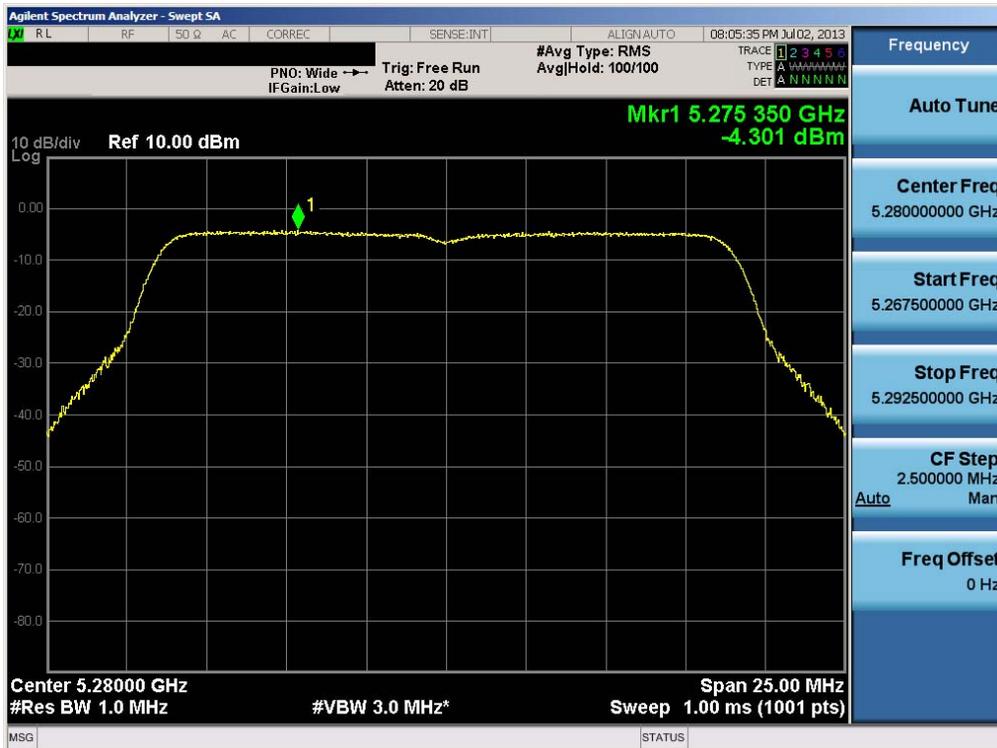


Plot 6-44. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 38 of 76 |

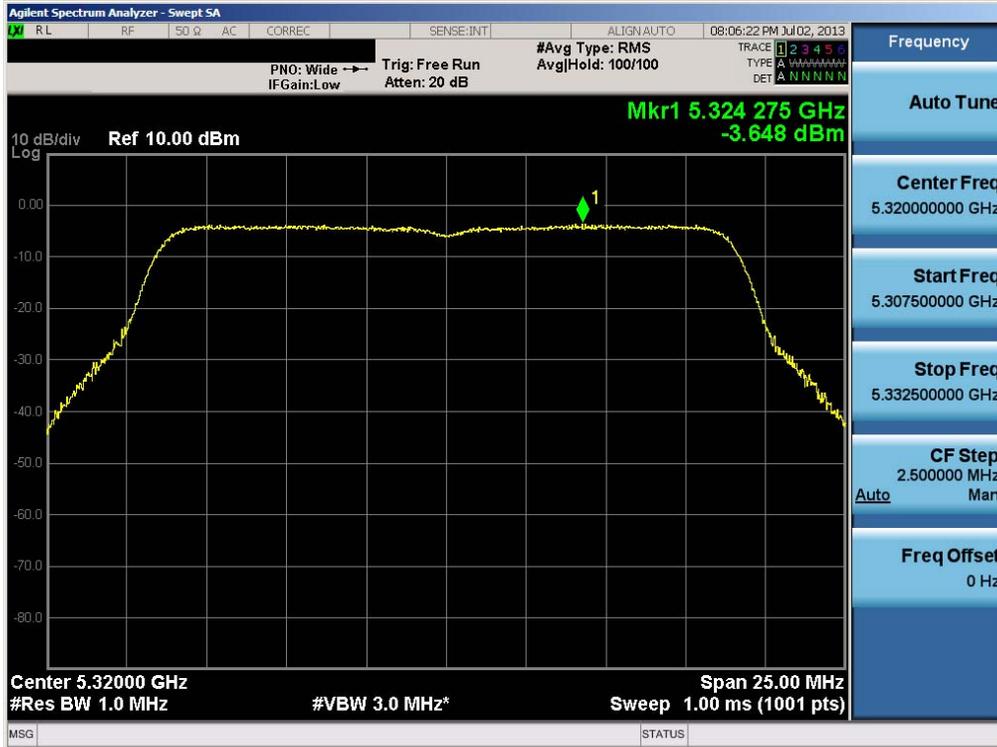


Plot 6-45. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

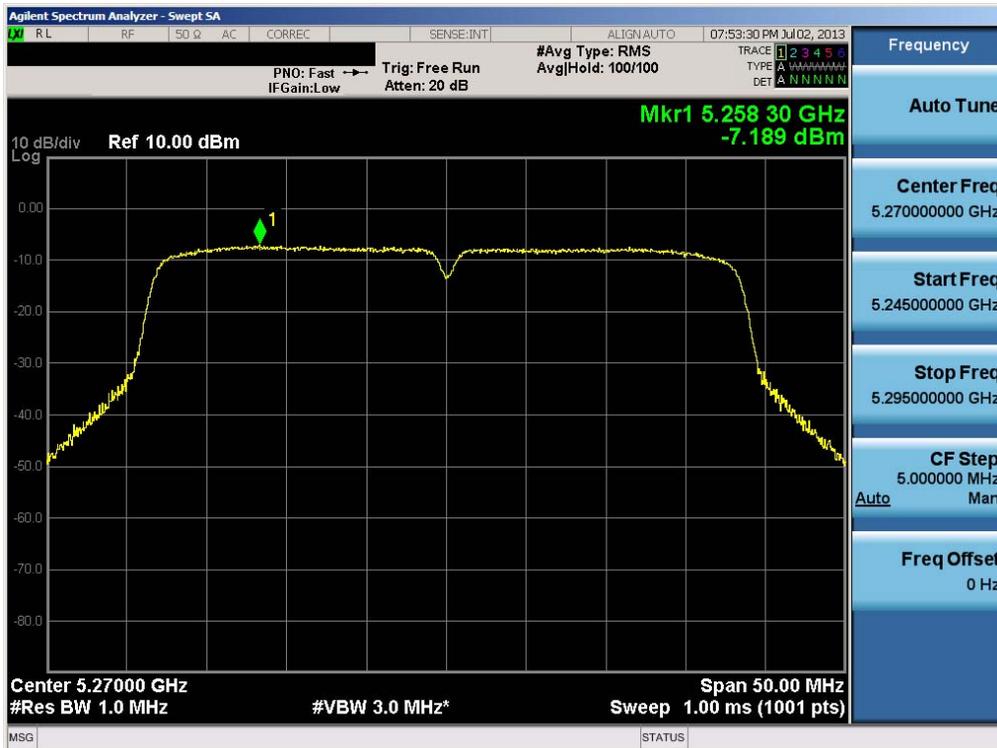


Plot 6-46. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

| | | | | |
|--------------------------------------|--------------------------------|--|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 39 of 76 |

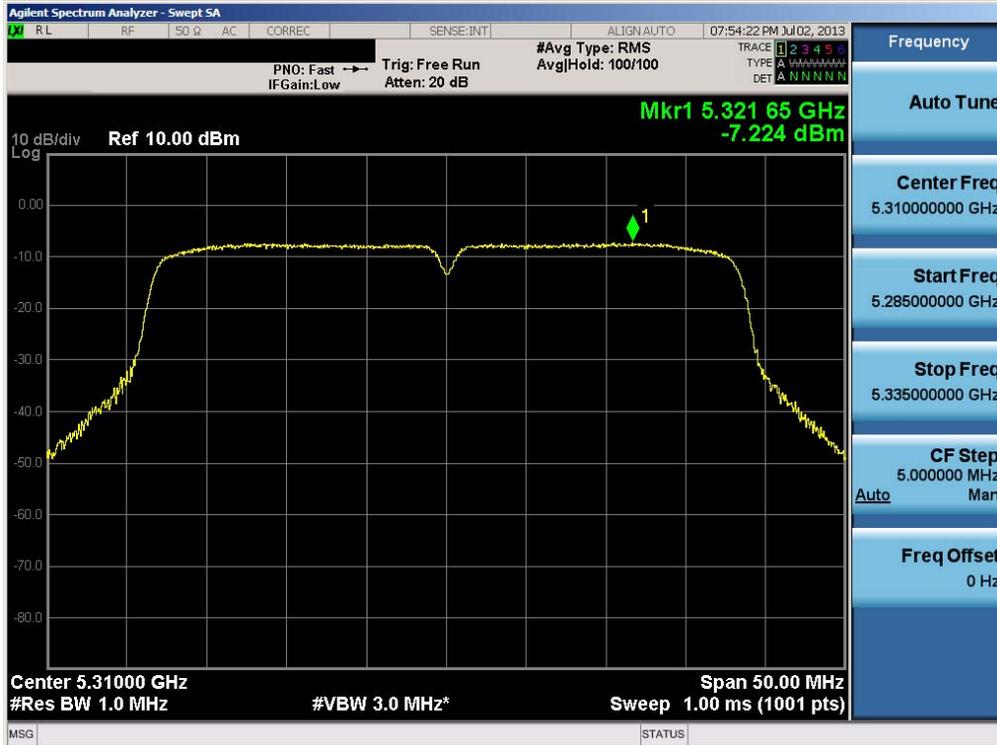


Plot 6-47. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

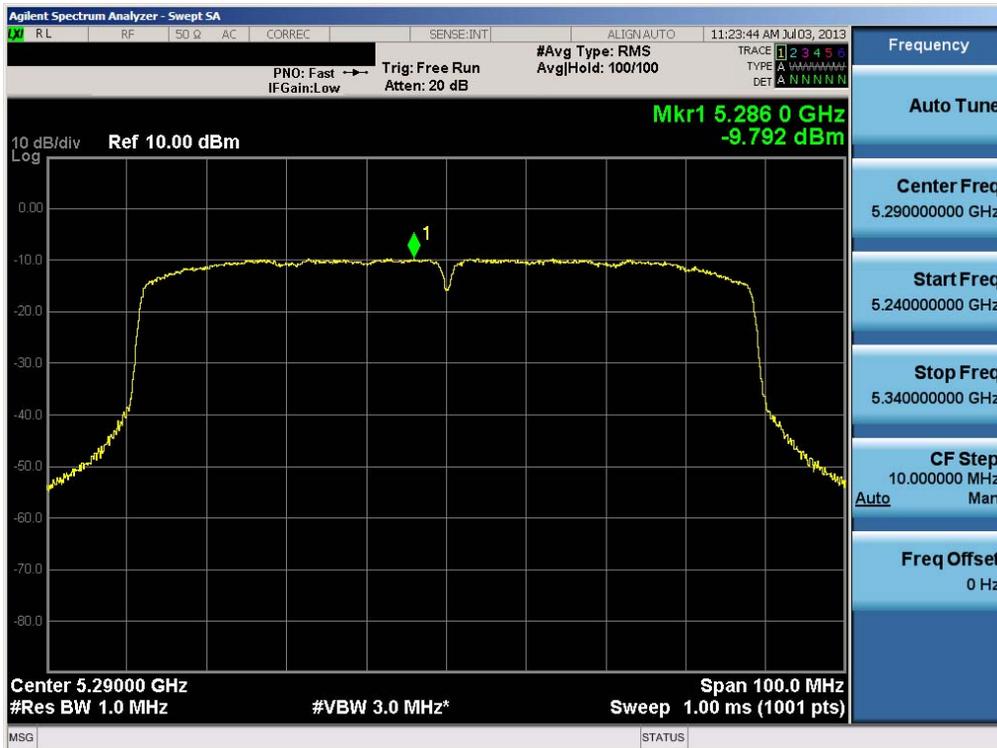


Plot 6-48. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2) – Ch. 58)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 40 of 76 |

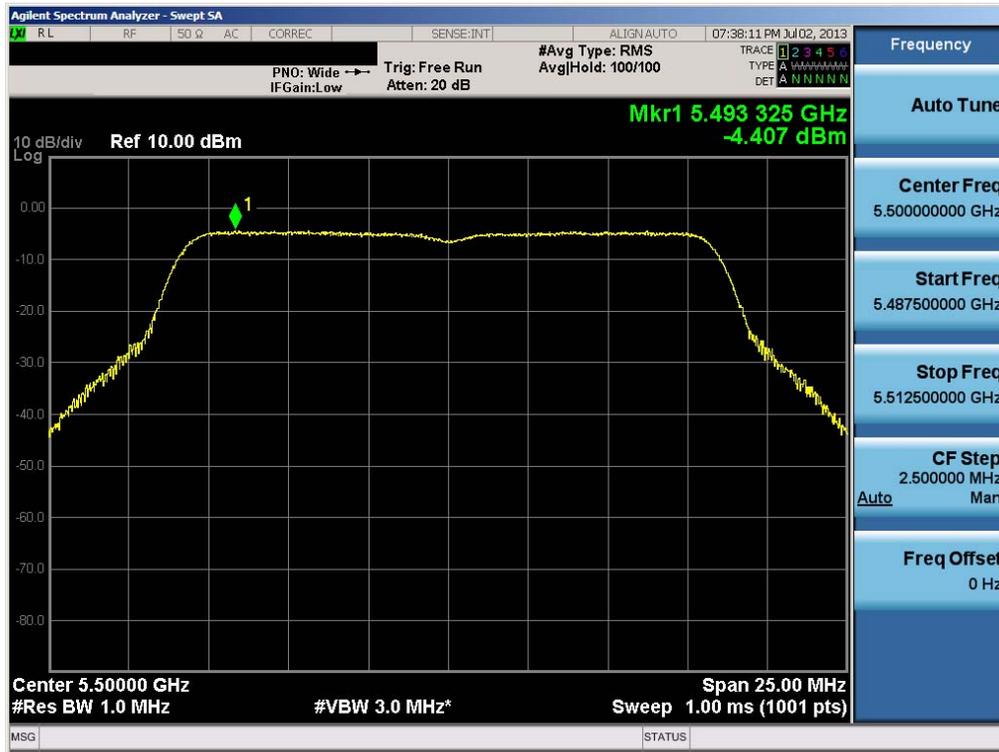

Plot 6-49. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)

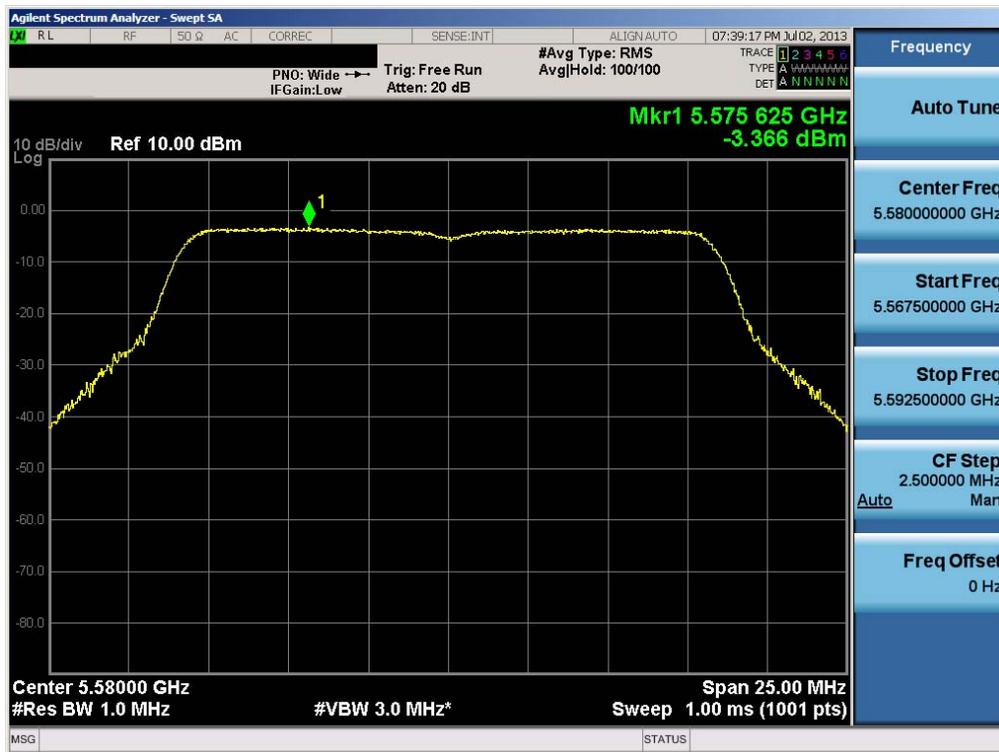


Plot 6-50. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 116)

| | | | | |
|--------------------------------------|-------------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 41 of 76 |




Plot 6-51. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 140)

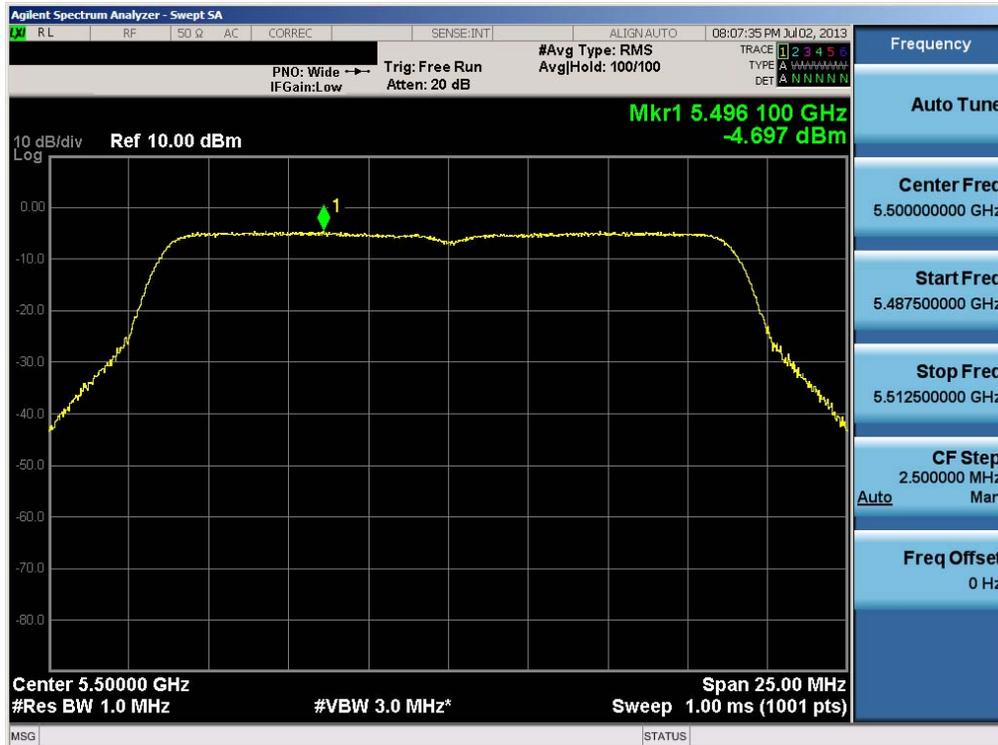

Plot 6-52. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

| | | | | |
|--------------------------------------|---|--|----------------|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 42 of 76 |

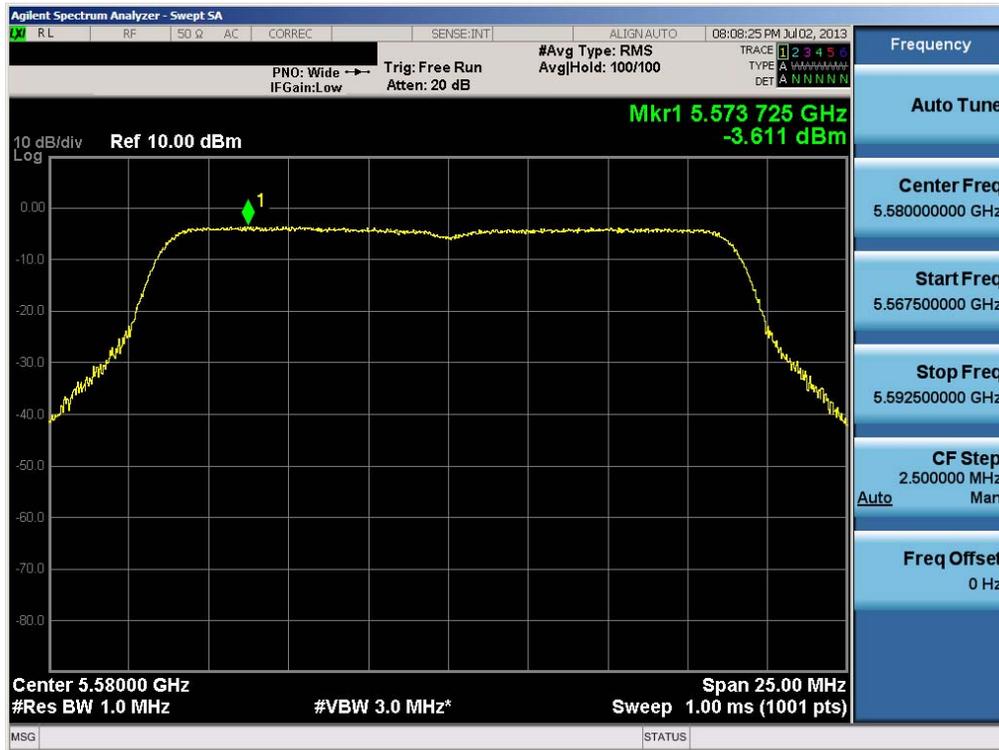


Plot 6-53. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)




Plot 6-54. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 43 of 76 |

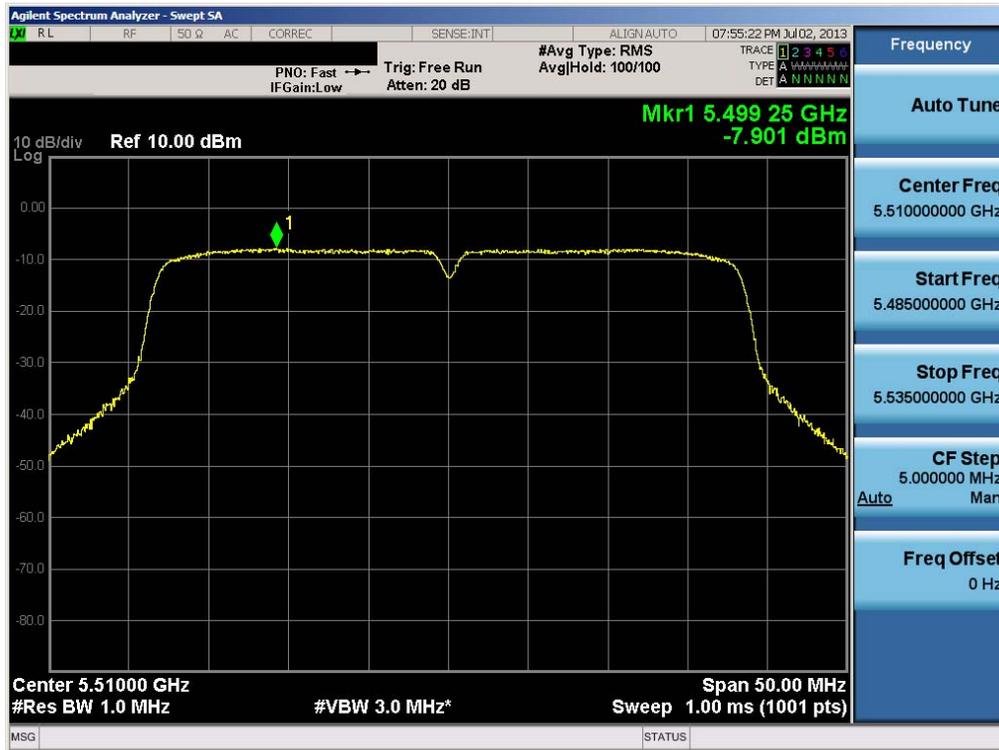


Plot 6-55. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

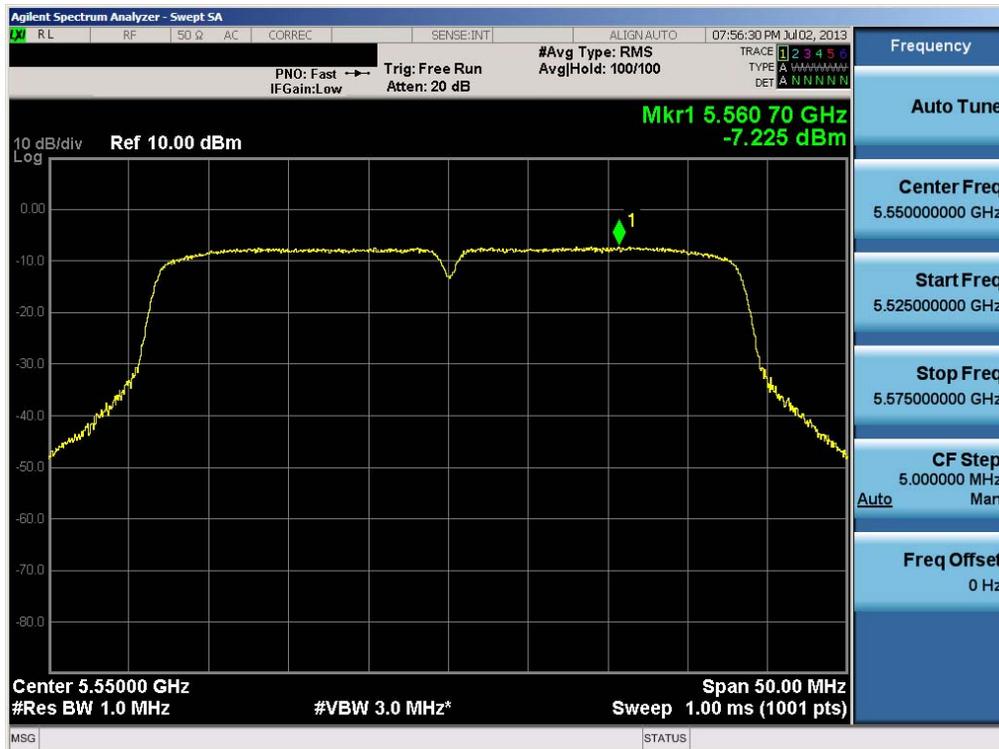


Plot 6-56. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

| | | | | |
|--------------------------------------|---|--|----------------|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 44 of 76 |

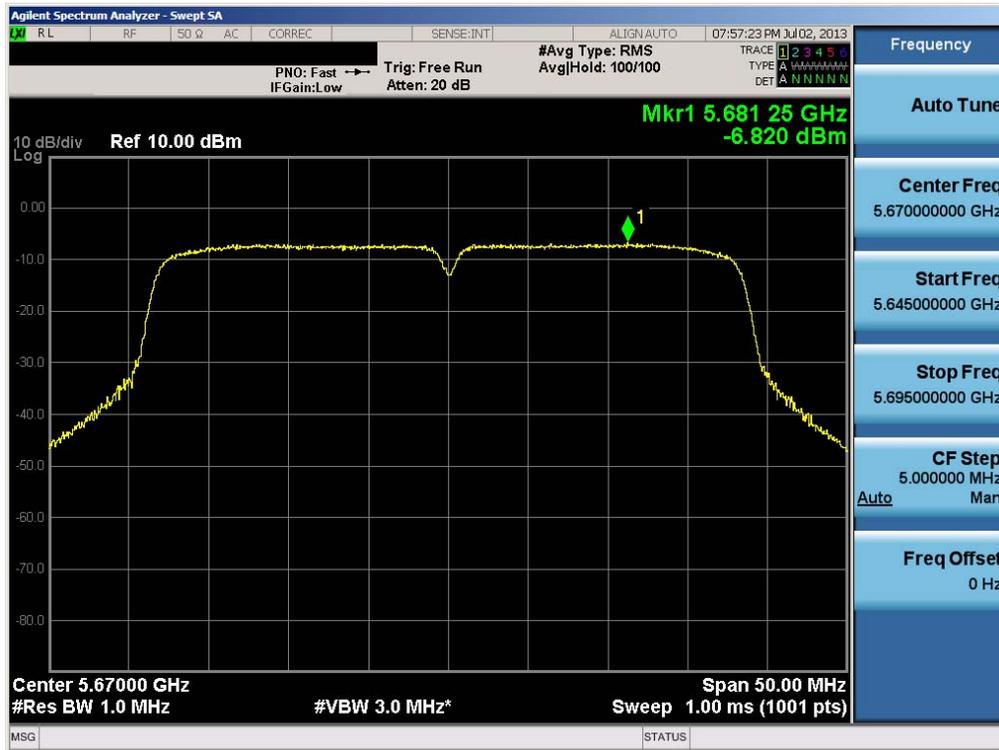

Plot 6-57. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

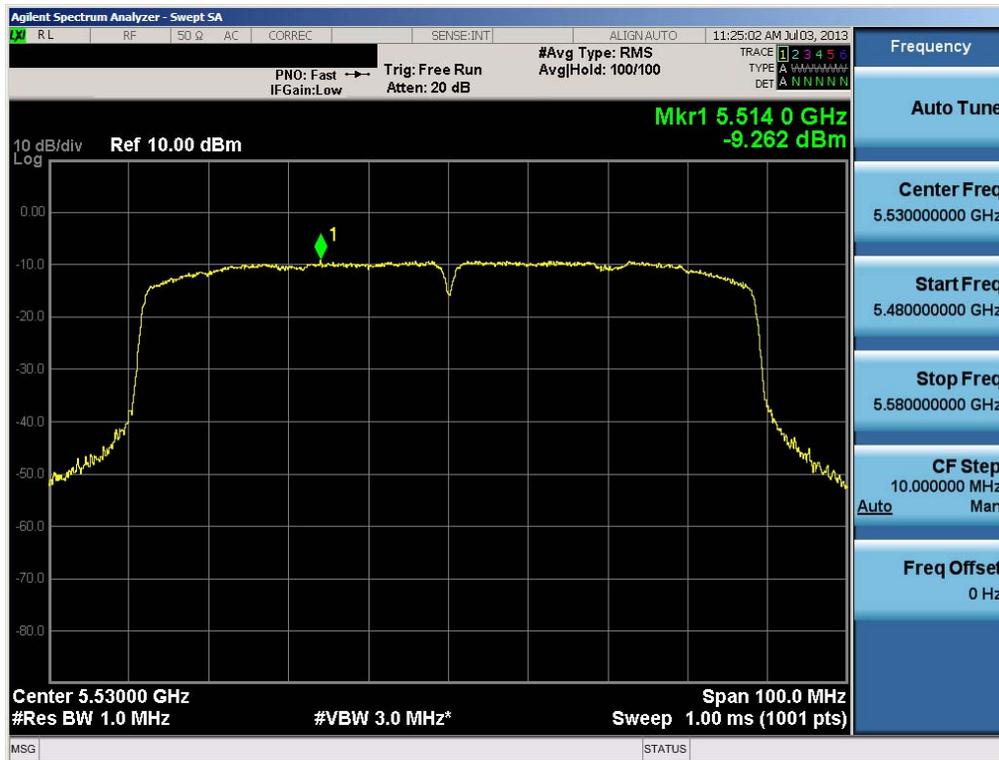

Plot 6-58. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 106)

| | | | | |
|--------------------------------------|--|--|--|---------------------------------|
| FCC ID: A3LSCHP729 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 45 of 76 |

6.5 Peak Excursion Ratio – 802.11a/n/ac §15.407(a)(6)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 v01r03, was used to capture the average trace used to make the peak excursion measurement.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum power spectral density is 13 dBm/MHz.

Test Procedure Used

KDB 789033 v01r03 – Section G

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum. This level was compared to the peak power density level found from the previous section to determine the peak excursion.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

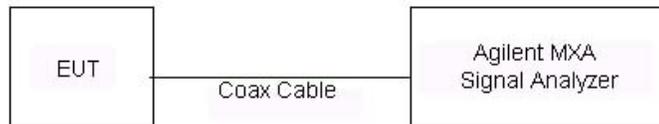


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

The peak excursion was investigated for all signal types, modulation types, channel bandwidths, and variations in signal parameters and the worst case data is shown below. Only the worst case modulation mode on a single channel among all bands is reported since that is sufficient to demonstrate compliance to the peak excursion requirement per KDB 789033 v01r03.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 46 of 76 | |

| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Peak Excursion Ratio [dBm] | Max Permissible Peak Excursion Ratio [dBm/MHz] | Margin [dB] |
|-----------------|-------------|-------------|------------------|-------------------------------------|--|-------------|
| 5280 | 56 | a | 6 | 8.91 | 13.0 | -4.09 |
| 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | 8.51 | 13.0 | -4.49 |
| 5190 | 38 | n (40MHz) | 13.5/15 (MCS0) | 9.23 | 13.0 | -3.77 |
| 5290 | 58 | ac (80MHz) | 29.3/32.5 (MCS0) | 8.49 | 13.0 | -4.51 |

Table 6-8. Conducted Peak Excursion Ratio Measurements

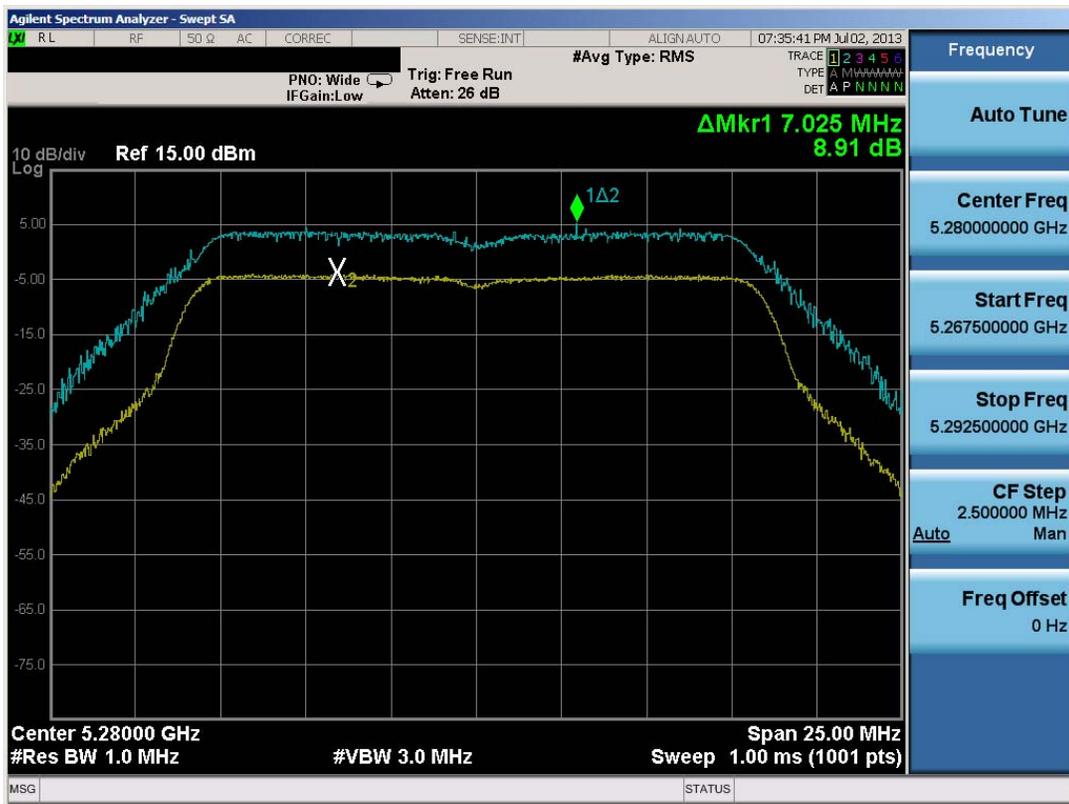


Plot 6-59. Peak Excursion Ratio Plot (802.11a)

| | | | | |
|--------------------------------------|--------------------------------|---|---------------|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 47 of 76 | |




Plot 6-60. Peak Excursion Ratio Plot (20MHz BW 802.11n)

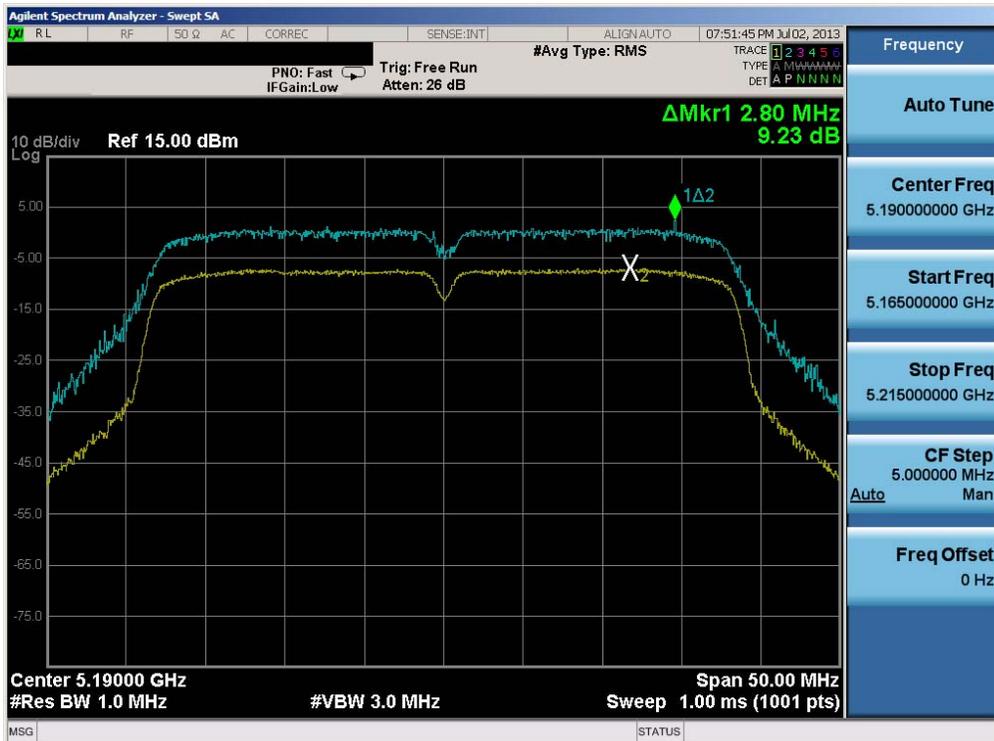

Plot 6-61. Peak Excursion Ratio Plot (40MHz BW 802.11n)

| | | | | |
|--------------------------------------|--------------------------------|---|--|---------------------------------|
| FCC ID: A3LSCHP729 | | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 48 of 76 |

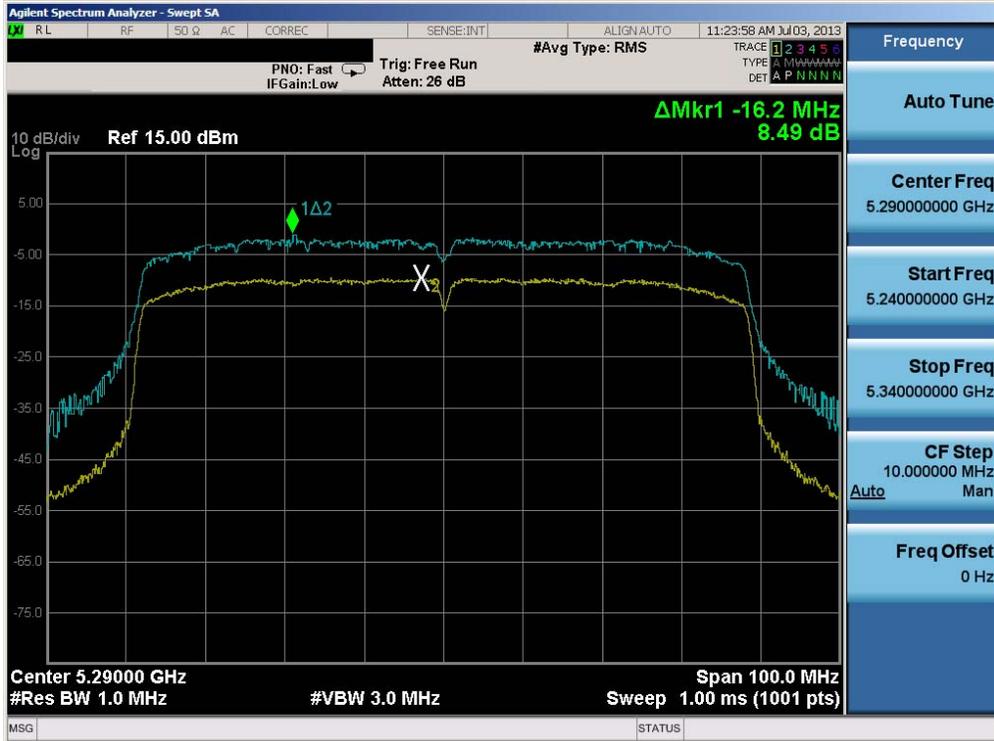

Plot 6-62. Peak Excursion Ratio Plot (80MHz BW 802.11ac)

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 49 of 76 |

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36

REFERENCE VOLTAGE: 3.8 VDC

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 % | 3.80 | + 20 (Ref) | 5,179,999,991 | -9 | -0.00000018 |
| 100 % | | - 30 | 5,179,999,996 | -4 | -0.00000007 |
| 100 % | | - 20 | 5,179,999,996 | -4 | -0.00000007 |
| 100 % | | - 10 | 5,179,999,993 | -7 | -0.00000014 |
| 100 % | | 0 | 5,179,999,988 | -12 | -0.00000024 |
| 100 % | | + 10 | 5,179,999,995 | -5 | -0.00000009 |
| 100 % | | + 20 | 5,179,999,998 | -2 | -0.00000003 |
| 100 % | | + 30 | 5,179,999,981 | -19 | -0.00000037 |
| 100 % | | + 40 | 5,179,999,996 | -4 | -0.00000008 |
| 100 % | | + 50 | 5,179,999,995 | -5 | -0.00000009 |
| 115 % | | 4.37 | + 20 | 5,179,999,993 | -7 |
| BATT. ENDPOINT | 3.40 | + 20 | 5,179,999,986 | -14 | -0.00000027 |

Table 6-9. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 50 of 76 | |

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52

REFERENCE VOLTAGE: 3.8 VDC

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 % | 3.80 | + 20 (Ref) | 5,259,999,984 | -16 | -0.00000030 |
| 100 % | | - 30 | 5,259,999,998 | -2 | -0.00000003 |
| 100 % | | - 20 | 5,259,999,980 | -20 | -0.00000037 |
| 100 % | | - 10 | 5,259,999,992 | -8 | -0.00000016 |
| 100 % | | 0 | 5,259,999,991 | -9 | -0.00000018 |
| 100 % | | + 10 | 5,259,999,984 | -16 | -0.00000031 |
| 100 % | | + 20 | 5,259,999,991 | -9 | -0.00000017 |
| 100 % | | + 30 | 5,259,999,981 | -19 | -0.00000036 |
| 100 % | | + 40 | 5,259,999,991 | -9 | -0.00000018 |
| 100 % | | + 50 | 5,259,999,994 | -6 | -0.00000012 |
| 115 % | | 4.37 | + 20 | 5,259,999,997 | -3 |
| BATT. ENDPOINT | 3.40 | + 20 | 5,259,999,992 | -8 | -0.00000016 |

Table 6-10. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 51 of 76 | |

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100

REFERENCE VOLTAGE: 3.8 VDC

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 % | 3.80 | + 20 (Ref) | 5,499,999,993 | -7 | -0.00000012 |
| 100 % | | - 30 | 5,499,999,998 | -2 | -0.00000004 |
| 100 % | | - 20 | 5,499,999,994 | -6 | -0.00000010 |
| 100 % | | - 10 | 5,499,999,984 | -16 | -0.00000030 |
| 100 % | | 0 | 5,499,999,989 | -11 | -0.00000020 |
| 100 % | | + 10 | 5,499,999,984 | -16 | -0.00000028 |
| 100 % | | + 20 | 5,499,999,981 | -19 | -0.00000034 |
| 100 % | | + 30 | 5,499,999,981 | -19 | -0.00000035 |
| 100 % | | + 40 | 5,499,999,983 | -17 | -0.00000031 |
| 100 % | | + 50 | 5,499,999,984 | -16 | -0.00000030 |
| 115 % | | 4.37 | + 20 | 5,499,999,988 | -12 |
| BATT. ENDPOINT | + 20 | | 5,499,999,987 | -13 | -0.00000023 |

Table 6-11. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 52 of 76 | |

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW) and 802.11n (40MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-12 per Section 15.209.

| Frequency | Field Strength [μ V/m] | Measured Distance [Meters] |
|-------------------|--------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 6-12. Radiated Limits

Test Procedures Used

KDB 789033 v01r03 – Section H

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 53 of 76 | |

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

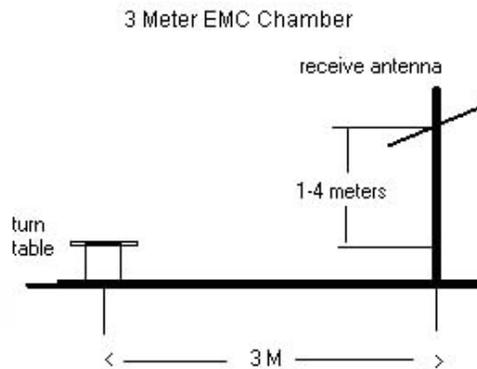


Figure 6-5. Test Instrument & Measurement Setup

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 54 of 76 | |

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 v01r03 Section H.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emission measurements reported were performed at 1 meter test distance (for RSE, with the application of a distance correction factor) while Band Edge measurements were made at 3 meter test distance.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 55 of 76 | |

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5180MHz
 Channel: 36

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10360.00 | -97.99 | Peak | H | 55.49 | -9.54 | 54.96 | 68.20 | -13.24 |
| * 15540.00 | -135.00 | Average | H | 58.14 | 0.00 | 30.14 | 53.98 | -23.84 |
| * 15540.00 | -125.00 | Peak | H | 58.14 | 0.00 | 40.14 | 73.98 | -33.84 |
| * 20720.00 | -135.00 | Average | H | 44.04 | -9.54 | 16.04 | 53.98 | -37.94 |
| * 20720.00 | -125.00 | Peak | H | 44.04 | 0.00 | 26.04 | 73.98 | -47.94 |
| 25900.00 | -125.00 | Peak | H | 44.84 | 0.00 | 26.84 | 68.20 | -41.36 |

Table 6-13. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5200MHz
 Channel: 40

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00 | -99.94 | Peak | H | 55.75 | -9.54 | 53.27 | 68.20 | -14.93 |
| * 15600.00 | -135.00 | Average | H | 57.97 | 0.00 | 29.97 | 53.98 | -24.01 |
| * 15600.00 | -125.00 | Peak | H | 57.97 | 0.00 | 39.97 | 73.98 | -34.01 |
| * 20800.00 | -135.00 | Average | H | 44.03 | -9.54 | 16.03 | 53.98 | -37.95 |
| * 20800.00 | -125.00 | Peak | H | 44.03 | 0.00 | 26.03 | 73.98 | -47.95 |
| 26000.00 | -125.00 | Peak | H | 44.96 | 0.00 | 26.96 | 68.20 | -41.24 |

Table 6-14. Radiated Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 56 of 76 |

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5240MHz
 Channel: 48

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10480.00 | -100.15 | Peak | H | 56.26 | -9.54 | 53.57 | 68.20 | -14.63 |
| * 15720.00 | -135.00 | Average | H | 57.76 | 0.00 | 29.76 | 53.98 | -24.22 |
| * 15720.00 | -125.00 | Peak | H | 57.76 | 0.00 | 39.76 | 73.98 | -34.22 |
| * 20960.00 | -135.00 | Average | H | 44.00 | -9.54 | 16.00 | 53.98 | -37.98 |
| * 20960.00 | -125.00 | Peak | H | 44.00 | 0.00 | 26.00 | 73.98 | -47.98 |
| 26200.00 | -125.00 | Peak | H | 44.75 | 0.00 | 26.75 | 68.20 | -41.45 |

Table 6-15. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5260MHz
 Channel: 52

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10520.00 | -100.12 | Peak | H | 55.57 | -9.54 | 52.90 | 68.20 | -15.30 |
| * 15780.00 | -135.00 | Average | H | 57.44 | 0.00 | 29.44 | 53.98 | -24.54 |
| * 15780.00 | -125.00 | Peak | H | 57.44 | 0.00 | 39.44 | 73.98 | -34.54 |
| * 21040.00 | -111.42 | Average | H | 43.95 | -9.54 | 29.99 | 53.98 | -23.99 |
| * 21040.00 | -101.55 | Peak | H | 43.95 | -9.54 | 39.86 | 73.98 | -34.12 |
| 26300.00 | -125.00 | Peak | H | 236.06 | 0.00 | 218.06 | 68.20 | 149.86 |

Table 6-16. Radiated Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 57 of 76 | |

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5280MHz
 Channel: 56

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00 | -100.18 | Peak | H | 55.80 | -9.54 | 53.08 | 68.20 | -15.12 |
| * 15840.00 | -135.00 | Average | H | 57.41 | 0.00 | 29.41 | 53.98 | -24.57 |
| * 15840.00 | -125.00 | Peak | H | 57.41 | 0.00 | 39.41 | 73.98 | -34.57 |
| * 21120.00 | -135.00 | Average | H | 43.83 | -9.54 | 15.83 | 53.98 | -38.15 |
| * 21120.00 | -125.00 | Peak | H | 43.83 | 0.00 | 25.83 | 73.98 | -48.15 |
| 26400.00 | -125.00 | Peak | H | 237.62 | 0.00 | 219.62 | 68.20 | 151.42 |

Table 6-17. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5320MHz
 Channel: 64

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 10640.00 | -110.28 | Average | H | 56.24 | -9.54 | 43.42 | 53.98 | -10.56 |
| * 10640.00 | -99.75 | Peak | H | 56.24 | -9.54 | 53.94 | 73.98 | -20.04 |
| * 15960.00 | -135.00 | Average | H | 57.26 | 0.00 | 29.26 | 53.98 | -24.72 |
| * 15960.00 | -125.00 | Peak | H | 57.26 | 0.00 | 39.26 | 73.98 | -34.72 |
| * 21280.00 | -135.00 | Average | H | 43.71 | -9.54 | 15.71 | 53.98 | -38.27 |
| * 21280.00 | -125.00 | Peak | H | 43.71 | 0.00 | 25.71 | 73.98 | -48.27 |
| 26600.00 | -125.00 | Peak | H | 47.29 | 0.00 | 29.29 | 68.20 | -38.91 |

Table 6-18. Radiated Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 58 of 76 | |

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5500MHz
 Channel: 100

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11000.00 | -110.91 | Average | H | 55.68 | -9.54 | 42.24 | 53.98 | -11.74 |
| * 11000.00 | -100.21 | Peak | H | 55.68 | -9.54 | 52.93 | 73.98 | -21.05 |
| 16500.00 | -125.00 | Peak | H | 57.03 | 0.00 | 39.03 | 68.20 | -29.17 |
| 22000.00 | -125.00 | Peak | H | 43.95 | 0.00 | 25.95 | 68.20 | -42.25 |
| 27500.00 | -125.00 | Peak | H | 48.50 | 0.00 | 30.50 | 68.20 | -37.70 |

Table 6-19. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5580MHz
 Channel: 116

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11160.00 | -110.49 | Average | H | 56.06 | -9.54 | 43.03 | 53.98 | -10.95 |
| * 11160.00 | -100.13 | Peak | H | 56.06 | -9.54 | 53.39 | 73.98 | -20.59 |
| 16740.00 | -125.00 | Peak | H | 57.32 | 0.00 | 39.32 | 68.20 | -28.88 |
| * 22320.00 | -108.59 | Average | H | 44.47 | -9.54 | 33.35 | 53.98 | -20.63 |
| * 22320.00 | -99.93 | Peak | H | 44.47 | -9.54 | 42.00 | 73.98 | -31.98 |
| 27900.00 | -125.00 | Peak | H | 48.02 | 0.00 | 30.02 | 68.20 | -38.18 |

Table 6-20. Radiated Measurements

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meters
 Operating Frequency: 5700MHz
 Channel: 140

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11400.00 | -111.23 | Average | H | 56.56 | -9.54 | 42.79 | 53.98 | -11.19 |
| * 11400.00 | -101.07 | Peak | H | 56.56 | -9.54 | 52.95 | 73.98 | -21.03 |
| 17100.00 | -125.00 | Peak | H | 59.92 | 0.00 | 41.92 | 68.20 | -26.28 |
| * 22800.00 | -109.99 | Average | H | 44.47 | -9.54 | 31.94 | 53.98 | -22.04 |
| * 22800.00 | -99.40 | Peak | H | 44.47 | -9.54 | 42.53 | 73.98 | -31.45 |
| 28500.00 | -125.00 | Peak | H | 48.08 | 0.00 | 30.08 | 68.20 | -38.12 |

Table 6-21. Radiated Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 60 of 76 | |

6.8 Radiated Band Edge Measurements (20MHz BW)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5132.88 | -110.41 | Average | H | 42.78 | 39.36 | 53.98 | -14.61 |
| 5132.88 | -103.17 | Peak | H | 42.78 | 46.61 | 73.98 | -27.37 |
| 5141.28 | -109.92 | Average | H | 42.78 | 39.85 | 53.98 | -14.12 |
| 5141.28 | -102.80 | Peak | H | 42.78 | 46.97 | 73.98 | -27.01 |
| 5150.00 | -110.25 | Average | H | 42.81 | 39.56 | 53.98 | -14.42 |
| 5150.00 | -99.65 | Peak | H | 42.81 | 50.16 | 73.98 | -23.82 |

Table 6-22. Radiated Restricted Band Measurements (4.5 – 5.15GHz)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 61 of 76 |

Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5350.00 | -109.81 | Average | H | 43.40 | 40.59 | 53.98 | -13.39 |
| 5350.00 | -99.60 | Peak | H | 43.40 | 50.80 | 73.98 | -23.18 |
| 5388.06 | -110.57 | Average | H | 43.54 | 39.97 | 53.98 | -14.01 |
| 5388.06 | -101.38 | Peak | H | 43.54 | 49.17 | 73.98 | -24.81 |
| 5432.28 | -111.03 | Average | H | 43.54 | 39.51 | 53.98 | -14.47 |
| 5432.28 | -103.01 | Peak | H | 43.54 | 47.53 | 73.98 | -26.45 |

Table 6-23. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 62 of 76 |

Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5425.12 | -110.80 | Average | H | 43.52 | 39.72 | 53.98 | -14.26 |
| 5425.12 | -101.38 | Peak | H | 43.52 | 49.13 | 73.98 | -24.85 |
| 5459.50 | -110.21 | Average | H | 43.65 | 40.44 | 53.98 | -13.54 |
| 5459.50 | -101.75 | Peak | H | 43.65 | 48.90 | 73.98 | -25.08 |
| 5469.40 | -99.77 | Peak | H | 43.69 | 50.92 | 68.20 | -17.28 |

Table 6-24. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5725.00 | -92.15 | Peak | H | 44.12 | 58.97 | 68.20 | -9.23 |
| 5725.93 | -93.51 | Peak | H | 44.12 | 57.61 | 68.20 | -10.59 |
| 5727.45 | -94.68 | Peak | H | 44.13 | 56.45 | 68.20 | -11.75 |

Table 6-25. Radiated Restricted Band Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 63 of 76 | |

6.9 Radiated Band Edge Measurements (40MHz BW)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5124.20 | -110.21 | Average | H | 42.74 | 39.53 | 53.98 | -14.45 |
| 5124.20 | -102.94 | Peak | H | 42.74 | 46.81 | 73.98 | -27.17 |
| 5135.10 | -110.29 | Average | H | 42.74 | 39.45 | 53.98 | -14.53 |
| 5135.10 | -101.33 | Peak | H | 42.74 | 48.41 | 73.98 | -25.57 |
| 5150.00 | -109.10 | Average | H | 42.79 | 40.68 | 53.98 | -13.30 |
| 5150.00 | -98.82 | Peak | H | 42.79 | 50.97 | 73.98 | -23.01 |

Table 6-26. Radiated Restricted Band Measurements (4.5 – 5.15GHz)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 64 of 76 |

Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5350.00 | -110.87 | Average | H | 43.37 | 39.51 | 53.98 | -14.47 |
| 5350.00 | -99.82 | Peak | H | 43.37 | 50.55 | 73.98 | -23.43 |
| 5374.09 | -110.78 | Average | H | 43.40 | 39.62 | 53.98 | -14.36 |
| 5374.09 | -100.29 | Peak | H | 43.40 | 50.10 | 73.98 | -23.87 |
| 5386.74 | -111.41 | Average | H | 43.40 | 38.99 | 53.98 | -14.99 |
| 5386.74 | -101.61 | Peak | H | 43.40 | 48.79 | 73.98 | -25.19 |

Table 6-27. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 65 of 76 | |

Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5456.28 | -110.56 | Average | H | 43.64 | 40.08 | 53.98 | -13.90 |
| 5456.28 | -101.56 | Peak | H | 43.64 | 49.08 | 73.98 | -24.90 |
| 5459.50 | -110.39 | Average | H | 43.65 | 40.26 | 53.98 | -13.72 |
| 5459.50 | -100.52 | Peak | H | 43.65 | 50.13 | 73.98 | -23.85 |
| 5469.50 | -98.48 | Peak | H | 43.69 | 52.21 | 68.20 | -15.99 |

Table 6-28. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5690MHz
 Channel: 138

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5725.00 | -98.16 | Peak | H | 44.12 | 52.96 | 68.20 | -15.24 |
| 5726.20 | -100.53 | Peak | H | 44.12 | 50.60 | 68.20 | -17.60 |
| 5726.86 | -100.74 | Peak | H | 44.12 | 50.39 | 68.20 | -17.81 |

Table 6-29. Radiated Restricted Band Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | | Page 66 of 76 |

6.10 Radiated Band Edge Measurements (80MHz BW)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5133.20 | -109.03 | Average | H | 42.78 | 40.75 | 53.98 | -13.23 |
| 5133.20 | -94.97 | Peak | H | 42.78 | 54.81 | 73.98 | -19.17 |
| 5142.35 | -108.73 | Average | H | 42.78 | 41.05 | 53.98 | -12.93 |
| 5142.35 | -94.06 | Peak | H | 42.78 | 55.72 | 73.98 | -18.26 |
| 5150.00 | -107.75 | Average | H | 42.81 | 42.06 | 53.98 | -11.92 |
| 5150.00 | -91.69 | Peak | H | 42.81 | 58.13 | 73.98 | -15.85 |

Table 6-30. Radiated Restricted Band Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 67 of 76 | |

Radiated Band Edge Measurements (80MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5350.00 | -109.40 | Average | H | 43.35 | 40.95 | 53.98 | -13.03 |
| 5350.00 | -99.39 | Peak | H | 43.35 | 50.96 | 73.98 | -23.02 |
| 5357.41 | -110.38 | Average | H | 43.35 | 39.97 | 53.98 | -14.01 |
| 5357.41 | -102.72 | Peak | H | 43.35 | 47.63 | 73.98 | -26.35 |
| 5359.74 | -110.73 | Average | H | 43.35 | 39.62 | 53.98 | -14.36 |
| 5359.74 | -101.97 | Peak | H | 43.35 | 48.39 | 73.98 | -25.59 |

Table 6-31. Radiated Restricted Band Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 68 of 76 | |

Radiated Band Edge Measurements (80MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106


| Frequency [MHz] | Analyzer Level [dBm] | Detector | Pol. [H/V] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------------------|----------|------------|-------------|-------------------------|----------------|-------------|
| 5456.26 | -110.61 | Average | H | 43.64 | 40.02 | 53.98 | -13.96 |
| 5456.26 | -98.28 | Peak | H | 43.64 | 52.36 | 73.98 | -21.62 |
| 5459.50 | -109.57 | Average | H | 43.65 | 41.08 | 53.98 | -12.90 |
| 5459.50 | -100.78 | Peak | H | 43.65 | 49.87 | 73.98 | -24.11 |
| 5469.50 | -96.67 | Peak | H | 43.69 | 54.02 | 68.20 | -14.18 |

Table 6-32. Radiated Restricted Band Measurements

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 69 of 76 | |

6.11 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

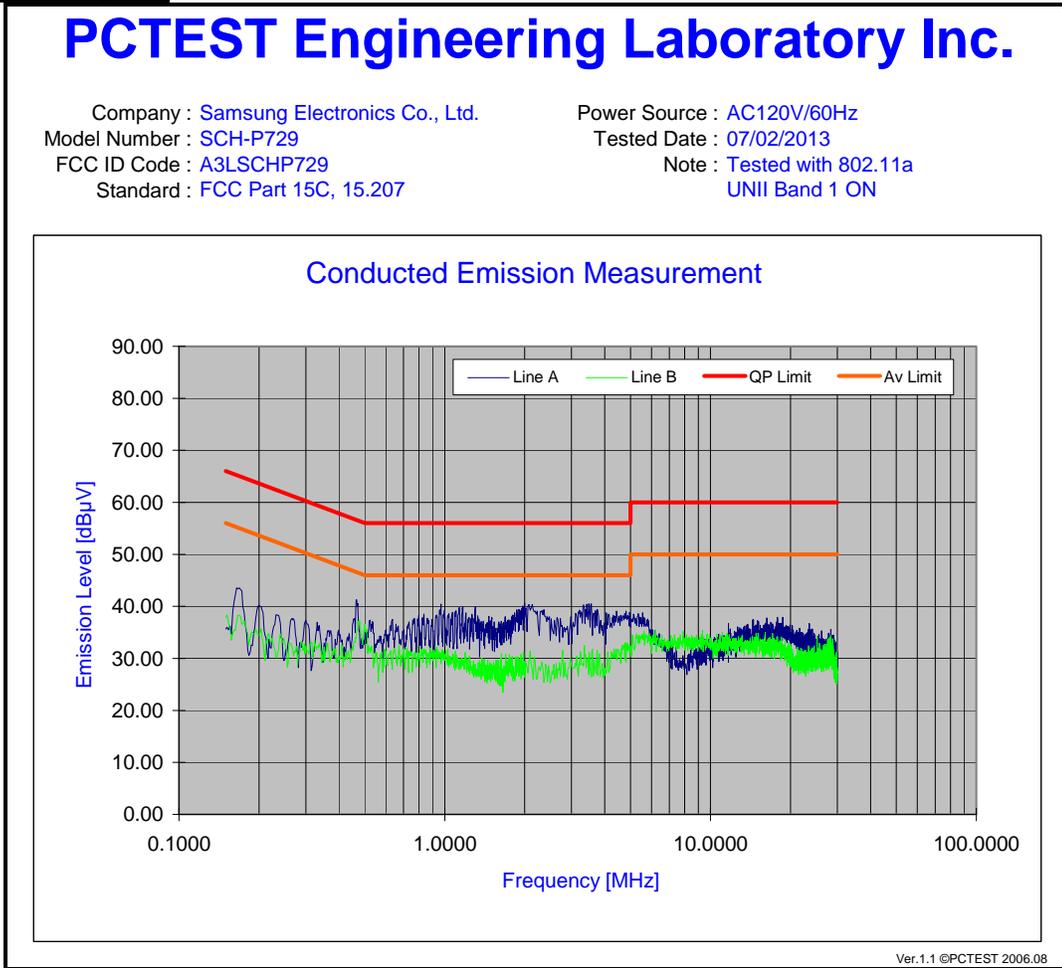

Plot 6-63. Line Conducted Plot with 802.11a UNII Band 1

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 70 of 76 | |

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

| No. | Line | Frequency [MHz] | Factor [dB] | QP [dBμV] | Limit [dBμV] | Margin [dB] | Average [dBμV] | Limit [dBμV] | Margin [dB] |
|-----|------|--------------------|----------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|
| 1 | A | 0.477 | 6.96 | 36.95 | 56.39 | -19.44 | 26.49 | 46.39 | -19.90 |
| 2 | A | 0.969 | 7.04 | 36.42 | 56.00 | -19.58 | 27.57 | 46.00 | -18.43 |
| 3 | A | 1.172 | 7.07 | 36.05 | 56.00 | -19.95 | 25.92 | 46.00 | -20.08 |
| 4 | A | 1.306 | 7.08 | 34.61 | 56.00 | -21.39 | 25.32 | 46.00 | -20.68 |
| 5 | A | 1.957 | 7.15 | 35.65 | 56.00 | -20.35 | 27.99 | 46.00 | -18.01 |
| 6 | A | 1.993 | 7.15 | 35.70 | 56.00 | -20.30 | 27.39 | 46.00 | -18.61 |
| 7 | A | 2.174 | 7.17 | 35.72 | 56.00 | -20.28 | 27.15 | 46.00 | -18.85 |
| 8 | A | 3.333 | 7.29 | 36.14 | 56.00 | -19.86 | 28.58 | 46.00 | -17.42 |
| 9 | A | 3.441 | 7.30 | 36.36 | 56.00 | -19.64 | 28.59 | 46.00 | -17.41 |
| 10 | A | 3.507 | 7.31 | 35.61 | 56.00 | -20.39 | 26.97 | 46.00 | -19.03 |
| 11 | B | 0.486 | 6.96 | 35.36 | 56.23 | -20.87 | 30.67 | 46.23 | -15.56 |
| 12 | B | 0.510 | 6.97 | 33.94 | 56.00 | -22.06 | 27.38 | 46.00 | -18.62 |
| 13 | B | 0.682 | 7.00 | 30.37 | 56.00 | -25.63 | 24.78 | 46.00 | -21.22 |
| 14 | B | 0.727 | 7.01 | 30.23 | 56.00 | -25.77 | 20.08 | 46.00 | -25.92 |
| 15 | B | 0.774 | 7.01 | 30.08 | 56.00 | -25.92 | 19.74 | 46.00 | -26.26 |
| 16 | B | 0.872 | 7.03 | 30.20 | 56.00 | -25.80 | 20.66 | 46.00 | -25.34 |
| 17 | B | 0.929 | 7.03 | 29.74 | 56.00 | -26.26 | 20.23 | 46.00 | -25.77 |
| 18 | B | 1.017 | 7.04 | 29.64 | 56.00 | -26.36 | 20.56 | 46.00 | -25.44 |
| 19 | B | 3.347 | 7.31 | 29.06 | 56.00 | -26.94 | 19.25 | 46.00 | -26.75 |
| 20 | B | 4.700 | 7.41 | 30.29 | 56.00 | -25.71 | 20.05 | 46.00 | -25.95 |

Table 6-33. Line Conducted Data with 802.11a UNII Band 1

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.


| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 71 of 76 | |

Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics Co., Ltd.
 Model Number : SCH-P729
 FCC ID Code : A3LSCHP729
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
 Tested Date : 07/02/2013
 Note : Tested with 802.11a
 UNII Band 2 ON

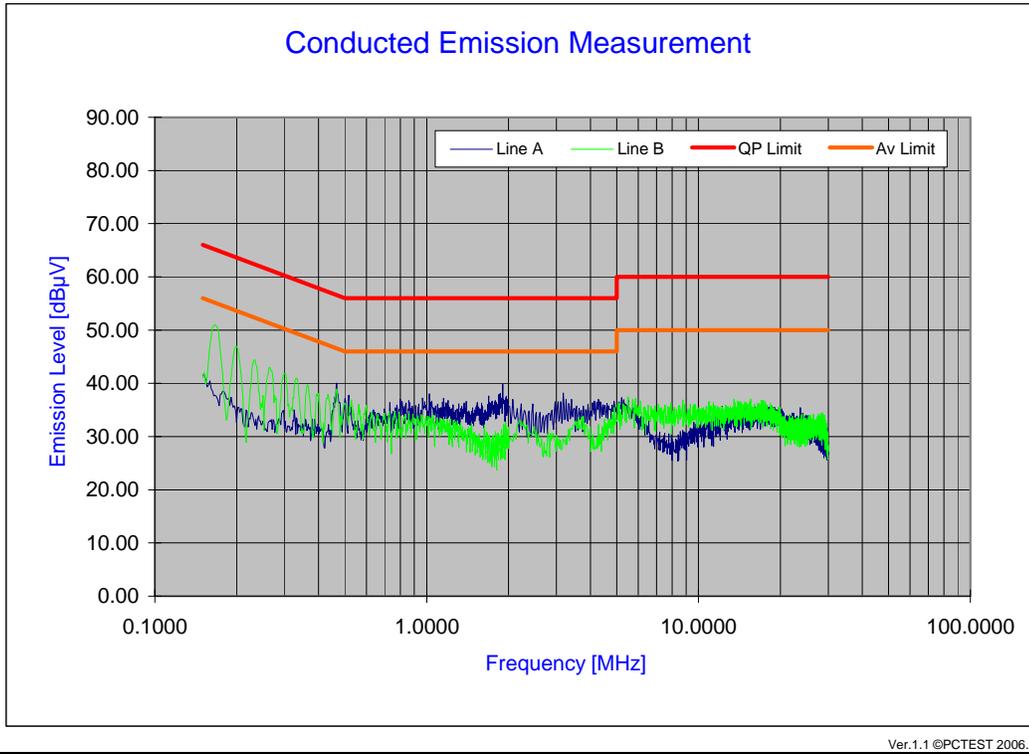

Plot 6-64. Line Conducted Plot with 802.11a UNII Band 2

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

| | | | | |
|---|---|--|---|--|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 72 of 76 | |

Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

| No. | Line | Frequency [MHz] | Factor [dB] | QP [dBμV] | Limit [dBμV] | Margin [dB] | Average [dBμV] | Limit [dBμV] | Margin [dB] |
|-----|------|--------------------|----------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|
| 1 | A | 0.464 | 6.96 | 33.64 | 56.63 | -22.99 | 26.88 | 46.63 | -19.75 |
| 2 | A | 0.507 | 6.97 | 35.02 | 56.00 | -20.98 | 27.22 | 46.00 | -18.78 |
| 3 | A | 0.551 | 6.97 | 34.80 | 56.00 | -21.20 | 27.41 | 46.00 | -18.59 |
| 4 | A | 0.963 | 7.04 | 32.38 | 56.00 | -23.62 | 25.06 | 46.00 | -20.94 |
| 5 | A | 1.029 | 7.04 | 33.37 | 56.00 | -22.63 | 25.53 | 46.00 | -20.47 |
| 6 | A | 1.693 | 7.12 | 31.81 | 56.00 | -24.19 | 24.86 | 46.00 | -21.14 |
| 7 | A | 1.835 | 7.14 | 31.99 | 56.00 | -24.01 | 25.15 | 46.00 | -20.85 |
| 8 | A | 1.873 | 7.14 | 32.55 | 56.00 | -23.45 | 25.28 | 46.00 | -20.72 |
| 9 | A | 1.920 | 7.14 | 33.63 | 56.00 | -22.37 | 25.61 | 46.00 | -20.39 |
| 10 | A | 3.174 | 7.28 | 33.07 | 56.00 | -22.93 | 26.36 | 46.00 | -19.64 |
| 11 | B | 0.174 | 6.86 | 47.41 | 64.76 | -17.35 | 36.05 | 54.76 | -18.71 |
| 12 | B | 0.207 | 6.87 | 43.24 | 63.31 | -20.07 | 32.10 | 53.31 | -21.21 |
| 13 | B | 0.241 | 6.89 | 39.75 | 62.07 | -22.32 | 29.48 | 52.07 | -22.59 |
| 14 | B | 0.274 | 6.90 | 38.47 | 61.00 | -22.53 | 29.09 | 51.00 | -21.91 |
| 15 | B | 0.307 | 6.92 | 37.32 | 60.05 | -22.73 | 27.59 | 50.05 | -22.46 |
| 16 | B | 0.340 | 6.93 | 36.43 | 59.20 | -22.77 | 26.59 | 49.20 | -22.61 |
| 17 | B | 0.373 | 6.94 | 35.25 | 58.43 | -23.18 | 26.36 | 48.43 | -22.07 |
| 18 | B | 0.442 | 6.95 | 33.35 | 57.03 | -23.68 | 25.57 | 47.03 | -21.46 |
| 19 | B | 0.474 | 6.96 | 37.40 | 56.44 | -19.04 | 31.61 | 46.44 | -14.83 |
| 20 | B | 0.541 | 6.98 | 33.89 | 56.00 | -22.11 | 26.82 | 46.00 | -19.18 |

Table 6-34. Line Conducted Data with 802.11a UNII Band 2

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AV Limit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.


| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 73 of 76 | |

Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics Co., Ltd.
 Model Number : SCH-P729
 FCC ID Code : A3LSCHP729
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
 Tested Date : 07/02/2013
 Note : Tested with 802.11a
 UNII Band 3 ON

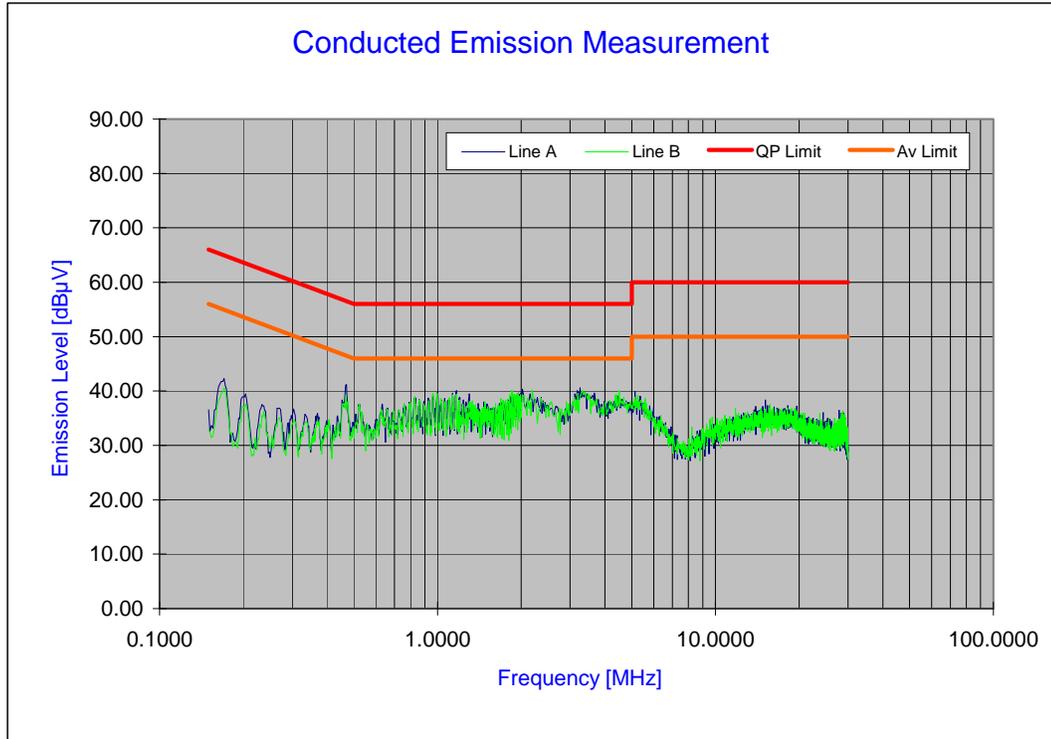

Ver.1.1 ©PCTEST 2006.08

Plot 6-65. Line Conducted Plot with 802.11a UNII Band 3

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

| | | | | |
|---|---|--|---|--|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 74 of 76 | |

Line-Conducted Test Data (Cont'd)
§15.207; RSS-Gen [7.2.2]

| No. | Line | Frequency [MHz] | Factor [dB] | QP [dBμV] | Limit [dBμV] | Margin [dB] | Average [dBμV] | Limit [dBμV] | Margin [dB] |
|-----|------|--------------------|----------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|
| 1 | A | 0.477 | 6.96 | 36.35 | 56.38 | -20.03 | 26.45 | 46.38 | -19.93 |
| 2 | A | 1.001 | 7.04 | 36.87 | 56.00 | -19.13 | 26.56 | 46.00 | -19.44 |
| 3 | A | 1.138 | 7.06 | 36.32 | 56.00 | -19.68 | 26.63 | 46.00 | -19.37 |
| 4 | A | 1.174 | 7.07 | 36.18 | 56.00 | -19.82 | 26.94 | 46.00 | -19.06 |
| 5 | A | 1.307 | 7.08 | 35.03 | 56.00 | -20.97 | 26.07 | 46.00 | -19.93 |
| 6 | A | 1.926 | 7.14 | 35.78 | 56.00 | -20.22 | 27.87 | 46.00 | -18.13 |
| 7 | A | 1.959 | 7.15 | 36.29 | 56.00 | -19.71 | 27.82 | 46.00 | -18.18 |
| 8 | A | 1.993 | 7.15 | 36.28 | 56.00 | -19.72 | 27.80 | 46.00 | -18.20 |
| 9 | A | 2.063 | 7.16 | 35.71 | 56.00 | -20.29 | 27.49 | 46.00 | -18.51 |
| 10 | A | 3.237 | 7.29 | 36.11 | 56.00 | -19.89 | 28.79 | 46.00 | -17.21 |
| 11 | B | 0.969 | 7.04 | 37.54 | 56.00 | -18.46 | 27.46 | 46.00 | -18.54 |
| 12 | B | 1.003 | 7.04 | 37.09 | 56.00 | -18.91 | 26.81 | 46.00 | -19.19 |
| 13 | B | 1.137 | 7.06 | 36.76 | 56.00 | -19.24 | 26.97 | 46.00 | -19.03 |
| 14 | B | 1.171 | 7.07 | 36.66 | 56.00 | -19.34 | 26.55 | 46.00 | -19.45 |
| 15 | B | 1.861 | 7.14 | 37.16 | 56.00 | -18.84 | 28.59 | 46.00 | -17.41 |
| 16 | B | 1.895 | 7.14 | 37.07 | 56.00 | -18.93 | 28.23 | 46.00 | -17.77 |
| 17 | B | 1.962 | 7.15 | 36.71 | 56.00 | -19.29 | 28.15 | 46.00 | -17.85 |
| 18 | B | 2.164 | 7.17 | 36.14 | 56.00 | -19.86 | 26.90 | 46.00 | -19.10 |
| 19 | B | 3.309 | 7.29 | 37.39 | 56.00 | -18.61 | 29.08 | 46.00 | -16.92 |
| 20 | B | 4.436 | 7.38 | 36.08 | 56.00 | -19.92 | 27.99 | 46.00 | -18.01 |

Table 6-35. Line Conducted Data with 802.11a UNII Band 3

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 75 of 76 | |

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSCHP729** is in compliance with Part 15E of the FCC Rules.

| | | | | |
|---|---|--|---|--|
| FCC ID: A3LSCHP729 |  | FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1306201045.A3L | Test Dates: July 2-18, 2013 | EUT Type: Portable Handset | Page 76 of 76 | |