



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 27 SUBPART CERTIFICATION REPORT

Model Tested: SCH-R420  
FCC ID (Requested): A3LSCHR420  
Report No: FF-236-R2  
Job No: FF-236  
Date issued: 2008-11-19

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR  
Part2, Part27

Prepared By

---

KJ KWON – Test Engineer

Authorized By

---

WT JANG – Technical Manager



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC Certification Information</b> .....	<b>3</b>
1.1 §2.1033 General Information .....	3
<b>2. INTRODUCTION</b> .....	<b>4</b>
2.1 General.....	4
<b>3. MEASURING INSTRUMENT CALIBRATION</b> .....	<b>5</b>
<b>4. TEST EQUIPMENT LIST</b> .....	<b>6</b>
<b>5. DESCRIPTION OF TESTS</b> .....	<b>7</b>
5.1 Output Power Variation .....	7
5.2 Effective Radiated Power / Equivalent Isotropic Radiated Power .....	8
5.3 Radiated Spurious & Harmonic Emission .....	9
5.4 Peak-Average Ratio.....	10
5.5 Occupied Bandwidth.....	11
5.6 Spurious and Harmonic Emissions at Antenna Terminal.....	11
5.6.1 Occupied Bandwidth Emission Limits .....	11
5.6.2 Conducted Spurious Emission .....	12
5.7 Frequency Stability / Temperature Variation.....	13
<b>6. TEST DATA</b> .....	<b>14</b>
6.1 Equivalent Isotropic Radiated Power(E.I.R.P.).....	14
6.2 AWS CDMA Radiated Spurious & Harmonic measurement.....	15
6.3 AWS Radiated Spurious & Harmonic Conversion Table.....	16
6.4 Frequency Stability.....	17
6.4.1 AWS Frequency Stability Table .....	17
6.4.2 AWS Frequency Stability Graph.....	18
<b>7. SAMPLE CALCULATION</b> .....	<b>20</b>
7.1 Emission Designator .....	20
<b>8. CONCLUSION</b> .....	<b>21</b>
<b>9. TEST PLOTS</b> .....	<b>22</b>



# MEASUREMENT REPORT

## 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

### 1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
- Attention: SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID: A3LSCHR420
- Quantity: Quantity production is planned
- Emission Designators: 1M29F9W(CDMA), 1M28F9W(PCS CDMA)  
1M28F9W(AWS CDMA)
- Tx Freq. Range: 824.70-848.31MHz (CDMA)  
1711.25 – 1753.75MHz (AWS CDMA)  
1851.25-1908.75MHz (PCS CDMA)
- Rx Freq. Range: 869.70-893.31MHz (CDMA)  
2111.25 – 2153.75MHz (AWS CDMA)  
1931.25-1988.75MHz (PCS CDMA)
- Max. Power Rating: 0.174 W ERP CDMA (22.41 dBm)  
0.355 W EIRP AWS (25.50 dBm)  
0.393 W EIRP PCS (25.94 dBm)
- FCC Classification(s): PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Cellular / AWS / PCS CDMA Phone with Bluetooth
- Modulation(s): CDMA
- Frequency Tolerance:  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s): **§27(L), §2.**
- Dates of Test: November 12-13, 2008
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FF-236-R2

## 2. INTRODUCTION

### 2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742 The site have 1 Fully-anechoic chamber and measurement facility.


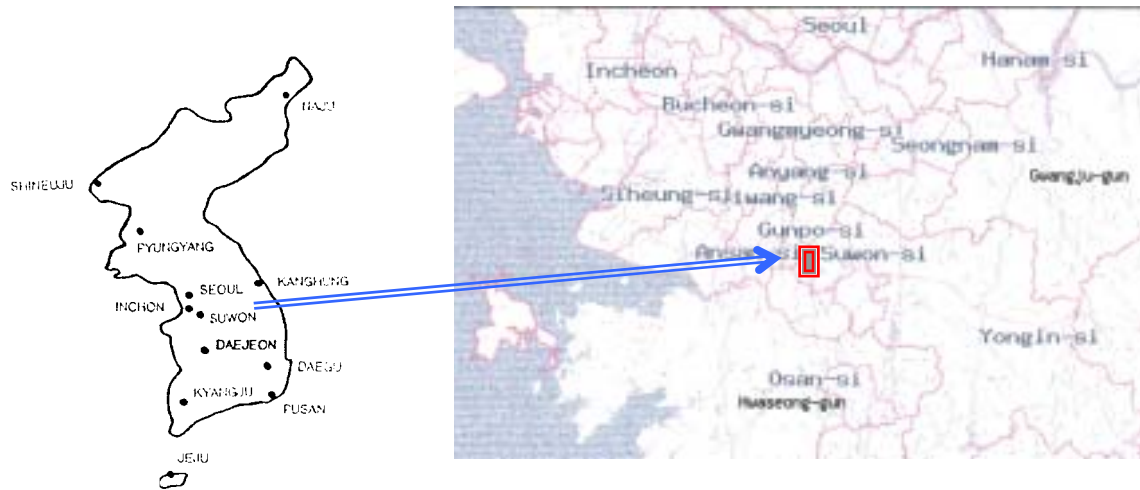


Figure1. Map of the Suwon City area.

#### **Measurement Procedure**

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



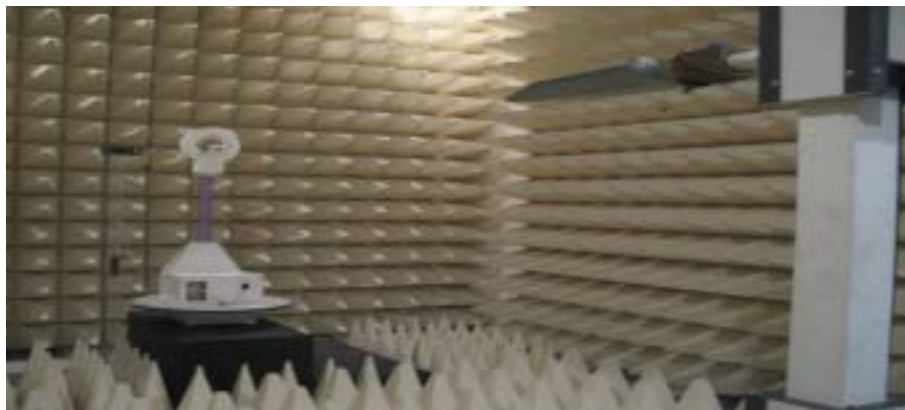

### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -



#### 4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2009-03-03
	E4440A(3Hz~26.5GHz)	MY41000236	2009-04-15
	E4440A(3Hz~26.5GHz)	MY41000233	2009-07-24
Signal Generator	SMR20	835197/030	2008-12-05
Network Analyzer	8753E	JP38160590	2009-06-20
Power Sensor	E9300H	MY41495838	2009-09-12
Power Meter	E4417A	MY45101042	2009-09-12
	E4419B	GB41293846	2009-09-12
Pre-Amplifier	8449B	3008A00691	2008-12-24
Communication test set	8960	MY47510060	2009-03-03
	8960	GB42230535	2009-01-02
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
	3121C-DB4	9007-587	2009-04-16
Communication test set	CMU200	109162	2009-10-17
Receive Antenna	HL040	353255/019	2009-10-29
	HL040	353255/020	2010-06-13
Power Supply	E3640A	MY40003594	2009-06-20
	E3640A	MY40003595	2009-05-22
	E3632A	MY40022438	2009-03-03
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. DESCRIPTION OF TESTS

### 5.1 Output Power Variation

#### Test Condition to measure the Output Power

This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55, with “All Up” power control bits.

The following procedures were followed according to FCC “SAR Measurement Procedures for 3G Devices”, October 2007.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 5-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3,4 or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 5-2 was applied.
5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23MHz	-104
Pilot Ec/Ior	dB	-7
Traffic Ec/Ior	dB	-7.4

**Table 5-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23MHz	-86
Pilot Ec/Ior	dB	-7
Traffic Ec/Ior	dB	-7.4

**Table 5-2**  
**Parameters for Max. Power for RC3**

Band	Channel	CDMA2000 RC	SO2	SO55	TDSO SO32 F+SCH	TDSO SO32 F-SCH
AWS	25	RC1	24.88	24.91	24.90	25.00
		RC3	24.90	24.99		
	450	RC1	25.20	25.28	25.30	25.26
		RC3	25.30	25.30		
	875	RC1	25.16	25.13	25.23	25.29
		RC3	25.21	25.23		

**Table 5-3**  
**Maximum Power Output Table for SCH-R420**

## 5.2 Effective Radiated Power / Equivalent Isotropic Radiated Power

### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

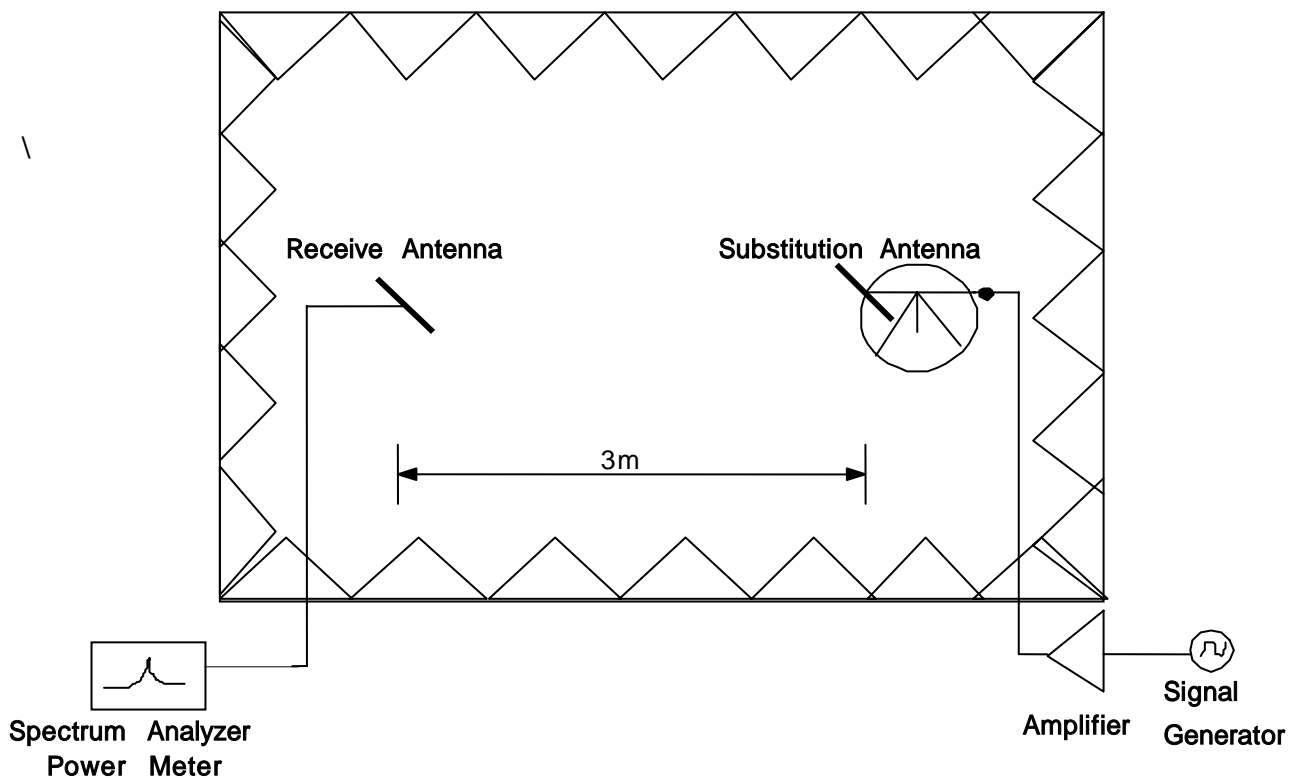


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For CDMA & PCS signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.3 Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

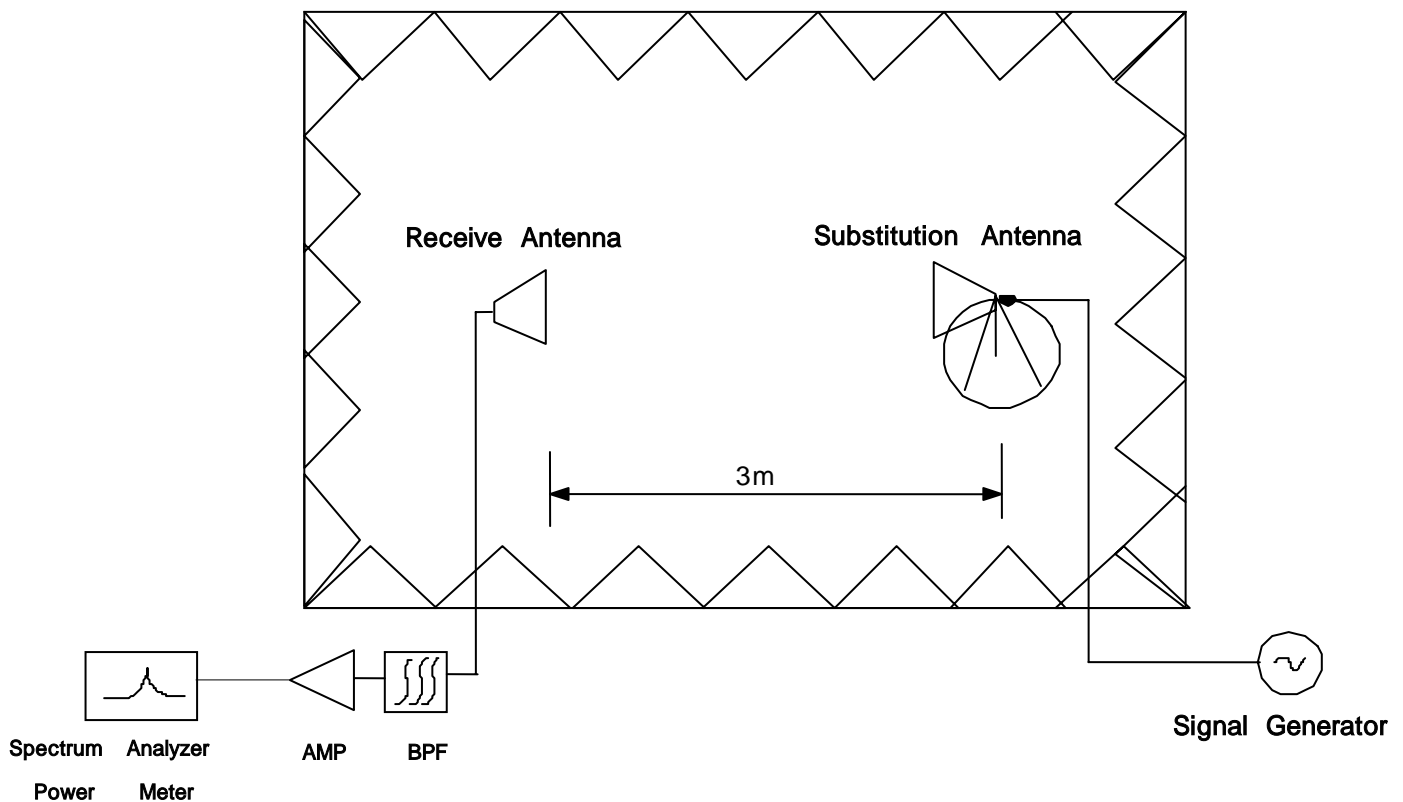


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



## **SAMPLE CALCULATION**

### **Example: Channel 600 PCS Mode 2<sup>nd</sup> Harmonic(3760MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3760\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.8\text{dBm}$ . The fundamental EIRP was  $25.5\text{dBm}$  so this harmonic was  $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$ .

## **5.4 Peak-Average Ratio**

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

- End of page -

## 5.5 Occupied Bandwidth

### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

## 5.6 Spurious and Harmonic Emissions at Antenna Terminal

### 5.6.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

– End of page –

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1710 – 1720	2110 – 2120
B	1720 – 1730	2120 – 2130
C	1730 – 1735	2130 – 2135
D	1735 – 1740	2135 – 2140
E	1740 – 1745	2140 – 2145
F	1745 – 1755	2145 – 2155

**Table 1. Broadband AWS Service Frequency Blocks**

### 5.6.2 Conducted Spurious Emission

**Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log (P)$ dB. Limit equivalent to  $-13$ dBm, calculation shown below.

$$43 + 10\log ( 0.333 \text{ W} ) = 38.22\text{dB}$$

$$25.22 \text{ dBm} - 38.22 \text{ dB} = -13 \text{ dBm}$$

**Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the  $-13$ dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT’s highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (AWS, PCS Mode : 10MHz to 20GHz). A display line was placed at  $-13$ dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.7 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5$ ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
  - The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

– End of page –



## 6. TEST DATA

### 6.1 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : AWS

Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1711.25	23.00	H	-16.01	9.70	-25.71
		V	-16.21	9.70	-25.91
1732.50	25.00	H	-14.56	9.70	-24.26
		V	-14.49	9.70	-24.19
1753.75	24.00	H	-15.39	9.70	-25.09
		V	-15.43	9.70	-25.13

Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1711.25	-24.60	H	344/180	23.07	0.203	Standard
1732.50	-21.87	V	21/90	25.50	0.355	Standard
1753.75	-23.60	V	6/90	24.43	0.277	Standard

**NOTE : Standard batteries are the only battery options for this phone**

- All modes of operation were investigated, and the worst-case results are reported.

**Radiated measurements at 3 meters by Substitution Method**



## 6.2 AWS CDMA Radiated Spurious & Harmonic measurement

### Field Strength of SPURIOUS Radiation

Operating Frequency : 1711.25 MHz(Low), 1732.50 MHz(Middle), 1753.75MHz(High)

Measured Output Power : 25.50 dBm = 0.355 W

Modulation Signal : AWS

$$\text{Limit : } 43 + 10\log_{10}(P) = 38.50 \text{ dBc}$$

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
25	2	3422.50	-51.88	V	54.07
	3	5133.75	-62.36	H	58.46
	4	6845	-64.33	V	56.47
	5	8556.25	-	-	-
	6	10267.50	-	-	-
	7	11978.75	-	-	-
450	2	3456.00	-55.21	V	57.53
	3	5197.50	-62.78	V	59.36
	4	6930.00	-65.24	H	57.33
	5	8662.50	-	-	-
	6	10395.00	-	-	-
	7	12127.50	-	-	-
875	2	3507.50	-50.06	V	52.61
	3	5261.25	-66.18	H	62.96
	4	7015.00	-66.20	V	58.41
	5	8768.75	-	-	-
	6	10522.50	-	-	-
	7	12276.25	-	-	-

### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported..

### **Radiated Spurious Emission measurements at 3 meters by Substitution Method**



### 6.3 AWS Radiated Spurious & Harmonic Conversion Table

Date : November 13, 2008

Test Engineer : KJ KWON

Tx Cable loss  
 Tx Horn Ant Gain  
 Tx Level to radiate -13dBm  
 ESI Level received from Tx with -13dBm  
 Tested Level from EUT  
 = EIRP - (-13 + - )

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
25	2	3422.50	-13.53	12.60	-12.10	-36.31	-36.31	-54.14	-51.88	56.33	54.07
	3	5133.75	-17.10	12.60	-8.50	-42.40	-41.94	-62.36	-63.59	58.46	60.15
	4	6845	-19.74	11.80	-5.10	-46.56	-46.36	-66.14	-64.33	58.08	56.47
	5	8556.25	-22.33	11.40	-2.10	-49.75	-49.11	-	-	-	-
	6	10267.50	-25.81	11.30	1.50	-54.02	-53.74	-	-	-	-
	7	11978.75	-27.39	12.60	1.80	-56.86	-56.97	-	-	-	-
450	2	3456.00	-13.60	12.40	-11.80	-35.72	-36.18	-56.51	-55.21	59.29	57.53
	3	5197.50	-17.22	12.60	-8.40	-41.86	-41.92	-64.63	-62.78	61.27	59.36
	4	6930.00	-20.02	11.00	-4.00	-46.41	-45.62	-65.24	-66.67	57.33	59.55
	5	8662.50	-22.43	11.30	-1.90	-50.01	-50.10	-	-	-	-
	6	10395.00	-25.66	11.70	1.00	-53.72	-53.57	-	-	-	-
	7	12127.50	-28.23	12.70	2.50	-56.23	-56.55	-	-	-	-
875	2	3507.50	-13.70	12.40	-11.70	-36.39	-35.95	-50.92	-50.06	53.03	52.61
	3	5261.25	-17.16	13.10	-8.90	-41.72	-41.82	-66.18	-68.80	62.96	65.48
	4	7015.00	-19.26	11.00	-4.70	-46.40	-46.05	-66.31	-66.20	58.41	58.65
	5	8768.75	-22.46	11.30	-1.80	-50.25	-50.22	-	-	-	-
	6	10522.50	-25.95	11.10	1.80	-53.71	-53.75	-	-	-	-
	7	12276.25	-28.41	12.80	2.60	-56.37	-57.33	-	-	-	-

## 6.4 Frequency Stability

### 6.4.1 AWS Frequency Stability Table

Operating Frequency : 1,732,500,000 Hz

Channel : 450

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	22.20	1,732,500,022	0.000001	0.012
100%		-30	0.80	1,732,500,001	0.000000	0.000
100%		-20	18.30	1,732,500,018	0.000001	0.010
100%		-10	21.10	1,732,500,021	0.000001	0.011
100%		0	-2.00	1,732,499,998	0.000000	-0.001
100%		+10	-28.50	1,732,499,972	-0.000002	-0.015
100%		+20	22.20	1,732,500,022	0.000001	0.012
100%		+30	14.60	1,732,500,015	0.000001	0.008
100%		+40	25.80	1,732,500,026	0.000001	0.014
100%		+50	-33.90	1,732,499,966	-0.000002	-0.018
100%		+60	-30.90	1,732,499,969	-0.000002	-0.016
85%		3.25	+20	26.50	1,732,500,027	0.000001
115%	4.26	+20	-28.40	1,732,499,972	-0.000002	-0.015
Batt. Endpoint	3.25	+20	26.50	1,732,500,027	0.000001	0.014

**Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.**


**The EUT is tested down to the battery end point**

### 6.4.2 AWS Frequency Stability Graph

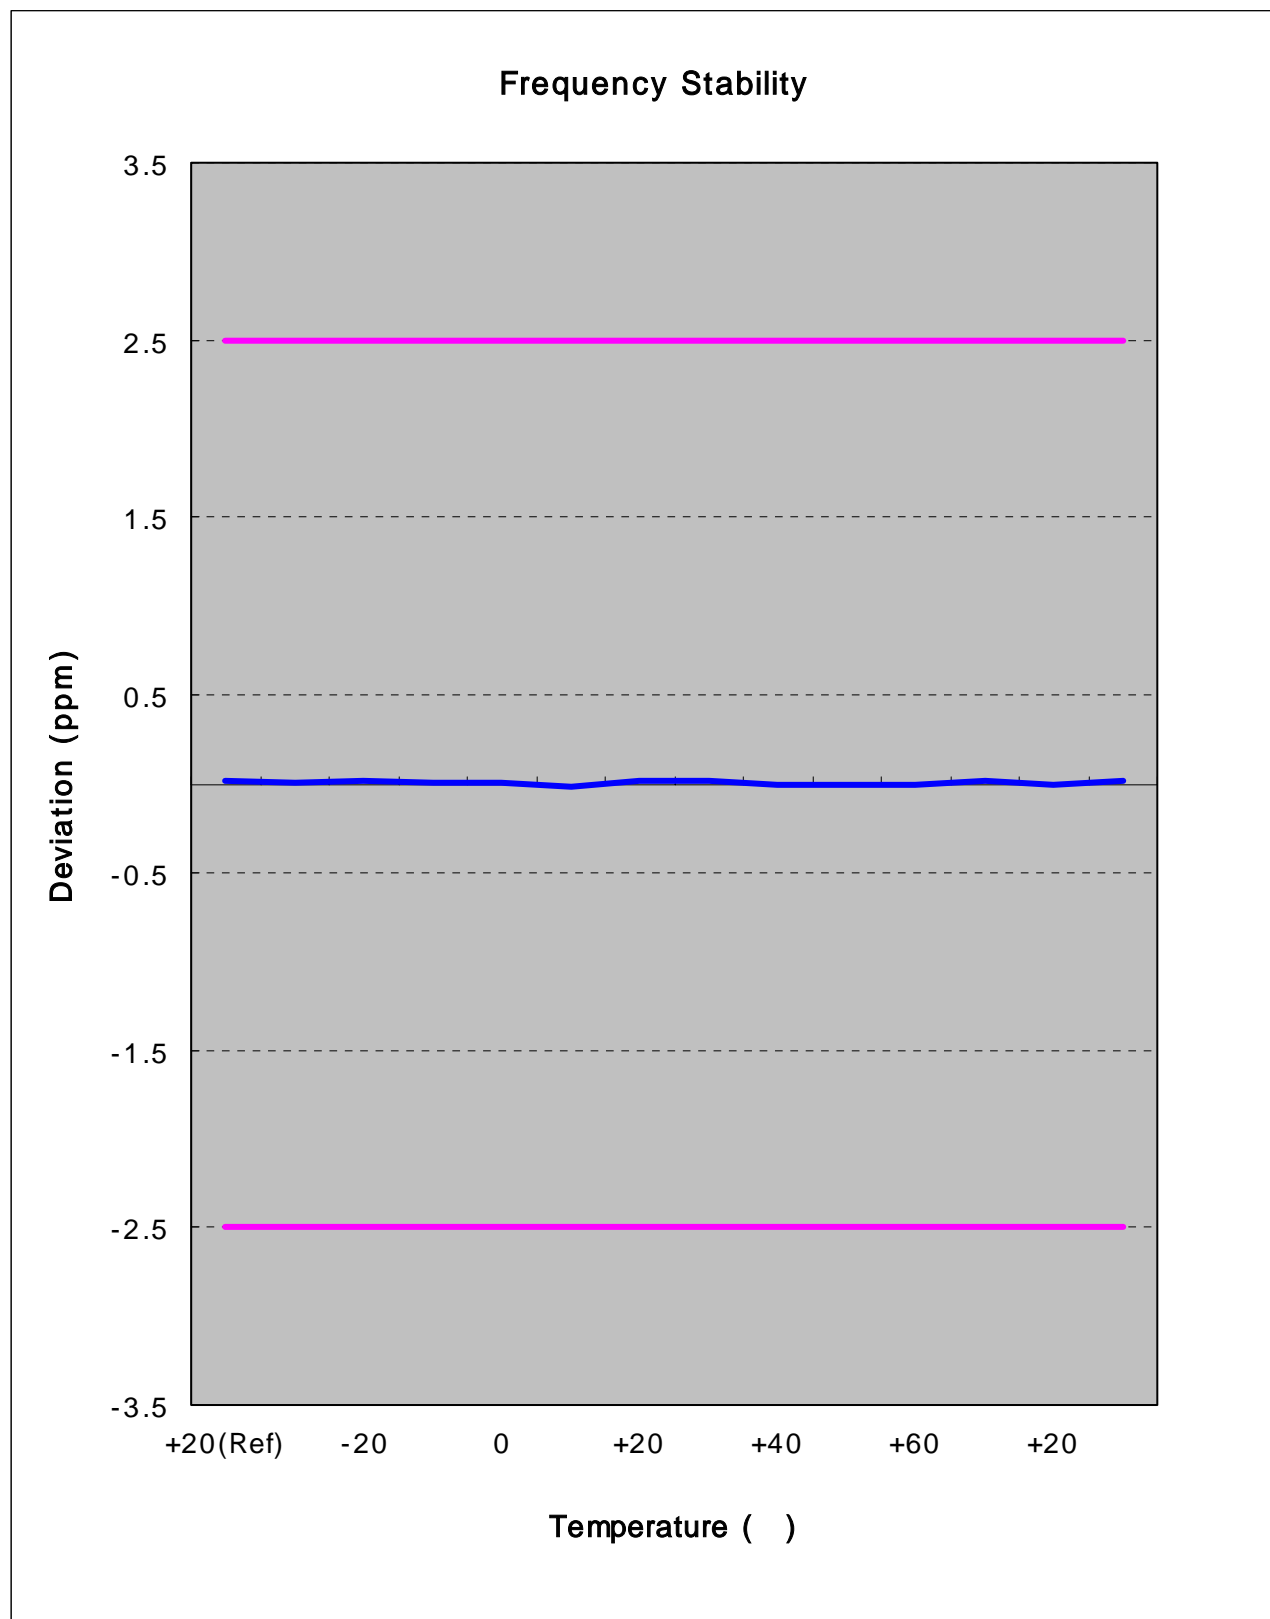

- End of page -

Zoom In

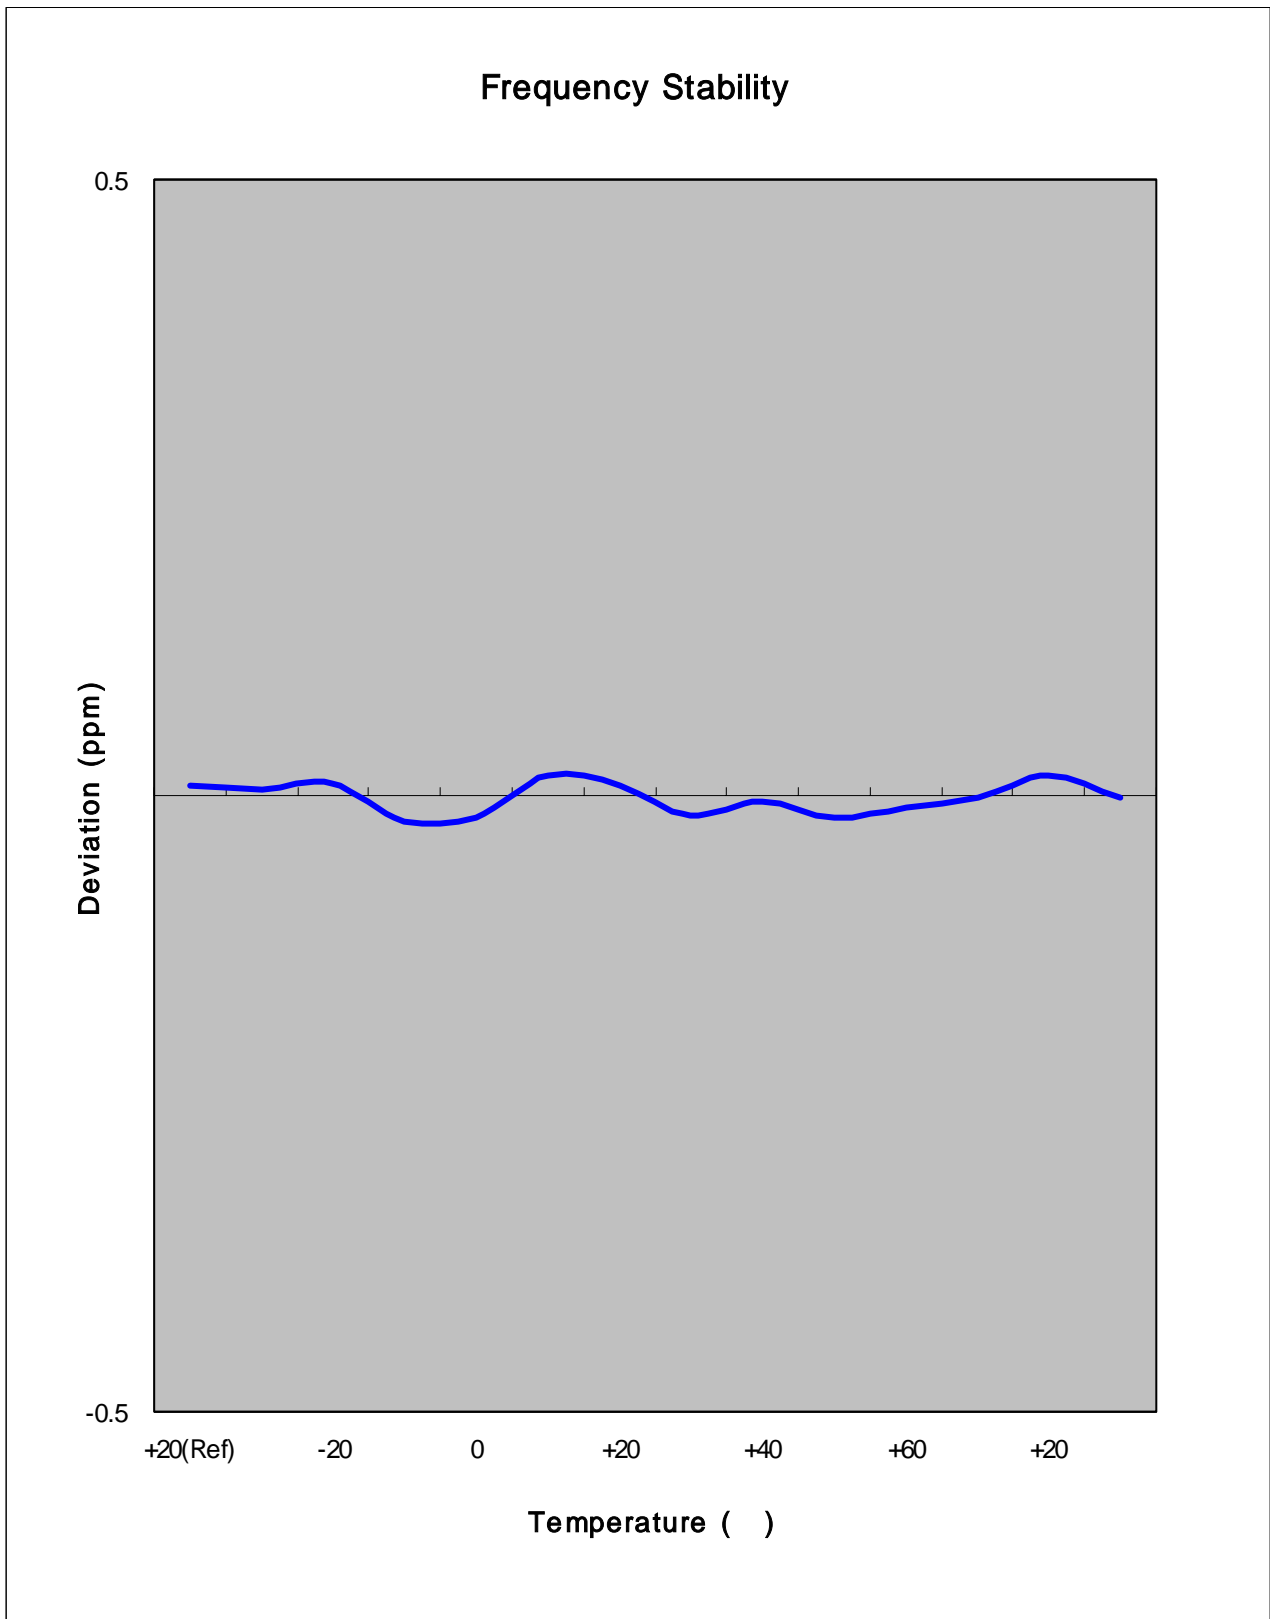

- End of page -

## 7. SAMPLE CALCULATION

### 7.1 Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

– End of page –



## **8. CONCLUSION**

The data collected shows that the SAMSUNG Cellular / AWS / PCS CDMA Phone with Bluetooth FCC ID : A3LSCHR420 complies with all the requirements of Parts 2, 27 of the FCC Rules.


- End of page -



## 9. TEST PLOTS

Agilent

R T

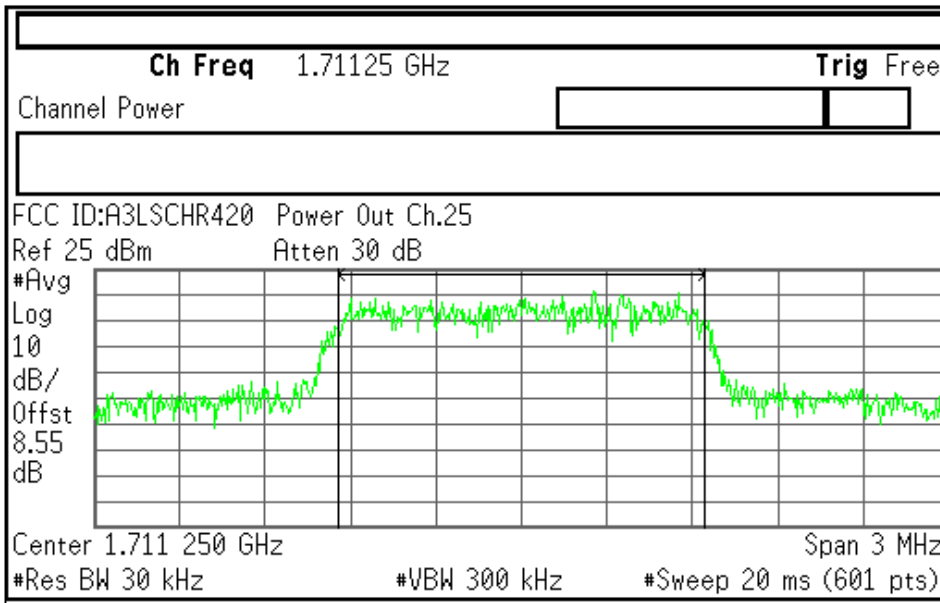


<b>Freq/Channel</b>
<b>Center Freq</b> 1.71125000 GHz
<b>Start Freq</b> 1.70975000 GHz
<b>Stop Freq</b> 1.71275000 GHz
<b>CF Step</b> 300.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

<b>Channel Power</b>	<b>Power Spectral Density</b>
25.06 dBm /1.2806 MHz	-36.02 dBm/Hz

Copyright 2000-2006 Agilent Technologies

Agilent

R T

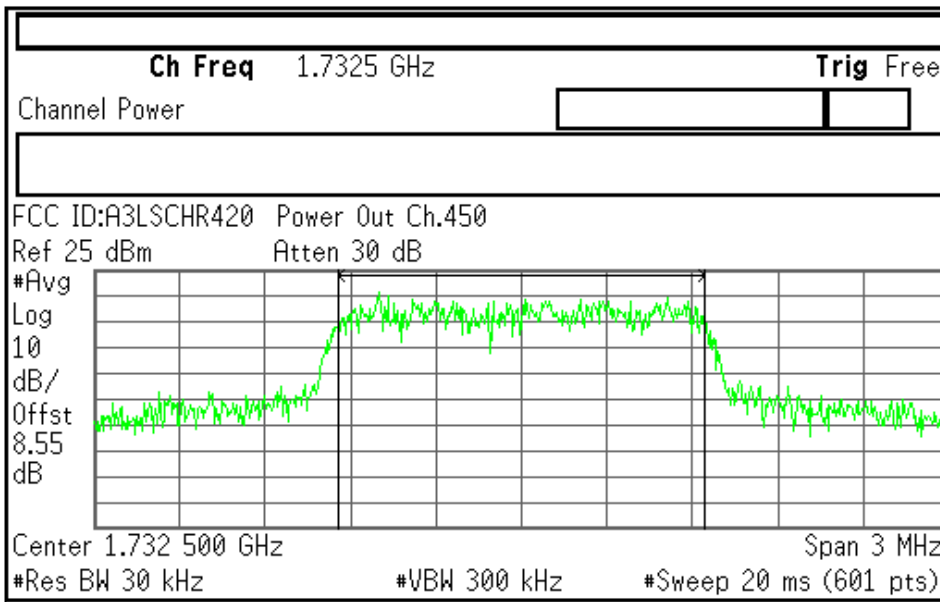

<b>Freq/Channel</b>
<b>Center Freq</b> 1.73250000 GHz
<b>Start Freq</b> 1.73100000 GHz
<b>Stop Freq</b> 1.73400000 GHz
<b>CF Step</b> 300.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

<b>Channel Power</b>	<b>Power Spectral Density</b>
24.95 dBm /1.2821 MHz	-36.13 dBm/Hz

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

Ch Freq 1.75375 GHz Trig Free

Channel Power

Center Freq  
1.75375000 GHz

Start Freq  
1.75225000 GHz

Stop Freq  
1.75525000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LSCHR420 Power Out Ch.875  
Ref 25 dBm Atten 30 dB



Center 1.753 750 GHz Span 3 MHz  
#Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

<b>Channel Power</b>	<b>Power Spectral Density</b>
25.20 dBm /1.2794 MHz	-35.87 dBm/Hz


Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSCHR420 Power Out Ch.25  
Ref 25 dBm Atten 30 dB

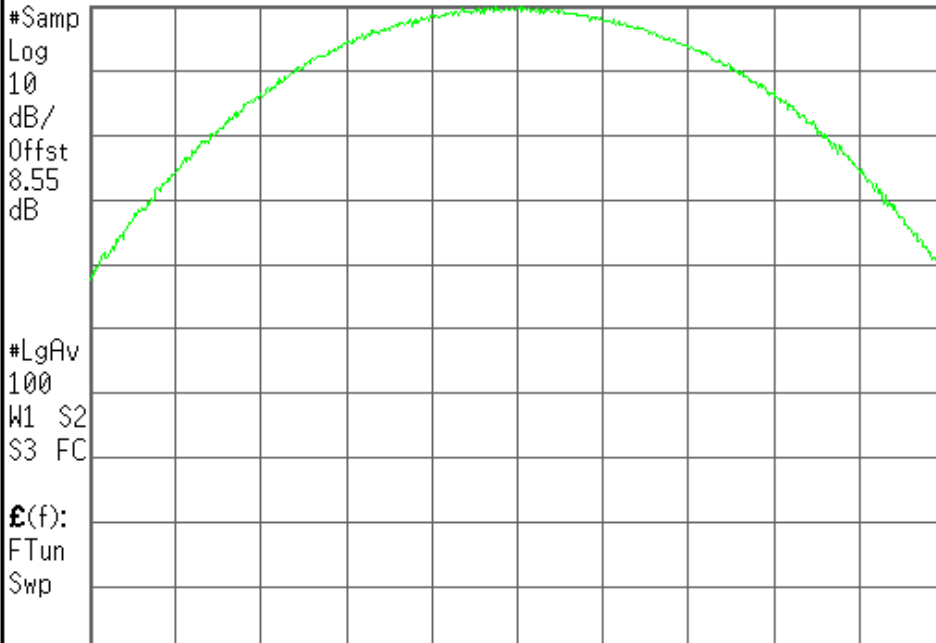

Center 1.711 25 GHz Span 10 MHz  
#Res BW 3 MHz VBW 3 MHz Sweep 1 ms (601 pts)

Center Freq  
1.71125000 GHz

Start Freq  
1.70625000 GHz

Stop Freq  
1.71625000 GHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel


FCC ID:A3LSCHR420 Power Out Ch.450

Ref 25 dBm Atten 30 dB

#Samp  
Log  
10  
dB/  
Offst  
8.55  
dB

#LgAv  
100  
W1 S2  
S3 FC

E(f):  
FTun  
Swp

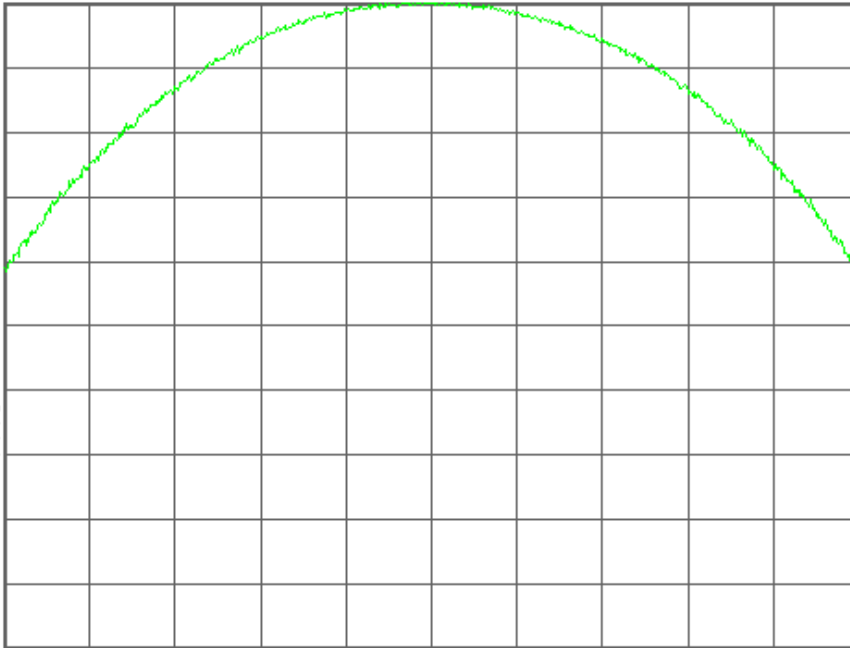

Center 1.732 50 GHz Span 10 MHz  
#Res BW 3 MHz VBW 3 MHz Sweep 1 ms (601 pts)

Center Freq  
1.73250000 GHz

Start Freq  
1.72750000 GHz

Stop Freq  
1.73750000 GHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel


FCC ID:A3LSCHR420 Power Out Ch.875

Ref 25 dBm Atten 30 dB

#Samp  
Log  
10  
dB/  
Offst  
8.55  
dB

#LgAv  
100  
W1 S2  
S3 FC

E(f):  
FTun  
Swp

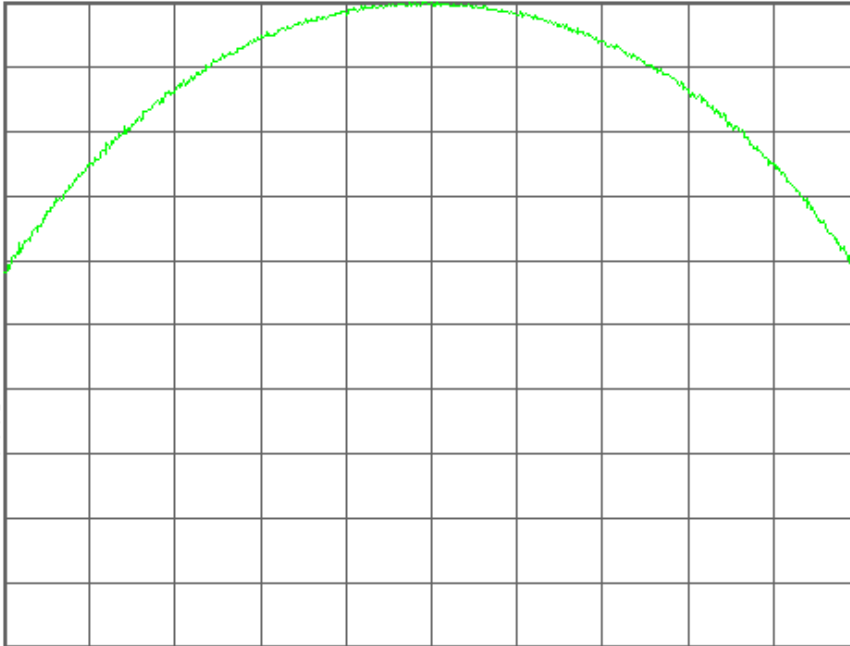

Center 1.753 75 GHz Span 10 MHz  
#Res BW 3 MHz VBW 3 MHz Sweep 1 ms (601 pts)

Center Freq  
1.75375000 GHz

Start Freq  
1.74875000 GHz

Stop Freq  
1.75875000 GHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

Ch Freq 1.71125 GHz Trig Free  
 Occupied Bandwidth

Center Freq  
1.71125000 GHz

Start Freq  
1.70975000 GHz


Stop Freq  
1.71275000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LSCHR420 0BW Ch.25  
 Ref 25 dBm Atten 30 dB

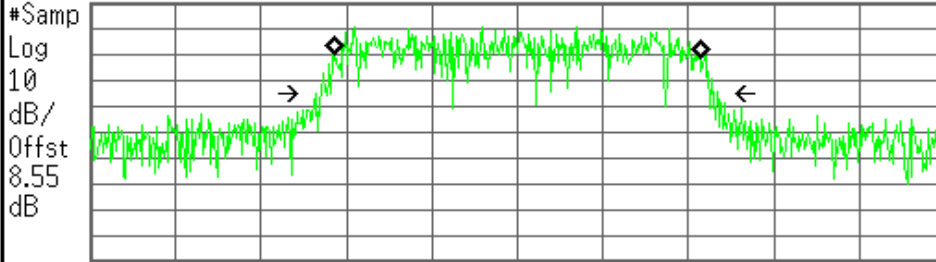

#Samp  
 #Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

**Occupied Bandwidth** 1.2806 MHz  
**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB  
 Transmit Freq Error 676.151 Hz  
**x dB Bandwidth** 1.407 MHz\*

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

Ch Freq 1.7325 GHz Trig Free  
 Occupied Bandwidth

Center Freq  
1.73250000 GHz

Start Freq  
1.73100000 GHz


Stop Freq  
1.73400000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LSCHR420 0BW Ch.450  
 Ref 25 dBm Atten 30 dB

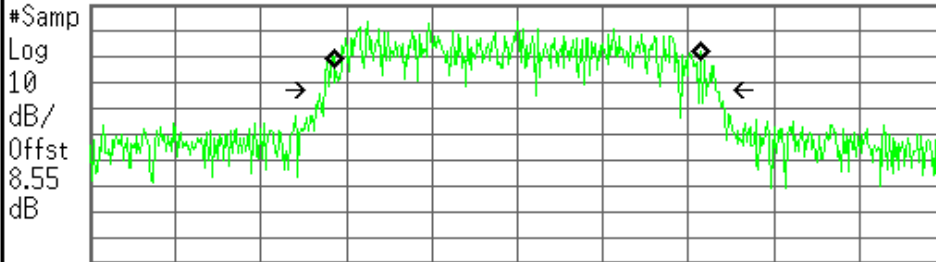

#Samp  
 #Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

**Occupied Bandwidth** 1.2821 MHz  
**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB  
 Transmit Freq Error -1.986 kHz  
**x dB Bandwidth** 1.373 MHz\*

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

Ch Freq 1.75375 GHz Trig Free  
 Occupied Bandwidth

Center Freq  
1.75375000 GHz

Start Freq  
1.75225000 GHz

Stop Freq  
1.75525000 GHz


CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LSCHR420 0BW Ch.875

Ref 25 dBm Atten 30 dB

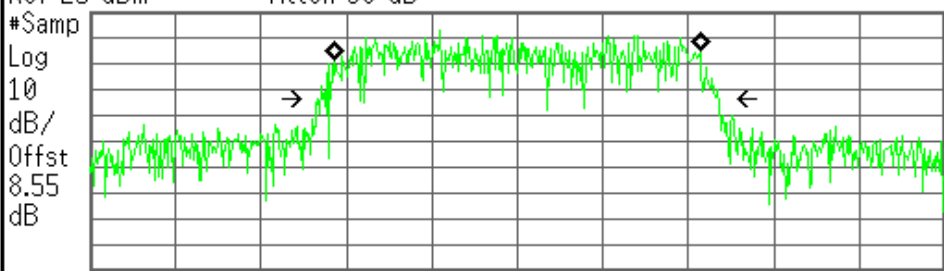

Start 1.752 250 GHz Stop 1.755 250 GHz  
 #Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

**Occupied Bandwidth** 1.2794 MHz  
**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB  
**Transmit Freq Error** 153.384 Hz  
**x dB Bandwidth** 1.397 MHz\*

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSCHR420 P.A.R Ch.450  
 Ref 35 dBm Atten 40 dB  
 #Mkr1 0 Hz -2.22 dB

Center Freq  
1.73250000 GHz


Start Freq  
1.72750000 GHz

Stop Freq  
1.73750000 GHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

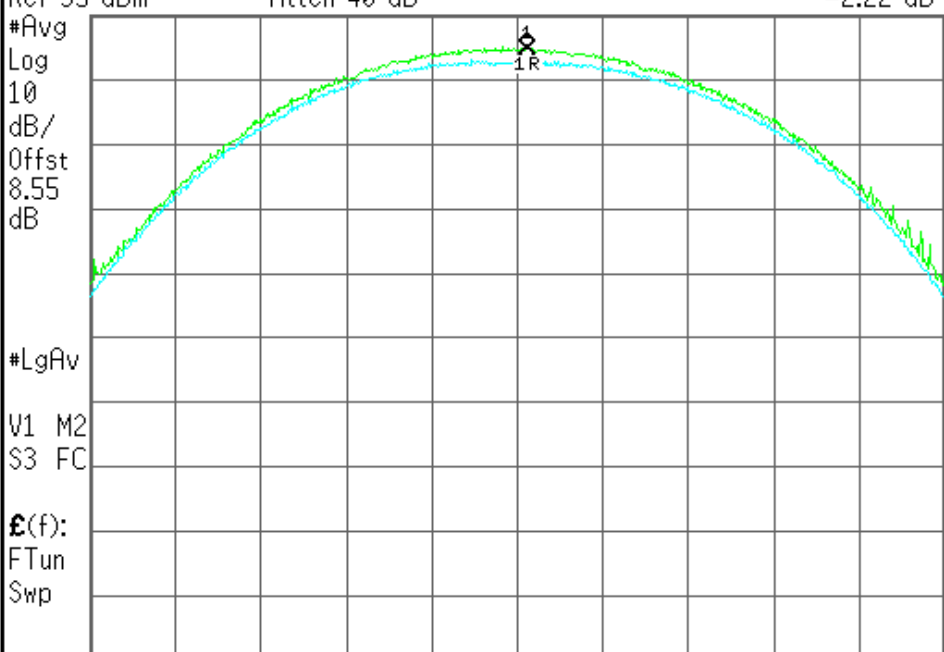

Center 1.732 50 GHz Span 10 MHz  
 #Res BW 3 MHz VBW 3 MHz Sweep 1 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSCHR420 Cond Spur Ch.25

Ref 25 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

8.55

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

VBW 1 MHz

#Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSCHR420 Cond Spur Ch.25

Mkr1 1.705 GHz

Ref 25 dBm

Atten 30 dB

-24.74 dBm

#Peak

Log

10

dB/

Offst

8.55

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

AC Coupled: unspecified below 20 MHz

Start 10 MHz

Stop 1.705 GHz

#Res BW 1 MHz

VBW 1 MHz

Sweep 2.84 ms (601 pts)

Center Freq  
857.500000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
1.70500000 GHz

CF Step  
169.500000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

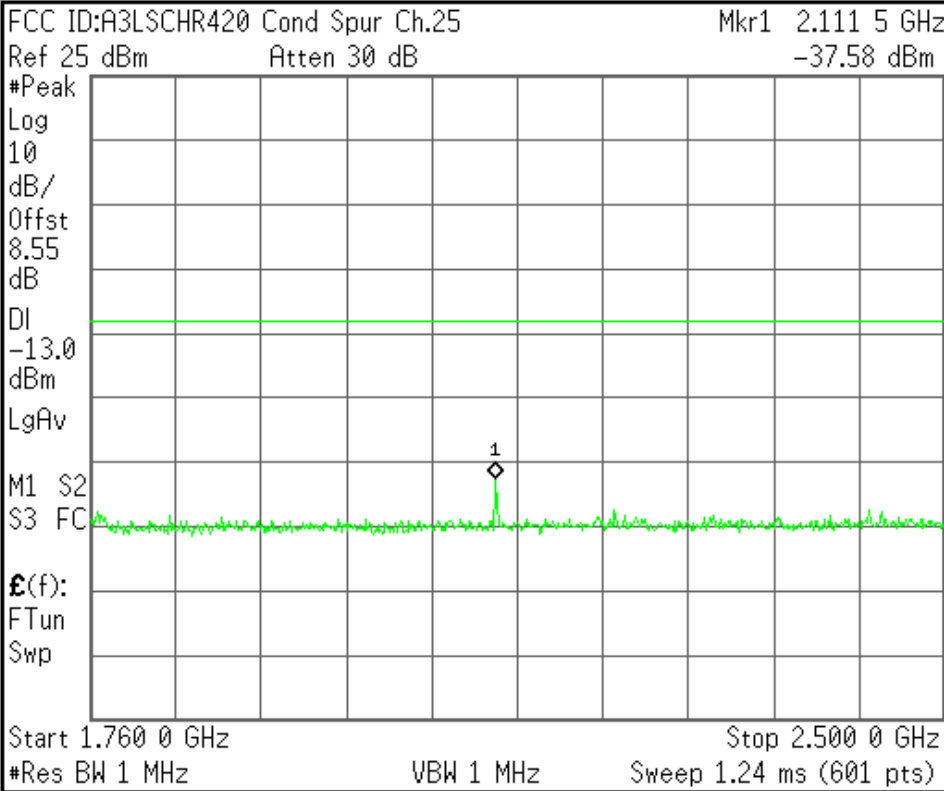


<b>Center Freq</b> 2.13000000 GHz
<b>Start Freq</b> 1.76000000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 74.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

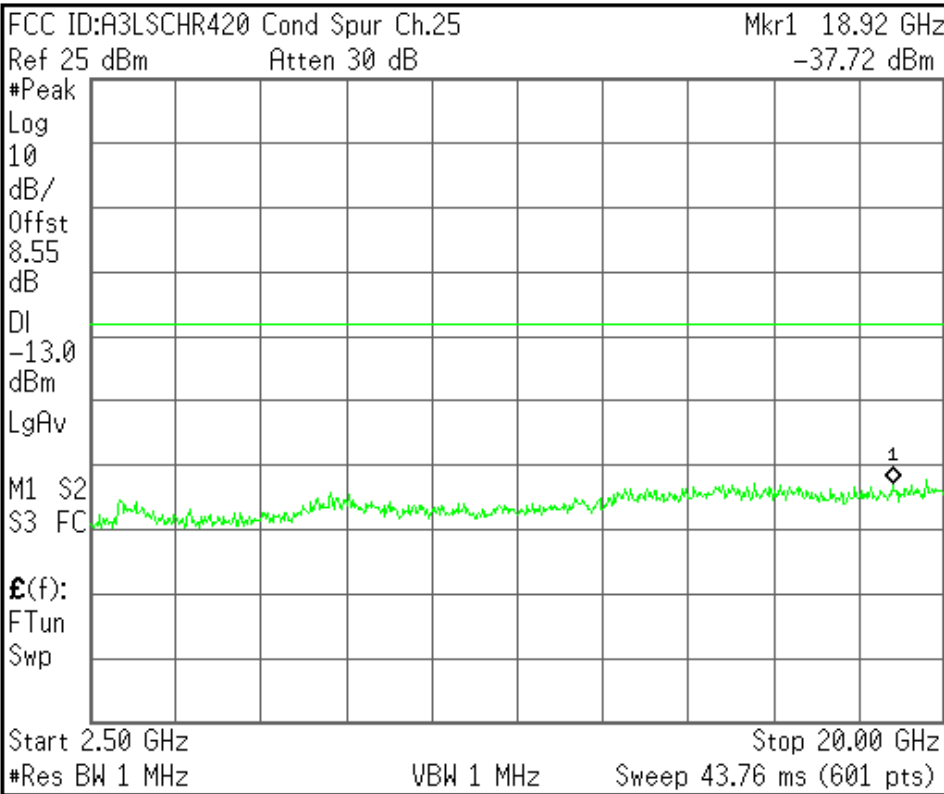

<b>Center Freq</b> 11.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.00000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSCHR420 Cond Spur Ch.450

Ref 25 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

8.55

dB

DI

-13.0

dBm

LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

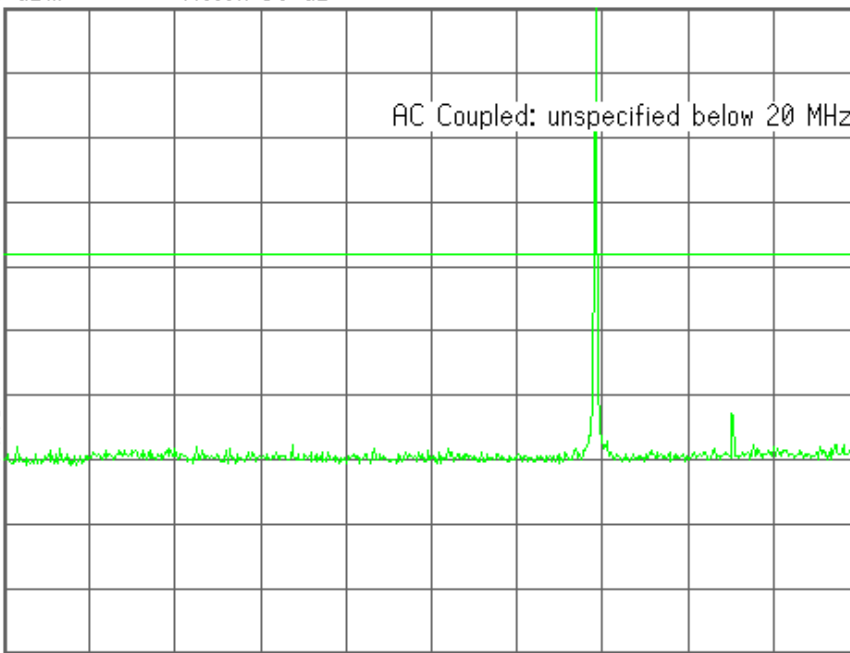

Start 10 MHz

Stop 2.500 GHz

#Res BW 1 MHz

VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSCHR420 Cond Spur Ch.450

Mkr1 1.705 GHz

Ref 25 dBm

Atten 30 dB

-42.51 dBm

#Peak

Log

10

dB/

Offst

8.55

dB

DI

-13.0

dBm

LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

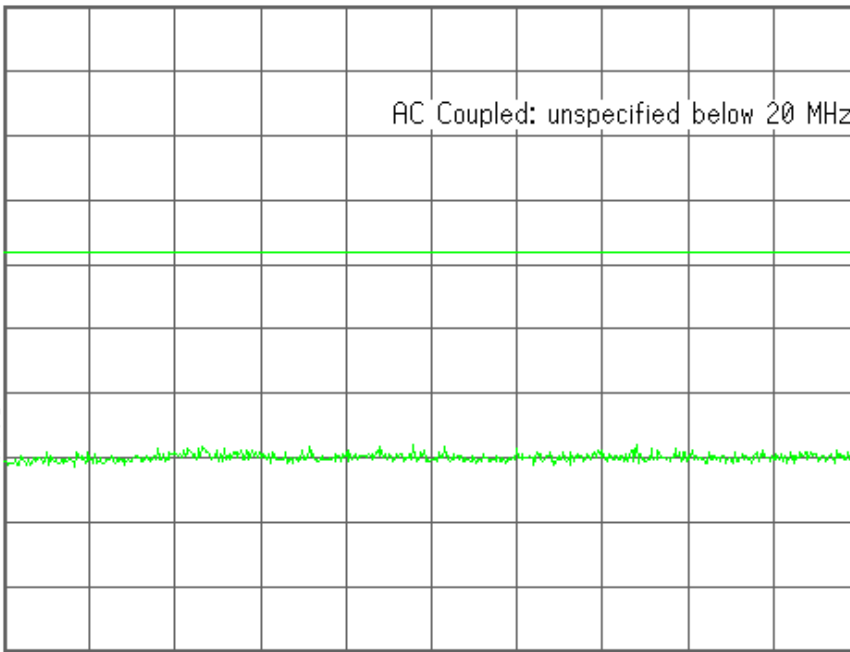

Start 10 MHz

Stop 1.705 GHz

#Res BW 1 MHz

VBW 1 MHz

Sweep 2.84 ms (601 pts)

Center Freq  
857.500000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
1.70500000 GHz

CF Step  
169.500000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

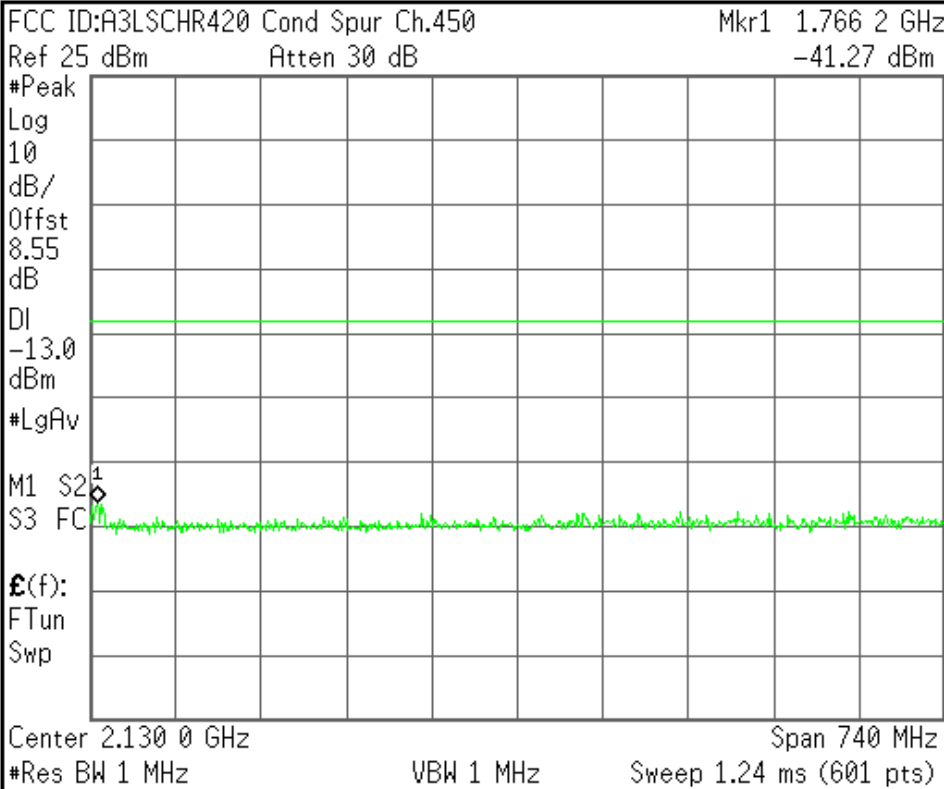

Center Freq  
2.13000000 GHz

Start Freq  
1.76000000 GHz

Stop Freq  
2.50000000 GHz

CF Step  
74.0000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

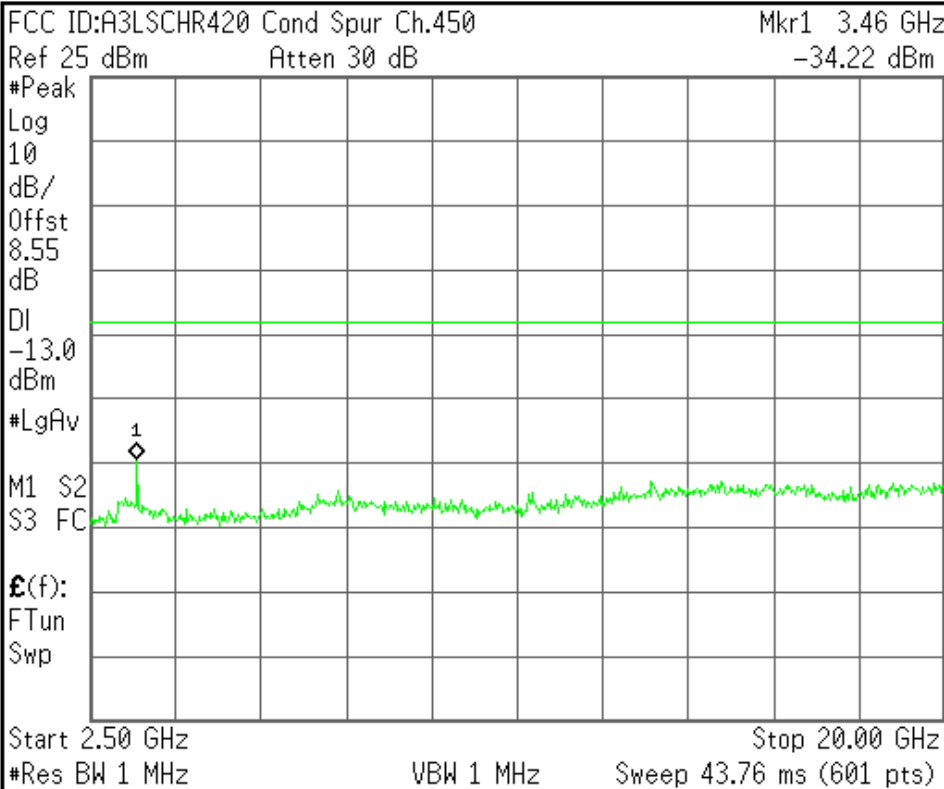

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

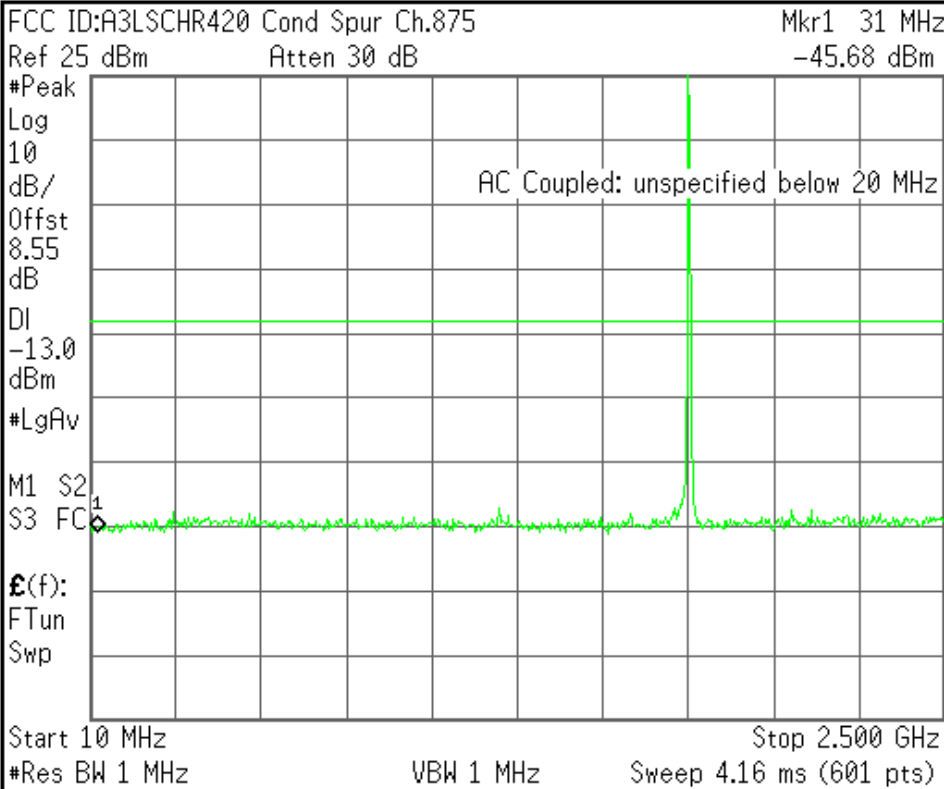

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

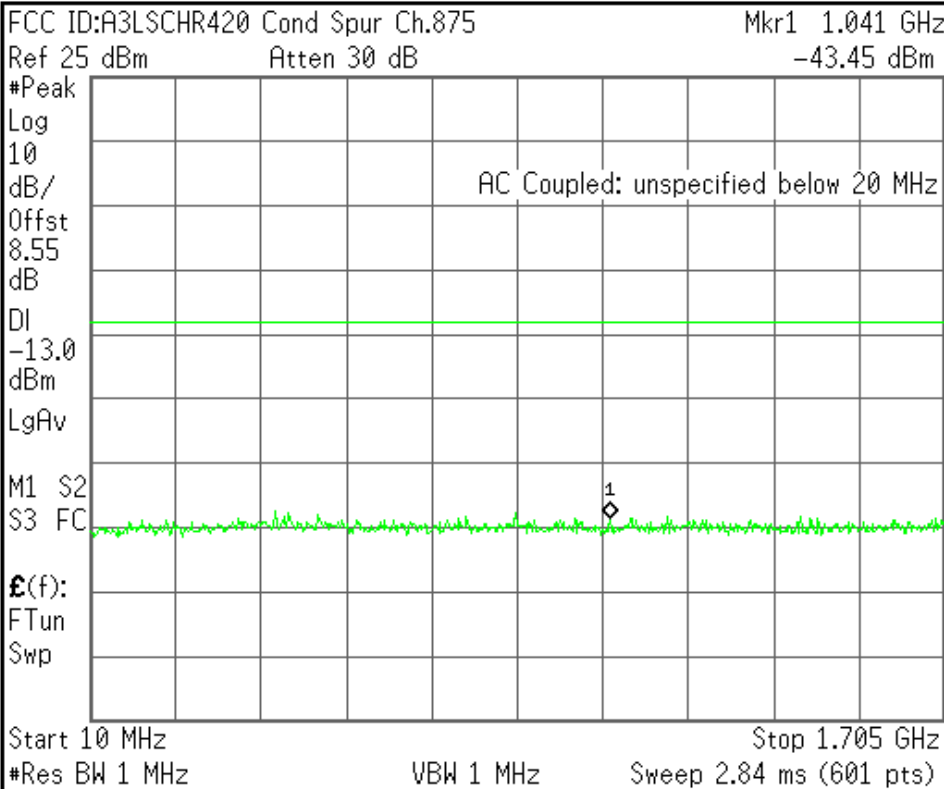

Center Freq  
857.500000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
1.70500000 GHz

CF Step  
169.500000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

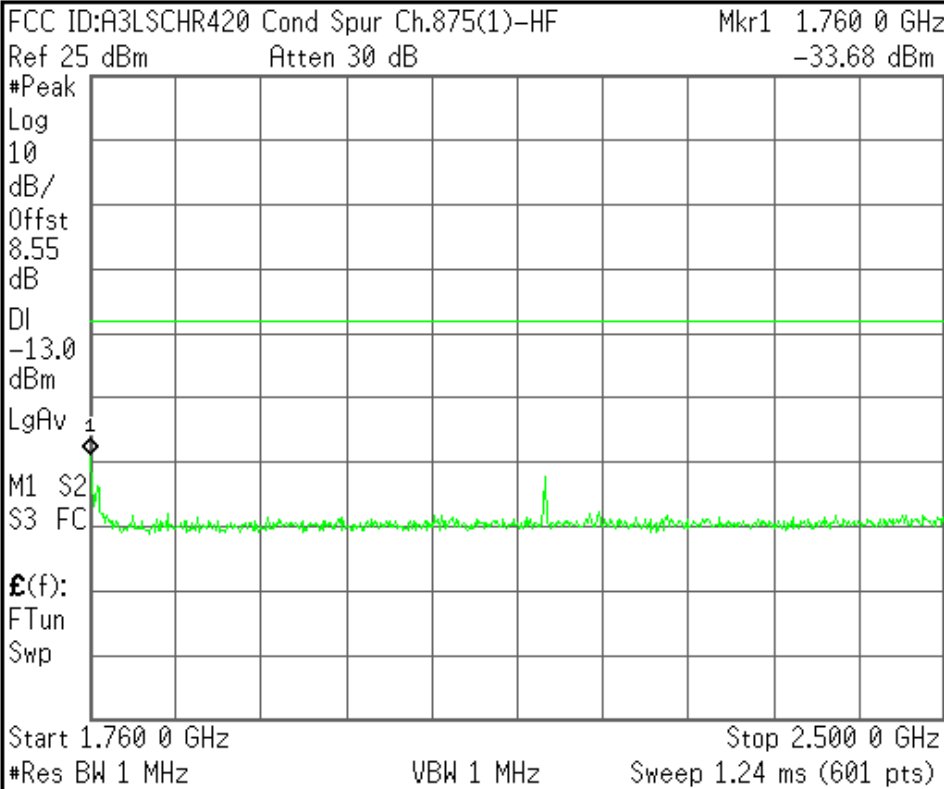


<b>Center Freq</b> 2.13000000 GHz
<b>Start Freq</b> 1.76000000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 74.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

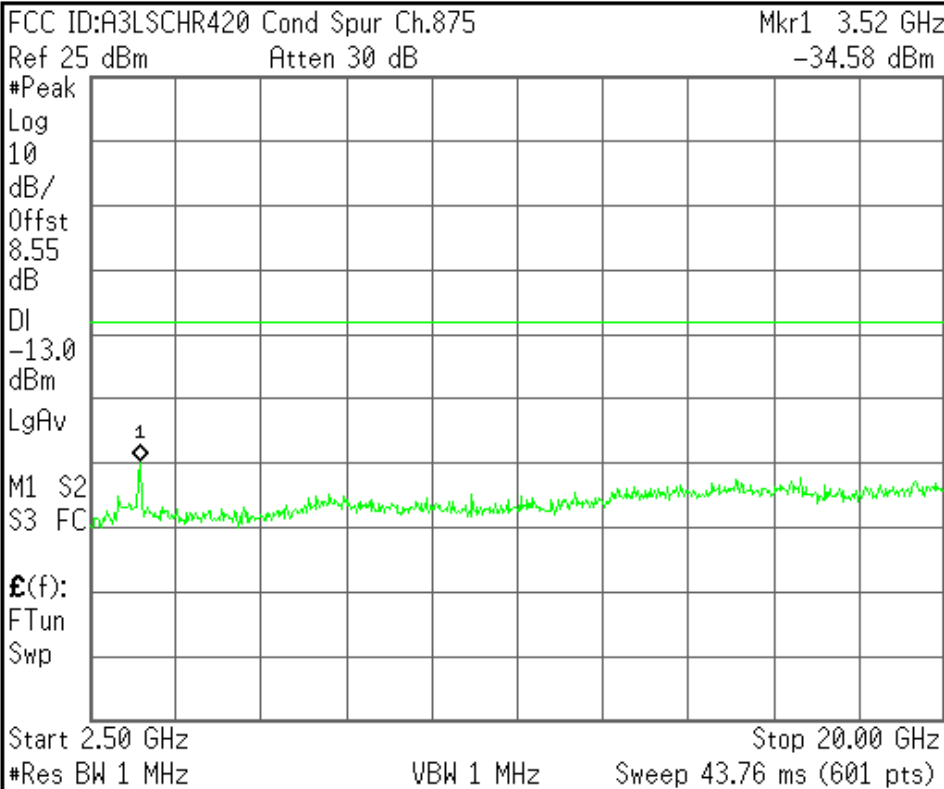


<b>Center Freq</b> 11.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.00000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

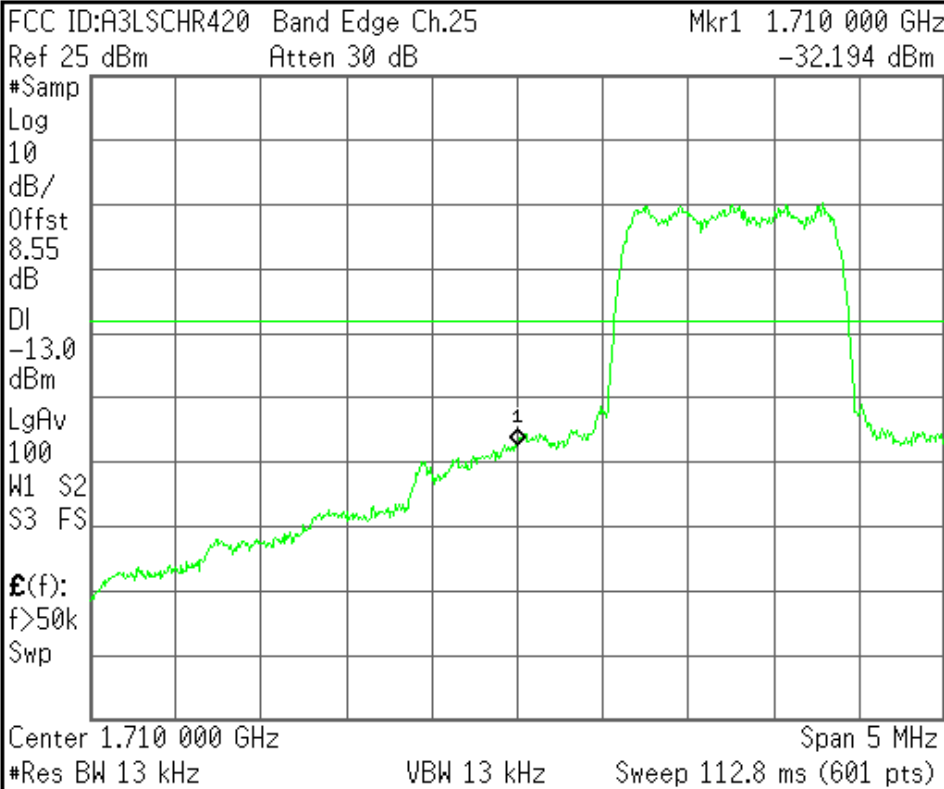

Center Freq  
1.71000000 GHz

Start Freq  
1.70750000 GHz

Stop Freq  
1.71250000 GHz

CF Step  
500.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

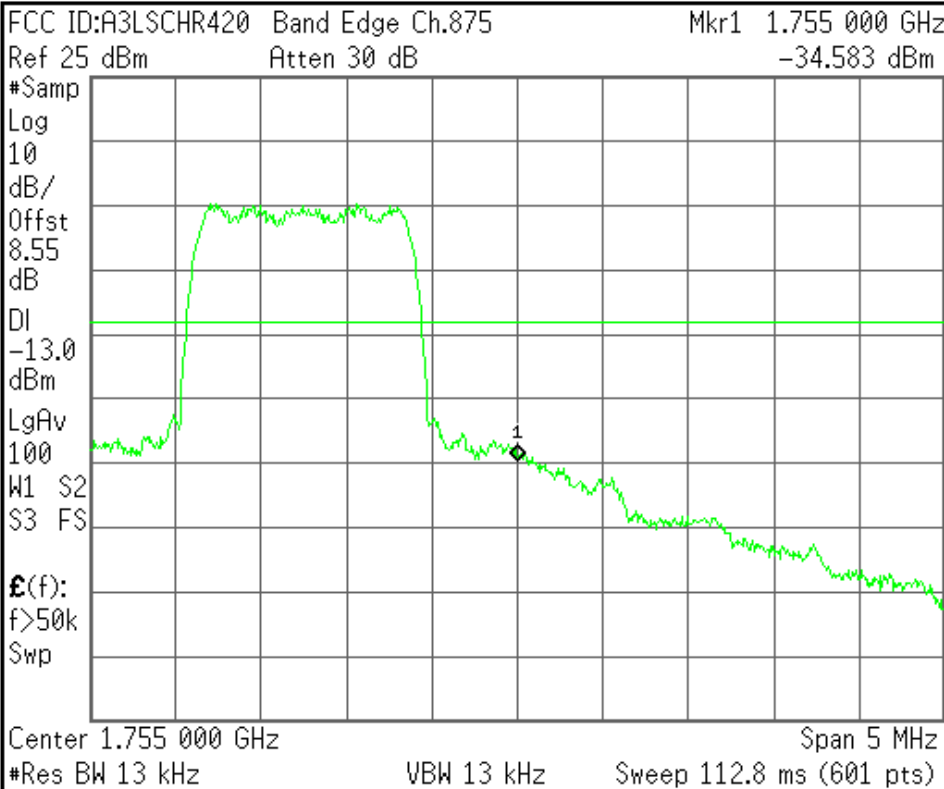

Center Freq  
1.75500000 GHz

Start Freq  
1.75250000 GHz

Stop Freq  
1.75750000 GHz

CF Step  
500.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

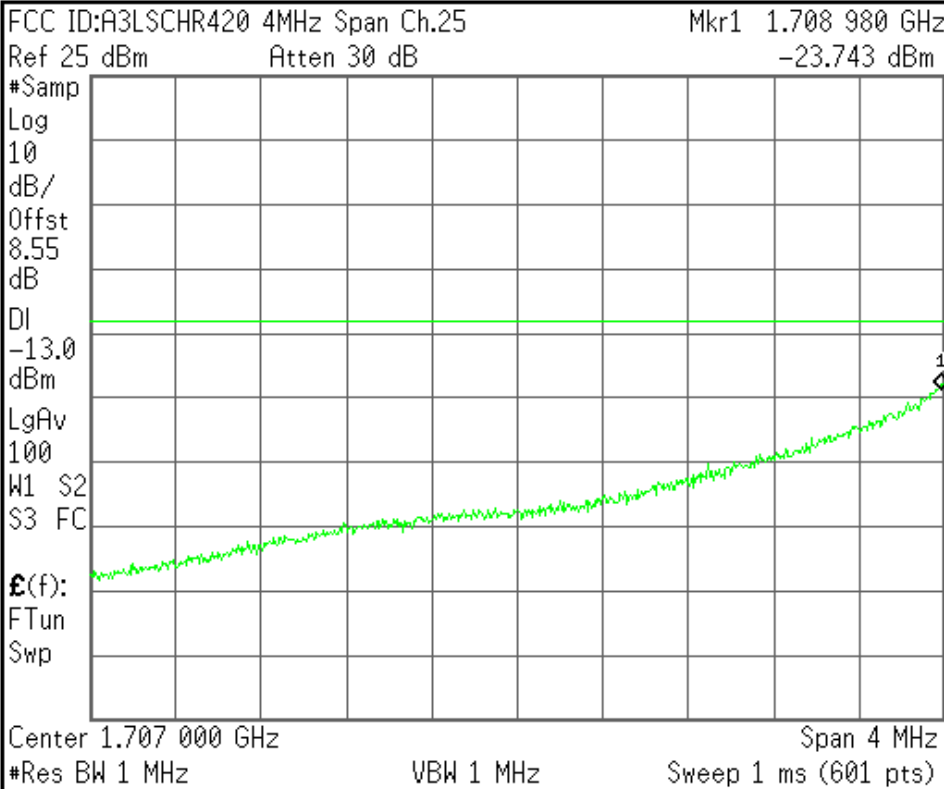

Center Freq  
1.70700000 GHz

Start Freq  
1.70500000 GHz

Stop Freq  
1.70900000 GHz

CF Step  
400.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

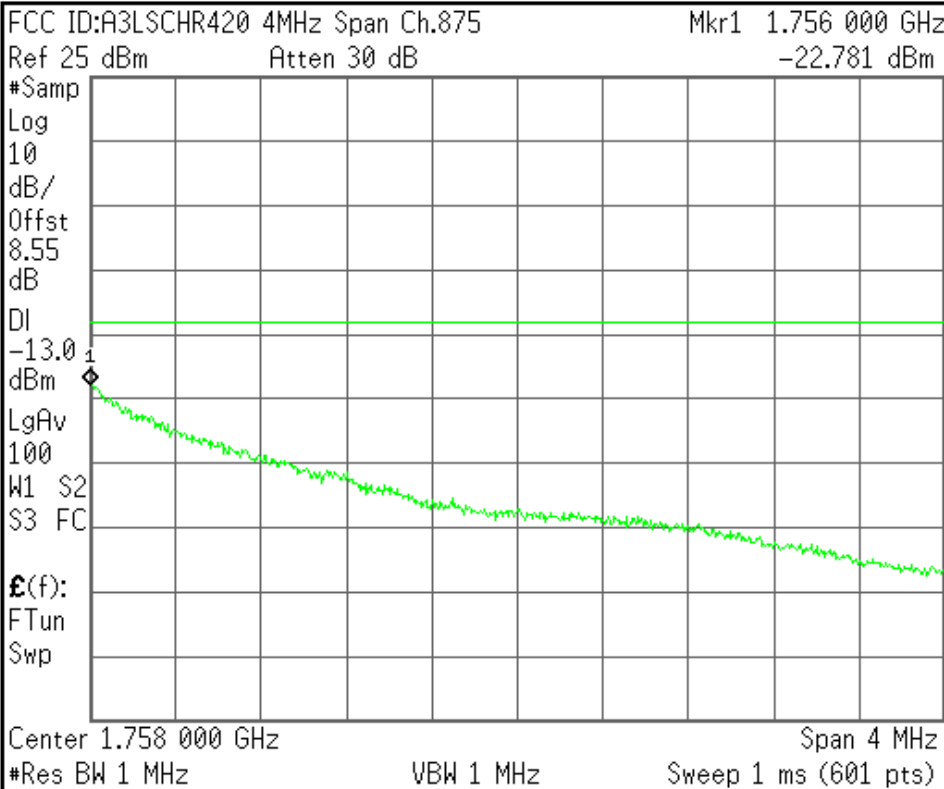

Center Freq  
1.75800000 GHz

Start Freq  
1.75600000 GHz

Stop Freq  
1.76000000 GHz

CF Step  
400.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies