



FCC CFR47 PART 15 SUBPART C

**ANT+
CERTIFICATION TEST REPORT**

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, NFC and ANT+

MODEL NUMBER: SCV32

FCC ID: A3LSCV32

REPORT NUMBER: 15I21858-E6V2

ISSUE DATE: NOVEMBER 13, 2015

**Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

**Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	11/11/15	Initial Issue	P. Zhang
V2	11/13/15	Updated Section 5.3	C. Vergonio

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST.....	7
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>DESCRIPTION OF TEST SETUP</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. <i>99% BANDWIDTH.....</i>	<i>11</i>
7.2. <i>TRANSMITTER RADIATED EMISSIONS.....</i>	<i>14</i>
7.2.1. <i>DUTY CYCLE</i>	<i>16</i>
7.2.2. <i>FUNDAMENTAL FREQUENCY RADIATED EMISSION</i>	<i>17</i>
7.2.3. <i>TRANSMITTER RESTRICTED BAND EDGES</i>	<i>18</i>
7.2.4. <i>SPURIOUS BELOW 1 GHz.....</i>	<i>23</i>
8. SETUP PHOTOS.....	31

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, NFC and ANT+
MODEL: SCV32
SERIAL NUMBER: 2215408 (Radiated), 2215407 (Conducted)
DATE TESTED: SEPTEMBER 28 - 30, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



JONATHAN HSU
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013 FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, NFC and ANT+.

5.2. MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range (MHz)	Mode	Peak E-field Strength (dBuV/m)	Avg E-field Strength (dBuV/m)	Distance (m)
2402 - 2480	ANT +	93.23	92.92	3.00

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -3.02 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	N/A	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is set to continuously transmit in ANT + test mode.

SETUP DIAGRAM FOR TESTS

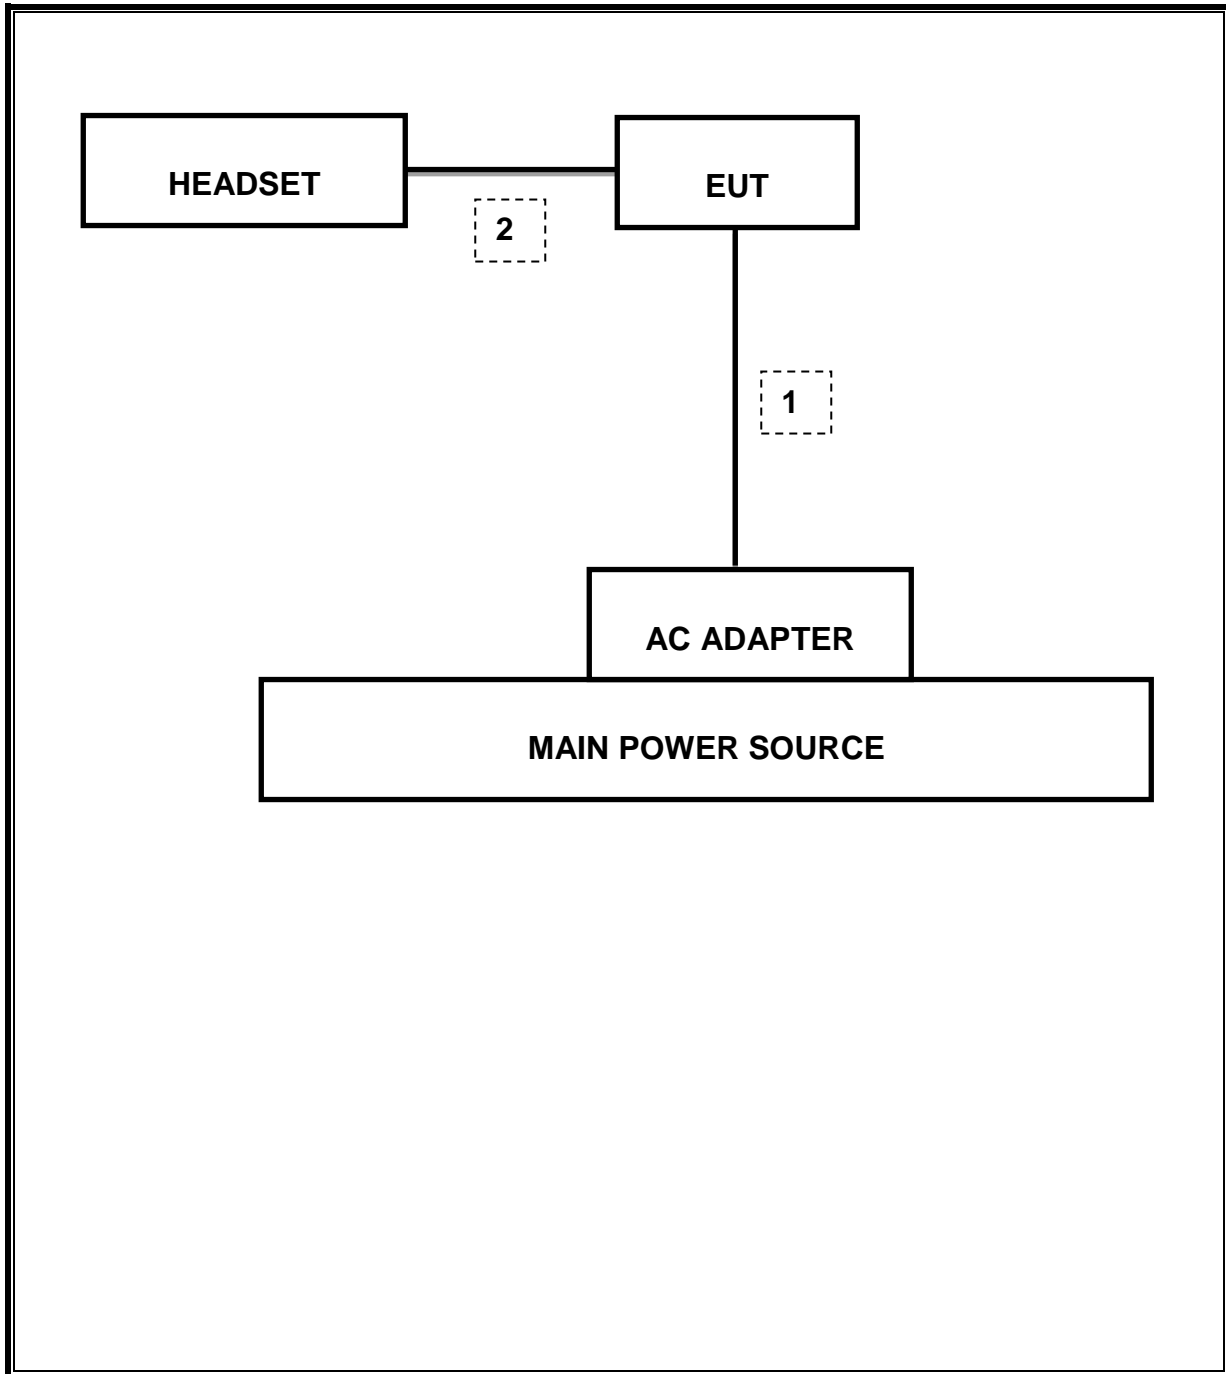

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	C00986	04/01/16
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/16
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/16
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/16
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/16
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/16
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/16
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	T404	06/29/16
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/16
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	F00219	05/23/16
High Pass Filter 6GHz	Micro-Tronics	HPS17542	F00222	05/22/16
High Pass Filter 3GHz	Micro-Tronics	HPM17543	F00224	05/22/16

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. LIMITS AND RESULTS

7.1. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0072
Middle	2442	1.0053
High	2480	1.0081

99% BANDWIDTH

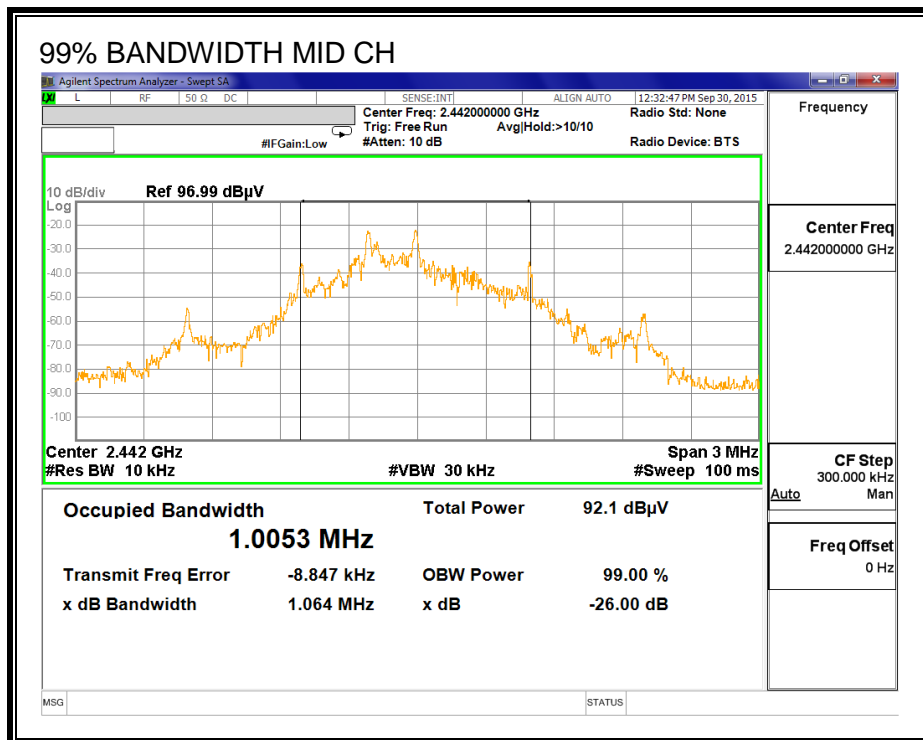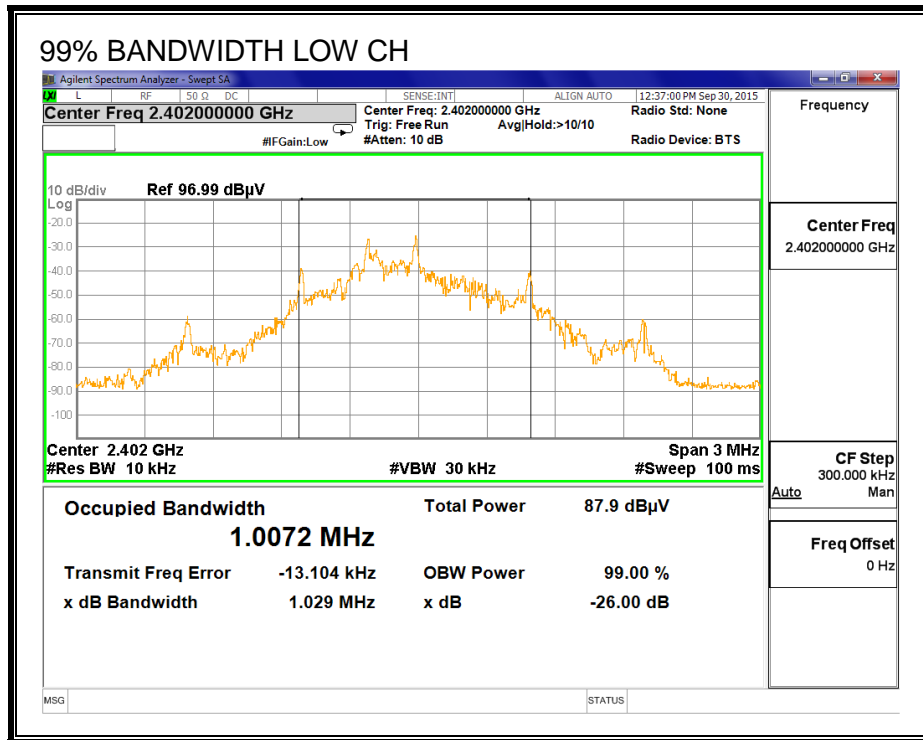

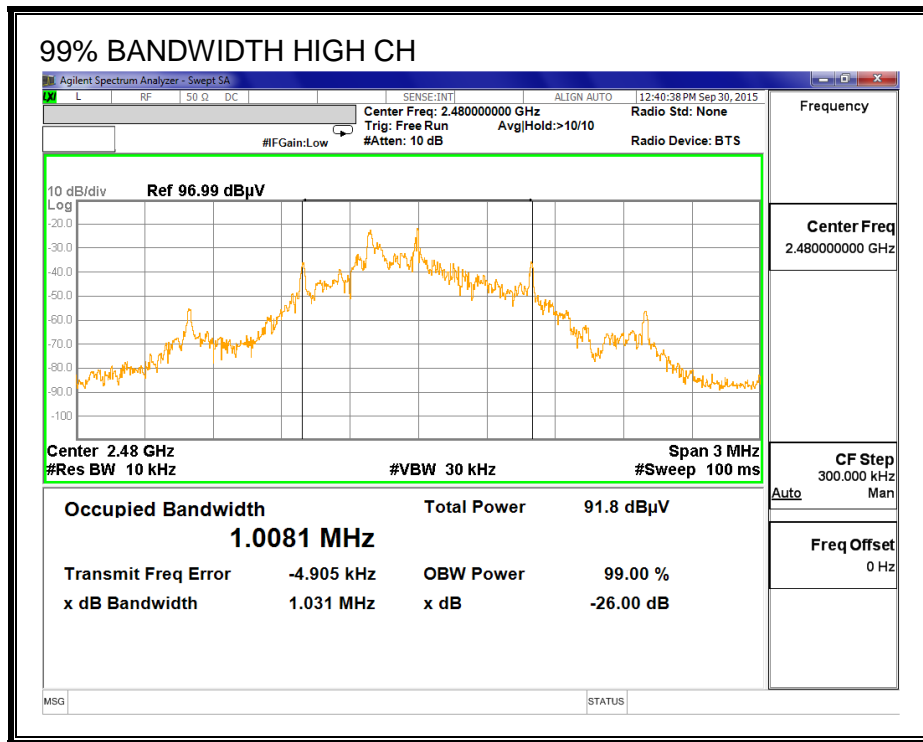

7.2. TRANSMITTER RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.10

LIMIT

FCC 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

RESULTS

7.2.1. DUTY CYCLE

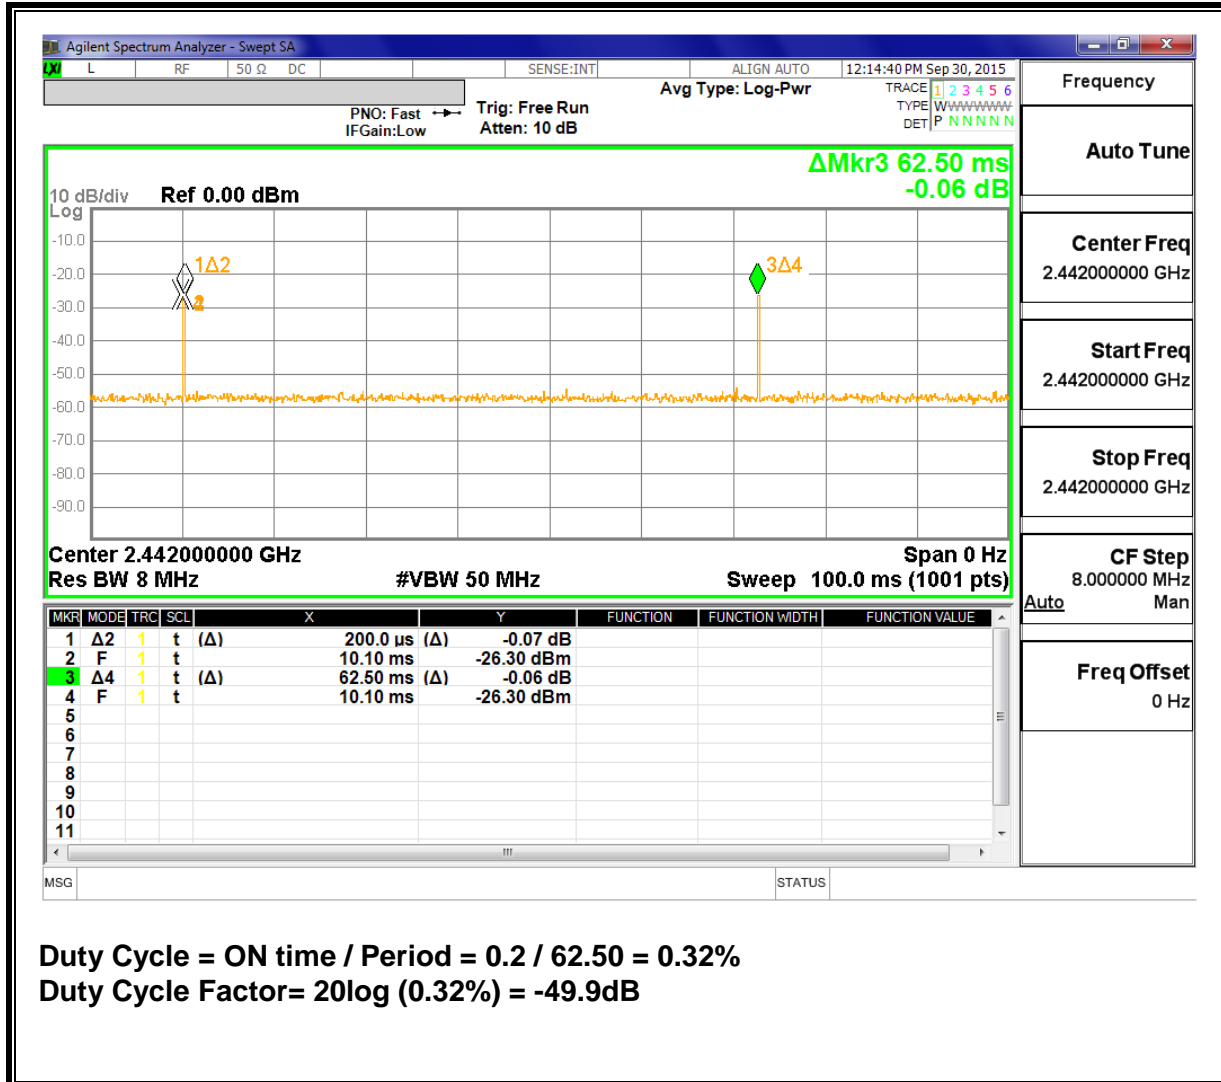

7.2.2. FUNDAMENTAL FREQUENCY RADIATED EMISSION



FCC, VCCI, CISPR, CE, AUSTEL, NZ
 UL, CSA, TUV, BSMI, DHHS, NVLAP
 47173 BENICIA STREET, FREMONT, CA 94538, USA

Project #: 15I21858
Report #: 15I21858
Date & Time: 09/30/15
Test Engr: R. Alegre

Company: SAMSUNG
EUT Description: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, NFC and ANT+
Test Configuration: Position
Type of Test: FCC
Mode of Operation: ANT+

M% = ((t1+t2+t3+...) / T) * 66.83% = 0.32%


Av Reading = Pk Reading + 20*log(M%)
20 * log (M%) = -49.90

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC B	Av Limit FCC B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)
Low channel														
2402.00	95.23	94.92	32.00	-34.00	0.00	93.23	92.92	114.00	94.00	-20.77	-1.08	3mV	0.00	1.00
2402.00	92.26	91.64	32.00	-34.00	0.00	90.26	89.64	114.00	94.00	-23.74	-4.36	3mH	0.00	2.00
Mid channel														
2442.00	86.09	85.92	32.00	-34.00	0.00	84.09	83.92	114.00	94.00	-29.91	-10.08	3mV	0.00	1.00
2442.00	88.38	87.71	32.00	-34.00	0.00	86.38	85.71	114.00	94.00	-27.62	-8.29	3mH	0.00	2.00
High channel														
2480.00	87.84	87.41	32.00	-34.00	0.00	85.84	85.41	114.00	94.00	-28.16	-8.59	3mV	0.00	1.00
2480.00	93.86	93.26	32.00	-34.00	0.00	91.86	91.26	114.00	94.00	-22.14	-2.74	3mH	0.00	2.00

Note: average reading use VB1T method

7.2.3. TRANSMITTER RESTRICTED BAND EDGES

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

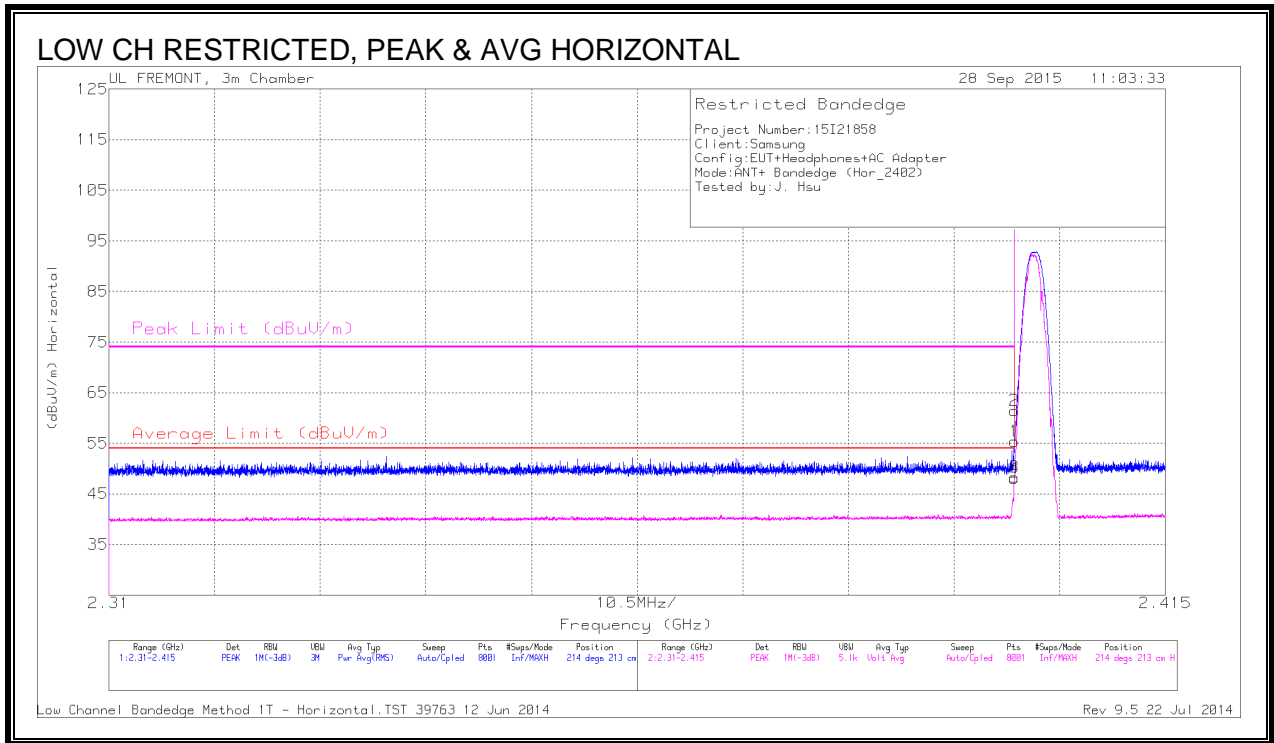


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	45.76	PK	32	-22.4	55.36	-	-	74	-18.64	214	213	H
2	2.4	51.92	PK	32	-22.4	61.52	-	-	74	-12.48	214	213	H
3	2.4	38.76	VB1T	32	-22.4	48.36	54	-5.64	-	-	214	213	H
4	2.4	38.45	VB1T	32	-22.4	48.05	54	-5.95	-	-	214	213	H

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

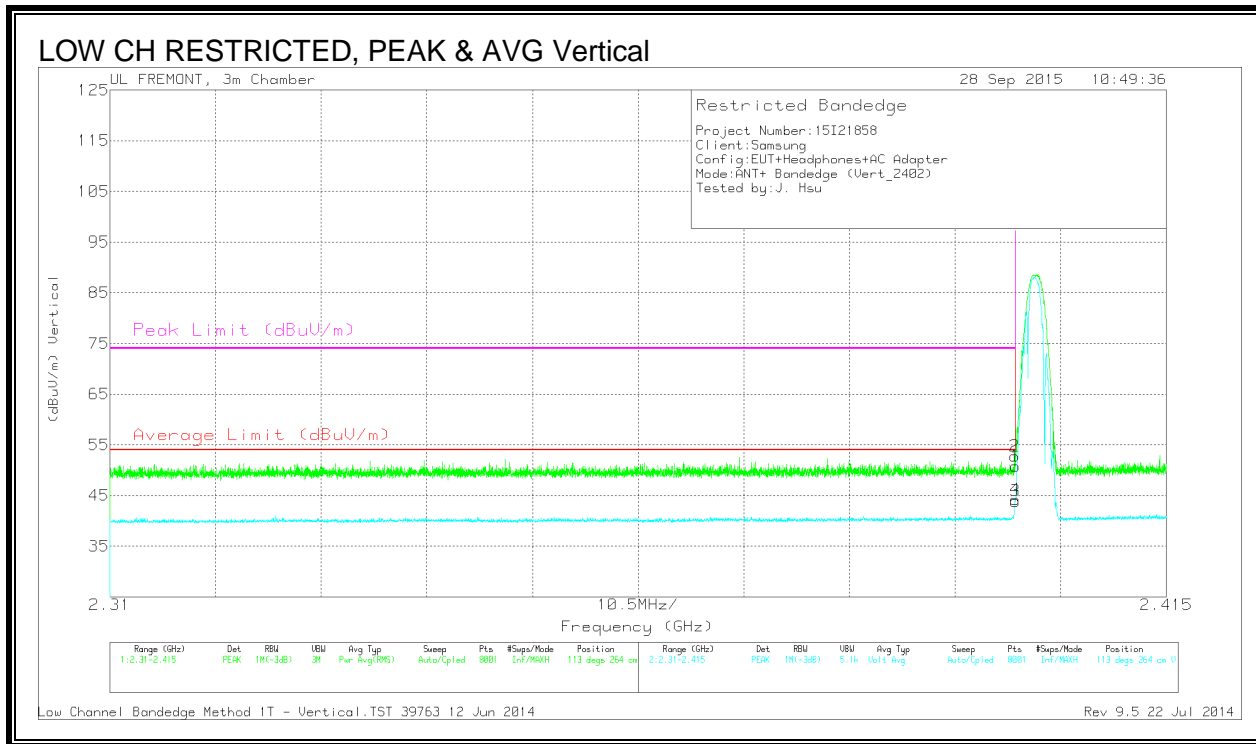


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	41.19	PK	32	-22.4	50.79	-	-	74	-23.21	113	264	V
2	2.4	43.12	PK	32	-22.4	52.72	-	-	74	-21.28	113	264	V
3	2.4	34.3	VB1T	32	-22.4	43.9	54	-10.1	-	-	113	264	V
4	2.4	34.57	VB1T	32	-22.4	44.17	54	-9.83	-	-	113	264	V

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)

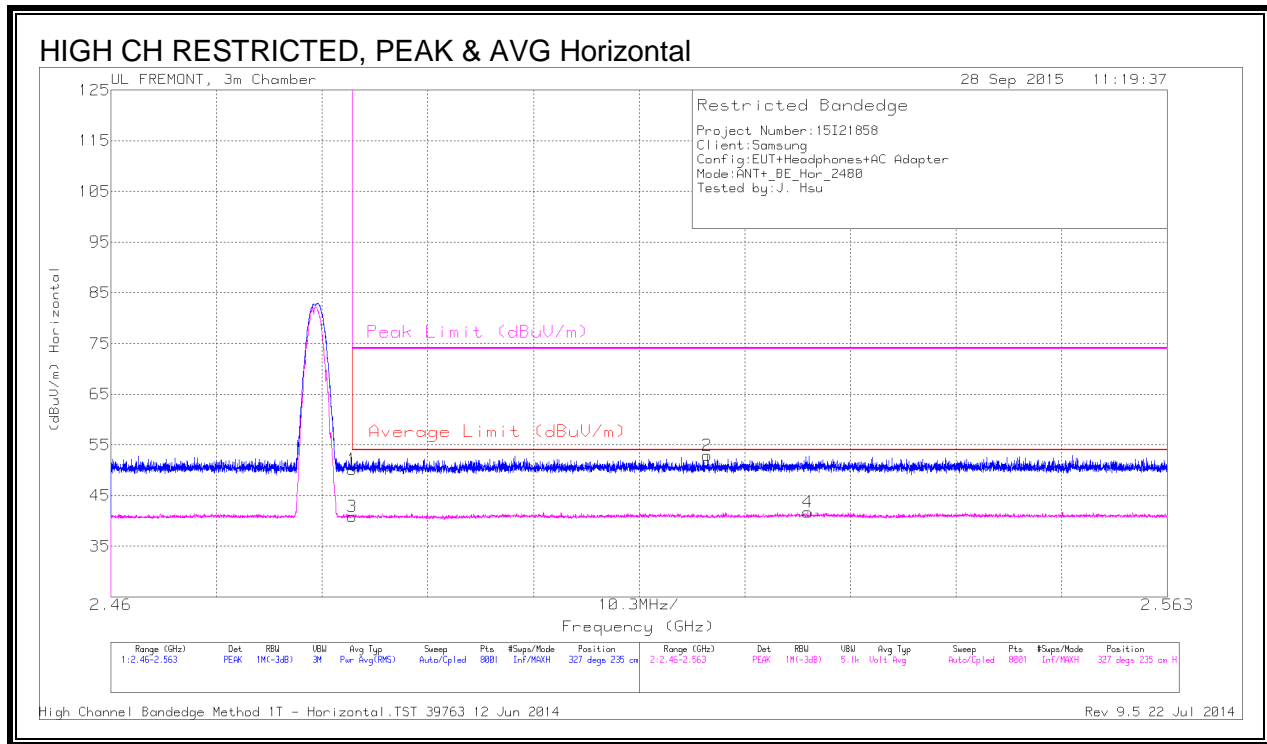


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	40	PK	32.3	-22.1	50.2	-	-	74	-23.8	327	235	H
3	2.484	30.65	VB1T	32.3	-22.1	40.85	54	-13.15	-	-	327	235	H
2	2.518	42.69	PK	32.3	-22.1	52.89	-	-	74	-21.11	327	235	H
4	2.528	31.3	VB1T	32.4	-22	41.7	54	-12.3	-	-	327	235	H

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

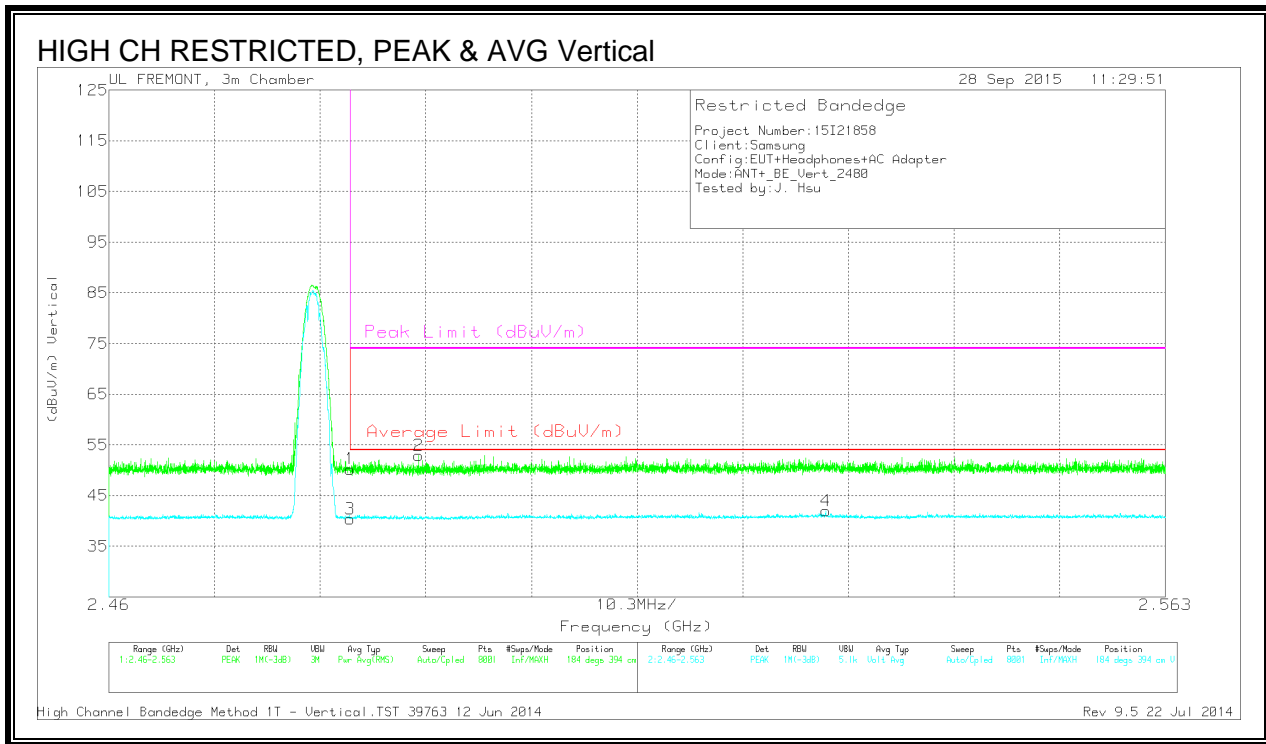

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	40.03	PK	32.3	-22.1	50.23	-	-	74	-23.77	184	394	V
3	2.484	30.21	VB1T	32.3	-22.1	40.41	54	-13.59	-	-	184	394	V
2	2.49	42.81	PK	32.3	-22.2	52.91	-	-	74	-21.09	184	394	V
4	2.53	31.54	VB1T	32.4	-22	41.94	54	-12.06	-	-	184	394	V

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

HARMONICS



FCC, VCCI, CISPR, CE, AUSTEL, NZ
 UL, CSA, TUV, BSMI, DHHS, NVLAP
 47173 BENICIA STREET, FREMONT, CA 94538, USA

Project #: 15I21858
Report #: 15I21858
Date & Time: 09/30/15
Test Engr: R. Alegre

Company: SAMSUNG
EUT Description: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, NFC and ANT+
Test Configuration: X Position
Type of Test: FCC
Mode of Operation: ANT+

M% = ((t1+t2+t3+...)/T) * 66.83% = 0.32%


Av Reading = Pk Reading + 20*log(M%)
20 * log (M%) = -49.90

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC B	Av Limit FCC B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)
Low channel														
4804.00	41.06	31.91	34.00	-32.54	0.00	42.52	33.37	74.00	54.00	-31.48	-20.63	3mV	0.00	1.00
4804.00	40.80	31.76	34.00	-32.54	0.00	42.26	33.22	74.00	54.00	-31.74	-20.78	3mH	0.00	2.00
Mid channel														
4884.00	42.43	31.97	34.00	-32.54	0.00	43.89	33.43	74.00	54.00	-30.11	-20.57	3mV	0.00	1.00
4884.00	41.33	31.95	34.00	-32.54	0.00	42.79	33.41	74.00	54.00	-31.21	-20.59	3mH	0.00	2.00
High channel														
4960.00	41.07	32.78	34.00	-32.54	0.00	42.53	34.24	74.00	54.00	-31.47	-19.76	3mV	0.00	1.00
4960.00	41.39	32.25	34.00	-32.54	0.00	42.85	33.71	74.00	54.00	-31.15	-20.29	3mH	0.00	2.00


Note: Average reading get from max hold with reduce VBW method.

7.2.4. SPURIOUS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

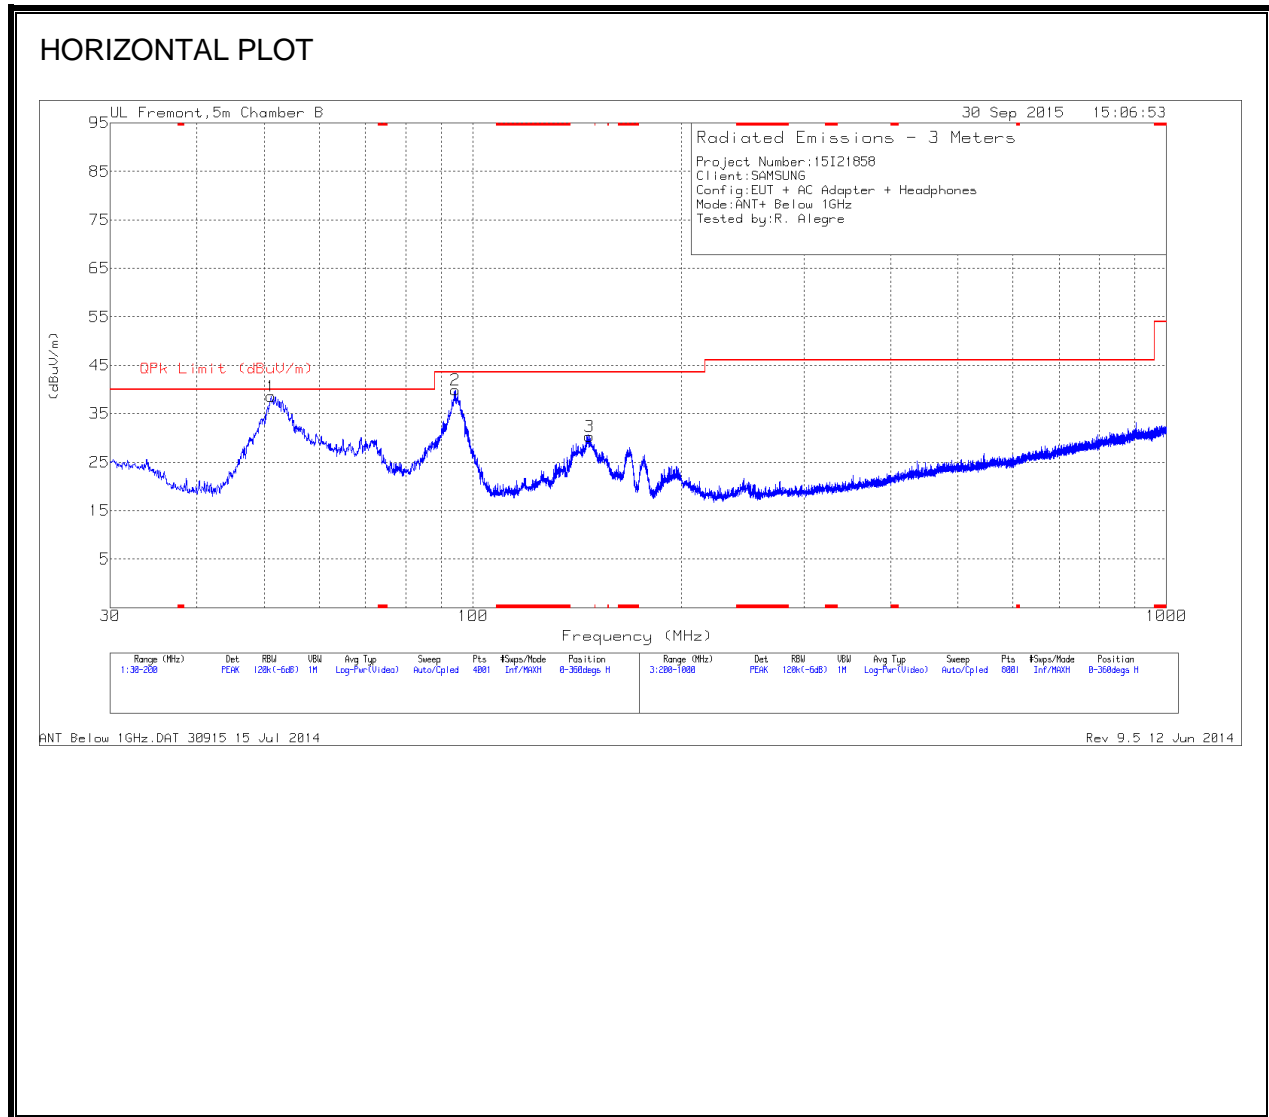

SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

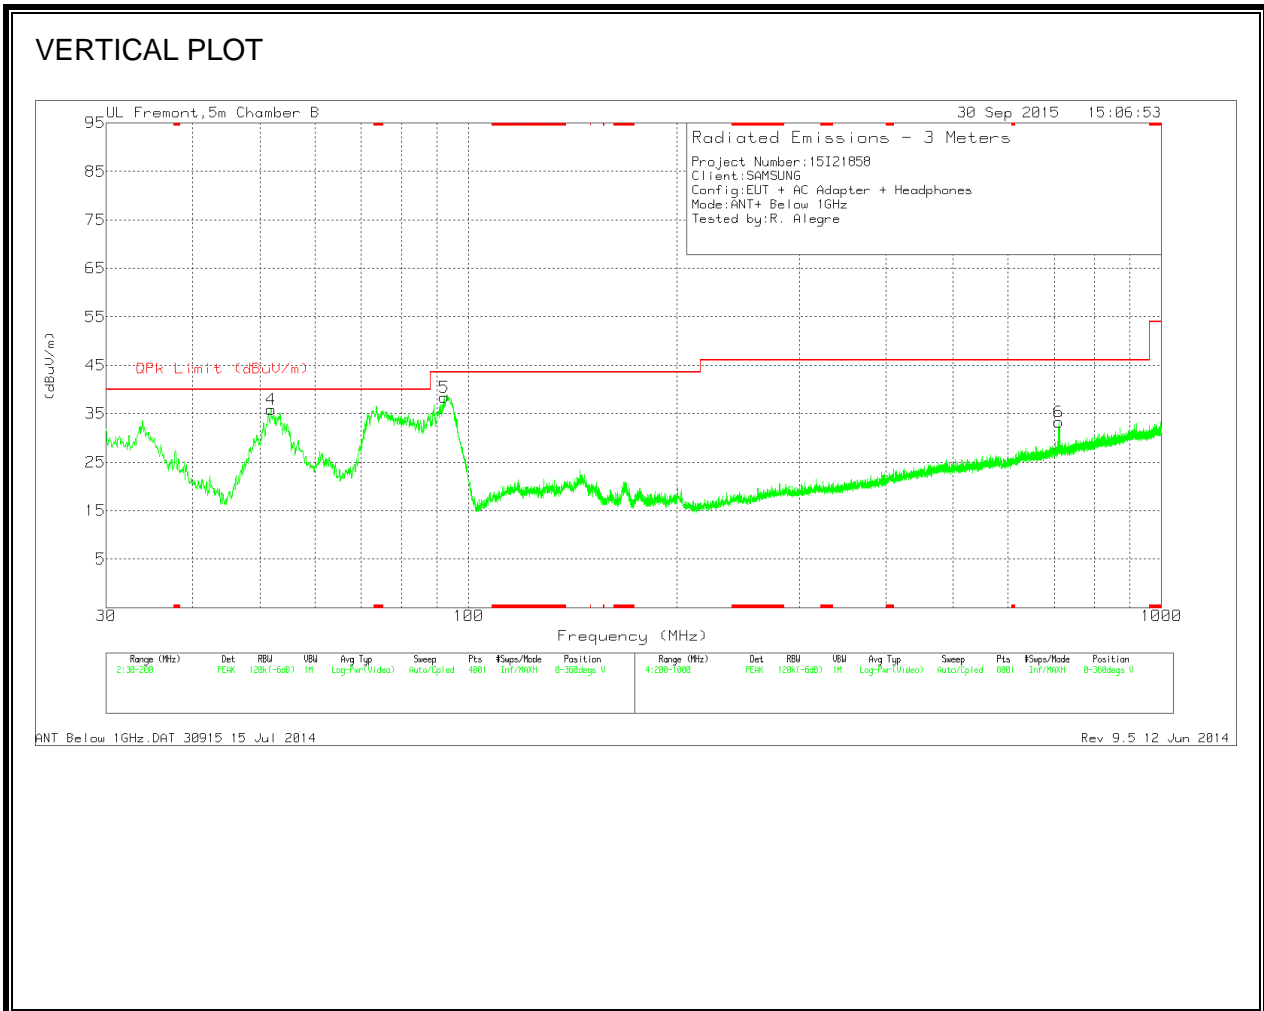

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	51.165	55.89	Pk	11.3	-28.6	38.59	40	-1.41	0-360	299	H
4	51.845	53.41	Pk	11.1	-28.6	35.91	40	-4.09	0-360	101	V
5	92.22	54.4	Pk	12.2	-28.2	38.4	43.52	-5.12	0-360	101	V
2	94.3025	55.28	Pk	12.7	-28.1	39.88	43.52	-3.64	0-360	199	H
3	147.2575	41.33	Pk	16.6	-27.6	30.33	43.52	-13.19	0-360	199	H
6	710.6	34.31	Pk	24.2	-25.2	33.31	46.02	-12.71	0-360	101	V

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
51.2764	42.61	Qp	11.2	-28.5	25.31	40	-14.69	333	290	H

Qp - Quasi-Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 15 Jul 2014

Rev 9.5 24 Jun 2015

AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.10 - 2013

RESULTS

6 WORST EMISSIONS

LINE 1 RESULTS

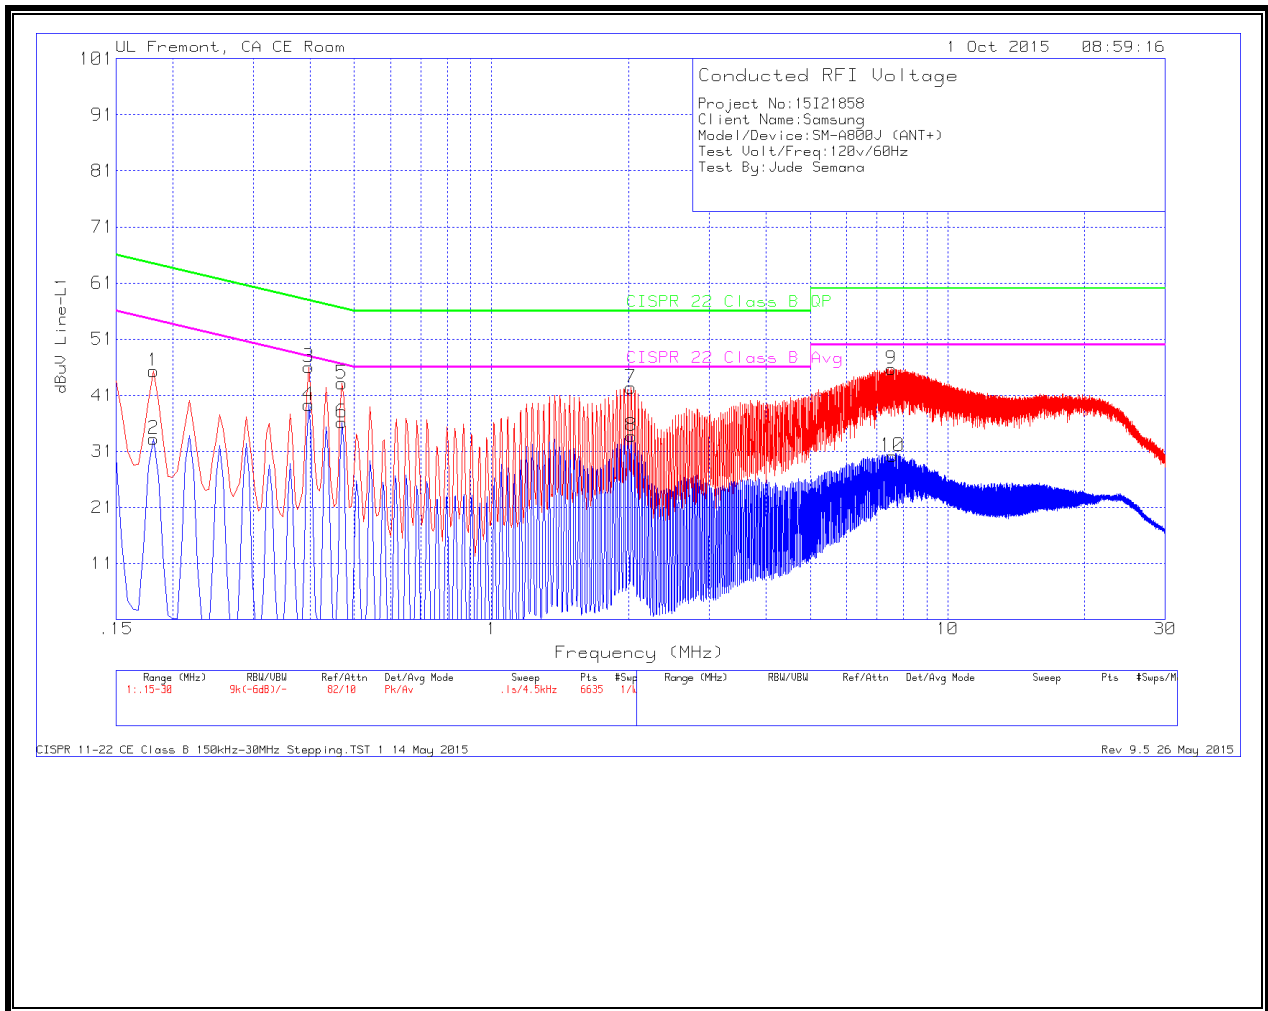


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.1815	44.23	Pk	1.1	0	45.33	64.42	-19.09		
2	.1815	32.11	Av	1.1	0	33.21	-	-	54.42	-21.21
3	.3975	45.63	Pk	.4	0	46.03	57.91	-11.88		
4	.3975	38.85	Av	.4	0	39.25	-	-	47.91	-8.66
5	.4695	42.71	Pk	.4	0	43.11	56.52	-13.41		
6	.4695	35.75	Av	.4	0	36.15	-	-	46.52	-10.37
7	2.022	42.06	Pk	.2	.1	42.36	56	-13.64		
8	2.0265	33.42	Av	.2	.1	33.72	-	-	46	-12.28
9	7.53	45.42	Pk	.2	.1	45.72	60	-14.28		
10	7.5705	29.84	Av	.2	.1	30.14	-	-	50	-19.86

Pk - Peak detector

Av - Average detection

LINE 2 RESULTS

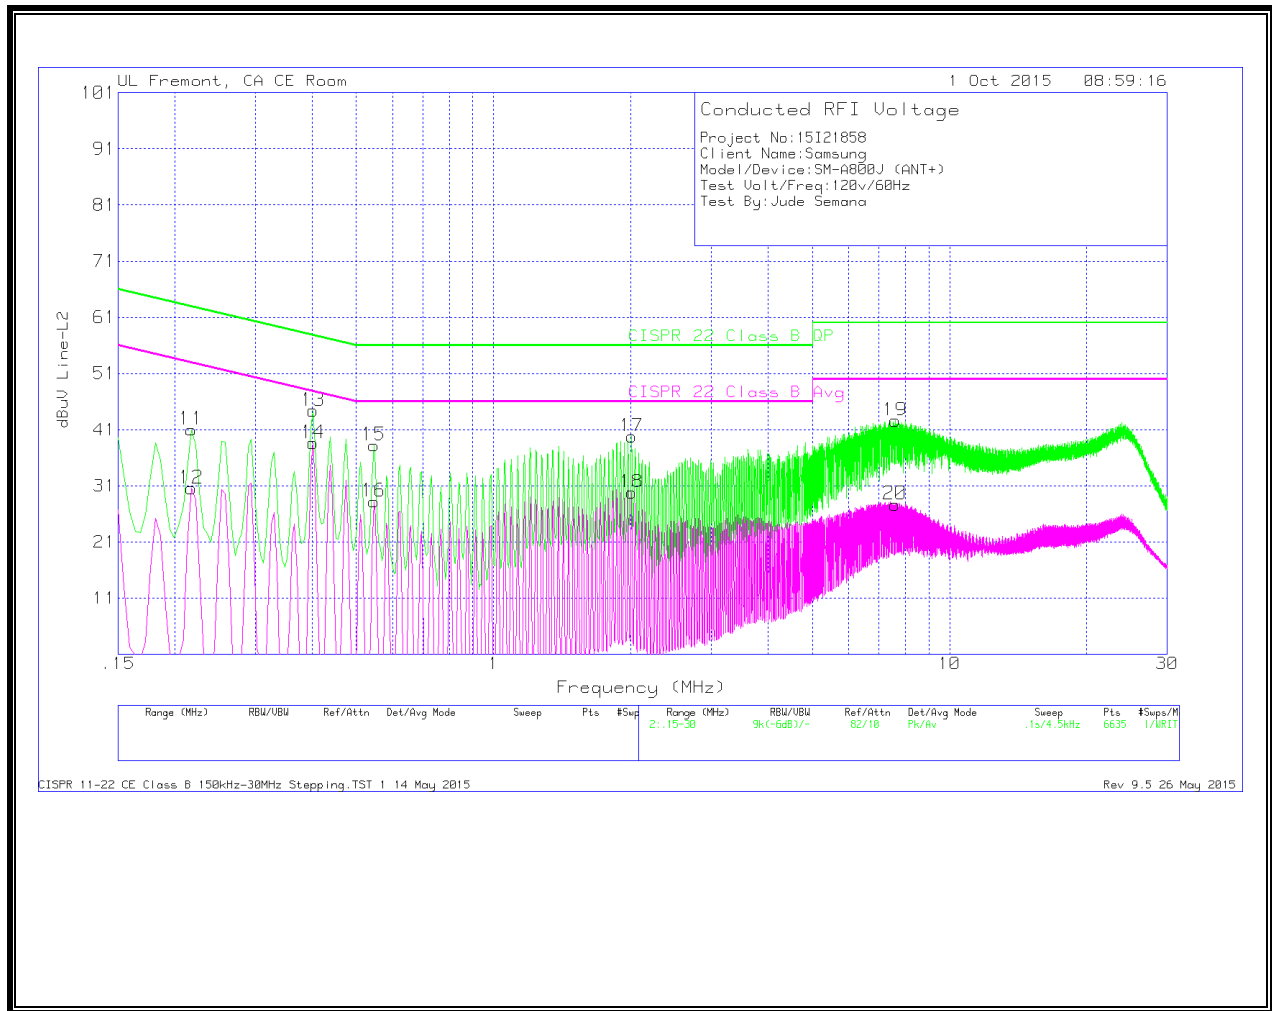

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
11	.2175	40.11	Pk	.9	0	41.01	62.91	-21.9		
12	.2175	29.65	Av	.9	0	30.55	-	-	52.91	-22.36
13	.402	43.98	Pk	.4	0	44.38	57.81	-13.43		
14	.402	38.22	Av	.4	0	38.62	-	-	47.81	-9.19
15	.546	37.91	Pk	.3	0	38.21	56	-17.79		
16	.546	27.92	Av	.3	0	28.22	-	-	46	-17.78
17	2.0085	39.49	Pk	.2	.1	39.79	56	-16.21		
18	2.0085	29.54	Av	.2	.1	29.84	-	-	46	-16.16
19	7.602	42.31	Pk	.2	.1	42.61	60	-17.39		
20	7.5885	27.39	Av	.2	.1	27.69	-	-	50	-22.31

Pk - Peak detector

Av - Average detection