

FCC DTS REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: April 15, 2019
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-1904-FC024

FCC ID: A3LSCV43

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SCV43
EUT Type: Mobile Phone
Average Output Power: 802.11b : 18.31 dBm
802.11g : 16.19 dBm
802.11n(HT20) : 16.29 dBm
Frequency Range: 2412 MHz - 2472 MHz
Modulation type: CCK/DSSS/OFDM
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.



Report prepared by : Jung Ki Lim
Engineer of Telecommunication testing center



Approved by : Kwon Jeong
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1904-FC024	April 15, 2019	- First Approval Report

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	5
GENERAL TEST PROCEDURES	5
DESCRIPTION OF TEST MODES	5
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS	6
FACILITIES	6
EQUIPMENT	6
5. ANTENNA REQUIREMENTS	6
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS.....	8
8. SUMMARY TEST OF RESULTS	23
9. TEST RESULT	24
9.1 DUTY CYCLE.....	24
9.2 6dB BANDWIDTH.....	27
9.3 OUTPUT POWER	30
9.4 POWER SPECTRAL DENSITY	36
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	39
9.6 RADIATED SPURIOUS EMISSIONS	53
9.7 RADIATED RESTRICTED BAND EDGES	61
9.8 POWERLINE CONDUCTED EMISSIONS	72
10. LIST OF TEST EQUIPMENT	76
11. ANNEX A_ TEST SETUP PHOTO	78

1. EUT DESCRIPTION

Model	SCV43
EUT Type	Mobile Phone
Power Supply	DC 3.85 V
Battery Information	Model: EB-BA505ABU Type: Li-ion battery
Travel Adapter Information	Model : EP-TA200 Manufacture: SOLU M
Frequency Range	2412 MHz - 2472 MHz
Max. RF Output Power	Peak Power (For information only) 802.11b : 24.14 dBm 802.11g : 24.32 dBm 802.11n(HT20) : 24.18 dBm Average Power 802.11b : 18.31 dBm 802.11g : 16.19 dBm 802.11n(HT20) : 16.29 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	13 Channels
Antenna Specification	Antenna type: Internal Antenna Peak Gain : -1.40 dBi
Date(s) of Tests	March 22, 2019 ~ April 08, 2019

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

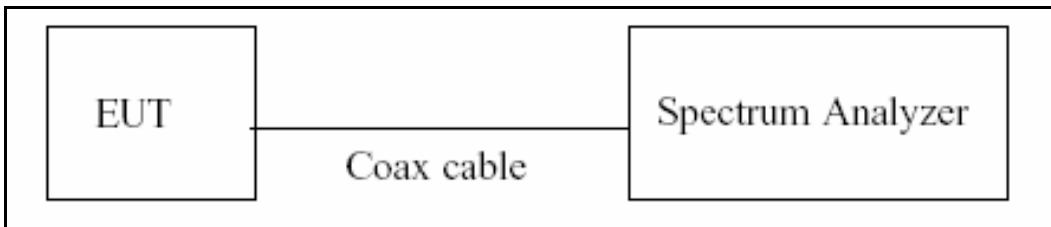

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	21.06
100	19.59
200	19.95
300	19.89
400	19.99
500	20.01
600	20.08
700	20.11
800	20.11
900	20.1
1000	20.15
2000	20.4
2400*	20.31
2500*	20.33
3000	20.44
4000	20.65
5000	20.59
6000	20.62
7000	21.11
8000	21.08
9000	21.24
10000	21.32
11000	21.32
12000	21.44
13000	21.59
14000	21.66
15000	21.74
16000	21.8
17000	21.78
18000	21.84
19000	21.83
20000	21.9
21000	21.93
22000	22.07
23000	22.36
24000	22.1
25000	22.29
26000	21.78

Note : 1. '*' is fundamental frequency range.
 2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

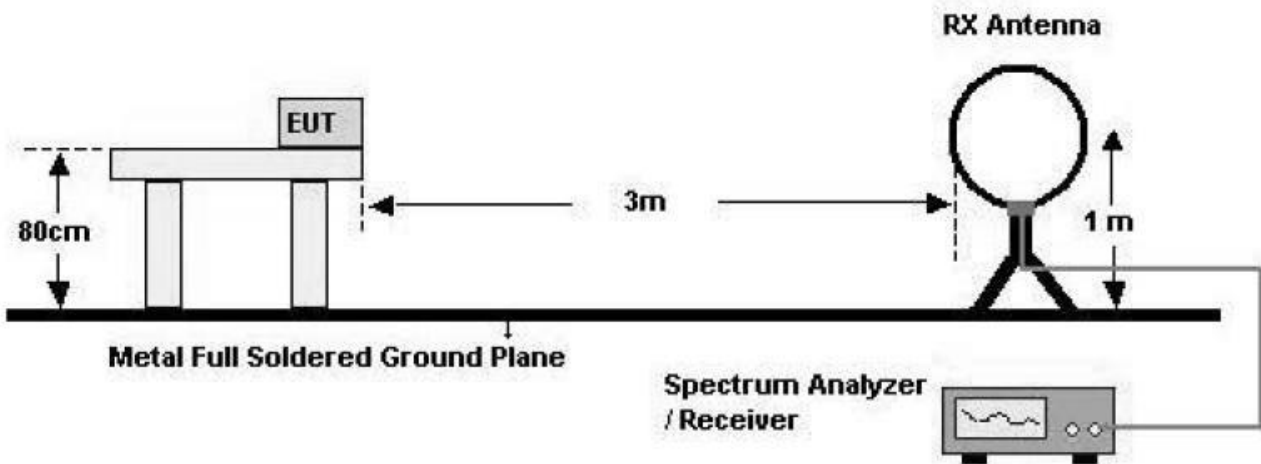

30 MHz - 1 GHz

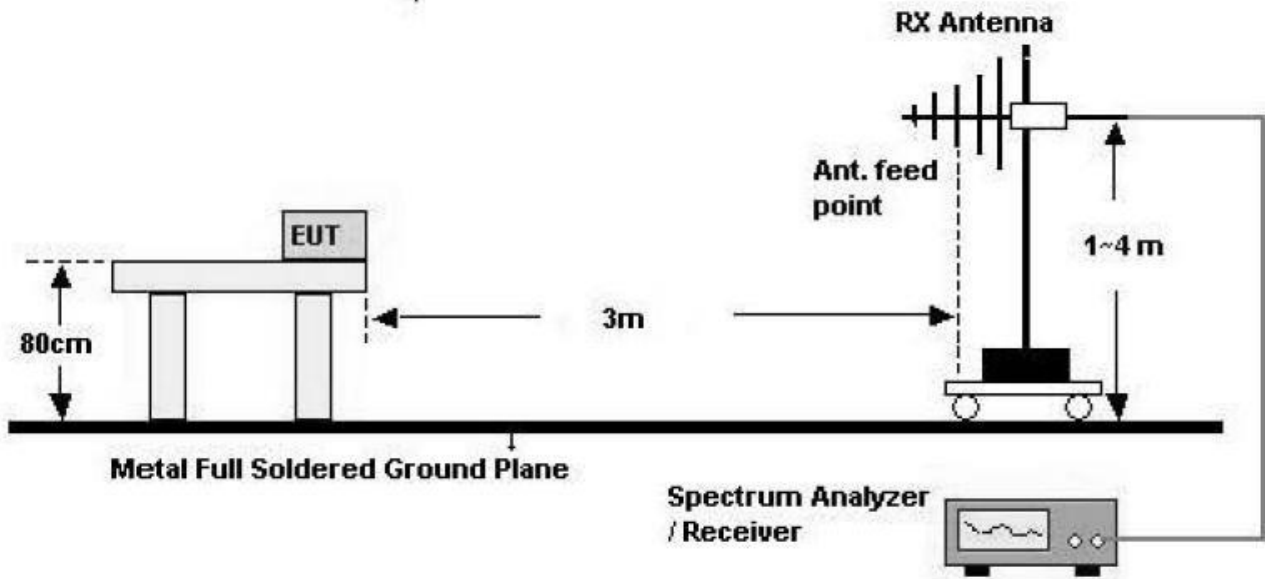

Above 1 GHz

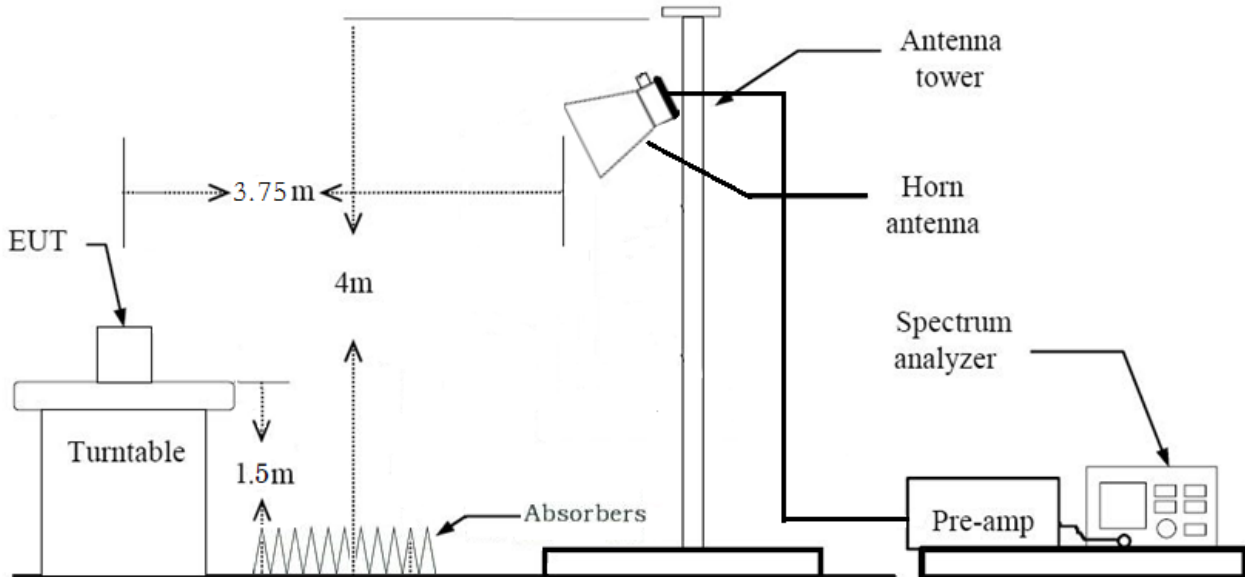

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. The test results for below 30 MHz is correlated to an open site.
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq 3 \cdot$ RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

*In general, (1) is used mainly
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit

in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n_HT20 : MCS0

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.613	8.643	0.997	0.015
	2	4.397	4.437	0.991	0.039
	5.5	1.722	1.752	0.983	0.075
	11	0.957	0.988	0.969	0.136
802.11g	6	1.428	1.503	0.950	0.222
	9	0.964	1.056	0.913	0.398
	12	0.725	0.819	0.886	0.526
	18	0.494	0.607	0.814	0.892
	24	0.374	0.487	0.768	1.146
	36	0.259	0.352	0.735	1.334
	48	0.199	0.311	0.638	1.950
	54	0.183	0.295	0.619	2.086
802.11n (HT20)	6.5 (MCS0)	1.340	1.411	0.949	0.226
	13 (MCS1)	0.690	0.784	0.880	0.555
	19.5 (MCS2)	0.474	0.567	0.836	0.776
	26 (MCS3)	0.366	0.459	0.797	0.985
	39 (MCS4)	0.259	0.371	0.697	1.569
	52 (MCS5)	0.203	0.315	0.643	1.919
	58.5 (MCS6)	0.187	0.299	0.624	2.050
	65 (MCS7)	0.171	0.283	0.602	2.201

■ Test Plots


Duty cycle plot (802.11b(1Mbps))

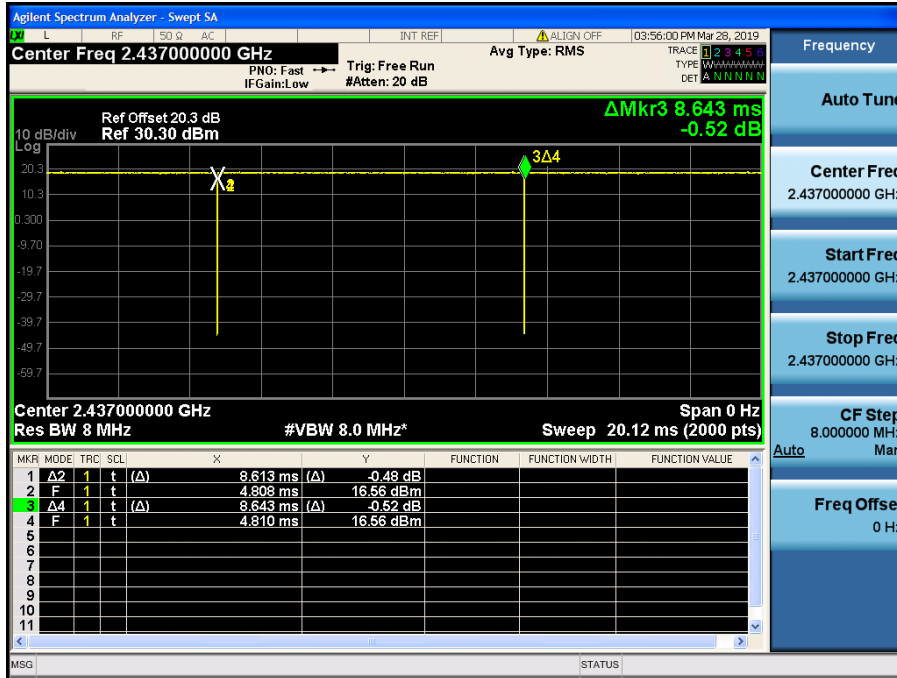

Duty cycle plot (802.11g(6Mbps))

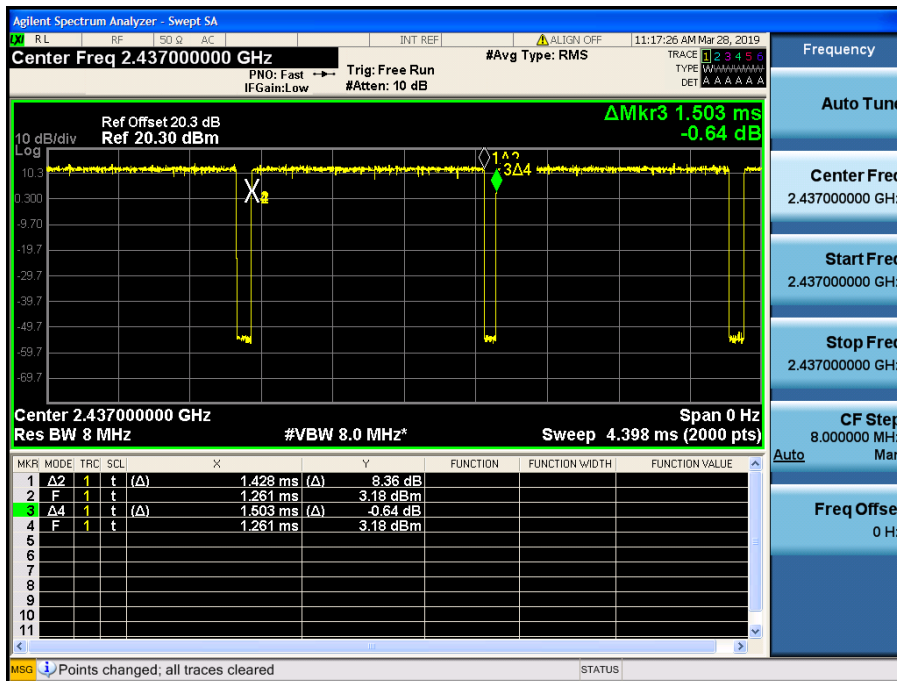

Duty cycle plot (802.11n_HT20(MCS0))

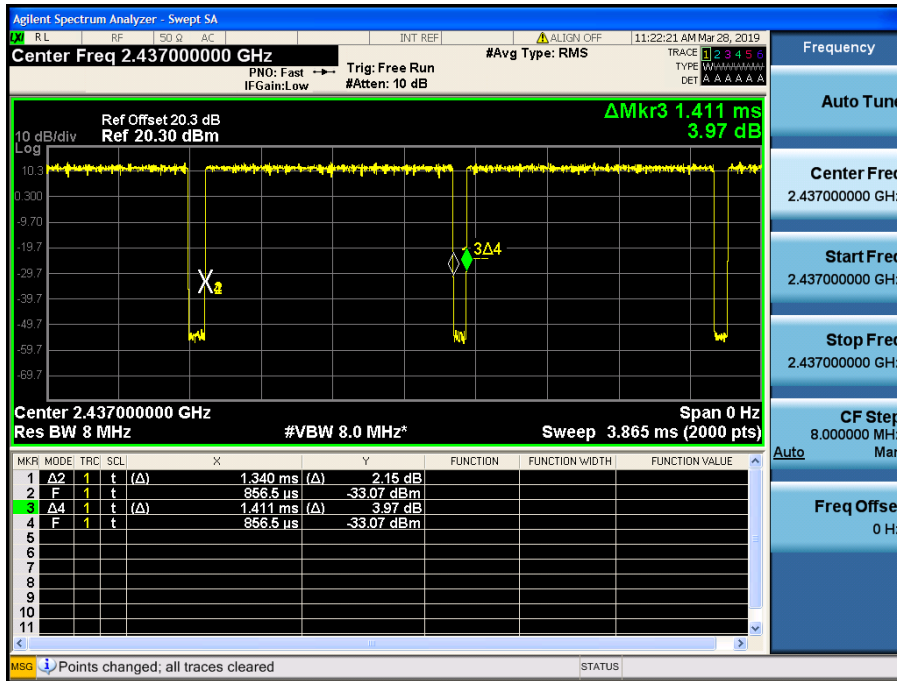

Note:

In order to simplify the report, attached plots were only the most lowest datarate.

9.2 6dB BANDWIDTH


802.11b Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.059	> 0.5
2417	2	8.141	> 0.5
2437	6	8.126	> 0.5
2462	11	8.536	> 0.5
2467	12	8.120	> 0.5
2472	13	8.119	> 0.5

802.11g Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.454	> 0.5
2417	2	15.649	> 0.5
2437	6	15.500	> 0.5
2462	11	15.614	> 0.5
2467	12	15.826	> 0.5
2472	13	15.792	> 0.5


802.11n Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.348	> 0.5
2417	2	15.170	> 0.5
2437	6	15.085	> 0.5
2462	11	15.376	> 0.5
2467	12	15.160	> 0.5
2472	13	15.132	> 0.5

■ Test Plots


6dB Bandwidth plot (802.11b-CH 13)

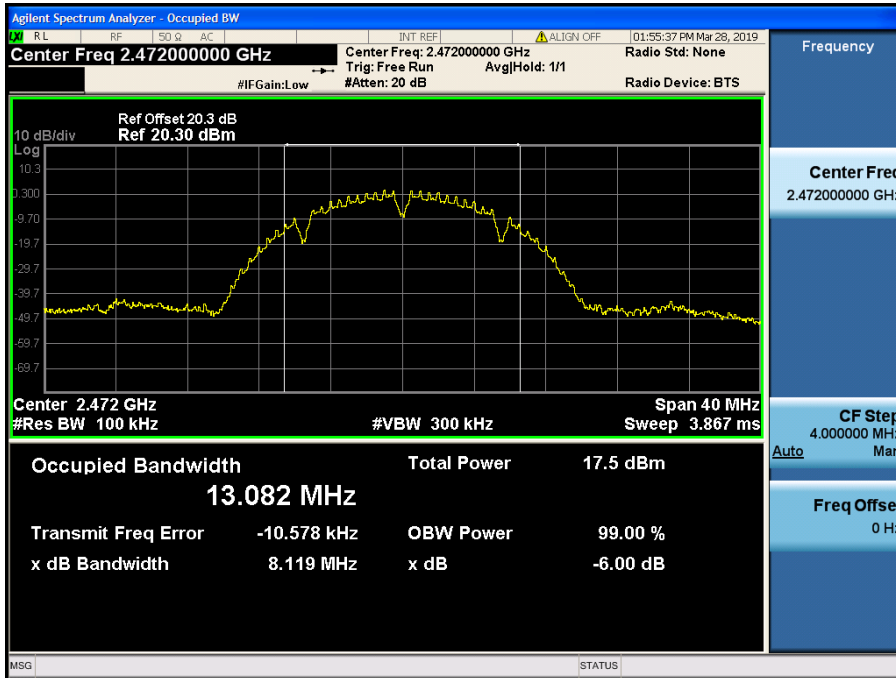

6dB Bandwidth plot (802.11g-CH 1)

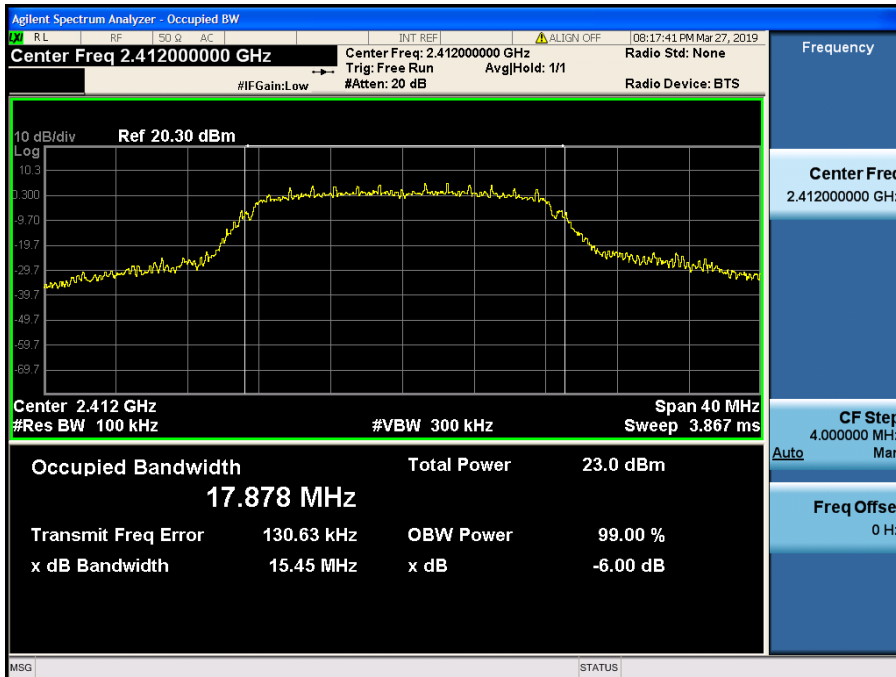

6dB Bandwidth plot (802.11n_HT20-CH 6)

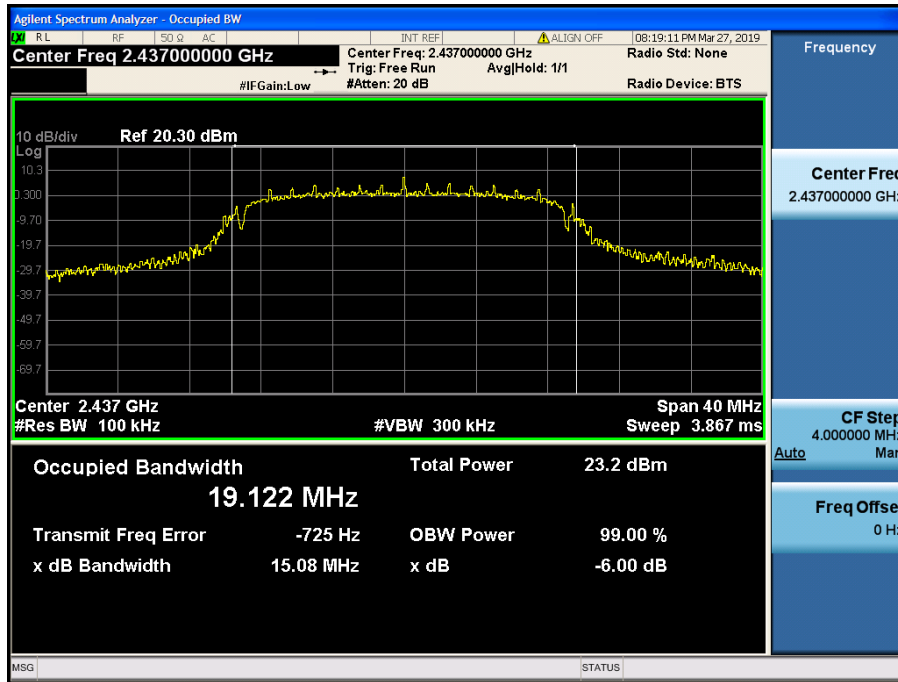

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. 20.3 dB is offset for 2.4 GHz Band.

802.11b Mode		Data Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	1	20.62	30	15
		2	21.06	30	
		5.5	22.68	30	
		11	24.14	30	
2417	2	1	20.78	30	15
		2	20.73	30	
		5.5	22.06	30	
		11	23.51	30	
2437	6	1	19.78	30	14
		2	19.98	30	
		5.5	21.20	30	
		11	22.82	30	
2462	11	1	19.92	30	14
		2	20.44	30	
		5.5	21.93	30	
		11	22.96	30	
2467	12	1	9.45	30	4
		2	9.81	30	
		5.5	11.43	30	
		11	12.43	30	
2472	13	1	9.39	30	4
		2	9.93	30	
		5.5	11.13	30	
		11	12.54	30	

802.11g Mode		Data Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	6	23.73	30	16
		9	23.82	30	
		12	23.27	30	
		18	23.50	30	
		24	24.20	30	
		36	24.17	30	
		48	22.17	30	
		54	22.37	30	
2417	2	6	23.80	30	16
		9	23.84	30	
		12	23.35	30	
		18	23.53	30	
		24	24.24	30	
		36	24.18	30	
		48	22.25	30	
		54	22.47	30	
2437	6	6	23.83	30	16
		9	23.93	30	
		12	23.42	30	
		18	23.58	30	
		24	24.29	30	
		36	24.32	30	
		48	22.35	30	
		54	22.60	30	
2462	11	6	22.08	30	13
		9	22.18	30	
		12	21.70	30	
		18	21.85	30	
		24	22.65	30	
		36	22.50	30	
		48	22.45	30	
		54	22.67	30	
2467	12	6	14.04	30	5
		9	14.20	30	
		12	13.80	30	
		18	13.89	30	
		24	14.63	30	
		36	14.53	30	
		48	15.33	30	
		54	15.60	30	
2472	13	6	14.17	30	5
		9	14.27	30	
		12	13.85	30	
		18	13.97	30	
		24	14.75	30	
		36	14.60	30	
		48	15.53	30	
		54	15.70	30	

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	0	23.67	30	16
		1	23.48	30	
		2	23.57	30	
		3	23.93	30	
		4	24.03	30	
		5	22.03	30	
		6	22.22	30	
		7	22.13	30	
2417	2	0	23.55	30	16
		1	23.41	30	
		2	23.43	30	
		3	23.86	30	
		4	23.94	30	
		5	21.96	30	
		6	22.18	30	
		7	22.16	30	
2437	6	0	23.71	30	16
		1	23.56	30	
		2	23.54	30	
		3	24.05	30	
		4	24.18	30	
		5	22.25	30	
		6	22.43	30	
		7	22.34	30	
2462	11	0	22.02	30	13
		1	21.88	30	
		2	21.93	30	
		3	22.37	30	
		4	22.52	30	
		5	22.38	30	
		6	22.57	30	
		7	22.47	30	
2467	12	0	12.01	30	3
		1	11.97	30	
		2	11.96	30	
		3	12.46	30	
		4	12.54	30	
		5	13.17	30	
		6	13.38	30	
		7	13.27	30	
2472	13	0	11.75	30	3
		1	11.77	30	
		2	11.77	30	
		3	12.27	30	
		4	12.31	30	
		5	13.44	30	
		6	13.62	30	
		7	13.59	30	

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Data Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	18.29	0.015	18.31	30	15
		2	18.02	0.039	18.06	30	
		5.5	18.06	0.075	18.14	30	
		11	18.01	0.136	18.15	30	
2417	2	1	18.25	0.015	18.27	30	15
		2	18.19	0.039	18.23	30	
		5.5	18.17	0.075	18.25	30	
		11	18.11	0.136	18.25	30	
2437	6	1	17.54	0.015	17.56	30	14
		2	17.44	0.039	17.48	30	
		5.5	16.92	0.075	17.00	30	
		11	16.97	0.136	17.11	30	
2462	11	1	17.18	0.015	17.20	30	14
		2	17.03	0.039	17.07	30	
		5.5	17.11	0.075	17.19	30	
		11	17.05	0.136	17.19	30	
2467	12	1	6.92	0.015	6.94	30	4
		2	6.81	0.039	6.85	30	
		5.5	6.93	0.075	7.01	30	
		11	6.91	0.136	7.05	30	
2472	13	1	6.83	0.015	6.85	30	4
		2	6.72	0.039	6.76	30	
		5.5	6.76	0.075	6.84	30	
		11	6.76	0.136	6.90	30	

802.11g Mode		Data Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	15.61	0.222	15.83	30	16
		9	15.46	0.398	15.86	30	
		12	15.34	0.526	15.86	30	
		18	15.18	0.892	16.07	30	
		24	14.89	1.146	16.04	30	
		36	14.59	1.334	15.93	30	
		48	12.21	1.950	14.16	30	
54	12.13	2.086	14.22	30			
2417	2	6	15.62	0.222	15.84	30	16
		9	15.45	0.398	15.85	30	
		12	15.32	0.526	15.84	30	
		18	15.18	0.892	16.07	30	
		24	14.88	1.146	16.02	30	
		36	14.55	1.334	15.88	30	
		48	12.23	1.950	14.18	30	
54	12.17	2.086	14.26	30			
2437	6	6	15.71	0.222	15.93	30	16
		9	15.58	0.398	15.97	30	
		12	15.49	0.526	16.01	30	
		18	15.30	0.892	16.19	30	
		24	15.02	1.146	16.16	30	
		36	14.71	1.334	16.04	30	
		48	12.40	1.950	14.35	30	
54	12.37	2.086	14.46	30			
2462	11	6	13.98	0.222	14.20	30	13
		9	13.81	0.398	14.21	30	
		12	13.68	0.526	14.21	30	
		18	13.53	0.892	14.42	30	
		24	13.24	1.146	14.39	30	
		36	12.90	1.334	14.23	30	
		48	12.41	1.950	14.36	30	
54	12.31	2.086	14.39	30			
2467	12	6	5.95	0.222	6.17	30	5
		9	5.81	0.398	6.21	30	
		12	5.76	0.526	6.29	30	
		18	5.58	0.892	6.47	30	
		24	5.27	1.146	6.41	30	
		36	4.92	1.334	6.26	30	
		48	5.36	1.950	7.31	30	
54	5.31	2.086	7.39	30			
2472	13	6	6.08	0.222	6.30	30	5
		9	5.93	0.398	6.33	30	
		12	5.84	0.526	6.36	30	
		18	5.65	0.892	6.55	30	
		24	5.39	1.146	6.54	30	
		36	5.04	1.334	6.37	30	
		48	5.54	1.950	7.49	30	
54	5.47	2.086	7.56	30			

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	15.51	0.226	15.73	30	16
		1	15.24	0.555	15.80	30	
		2	15.08	0.776	15.86	30	
		3	14.87	0.985	15.85	30	
		4	14.58	1.569	16.15	30	
		5	12.24	1.919	14.16	30	
		6	12.15	2.050	14.20	30	
		7	12.02	2.201	14.22	30	
2417	2	0	15.40	0.226	15.63	30	16
		1	15.18	0.555	15.73	30	
		2	15.01	0.776	15.78	30	
		3	14.82	0.985	15.80	30	
		4	14.42	1.569	15.99	30	
		5	12.26	1.919	14.17	30	
		6	12.14	2.050	14.19	30	
		7	12.02	2.201	14.22	30	
2437	6	0	15.60	0.226	15.82	30	16
		1	15.33	0.555	15.88	30	
		2	15.18	0.776	15.95	30	
		3	15.01	0.985	15.99	30	
		4	14.72	1.569	16.29	30	
		5	12.48	1.919	14.39	30	
		6	12.39	2.050	14.44	30	
		7	12.24	2.201	14.44	30	
2462	11	0	13.88	0.226	14.11	30	13
		1	13.61	0.555	14.17	30	
		2	13.47	0.776	14.24	30	
		3	13.28	0.985	14.27	30	
		4	12.96	1.569	14.53	30	
		5	12.58	1.919	14.49	30	
		6	12.39	2.050	14.44	30	
		7	12.28	2.201	14.48	30	
2467	12	0	3.96	0.226	4.18	30	3
		1	3.74	0.555	4.29	30	
		2	3.60	0.776	4.38	30	
		3	3.40	0.985	4.39	30	
		4	3.10	1.569	4.67	30	
		5	3.54	1.919	5.46	30	
		6	3.48	2.050	5.53	30	
		7	3.34	2.201	5.54	30	
2472	13	0	3.95	0.226	4.17	30	3
		1	3.63	0.555	4.19	30	
		2	3.39	0.776	4.16	30	
		3	3.21	0.985	4.19	30	
		4	2.85	1.569	4.41	30	
		5	3.82	1.919	5.74	30	
		6	3.69	2.050	5.74	30	
		7	3.58	2.201	5.78	30	

9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	-3.138	0.015	-3.123	8
	2417	2	-3.509	0.015	-3.494	8
	2437	6	-6.977	0.015	-6.962	8
	2462	11	-6.925	0.015	-6.910	8
	2467	12	-16.164	0.136	-16.028	8
	2472	13	-14.024	0.136	-13.888	8
802.11g	2412	1	-7.758	0.892	-6.866	8
	2417	2	-8.297	0.892	-7.405	8
	2437	6	-8.300	0.892	-7.408	8
	2462	11	-10.260	0.892	-9.368	8
	2467	12	-17.141	2.086	-15.055	8
	2472	13	-16.911	2.086	-14.825	8
802.11n	2412	1	-8.410	1.569	-6.841	8
	2417	2	-8.699	1.569	-7.130	8
	2437	6	-8.210	1.569	-6.641	8
	2462	11	-9.988	1.569	-8.419	8
	2467	12	-19.231	2.201	-17.030	8
	2472	13	-18.474	2.201	-16.273	8

Note :


1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. 20.3 dB is offset for 2.4 GHz Band.

■ Test Plots


Power Spectral Density (802.11b-CH 1)



Power Spectral Density (802.11g-CH 1)

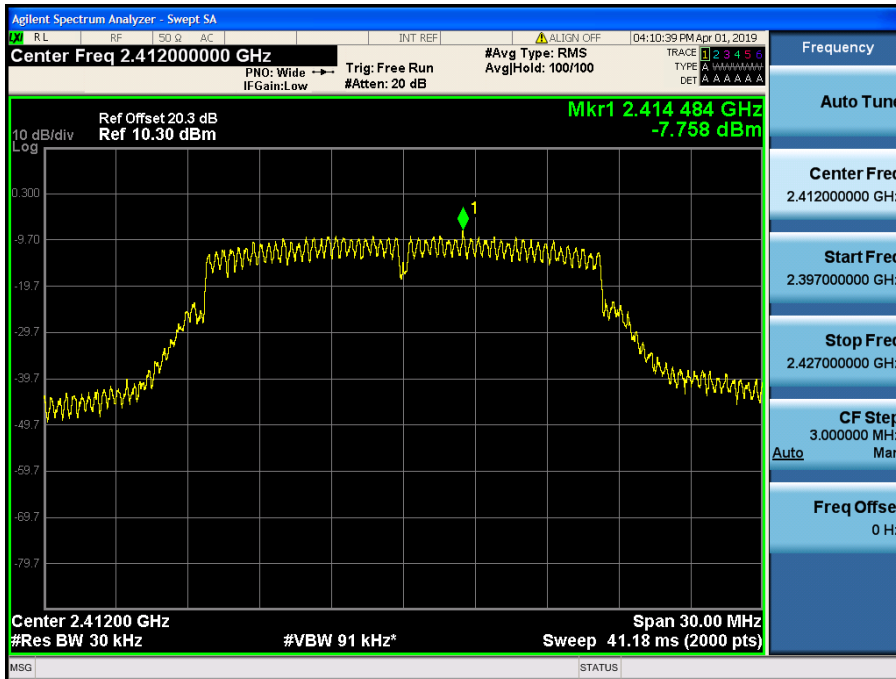

Power Spectral Density (802.11n_HT20 -CH 6)

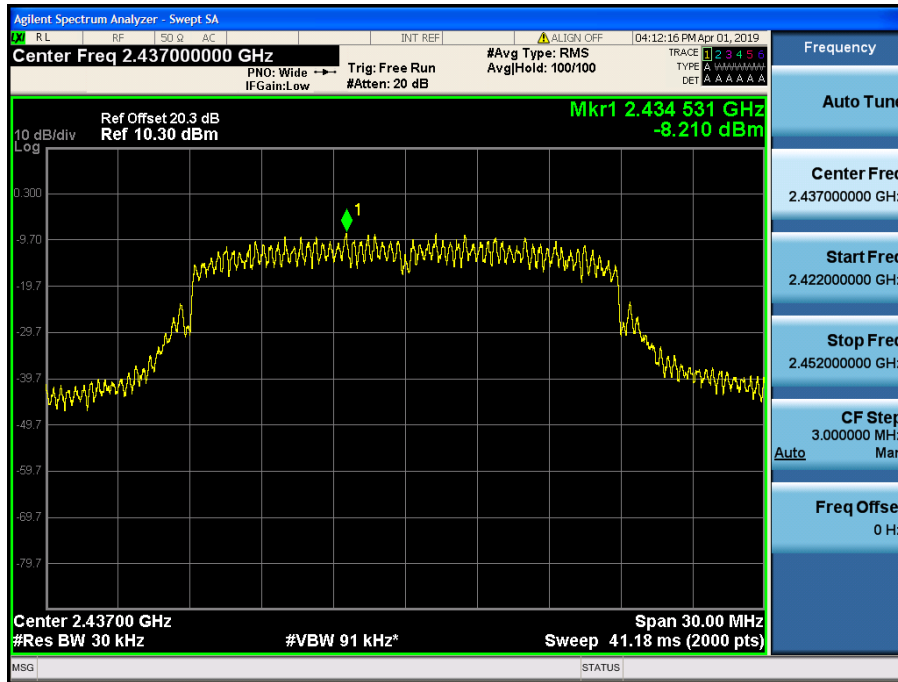

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

■ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

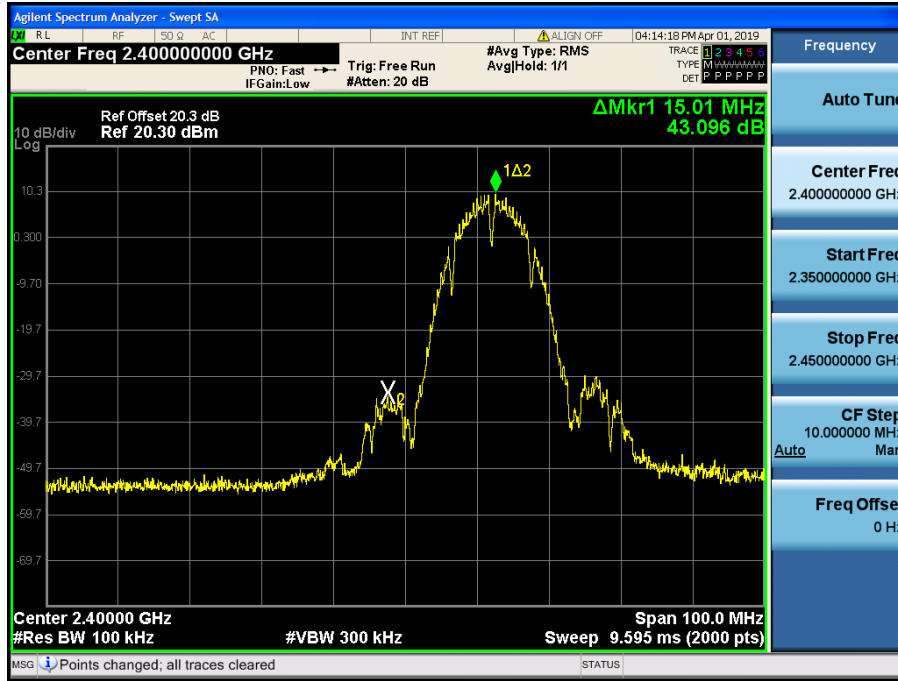


Band Edge (802.11b-CH2)

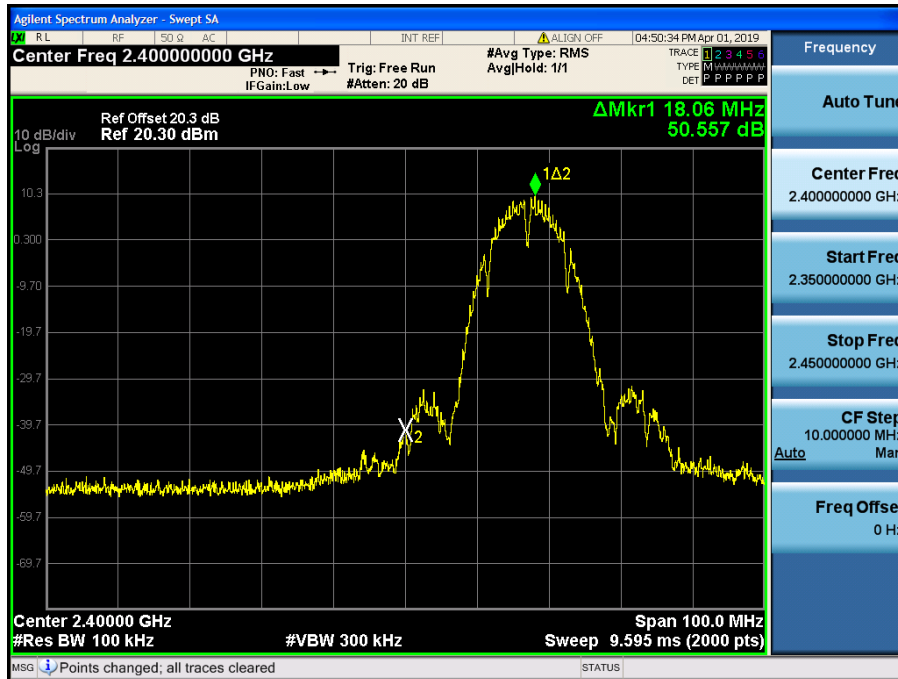


Band Edge (802.11b-CH11)

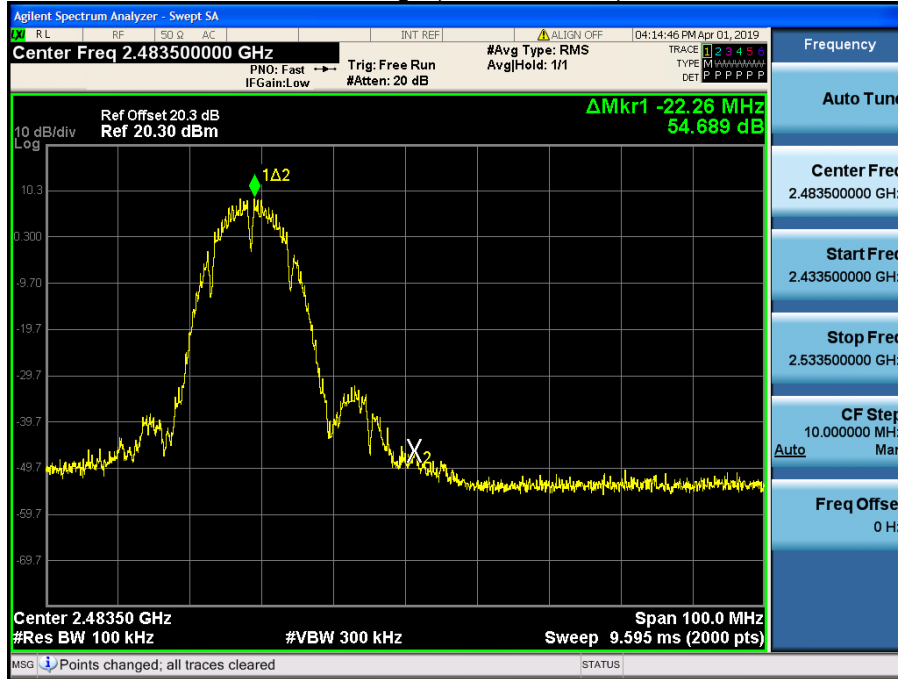


Band Edge (802.11b-CH13)

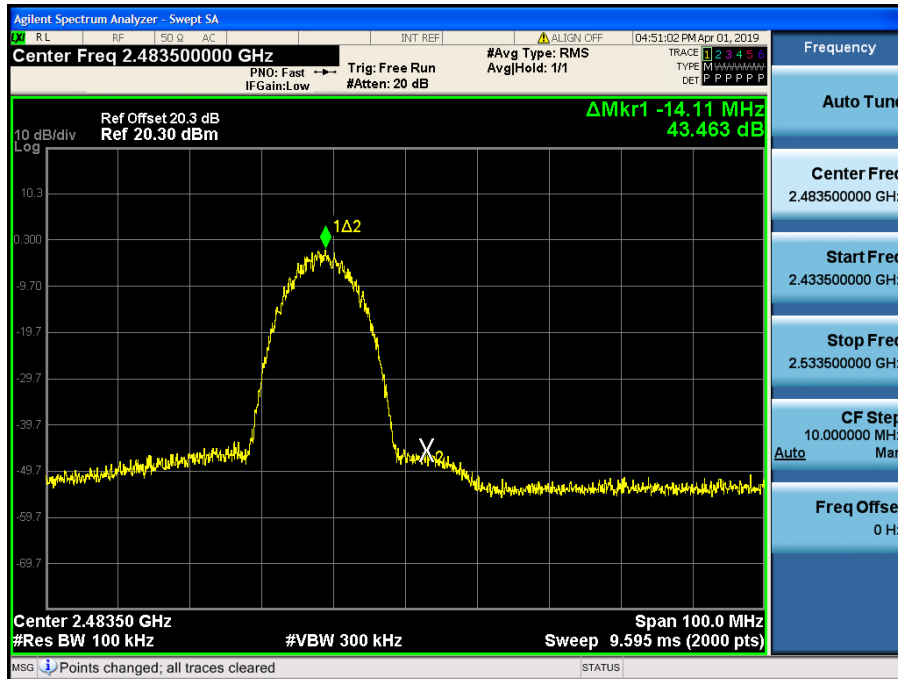


Band Edge (802.11g-CH1)

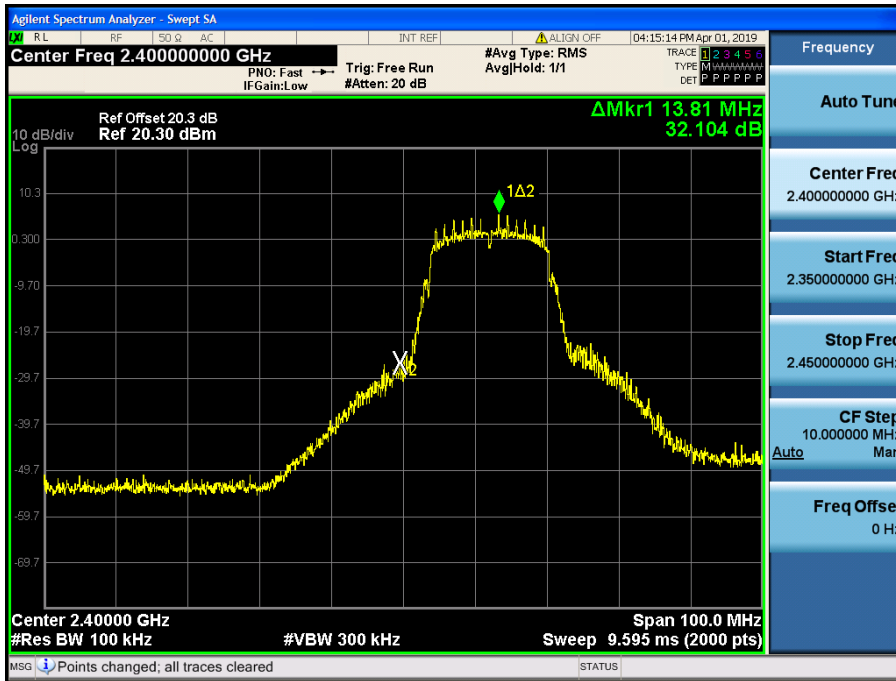


Band Edge (802.11g-CH2)

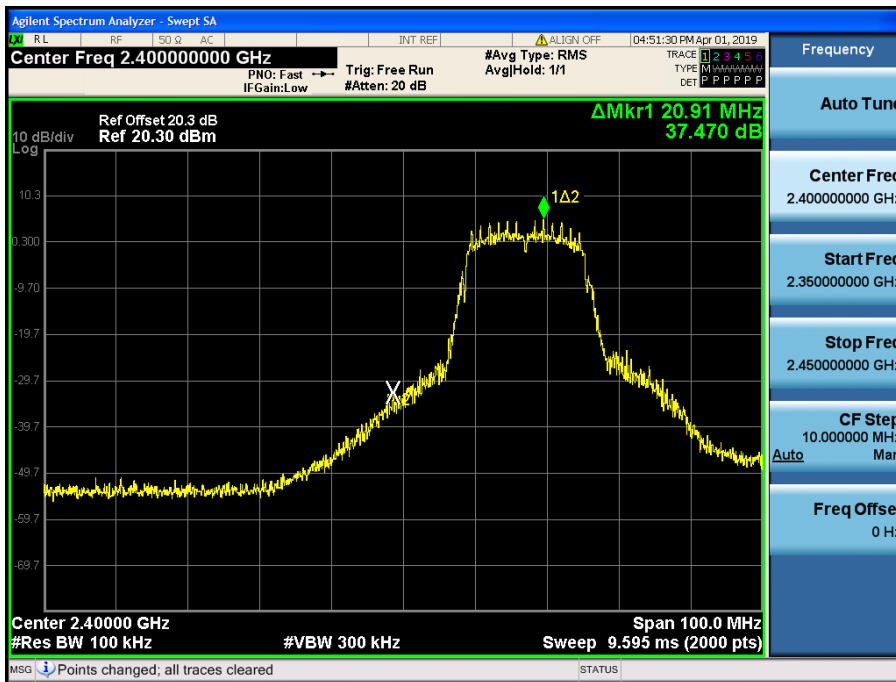


Band Edge (802.11g-CH11)

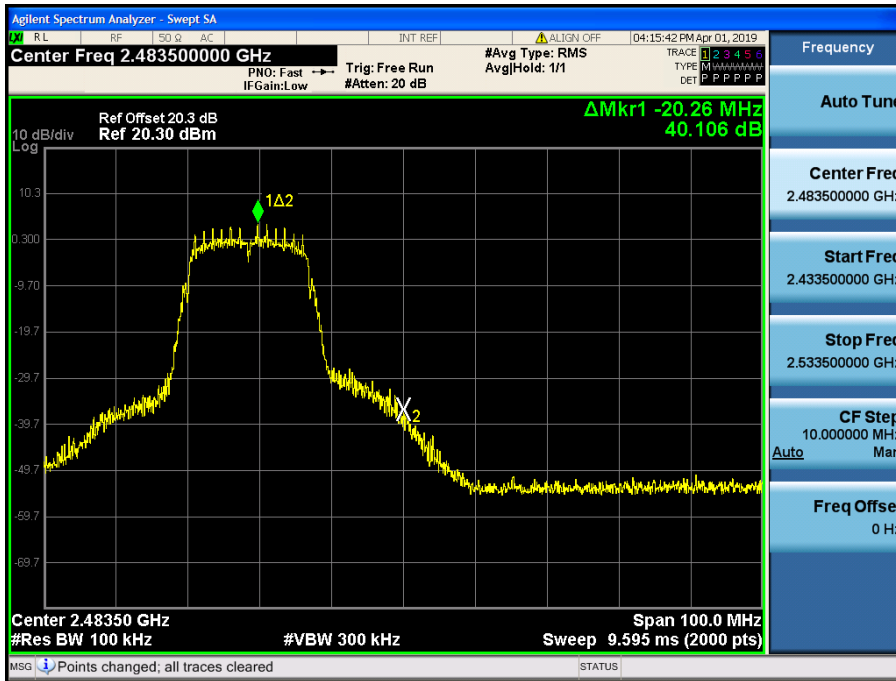


Band Edge (802.11g-CH13)

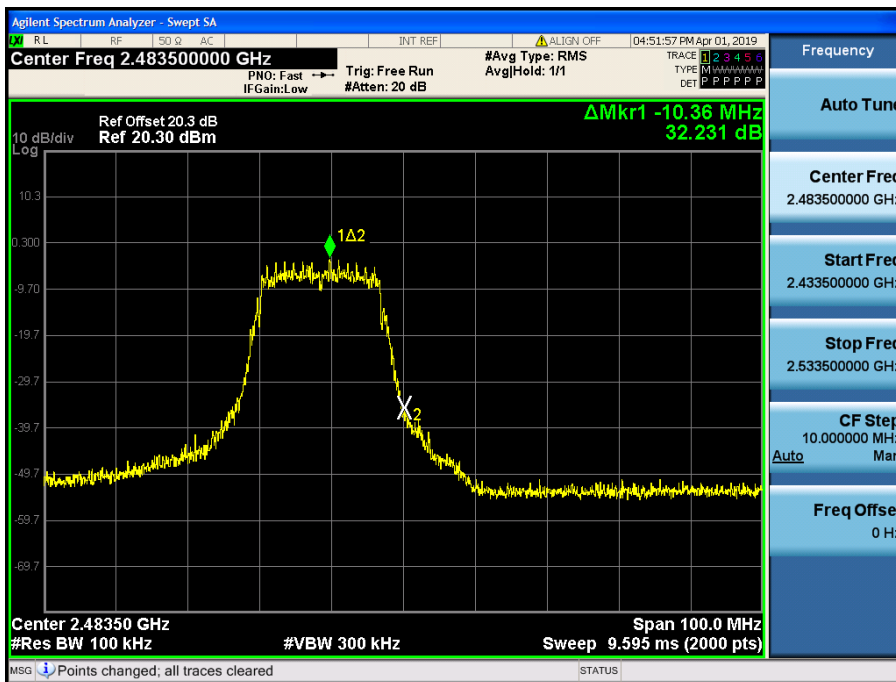


Band Edge (802.11n_HT20-CH1)

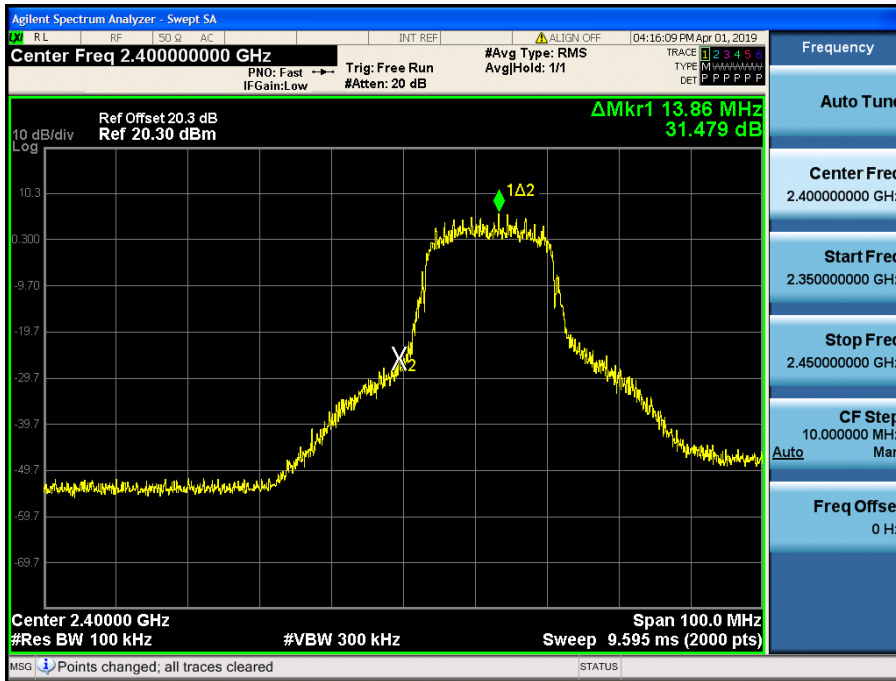


Band Edge (802.11n_HT20-CH2)

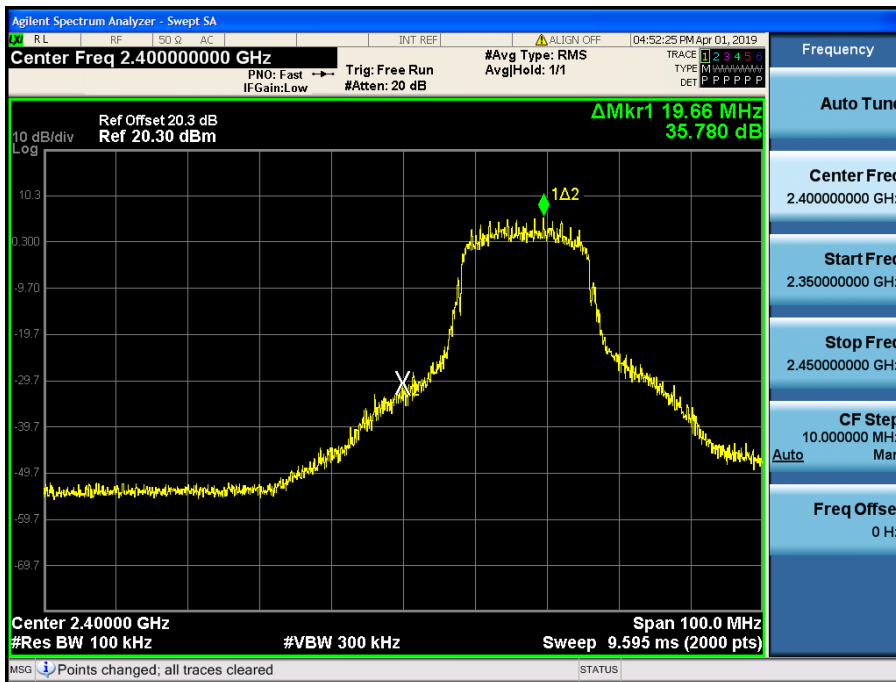

Band Edge (802.11n_HT20-CH11)

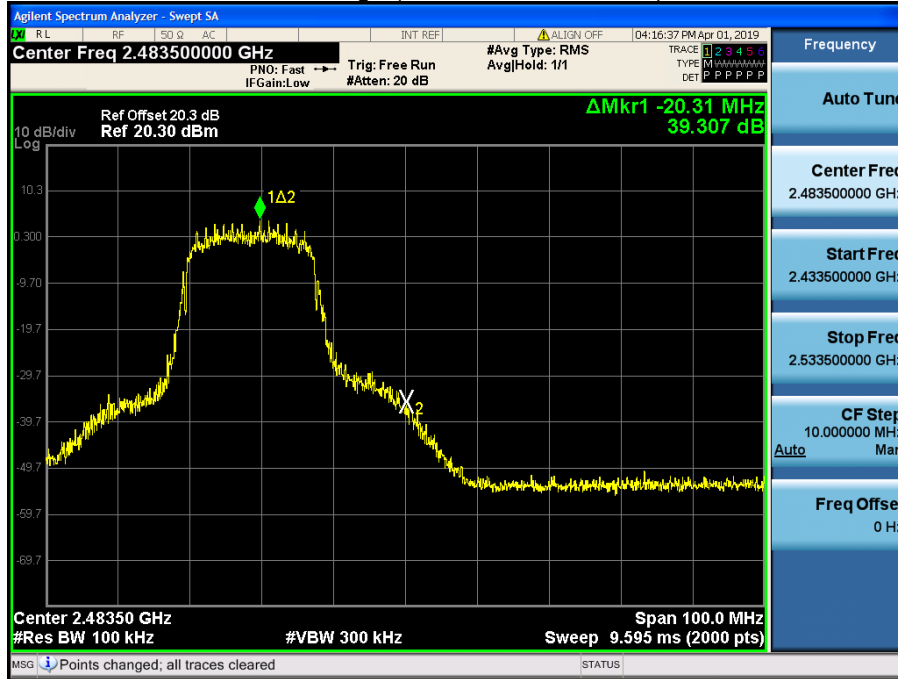


Band Edge (802.11n_HT20-CH13)

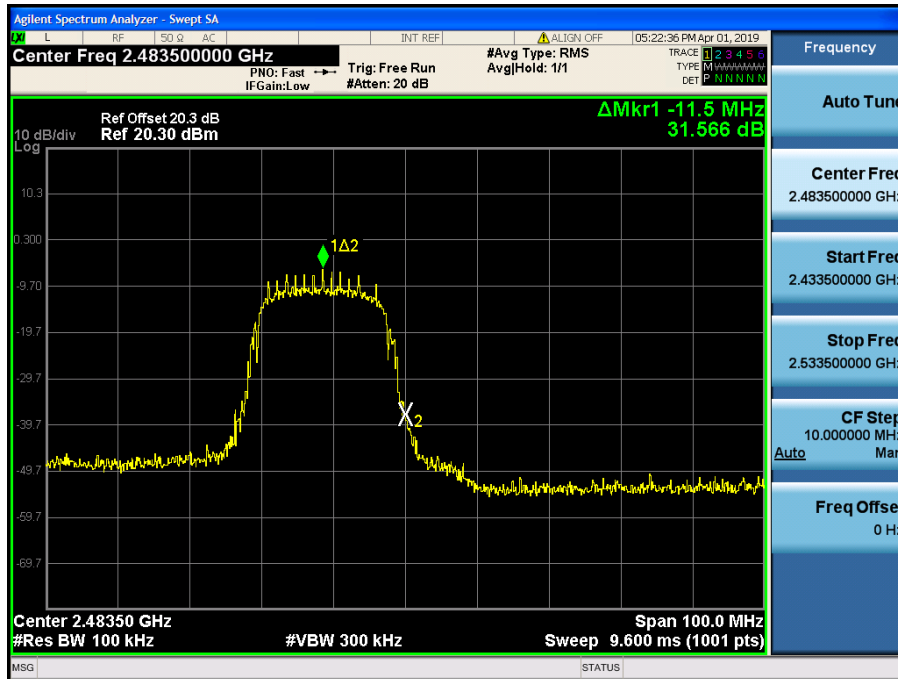

■ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

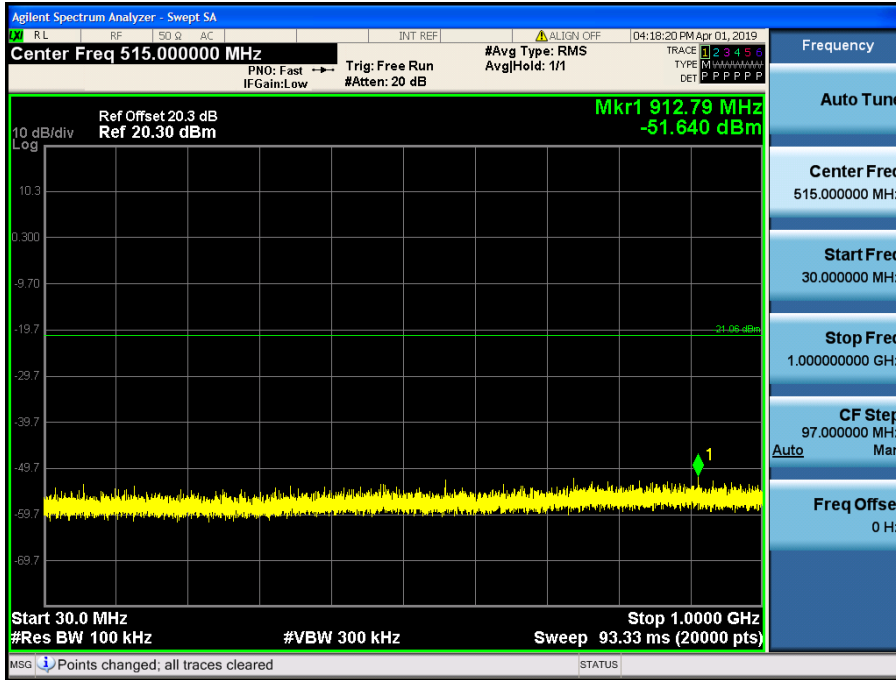


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

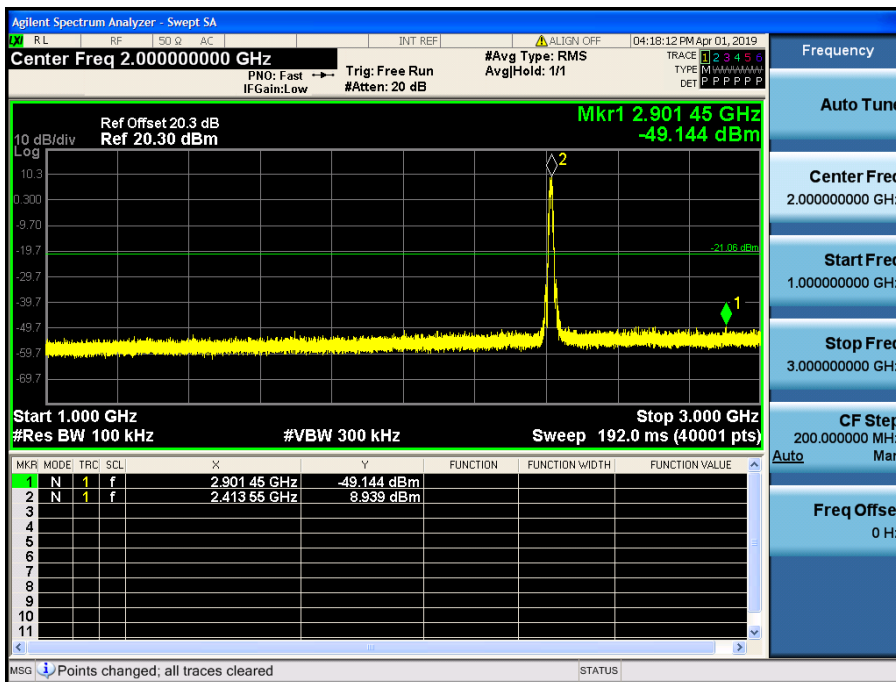


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

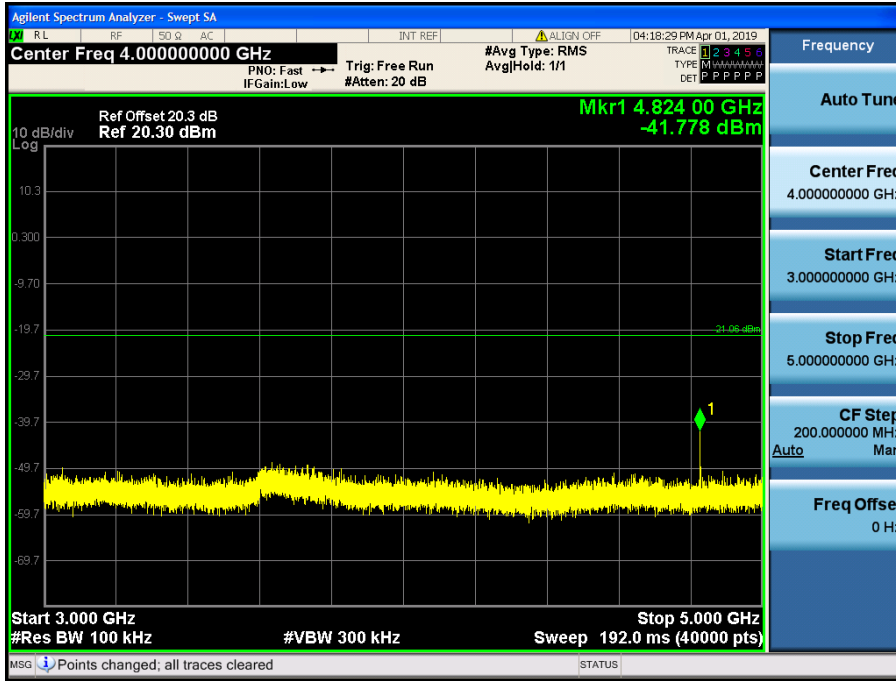


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

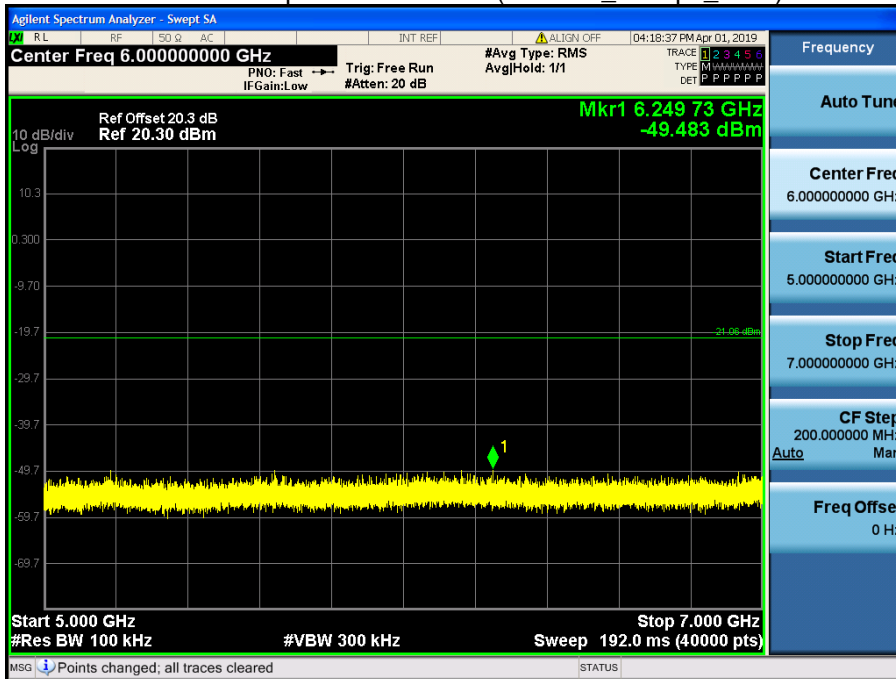


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

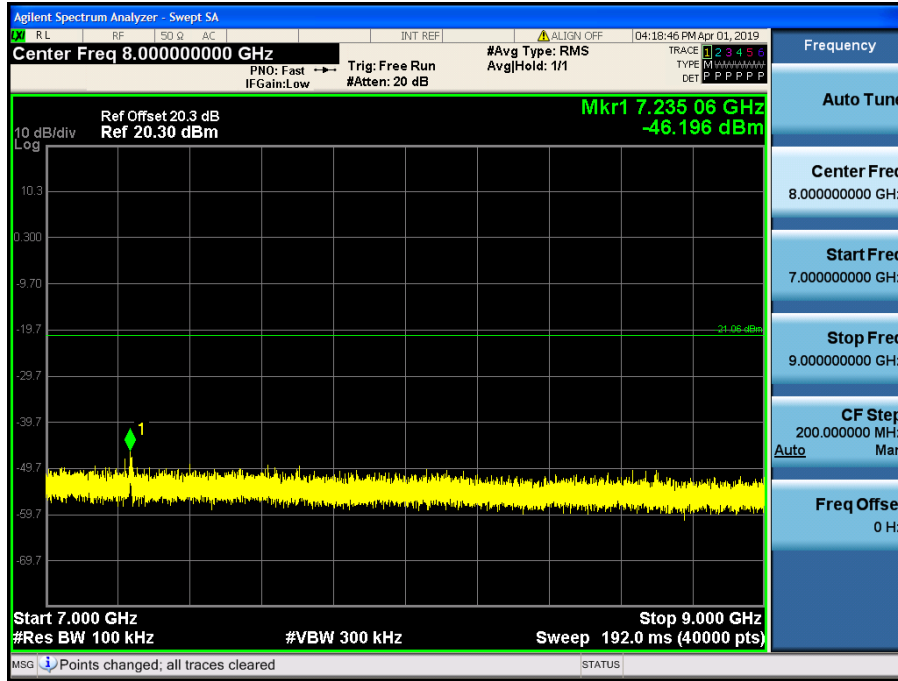


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

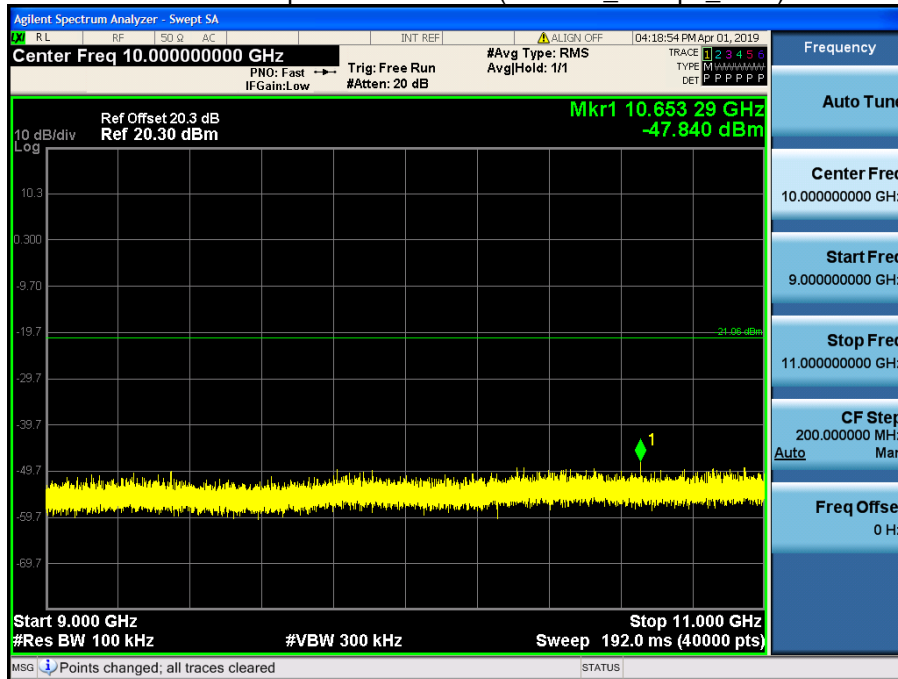


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

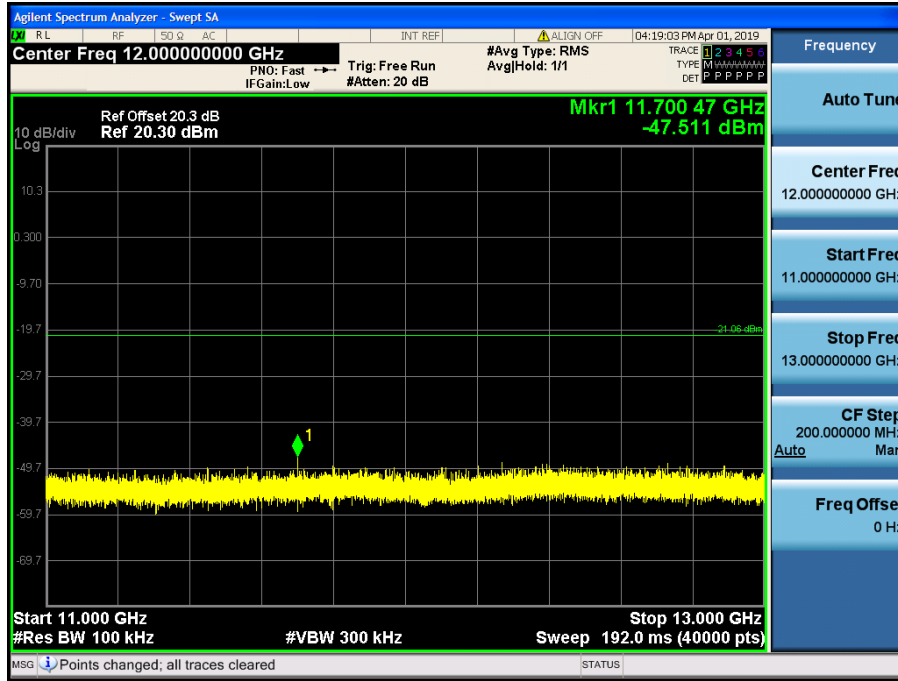


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

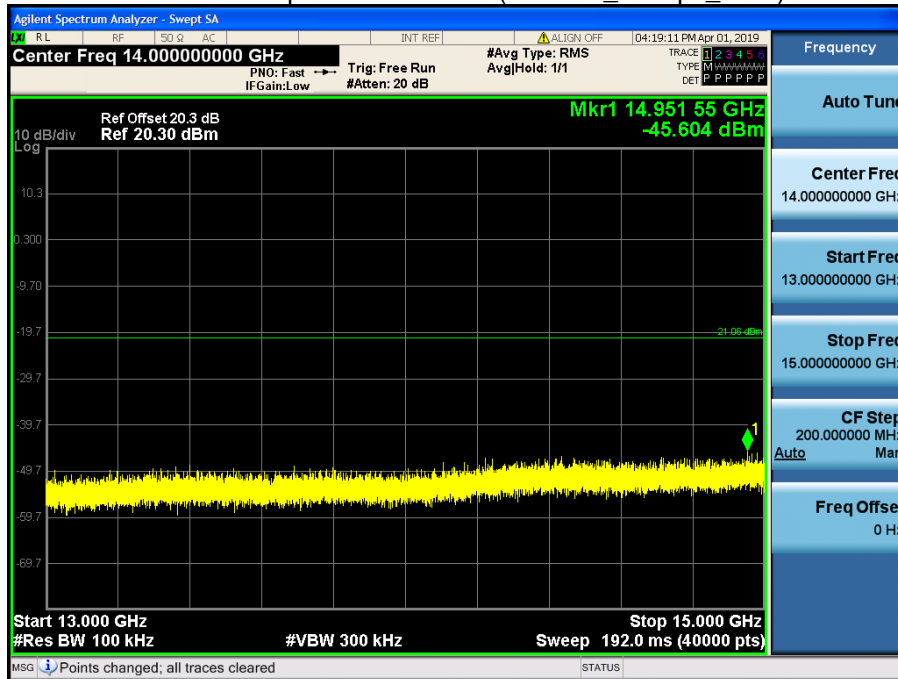


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

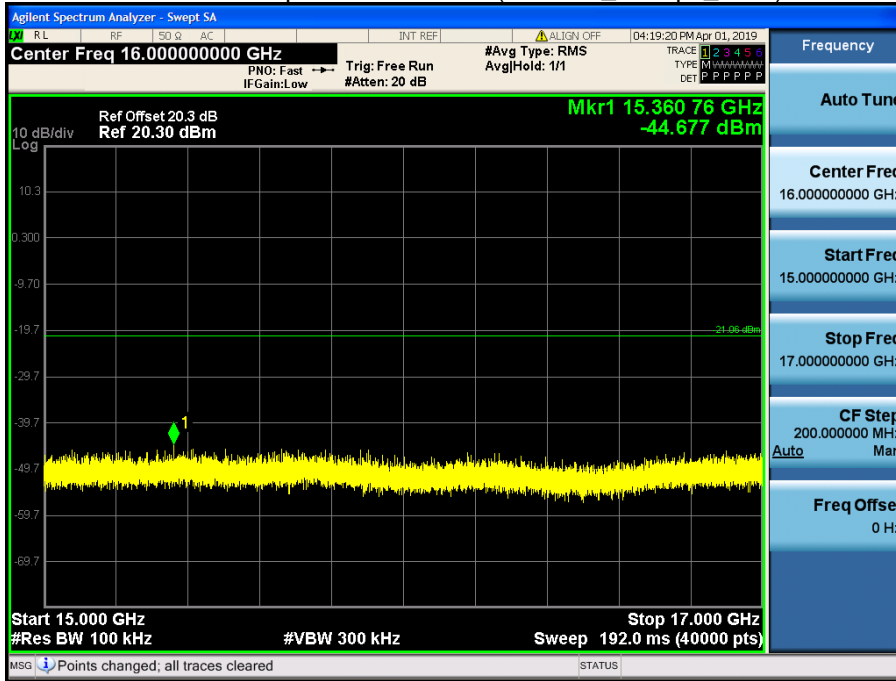


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

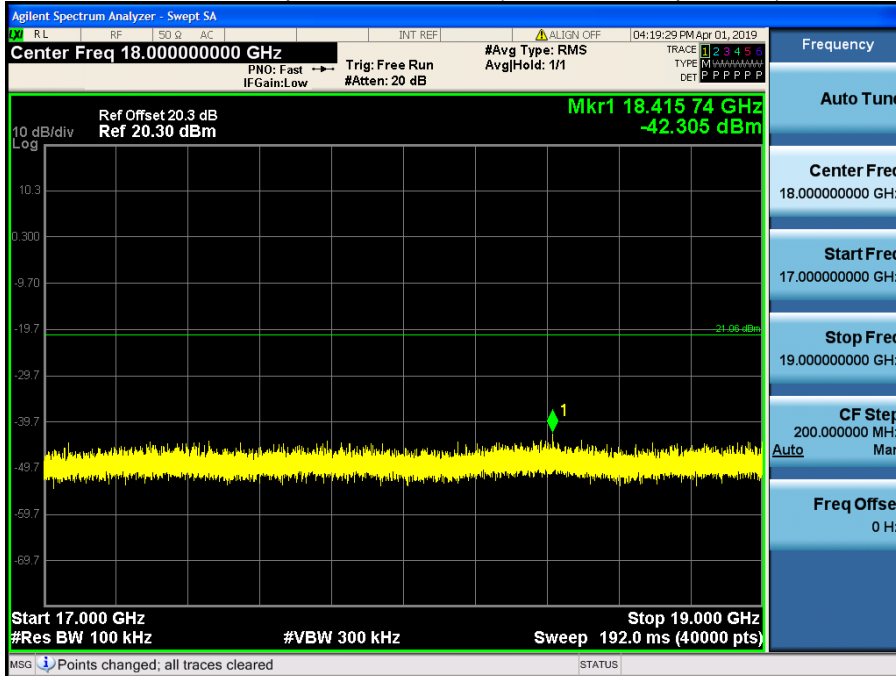


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

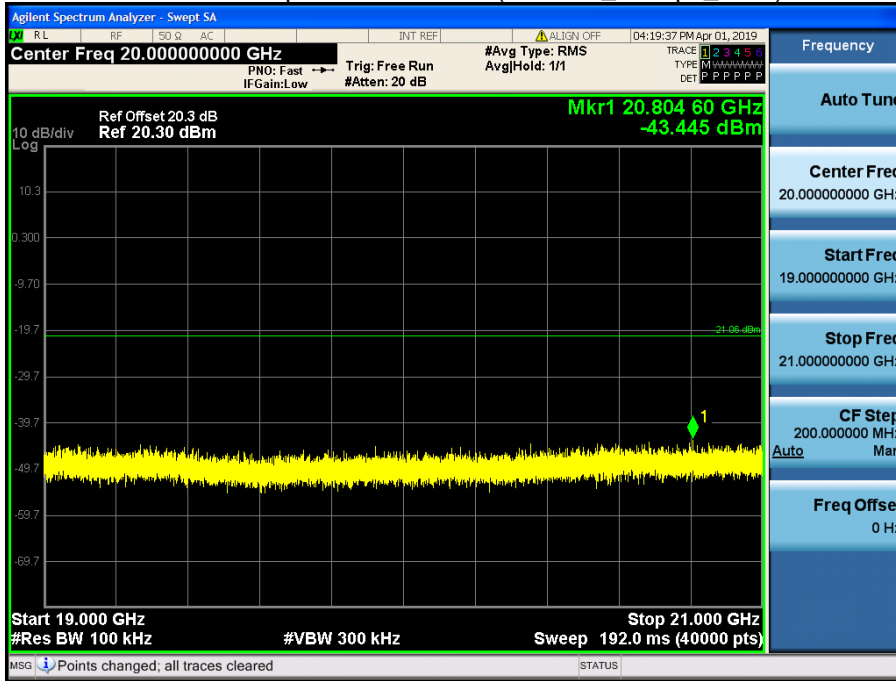


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

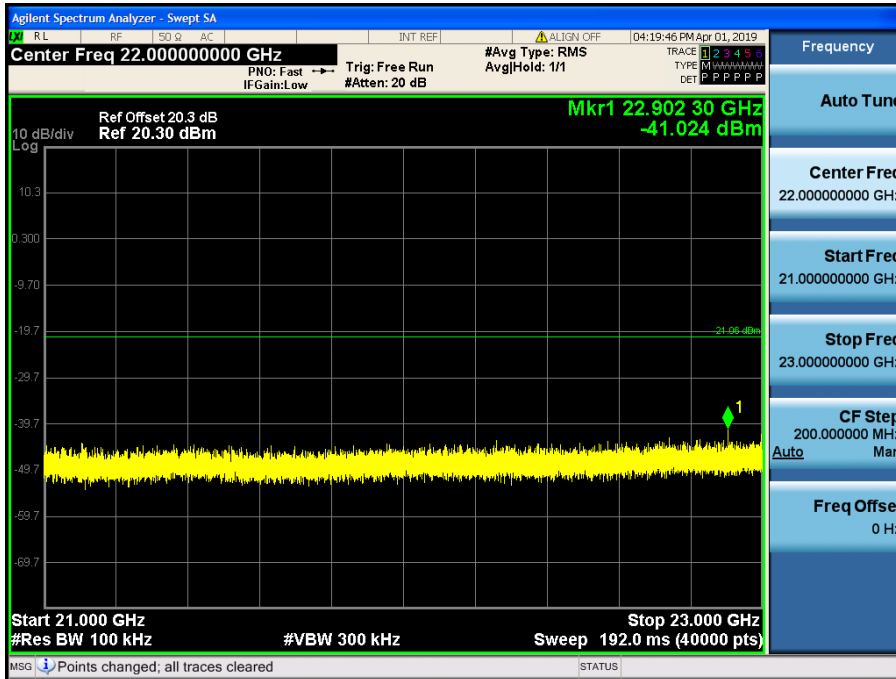

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_1 Mbps_Ch.1)

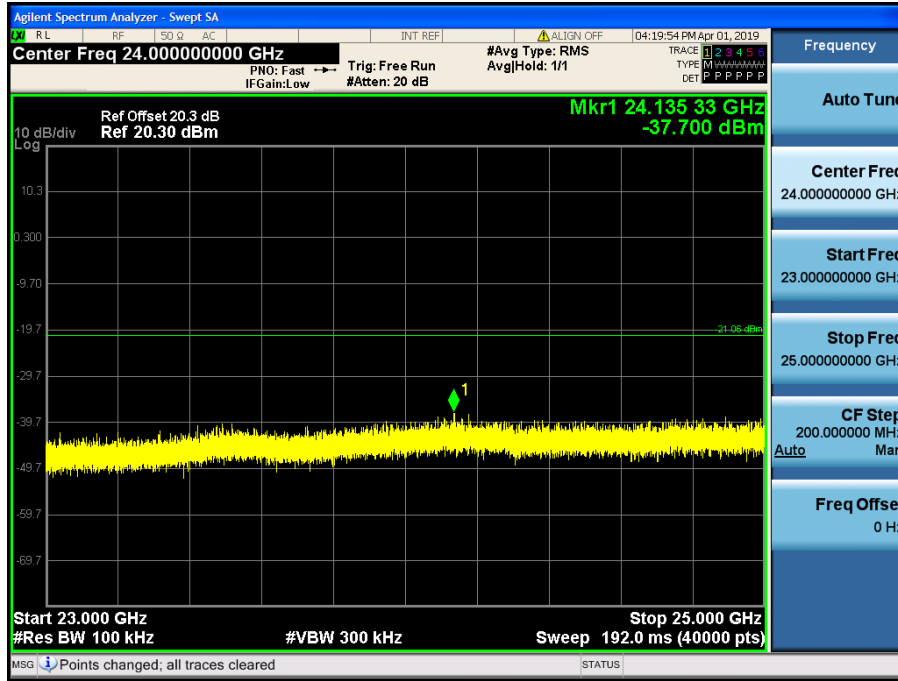

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \cdot \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	52.20	0.81	V	53.01	73.98	20.98	PK
4824	45.30	0.81	V	46.11	53.98	7.88	AV
7236	47.44	9.47	V	56.91	73.98	17.07	PK
7236	37.60	9.47	V	47.07	53.98	6.91	AV
4824	53.95	0.81	H	54.76	73.98	19.23	PK
4824	48.54	0.81	H	49.35	53.98	4.64	AV
7236	48.99	9.47	H	58.46	73.98	15.52	PK
7236	40.15	9.47	H	49.62	53.98	4.36	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.35	0.00	0.81	V	51.16	73.98	22.83	PK
4824	38.45	0.22	0.81	V	39.48	53.98	14.50	AV
7236	45.89	0.00	9.47	V	55.36	73.98	18.62	PK
7236	33.92	0.22	9.47	V	43.61	53.98	10.37	AV
4824	50.66	0.00	0.81	H	51.47	73.98	22.52	PK
4824	38.52	0.22	0.81	H	39.55	53.98	14.43	AV
7236	46.21	0.00	9.47	H	55.68	73.98	18.30	PK
7236	34.10	0.22	9.47	H	43.79	53.98	10.19	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.75	0.00	0.81	V	51.56	73.98	22.43	PK
4824	38.46	0.23	0.81	V	39.49	53.98	14.49	AV
7236	46.88	0.00	9.47	V	56.35	73.98	17.63	PK
7236	33.81	0.23	9.47	V	43.51	53.98	10.47	AV
4824	51.11	0.00	0.81	H	51.92	73.98	22.07	PK
4824	38.58	0.23	0.81	H	39.61	53.98	14.37	AV
7236	47.05	0.00	9.47	H	56.52	73.98	17.46	PK
7236	33.90	0.23	9.47	H	43.60	53.98	10.38	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	54.31	1.02	V	55.33	73.98	18.66	PK
4874	49.50	1.02	V	50.52	53.98	3.47	AV
7311	46.15	9.16	V	55.31	73.98	18.67	PK
7311	36.59	9.16	V	45.75	53.98	8.23	AV
4874	54.66	1.02	H	55.68	73.98	18.31	PK
4874	49.84	1.02	H	50.86	53.98	3.12	AV
7311	47.07	9.16	H	56.23	73.98	17.75	PK
7311	36.85	9.16	H	46.01	53.98	7.97	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.01	0.00	1.02	V	54.03	73.98	19.96	PK
4874	40.48	0.22	1.02	V	41.72	53.98	12.26	AV
7311	47.25	0.00	9.16	V	56.41	73.98	17.57	PK
7311	34.77	0.22	9.16	V	44.15	53.98	9.83	AV
4874	53.44	0.00	1.02	H	54.46	73.98	19.53	PK
4874	40.53	0.22	1.02	H	41.77	53.98	12.21	AV
7311	47.79	0.00	9.16	H	56.95	73.98	17.03	PK
7311	34.82	0.22	9.16	H	44.20	53.98	9.78	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.49	0.00	1.02	V	53.51	73.98	20.48	PK
4874	39.79	0.23	1.02	V	41.03	53.98	12.95	AV
7311	46.82	0.00	9.16	V	55.98	73.98	18.00	PK
7311	34.34	0.23	9.16	V	43.73	53.98	10.25	AV
4874	53.40	0.00	1.02	H	54.42	73.98	19.57	PK
4874	40.00	0.23	1.02	H	41.24	53.98	12.74	AV
7311	47.10	0.00	9.16	H	56.26	73.98	17.72	PK
7311	34.49	0.23	9.16	H	43.88	53.98	10.10	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	53.46	0.96	V	54.42	73.98	19.57	PK
4924	47.90	0.96	V	48.86	53.98	5.13	AV
7386	47.38	9.18	V	56.56	73.98	17.42	PK
7386	37.05	9.18	V	46.23	53.98	7.75	AV
4924	54.19	0.96	H	55.15	73.98	18.84	PK
4924	48.40	0.96	H	49.36	53.98	4.63	AV
7386	47.68	9.18	H	56.86	73.98	17.12	PK
7386	37.40	9.18	H	46.58	53.98	7.40	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.08	0.00	0.96	V	52.04	73.98	21.95	PK
4924	38.68	0.22	0.96	V	39.86	53.98	14.12	AV
7386	46.11	0.00	9.18	V	55.29	73.98	18.69	PK
7386	33.81	0.22	9.18	V	43.21	53.98	10.77	AV
4924	51.14	0.00	0.96	H	52.10	73.98	21.89	PK
4924	38.80	0.22	0.96	H	39.98	53.98	14.00	AV
7386	46.24	0.00	9.18	H	55.42	73.98	18.56	PK
7386	33.85	0.22	9.18	H	43.25	53.98	10.73	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2462
 Channel No. 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.29	0.00	0.96	V	51.25	73.98	22.74	PK
4924	38.70	0.23	0.96	V	39.88	53.98	14.10	AV
7386	46.61	0.00	9.18	V	55.79	73.98	18.19	PK
7386	33.64	0.23	9.18	V	43.05	53.98	10.93	AV
4924	50.68	0.00	0.96	H	51.64	73.98	22.35	PK
4924	38.77	0.23	0.96	H	39.95	53.98	14.03	AV
7386	46.38	0.00	9.18	H	55.56	73.98	18.42	PK
7386	33.78	0.23	9.18	H	43.19	53.98	10.79	AV

[NOTE]

Channel 12 and 13 are less powerful than channel 11, so the test for high channel was performed at channel 11.


■ Test Plots

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 2nd Harmonic)

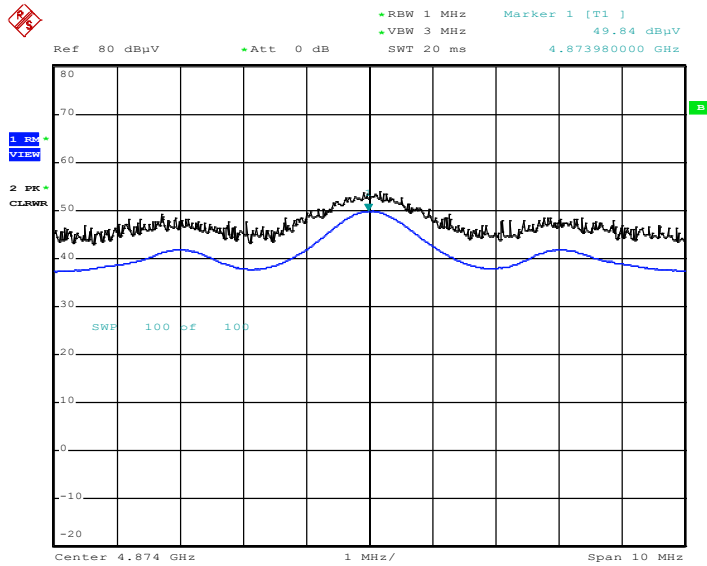

Date: 29.MAR.2019 10:56:54

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 2nd Harmonic)

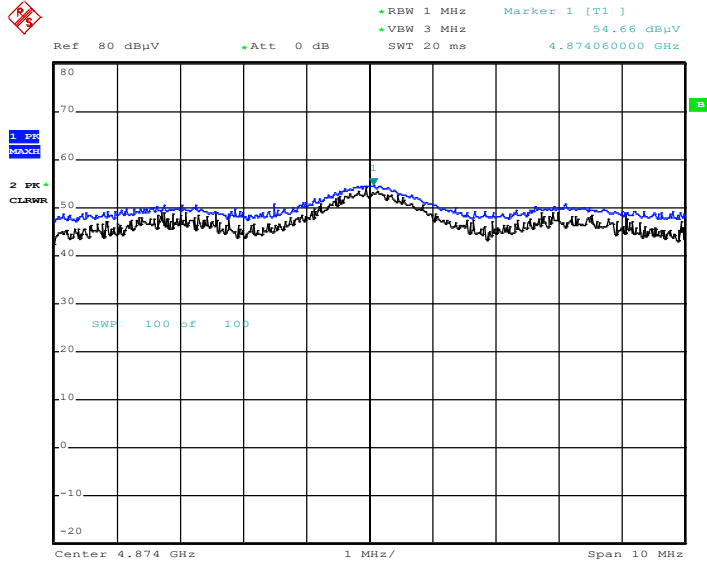

Date: 29.MAR.2019 10:56:35

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.79	1.06	H	55.85	73.98	18.13	PK
2390.0	45.00	1.06	H	46.06	53.98	7.92	AV
2390.0	54.38	1.06	V	55.44	73.98	18.54	PK
2390.0	44.85	1.06	V	45.91	53.98	8.07	AV
2483.5	54.84	1.12	H	55.96	73.98	18.03	PK
2483.5	44.80	1.12	H	45.92	53.98	8.07	AV
2483.5	53.99	1.12	V	55.11	73.98	18.88	PK
2483.5	44.54	1.12	V	45.66	53.98	8.33	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No. 12 Ch, 13 Ch

Channel	Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	57.19	1.12	H	58.31	73.98	15.68	PK
	2483.5	45.93	1.12	H	47.05	53.98	6.94	AV
	2483.5	56.78	1.12	V	57.90	73.98	16.09	PK
	2483.5	45.77	1.12	V	46.89	53.98	7.09	AV
13	2483.5	57.97	1.12	H	59.09	73.98	14.90	PK
	2483.5	46.57	1.12	H	47.69	53.98	6.29	AV
	2483.5	57.29	1.12	V	58.41	73.98	15.58	PK
	2483.5	46.31	1.12	V	47.43	53.98	6.55	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	66.32	0.00	1.06	H	67.38	73.98	6.60	PK
2390.0	48.60	0.22	1.06	H	49.88	53.98	4.10	AV
2390.0	65.89	0.00	1.06	V	66.95	73.98	7.03	PK
2390.0	48.31	0.22	1.06	V	49.59	53.98	4.39	AV
2483.5	67.56	0.00	1.12	H	68.68	73.98	5.31	PK
2483.5	49.90	0.22	1.12	H	51.24	53.98	2.74	AV
2483.5	67.12	0.00	1.12	V	68.24	73.98	5.75	PK
2483.5	49.54	0.22	1.12	V	50.88	53.98	3.10	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2457 MHz
 Channel No. 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	63.79	0.00	0.78	H	64.57	73.98	9.41	PK
2483.5	46.45	0.22	0.78	H	47.45	53.98	6.53	AV
2483.5	63.19	0.00	0.78	V	63.97	73.98	10.01	PK
2483.5	46.31	0.22	0.78	V	47.31	53.98	6.67	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No. 12 Ch, 13 Ch

Channel	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	58.11	0.00	1.12	H	59.23	73.98	14.76	PK
	2483.5	46.10	0.22	1.12	H	47.44	53.98	6.54	AV
	2483.5	57.89	0.00	1.12	V	59.01	73.98	14.98	PK
	2483.5	45.76	0.22	1.12	V	47.10	53.98	6.88	AV
13	2483.5	67.31	0.00	1.12	V	68.43	73.98	5.56	PK
	2483.5	49.75	0.22	1.12	V	51.09	53.98	2.89	AV
	2483.5	67.88	0.00	1.12	H	69.00	73.98	4.99	PK
	2483.5	50.14	0.22	1.12	H	51.48	53.98	2.50	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	68.95	0.00	1.06	H	70.01	73.98	3.97	PK
2390.0	49.35	0.23	1.06	H	50.64	53.98	3.34	AV
2390.0	68.46	0.00	1.06	V	69.52	73.98	4.46	PK
2390.0	49.15	0.23	1.06	V	50.44	53.98	3.54	AV
*2483.5 ~ 2484.5	62.70	0.00	1.12	H	63.82	73.98	10.17	PK
*2483.5 ~ 2484.5	49.43	0.23	1.12	H	50.77	53.98	3.21	AV
2484.5 ~ 2500	69.41	0.00	1.12	H	70.53	73.98	3.46	PK
2484.5 ~ 2500	49.23	0.23	1.12	H	50.57	53.98	3.41	AV
*2483.5 ~ 2484.5	61.75	0.00	1.12	V	62.87	73.98	11.12	PK
*2483.5 ~ 2484.5	49.22	0.23	1.12	V	50.56	53.98	3.42	AV
2484.5 ~ 2500	68.67	0.00	1.12	V	69.79	73.98	4.20	PK
2484.5 ~ 2500	49.01	0.23	1.12	V	50.35	53.98	3.63	AV

Note:

* : Procedure 11.13.3 (Integration method) in ANSI 63.10-2013

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	66.49	0.00	0.78	H	67.27	73.98	6.71	PK
2483.5	46.75	0.23	0.78	H	47.76	53.98	6.22	AV
2483.5	66.12	0.00	0.78	V	66.90	73.98	7.08	PK
2483.5	46.55	0.23	0.78	V	47.56	53.98	6.42	AV

Operation Mode: 802.11n(HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No. 12 Ch, 13 Ch


Channel	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	57.59	0.00	1.12	H	58.71	73.98	15.28	PK
	2483.5	45.95	0.23	1.12	H	47.29	53.98	6.69	AV
	2483.5	56.88	0.00	1.12	V	58.00	73.98	15.99	PK
	2483.5	45.74	0.23	1.12	V	47.08	53.98	6.90	AV
13	*2483.5~2484.5	62.93	0.00	1.12	H	64.05	73.98	9.94	PK
	*2483.5~2484.5	48.23	0.23	1.12	H	49.57	53.98	4.41	AV
	2484.5 ~ 2500	68.24	0.00	1.12	H	69.36	73.98	4.63	PK
	2484.5 ~ 2500	47.69	0.23	1.12	H	49.03	53.98	4.95	AV
	*2483.5~2484.5	61.55	0.00	1.12	V	62.67	73.98	11.32	PK
	*2483.5~2484.5	47.98	0.23	1.12	V	49.32	53.98	4.66	AV
	2484.5 ~ 2500	67.55	0.00	1.12	V	68.67	73.98	5.32	PK
	2484.5 ~ 2500	47.48	0.23	1.12	V	48.82	53.98	5.16	AV

Note:

* : Procedure 11.13.3 (Integration method) in ANSI 63.10-2013


■ Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

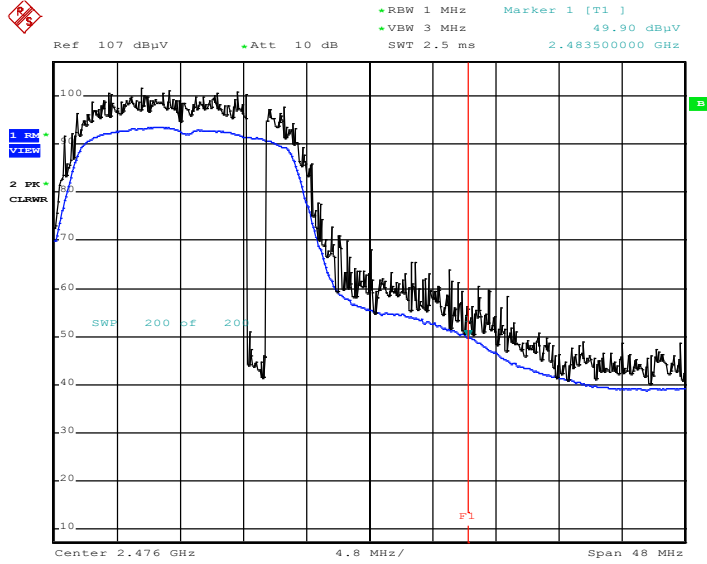


Date: 28.MAR.2019 14:56:09

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

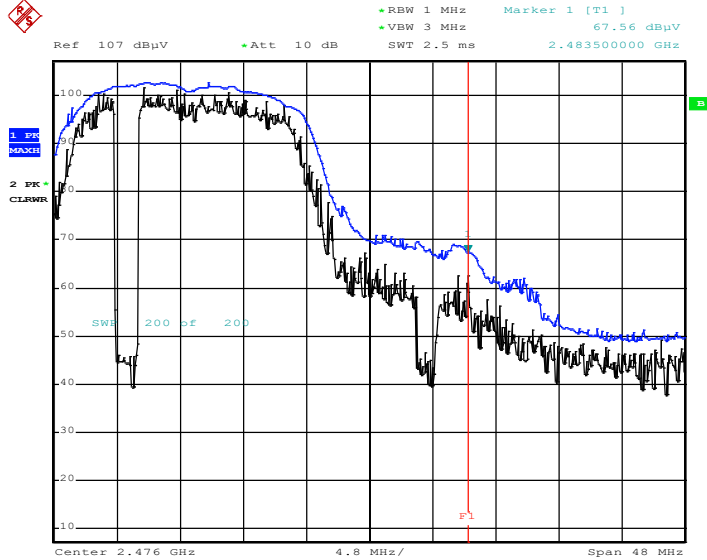


Date: 28.MAR.2019 14:57:01

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.13)

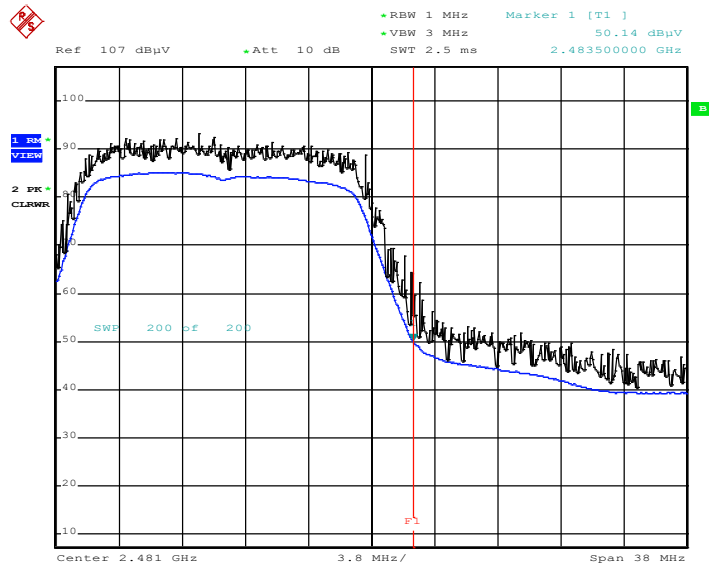


Date: 28.MAR.2019 16:17:42

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.13)

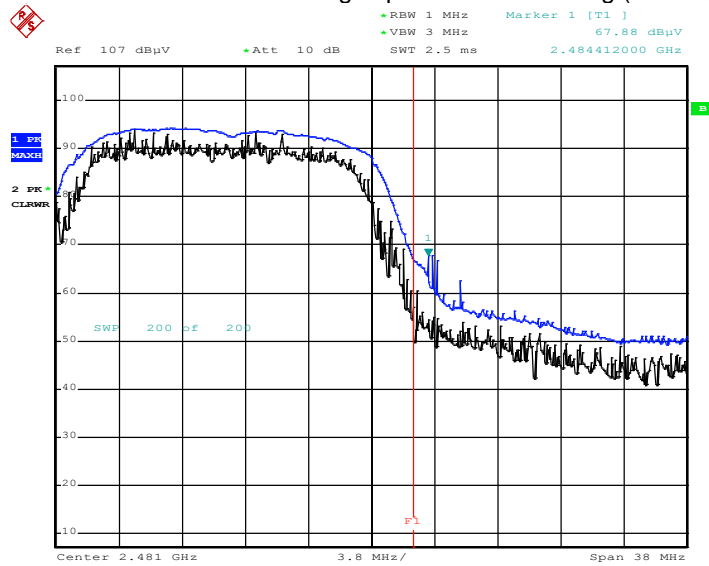


Date: 28.MAR.2019 16:18:53

Radiated Restricted Band Edges plot – Average Reading (802.11n_HT20, Ch.11) 2 483.5 MHz ~ 2 484.5 MHz

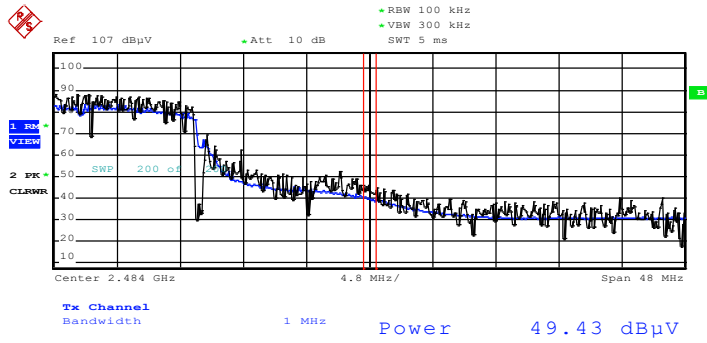


Date: 28.MAR.2019 14:43:08

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.11) 2 483.5 MHz ~ 2 484.5 MHz

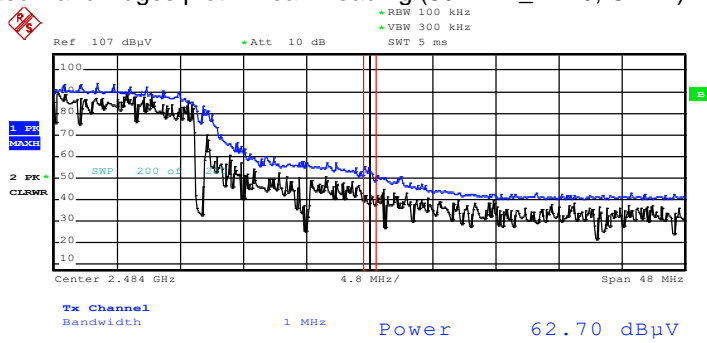


Date: 28.MAR.2019 14:44:07

Radiated Restricted Band Edges plot – Average Reading (802.11n_HT20, Ch.11) 2 484.5 MHz ~ 2.5 GHz

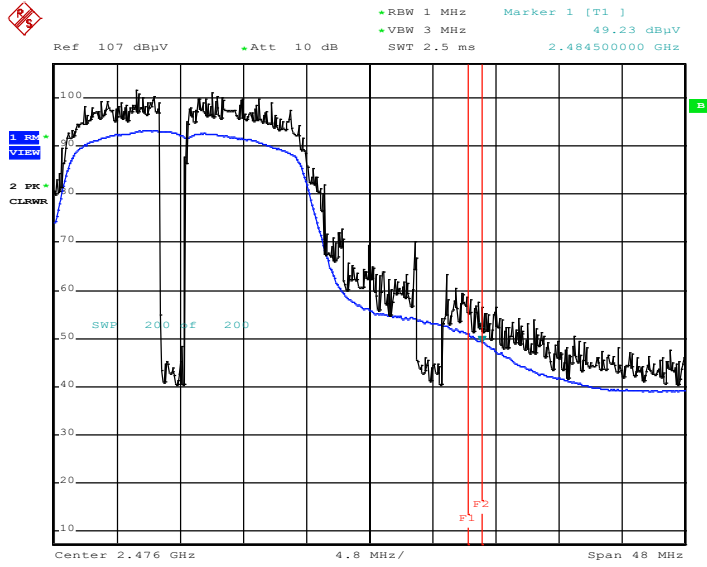


Date: 28.MAR.2019 14:42:10

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.11) 2 484.5 MHz ~ 2.5 GHz

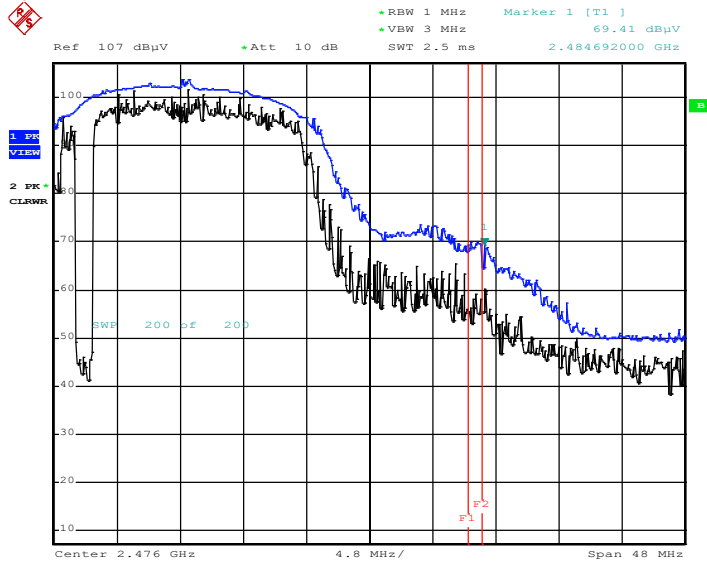


Date: 28.MAR.2019 14:40:56

Radiated Restricted Band Edges plot – Average Reading (802.11n_HT20, Ch.13) 2 483.5 MHz ~ 2 484.5 MHz

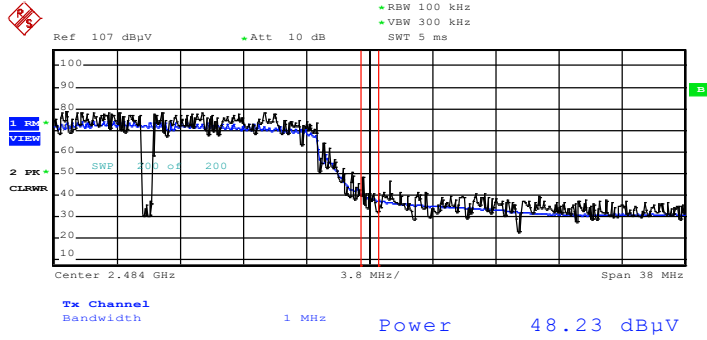


Date: 28.MAR.2019 16:23:08

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.13) 2 483.5 MHz ~ 2 484.5 MHz

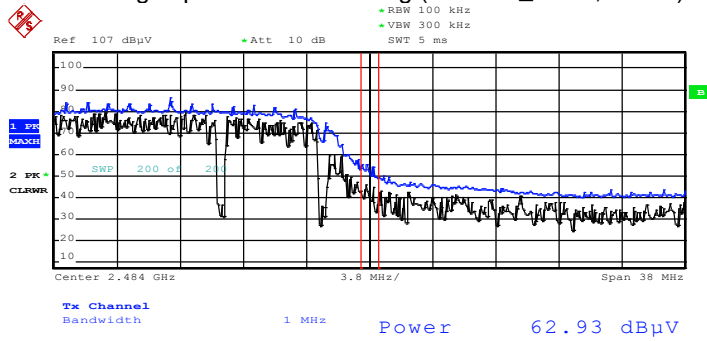


Date: 28.MAR.2019 16:24:03

Radiated Restricted Band Edges plot – Average Reading (802.11n_HT20, Ch.13) 2 484.5 MHz ~ 2.5 GHz

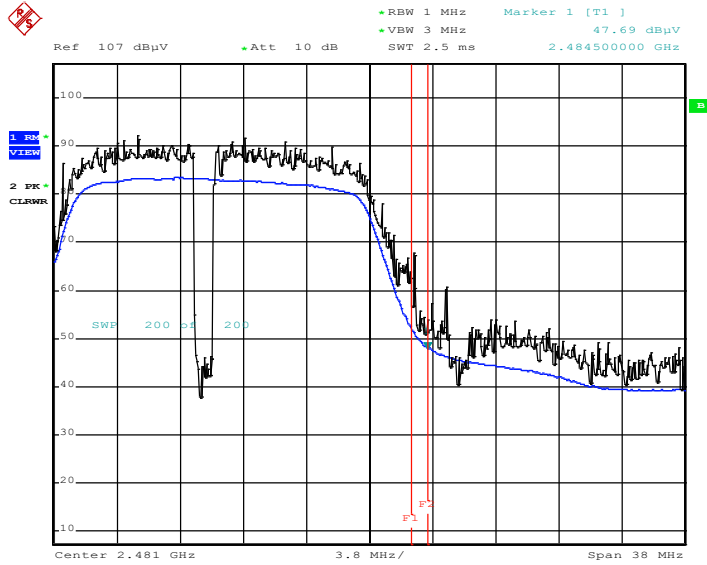

Date: 28.MAR.2019 16:21:00

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.13) 2 484.5 MHz ~ 2.5 GHz

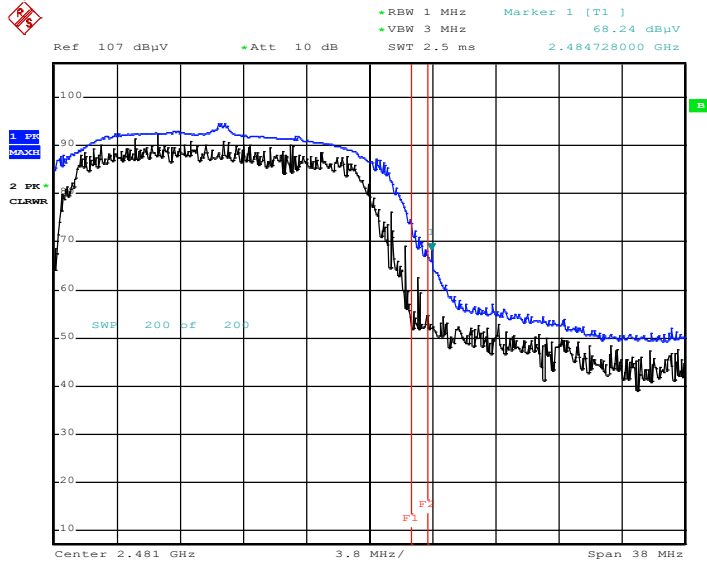

Date: 28.MAR.2019 16:21:58

Note:

Plot of worst case are only reported

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

2.4G MODE L1


1 / 2

HCT TEST Report

Common Information

EUT: SCV43
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: 2.4G MODE L1

FCC CLASS B_Exten Cable

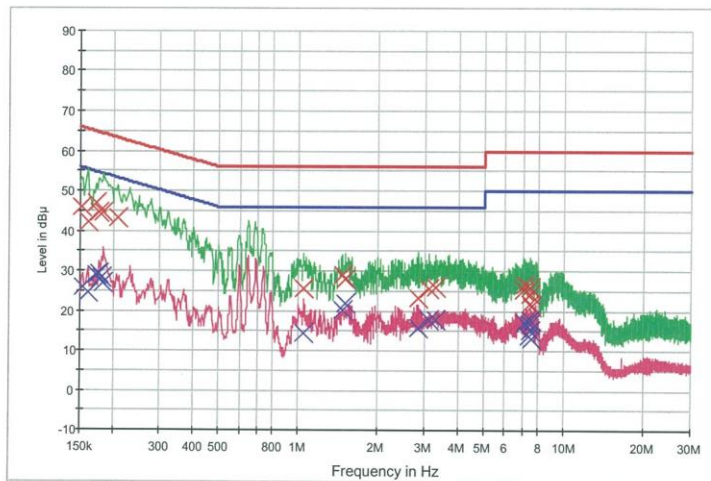

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	46.1	9.000	Off	L1	9.7	19.8	65.9
0.160000	42.3	9.000	Off	L1	9.7	23.2	65.5
0.172000	47.0	9.000	Off	L1	9.7	17.8	64.9
0.176000	44.5	9.000	Off	L1	9.7	20.2	64.7
0.184000	44.7	9.000	Off	L1	9.7	19.6	64.3
0.208000	43.2	9.000	Off	L1	9.7	20.0	63.3
1.048000	25.5	9.000	Off	L1	9.8	30.5	56.0
1.460000	28.9	9.000	Off	L1	9.9	27.1	56.0
1.502000	28.1	9.000	Off	L1	9.9	27.9	56.0
2.840000	23.1	9.000	Off	L1	9.9	32.9	56.0
3.100000	25.5	9.000	Off	L1	9.9	30.5	56.0
3.294000	26.0	9.000	Off	L1	9.9	30.0	56.0
7.022000	25.3	9.000	Off	L1	10.1	34.8	60.0
7.102000	26.7	9.000	Off	L1	10.1	33.3	60.0
7.426000	24.3	9.000	Off	L1	10.1	35.7	60.0
7.450000	25.9	9.000	Off	L1	10.1	34.1	60.0
7.476000	22.0	9.000	Off	L1	10.1	38.0	60.0
7.520000	21.1	9.000	Off	L1	10.1	38.9	60.0

2019-03-30

오전 7:43:17

2.4G MODE L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	25.9	9.000	Off	L1	9.7	29.9	55.8
0.160000	24.7	9.000	Off	L1	9.7	30.8	55.5
0.172000	29.1	9.000	Off	L1	9.7	25.7	54.9
0.176000	29.2	9.000	Off	L1	9.7	25.4	54.7
0.180000	28.4	9.000	Off	L1	9.7	26.1	54.5
0.184000	26.9	9.000	Off	L1	9.7	27.4	54.3
1.046000	14.5	9.000	Off	L1	9.8	31.5	46.0
1.460000	20.2	9.000	Off	L1	9.9	25.8	46.0
1.502000	22.0	9.000	Off	L1	9.9	24.0	46.0
2.840000	15.8	9.000	Off	L1	9.9	30.2	46.0
3.100000	17.6	9.000	Off	L1	9.9	28.4	46.0
3.294000	17.7	9.000	Off	L1	9.9	28.3	46.0
7.102000	17.0	9.000	Off	L1	10.1	33.0	50.0
7.380000	13.7	9.000	Off	L1	10.1	36.3	50.0
7.426000	15.0	9.000	Off	L1	10.1	35.0	50.0
7.450000	16.9	9.000	Off	L1	10.1	33.1	50.0
7.476000	17.6	9.000	Off	L1	10.1	32.4	50.0
7.522000	13.0	9.000	Off	L1	10.1	37.0	50.0

2019-03-30

오전 7:43:17

Conducted Emissions (Line 2)

2.4G MODE N


1 / 2

HCT TEST Report

Common Information

EUT: SCV43
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: 2.4G MODE N

FCC CLASS B_Exten Cable

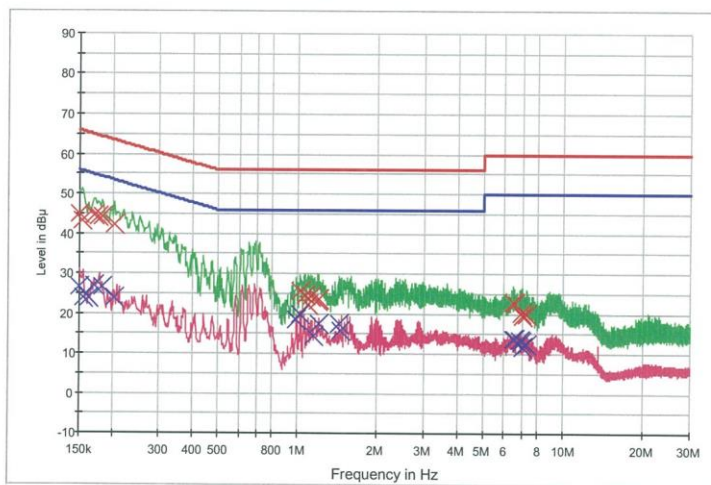

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	45.0	9.000	Off	N	9.8	21.0	66.0
0.154000	43.4	9.000	Off	N	9.8	22.4	65.8
0.170000	44.6	9.000	Off	N	9.8	20.4	65.0
0.176000	44.2	9.000	Off	N	9.8	20.4	64.7
0.184000	44.1	9.000	Off	N	9.8	20.2	64.3
0.204000	42.2	9.000	Off	N	9.9	21.3	63.4
1.024000	25.6	9.000	Off	N	10.0	30.4	56.0
1.064000	24.4	9.000	Off	N	10.0	31.6	56.0
1.100000	22.1	9.000	Off	N	10.0	33.9	56.0
1.120000	24.2	9.000	Off	N	10.0	31.8	56.0
1.194000	23.3	9.000	Off	N	10.0	32.7	56.0
1.200000	23.5	9.000	Off	N	10.0	32.5	56.0
6.472000	22.7	9.000	Off	N	10.3	37.3	60.0
6.508000	22.9	9.000	Off	N	10.3	37.1	60.0
6.544000	22.4	9.000	Off	N	10.3	37.6	60.0
6.944000	20.3	9.000	Off	N	10.3	39.7	60.0
7.068000	19.3	9.000	Off	N	10.3	40.7	60.0
7.328000	19.8	9.000	Off	N	10.4	40.2	60.0

2019-03-30

오전 7:54:23

2.4G MODE N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	26.7	9.000	Off	N	9.8	29.3	56.0
0.156000	24.0	9.000	Off	N	9.8	31.6	55.7
0.162000	24.1	9.000	Off	N	9.8	31.3	55.4
0.170000	27.1	9.000	Off	N	9.8	27.9	55.0
0.182000	26.7	9.000	Off	N	9.8	27.7	54.4
0.204000	23.9	9.000	Off	N	9.9	29.5	53.4
0.988000	18.5	9.000	Off	N	10.0	27.5	46.0
1.024000	19.9	9.000	Off	N	10.0	26.1	46.0
1.150000	14.6	9.000	Off	N	10.0	31.4	46.0
1.198000	17.5	9.000	Off	N	10.0	28.5	46.0
1.430000	17.4	9.000	Off	N	10.1	28.6	46.0
1.450000	15.7	9.000	Off	N	10.1	30.3	46.0
6.508000	13.8	9.000	Off	N	10.3	36.2	50.0
6.542000	13.6	9.000	Off	N	10.3	36.4	50.0
6.838000	13.5	9.000	Off	N	10.3	36.5	50.0
6.946000	13.0	9.000	Off	N	10.3	37.0	50.0
7.068000	11.6	9.000	Off	N	10.3	38.4	50.0
7.328000	12.4	9.000	Off	N	10.4	37.6	50.0

2019-03-30

오전 7:54:23

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY52090906
Agilent	N9030A / Signal Analyzer	01/10/2019	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/26/2018	Annual	101231
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Chang Woo Inc.	18N-20dB / Attenuator(20 dB)	05/09/2018	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/17/2018	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/10/2018	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/10/2018	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1904-FC024-P