

TEST REPORT

OF

FCC Part 15 Subpart C §15.209

FCC ID: A3LSE370

Equipment Under Test : LED Monitor
Model Name : S24E370DL (Alt. S27E370D)
Applicant : Samsung Electronics Co., Ltd.
Manufacturer : Samsung Electronics Co., Ltd.
Date of Test(s) : 2015.05.29 ~ 2015.06.08
Date of Issue : 2015.06.20

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Youngmin Park

Date:

2015.06.20

Approved By:



Hyunchoe You

Date:

2015.06.20

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

<u>TABLE OF CONTENTS</u>	Page
1. General Information -----	3
2. Field Strength of Fundamental and Spurious Emission -----	8
3. 20 dB Bandwidth -----	25
4. Transmitter AC Power Line Conducted Emission -----	29

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General Information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-837

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of applicant

Applicant : Samsung Electronics Co., Ltd.

Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea

Contact Person : Cho, Min-hyung

Phone No. : +82 31 277 2688

1.3. Description of EUT

Kind of Product	LED Monitor
Model Name	S24E370DL (Alt. S27E370D)
Power Supply	AC 120 V (Used AC 100 V ~ 240 V adaptor)
Frequency Range	115 kHz ~ 205 kHz
Operating Conditions	10 °C ~ 40 °C
Maximum Field strength	S24E370DL : 81.00 dB μ V/m at 3 m (1 dB μ V/m at 300 m) S27E370D : 87.50 dB μ V/m at 3 m (7.50 dB μ V/m at 300 m)
Antenna Type	Inductive loop coil antenna

1.4. Declarations by the manufacturer

- Operation temperature : 10 °C ~ 40 °C

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Spectrum Analyzer	R&S	FSV30	103210	Dec. 29, 2015	Annual	Dec. 29, 2016
Signal Generator	R&S	SMBV100A	255834	Jun. 25, 2014	Annual	Jun. 25, 2015
Mobile Test Unit	R&S	CMW500	144035	Mar. 03, 2015	Annual	Mar. 03, 2016
Preamplifier	H.P.	8447F	2944A03909	Aug. 27, 2014	Annual	Aug. 27, 2015
Test Receiver	R&S	ESU26	100109	Mar. 03, 2015	Annual	Mar. 03, 2016
Test Receiver	R&S	ESCI 7	100911	Dec. 24, 2014	Annual	Dec. 24, 2015
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Jul. 29, 2013	Biennial	Jul. 29, 2015
Bilog Antenna	TESEQ	CBL6112D	25232	Oct. 24, 2013	Biennial	Oct. 24, 2015
Two-Line V-Network	R&S	ENV216	100190	Dec. 25, 2014	Annual	Dec. 25, 2015
Antenna Master	INN-CO	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	INN-CO	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Shield Room	SY Corporation	L x W x H (6.5 m x 3.5 m x 3.5 m)	N/A	N.C.R.	N/A	N.C.R.

1.6. Sample calculation

Where relevant, the following sample calculation is provided:

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) – amplifier gain (dB)

1.7. Information of alternate model

Model name	Information
S24E370DL	- Basic model.
S27E370D	- Same as the basic model, but it has a different monitor screen size. - There are no difference between basic model and alternative model electrical and electronic properties, circuits, components, features, appearance, structure for the wireless charging parts.

Note :

The worst case is in S27E370D

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.8. Worst case of test configurations

In order to check all kinds of possible configurations, EUT was evaluated with appropriate client and under each charging condition as below table.

EUT configuration	Charging current (mA)	Mobile phone	Description
Charging Mode ¹⁾ with resistive load	145		Maximum resistive load
	350		Medium resistive load
	645		Minimum resistive load
Charging Mode ²⁾ with client device (FCC ID : A3LSMN910V)		SM-N910V	Less than 1 % of battery
		SM-N910V	Less than 50 % of battery
		SM-N910V	100 % full charging of battery

1) Test Jig was used during the test to satisfy each current status by using resistive loads.

Output voltage = AC 120 V, Output current = 145 mA / 350 mA / 645 mA


- (Maximum load) $827.59 \Omega = 120 \text{ V} / 0.145 \text{ A}$
- (Medium load) $342.86 \Omega = 120 \text{ V} / 0.350 \text{ A}$
- (Minimum load) $186.05 \Omega = 120 \text{ V} / 0.645 \text{ A}$

2) WPC device with client device was investigated each battery status and compared in two operating configurations.

Battery status during charging condition

- Less than 1 % of battery
- Less than 50 % of battery
- 100 % of battery

Galaxy Note4 (SM-N910V)

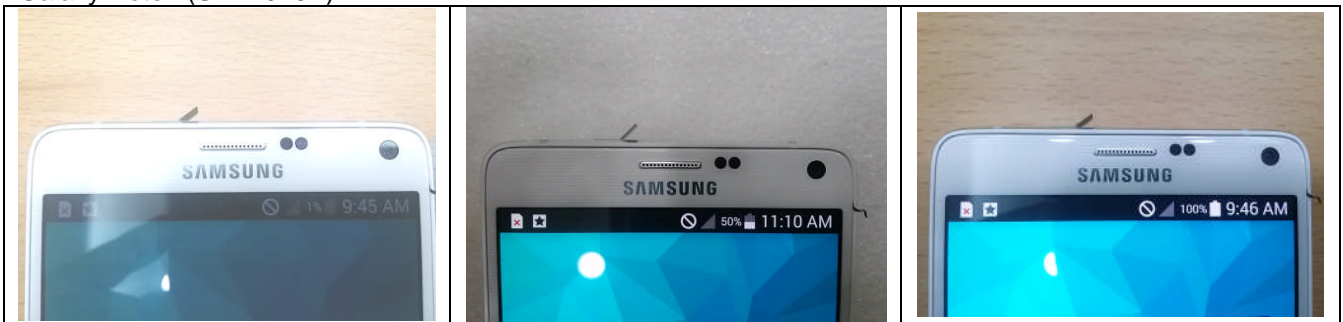

Plot#1 – less than 1 % of battery

Plot#2 – less than 50 % of battery


Plot#3 – 100 % of battery

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating configurations :

Galaxy Note4 (SM-N910V)

- While the client device was in airplane mode (Trace#1 "M1")
 - While the wireless charger is charging with the client device turned off. (Trace#2 "M2")
 - While the wireless charger is charging without the client device. (Trace#3 "M3")
 - While the client device was connected to an active data connection (Trace#4 "M4")
- The device was tested under all modes and bands like 2G and 3G.
In the result, **PCS GSM / GPRS1900 / 1 TX** was found in **High channel**.

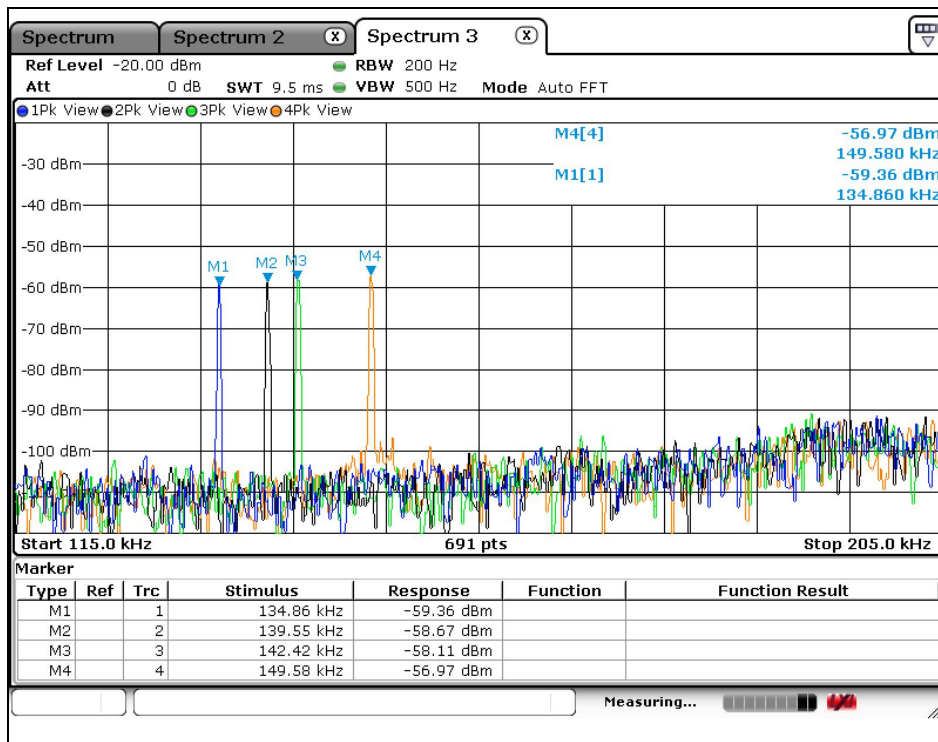

Plot – fundamental emission comparison

- The level of Trace#4 was more than Trace#1, 2 and 3. So Trace#4 was selected.
- Trace#4 as **PCS GSM / GPRS1900 / 1 TX** which was found in **High channel** should be tested with the client device as a worst case.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.9. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15 Subpart C §15.209		
Section in FCC 15 Subpart C	Test Item	Result
15.209 15.209(a)	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
2.1049	20 dB Bandwidth	Complied
15.207	Transmitter AC Power Line Conducted Emission	Complied

1.10. Test Report Revision


Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL008835	2015.06.12	Initial
1	F690501/RF-RTL008835-1	2015.06.16	Commented additional description between basic model and alternative model
2	F690501/RF-RTL008835-2	2015.06.16	Added test result for the alternate model
3	F690501/RF-RTL008835-3	2015.06.20	Modified EUT name

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


2. Field Strength of Fundamental and Spurious Emission

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

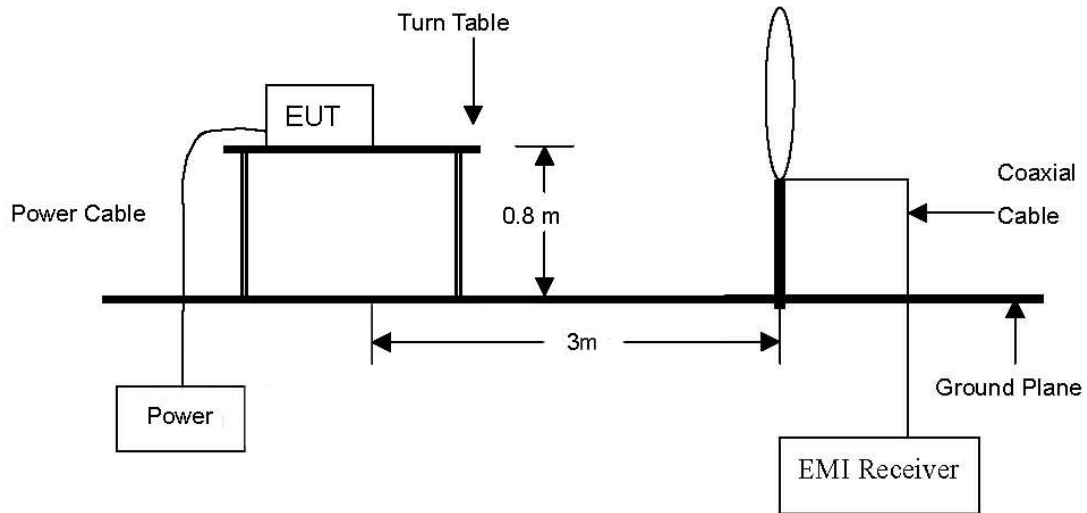

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

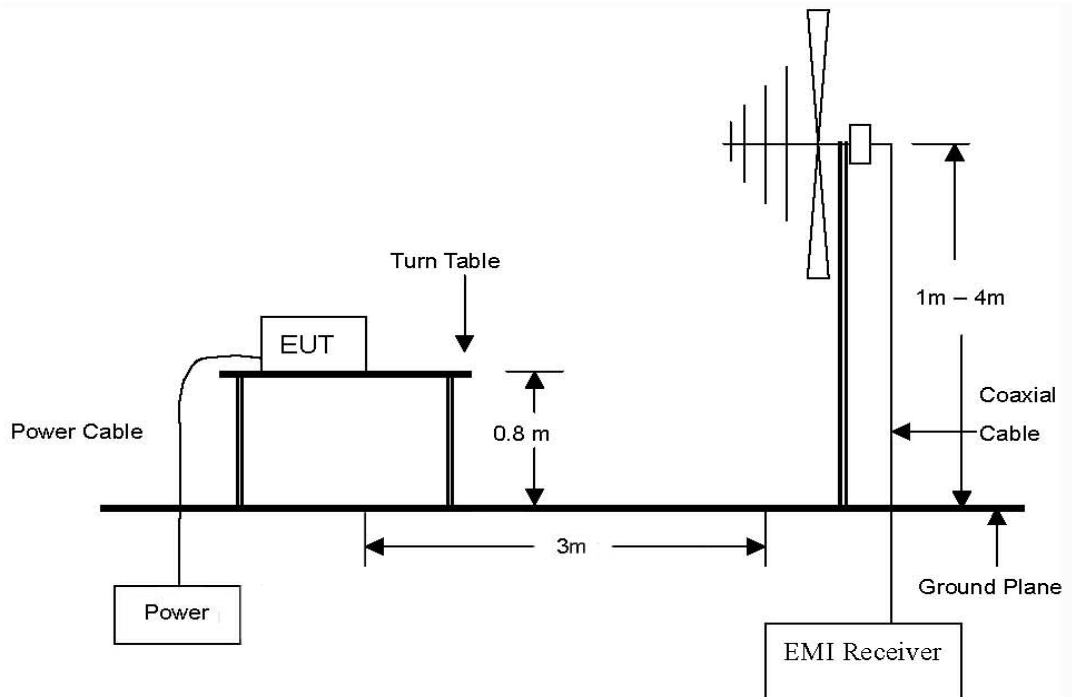

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.2. Limit

2.2.1. Radiated emission limits, general requirements

According to §15.209 (a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2009

2.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Field Strength of Fundamental Test Result

Ambient temperature : (24 ± 1) °C
 Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. The field strength of spurious emission was measured in one orthogonal EUT position (x-axis). Definition of DUT for a orthogonal plane was described in the test setup photo.

S24E370DL

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
Charging mode with resistive load (145 mA status)									
0.157	56.70	Average	H	20.02	0.08	76.80	-3.20	23.69	26.89
Charging mode with resistive load (350 mA status)									
0.176	52.00	Average	H	20.02	0.08	72.10	-7.90	22.69	30.59
Charging mode with resistive load (645 mA status)									
0.158	57.10	Average	H	20.02	0.08	77.20	-2.80	23.63	26.43
Charging mode with client (less than 1 % battery status)									
0.149	57.40	Average	H	20.03	0.07	77.50	-2.50	24.14	26.64
Charging mode with client (less than 50 % battery status)									
0.162	53.40	Average	H	20.02	0.08	73.50	-6.50	23.41	29.91
Charging mode with client (100 % battery status)									
0.135	60.90	Average	H	20.03	0.07	81.00	1.00	25.00	24.00

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

S27E370D

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
Charging mode with resistive load (145 mA status)									
0.155	57.60	Average	H	20.02	0.08	77.70	-2.30	23.80	26.10
Charging mode with resistive load (350 mA status)									
0.169	53.10	Average	H	20.02	0.08	73.20	-6.80	23.05	29.85
Charging mode with resistive load (645 mA status)									
0.164	54.61	Average	H	20.02	0.08	74.71	-5.29	23.31	28.60
Charging mode with client (less than 1 % battery status)									
0.154	58.10	Average	H	20.02	0.08	78.20	-1.80	23.85	25.65
Charging mode with client (less than 50 % battery status)									
0.127	65.90	Average	H	20.03	0.07	86.00	6.00	25.53	19.53
Charging mode with client (100 % battery status)									
0.125	67.40	Average	H	20.03	0.07	87.50	7.50	25.67	18.17

Note:

1. According to §15.31 (f)(2) $300\text{ m Result}(\text{dB}\mu\text{V}/\text{m}) = 3\text{ m Result}(\text{dB}\mu\text{V}/\text{m}) - 40\log(300/3)$ (dB μ V/m)
2. According to §15.209 (d), the measurements were tested by using Quasi peak detector except for the frequency bands 9 – 90 kHz, 110 – 490 kHz and above 1 GHz in these three bands on measurements employing an average detector.
3. The limit above was calculated based on table of §15.209 (a).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.5. Spurious Emission Test Result

Ambient temperature : (24 ± 1) °C
 Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

S24E370DL

A. Charging mode with resistive load (145 mA status)

-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.010	17.90	Average	H	20.51	0.05	38.46	-41.54	47.60	89.14
0.097	4.70	Quasi peak	H	20.04	0.07	24.81	-55.19	27.87	83.06
0.472	35.90	Average	H	20.11	0.11	56.12	-23.88	14.13	38.01
0.785	26.90	Quasi peak	H	20.20	0.14	47.24	7.24	29.71	22.47

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.90	36.06	Peak	H	9.39	-25.95	19.50	40.00	20.50
95.88	35.82	Peak	V	9.50	-25.92	19.40	46.00	26.60
106.11	35.64	Peak	H	10.06	-25.80	19.90	40.00	20.10
107.68	34.14	Peak	V	10.15	-25.79	18.50	40.00	21.50
599.55	33.70	Peak	H	20.45	-24.05	30.10	43.50	13.40
621.78	34.23	Peak	V	20.61	-23.94	30.90	43.50	12.60
Above 700.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

B. Charging mode with resistive load (350 mA status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.011	17.30	Average	H	20.50	0.05	37.85	-42.15	46.78	88.93
0.094	7.50	Quasi peak	H	20.04	0.07	27.61	-52.39	28.14	80.53
0.531	34.20	Quasi peak	H	20.14	0.11	54.45	14.45	33.10	18.65
0.884	28.00	Quasi peak	H	20.22	0.15	48.37	8.37	28.68	20.31

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
40.95	34.22	Peak	H	12.80	-26.72	20.30	40.00	19.70
93.90	36.86	Peak	H	9.39	-25.95	20.30	46.00	25.70
95.88	36.32	Peak	V	9.50	-25.92	19.90	40.00	20.10
238.43	32.69	Peak	V	12.21	-24.40	20.50	40.00	19.50
412.18	34.51	Peak	H	17.17	-24.28	27.40	40.00	12.60
942.69	33.82	Peak	V	24.49	-22.11	36.20	43.50	7.30
Above 950.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

C. Charging mode with resistive load (645 mA status)

-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.010	20.10	Average	H	20.51	0.05	40.66	-39.34	47.60	86.94
0.075	3.50	Average	H	20.08	0.06	23.64	-56.36	30.10	86.46
0.472	35.50	Average	H	20.11	0.11	55.72	-24.28	14.13	38.41
2.830	28.20	Quasi peak	H	20.09	0.20	48.49	8.49	29.54	21.05
13.561	19.70	Quasi peak	H	20.13	0.49	40.32	0.32	29.54	29.22

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
42.69	33.42	Peak	H	12.07	-26.69	18.80	40.00	21.20
44.91	33.12	Peak	V	11.14	-26.66	17.60	46.00	28.40
93.90	35.86	Peak	H	9.39	-25.95	19.30	40.00	20.70
95.92	34.82	Peak	V	9.50	-25.92	18.40	40.00	21.60
106.06	35.74	Peak	H	10.06	-25.80	20.00	43.50	23.50
Above 200.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

D. Charging mode with client device (less than 1 % battery status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.009	18.80	Average	H	20.60	0.05	39.45	-40.55	48.52	89.07
0.032	19.60	Average	H	20.23	0.06	39.89	-40.11	37.50	77.61
0.449	34.80	Average	H	20.10	0.10	55.00	-25.00	14.56	39.56
2.922	25.90	Quasi peak	H	20.09	0.20	46.19	6.19	29.54	23.35
13.562	19.30	Quasi peak	H	20.13	0.49	39.92	-0.08	29.54	29.62

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
39.74	34.10	Peak	H	13.34	-26.74	20.70	40.00	19.30
89.09	34.09	Peak	H	9.06	-26.05	17.10	46.00	28.90
93.90	36.56	Peak	V	9.39	-25.95	20.00	40.00	20.00
106.11	35.14	Peak	V	10.06	-25.80	19.40	40.00	20.60
252.82	33.94	Peak	H	13.17	-24.31	22.80	43.50	20.70
Above 300.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

E. Charging mode with client device (less than 50 % battery status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.009	19.70	Average	H	20.60	0.05	40.35	-39.65	48.52	88.17
0.031	21.10	Average	H	20.23	0.05	41.38	-38.62	37.78	76.40
0.488	31.20	Average	H	20.12	0.11	51.43	-28.57	13.84	42.41
2.758	24.60	Quasi peak	H	20.10	0.20	44.90	4.90	29.54	24.64
13.561	20.10	Quasi peak	H	20.13	0.49	40.72	0.72	29.54	28.82

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.86	36.06	Peak	H	9.39	-25.95	19.50	40.00	20.50
95.84	36.72	Peak	V	9.50	-25.92	20.30	43.50	23.20
106.06	35.74	Peak	H	10.06	-25.80	20.00	46.00	26.00
106.11	34.44	Peak	V	10.06	-25.80	18.70	43.50	24.80
430.17	34.07	Peak	V	17.49	-24.26	27.30	43.50	16.20
619.76	34.71	Peak	H	20.60	-23.91	31.40	43.50	12.10
Above 700.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

F. Charging mode with client device (100 % battery status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.033	22.20	Average	H	20.22	0.06	42.48	-37.52	37.23	74.75
0.066	14.20	Average	H	20.09	0.06	34.35	-45.65	31.21	76.86
0.389	6.30	Average	H	20.06	0.10	26.46	-53.54	15.81	69.35
2.840	9.80	Quasi peak	H	20.09	0.20	30.09	-9.91	29.54	39.45
11.620	15.70	Quasi peak	H	20.13	0.44	36.27	-3.73	29.54	33.27

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
54.74	33.01	Peak	H	6.77	-26.48	13.30	40.00	26.70
72.92	34.03	Peak	H	6.33	-26.26	14.10	43.50	29.40
93.94	36.56	Peak	H	9.39	-25.95	20.00	46.00	26.00
95.84	36.02	Peak	V	9.50	-25.92	19.60	40.00	20.40
106.15	35.34	Peak	V	10.06	-25.80	19.60	43.50	23.90
891.08	34.81	Peak	V	23.70	-22.51	36.00	43.50	7.50
Above 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

S27E370D
A. Charging mode with resistive load (145 mA status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.009	20.00	Average	H	20.60	0.05	40.65	-39.35	48.52	87.87
0.080	6.20	Average	H	20.07	0.07	26.34	-53.66	29.54	83.20
0.464	37.10	Average	H	20.11	0.11	57.32	-22.68	14.27	36.95
13.563	16.90	Quasi peak	H	20.13	0.49	37.52	-2.48	29.54	32.02

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
46.05	34.80	Peak	H	10.54	-26.64	18.70	40.00	21.30
67.79	33.91	Peak	V	5.52	-26.33	13.10	46.00	32.90
93.86	35.36	Peak	V	9.39	-25.95	18.80	40.00	21.20
106.06	36.64	Peak	V	10.06	-25.80	20.90	40.00	19.10
146.28	34.18	Peak	H	11.27	-25.45	20.00	43.50	23.50
459.10	34.07	Peak	H	18.01	-24.28	27.80	43.50	15.70
Above 500.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

B. Charging mode with resistive load (350 mA status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.009	18.90	Average	H	20.60	0.05	39.55	-40.45	48.52	88.97
0.030	17.20	Average	H	20.24	0.05	37.49	-42.51	38.06	80.57
0.507	30.20	Quasi peak	H	20.13	0.11	50.44	10.44	33.50	23.06
11.618	16.60	Quasi peak	H	20.13	0.44	37.17	-2.83	29.54	32.37

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.90	36.56	Peak	H	9.39	-25.95	20.00	40.00	20.00
106.06	34.64	Peak	H	10.06	-25.80	18.90	46.00	27.10
107.68	35.94	Peak	V	10.15	-25.79	20.30	40.00	19.70
280.30	30.60	Peak	H	13.68	-23.98	20.30	40.00	19.70
460.56	29.03	Peak	V	18.04	-24.27	22.80	40.00	17.20
Above 500.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

C. Charging mode with resistive load (645 mA status)

-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.009	19.10	Average	H	20.60	0.05	39.75	-40.25	48.52	88.77
0.015	14.70	Average	H	20.44	0.05	35.19	-44.81	44.08	88.89
0.488	29.30	Average	H	20.12	0.11	49.53	-30.47	13.84	44.31
11.621	20.80	Quasi peak	H	20.13	0.44	41.37	1.37	29.54	28.17

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.90	36.16	Peak	V	9.39	-25.95	19.60	40.00	20.40
106.06	35.44	Peak	H	10.06	-25.80	19.70	46.00	26.30
133.63	34.37	Peak	H	11.32	-25.59	20.10	40.00	19.90
567.02	34.50	Peak	V	19.90	-24.30	30.10	40.00	9.90
Above 600.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

D. Charging mode with client device (less than 1 % battery status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.011	18.60	Average	H	20.50	0.05	39.15	-40.85	46.78	87.63
0.032	20.70	Average	H	20.23	0.06	40.99	-39.01	37.50	76.51
0.463	35.00	Average	H	20.11	0.11	55.22	-24.78	14.29	39.07
11.622	24.40	Quasi peak	H	20.13	0.44	44.97	4.97	29.54	24.57

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.90	35.76	Peak	H	9.39	-25.95	19.20	40.00	20.80
107.72	35.34	Peak	H	10.15	-25.79	19.70	46.00	26.30
158.61	34.53	Peak	V	10.72	-25.25	20.00	40.00	20.00
314.94	34.19	Peak	H	14.47	-23.96	24.70	40.00	15.30
547.29	34.62	Peak	V	19.56	-24.48	29.70	43.50	13.80
Above 600.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

E. Charging mode with client device (less than 50 % battery status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.011	17.40	Average	H	20.50	0.05	37.95	-42.05	46.78	88.83
0.034	18.80	Average	H	20.22	0.06	39.08	-40.92	36.97	77.89
0.383	41.50	Average	H	20.06	0.10	61.66	-18.34	15.94	34.28
11.620	27.80	Quasi peak	H	20.13	0.44	48.37	8.37	29.54	21.17

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.90	36.86	Peak	H	9.39	-25.95	20.30	40.00	19.70
95.88	35.92	Peak	V	9.50	-25.92	19.50	43.50	24.00
106.06	35.54	Peak	H	10.06	-25.80	19.80	46.00	26.20
107.72	34.64	Peak	V	10.15	-25.79	19.00	43.50	24.50
155.94	33.64	Peak	H	10.84	-25.28	19.20	43.50	24.30
324.07	35.10	Peak	V	14.74	-23.94	25.90	43.50	17.60
Above 400.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

F. Charging mode with client device (100 % battery status)
-Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 30 m or 300 m	Limit (dB μ V/m)	Margin (dB)
0.031	20.80	Average	H	20.23	0.05	41.08	-38.92	37.78	76.70
0.091	16.20	Quasi peak	H	20.05	0.07	36.32	-43.68	28.42	72.10
0.376	41.92	Average	H	20.06	0.10	62.08	-17.92	16.10	34.02
11.621	30.70	Quasi peak	H	20.13	0.44	51.27	11.27	29.54	18.27

-Above 30 MHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m) at 3 m	Limit (dB μ V/m)	Margin (dB)
93.90	36.36	Peak	H	9.39	-25.95	19.80	40.00	20.20
93.94	36.36	Peak	V	9.39	-25.95	19.80	43.50	23.70
103.56	35.39	Peak	V	9.92	-25.81	19.50	46.00	26.50
107.68	35.74	Peak	H	10.15	-25.79	20.10	40.00	19.90
401.43	34.25	Peak	H	16.98	-24.13	27.10	43.50	16.40
959.22	33.98	Peak	V	24.76	-22.04	36.70	43.50	6.80
Above 960.00	Not detected	-	-	-	-	-	-	-


Note:

1. According to §15.31 (f)(2) 300 m Result(dB μ V/m) = 3 m Result(dB μ V/m) – 40log(300/3) (dB μ V/m)
2. 30 m Result(dB μ V/m) = 3 m Result(dB μ V/m) – 40log(30/3) (dB μ V/m)
3. According to field strength table of general requirement in §15.209 (a), field strength limits below 1.705 MHz were calculated as below.
 - 9 kHz to 490 kHz : 20log(2 400 / F (kHz)) at 300 m (dB μ V/m)
 - 490 kHz to 1 705 kHz : 20log(24 000 / F (kHz)) at 30 m (dB μ V/m)
4. According to §15.209 (d), the measurements were tested by using Quasi peak detector except for the frequency bands 9 – 90 kHz, 110 – 490 kHz and above 1 GHz in these three bands on measurements employing an average detector.
5. All results above 30 MHz are peak detector.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. 20 dB Bandwidth

3.1. Test Setup

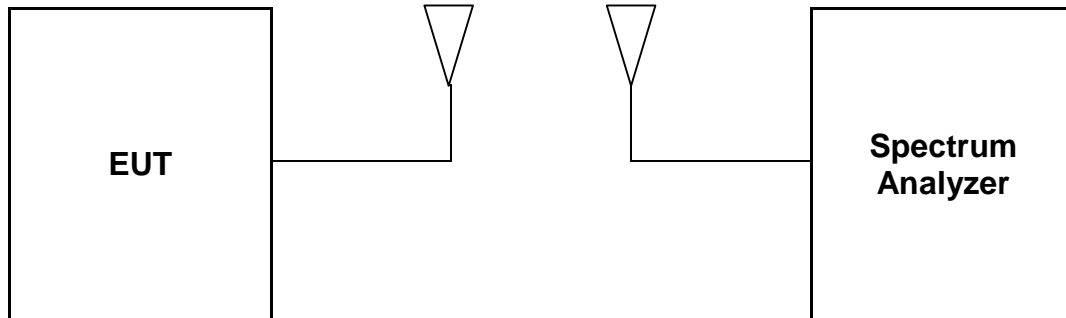

3.2. Limit

None; for reporting purposed only

3.3. Test Procedure

20 dB Bandwidth

- a. Span = approximately 2 to 3 times the 20 dB bandwidth, RBW = greater than 1 % of the 20 dB bandwidth, VBW = RBW, Sweep = auto, Detector = peak, Trace = max hold.
- b. The marker-to-peak function to set the mark to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is 20 dB bandwidth of the emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4. Test Result

Ambient temperature : (24 ± 1) °C
 Relative humidity : 47 % R.H.

S24E370DL


EUT status	20 dB Bandwidth (kHz)	Limit
With client device (100 % of battery)	0.268	Reporting proposed only
with resistive load (645 mA)	0.304	

S27E370D


EUT status	20 dB Bandwidth (kHz)	Limit
With client device (100 % of battery)	0.282	Reporting proposed only
with resistive load (645 mA)	0.282	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

S24E370DL 20 dB Bandwidth (With client device)

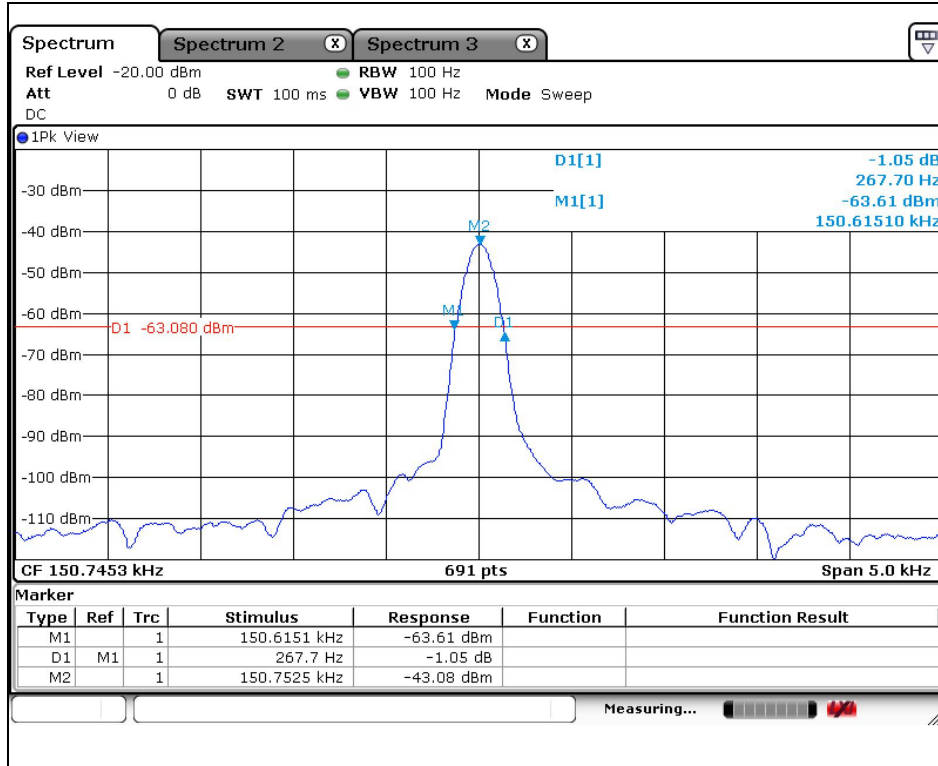


20 dB Bandwidth (With resistive load)

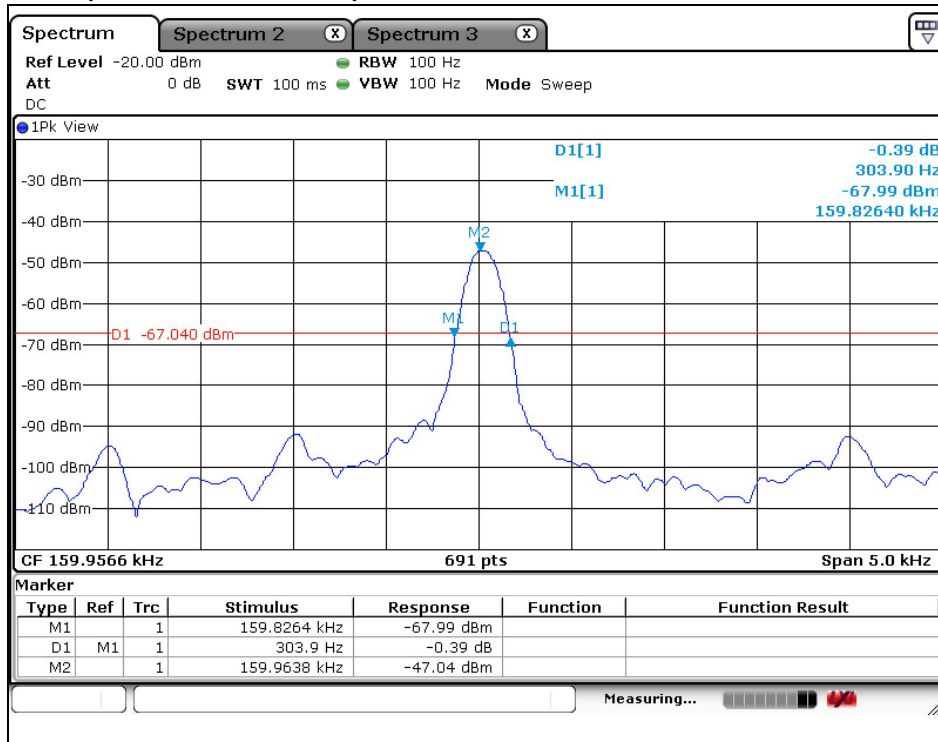


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

S27E370D 20 dB Bandwidth (With client device)

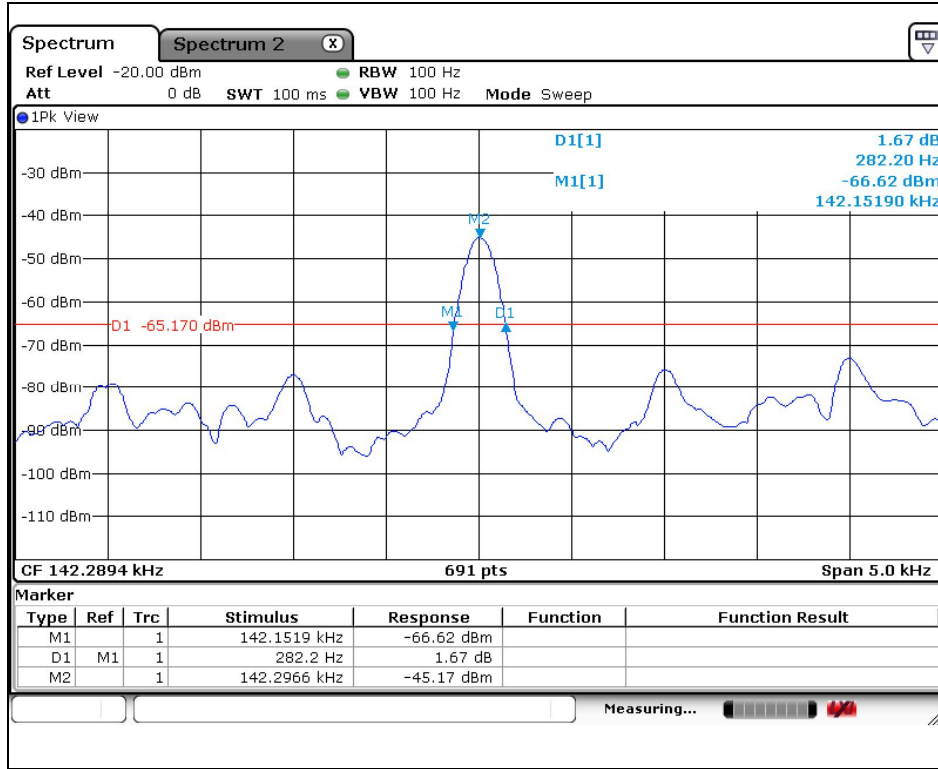


20 dB Bandwidth (With resistive load)

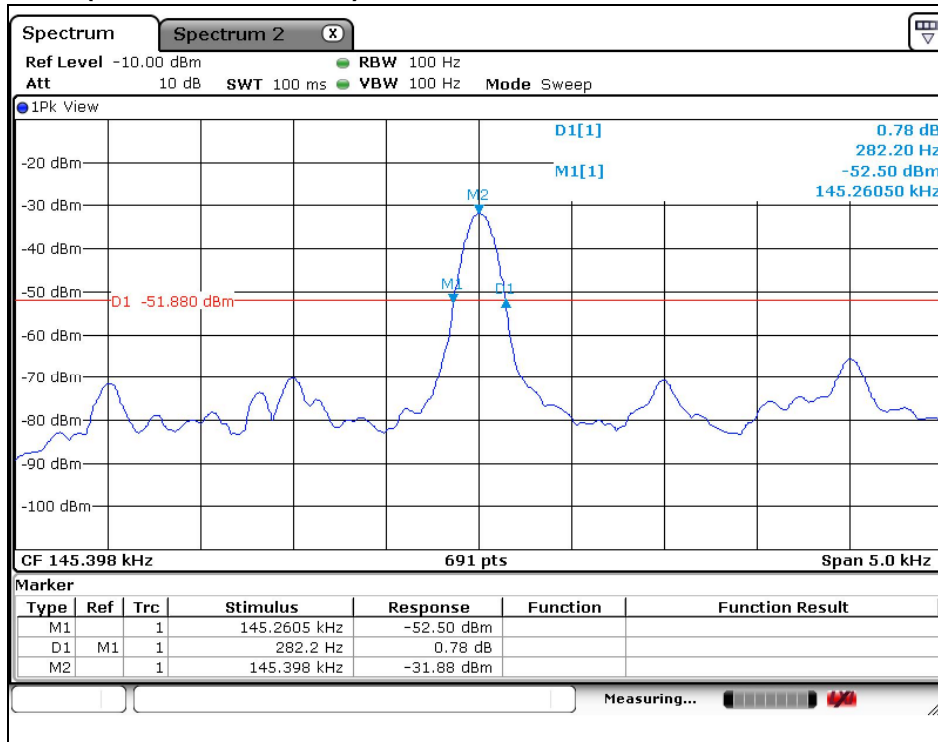

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Transmitter AC Power Line Conducted Emission

4.1. Test Setup

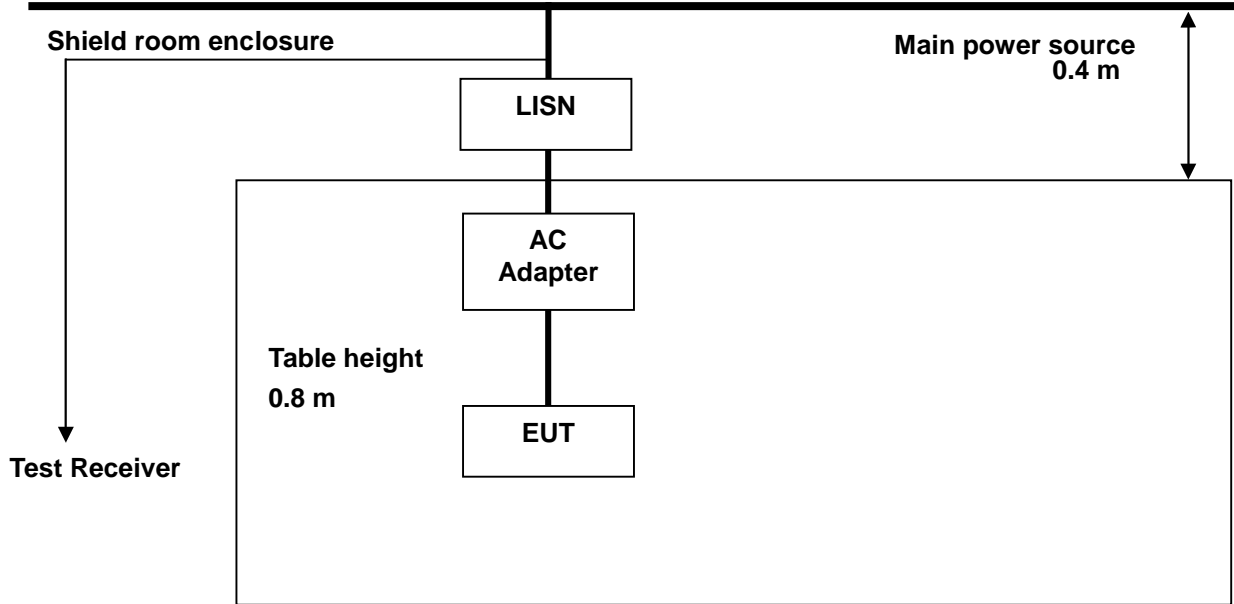

4.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H / 50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower value applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3. Test Procedures

AC conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2009

1. The test procedure is performed in a 6.5 m × 3.6 m × 3.6 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (24 ± 1) °C
 Relative humidity : 47 % R.H.

 Frequency range : 0.15 MHz – 30 MHz
 Measured Bandwidth : 9 kHz

S24E370DL

Charging mode with resistive load (350 mA status)

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.46	30.80	25.50	N	56.69	46.69	25.89	21.19
1.24	20.70	15.40	N	56.00	46.00	35.30	30.60
4.11	20.40	14.00	N	56.00	46.00	35.60	32.00
5.59	21.60	16.30	N	60.00	50.00	38.40	33.70
10.87	22.60	17.40	N	60.00	50.00	37.40	32.60
14.38	21.80	17.40	N	60.00	50.00	38.20	32.60
0.92	23.20	16.90	H	56.00	46.00	32.80	29.10
5.99	29.70	23.50	H	60.00	50.00	30.30	26.50
9.77	30.40	25.10	H	60.00	50.00	29.60	24.90
11.98	32.50	23.10	H	60.00	50.00	27.50	26.90
24.13	19.60	13.70	H	60.00	50.00	40.40	36.30
29.09	19.50	14.20	H	60.00	50.00	40.50	35.80

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

S27E370D
Charging mode with resistive load (350 mA status)

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.53	38.90	24.00	N	56.00	46.00	17.10	22.00
3.21	32.60	21.90	N	56.00	46.00	23.40	24.10
5.90	37.90	26.50	N	60.00	50.00	22.10	23.50
9.44	34.60	30.20	N	60.00	50.00	25.40	19.80
11.87	36.60	25.80	N	60.00	50.00	23.40	24.20
14.85	36.80	25.80	N	60.00	50.00	23.20	24.20
0.43	34.20	28.20	H	57.25	47.25	23.05	19.05
1.30	24.10	18.20	H	56.00	46.00	31.90	27.80
4.04	21.90	15.40	H	56.00	46.00	34.10	30.60
5.96	20.70	14.70	H	60.00	50.00	39.30	35.30
10.81	23.70	18.60	H	60.00	50.00	36.30	31.40
14.72	27.30	22.70	H	60.00	50.00	32.70	27.30


Note ;

1. Line (H): Hot, Line (N): Neutral
2. Charging mode with resistive load(145 mA, 350 mA, and 645 mA) and Charging mode with client device(1 %, 50 %, and 100 % of battery) are tested. As worst condition, Charging mode with resistive load(350 mA) is reported.
3. The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
4. Traces shown in plot mad using a peak detector and average detector
5. Deviations to the Specifications: None.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


S24E370DL

Test mode: (Neutral)

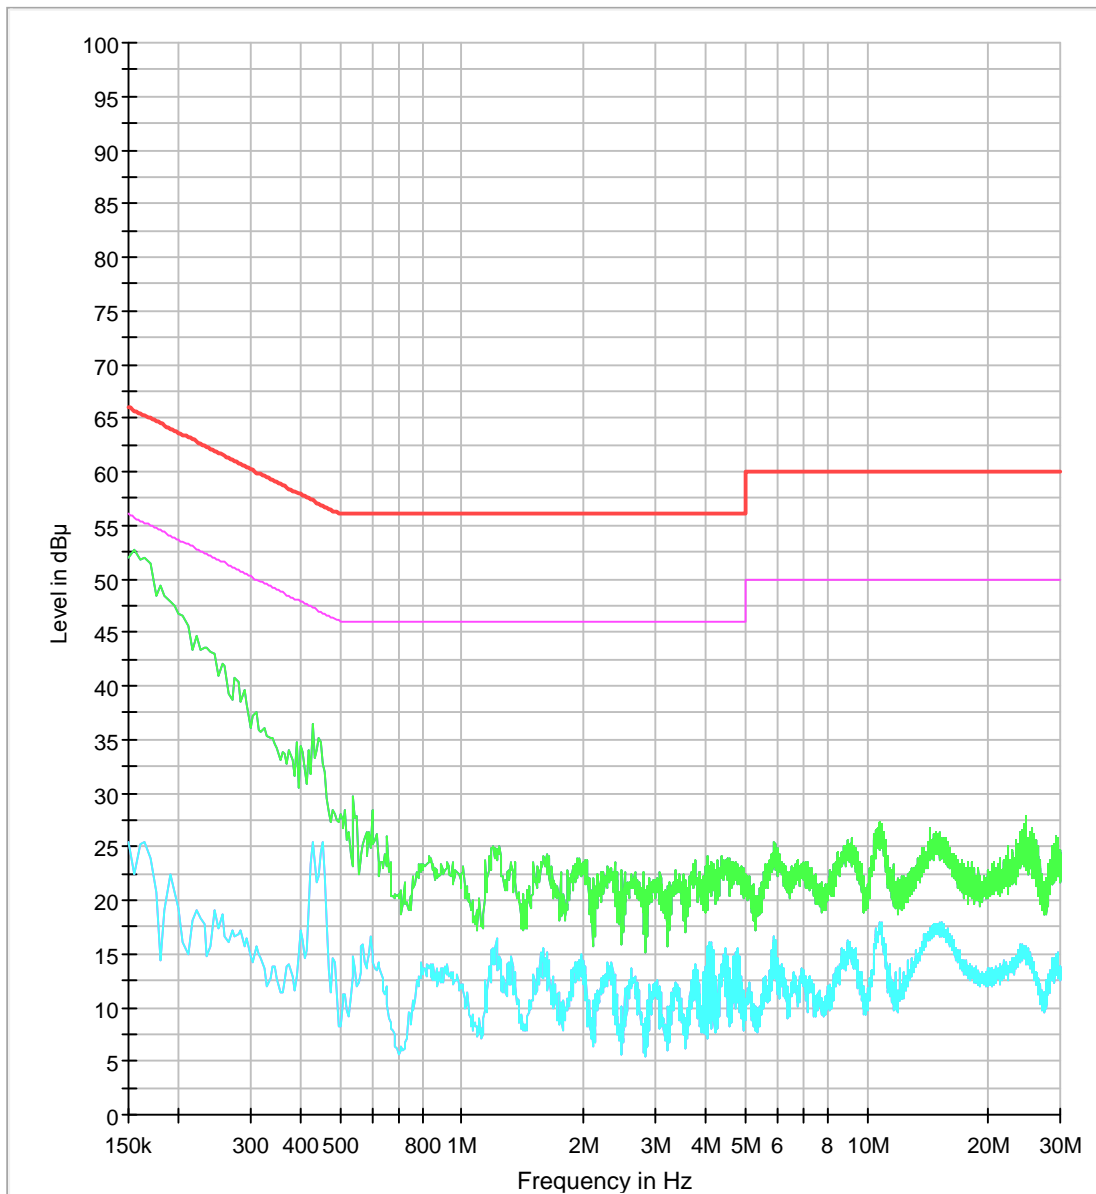

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Test mode: (Hot)

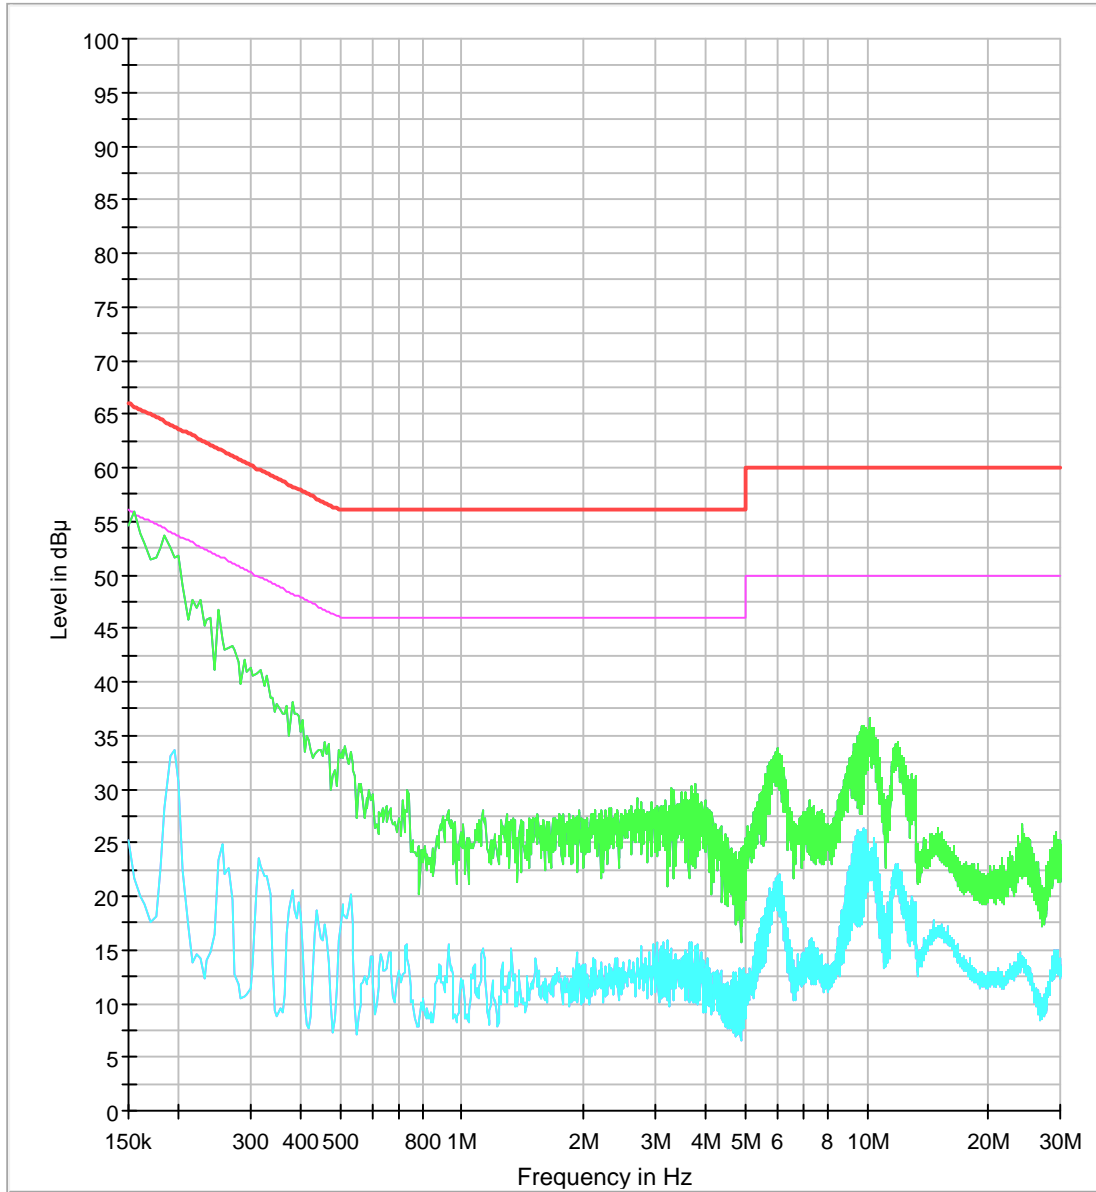

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


S27E370D

Test mode: (Neutral)

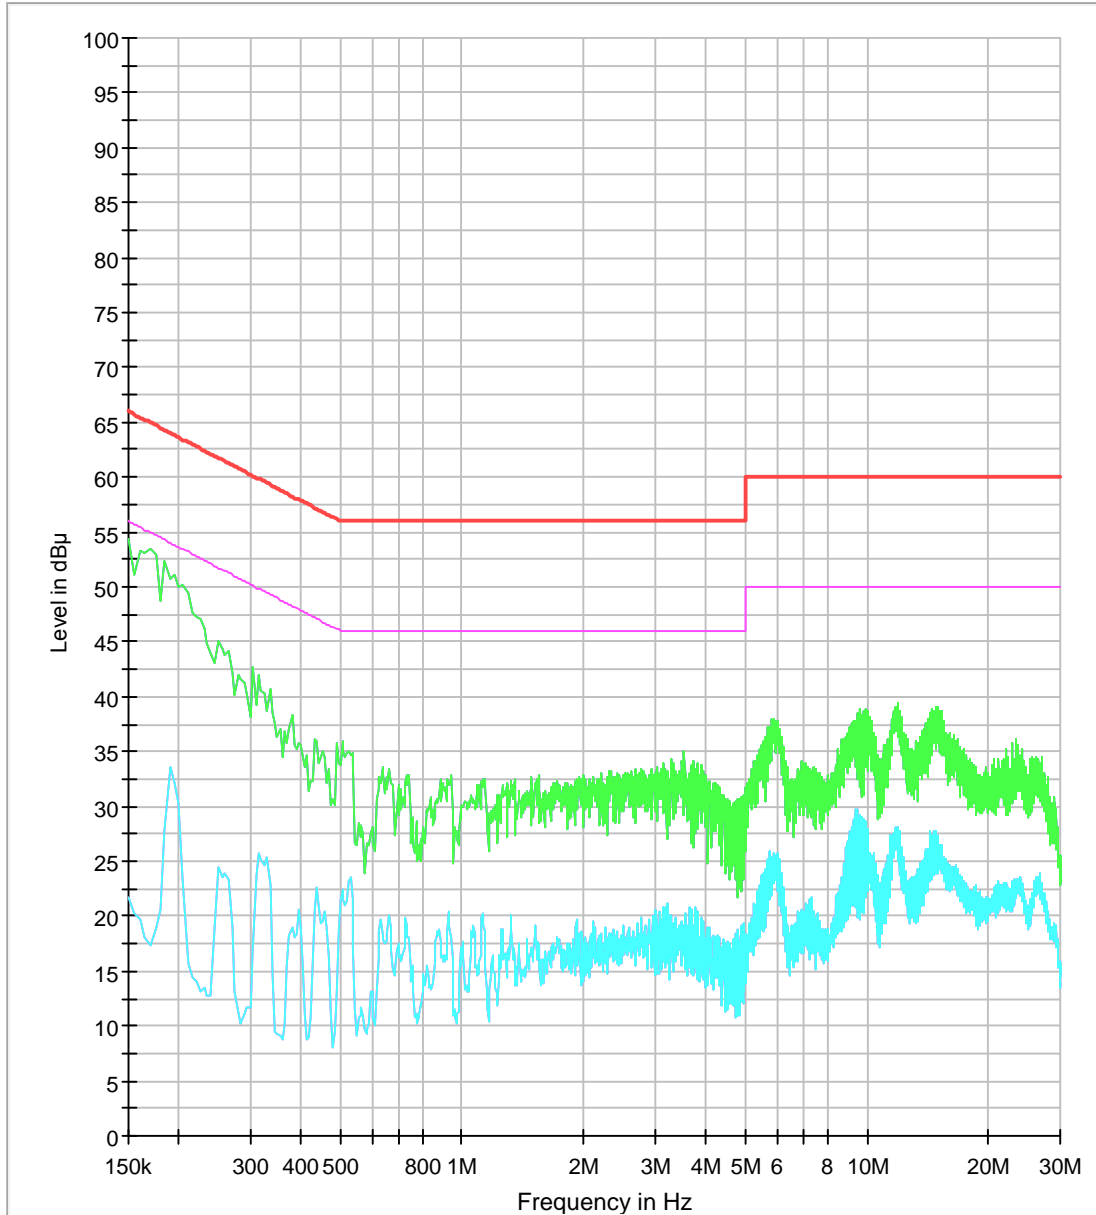

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode: (Hot)

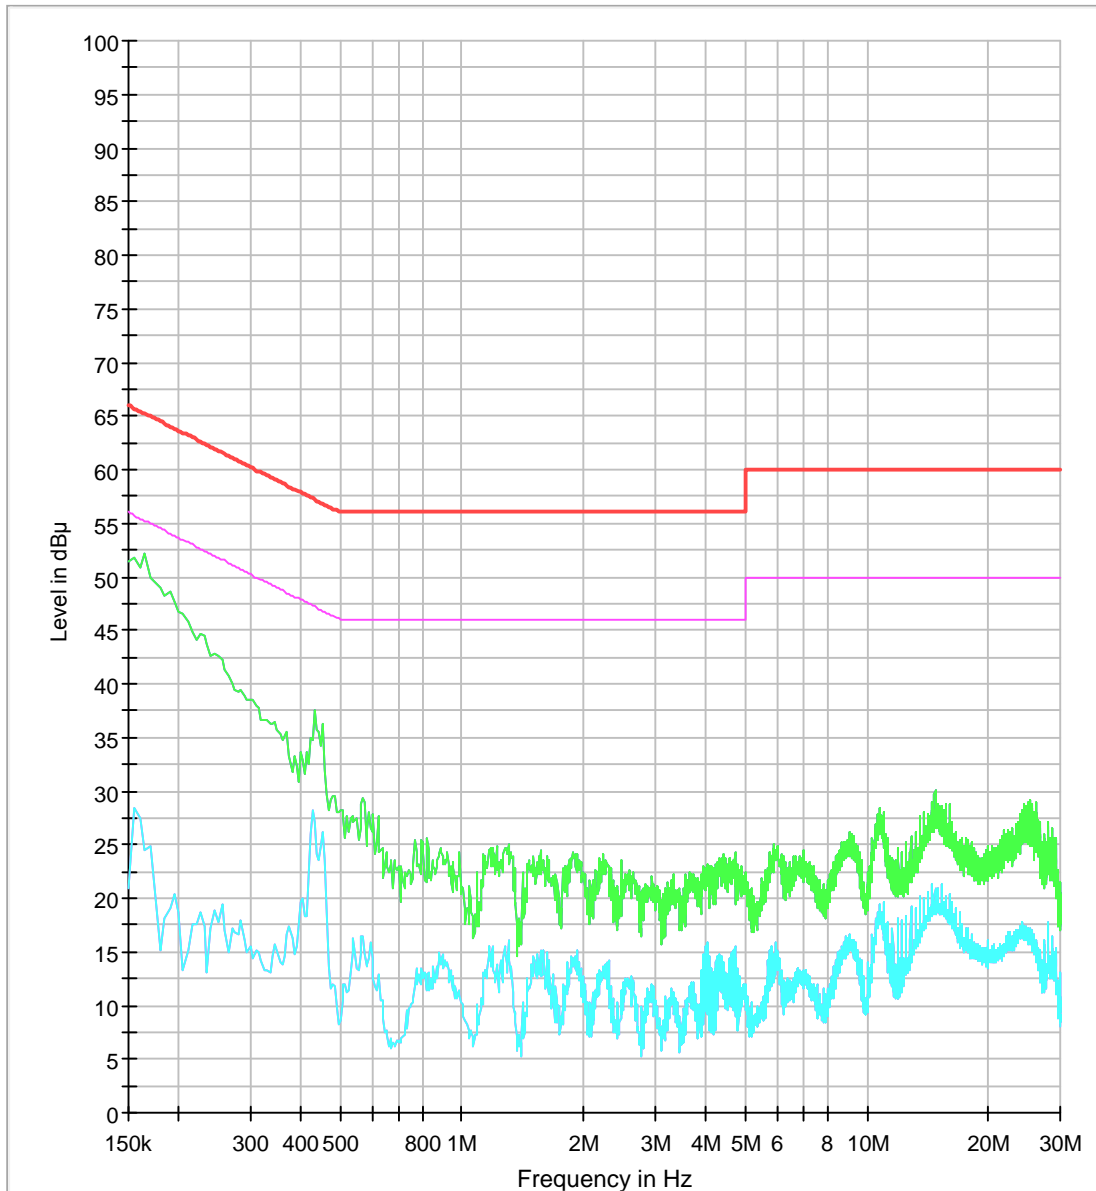

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.