

Radiated Restricted Band Measurements

§15.205 / §15.209



Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW = 1MHz, VBW = 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table A-4 per Section 15.209.

Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.00	30	30
30.00 - 88.00	100	3
88.00 - 216.0	150	3
216.0 - 960.0	200	3
Above 960.0	500	3

Table A-4. Radiated Limits

TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3Hz - 50GHz
HP 8566B	Spectrum Analyzer 100 Hz - 22GHz
HP 83017A	Microwave Preamplifier 40dB Gain (0.5 - 26.5GHz)
EMCO 3115	Horn Antenna (1 - 18GHz)
EMCO 3116	Horn Antenna (18GHz - 40GHz)
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 - 26.5GHz)

PCTEST™ PT. 15.247 BT TEST REPORT		BLUETOOTH SUPPLEMENTAL DATA		Reviewed by: Quality Manager
Test Report S/N: 0607210624	Test Dates: July 24, 2006	EUT Type: Dual-Band GSM850/1900 Phone with Bluetooth	FCC ID: A3LSGHC327	Page 1 of 3

Radiated Restricted Band Measurements (Cont'd)

§15.205 / §15.209

Mode: Bluetooth
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
2486.32	-114.43	30.81	H	23.38	14.76	-30.60
2488.19	-115.53	30.82	H	22.29	13.02	-31.69
2489.64	-114.13	30.83	H	23.70	15.31	-30.28
2494.15	-114.93	30.83	V	22.90	13.96	-31.08
2495.87	-115.23	30.85	H	22.62	13.52	-31.36
2497.48	-114.43	30.86	V	23.43	14.84	-30.55

Table A-8. Radiated Restricted Band Measurements at 3-meters


NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. Above 1 GHz the limit is 500 μ V/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The peak emissions above 1 GHz are not more than 20 dB above the average limit.


PCTEST™ PT. 15.247 BT TEST REPORT		BLUETOOTH SUPPLEMENTAL DATA			Reviewed by: Quality Manager
Test Report S/N: 0607210624	Test Dates: July 24, 2006	EUT Type: Dual-Band GSM850/1900 Phone with Bluetooth	FCC ID: A3LSGHC327	Page 2 of 3	

Line-Conducted Test Data

§15.207

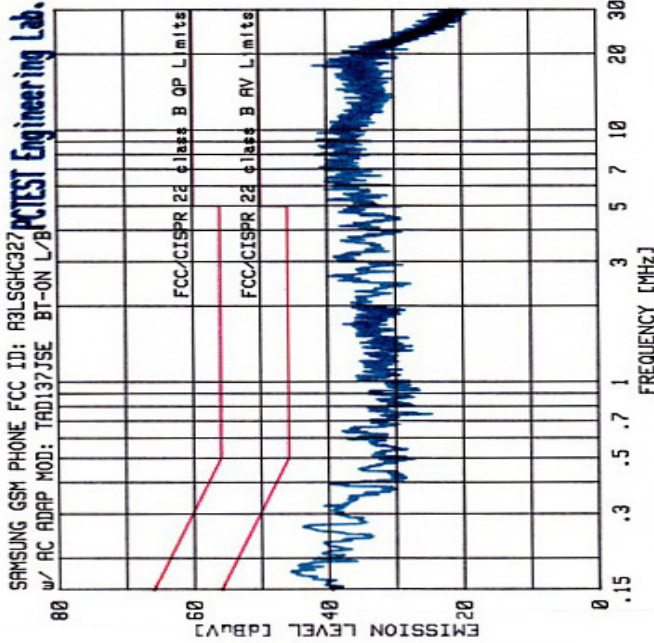

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	2.614	31.53	56.00	-24.47	21.28	46.00	-24.72
2	3.135	31.75	56.00	-24.25	20.74	46.00	-25.26
3	.256	35.20	61.56	-22.36	32.10	51.43	-19.33
4	4.697	32.68	56.00	-23.32	22.98	46.00	-23.02
5	4.140	31.27	56.00	-24.73	22.65	46.00	-23.35
6	17.994	34.60	60.00	-25.40	24.71	50.00	-25.29
7	.639	35.33	56.00	-19.67	25.00	46.00	-21.00
8	.386	35.98	58.16	-22.18	24.87	46.15	-23.28
9	1.697	29.18	56.00	-26.82	19.78	46.00	-26.22
10	7.878	36.11	60.00	-23.89	25.61	50.00	-24.39

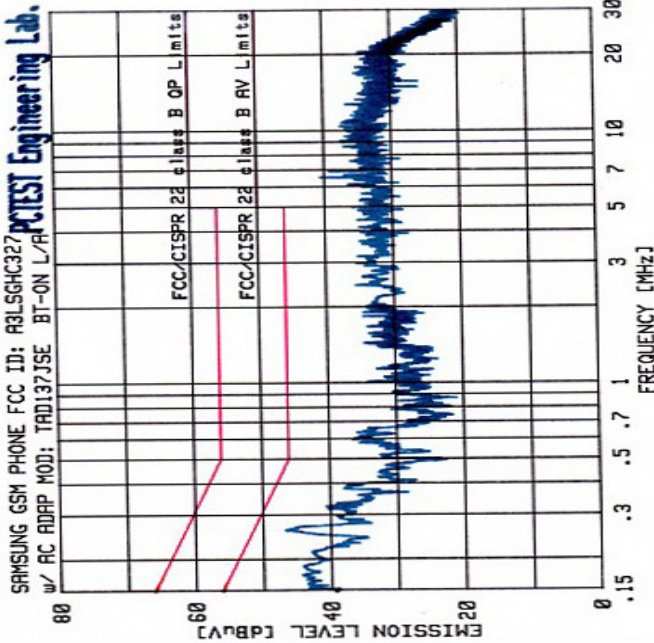

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.258	41.14	61.51	-20.37	26.17	51.45	-25.28
2	.312	35.00	59.92	-24.92	21.65	49.79	-28.14
3	.303	35.49	60.15	-24.66	20.80	49.70	-28.90
4	6.594	30.86	60.00	-29.14	22.02	50.00	-27.98
5	.597	32.60	56.00	-23.40	21.19	46.00	-24.81
6	.174	42.44	64.77	-22.33	29.79	54.49	-24.70
7	.633	32.47	56.00	-23.53	21.37	46.00	-24.63
8	.382	38.05	58.24	-20.19	21.09	48.21	-27.12
9	.320	33.68	59.70	-26.02	20.61	49.45	-28.84
10	2.510	27.97	56.00	-28.03	19.06	46.00	-26.94

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

PCTEST™ PT. 15.247 BT TEST REPORT		BLUETOOTH SUPPLEMENTAL DATA			Reviewed by: Quality Manager
Test Report S/N: 0607210624	Test Dates: July 24, 2006	EUT Type: Dual-Band GSM850/1900 Phone with Bluetooth	FCC ID: A3LSGHC327	Page 3 of 3	