






MSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Team  
IT R&D Center  
416, Maetan-3dong,  
Youngtong-Gu, Suwon-city,  
Gyeonggi-do, Korea 442-600

# FCC CFR47 PART 24 SUBPART CERTIFICATION REPORT

Model Tested: SGH-D410  
FCC ID (Requested): A3LSGHD410  
Report No: **FB-002-R1**  
Date issued: JANUARY 15, 2004

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2, Part24.

<b>Prepared By</b>	 _____	<b>Date</b>	2004.01.15 _____
	JH NAM- Test Engineer		
<b>Checked By</b>	 _____	<b>Date</b>	2004.01.15 _____
	JH CHOI - Engineer		
<b>Authorized By</b>	 _____	<b>Date</b>	2004.01.16 _____
	JK CHOI - Senior Manager		



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC Certification Information</b> -----	<b>3</b>
1.1 §2.1033 General Information -----	<b>3</b>
<b>2. INTRODUCTION</b> -----	<b>4</b>
2.1 General -----	<b>4</b>
<b>3. MEASURING INSTRUMENT CALIBRATION</b> -----	<b>5</b>
<b>4. TEST EQUIPMENT LIST</b> -----	<b>6</b>
<b>5. DESCRIPTION OF TESTS</b> -----	<b>7</b>
5.1 Equivalent Isotropic Radiated Power -----	<b>7</b>
5.2 Radiated Spurious & Harmonic Emission -----	<b>8</b>
5.3 Occupied Bandwidth -----	<b>9</b>
5.4 Spurious and Harmonic Emissions at Antenna Terminal-----	<b>9</b>
5.4.1 Occupied Bandwidth Emission Limits -----	<b>9</b>
5.4.2 Conducted Spurious Emission -----	<b>10</b>
5.5 Frequency Stability / Temperature Variation -----	<b>11</b>
<b>6. TEST DATA</b> -----	<b>12</b>
6.1 Equivalent Isotropic Radiated Power (E.I.R.P.) -----	<b>12</b>
6.2 Radiated Spurious & Harmonic Measurement -----	<b>13</b>
6.3 Radiated Spurious & Harmonic Conversion Table -----	<b>14</b>
6.4 Frequency Stability -----	<b>15</b>
6.4.1 Frequency Stability Table -----	<b>15</b>
6.4.2 Frequency Stability Graph -----	<b>17</b>
<b>7. CONCLUSION</b> -----	<b>18</b>
<b>8. TEST PLOTS</b> -----	<b>19</b>



## MEASUREMENT REPORT

### 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part 2, Subpart J, Sections 2.1033 – 2.1055.


#### 1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416, Maetan-3Dong, Youngtong-Gu, Suwon City  
Gyeonggi-Do, KOREA 442-600
  
- Attention: Wallace Oh, Engineering Manager (QA Lab)
  
- FCC ID: A3LSGHD410
  
- Quantity: Quantity production is planned
- Emission Designators: 270KGXW
- Tx Freq. Range: 1850.2MHz -1909.8MHz
- Rx Freq. Range: 1930.2MHz – 1989.8MHz
- Max. Power Rating: 1.742W EIRP GSM1900 (32.41dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Single modulation GSM1900/PCS Phone
- Frequency Tolerance:  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s): §2. §24(E)
- Dates of Test: Jan.06, 12-14, 2004
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FB-002-R1

## 2. INTRODUCTION

### 2.1 General


These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416, Maetan-3Dong, Youngtong-Gu, Suwon City, Gyeonggi-Do, KOREA 442-600 The site have 1 Fully-anechoic chamber and measurement facility.

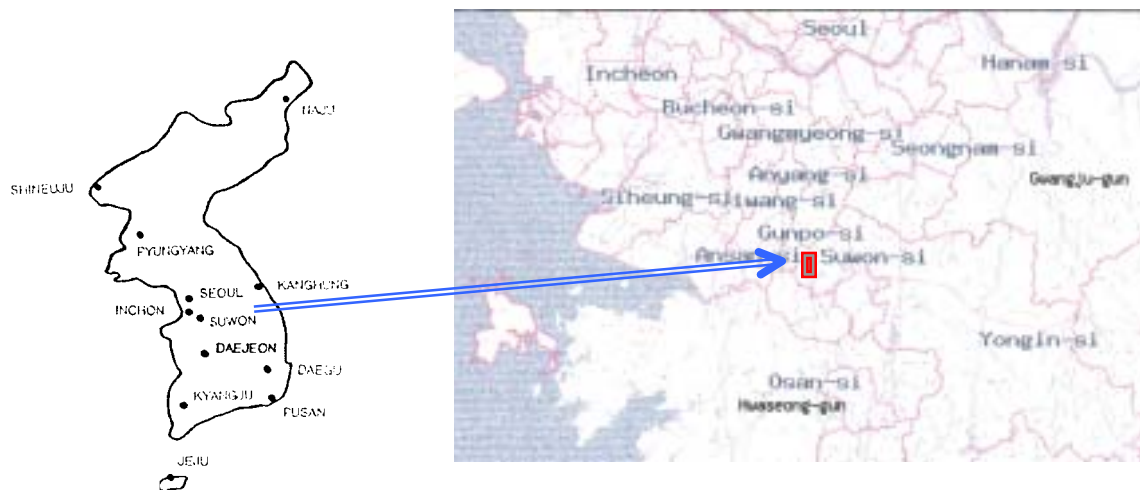

**Figure1. Map of the Suwon City area.**

#### Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable. 3-meters from the receive antenna. The receive antenna height and turntable rotations was adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure would be repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

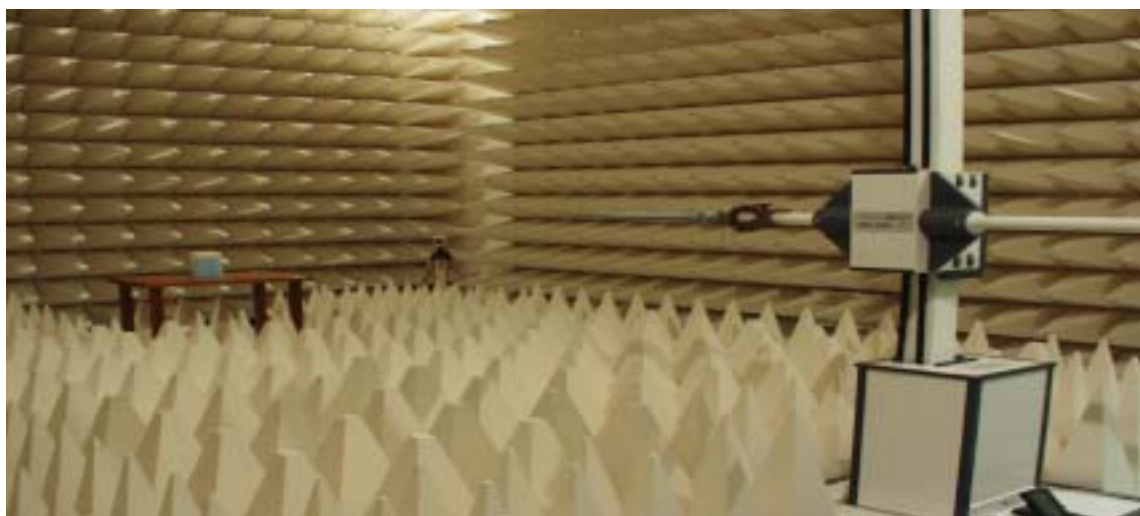

**Figure2. Photograph of 3m Fully-Anechoic Chamber**



### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

.

.



#### 4. TEST EQUIPMENT LIST


Name of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2004-09-15
	E4440A(3Hz~26.5GHz)	MY41000236	2004-11-07
	E4440A(3Hz~26.5GHz)	MY41000233	2004-11-14
Signal Generator	SMIQ03B	83824/021	2004-01-20
	SMR20	835197/030	2004-01-20
Power Meter	E4419B	GB41293846	2004-10-02
Power Sensor	8481B	3318A10325	2004-10-06
	8485A	3318A19924	2004-10-04
Amplifier	5S1G4	304866	2004-11-17
Pre-Amplifier	8449B	3008A00691	2004-01-21
Communication test set	8960	GB42230535	2004-11-17
	8960	GB42360886	2004-11-10
Antenna Master	MA0001	ANT0967	Not Required
Controller	HD100	100/756	Not Required
Environmental Chamber	PL-4S	13005454	2004-08-22
	SH-241	92000548	2004-12-04
	SH-241	92000549	2004-12-04
Horn Antenna	HF906	360306/011	2004-02-10
	HF906	100134	2004-03-31
Dipole Antenna	3121C-DB4	9007-587	2004-03-21
	3121C-DB4	9007-588	2004-03-21
Receive Antenna	HO040	353255/020	2004-07-14
Attenuator	8494A	3308A31997	2004-01-20
	8496A	3308A14426	2004-01-20
Directional Coupler	4278-311-2	B3679637	2004-01-22
	4278-111-2	B103DC8722	2004-01-22
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	3	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Shielded Semi-Anechoic Chamber	RF0002	ANT0001	2004-01-21

## 5. DESCRIPTION OF TESTS

### 5.1 Equivalent Isotropic Radiated Power

#### Test Set-up for the EIRP TEST

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

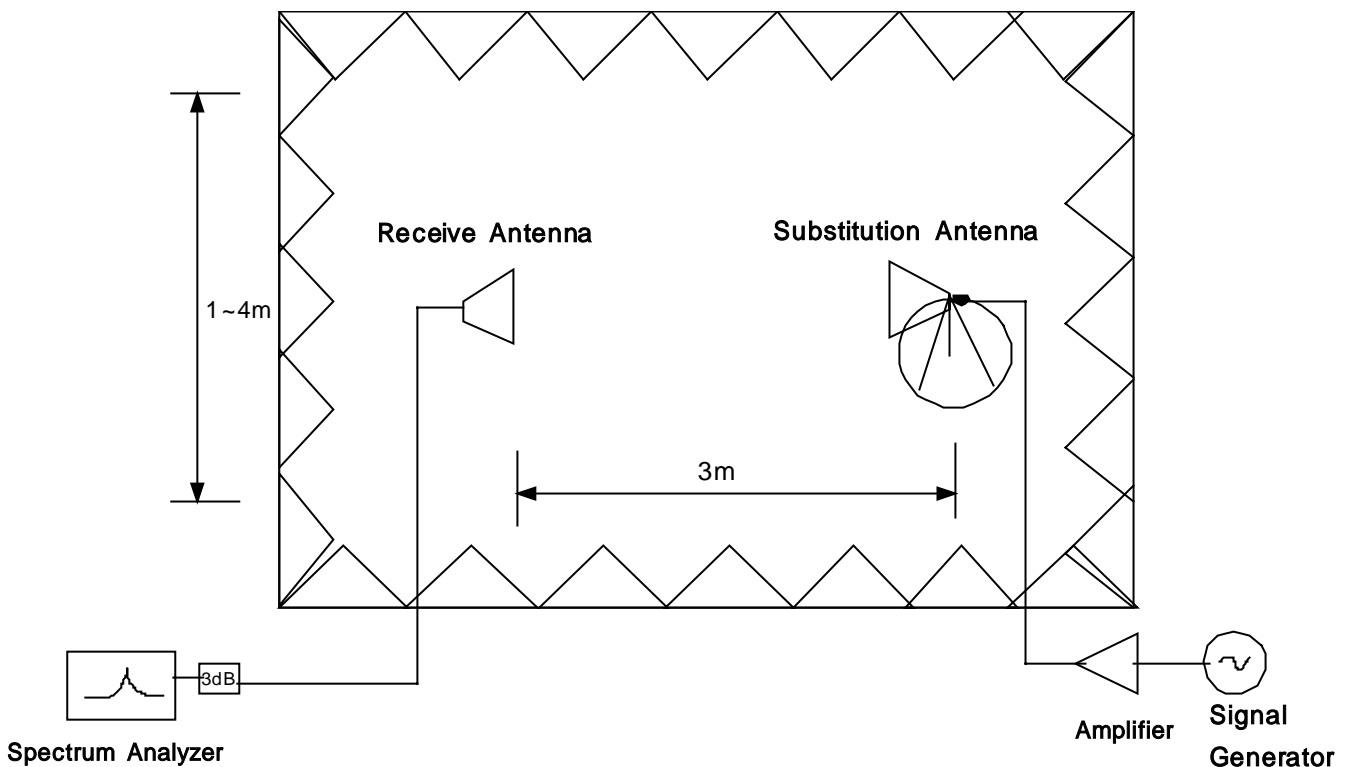


**Figure 3. Diagram of EIRP test Set-up**

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna (for readings above 1GHz) was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of Horn is measured. The EIRP is recorded. Between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.2 Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001

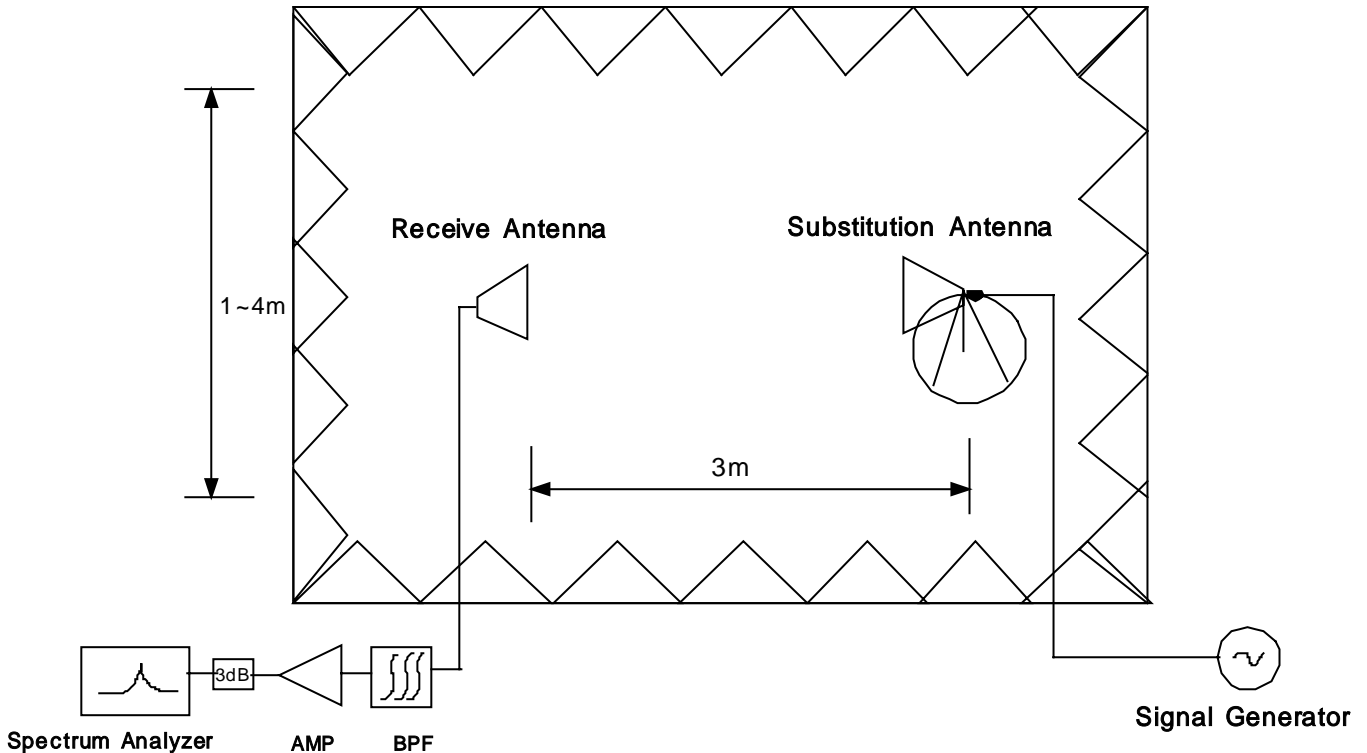

**Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up**

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. Between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

### SAMPLE CALCULATION

**Example: Channel 512 , Second Harmonic(3700.00MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3700.00\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.80\text{dBm}$ . The fundamental EIRP was  $25.501\text{dBm}$  so this harmonic was  $25.501\text{dBm} - (-24.80) = 50.3\text{dBc}$ .



### 5.3 Occupied Bandwidth

#### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

### 5.4 Spurious and Harmonic Emissions at Antenna Terminal

#### 5.4.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks.**



## 5.4.2 Conducted Spurious Emission

### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(1.742W) = 45.41dB$$
$$32.41dBm - 45.41dB = -13dBm$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM :  $0.01 * 273KHz = 2.73KHz$   
A Resolution BW of 3KHz was used for measurement at the band edges.

### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 20GHz. A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.



## 5.5 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.0001$  ( $\pm 1$ ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at 30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at 30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



## 6. TEST DATA

### 6.1 Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS GSM

Reference level

Frequency (MHz)	Output (dBm)	Polarization	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1880.00	27.00	H	-13.40	8.18	-21.58
		V	-13.02	8.18	-21.20

Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-16.17	H1	129	32.41	1.742	Standard
1880.00	-18.55	H1	137	30.03	1.007	Standard
1909.80	-19.19	H2	133	29.39	0.869	Standard

**NOTE : Standard batteries are the only battery options for this phone**

**Radiated measurements at 3 meters by Substitution Method**



## 6.2 Radiated Spurious & Harmonic measurement

### Field Strength of SPURIOUS Radiation

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 32.41 dBm = 1.742 W

Modulation Signal : PCS GSM

**Limit :  $43 + 10\log_{10}(w) = 45.41$  dBc**

#### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-62.43	V	69.29
	3	5550.60	-53.53	H2	57.14
	4	7400.80	-64.48	H1	63.84
	5	9251.00	-69.18	H2	65.38
	6	11101.20	-	-	-
	7	12951.40	-	-	-
	8	14801.60	-	-	-
661	2	3760.00	-60.93	V	69.22
	3	5640.00	-51.80	H2	55.81
	4	7520.00	-60.88	V	61.51
	5	9400.00	-64.97	H1	61.43
	6	11280.00	-	-	-
	7	13160.00	-	-	-
	8	15040.00	-	-	-
810	2	3819.60	-59.75	V	67.46
	3	5729.40	-53.44	H1	57.39
	4	7639.20	-61.89	H2	62.26
	5	9549.00	-68.05	H1	62.94
	6	11458.80	-	-	-
	7	13368.60	-	-	-
	8	15278.40	-	-	-

**Radiated Spurious Emission measurements at 3 meters by Substitution Method**



### 6.3 Radiated Spurious & Harmonic Conversion Table

Date : 04. 01. 14

Test Engineer : E.H. Jung

Tx Cable loss  
 Tx Horn Ant Gain  
 Rx Cable loss + HPF Insertion loss + Attenuator  
 Pre-Amp gain  
 Air loss  
 Tested Level from EUT  
 = + + -  
 = EIRP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	10.76	8.87	8.11	-61.82	-61.33	-37.84	-36.43	70.25	69.29
	3	5550.60	13.67	10.60	6.93	-53.53	-57.62	-24.73	-28.86	57.14	61.27
	4	7400.80	16.56	10.83	4.27	-64.48	-65.65	-31.43	-34.01	63.84	66.42
	5	9251.00	18.86	11.56	2.70	-69.18	-72.09	-32.97	-36.11	65.38	68.52
	6	11101.20	21.50	12.79	1.29	-	-	-	-	-	-
	7	12951.40	23.76	12.66	-1.10	-	-	-	-	-	-
	8	14801.60	26.18	12.69	-3.49	-	-	-	-	-	-
661	2	3760.00	10.91	8.98	8.07	-61.00	-60.93	-37.01	-36.81	69.42	69.22
	3	5640.00	13.78	10.60	6.82	-51.80	-55.06	-23.40	-26.44	55.81	58.85
	4	7520.00	16.85	10.83	3.98	-61.76	-60.88	-29.30	-29.10	61.71	61.51
	5	9400.00	19.04	11.60	2.56	-64.97	-70.00	-29.02	-34.58	61.43	66.99
	6	11280.00	21.29	12.93	1.64	-	-	-	-	-	-
	7	13160.00	23.78	12.64	-1.14	-	-	-	-	-	-
	8	15040.00	26.74	12.70	-4.04	-	-	-	-	-	-
810	2	3819.60	10.90	8.98	8.08	-60.11	-59.75	-35.96	-35.05	68.37	67.46
	3	5729.40	14.03	10.73	6.70	-53.44	-55.63	-24.98	-26.72	57.39	59.13
	4	7639.20	17.12	10.87	3.75	-61.89	-62.75	-29.85	-31.20	62.26	63.61
	5	9549.00	19.29	11.67	2.38	-68.05	-69.95	-30.53	-32.82	62.94	65.23
	6	11458.80	21.55	12.90	1.35	-	-	-	-	-	-
	7	13368.60	25.38	12.65	-2.73	-	-	-	-	-	-
	8	15278.40	27.28	12.73	-4.55	-	-	-	-	-	-



## 6.4 Frequency Stability

### 6.4.1 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-84	1,879,999,916	-0.000004	-0.045
100%		-30	76	1,880,000,076	0.000004	0.040
100%		-20	-66	1,879,999,934	-0.000004	-0.035
100%		-10	-53	1,879,999,947	-0.000003	-0.028
100%		0	-50	1,879,999,950	-0.000003	-0.027
100%		+10	39	1,880,000,039	0.000002	0.021
100%		+20	-84	1,879,999,916	-0.000004	-0.045
100%		+30	114	1,880,000,114	0.000006	0.061
100%		+40	43	1,880,000,043	0.000002	0.023
100%		+50	54	1,880,000,054	0.000003	0.029
100%		+60	56	1,880,000,056	0.000003	0.030
85%	3.15	+20	-39	1,879,999,961	-0.000002	-0.021
115%	4.26	+20	34	1,880,000,034	0.000002	0.018
Batt.Endpoint	3.10	+20	-137	1,879,999,863	-0.000007	-0.073


**Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.**

**The EUT is tested down to the battery end point.**

### 6.4.2 Frequency Stability Graph

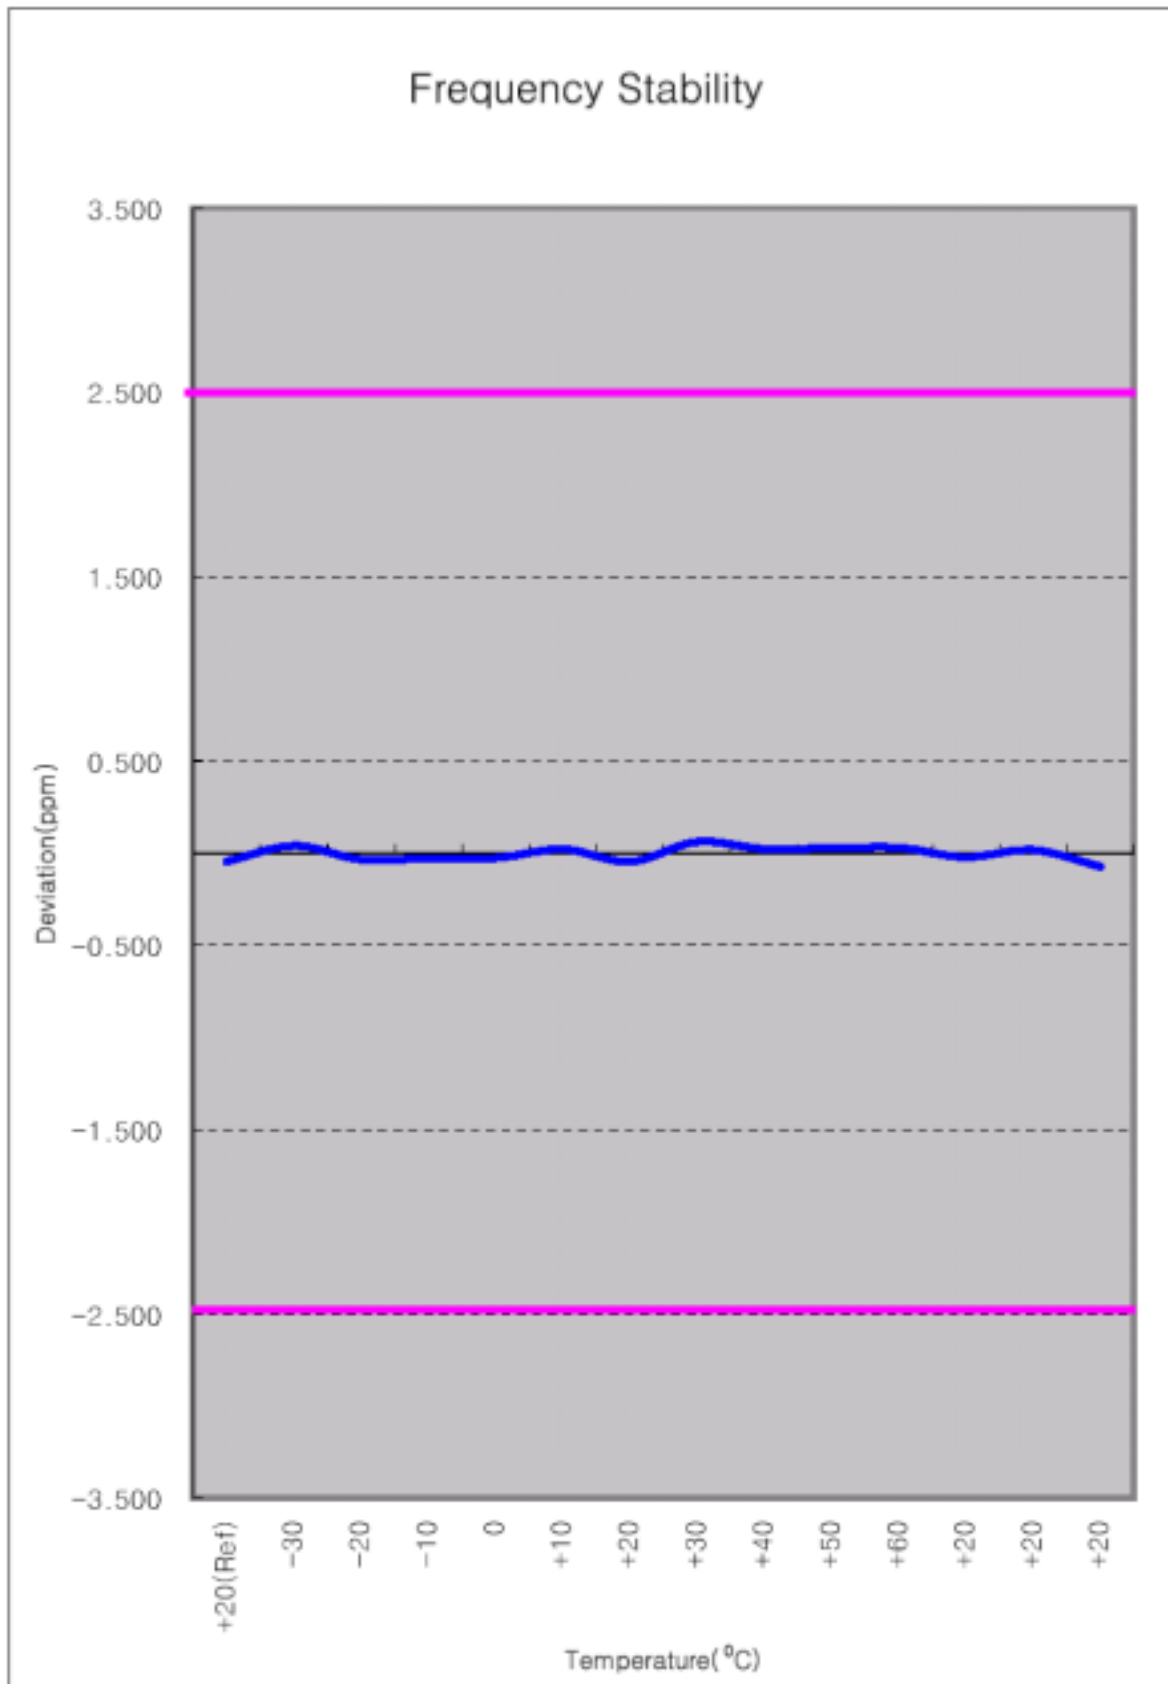

Zoom In

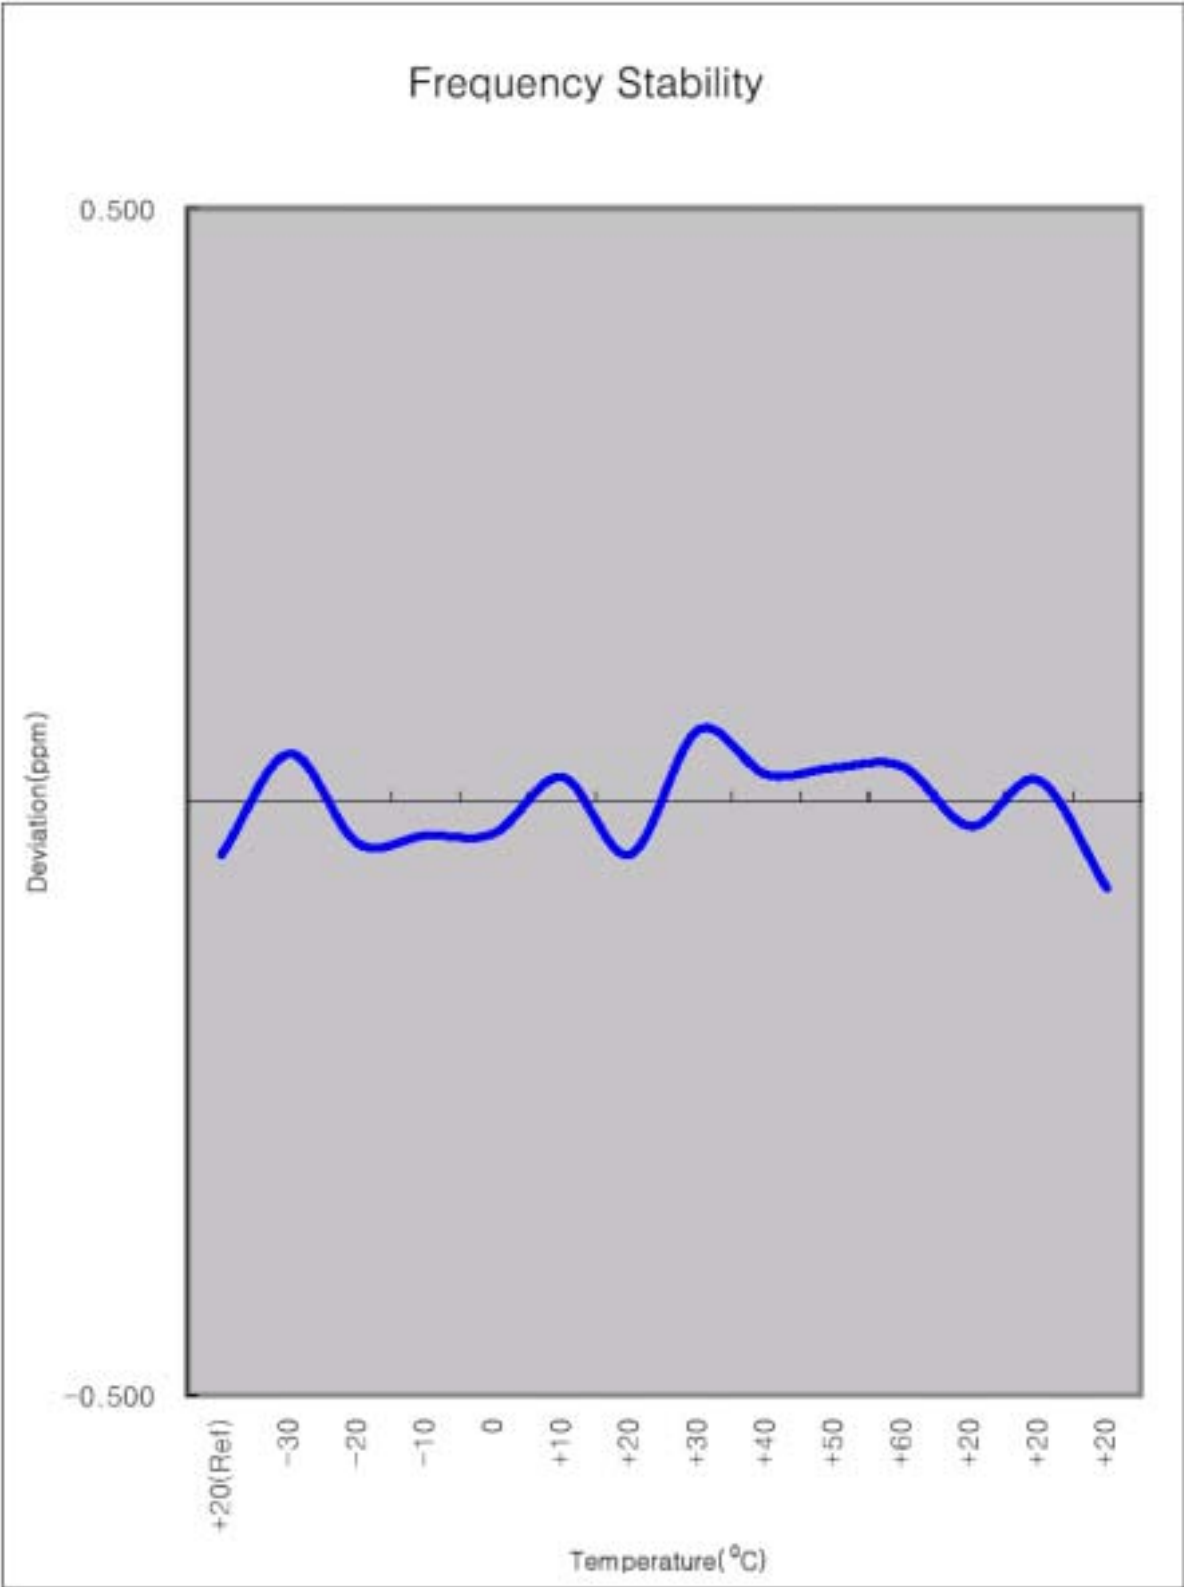



## **7. CONCLUSION**

The data collected shows that the SAMSUNG GSM1900 PCS Phone FCC ID : A3LSGHD410 complies with all the requirements of Parts 2,24 of the FCC Rules.



## 8. TEST PLOTS

Measurement/Instrument Screen			
Control	ORFS: Modulation & Switching Graph		Call Params
ORFS Setup	<div style="display: flex; flex-direction: column;"> <div style="margin-bottom: 10px;"> <p><b>MODULATION</b></p> <p>Ref 10.00 dB</p> <p>10.00 dB/</p> <p>-1800 kHz      - 0 kHz      1800 kHz</p> <p>- Abs. limit      - Rel. limit</p> </div> <div> <p><b>SWITCHING</b></p> <p>Ref 10.00 dBm</p> <p>10.00 dB/</p> <p>-1800 kHz      - 0 kHz      1800 kHz</p> <p>321 / 321      Continuous</p> </div> </div>		Traffic Band
Change View			PCS
Sup Window Positions			Traffic Channel
1 of 2			512
		4	Timing Advance
		0	MS TX Level
		0	Speech
		Echo	2 of 4
<div style="display: flex; justify-content: space-between;"> <span>Background</span> <span>Active Cell Connected</span> <span>Sys Type: GSM</span> </div>			
<div style="display: flex; justify-content: space-between;"> <span>IntRef</span> <span>Offset</span> </div>			


Measurement/Instrument Screen			
Control	ORFS: Modulation & Switching Graph		Call Params
ORFS Setup	<div style="text-align: center;"> <p><b>MODULATION</b></p> <p>Ref 10.00 dB</p> <p>10.00 dB/</p> <p>-1800 kHz      - 0 kHz      1800 kHz</p> <p>- Abs. limit      - Rel. limit</p> </div> <div style="text-align: center;"> <p><b>SWITCHING</b></p> <p>Ref 10.00 dBm</p> <p>10.00 dB/</p> <p>-1800 kHz      - 0 kHz      1800 kHz</p> <p>321 / 321      Continuous</p> </div>		Traffic Band
Change View			PCS
Sup Window Positions			Traffic Channel
1 of 2			661
		Timeslot	4
		Timing Advance	0
		MS TX Level	0
		Speech	Echo
		2 of 4	
<div style="display: flex; justify-content: space-between;"> <span>Background</span> <span>Active Cell Connected</span> <span>Sys Type: GSM</span> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <span>IntRef</span> <span>Offset</span> </div>			

Measurement/Instrument Screen			
Control	ORFS: Modulation & Switching Graph		Call Params
ORFS Setup	<div style="display: flex; flex-direction: column;"> <div style="margin-bottom: 10px;"> <p><b>MODULATION</b></p> <p>Ref 10.00 dB</p> <p>10.00 dB/</p> <p>Pass</p> <p>-1800 kHz - Abs. limit - 0 kHz - Rel. limit 1800 kHz</p> </div> <div> <p><b>SWITCHING</b></p> <p>Ref 10.00 dBm</p> <p>10.00 dB/</p> <p>Pass</p> <p>-1800 kHz - 0 kHz 1800 kHz</p> <p>321 / 321 Continuous</p> </div> </div>		Traffic Band
Change View			PCS
Swap Window Positions			Traffic Channel
1 of 2			810
		Timeslot	4
		Timing Advance	0
		MS TX Level	0
		Speech	Echo
		2 of 4	
<div style="display: flex; justify-content: space-between;"> <span>Background</span> <span>Active Cell Connected</span> <span>Sys Type: GSM</span> </div>			
<div style="display: flex; justify-content: space-between;"> <span>IntRef</span> <span>Offset</span> </div>			

Agilent

L

Freq/Channel

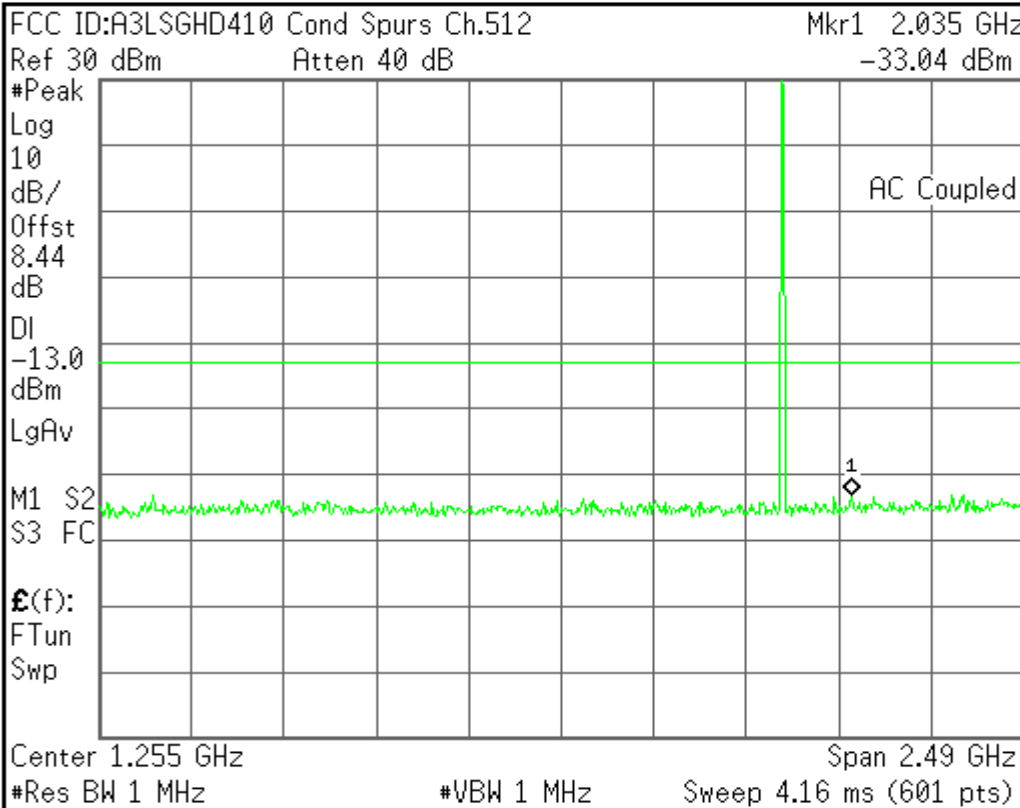

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

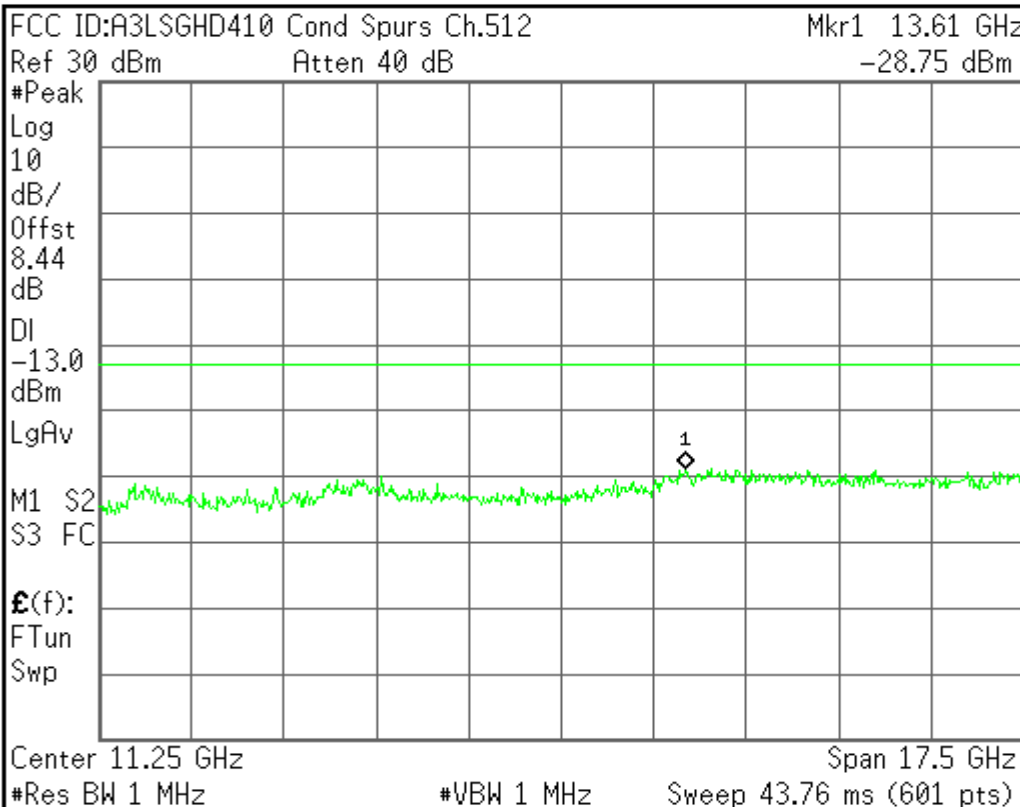

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

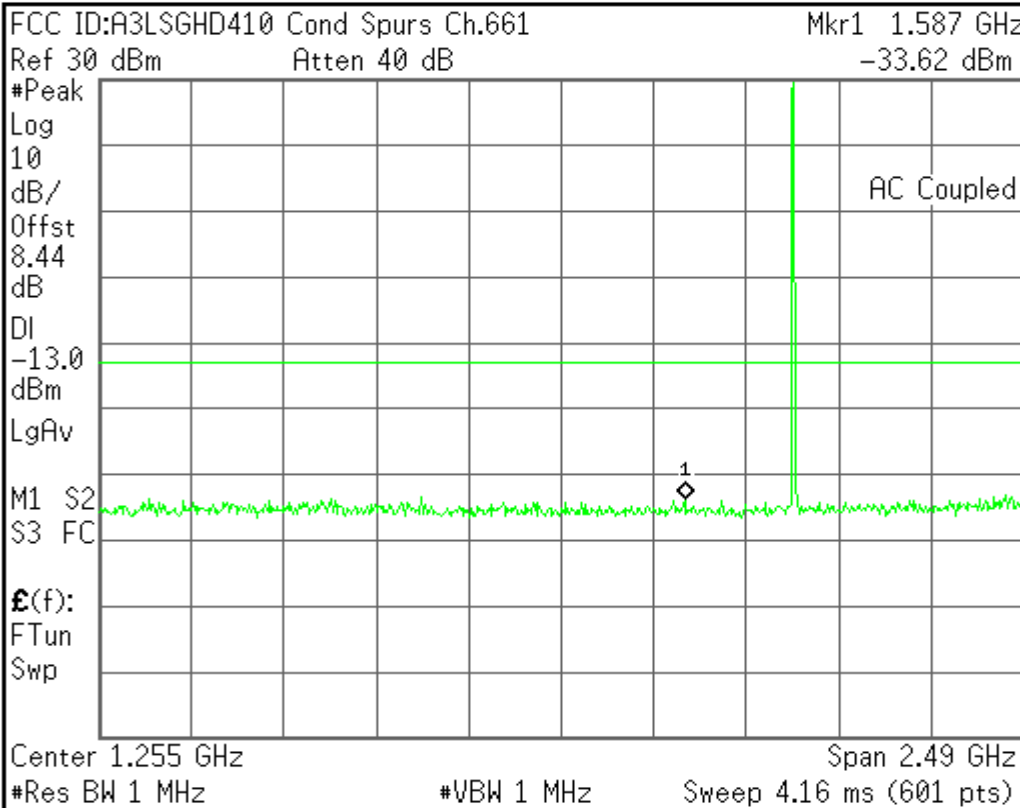


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.0000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

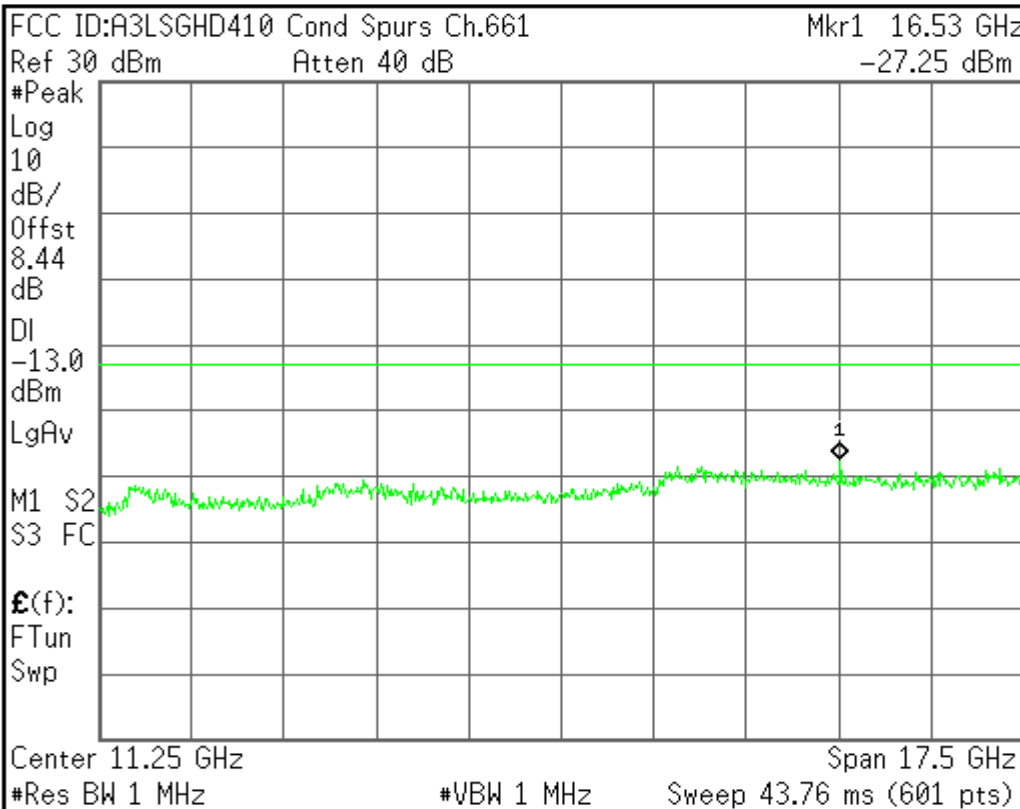


<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

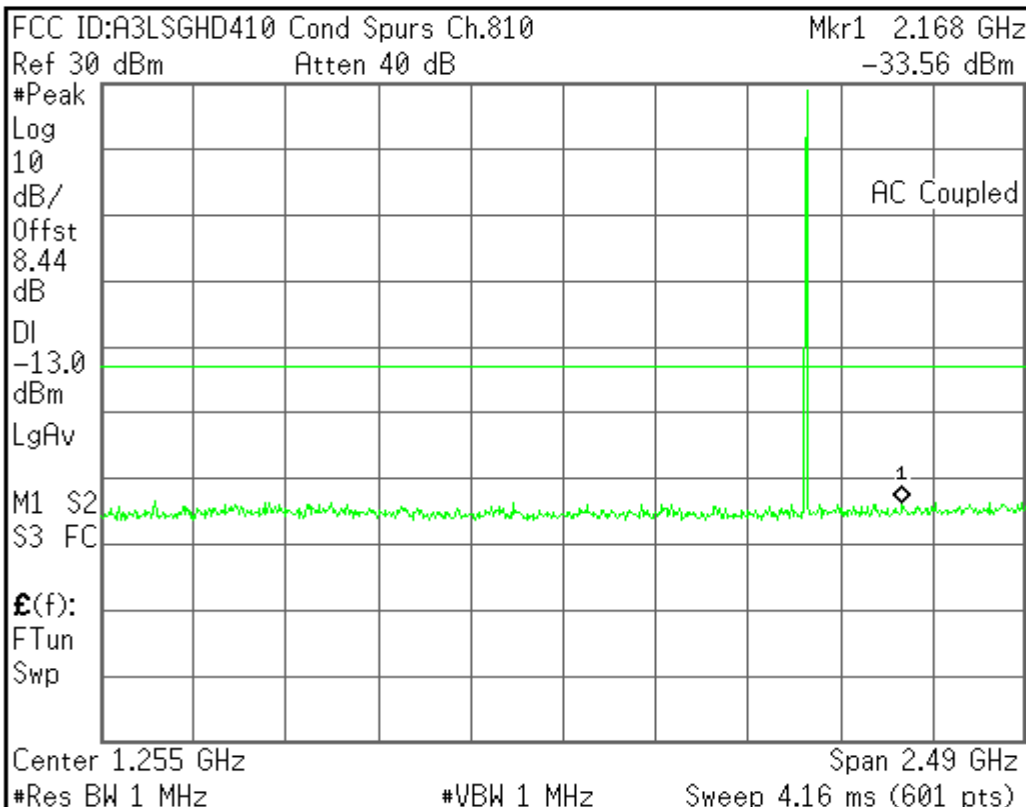

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

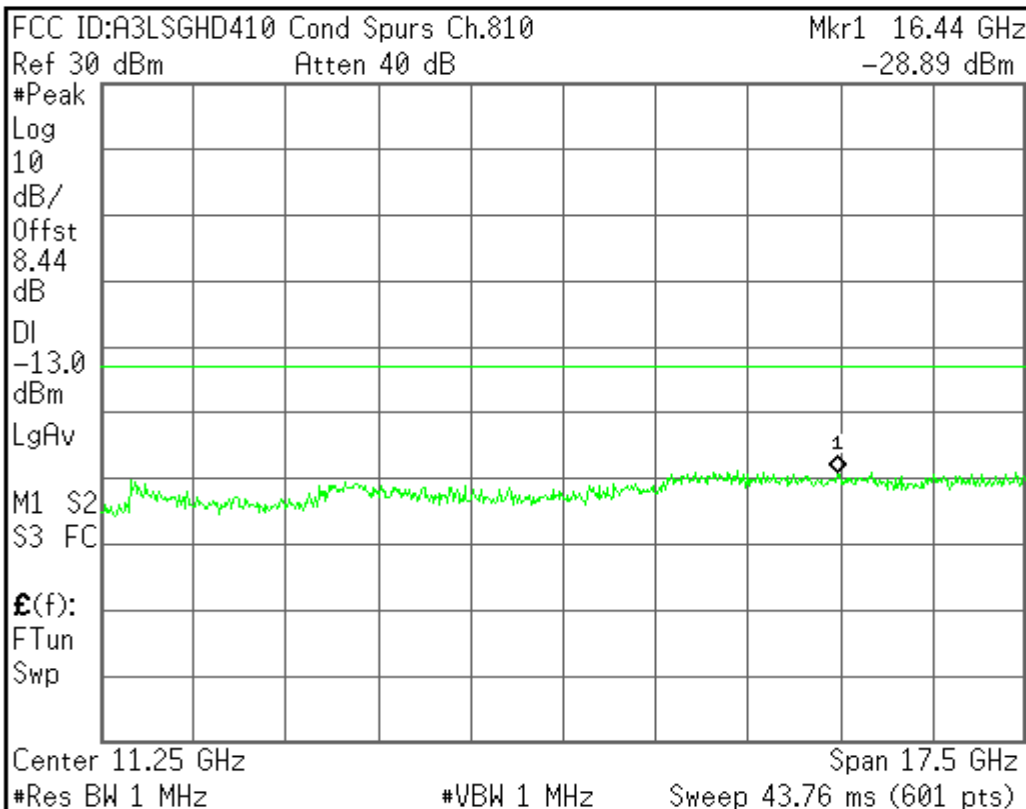

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

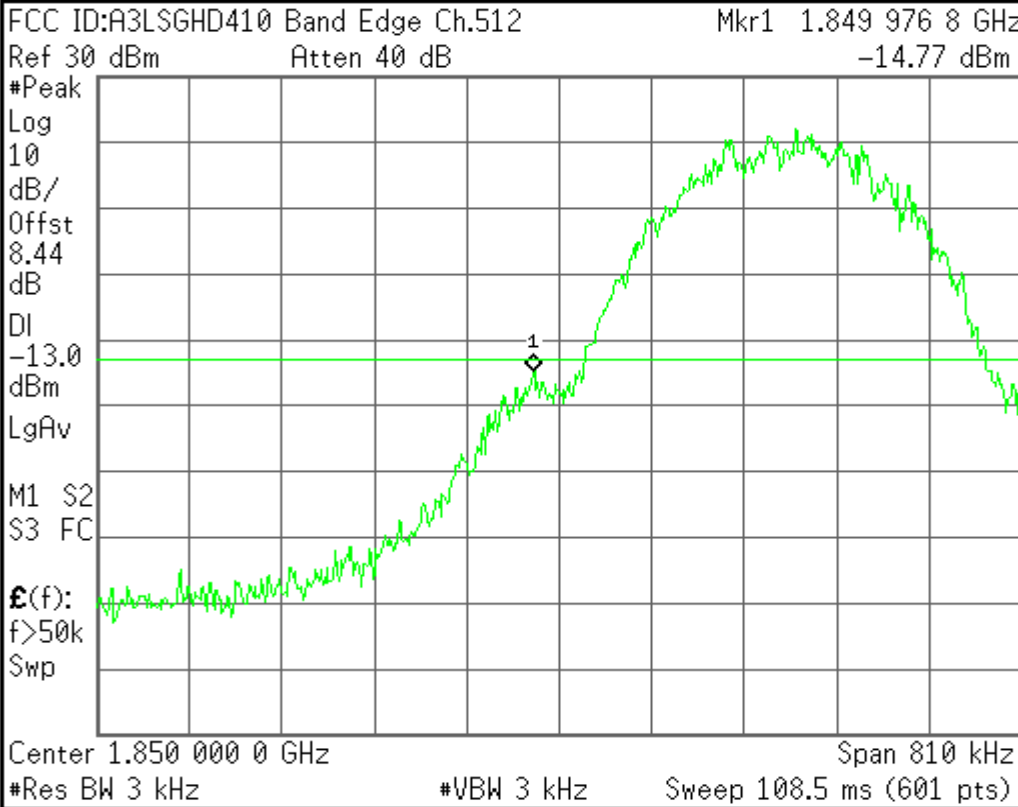

Center Freq  
1.85000000 GHz

Start Freq  
1.84959500 GHz

Stop Freq  
1.85040500 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2002 Agilent Technologies

Agilent

L

Freq/Channel

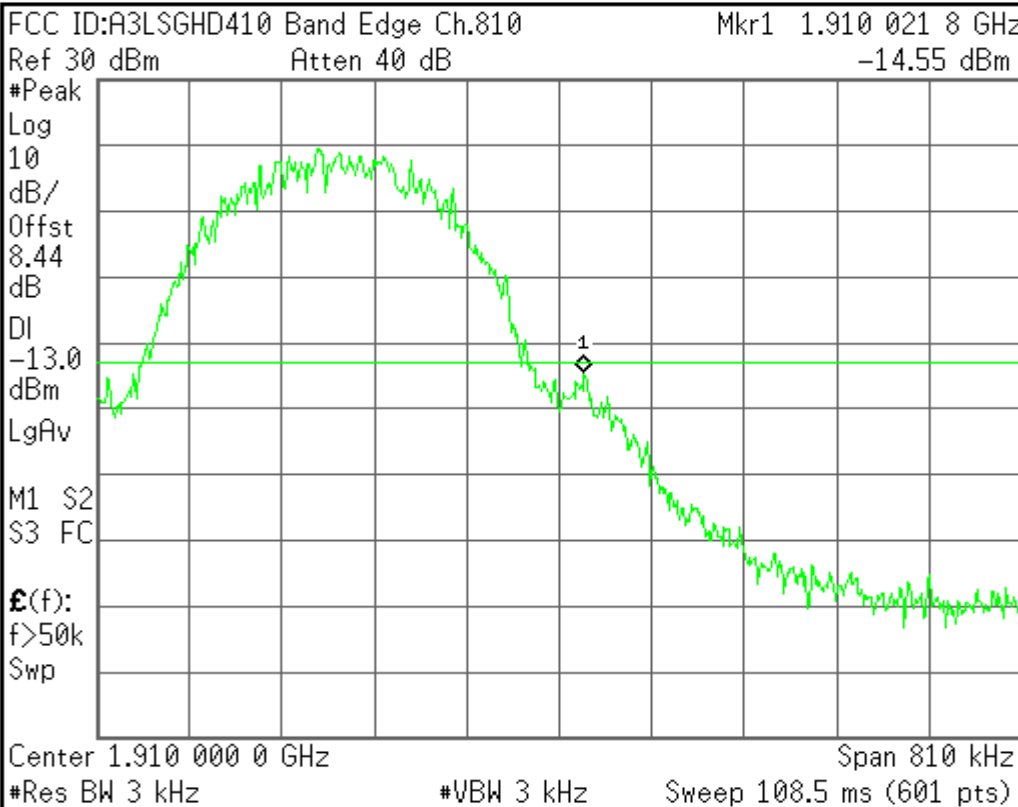

Center Freq  
1.91000000 GHz

Start Freq  
1.90959500 GHz

Stop Freq  
1.91040500 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2002 Agilent Technologies