

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : OT-189-RWD-051  
**AGR No.** : A189A-120  
**Applicant** : Samsung Electronics Co., Ltd.  
**Address** : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 17113 Republic of Korea  
**Manufacturer** : Samsung Electronics Co., Ltd.  
**Address** : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 17113 Republic of Korea  
**Type of Equipment** : ARTIK-0530  
**FCC ID.** : A3LSIP005AFS30  
**IC Certification No.** : 649E-SIP005AFS30  
**Model Name** : SIP005AFS30  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 41 pages (including this page)  
**Date of Incoming** : September 02, 2018  
**Date of issue** : September 28, 2018


## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247 and IC RSS-Gen Issue 4 Nov 2014 and RSS-247 Issue 2 February 2017*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:   
 \_\_\_\_\_  
 Ki-Hong, Nam / Chief Engineer  
 ONETECH Corp.

Approved by:   
 \_\_\_\_\_  
 Keun-Young, Choi / Vice President  
 ONETECH Corp.

## CONTENTS

	PAGE
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>4</b>
<b>2. TEST SUMMARY.....</b>	<b>5</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>5</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....</b>	<b>5</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>5</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>5</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>5</b>
<b>2.6 TEST FACILITY.....</b>	<b>5</b>
<b>3. GENERAL INFORMATION.....</b>	<b>6</b>
<b>3.1 PRODUCT DESCRIPTION.....</b>	<b>6</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....</b>	<b>6</b>
<b>3.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>6</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>7</b>
<b>5. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....</b>	<b>8</b>
<b>5.1 OPERATING ENVIRONMENT .....</b>	<b>8</b>
<b>5.2 TEST SET-UP FOR RADIATED MEASUREMENT.....</b>	<b>8</b>
<b>5.3 TEST EQUIPMENT USED.....</b>	<b>8</b>
<b>5.4 TEST DATA FOR RADIATED EMISSION .....</b>	<b>9</b>
<b>5.4.1 Radiated Emission which fall in the Restricted Band(802.11 b_1 Mbps).....</b>	<b>9</b>
<b>5.4.2 Radiated Emission which fall in the Restricted Band(802.11 g_6 Mbps).....</b>	<b>14</b>
<b>5.4.3 Radiated Emission which fall in the Restricted Band(802.11 n_HT20_MCS 0).....</b>	<b>19</b>
<b>5.4.4 Spurious &amp; Harmonic Radiated Emission(802.11 b_1 Mbps) .....</b>	<b>24</b>
<b>5.4.6 Spurious &amp; Harmonic Radiated Emission(802.11 n_HT20_MCS 0).....</b>	<b>32</b>
<b>5.4.7 Test Data FCC for below 1 000 MHz.....</b>	<b>36</b>
<b>5.4.8 Test Data IC for below 1 000 MHz.....</b>	<b>38</b>
<b>6. MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>	<b>40</b>
<b>6.1 OPERATING ENVIRONMENT .....</b>	<b>40</b>
<b>6.2 TEST SET-UP .....</b>	<b>40</b>
<b>6.3 TEST EQUIPMENT USED.....</b>	<b>40</b>
<b>6.4 TEST RESULT(802.11 B_1 MBPS).....</b>	<b>41</b>
<b>6.5 TEST RESULT(802.11 G_6 MBPS).....</b>	<b>41</b>
<b>6.6 TEST RESULT(802.11 N_HT20_MCS 0).....</b>	<b>41</b>

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-189-RWD-051	2018.09.28	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co., Ltd.  
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 17113 Republic of Korea  
 Contact Person : Lee, Jae-Hyuk  
 Telephone No. : +82-10-8848-6628  
 FCC ID : A3LSIP005AFS30  
 IC Certification No. : 649E-SIP005AFS30  
 Model Name : SIP005AFS30  
 Serial Number : N/A  
 Date : September 28, 2018

EQUIPMENT CLASS	FCC: DTS – DIGITAL TRNSMISSION SYSTEM IC : Low Power License-Exempt Radio-communication Device
E.U.T. DESCRIPTION	Modular Transmitter, ARTIK-0530
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247, RSS-Gen Issue 4 Nov 2014, RSS-247 Issue 2 February 2017
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC&IC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION		TEST ITEMS	RESULTS
15.205(a) 15.209 15.247(d)	RSS-247 Issue 2 5.5 RSS-Gen Issue 4 8.9	Transmitter Radiated Spurious Emissions	Met the Limit / PASS
15.247(a)(2)	RSS-247 Issue 2 5.2(1) RSS-Gen Issue 4 6.6	6 dB Bandwidth & 99 % Bandwidth	PASS (Note1)
15.247(b)(3)	RSS-247 Issue 2 5.4(4)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247(e)	RSS-247 Issue 2 5.2(2)	Power Spectral Density	PASS (Note1)
15.207	RSS-Gen Issue 4 8.8	AC Power Line Conducted Emissions	PASS (Note1)

Note1 - The EUT have a RF Test already approved. (Report No: 16K23791-E1V3)

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247, IC RSS-Gen Issue 4 Nov 2014 and RSS-247 Issue 2 February 2017

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The Samsung Electronics Co., Ltd., Model SIP005AFS30 (referred to as the EUT in this report) is a ARTIK-0530. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	ARTIK-0530	
Operating Frequency	2 402 MHz ~ 2 480 MHz (Bluetooth, Bluetooth Low Energy), 2 405 MHz ~ 2 475 MHz (Zigbee), 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20), 5 745 MHz ~ 5 825 MHz (UNII 3: 11a/n_HT20), 5 755 MHz ~ 5 795 MHz (UNII 3: 11n_HT40), 5 180 MHz ~ 5 240 MHz (UNII 1: 11a/n_HT20), 5 190 MHz ~ 5 230 MHz (UNII 1: 11n_HT40), 5 260 MHz ~ 5 320 MHz (UNII 2A: 11a/n_HT20), 5 270 MHz ~ 5 310 MHz (UNII 2A: 11n_HT40), 5 500 MHz ~ 5 720 MHz (UNII 2C: 11a/n_HT20), 5 510 MHz ~ 5 710 MHz (UNII 2C: 11n_HT40),	
Modulation Type	DSSS, OFDM, GFSK, $\pi/4$ DQPSK, 8DPSK	
Number of Channels	79 channel (Bluetooth), 40 channel (Bluetooth Low Energy), 15 channel (Zigbee), 11 channel (11b/g/n_HT20), 5 channel (UNII 3: 11a/n_HT20), 2 channel (UNII 3: 11n_HT40), 4 channel (UNII 1: 11a/n_HT20), 2 channel (UNII 1: 11n_HT40), 4 channel (UNII 2A: 11a/n_HT20), 2 channel (UNII 2A: 11n_HT40), 9 channel (UNII 2C: 11a/n_HT20), 4 channel (UNII 2C: 11n_HT40)	
Antenna Type	Dipole antenna	
Antenna Gain	Bluetooth(BDR / EDR / LE), Zigbee WLAN 2.4 GHz Band	3.80 dBi
	WLAN 5 GHz Band	5.50 dBi

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

#### 3.3 Mode of operation during the test

To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this test report.

#### 4. EUT MODIFICATIONS

-. None

## 5. Transmitter Radiated Spurious Emissions

### 5.1 Operating environment

Temperature : 28 °C  
 Relative humidity : 46 % R.H.

### 5.2 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

### 5.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 29, 2018 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 28, 2018 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Mar. 30, 2018 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 15, 2018 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-419	Oct. 17, 2017 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jul. 28, 2017 (2Y)

All test equipment used is calibrated on a regular basis.



**5.4 Test Data for Radiated Emission**

**5.4.1 Radiated Emission which fall in the Restricted Band(802.11 b\_1 Mbps)**

- Test Date : September 12, 2018 ~ September 21, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 380.440	47.67	Peak	H	26.91	9.17	34.30	49.45	74.00	24.55
2 380.540	40.30	Average	H	26.91	9.17	34.30	42.08	54.00	11.92
2 380.540	48.35	Peak	V	26.91	9.17	34.30	50.13	74.00	23.87
2 380.540	41.76	Average	V	26.91	9.17	34.30	43.54	54.00	10.46
<b>Test Data for High Channel</b>									
2 484.850	52.98	Peak	H	27.47	9.49	34.46	55.48	74.00	18.52
2 493.180	41.68	Average	H	27.47	9.49	34.46	44.18	54.00	9.82
2 488.140	46.36	Peak	V	27.47	9.49	34.46	48.86	74.00	25.14
2 493.180	38.91	Average	V	27.47	9.49	34.46	41.41	54.00	12.59

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$


$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$




**Tested by: Tae-Ho, Kim / Senior Manager**

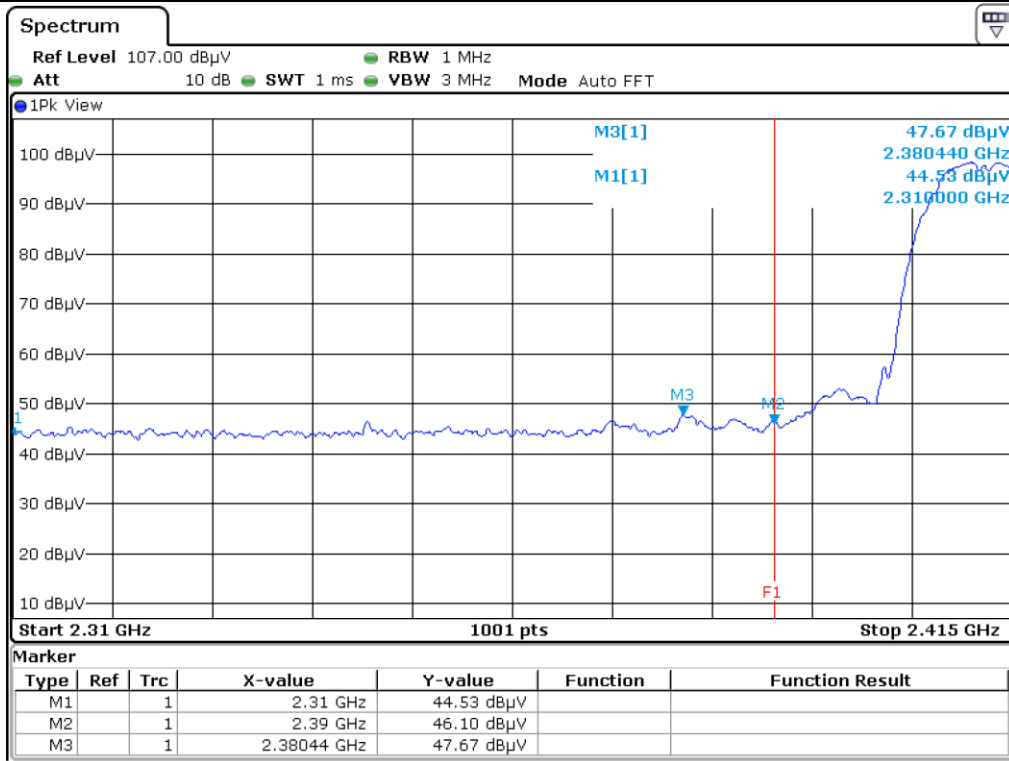


Low Channel\_Horizontal\_Peak

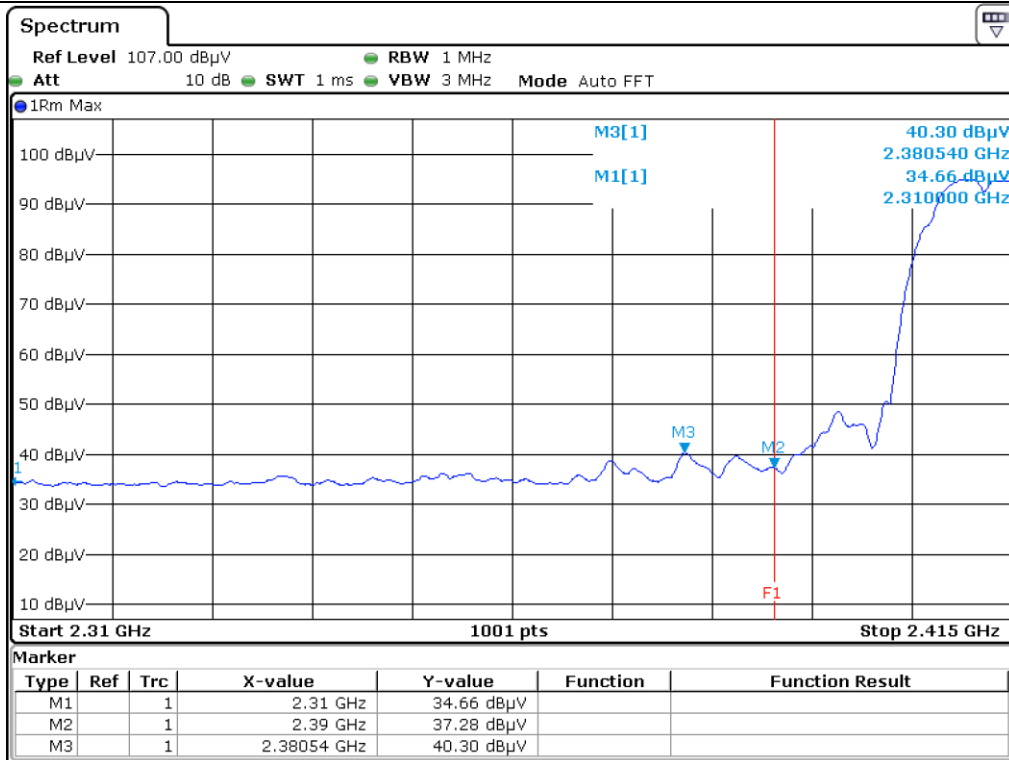


Low Channel\_Horizontal\_Average

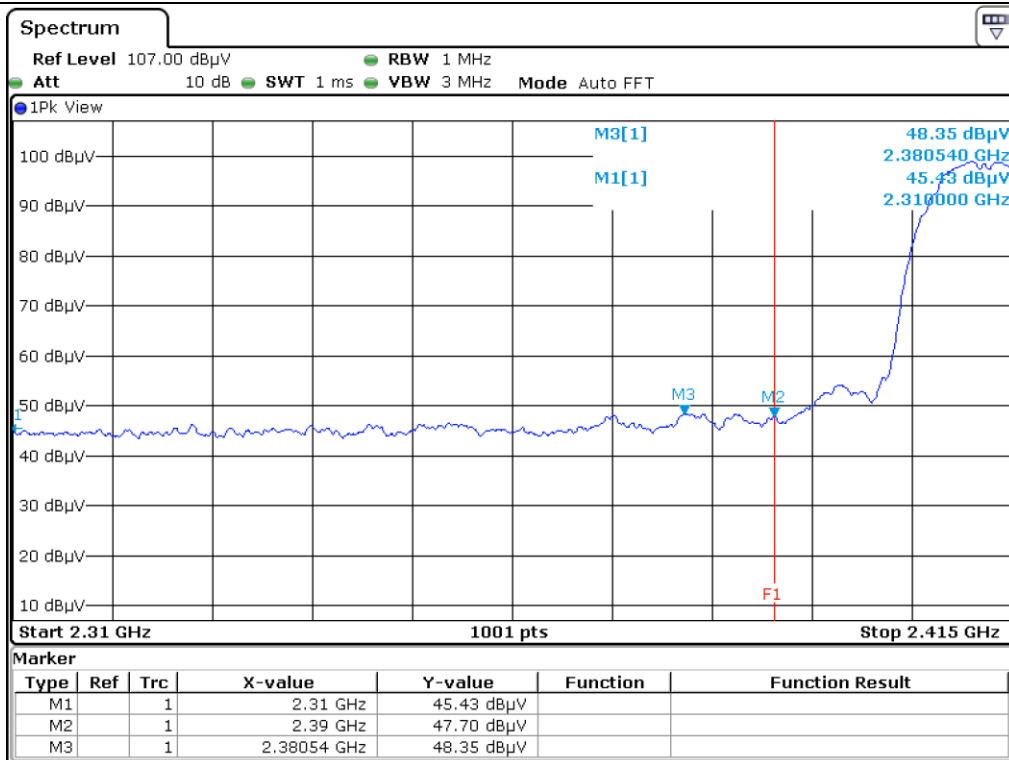


Low Channel\_Vertical\_Peak

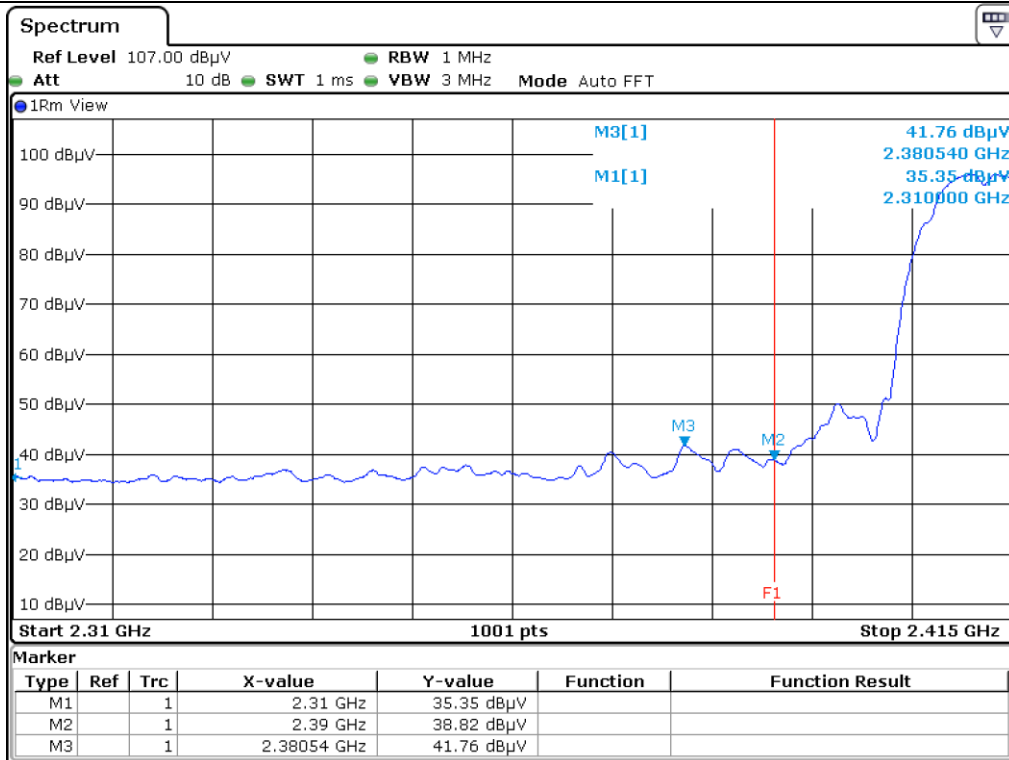


Low Channel\_Vertical\_Average

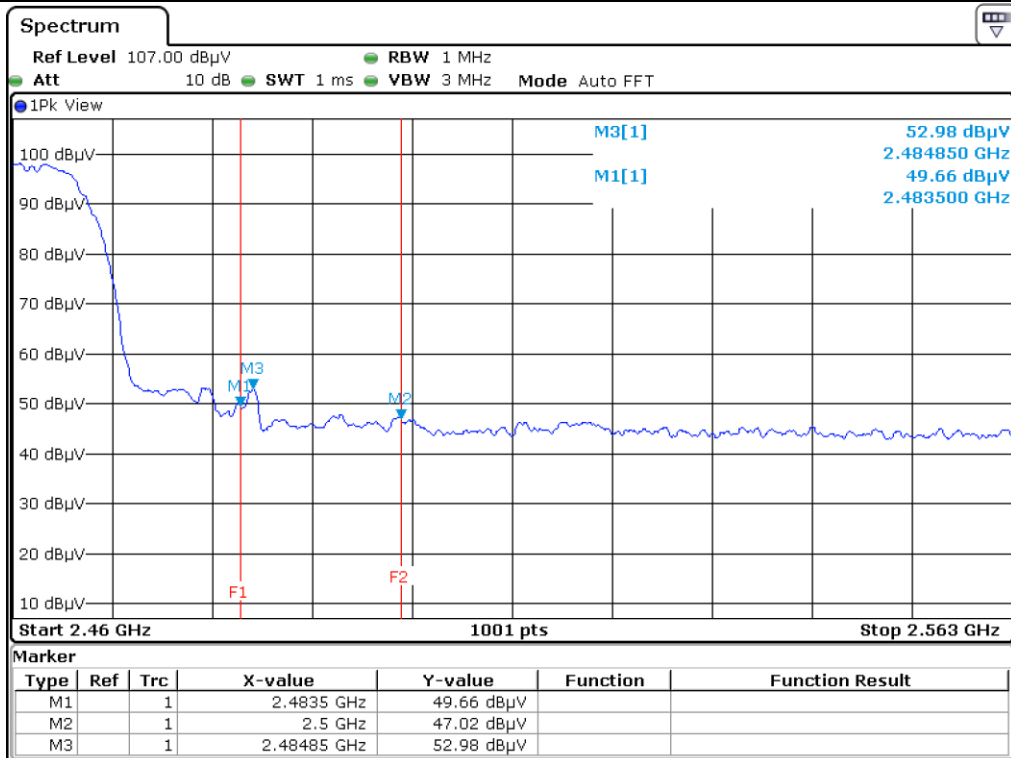


High Channel\_Horizontal\_Peak

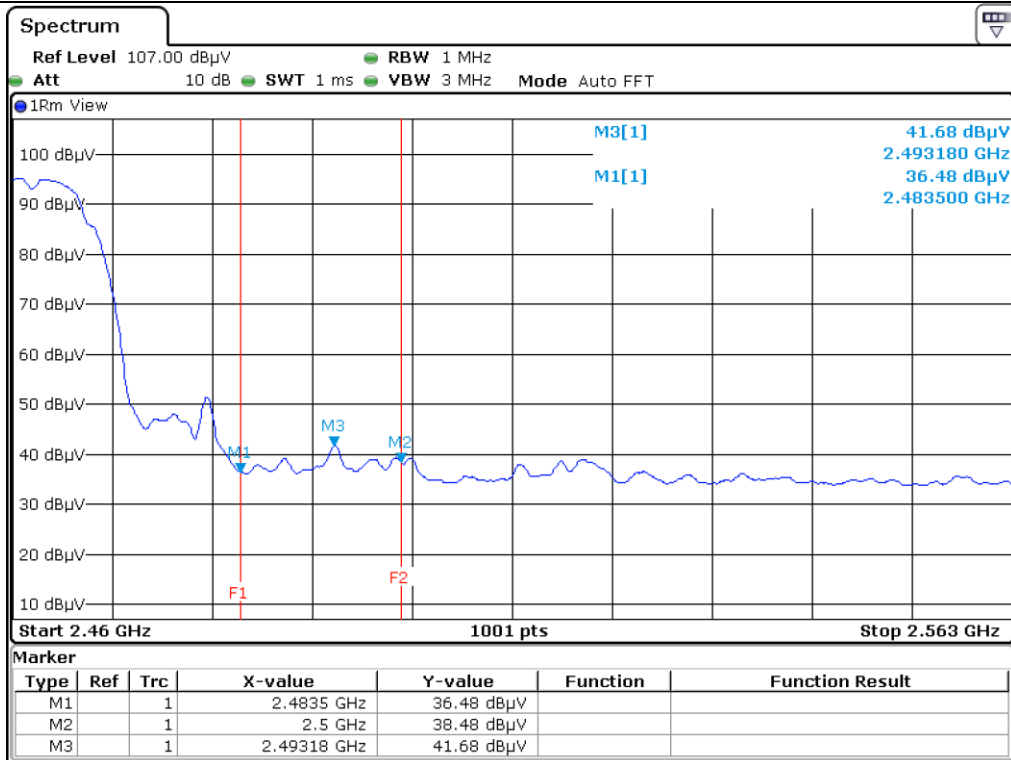

High Channel\_Horizontal\_Average

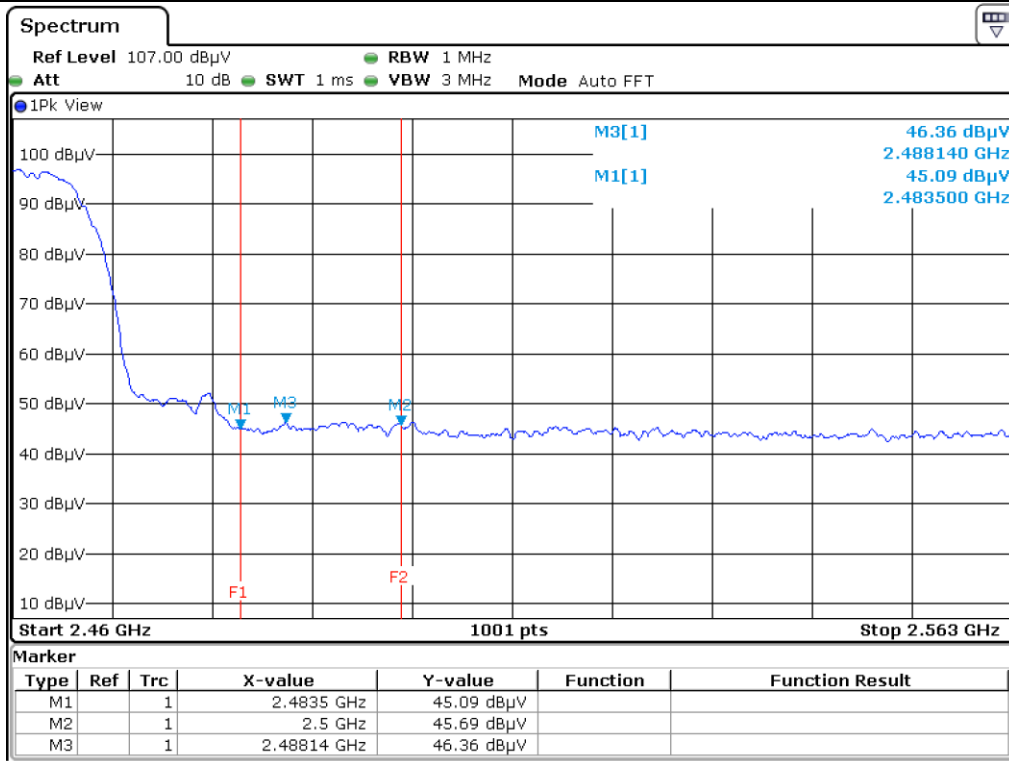

High Channel\_Vertical\_Peak

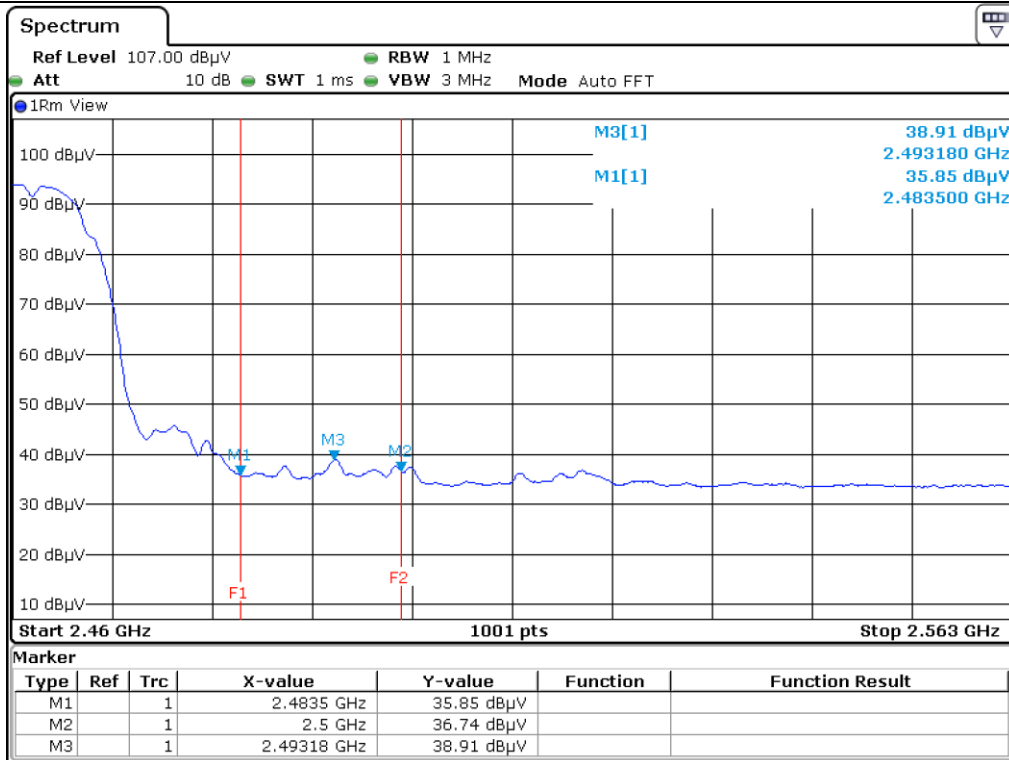

High Channel\_Vertical\_Average

**5.4.2 Radiated Emission which fall in the Restricted Band(802.11 g\_6 Mbps)**

- Test Date : September 12, 2018 ~ September 21, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 387.780	52.24	Peak	H	26.91	9.17	34.30	54.02	74.00	19.98
2 389.350	40.84	Average	H	26.91	9.17	34.30	42.62	54.00	11.38
2 389.350	53.53	Peak	V	26.91	9.17	34.30	55.31	74.00	18.69
2 389.670	42.31	Average	V	26.91	9.17	34.30	44.09	54.00	9.91
<b>Test Data for High Channel</b>									
2 483.500	54.82	Peak	H	27.47	9.49	34.46	57.32	74.00	16.68
2 483.500	42.80	Average	H	27.47	9.49	34.46	45.30	54.00	8.70
2 483.500	53.04	Peak	V	27.47	9.49	34.46	55.54	74.00	18.46
2 483.500	40.86	Average	V	27.47	9.49	34.46	43.36	54.00	10.64

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$


$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$




**Tested by: Tae-Ho, Kim / Senior Manager**

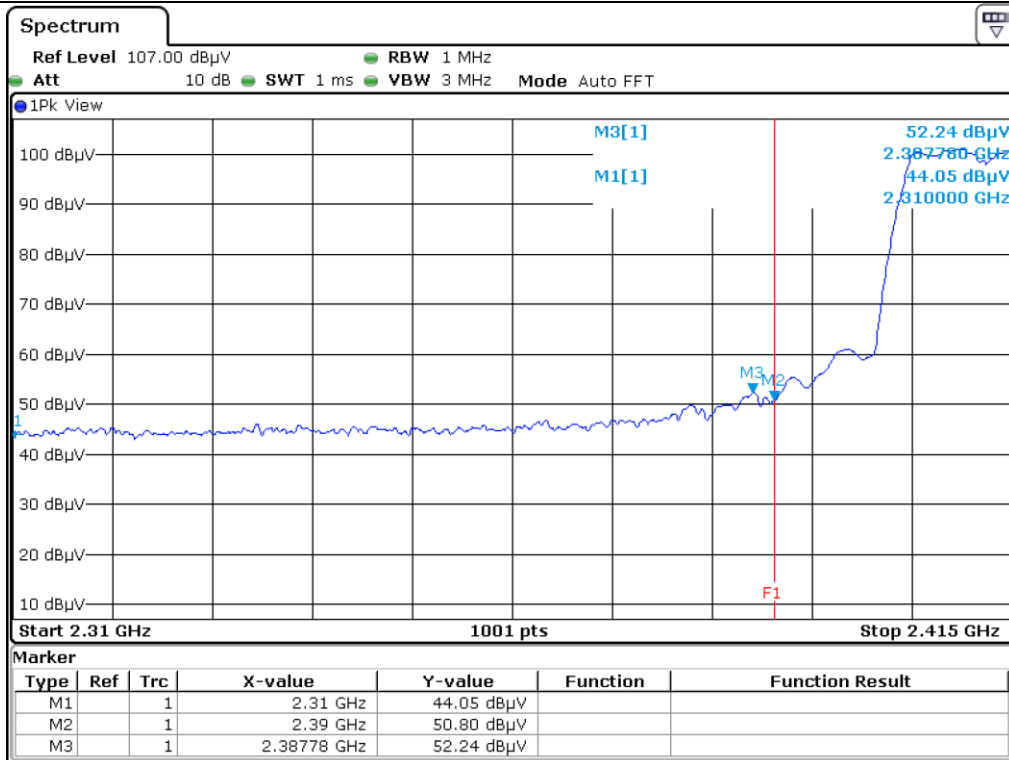


Low Channel\_Horizontal\_Peak

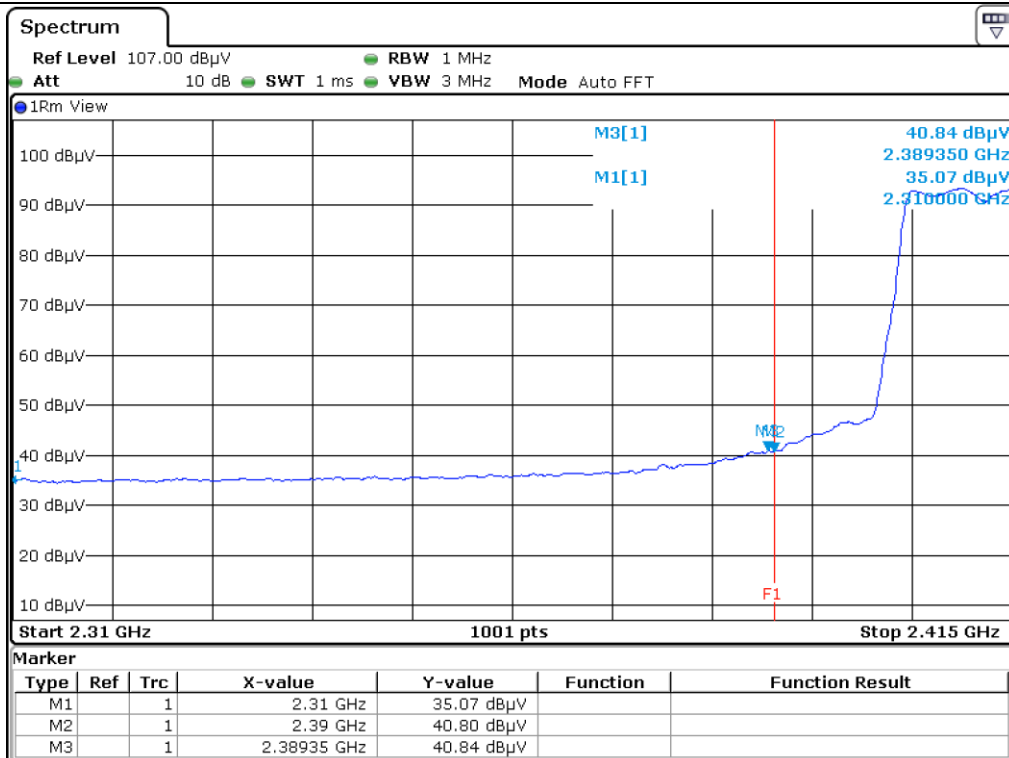

Low Channel\_Horizontal\_Average

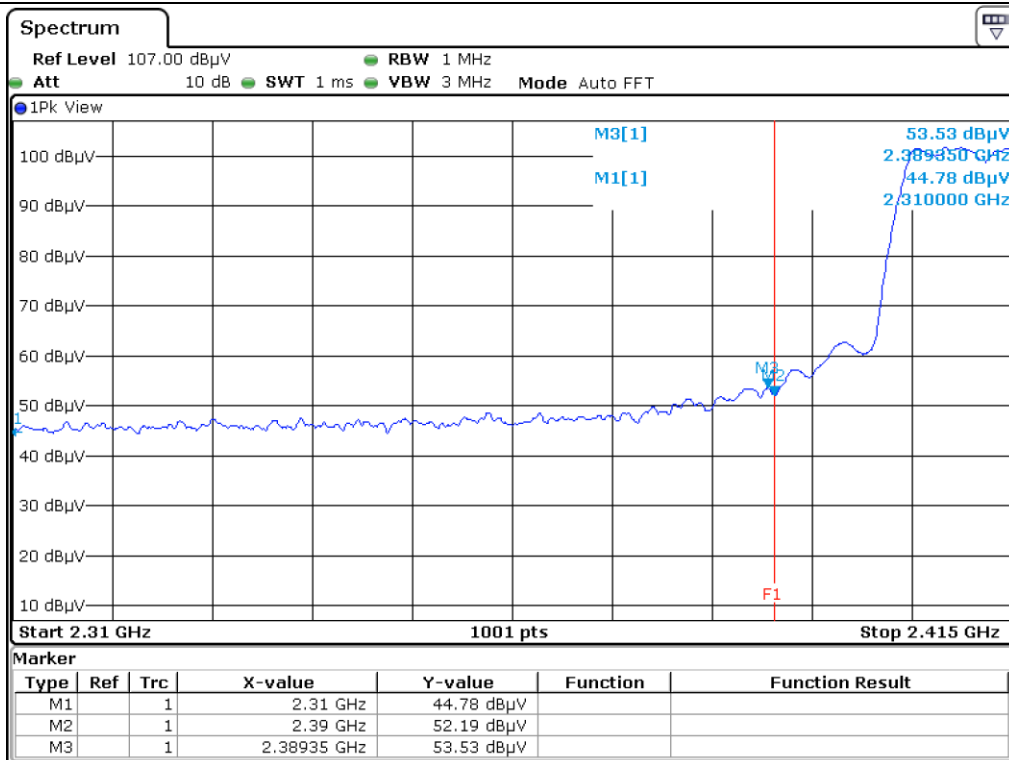


Low Channel\_Vertical\_Peak

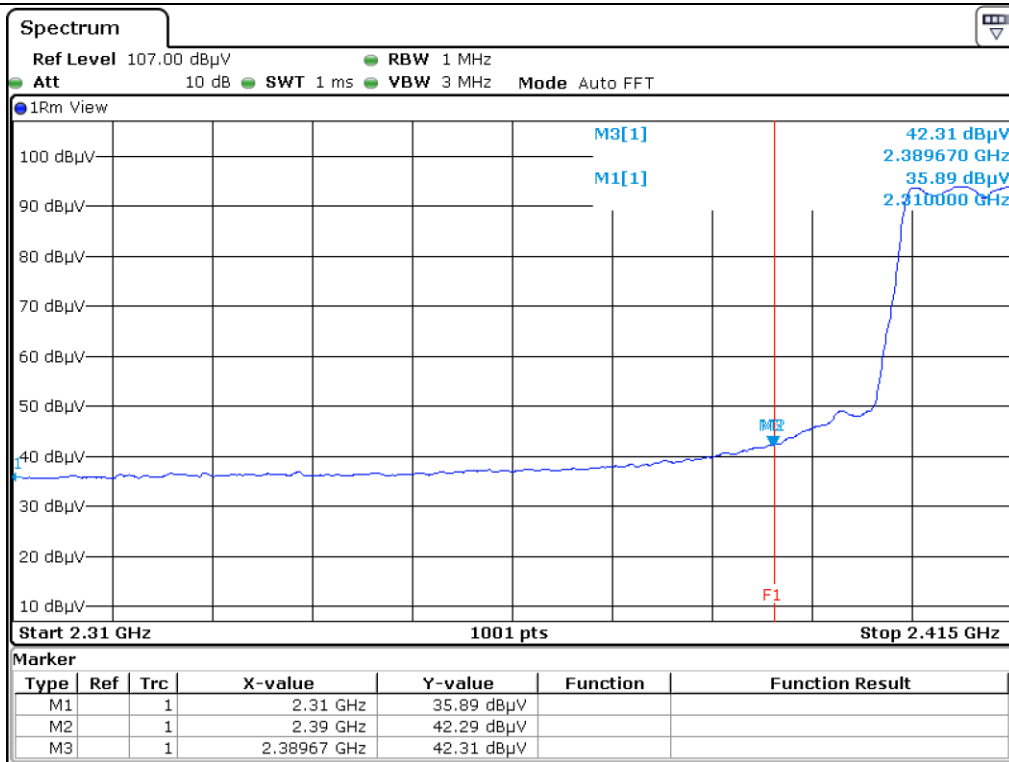


Low Channel\_Vertical\_Average




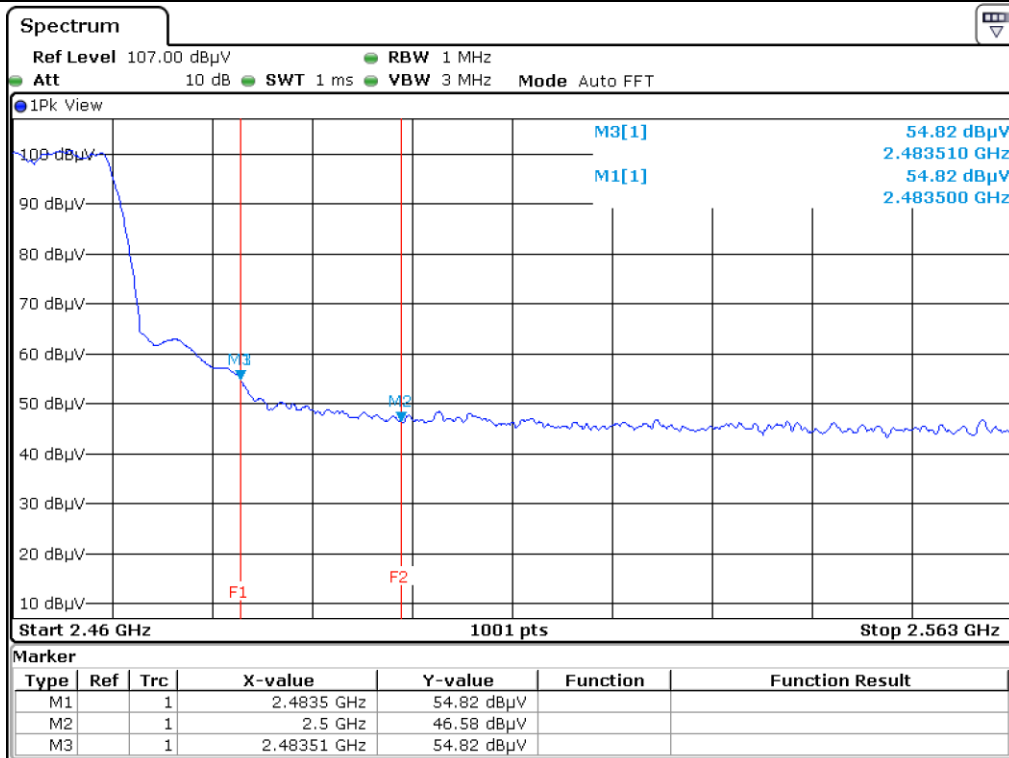


High Channel\_Horizontal\_Peak

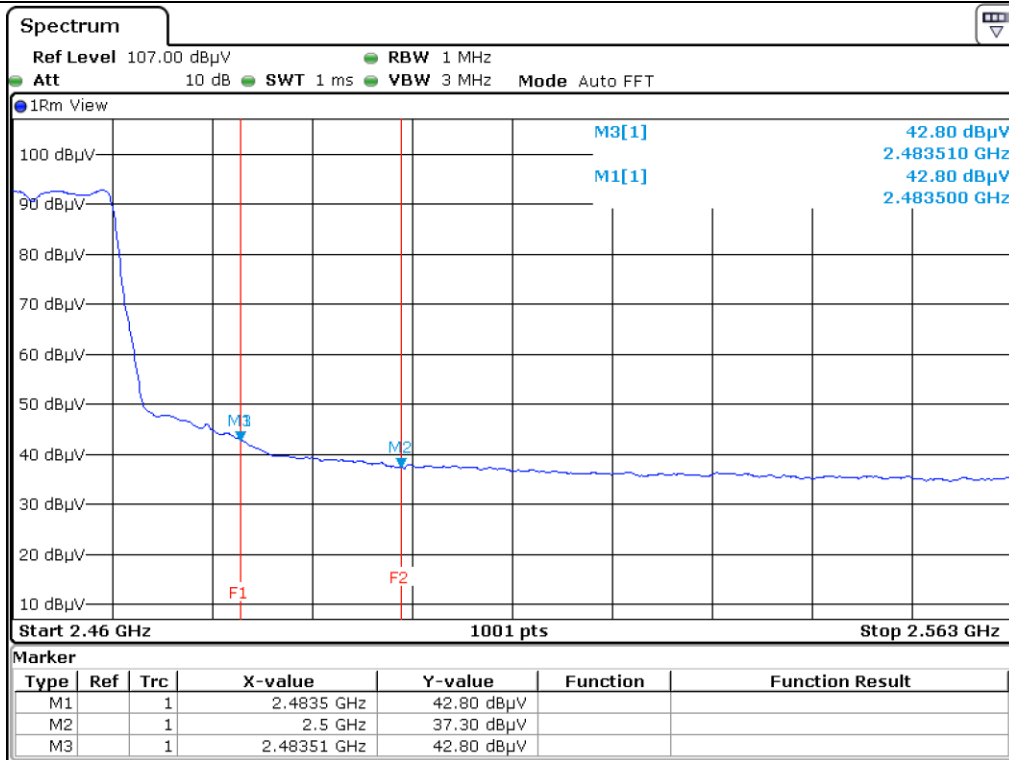

High Channel\_Horizontal\_Average

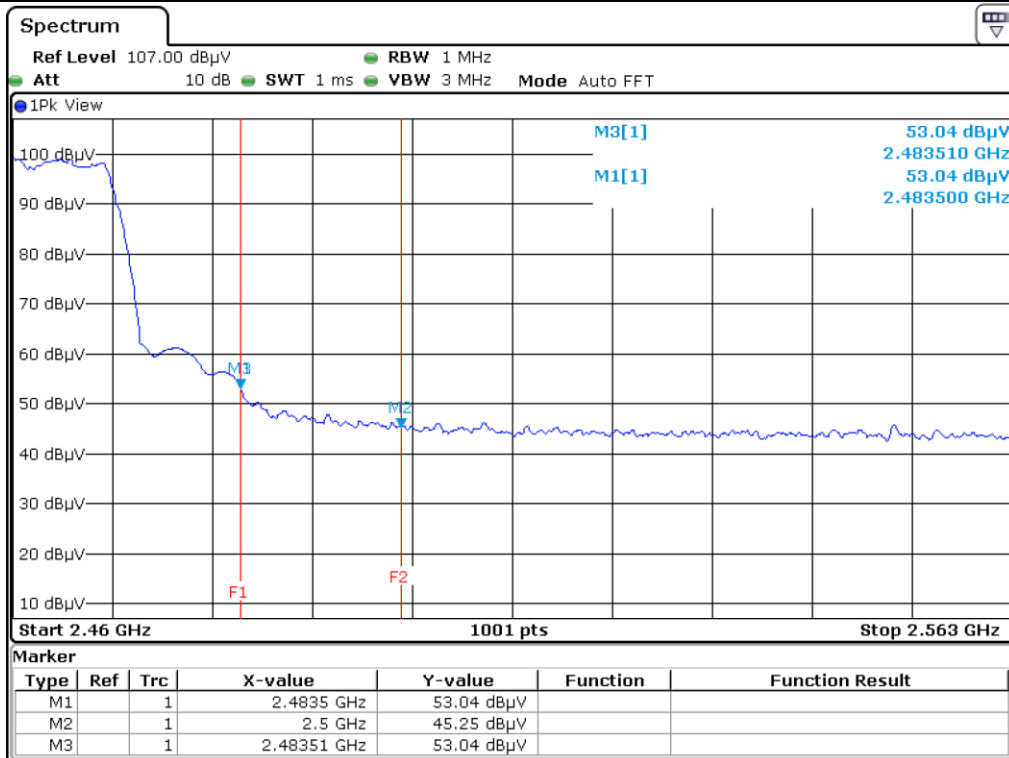

High Channel\_Vertical\_Peak

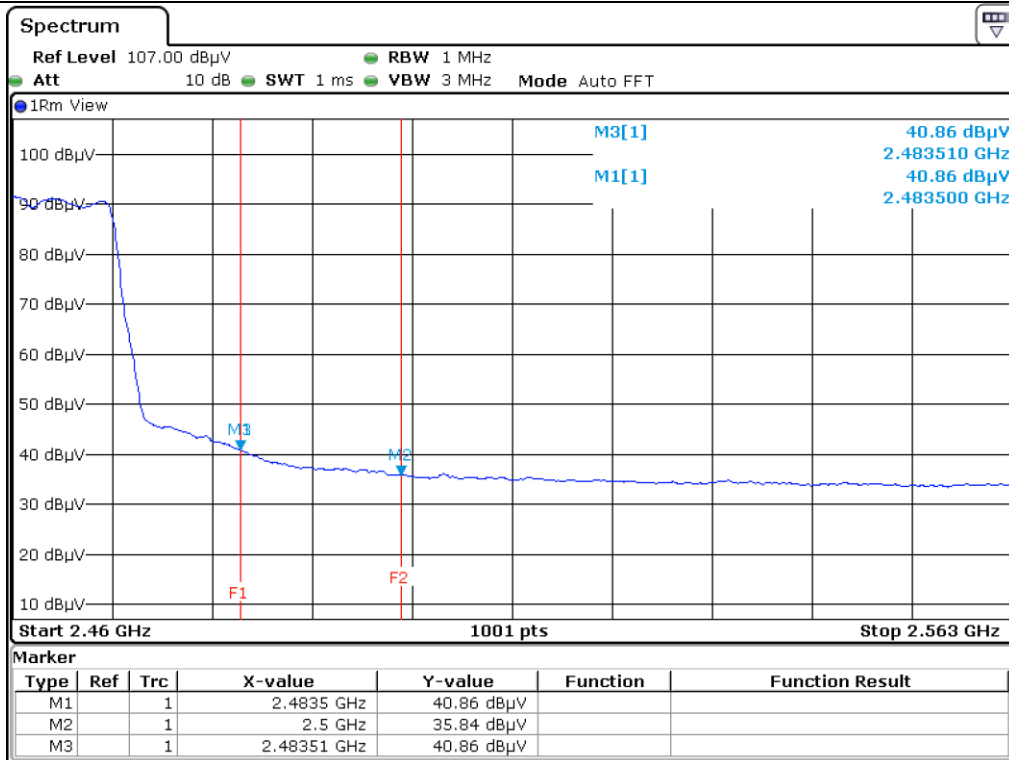

High Channel\_Vertical\_Average

**5.4.3 Radiated Emission which fall in the Restricted Band(802.11 n\_HT20\_MCS 0)**

- Test Date : September 12, 2018 ~ September 21, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.000	53.81	Peak	H	26.91	9.17	34.30	55.59	74.00	18.41
2 390.000	41.54	Average	H	26.91	9.17	34.30	43.32	54.00	10.68
2 390.000	54.73	Peak	V	26.91	9.17	34.30	56.51	74.00	17.49
2 390.000	43.39	Average	V	26.91	9.17	34.30	45.17	54.00	8.83
<b>Test Data for High Channel</b>									
2 483.500	53.97	Peak	H	27.47	9.49	34.46	56.47	74.00	17.53
2 483.500	42.23	Average	H	27.47	9.49	34.46	44.73	54.00	9.27
2 484.340	52.17	Peak	V	27.47	9.49	34.46	54.67	74.00	19.33
2 483.500	40.37	Average	V	27.47	9.49	34.46	42.87	54.00	11.13

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$


$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$




**Tested by: Tae-Ho, Kim / Senior Manager**

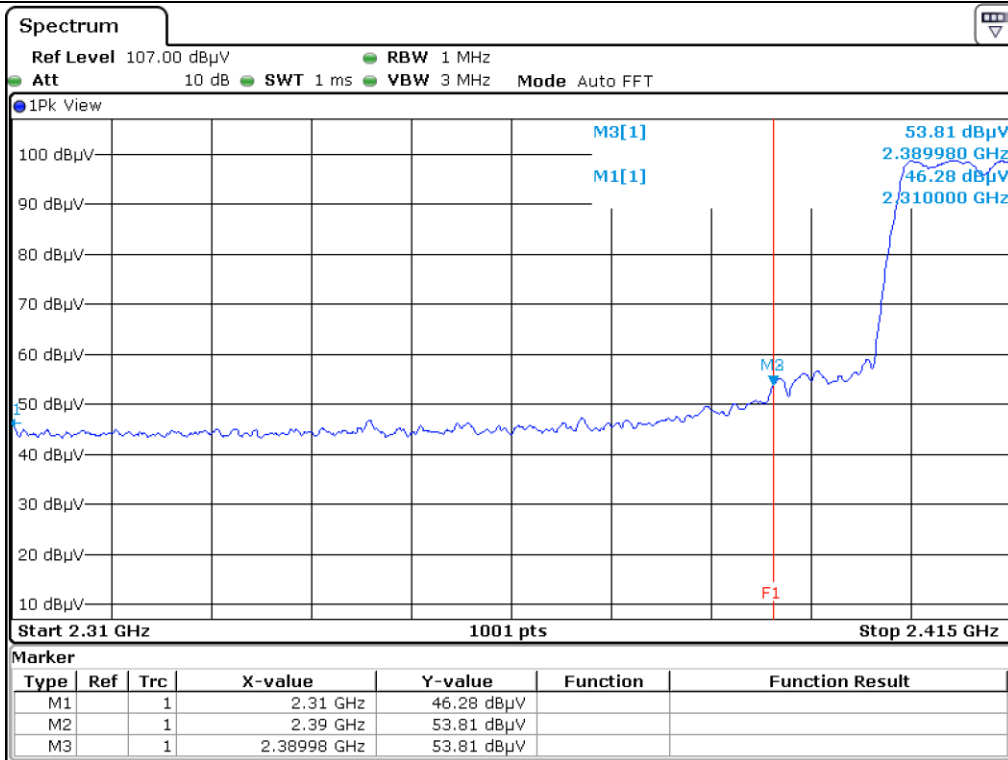


Low Channel\_Horizontal\_Peak

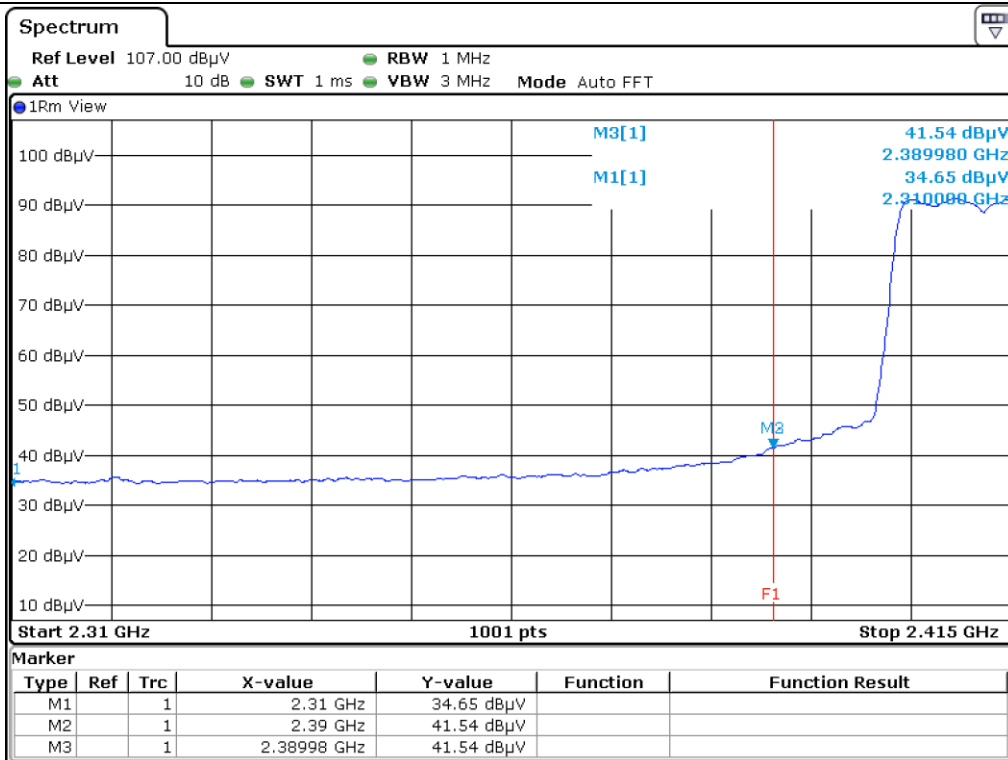


Low Channel\_Horizontal\_Average

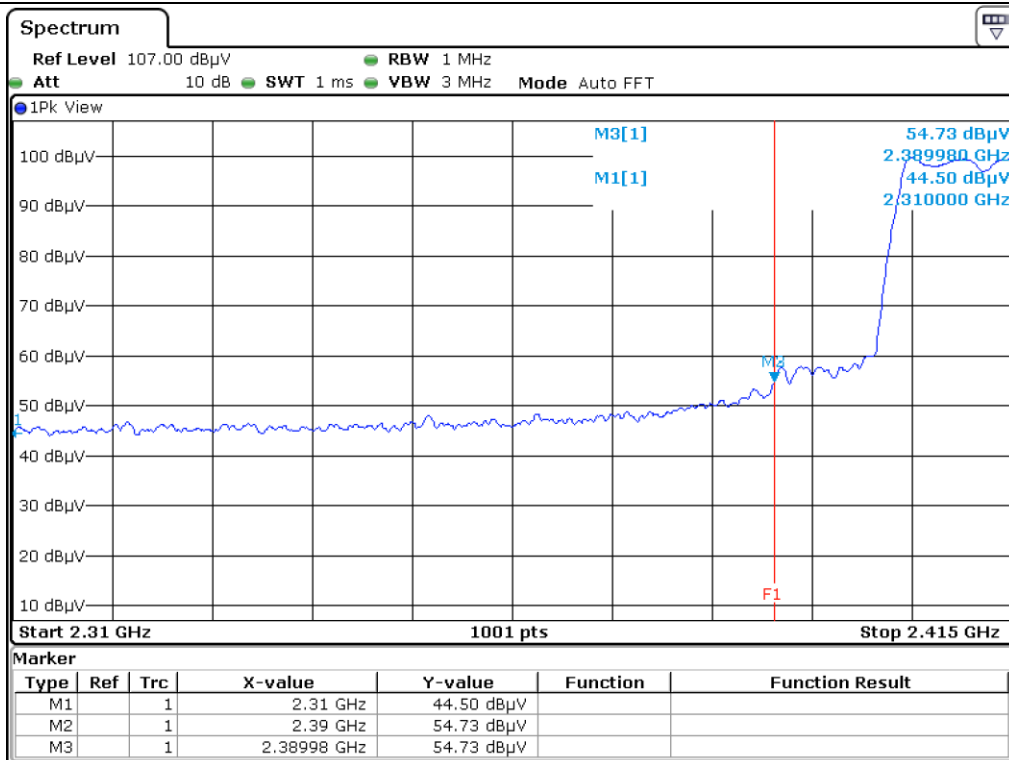


Low Channel\_Vertical\_Peak

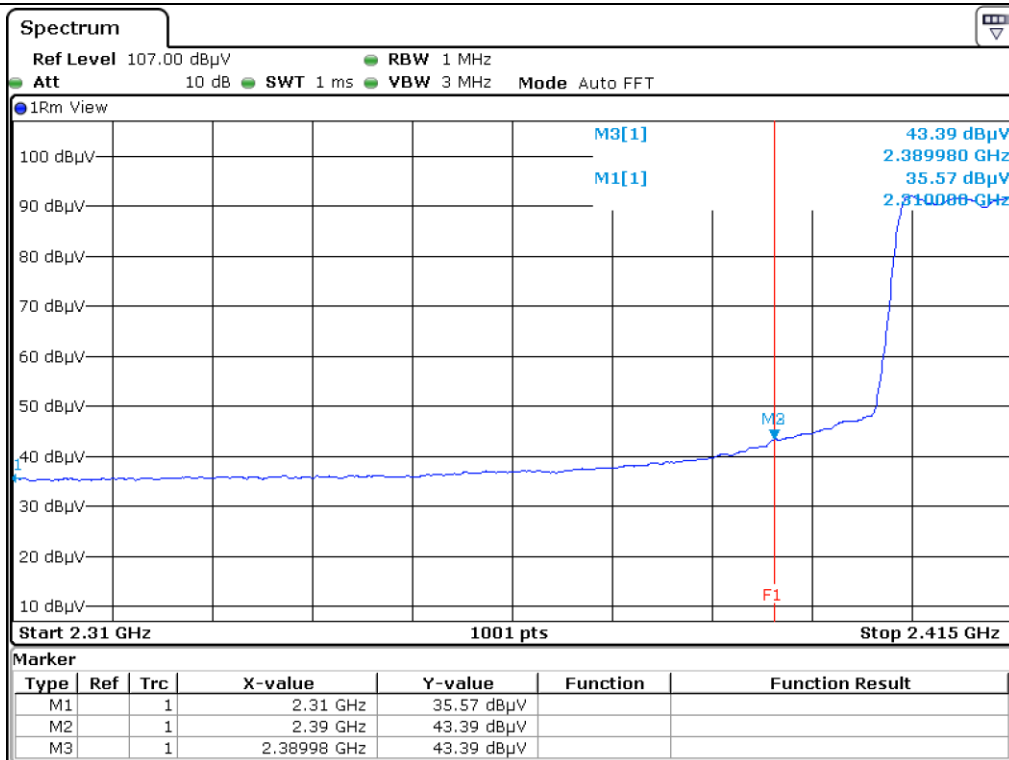


Low Channel\_Vertical\_Average

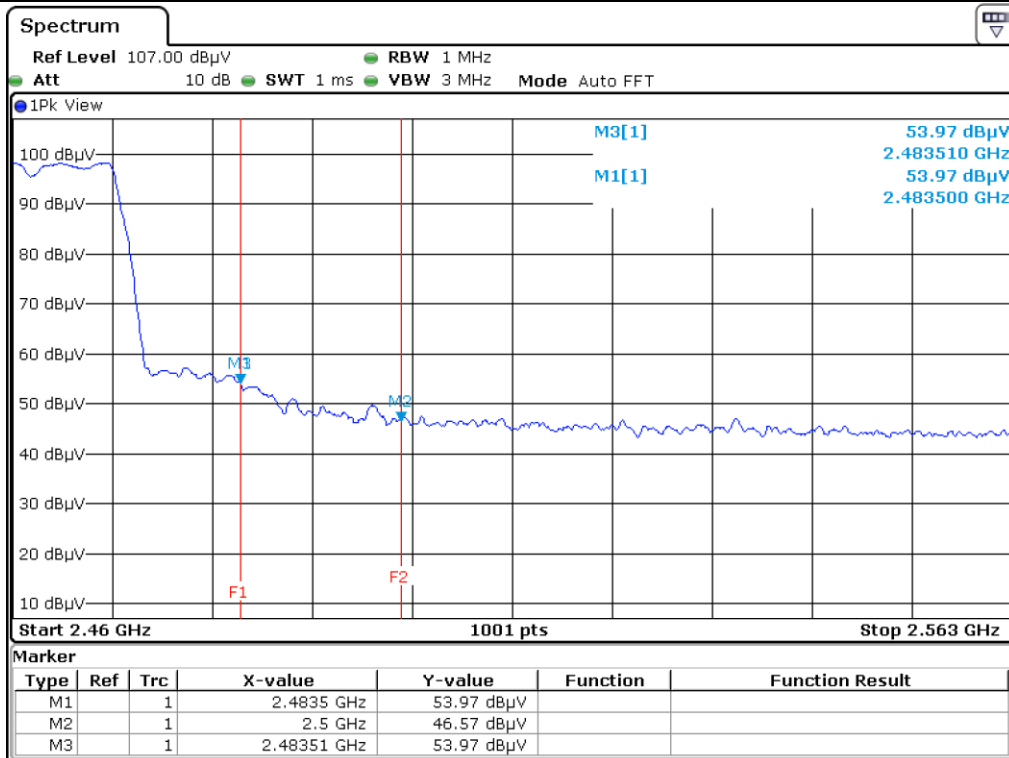


High Channel\_Horizontal\_Peak

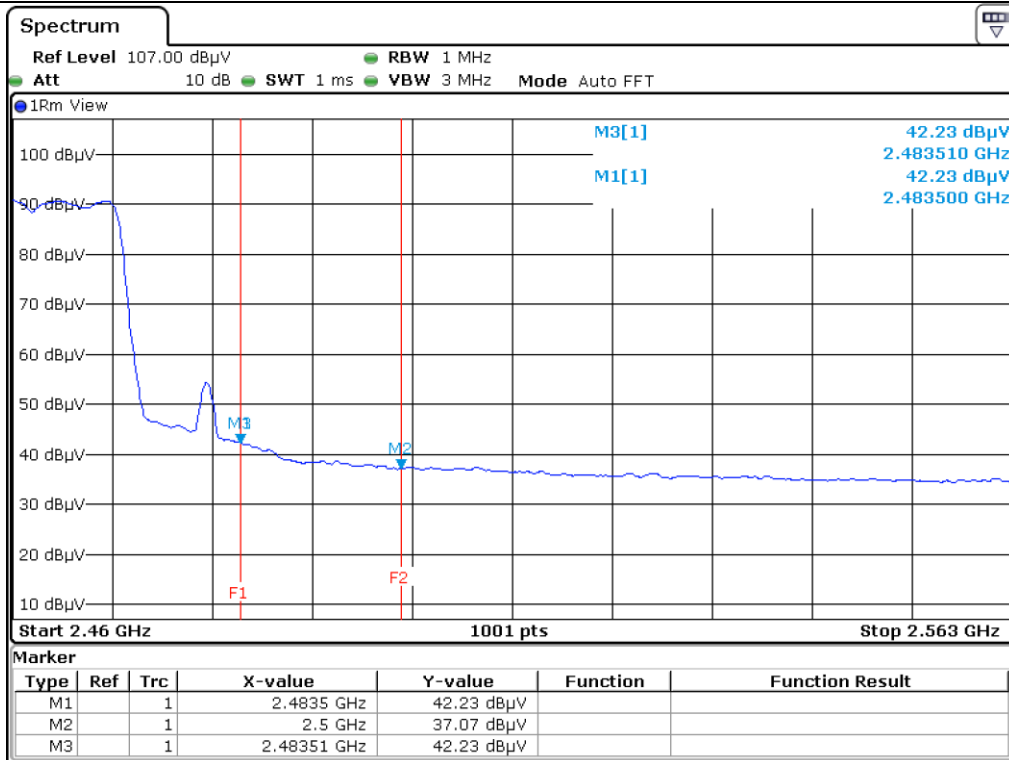

High Channel\_Horizontal\_Average

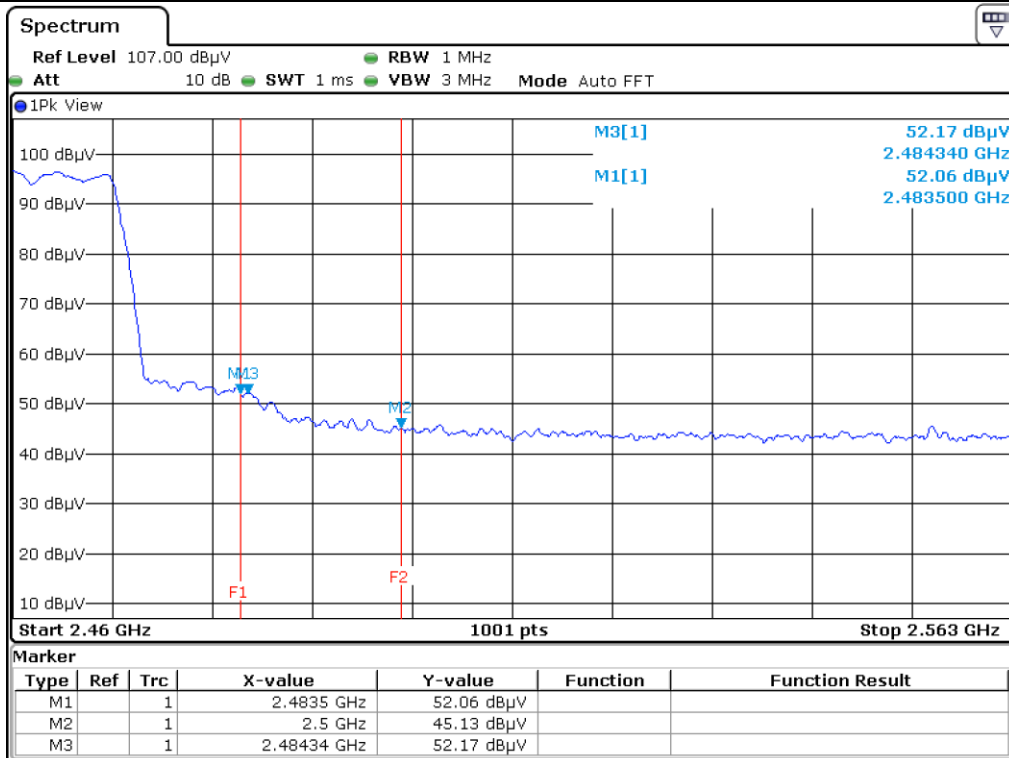

High Channel\_Vertical\_Peak

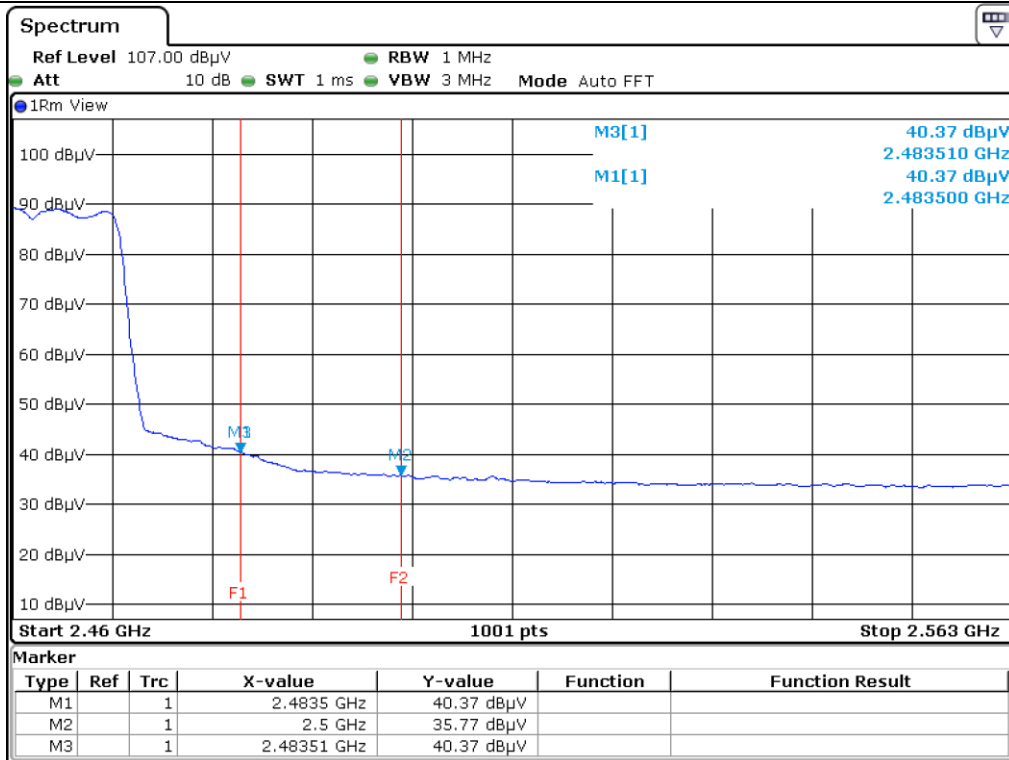

High Channel\_Vertical\_Average

**5.4.4 Spurious & Harmonic Radiated Emission(802.11 b\_1 Mbps)**

- Test Date : September 12, 2018 ~ September 21, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,  
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 30 kHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 824.00	32.92	Peak	H	30.01	12.31	35.23	40.01	74.00	33.99
4 824.00	33.16	Peak	V	30.01	12.31	35.23	40.25	74.00	33.75
<b>Test Data for Middle Channel</b>									
4 874.00	32.32	Peak	H	30.15	12.43	35.26	39.64	74.00	34.36
4 874.00	33.18	Peak	V	30.15	12.43	35.26	40.50	74.00	33.50
<b>Test Data for High Channel</b>									
4 924.00	32.42	Peak	H	30.17	12.81	35.29	40.11	74.00	33.89
4 924.00	31.89	Peak	V	30.17	12.81	35.29	39.58	74.00	34.42

Tabulated test data for Restricted Band

Remark 1: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$


$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

Remark 2: maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.(ANSI C63.10-2013)




**Tested by: Tae-Ho, Kim / Senior Manager**




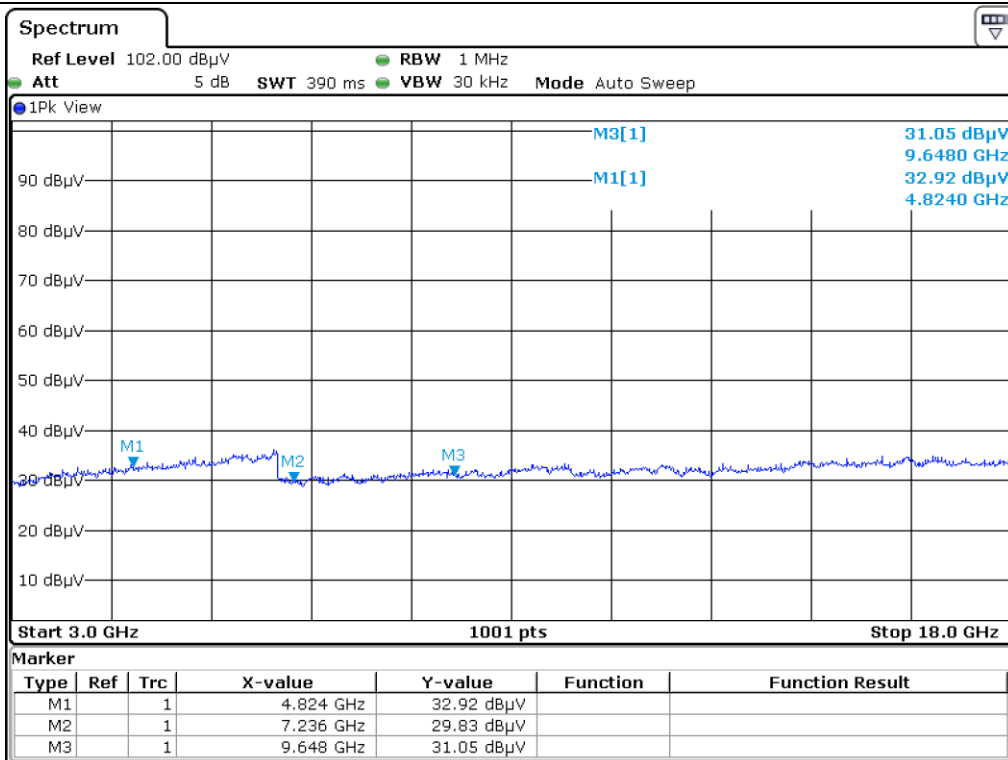


Low Channel\_Horizontal\_Peak

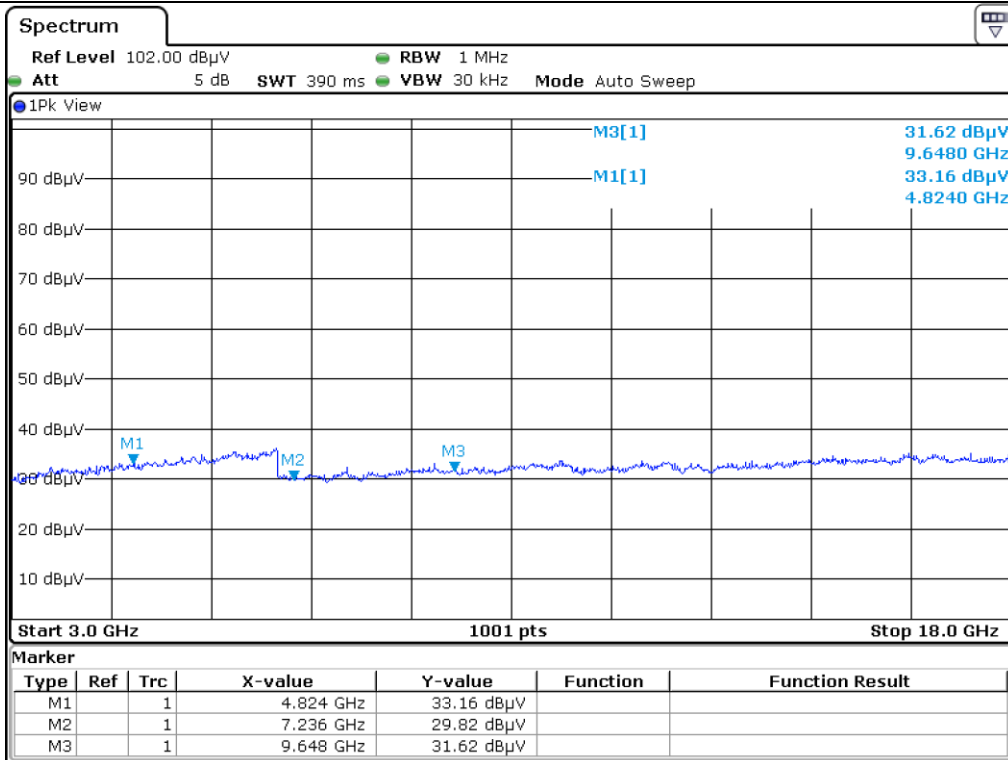


Low Channel\_Vertical\_Peak

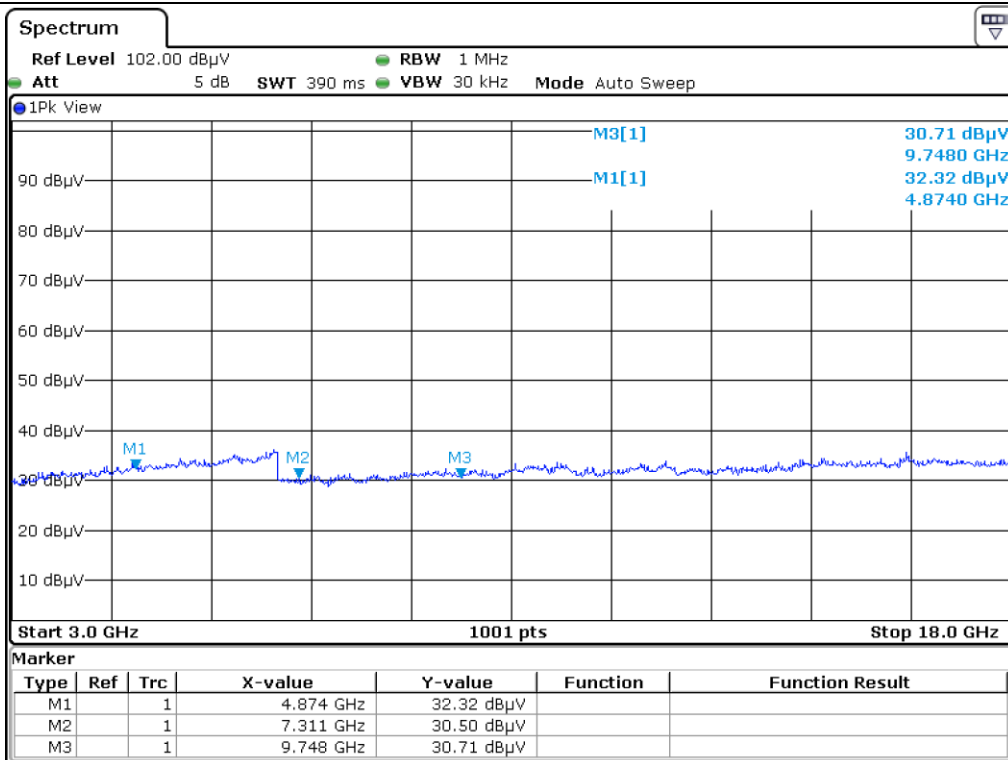


Middle Channel\_Horizontal\_Peak

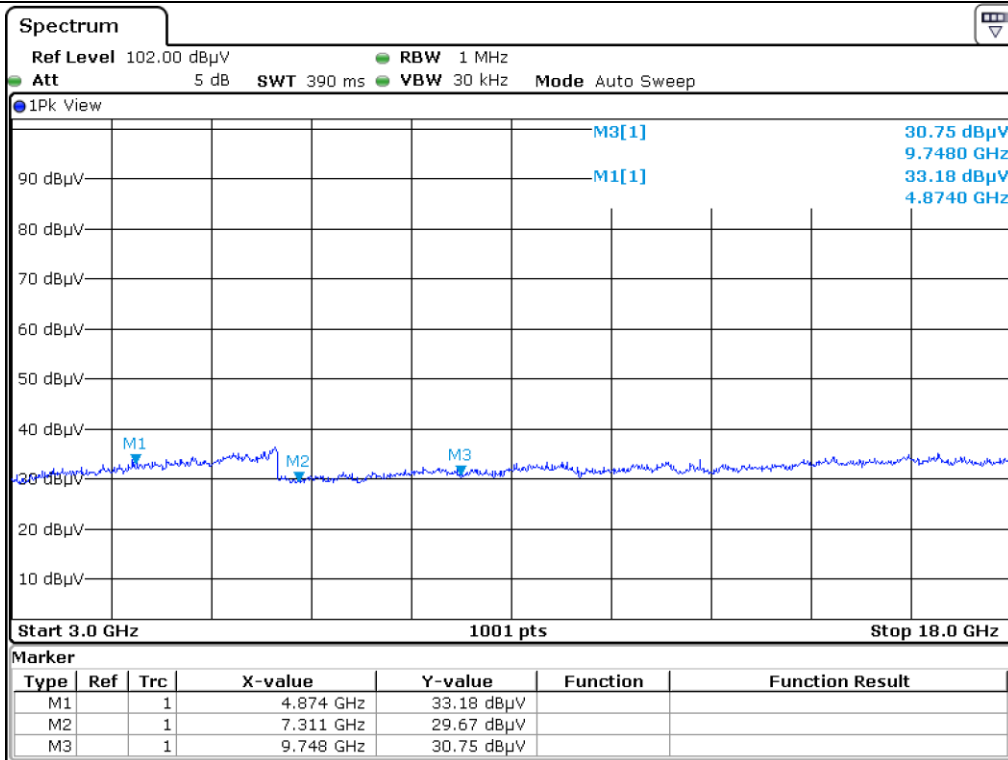

Middle Channel\_Vertical\_Peak

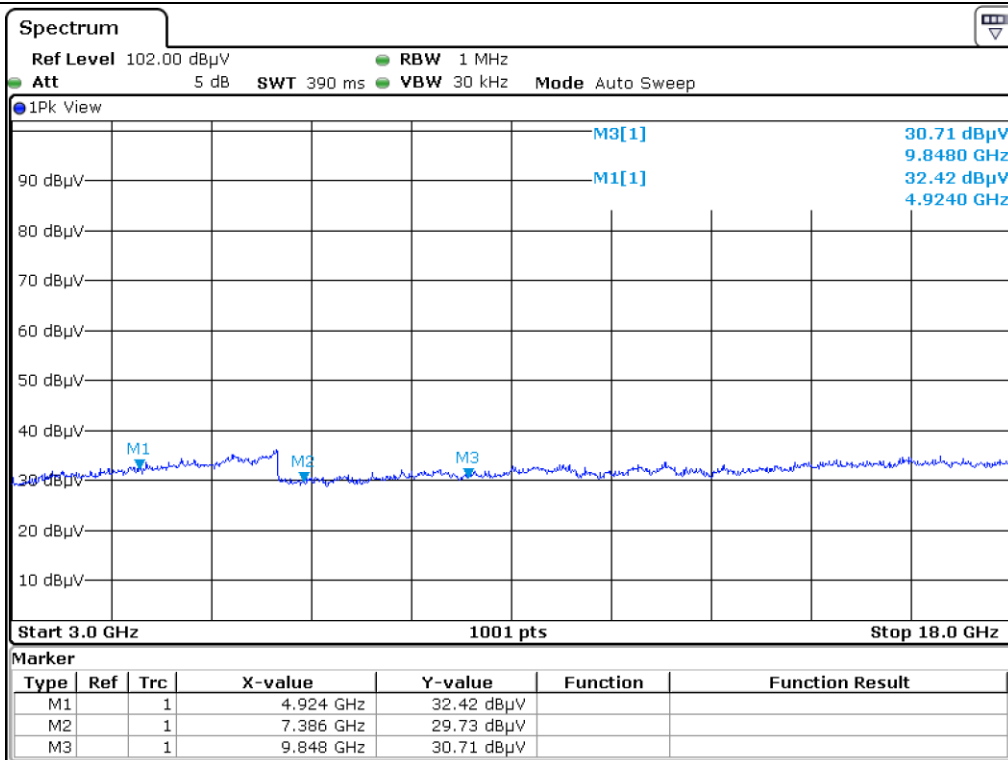

High Channel\_Horizontal\_Peak

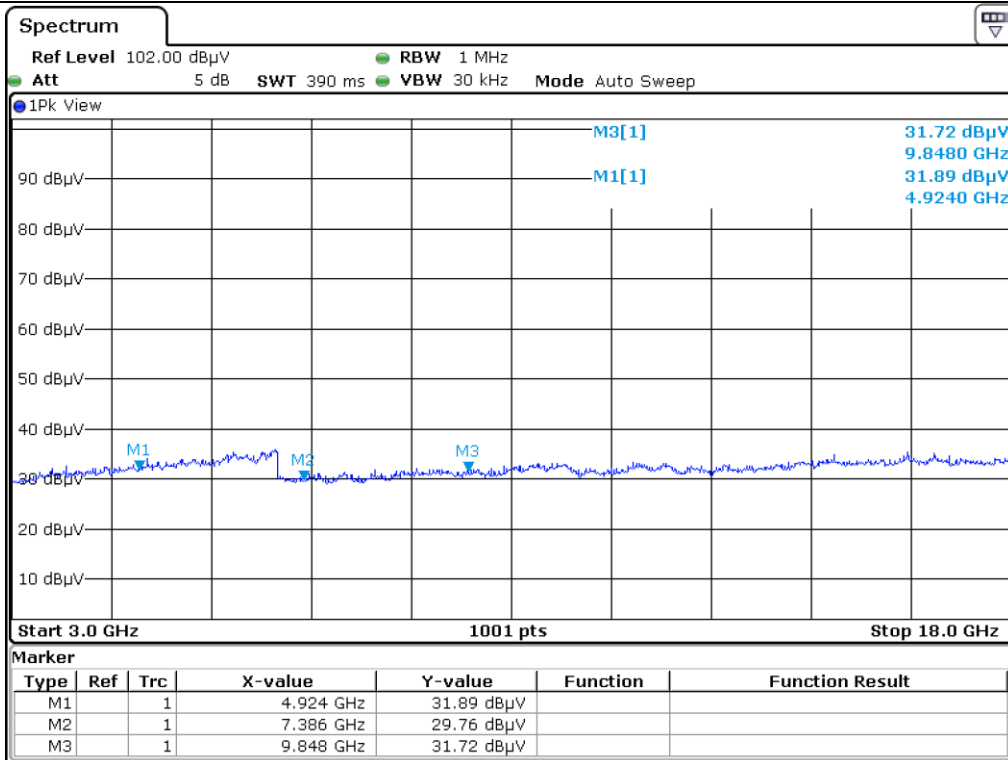

High Channel\_Vertical\_Peak

**5.4.5 Spurious & Harmonic Radiated Emission(802.11 g\_6 Mbps)**

- Test Date : September 12, 2018 ~ September 21, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,  
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 30 kHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 824.00	32.90	Peak	H	30.01	12.31	35.23	39.99	74.00	34.01
4 824.00	33.42	Peak	V	30.01	12.31	35.23	40.51	74.00	33.49
<b>Test Data for Middle Channel</b>									
4 884.00	31.71	Peak	H	30.15	12.43	35.26	39.03	74.00	34.97
4 884.00	31.72	Peak	V	30.15	12.43	35.26	39.04	74.00	34.96
<b>Test Data for High Channel</b>									
4 924.00	31.92	Peak	H	30.17	12.81	35.29	39.61	74.00	34.39
4 924.00	31.97	Peak	V	30.17	12.81	35.29	39.66	74.00	34.34

Tabulated test data for Restricted Band

Remark 1: “H”: Horizontal, “V”: Vertical


$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$


Remark 2: maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.(ANSI C63.10-2013)




**Tested by: Tae-Ho, Kim / Senior Manager**

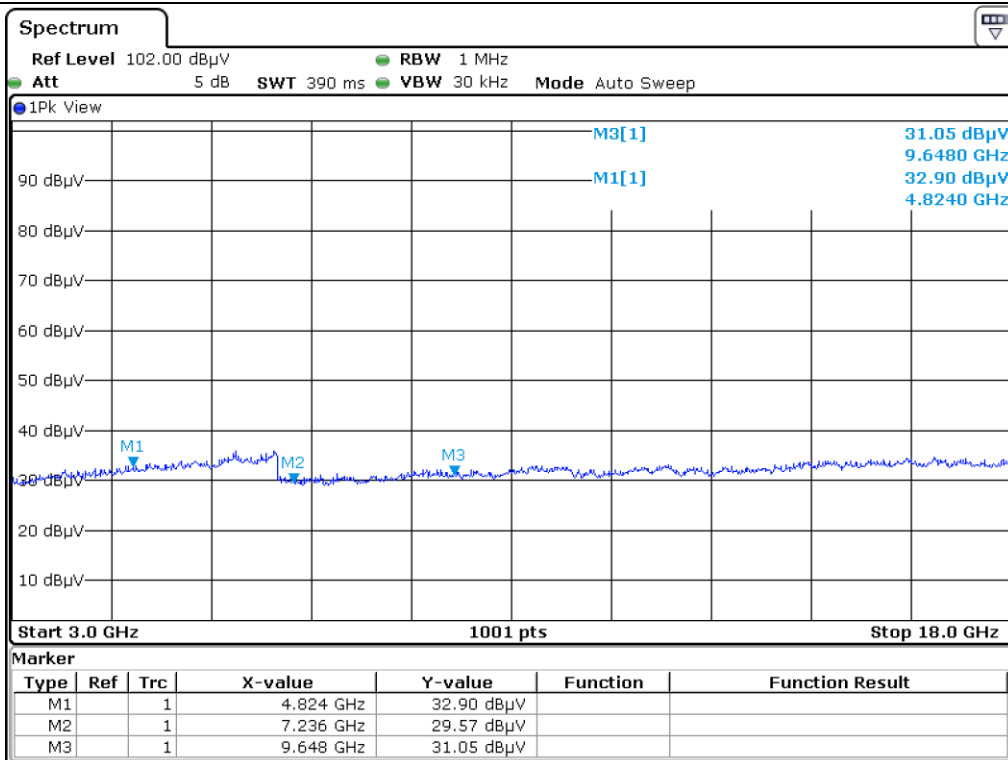


Low Channel\_Horizontal\_Peak

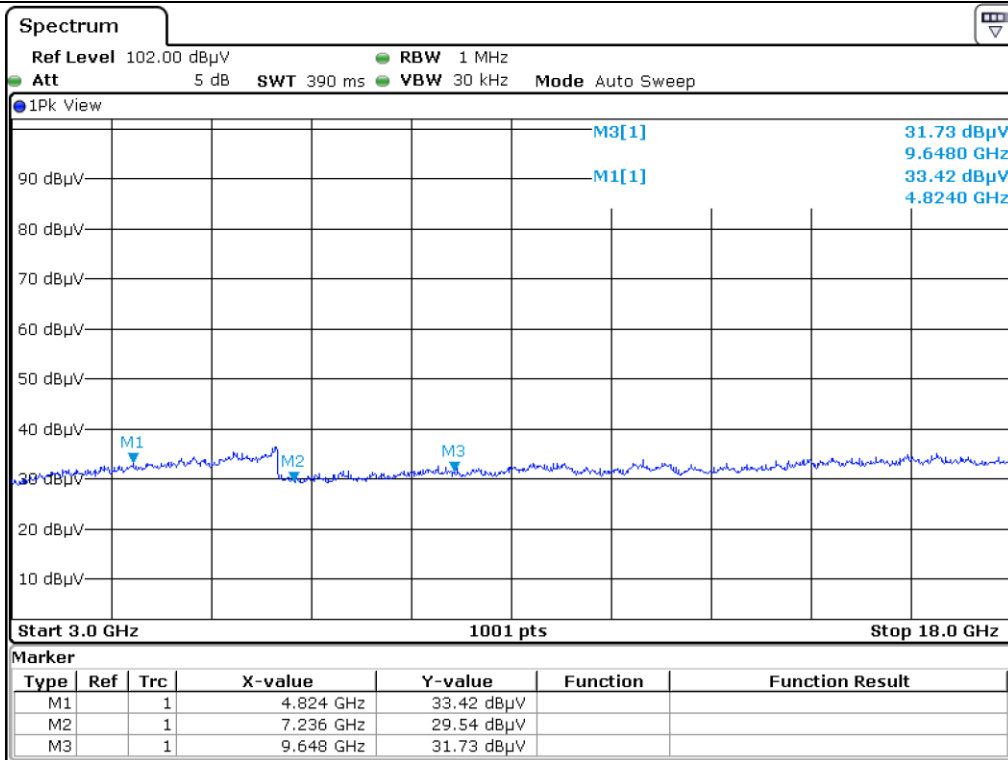


Low Channel\_Vertical\_Peak

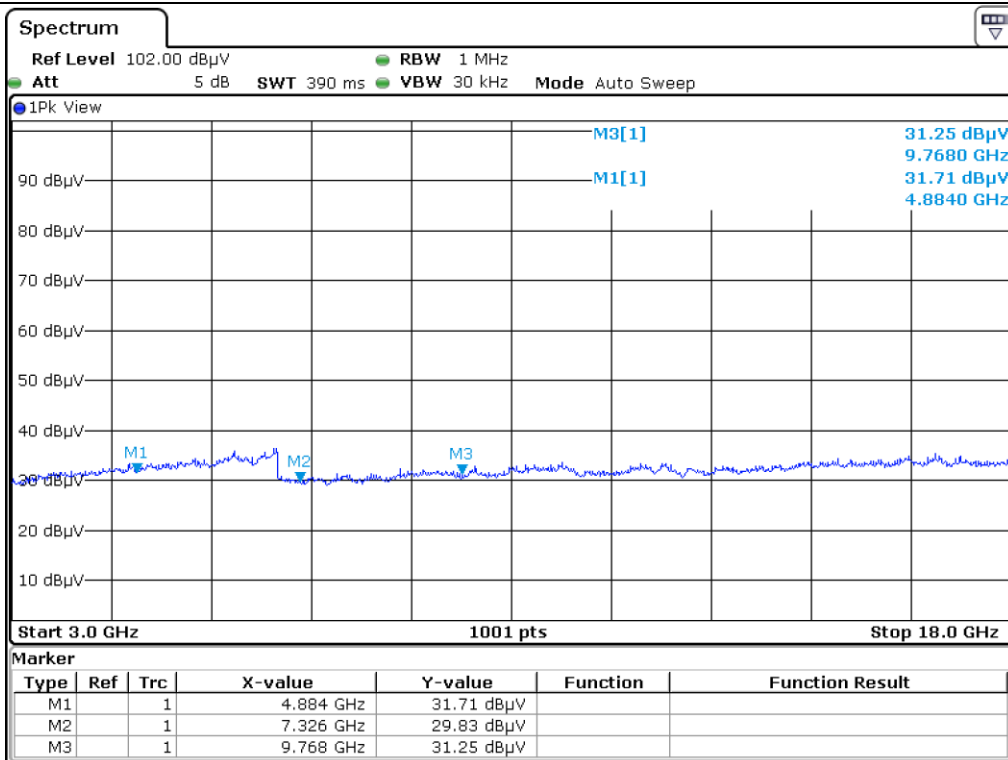


Middle Channel\_Horizontal\_Peak

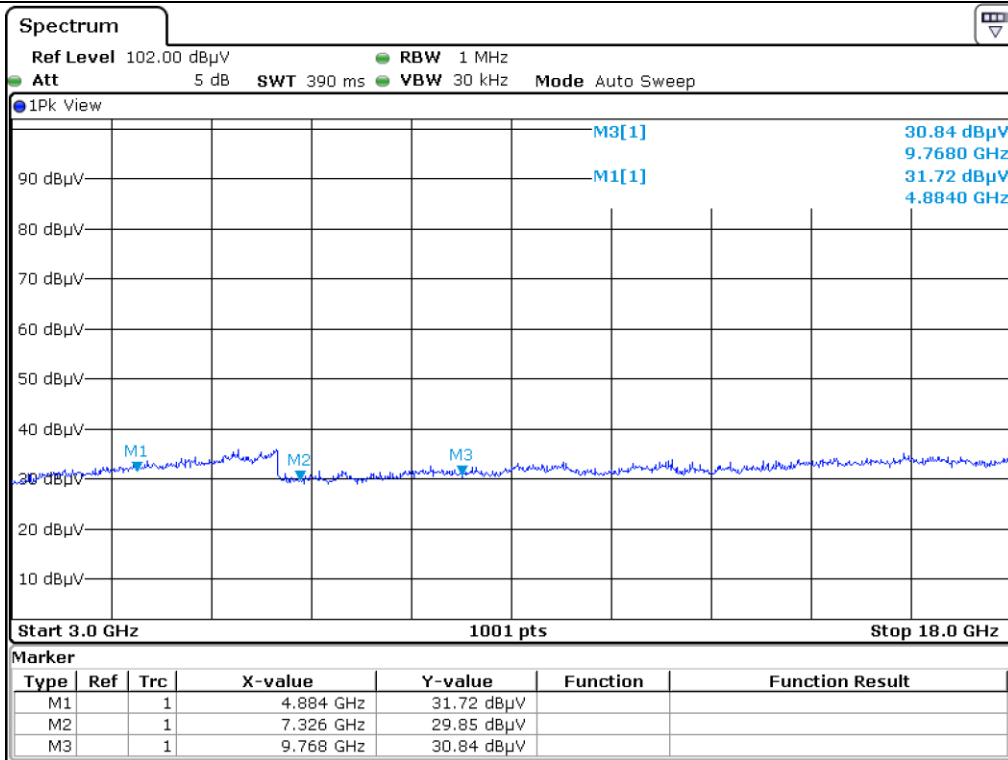

Middle Channel\_Vertical\_Peak

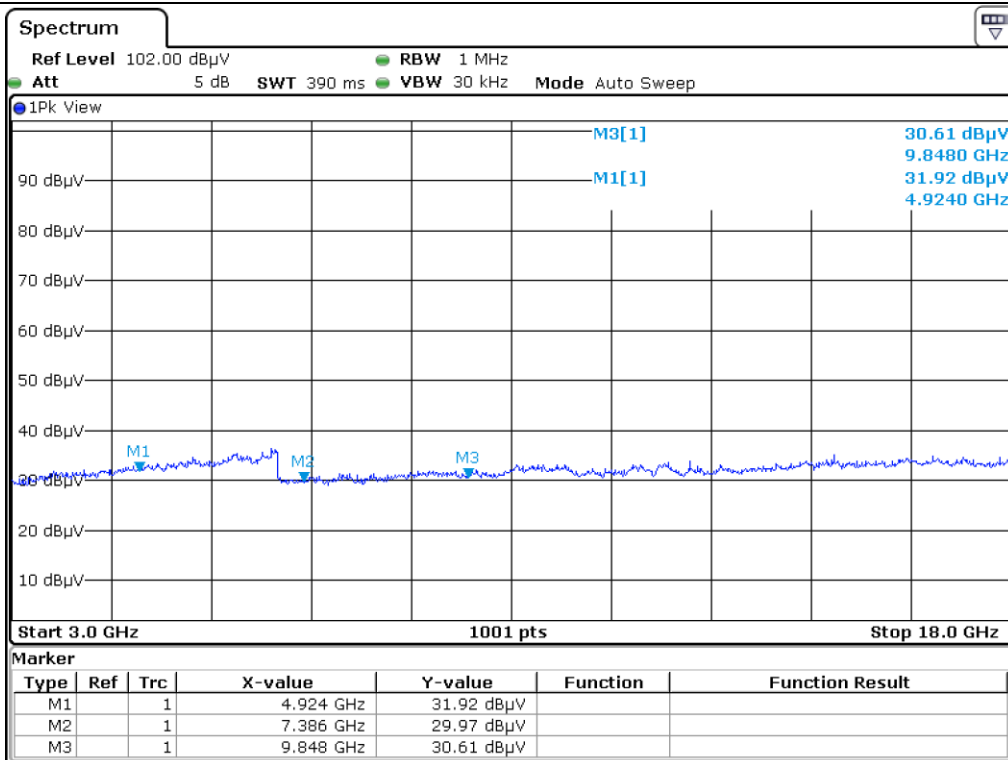

High Channel\_Horizontal\_Peak

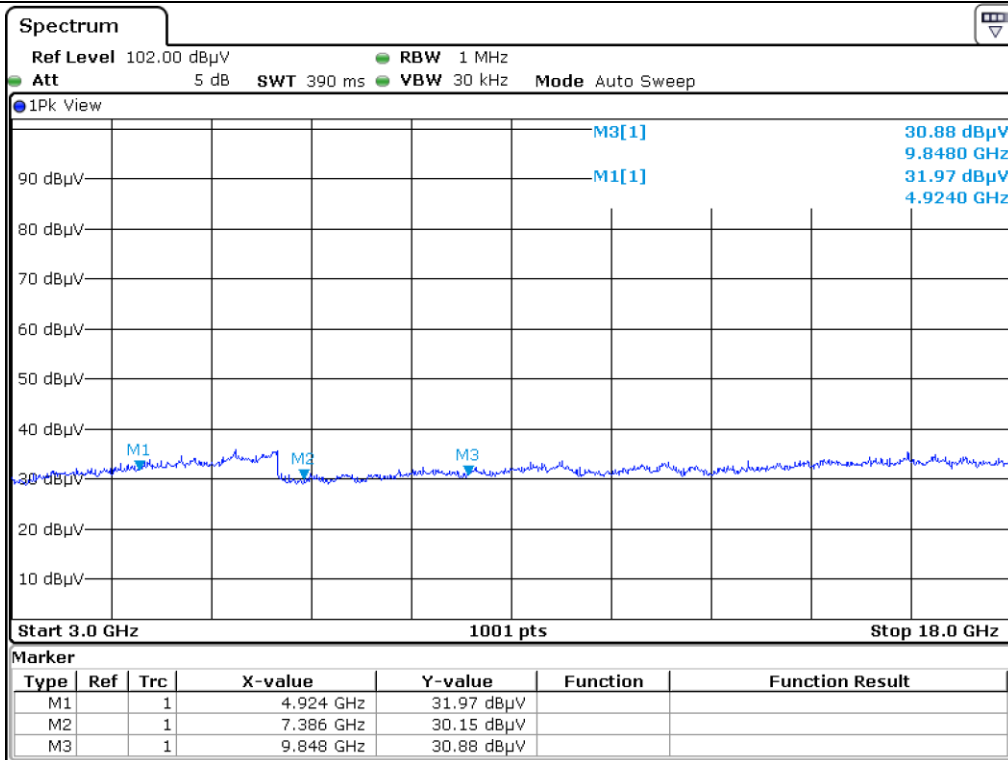

High Channel\_Vertical\_Peak

**5.4.6 Spurious & Harmonic Radiated Emission(802.11 n\_HT20\_MCS 0)**

- . Test Date : September 12, 2018 ~ September 21, 2018
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,  
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band  
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 30 kHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 824.00	32.56	Peak	H	30.01	12.31	35.23	39.65	74.00	34.35
4 824.00	32.49	Peak	V	30.01	12.31	35.23	39.58	74.00	34.42
<b>Test Data for Middle Channel</b>									
4 874.00	32.52	Peak	H	30.15	12.43	35.26	39.84	74.00	34.16
4 874.00	31.71	Peak	V	30.15	12.43	35.26	39.03	74.00	34.97
<b>Test Data for High Channel</b>									
4 924.00	32.52	Peak	H	30.17	12.81	35.29	40.21	74.00	33.79
4 924.00	32.36	Peak	V	30.17	12.81	35.29	40.05	74.00	33.95


Tabulated test data for Restricted Band

Remark 1: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$


Remark 2: maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.(ANSI C63.10-2013)



---

**Tested by: Tae-Ho, Kim / Senior Manager**




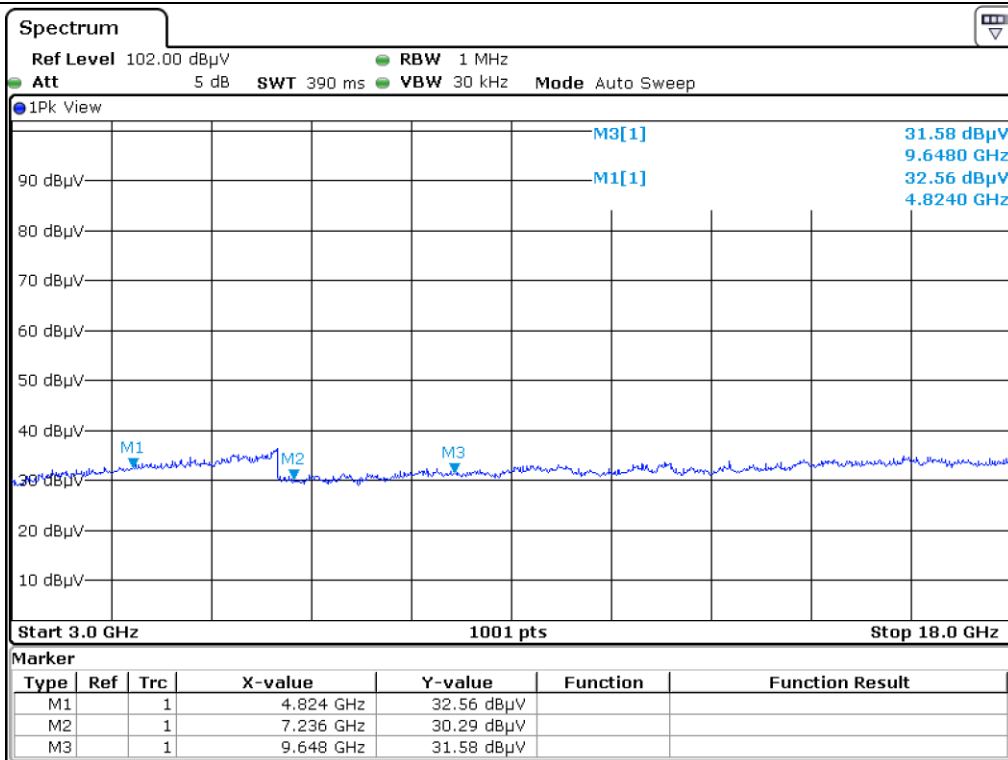


Low Channel\_Horizontal\_Peak

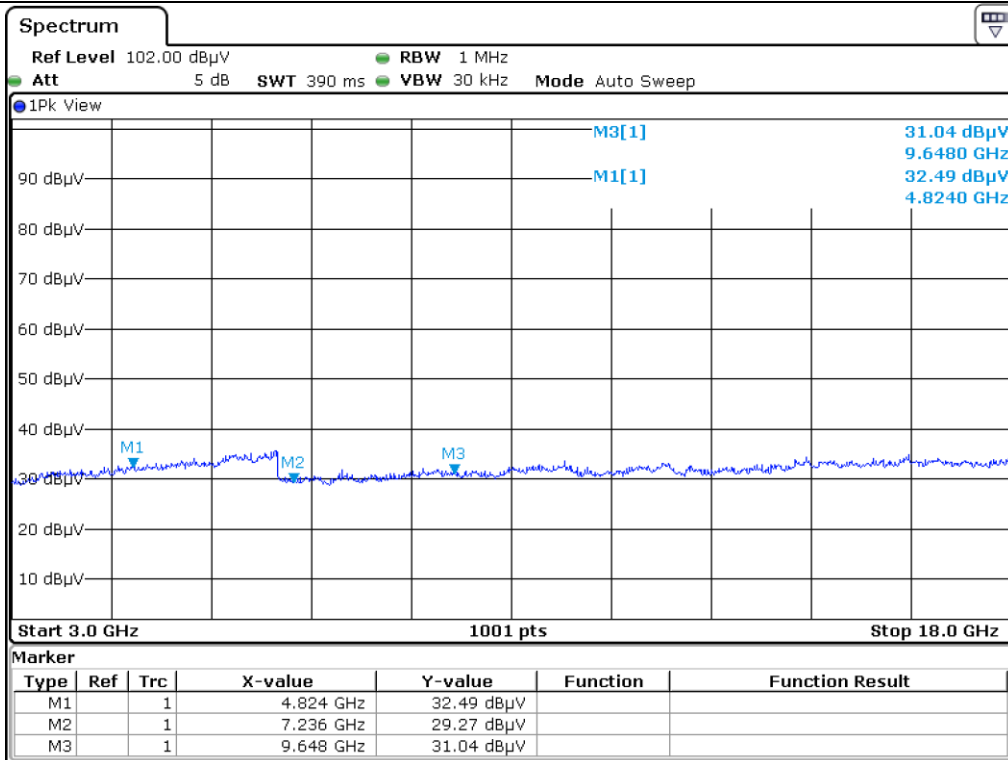


Low Channel\_Vertical\_Peak

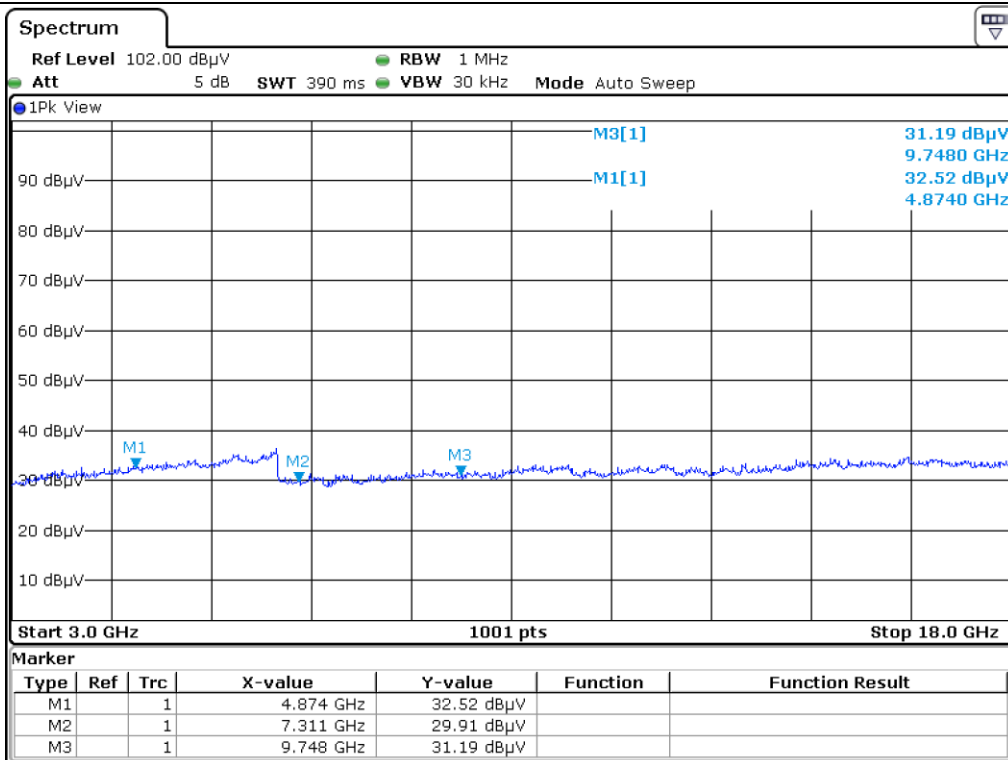


Middle Channel\_Horizontal\_Peak

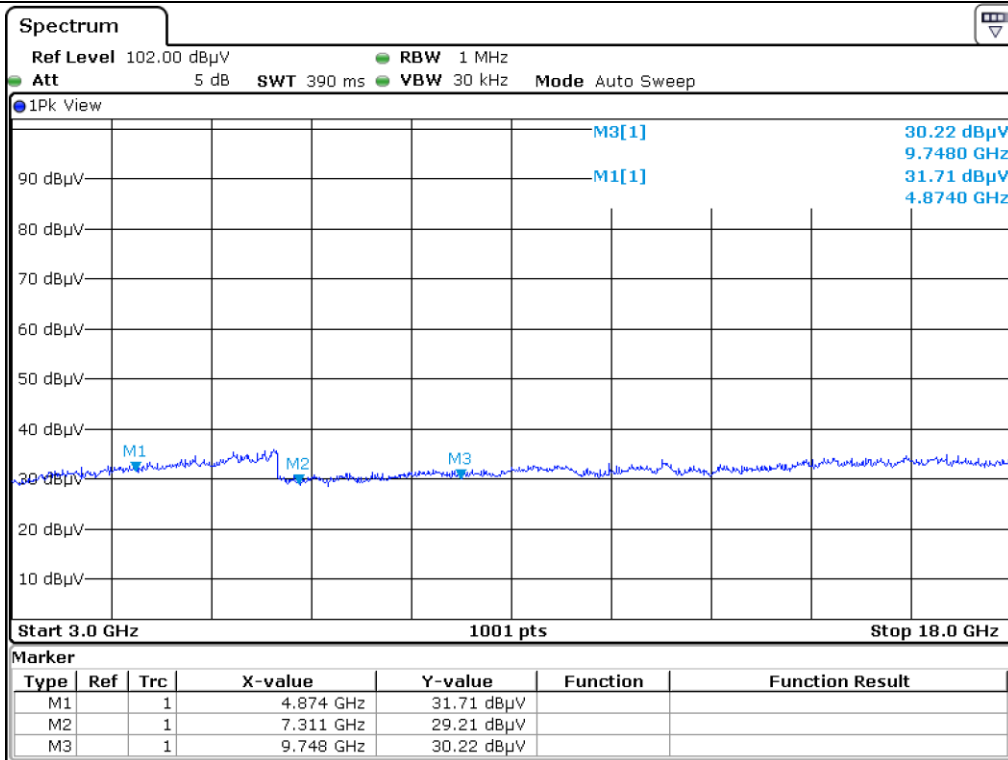

Middle Channel\_Vertical\_Peak

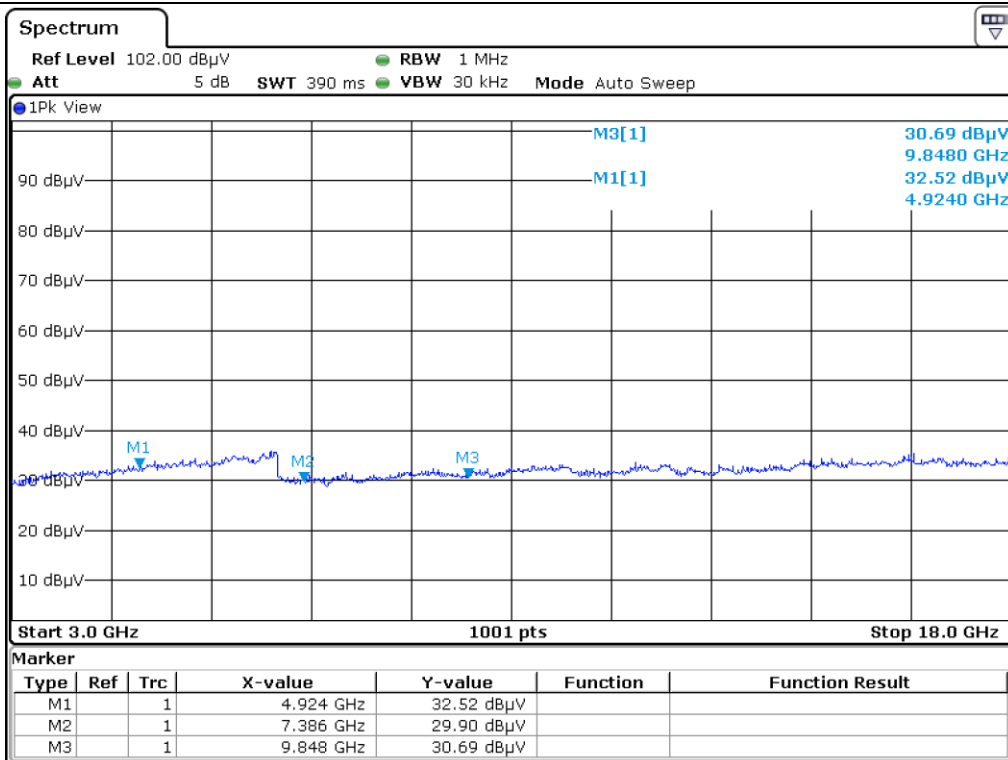

High Channel\_Horizontal\_Peak

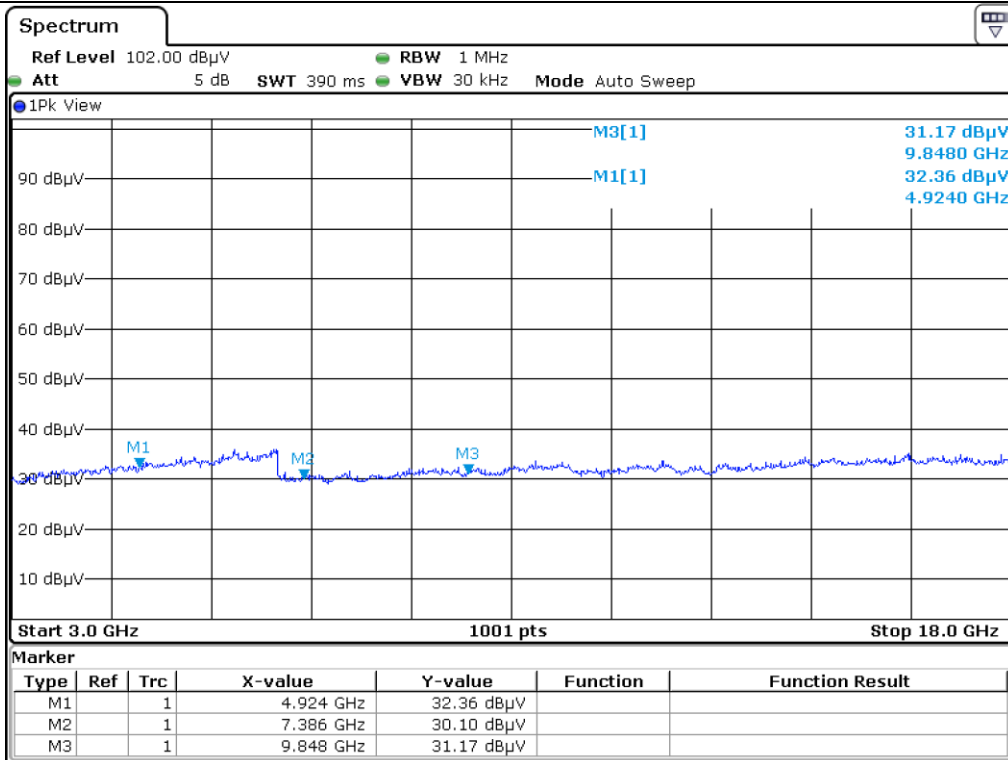

High Channel\_Vertical\_Peak

**5.4.7 Test Data FCC for below 1 000 MHz**

Humidity Level : 43.9 % R.H. Temperature: 24.3 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT EUT : ARTIK-0530 Date: September 12, 2018 ~ September 21, 2018

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)


The frequency spectrum from 9 kHz to 1 000 MHz was investigated.

Frequency [MHz]	Reading [dBuV]	Ant Pol.	Ant Factor [dB]	Cable Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
68.800	46.8	V	10.2	2.0	33.1	25.9	40.0	14.1
141.550	48.2	H	7.9	2.8	32.9	26.0	43.5	17.5
219.150	50.0	V	11.2	3.4	33.1	31.5	46.0	14.5
254.070	43.5	V	12.4	3.7	33.1	26.5	46.0	19.5
311.300	31.4	H	13.4	4.1	33.0	15.9	46.0	30.1
762.343	27.7	V	20.7	6.3	33.3	21.4	46.0	24.6



Tested by: **Tae-Ho, Kim / Senior Manager**

- Result Plot

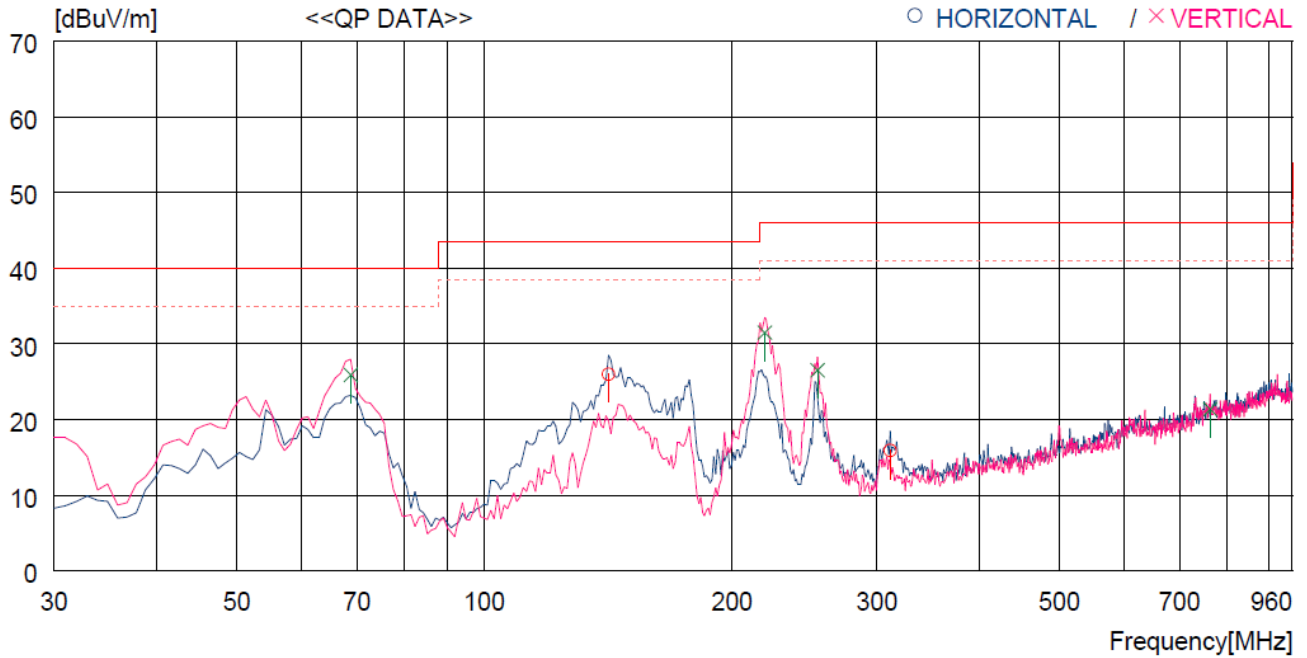

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	141.550	48.2	7.9	2.8	32.9	26.0	43.5	17.5	300	0
2	311.300	31.4	13.4	4.1	33.0	15.9	46.0	30.1	300	0
----- Vertical -----										
3	68.800	46.8	10.2	2.0	33.1	25.9	40.0	14.1	400	181
4	219.150	50.0	11.2	3.4	33.1	31.5	46.0	14.5	400	187
5	254.070	43.5	12.4	3.7	33.1	26.5	46.0	19.5	400	12
6	762.343	27.7	20.7	6.3	33.3	21.4	46.0	24.6	400	2

**5.4.8 Test Data IC for below 1 000 MHz**

Humidity Level : 43.9 % R.H. Temperature: 24.3 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT EUT : ARTIK-0530 Date: September 12, 2018 ~ September 21, 2018

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)


The frequency spectrum from 9 kHz to 1 000 MHz was investigated.

Frequency [MHz]	Reading [dBuV]	Ant Pol.	Ant Factor [dB]	Cable Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
69.770	45.0	V	9.7	2.0	33.1	23.6	40.0	16.4
146.400	47.3	H	8.2	2.8	33.0	25.3	43.5	18.2
218.180	48.0	V	11.3	3.4	32.9	29.8	46.0	16.2
253.100	40.4	V	12.5	3.7	32.9	23.7	46.0	22.3
304.510	29.7	H	13.5	4.0	33.0	14.2	46.0	31.8
829.271	27.1	V	21.2	6.7	32.9	22.1	46.0	23.9



Tested by: **Tae-Ho, Kim / Senior Manager**

- Result Plot

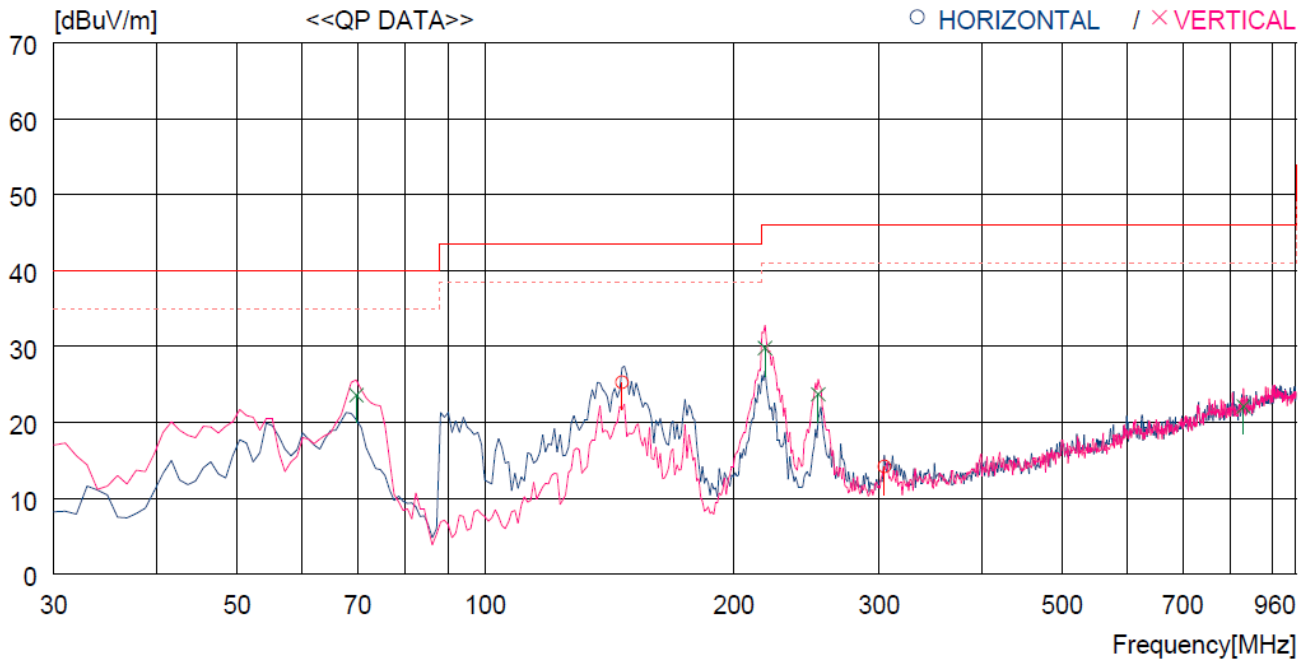

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	146.400	47.3	8.2	2.8	33.0	25.3	43.5	18.2	400	352
2	304.510	29.7	13.5	4.0	33.0	14.2	46.0	31.8	400	135
----- Vertical -----										
3	69.770	45.0	9.7	2.0	33.1	23.6	40.0	16.4	400	167
4	218.180	48.0	11.3	3.4	32.9	29.8	46.0	16.2	400	176
5	253.100	40.4	12.5	3.7	32.9	23.7	46.0	22.3	400	26
6	829.271	27.1	21.2	6.7	32.9	22.1	46.0	23.9	400	26


## 6. Maximum Peak Conducted Output Power

### 6.1 Operating environment

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H

### 6.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT. The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 9.2.3(KDB 558074 D01 DTS Meas Guidance V04). Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

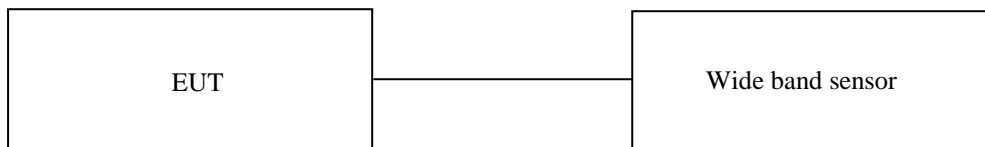

### 6.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - NRP-Z81	Rohde & Schwarz	Wide band Sensor	101975	Mar. 15, 2018 (1Y)

All test equipment used is calibrated on a regular basis.



**6.4 TEST Result(802.11 b\_1 Mbps)**

-. Test Date : September 12, 2018 ~ September 21, 2018

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	14.57	30.00	15.43
MIDDLE	2 437.00	14.50	30.00	15.50
HIGH	2 462.00	14.46	30.00	15.54

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

**6.5 TEST Result(802.11 g\_6 Mbps)**

-. Test Date : September 12, 2018 ~ September 21, 2018

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	14.53	30.00	15.47
MIDDLE	2 437.00	14.47	30.00	15.53
HIGH	2 462.00	14.38	30.00	15.62

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

**6.6 TEST Result(802.11 n\_HT20\_MCS 0)**

-. Test Date : September 12, 2018 ~ September 21, 2018

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	12.69	30.00	17.31
MIDDLE	2 437.00	12.58	30.00	17.42
HIGH	2 462.00	12.53	30.00	17.47

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Tae-Ho, Kim / Senior Manager