

FCC 2G3G REPORT

Certification

Applicant Name:
 SAMSUNG Electronics Co., Ltd.

Date of Issue:
 July 14, 2022

Address:
 129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
 HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2206-FC041

FCC ID: A3LSMA047M

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-A047M/DS
 Additional Model(s): SM-A047M
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §22, §24, §27, §2

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	242KGXW	0.783	28.94
GSM850 EDGE			249KG7W	0.143	21.55
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.066	18.17

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	245KGXW	0.927	29.67
GSM1900 EDGE			249KG7W	0.341	25.33
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M17F9W	0.289	24.61
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M16F9W	0.249	23.97

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2206-FC041

REVIEWED BY

유권우



Report prepared by : Jin Woo Yu
Engineer of Telecommunication Testing Center

Report approved by : Seul Ki Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2206-FC041	July 14, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(CONDUCTED TEST)	16
3.10 WORST CASE(RADIATED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EFFECTIVE RADIATED POWER.....	23
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.3 RADIATED SPURIOUS EMISSIONS	25
8.4 PEAK-TO-AVERAGE RATIO.....	30
8.5 OCCUPIED BANDWIDTH	31
8.6 CONDUCTED SPURIOUS EMISSIONS	32
8.7 BAND EDGE	32
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
9. TEST PLOTS.....	44
10. ANNEX A_ TEST SETUP PHOTO.....	133

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA047M
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §27, §2
EUT Type:	Mobile phone
Model(s):	SM-A047M/DS
Additional Model(s):	SM-A047M
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700)
Date(s) of Tests:	June 01, 2022 ~ June 27, 2022
Serial number:	Radiated: R38T500Q0YX Conducted: R38T500Q1WE

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Where: : P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

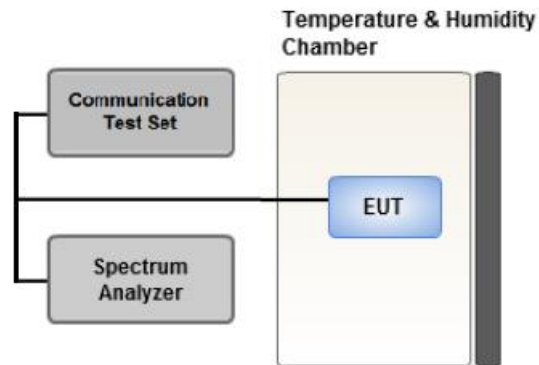

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to 2 \times to 3 \times the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

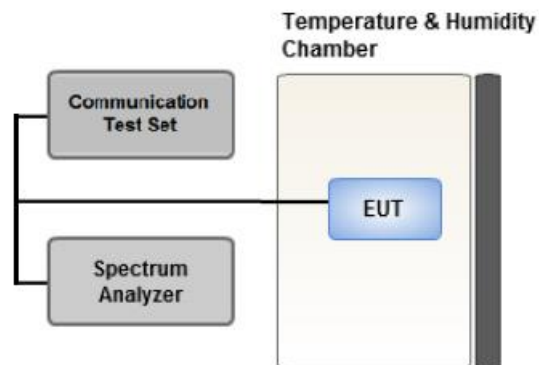

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

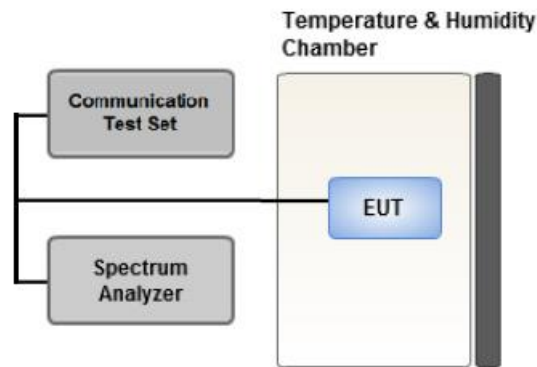

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

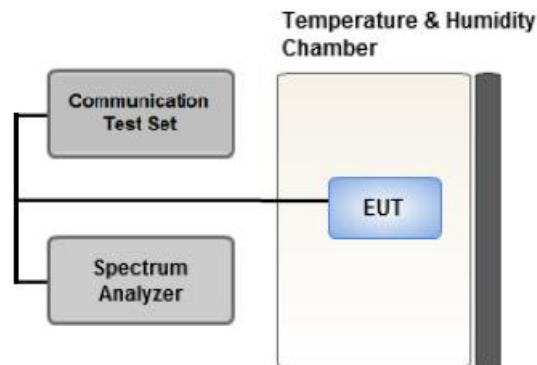

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

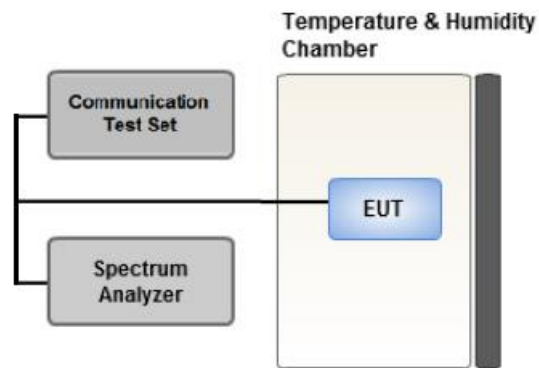

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-A047M/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A047M/DS)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC)	Low, Mid, High

[Test Channel]

	UplinkChannel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-A047M/DS & additional models were tested and the worst case results are reported.
 (Worst case : SM-A047M/DS)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z	Low, Mid, High
			WCDMA B4 : Z	
			WCDMA B5 : Y	
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z	Low, Mid, High
			WCDMA B4 : Z	
			WCDMA B5 : Y	

[Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : Y GSM1900 : Z	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : Y GSM1900 :Z	GSM 850 : High GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : Z GSM1900 : Y	Low, Mid, High

[Test Channel]

	UplinkChannel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/02/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/05/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10 x log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d), §27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	< 2.5 ppm	PASS
	§24.235, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10 x log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$ERP = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$EIRP = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
GSM850	128	824.2	-23.79	39.13	-10.25	1.39	V	< 7.00	0.562	27.50
	190	836.6	-22.97	40.07	-10.19	1.41	V		0.704	28.47
	251	848.8	-22.84	40.50	-10.14	1.42	V		0.783	28.94
EDGE	251	848.8	-30.23	33.11	-10.14	1.42	V		0.143	21.55

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-33.55	29.45	-10.23	1.40	V	< 7.00	0.061	17.82
	4183	836.6	-33.27	29.77	-10.19	1.41	V		0.066	18.17
	4233	846.6	-33.56	29.62	-10.15	1.42	V		0.064	18.05

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-12.61	21.04	10.40	2.11	V	< 2.00	0.857	29.33
	661	1880.0	-12.66	21.42	10.40	2.15	V		0.927	29.67
	810	1909.8	-13.35	20.95	10.40	2.15	V		0.831	29.20
EDGE	661	1880.0	-17.00	17.08	10.40	2.15	V		0.341	25.33

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-19.42	14.23	10.40	2.11	V	< 2.00	0.179	22.52
	9400	1880.0	-18.18	15.90	10.40	2.15	V		0.260	24.15
	9538	1907.6	-17.94	16.36	10.40	2.15	V		0.289	24.61

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-17.74	15.86	10.04	2.05	V	< 1.00	0.242	23.85
	1412	1732.4	-17.83	15.65	10.12	2.05	V		0.236	23.72
	1513	1752.6	-17.68	15.83	10.20	2.06	V		0.249	23.97

8.3 RADIATED SPURIOUS EMISSIONS

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-49.44	9.70	-59.76	1.99	V	-52.05	-13.00
	2 472.60	-48.59	10.46	-53.24	2.47	V	-45.25	-13.00
	3 296.80	-57.24	12.07	-58.72	2.89	V	-49.53	-13.00
	4 121.00	-59.13	12.56	-57.65	3.26	V	-48.35	-13.00
	4 945.20	-58.96	12.70	-53.49	3.59	V	-44.38	-13.00
190 (836.6)	1 673.20	-53.15	9.82	-63.66	2.01	V	-55.85	-13.00
	2 509.80	-48.29	10.70	-52.59	2.50	H	-44.39	-13.00
	3 346.40	-58.79	12.37	-60.45	2.92	V	-51.00	-13.00
	4 183.00	-58.41	12.62	-56.90	3.29	H	-47.57	-13.00
	5 019.60	-58.85	12.56	-53.04	3.60	H	-44.08	-13.00
251 (848.8)	1 697.60	-53.02	10.00	-63.11	2.04	H	-55.15	-13.00
	2 546.40	-44.06	10.70	-47.97	2.52	H	-39.79	-13.00
	3 395.20	-57.99	12.58	-59.74	2.94	V	-50.10	-13.00
	4 244.00	-58.47	12.79	-56.35	3.31	V	-46.87	-13.00
	5 092.80	-58.65	12.26	-51.62	3.66	H	-43.02	-13.00

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3 700.40	-54.29	12.30	-58.88	3.08	H	-49.66	-13.00
	5 550.60	-55.57	13.00	-53.58	3.81	H	-44.39	-13.00
	7 400.80	-57.24	10.80	-46.99	4.44	V	-40.63	-13.00
	9 251.00	-58.22	10.50	-42.00	5.06	H	-36.56	-13.00
	11 101.20	-58.01	11.10	-39.29	5.62	V	-33.81	-13.00
661 (1880.0)	3 760.00	-53.90	12.32	-58.22	3.10	H	-49.00	-13.00
	5 640.00	-54.50	13.10	-52.31	3.85	V	-43.06	-13.00
	7 520.00	-56.56	10.84	-45.71	4.46	V	-39.33	-13.00
	9 400.00	-59.21	10.50	-42.81	5.07	H	-37.38	-13.00
	11 280.00	-58.49	11.24	-39.80	5.70	H	-34.26	-13.00
810 (1909.8)	3 819.60	-54.21	12.40	-58.90	3.14	H	-49.64	-13.00
	5 729.40	-53.88	13.04	-53.05	3.69	H	-43.70	-13.00
	7 639.20	-57.39	11.26	-46.68	4.47	H	-39.89	-13.00
	9 549.00	-59.13	11.00	-43.17	5.15	V	-37.32	-13.00
	11 458.80	-59.31	10.90	-38.25	5.74	H	-33.09	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	<u>Ant. Gain</u> <u>(dBi)</u>	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	<u>Result</u> <u>(dBm)</u>	<u>Limit</u>
4 132 (826.4)	1 652.80	-51.98	9.70	-62.30	1.99	V	-54.59	-13.00
	2 479.20	-52.10	10.54	-56.88	2.48	H	-48.82	-13.00
	3 305.60	-56.79	12.13	-58.21	2.90	V	-48.97	-13.00
	4 132.00	-58.08	12.54	-56.69	3.27	V	-47.42	-13.00
	4 958.40	-58.37	12.68	-53.09	3.60	V	-44.01	-13.00
4 183 (836.6)	1 673.20	-50.40	9.82	-60.91	2.01	V	-53.10	-13.00
	2 509.80	-53.43	10.70	-57.73	2.50	V	-49.53	-13.00
	3 346.40	-57.65	12.37	-59.31	2.92	V	-49.86	-13.00
	4 183.00	-57.58	3.29	-46.74	3.29	V	-46.74	-13.00
	5 019.60	-58.68	12.56	-52.87	3.60	V	-43.91	-13.00
4 233 (846.6)	1 693.20	-51.59	9.94	-62.00	2.03	H	-54.09	-13.00
	2 539.80	-54.81	10.70	-58.89	2.51	H	-50.70	-13.00
	3 386.40	-57.43	12.54	-59.10	2.94	H	-49.49	-13.00
	4 233.00	-58.40	12.76	-56.29	3.31	V	-46.84	-13.00
	5 079.60	-57.88	12.32	-51.39	3.66	H	-42.73	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-54.17	12.30	-58.04	3.80	V	-49.54	-13.00
	5 557.20	-55.47	13.20	-53.68	3.82	V	-44.30	-13.00
	7 409.60	-55.59	10.80	-45.10	4.45	V	-38.75	-13.00
	9 262.00	-57.54	10.48	-41.39	5.05	H	-35.96	-13.00
	11 114.40	-57.27	11.13	-38.67	5.63	V	-33.17	-13.00
9400 (1880.0)	3 760.00	-54.02	12.32	-58.34	3.10	H	-49.12	-13.00
	5 640.00	-55.59	13.10	-53.40	3.85	V	-44.15	-13.00
	7 520.00	-56.32	10.84	-45.47	4.46	V	-39.09	-13.00
	9 400.00	-57.50	10.50	-41.10	5.07	H	-35.67	-13.00
	11 280.00	-57.59	11.24	-38.90	5.70	V	-33.36	-13.00
9538 (1907.6)	3 815.20	-53.13	12.40	-57.90	3.14	V	-48.64	-13.00
	5 722.80	-55.99	13.06	-52.96	3.88	H	-43.78	-13.00
	7 630.40	-56.52	11.22	-45.68	4.48	V	-38.94	-13.00
	9 538.00	-56.91	10.96	-41.15	5.12	V	-35.31	-13.00
	11 445.60	-57.92	11.19	-37.43	5.73	H	-31.97	-13.00

▣ MODULATION SIGNAL: WCDMA1700

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-53.37	12.55	-60.05	2.95	V	-50.45	-13.00
	5 137.20	-55.67	12.28	-52.82	3.66	V	-44.20	-13.00
	6 849.60	-55.01	12.00	-48.08	4.25	V	-40.33	-13.00
	8 562.00	-56.68	11.48	-43.94	4.81	V	-37.27	-13.00
	10 274.40	-56.49	11.50	-39.71	5.41	V	-33.61	-13.00
1412 (1732.4)	3 464.80	-54.17	12.47	-60.51	2.97	V	-51.01	-13.00
	5 197.20	-55.30	12.50	-53.85	3.70	H	-45.05	-13.00
	6 929.60	-53.56	11.78	-45.76	4.28	V	-38.26	-13.00
	8 662.00	-56.71	11.16	-43.23	4.85	H	-36.92	-13.00
	10 394.40	-57.48	11.40	-41.08	5.40	H	-35.07	-13.00
1513 (1752.6)	3 505.20	-53.30	12.40	-59.46	2.98	H	-50.04	-13.00
	5 257.80	-54.28	12.84	-53.34	3.71	V	-44.21	-13.00
	7 010.40	-55.87	11.34	-47.39	4.32	V	-40.37	-13.00
	8 763.00	-57.36	10.90	-42.92	4.87	V	-36.89	-13.00
	10 515.60	-57.87	11.20	-40.18	5.44	H	-34.42	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail		
				T _{XTotal} (ms)	T _{XOn} (ms)	Factor (dB)					
GSM1900	661	30.934	21.10	4.6160	0.5475	9.26	0.58	13	Pass		
GSM1900 EDGE	661	29.092	16.01	4.6160	0.5475	9.26	3.82				
GSM850	190	CCDF Procedure					3.05			13	Pass
GSM850 EDGE	190						5.80				
WCDMA850	4408						2.95				
WCDMA1900	9400						2.88				
WCDMA1700	1732.4						3.04				

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 62 ~ 72.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \times \log (1/X)$, $X = T_{XOn} / T_{XTotal}$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	240.69
	190	836.60	242.39
	251	848.80	236.78
GSM850 EDGE	128	824.20	249.32
	190	836.60	244.42
	251	848.80	246.46
GSM1900	512	1,850.20	242.54
	661	1,880.00	245.08
	810	1,909.80	242.06
GSM1900 EDGE	512	1,850.20	248.69
	661	1,880.00	245.32
	810	1,909.80	244.56
WCDMA850	4132	826.40	4.1607
	4183	836.60	4.1430
	4233	846.60	4.1388
WCDMA1900	9262	1852.40	4.1656
	9400	1880.00	4.1503
	9538	1907.60	4.1576
WCDMA1700	1712.4	1712.40	4.1469
	1732.4	1732.40	4.1561
	1752.6	1752.60	4.1432

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 61.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	3.1745	27.976	-57.284	-29.308	-13.00
	190	3.7154	27.976	-57.190	-29.214	
	251	3.7194	27.976	-58.227	-30.251	
GSM1900	512	19.22298	29.489	-52.834	-23.345	
	661	19.26648	29.489	-52.565	-23.076	
	810	18.82872	29.489	-52.931	-23.442	
WCDMA850	4132	2.4766	27.976	-76.070	-48.094	
	4183	2.5130	27.976	-76.120	-48.144	
	4233	2.5429	27.976	-75.972	-47.996	
WCDMA1900	9262	18.8870	29.489	-72.567	-43.078	
	9400	18.8945	29.489	-72.014	-42.525	
	9538	18.9270	29.489	-72.476	-42.987	
WCDMA1700	1712.4	18.90497	29.489	-72.375	-42.886	
	1732.4	18.84822	29.489	-72.392	-42.903	
	1752.6	18.92697	29.489	-72.461	-42.972	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 109 ~ 132.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 73 ~ 108.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	836 599 987	0.0	0.000 000	0.0000
100 %		-30	836 599 975	-12.9	-0.000 002	-0.0154
100 %		-20	836 599 975	-12.7	-0.000 002	-0.0152
100 %		-10	836 599 974	-13.5	-0.000 002	-0.0162
100 %		0	836 599 974	-13.3	-0.000 002	-0.0159
100 %		+10	836 599 973	-14.3	-0.000 002	-0.0171
100 %		+30	836 599 974	-13.6	-0.000 002	-0.0163
100 %		+40	836 599 974	-13.7	-0.000 002	-0.0164
100 %		+50	836 599 974	-13.7	-0.000 002	-0.0164
Batt. Endpoint		2.750	+20	836 599 973	-14.1	-0.000 002

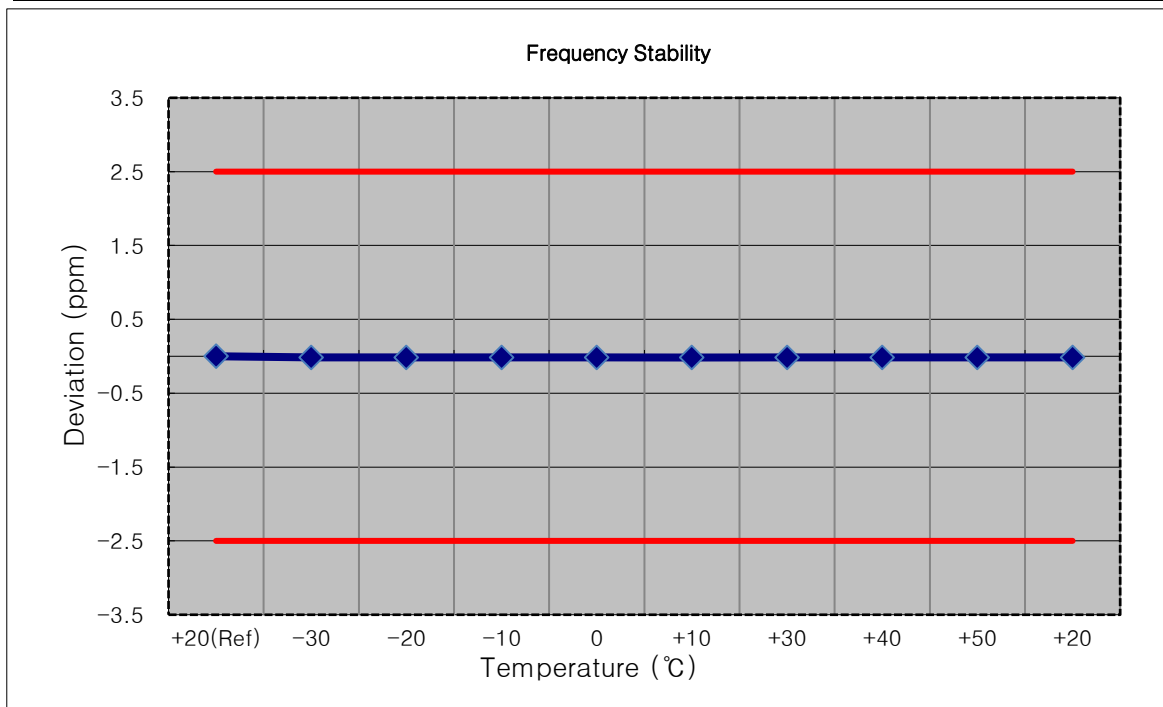


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1850,200,000 Hz
- ▣ CHANNEL: 512
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1850 200 008	0.0	0.000 000	0.0000
100 %		-30	1850 199 992	-15.9	-0.000 001	-0.0086
100 %		-20	1850 199 989	-18.8	-0.000 001	-0.0101
100 %		-10	1850 199 992	-15.9	-0.000 001	-0.0086
100 %		0	1850 199 991	-17.0	-0.000 001	-0.0092
100 %		+10	1850 199 992	-16.1	-0.000 001	-0.0087
100 %		+30	1850 199 991	-16.7	-0.000 001	-0.0090
100 %		+40	1850 199 992	-15.8	-0.000 001	-0.0085
100 %		+50	1850 199 993	-15.2	-0.000 001	-0.0082
Batt. Endpoint	2.750	+20	1850 199 992	-15.6	-0.000 001	-0.0084

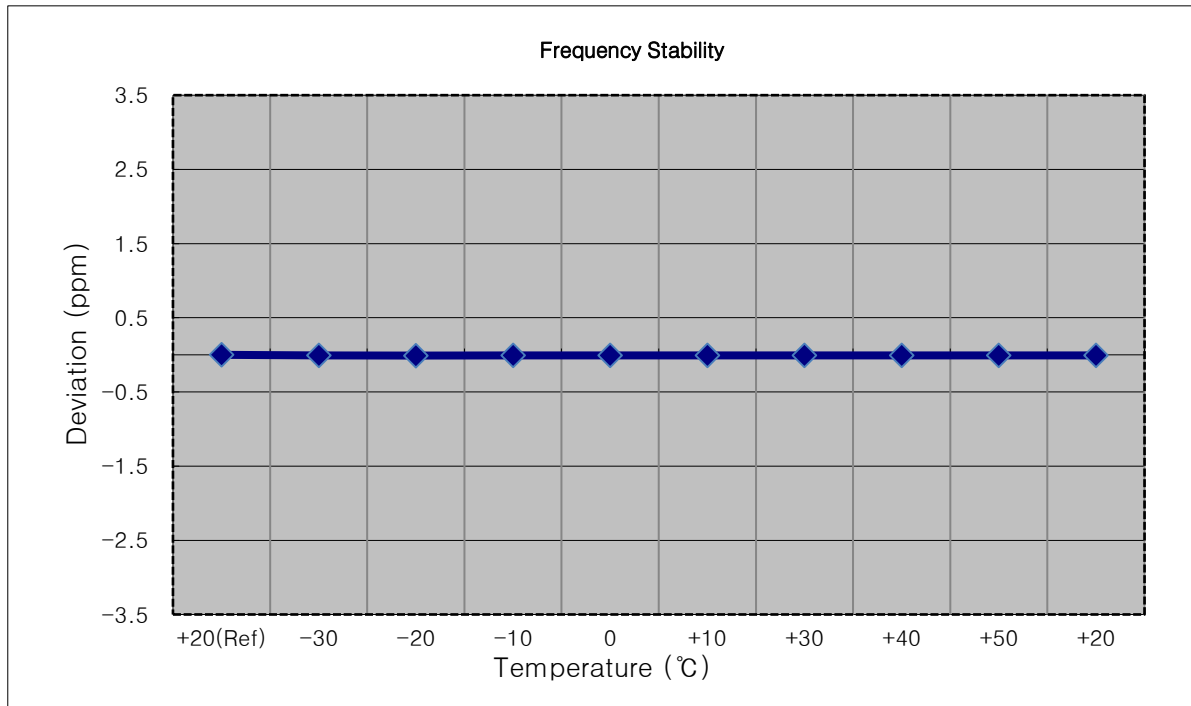


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1879 999 973	0.0	0.000 000	0.000
100 %		-30	1879 999 947	-26.6	-0.000 001	-0.014
100 %		-20	1879 999 947	-26.9	-0.000 001	-0.014
100 %		-10	1879 999 948	-25.6	-0.000 001	-0.014
100 %		0	1879 999 947	-26.5	-0.000 001	-0.014
100 %		+10	1879 999 947	-26.2	-0.000 001	-0.014
100 %		+30	1879 999 947	-26.9	-0.000 001	-0.014
100 %		+40	1879 999 947	-26.7	-0.000 001	-0.014
100 %		+50	1879 999 946	-27.2	-0.000 001	-0.014
Batt. Endpoint	2.750	+20	1879 999 945	-28.1	-0.000 001	-0.015

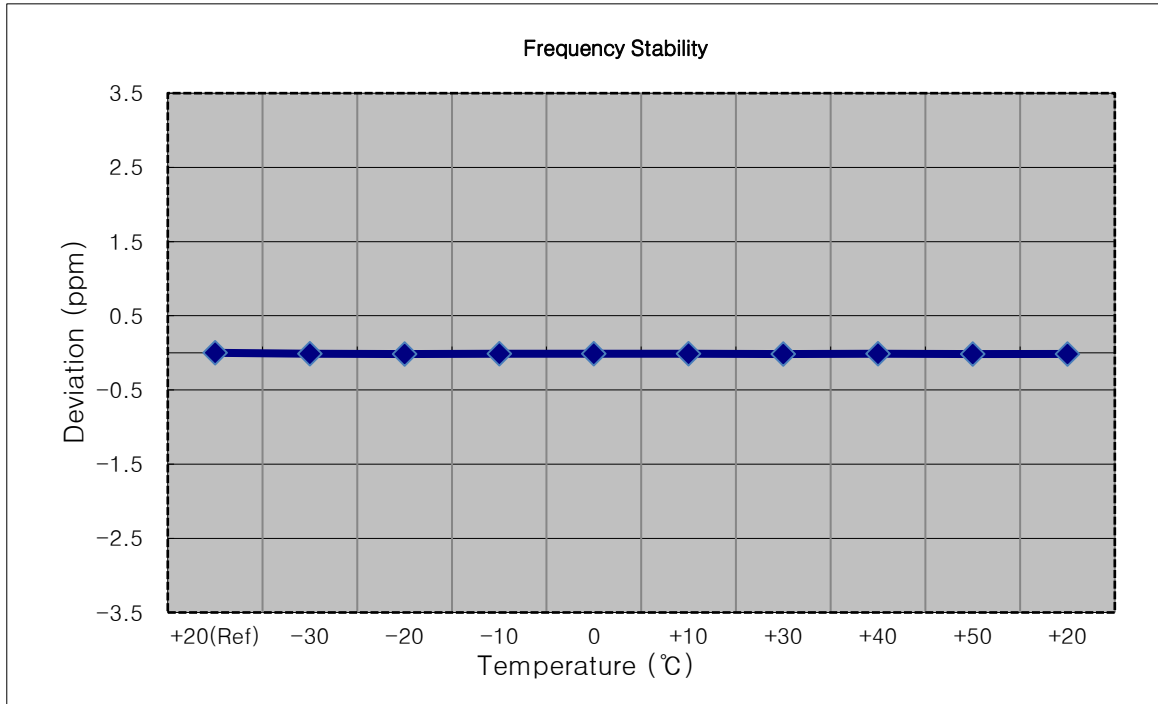


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1909 800 011	0.0	0.000 000	0.000
100 %		-30	1909 800 023	11.9	0.000 001	0.006
100 %		-20	1909 800 022	10.9	0.000 001	0.006
100 %		-10	1909 800 023	11.4	0.000 001	0.006
100 %		0	1909 800 023	11.7	0.000 001	0.006
100 %		+10	1909 799 998	-13.2	-0.000 001	-0.007
100 %		+30	1909 799 997	-14.0	-0.000 001	-0.007
100 %		+40	1909 799 996	-15.1	-0.000 001	-0.008
100 %		+50	1909 799 998	-13.6	-0.000 001	-0.007
Batt. Endpoint		2.750	+20	1909 799 996	-15.4	-0.000 001

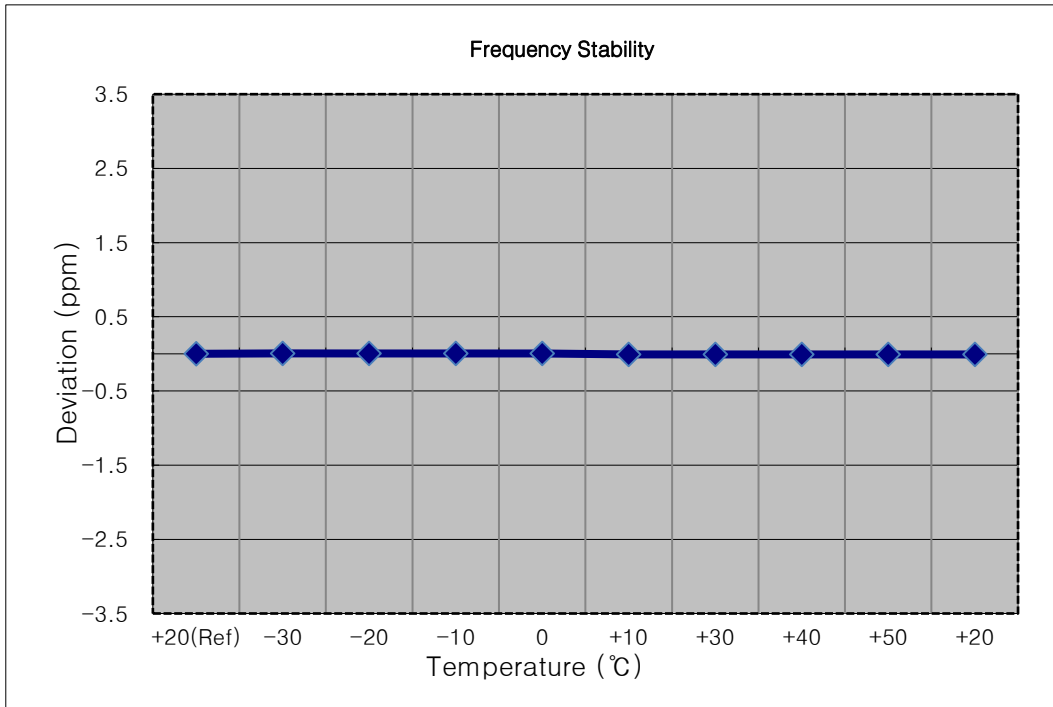


- ▣ Mode: WCDMA850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	836 599 999	0.0	0.000 000	0.0000
100 %		-30	836 599 997	-1.6	0.000 000	-0.0019
100 %		-20	836 599 998	-1.2	0.000 000	-0.0014
100 %		-10	836 599 998	-1.0	0.000 000	-0.0012
100 %		0	836 600 000	1.0	0.000 000	0.0012
100 %		+10	836 599 998	-0.9	0.000 000	-0.0011
100 %		+30	836 600 000	1.1	0.000 000	0.0013
100 %		+40	836 599 998	-1.1	0.000 000	-0.0013
100 %		+50	836 599 997	-2.1	0.000 000	-0.0026
Batt. Endpoint		2.750	+20	836 600 000	1.2	0.000 000

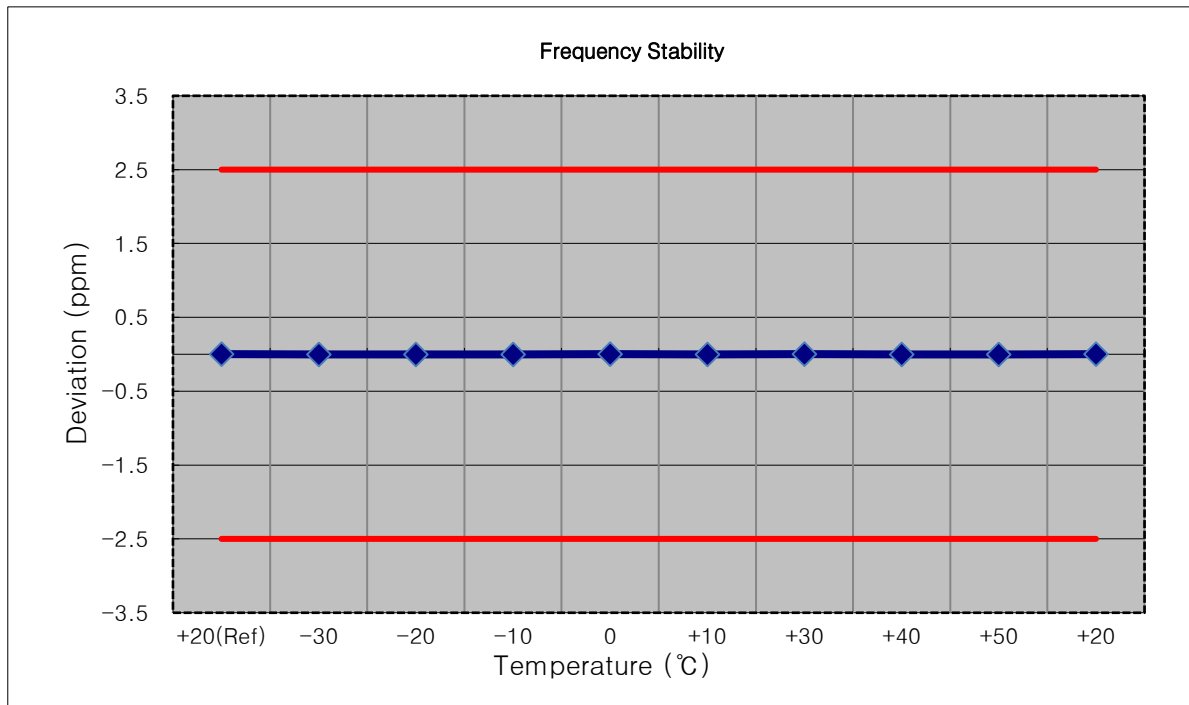


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,852,400,000 Hz
- ▣ CHANNEL: 9262
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1852 400 002	0.0	0.000 000	0.0000
100 %		-30	1852 399 999	-2.5	0.000 000	-0.0014
100 %		-20	1852 400 004	2.1	0.000 000	0.0012
100 %		-10	1852 400 000	-1.9	0.000 000	-0.0010
100 %		0	1852 400 003	1.2	0.000 000	0.0006
100 %		+10	1852 400 000	-1.9	0.000 000	-0.0010
100 %		+30	1852 399 999	-2.2	0.000 000	-0.0012
100 %		+40	1852 400 000	-1.1	0.000 000	-0.0006
100 %		+50	1852 400 003	1.6	0.000 000	0.0008
Batt. Endpoint	2.750	+20	1852 400 004	2.3	0.000 000	0.0013

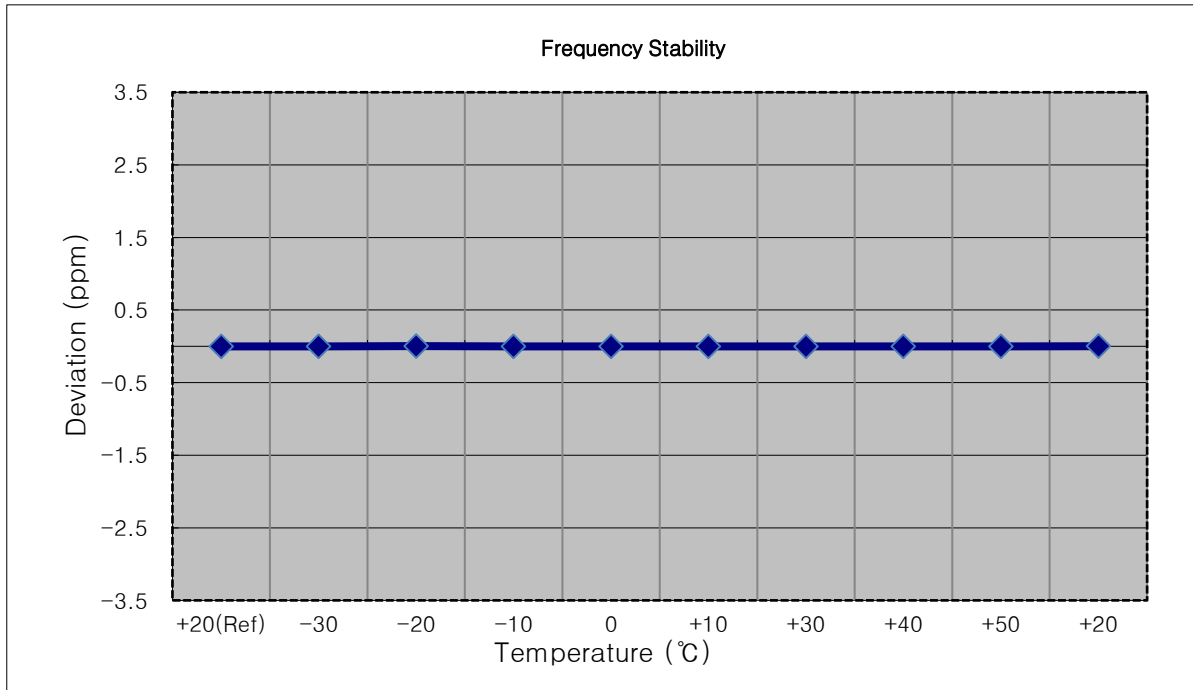


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 002	0.0	0.000 000	0.0000
100 %		-30	1880 000 004	2.4	0.000 000	0.0013
100 %		-20	1879 999 999	-2.3	0.000 000	-0.0012
100 %		-10	1879 999 999	-2.6	0.000 000	-0.0014
100 %		0	1880 000 003	1.7	0.000 000	0.0009
100 %		+10	1879 999 999	-2.4	0.000 000	-0.0013
100 %		+30	1880 000 000	-1.9	0.000 000	-0.0010
100 %		+40	1880 000 004	2.1	0.000 000	0.0011
100 %		+50	1880 000 000	-1.7	0.000 000	-0.0009
Batt. Endpoint		2.750	+20	1880 000 003	1.1	0.000 000

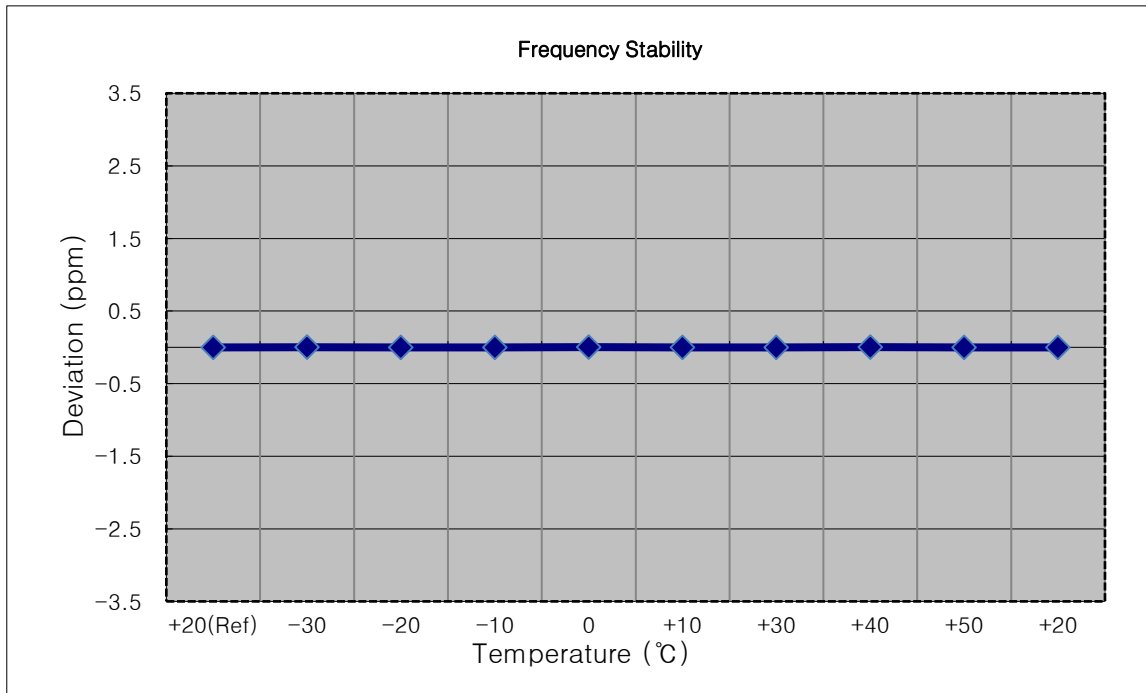


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1907 599 998	0.0	0.000 000	0.0000
100 %		-30	1907 599 996	-1.5	0.000 000	-0.0008
100 %		-20	1907 599 997	-1.2	0.000 000	-0.0007
100 %		-10	1907 600 000	1.8	0.000 000	0.0010
100 %		0	1907 599 996	-1.8	0.000 000	-0.0009
100 %		+10	1907 599 995	-2.6	0.000 000	-0.0014
100 %		+30	1907 599 996	-1.8	0.000 000	-0.0009
100 %		+40	1907 599 999	1.2	0.000 000	0.0006
100 %		+50	1907 600 000	2.2	0.000 000	0.0012
Batt. Endpoint		2.750	+20	1907 600 000	1.8	0.000 000

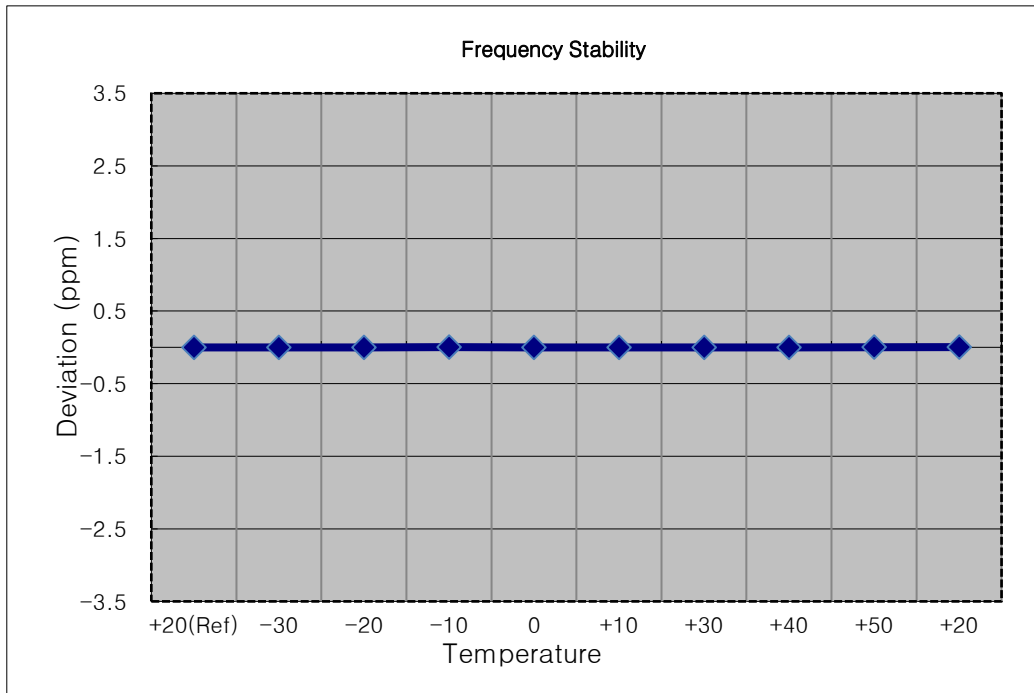


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,712,400,000 Hz
- ▣ CHANNEL: 1312
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1712 400 002	0.0	0.000 000	0.0000
100 %		-30	1712 400 000	-2.0	0.000 000	-0.0012
100 %		-20	1712 400 003	1.1	0.000 000	0.0007
100 %		-10	1712 399 999	-3.1	0.000 000	-0.0018
100 %		0	1712 400 000	-1.5	0.000 000	-0.0009
100 %		+10	1712 400 000	-1.8	0.000 000	-0.0011
100 %		+30	1712 400 004	1.8	0.000 000	0.0010
100 %		+40	1712 400 000	-1.4	0.000 000	-0.0008
100 %		+50	1712 400 000	-1.4	0.000 000	-0.0008
Batt. Endpoint		2.750	+20	1712 400 000	-1.9	0.000 000

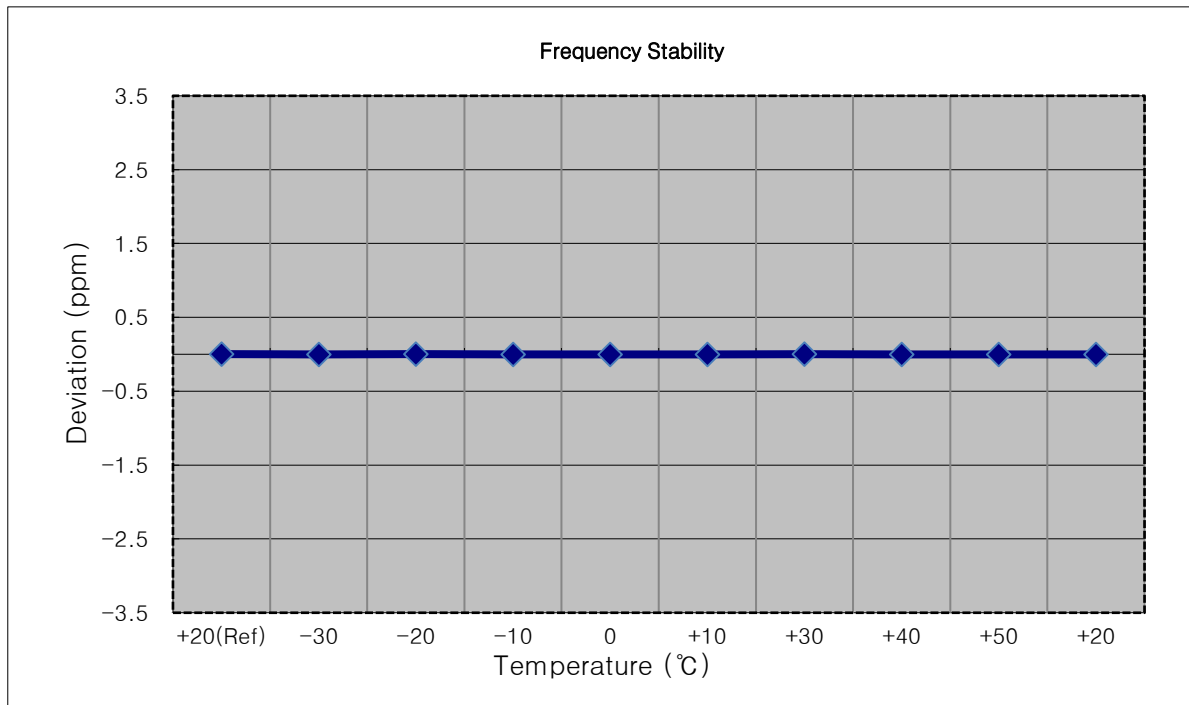


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,732,400,000 Hz
- ▣ CHANNEL: 1412
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1732 400 001	0.0	0.000 000	0.0000
100 %		-30	1732 399 999	-1.9	0.000 000	-0.0011
100 %		-20	1732 400 002	1.3	0.000 000	0.0008
100 %		-10	1732 400 003	1.9	0.000 000	0.0011
100 %		0	1732 399 998	-2.8	0.000 000	-0.0016
100 %		+10	1732 399 999	-1.7	0.000 000	-0.0010
100 %		+30	1732 399 999	-2.5	0.000 000	-0.0015
100 %		+40	1732 399 999	-2.2	0.000 000	-0.0013
100 %		+50	1732 400 000	-1.6	0.000 000	-0.0009
Batt. Endpoint	2.750	+20	1732 399 999	-1.9	0.000 000	-0.0011

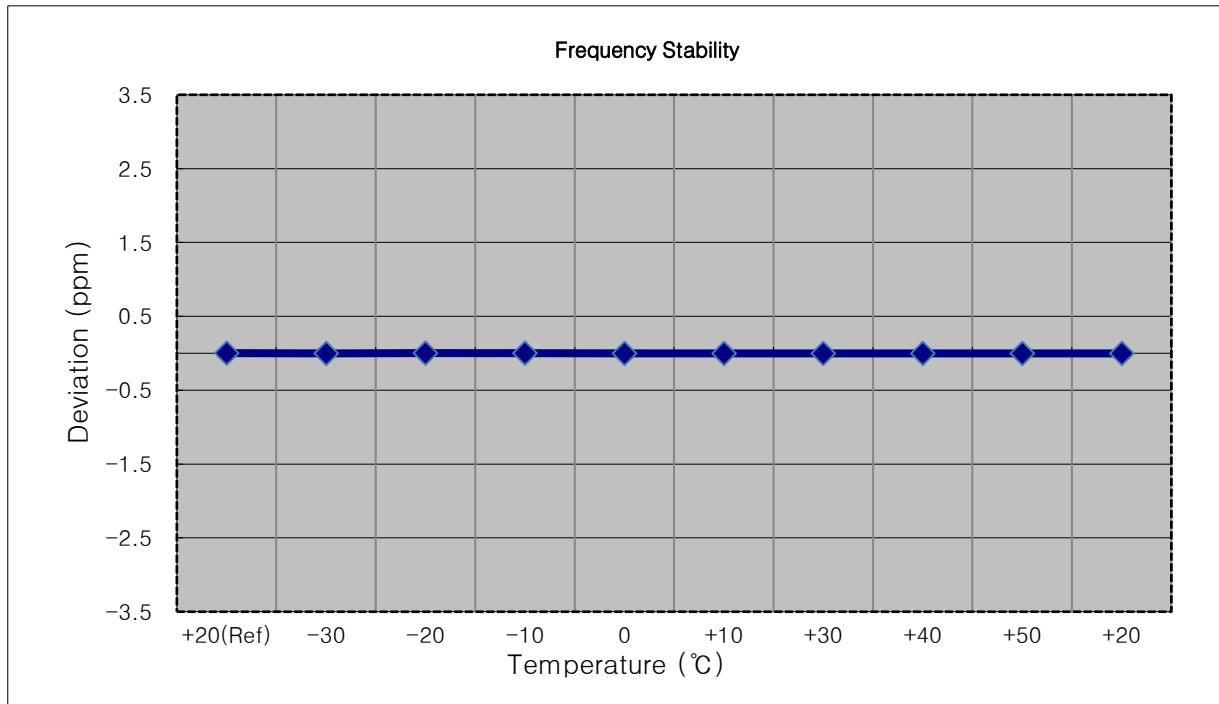


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1752 599 997	0.0	0.000 000	0.0000
100 %		-30	1752 599 995	-1.6	0.000 000	-0.0009
100 %		-20	1752 599 995	-1.5	0.000 000	-0.0008
100 %		-10	1752 599 995	-1.7	0.000 000	-0.0010
100 %		0	1752 599 995	-1.5	0.000 000	-0.0008
100 %		+10	1752 599 995	-1.5	0.000 000	-0.0008
100 %		+30	1752 599 995	-1.9	0.000 000	-0.0011
100 %		+40	1752 599 996	-1.1	0.000 000	-0.0006
100 %		+50	1752 599 994	-2.5	0.000 000	-0.0014
Batt. Endpoint		2.750	+20	1752 599 995	-1.5	0.000 000

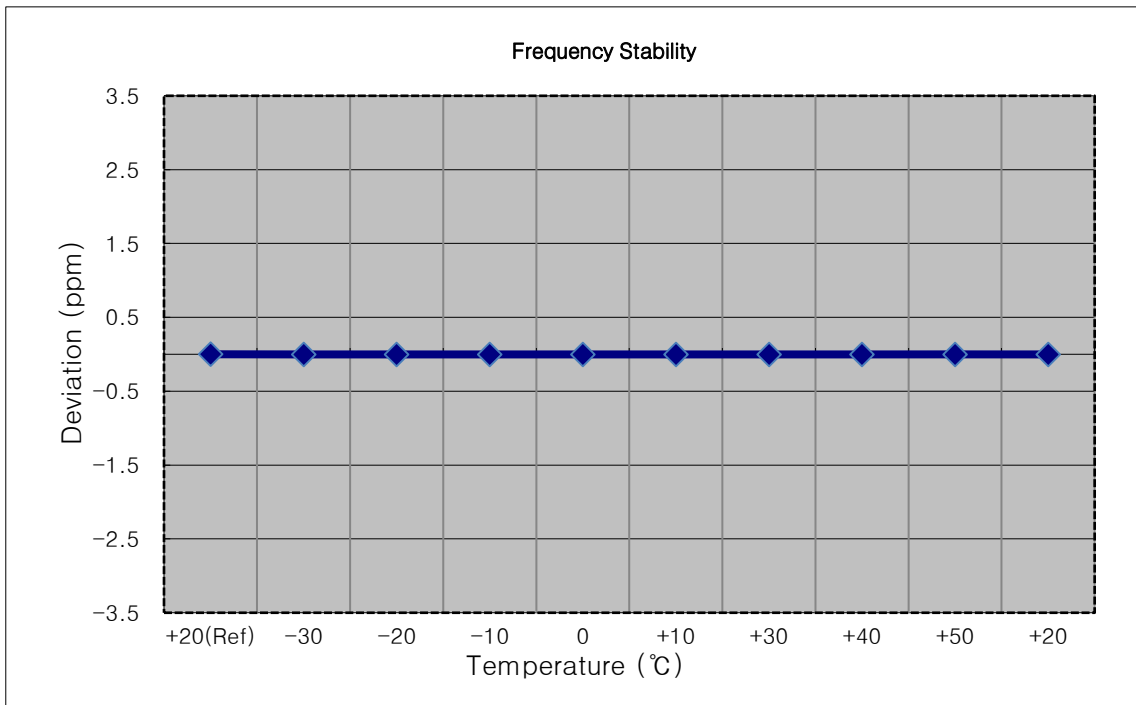


9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

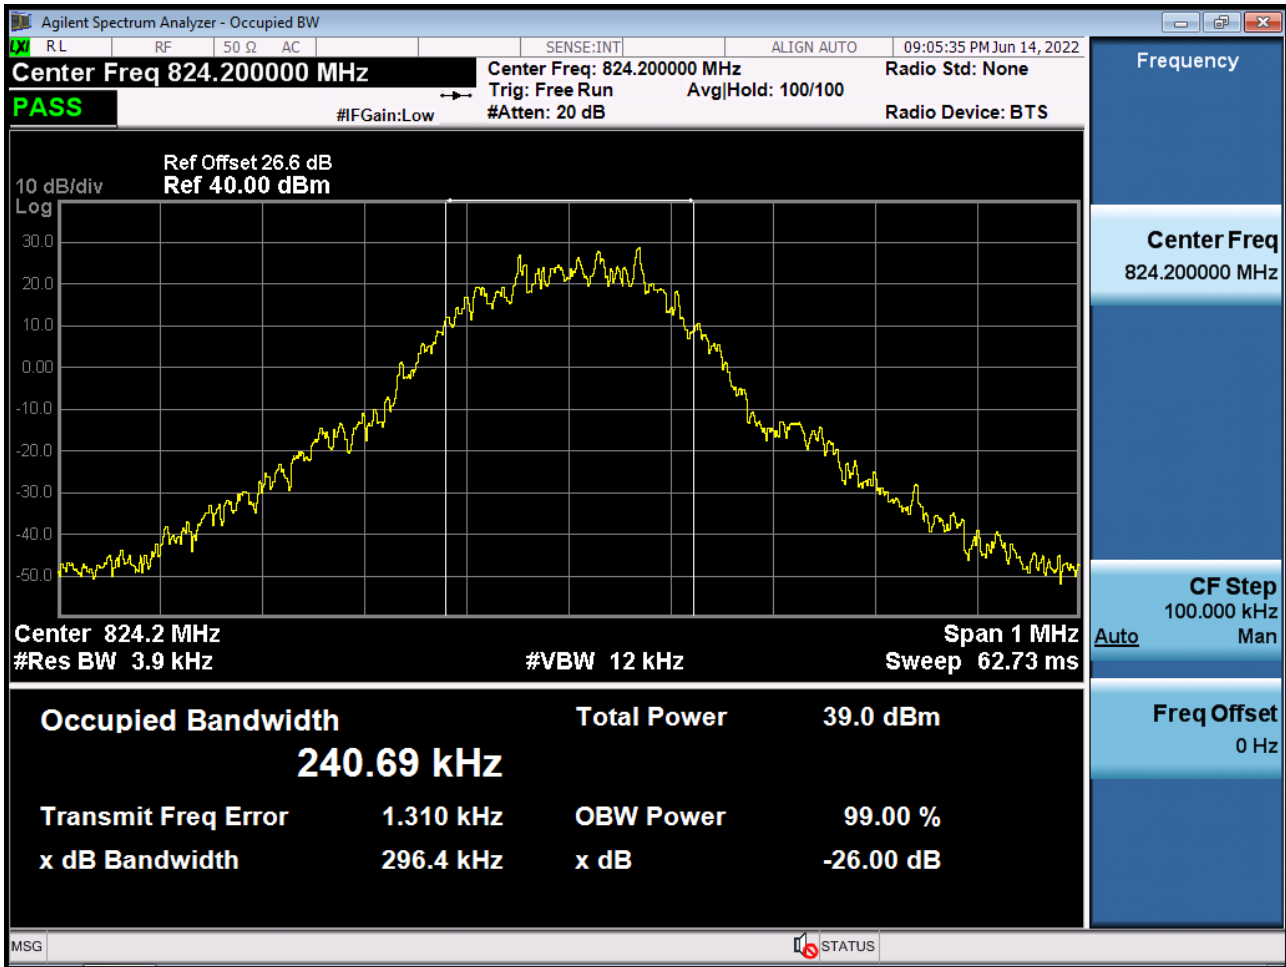


■ GSM850 MODE (190 CH.) Occupied Bandwidth

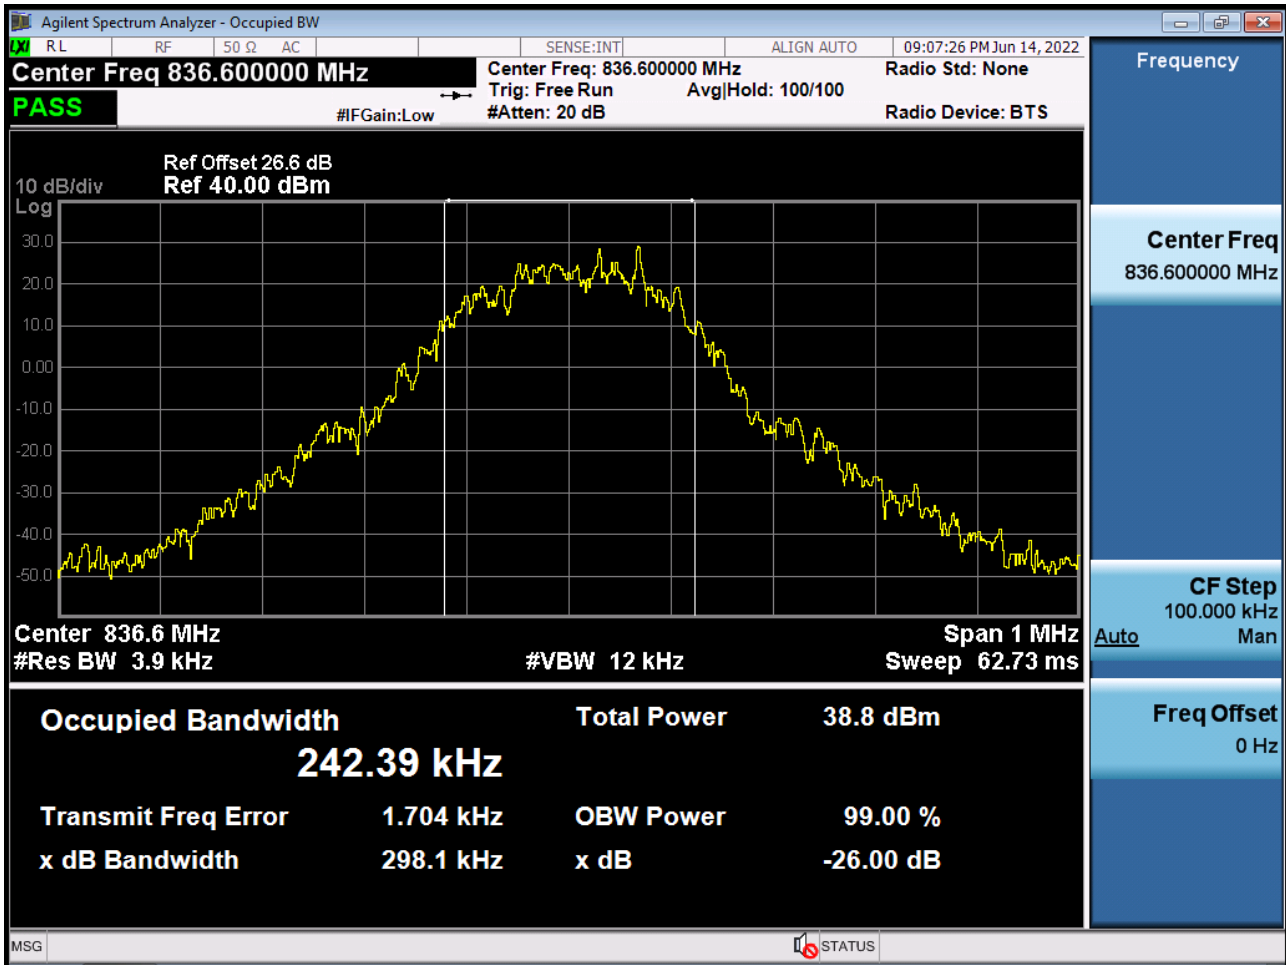


■ GSM850 MODE (251 CH.) Occupied Bandwidth

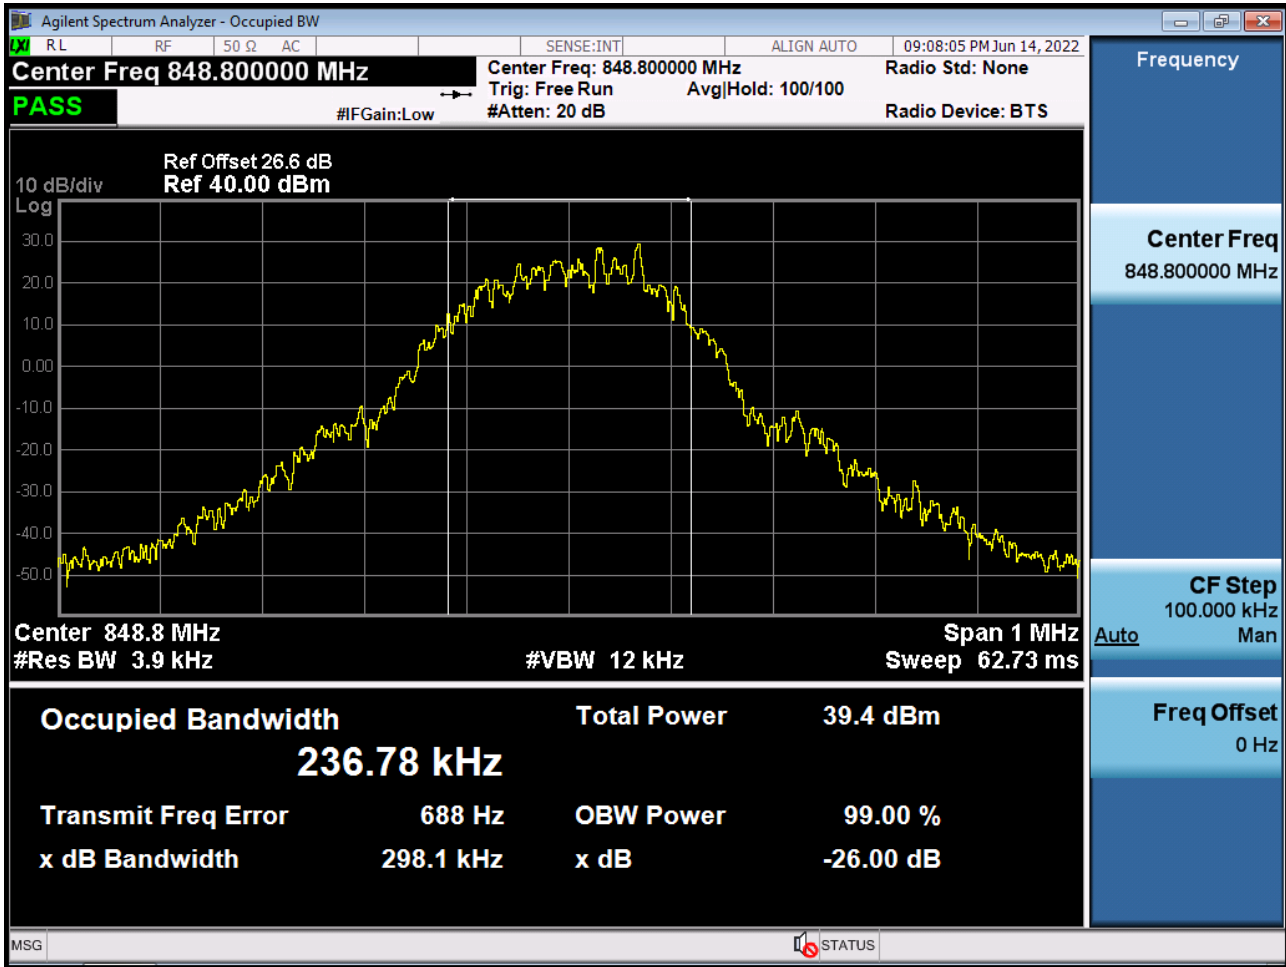


■ GSM850 EDGE (128 CH.) Occupied Bandwidth

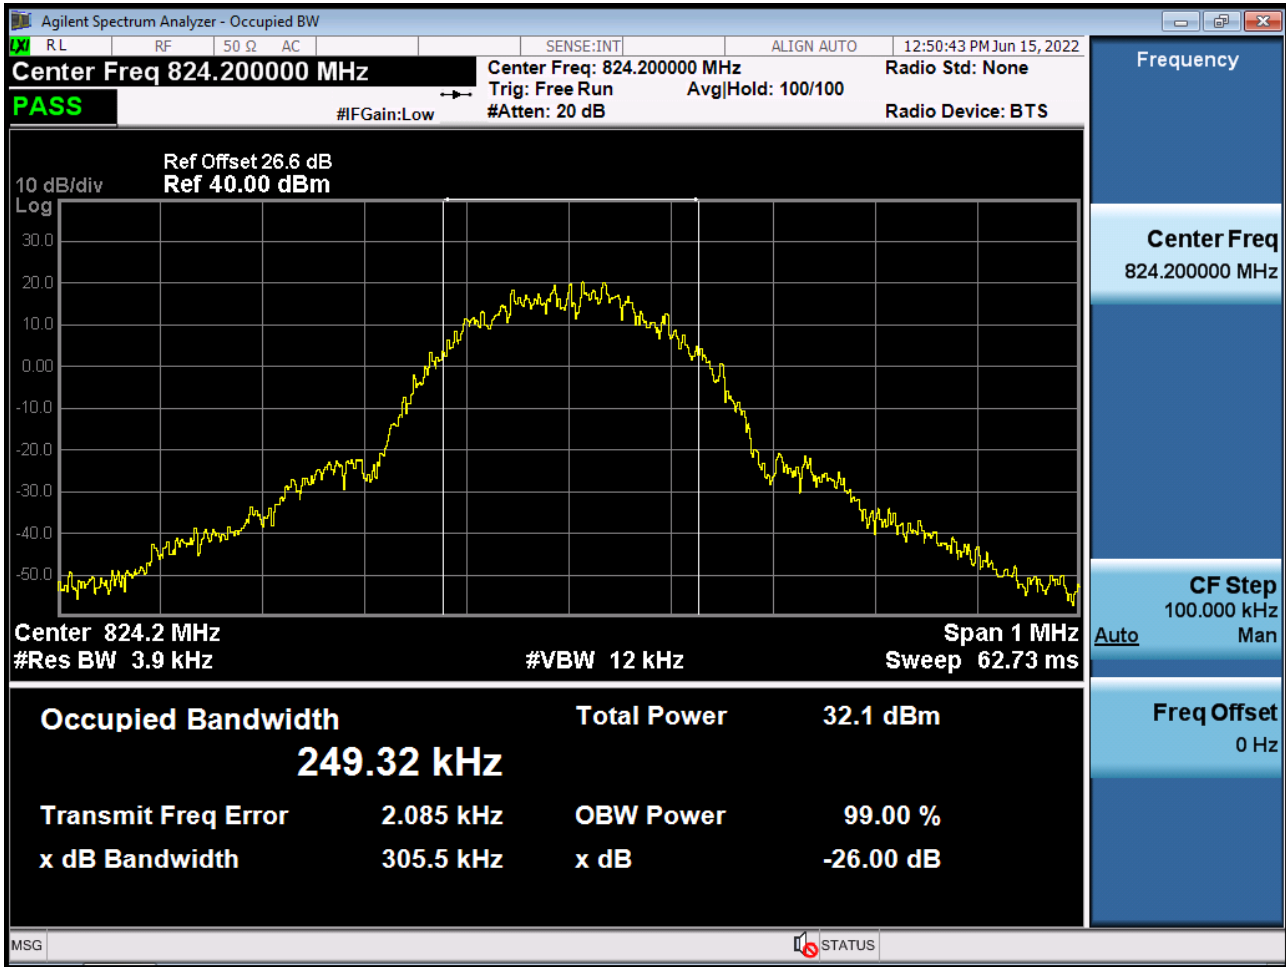


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

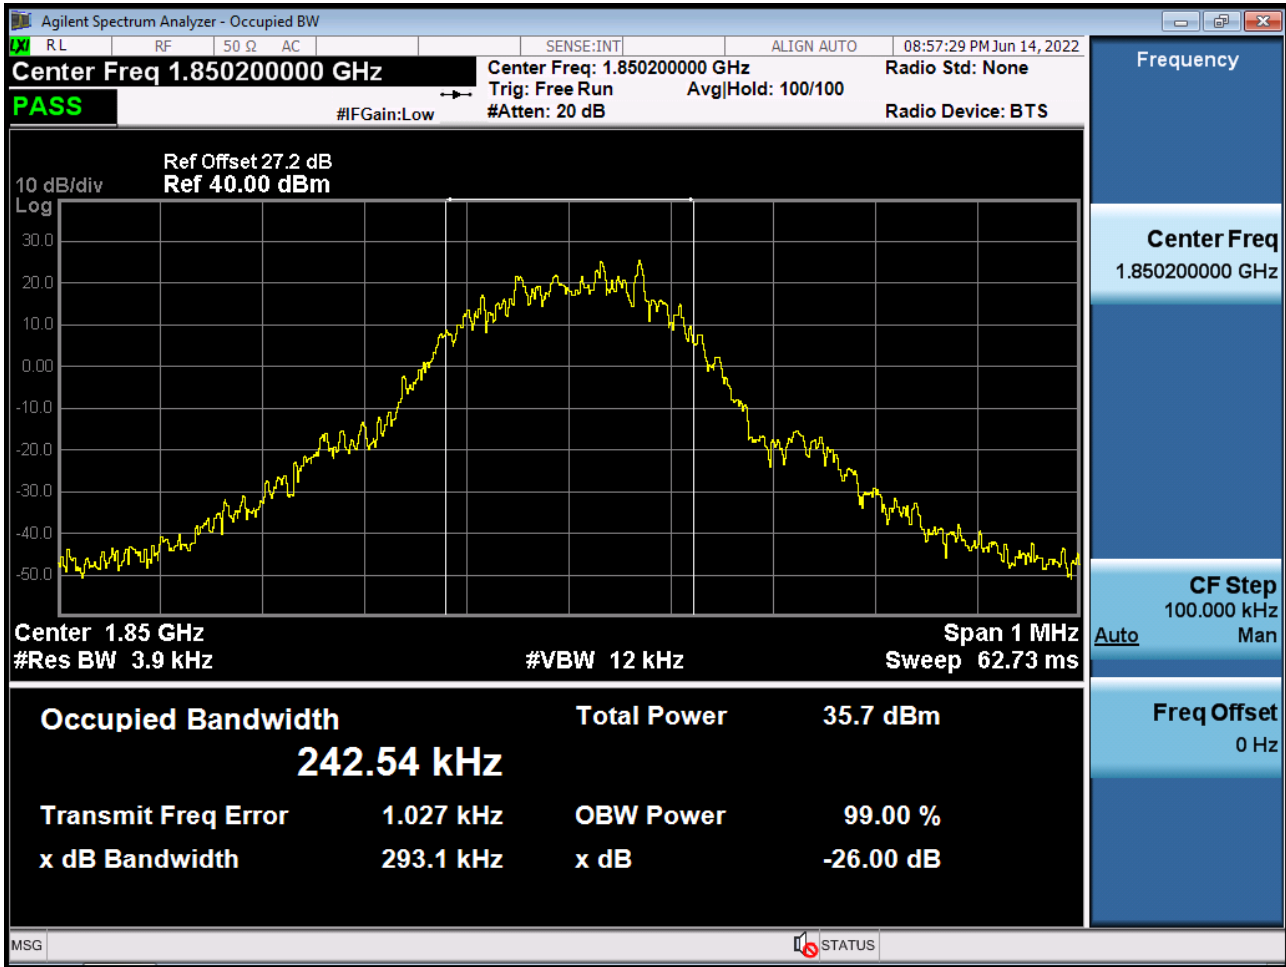


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

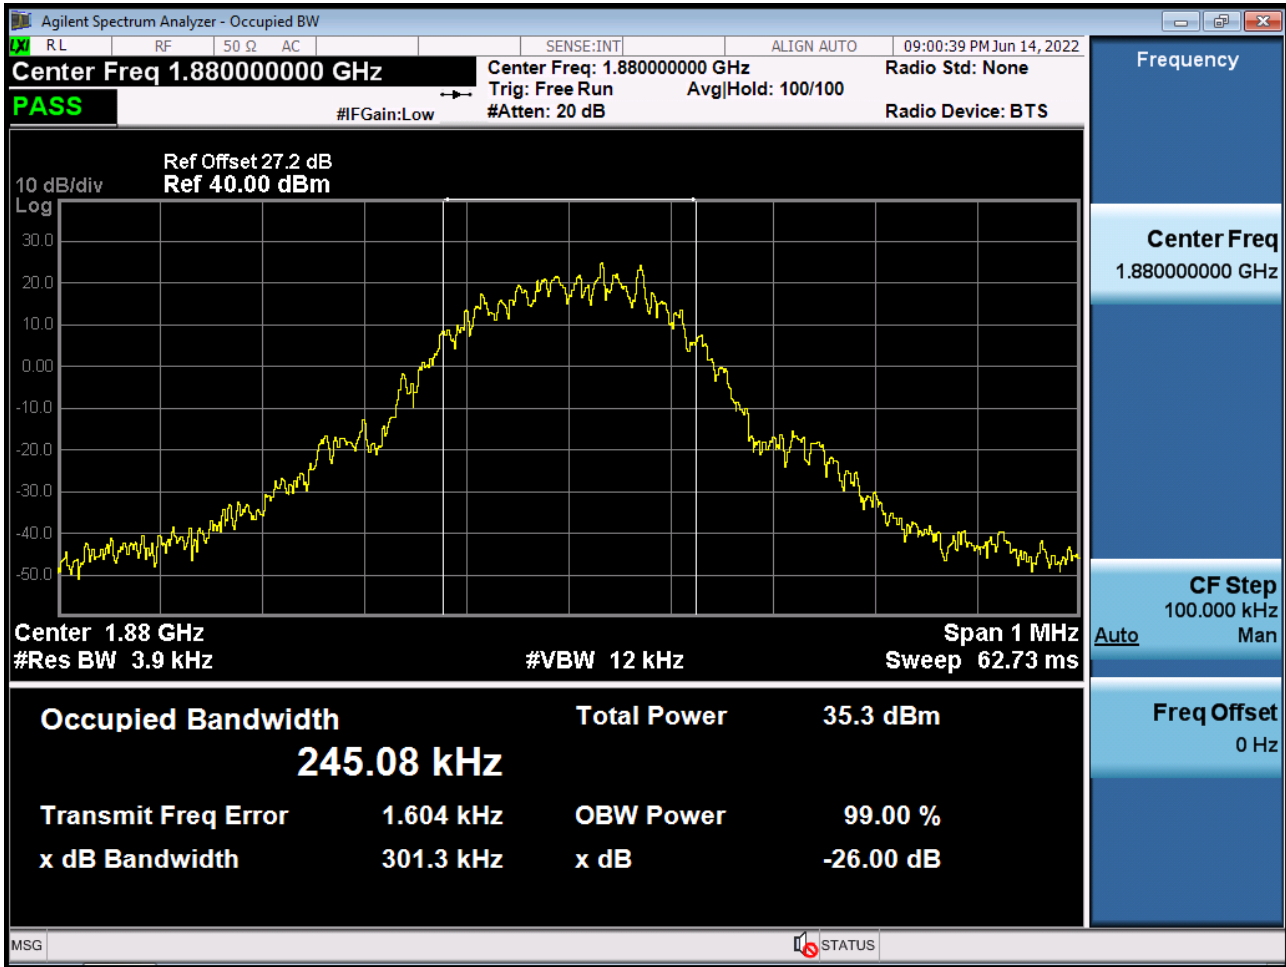


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

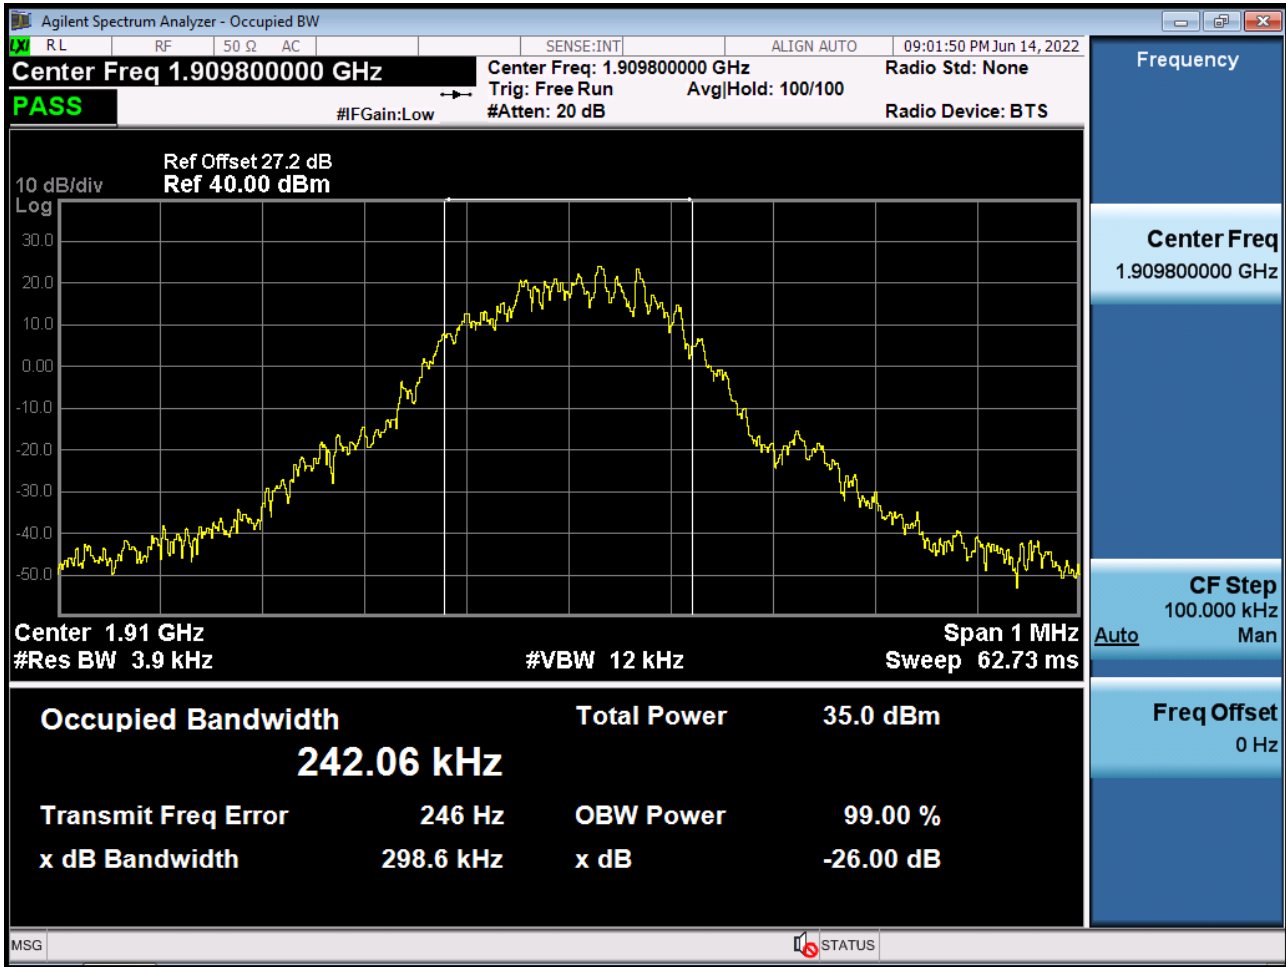


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

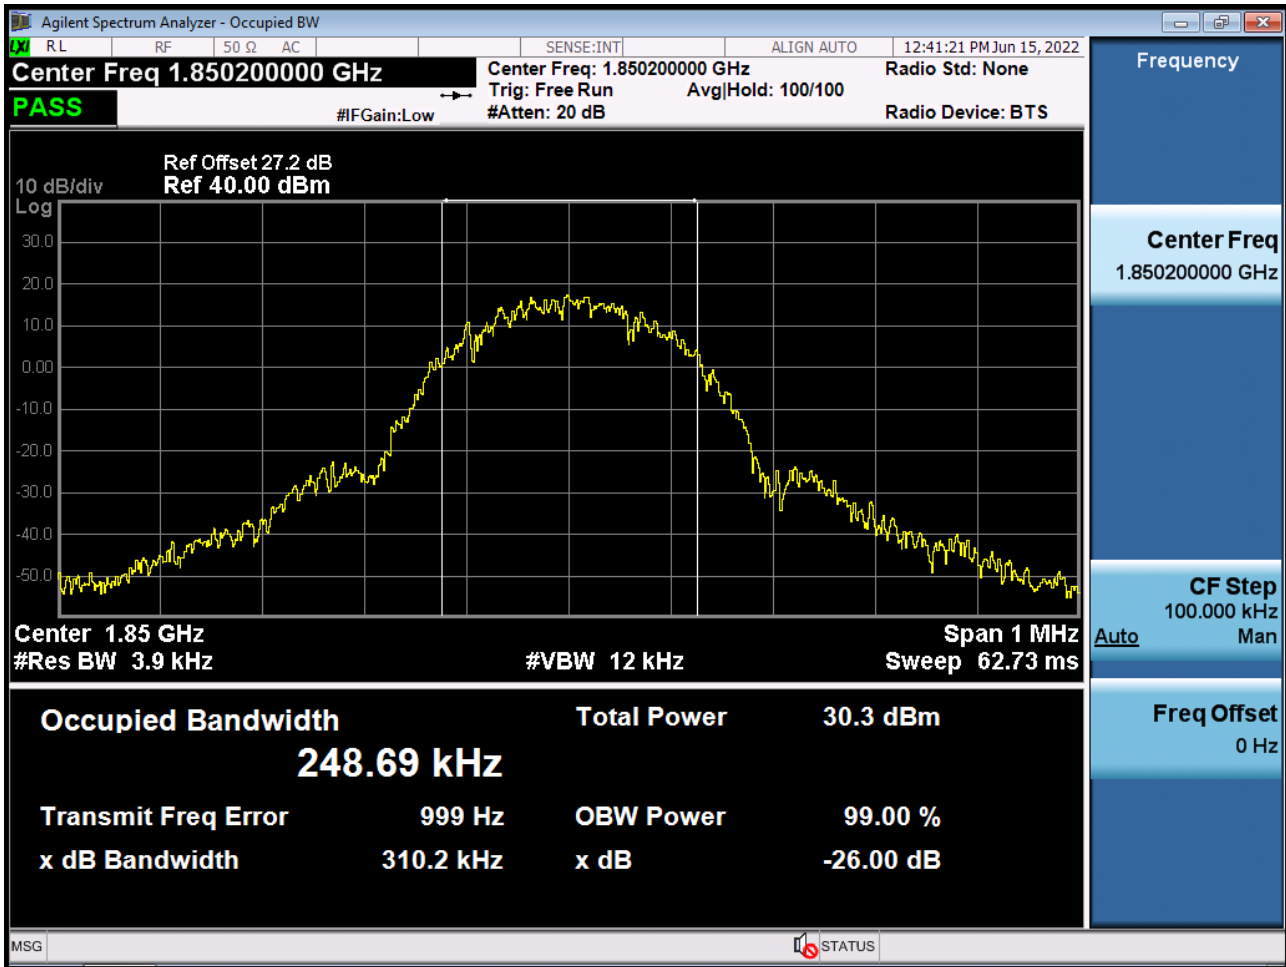


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

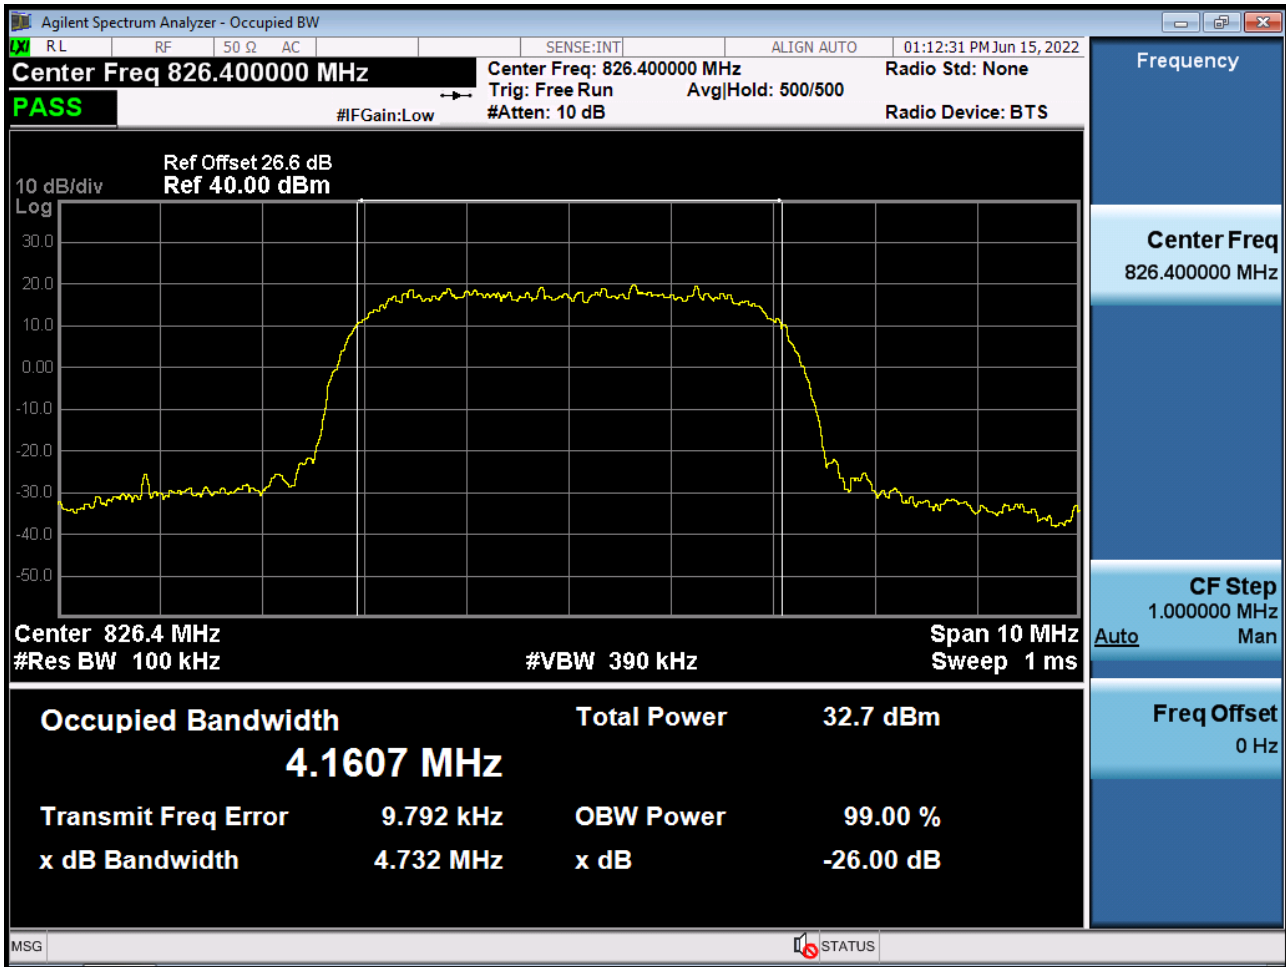


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

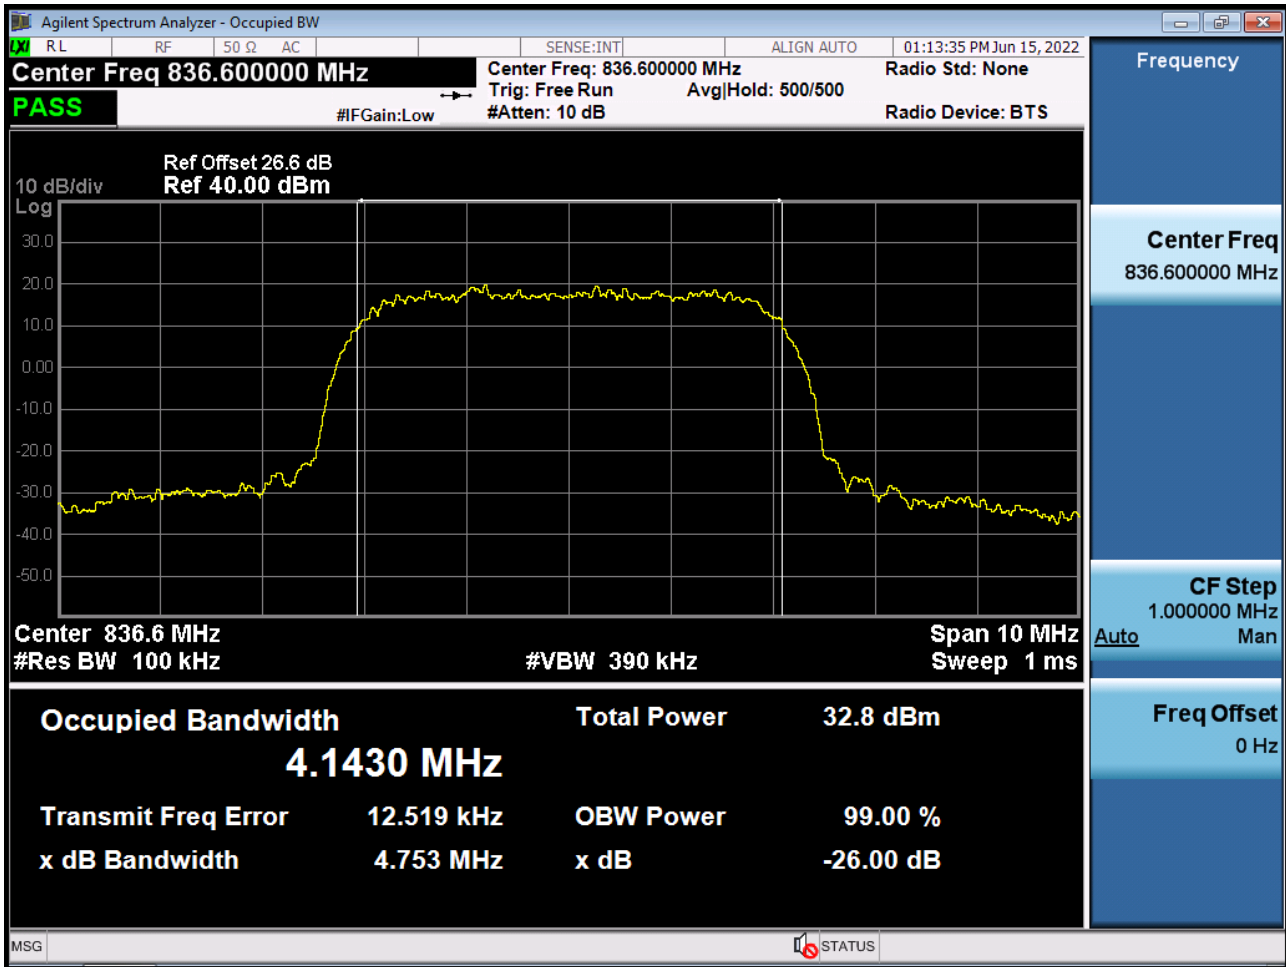


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

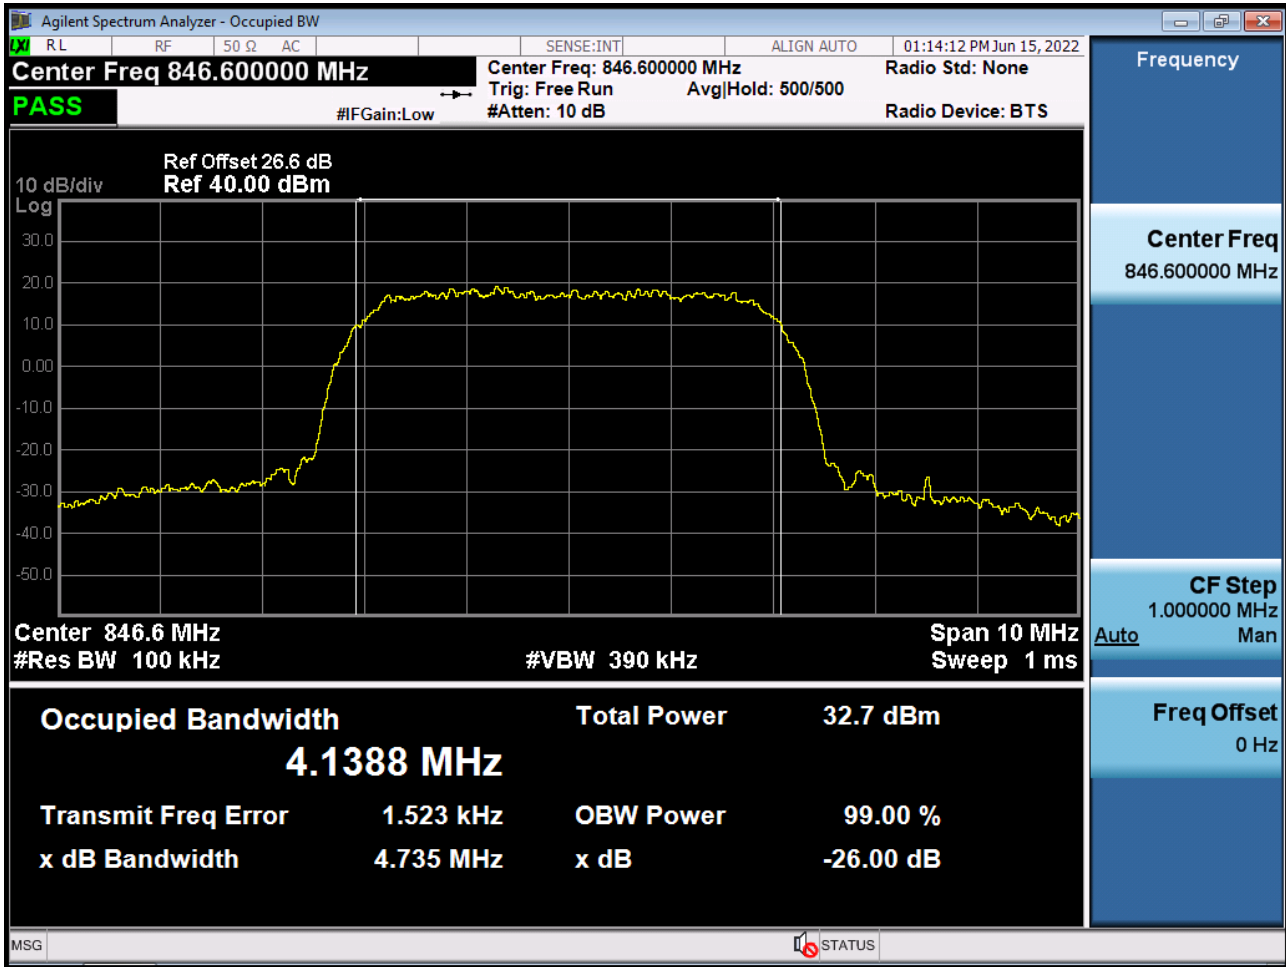


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

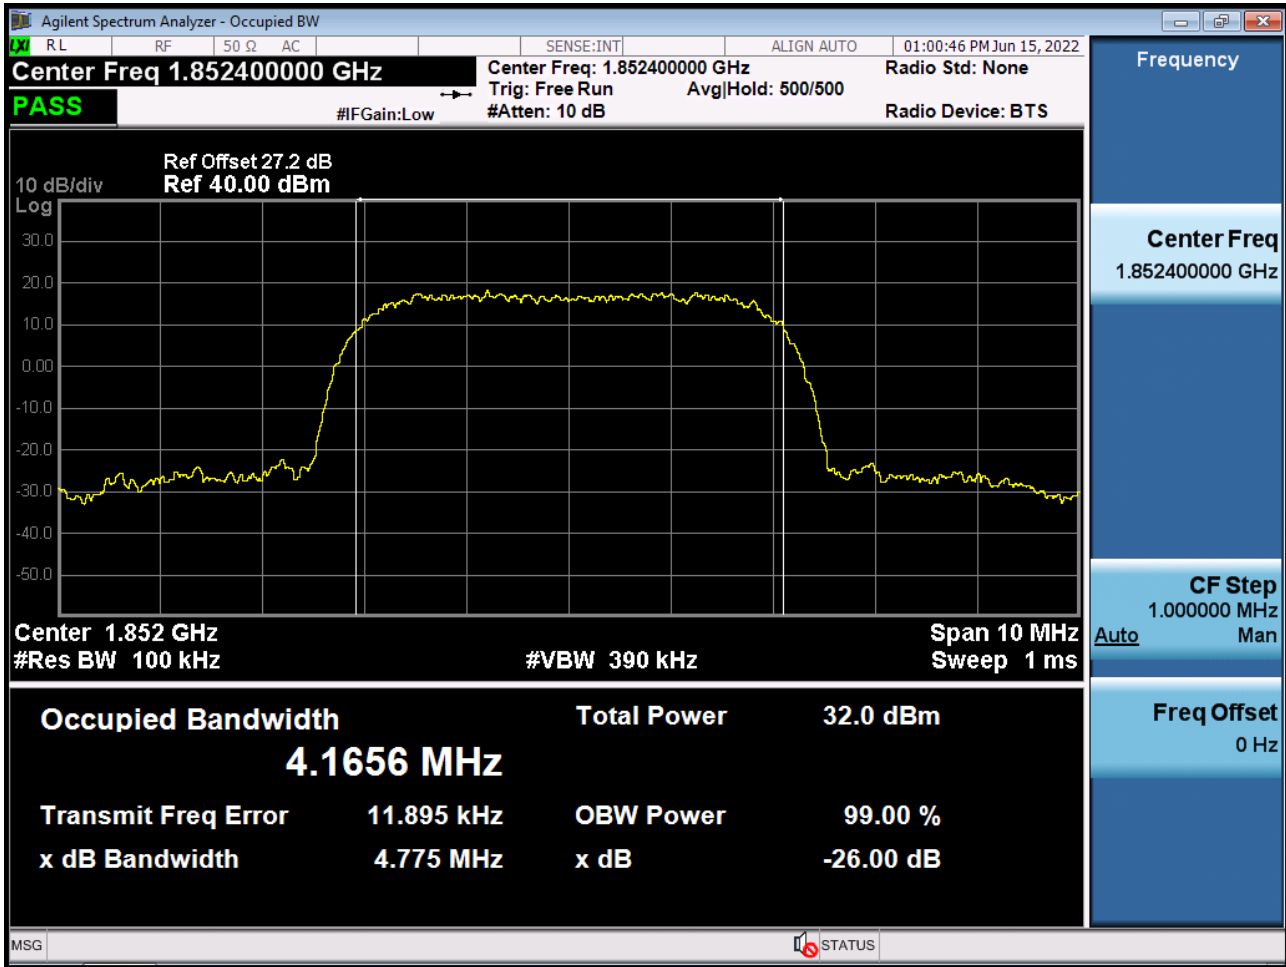


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

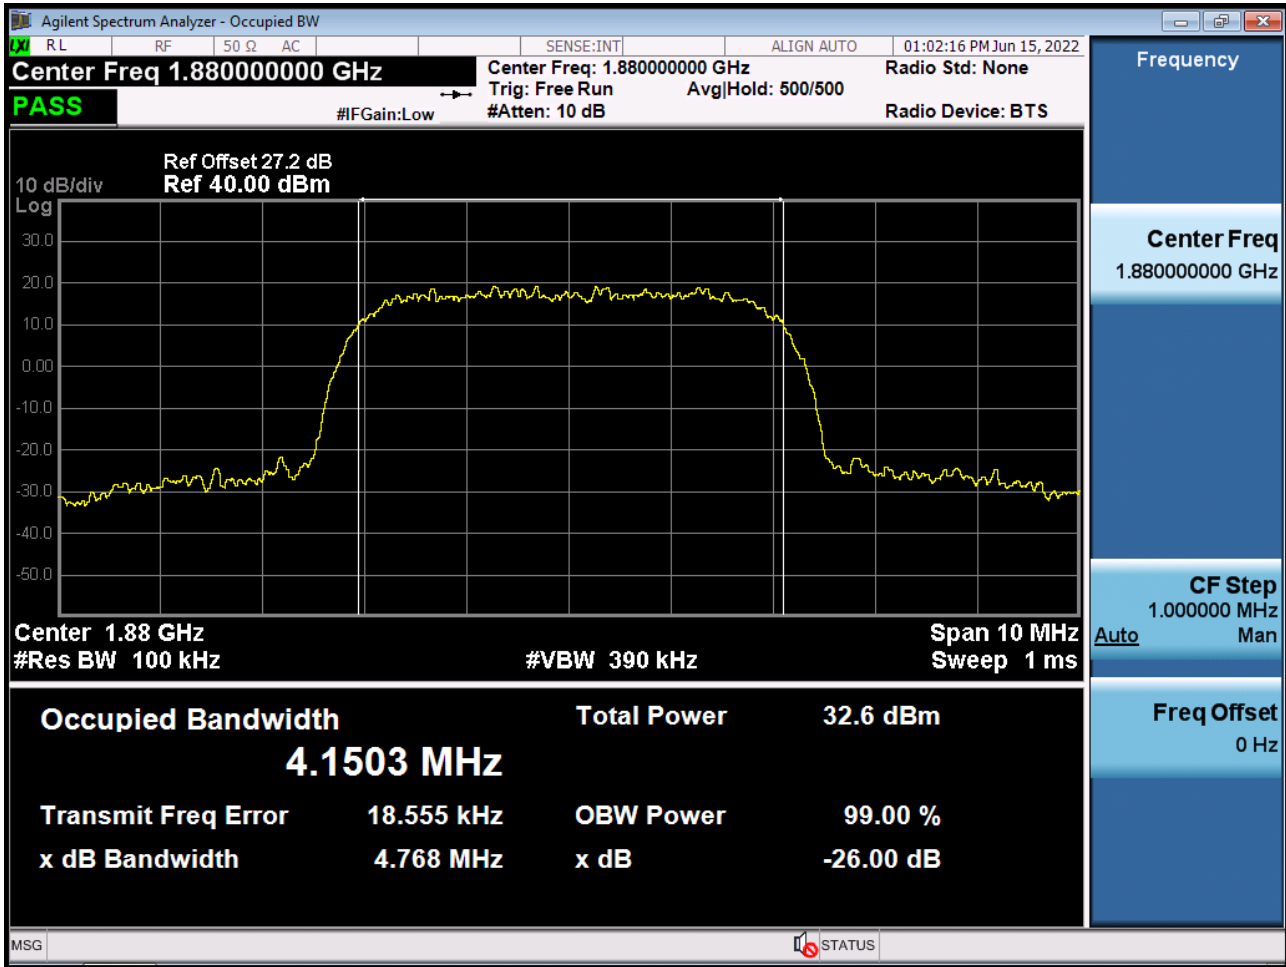


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

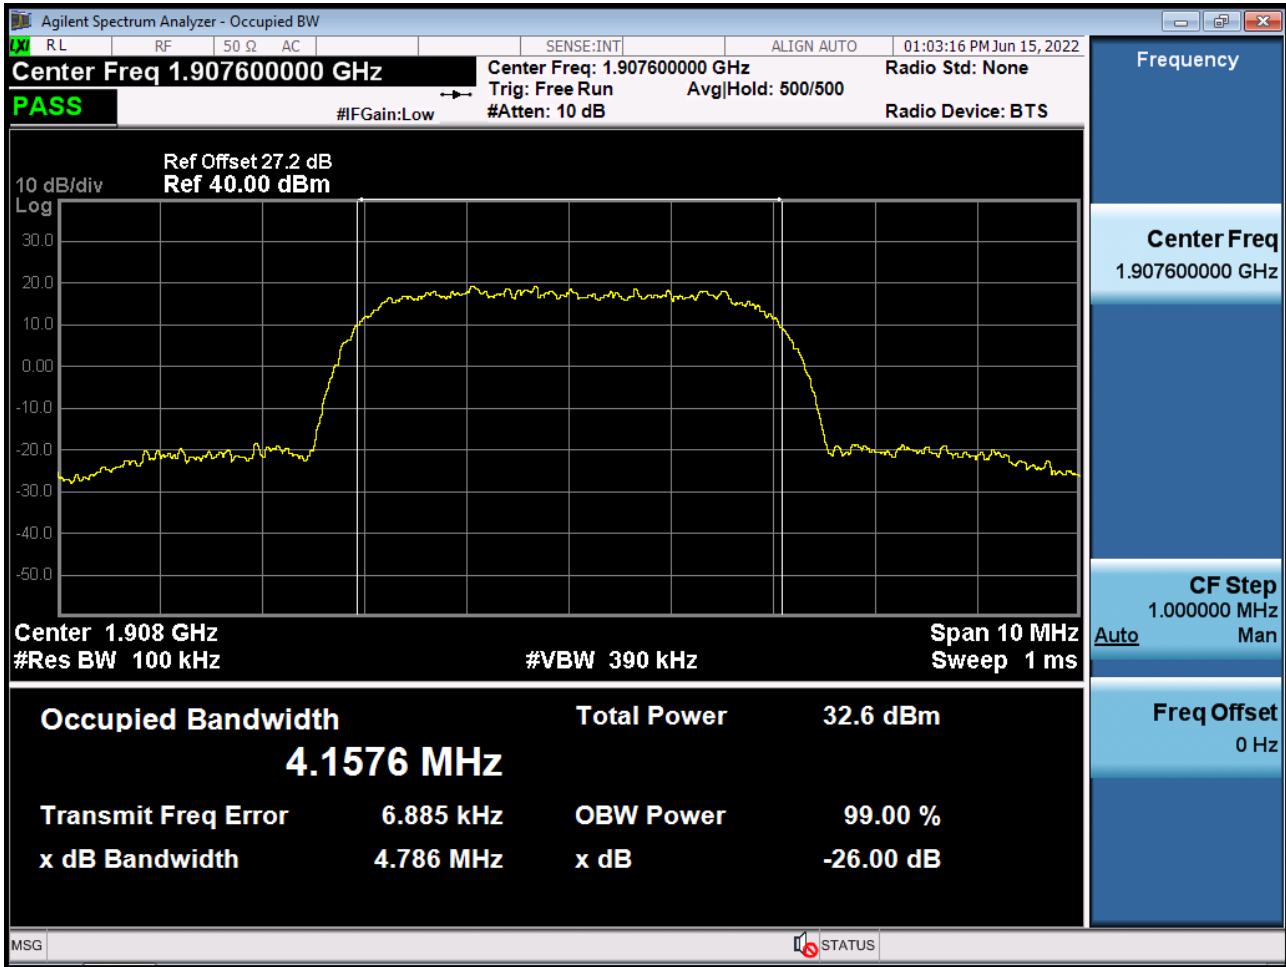


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

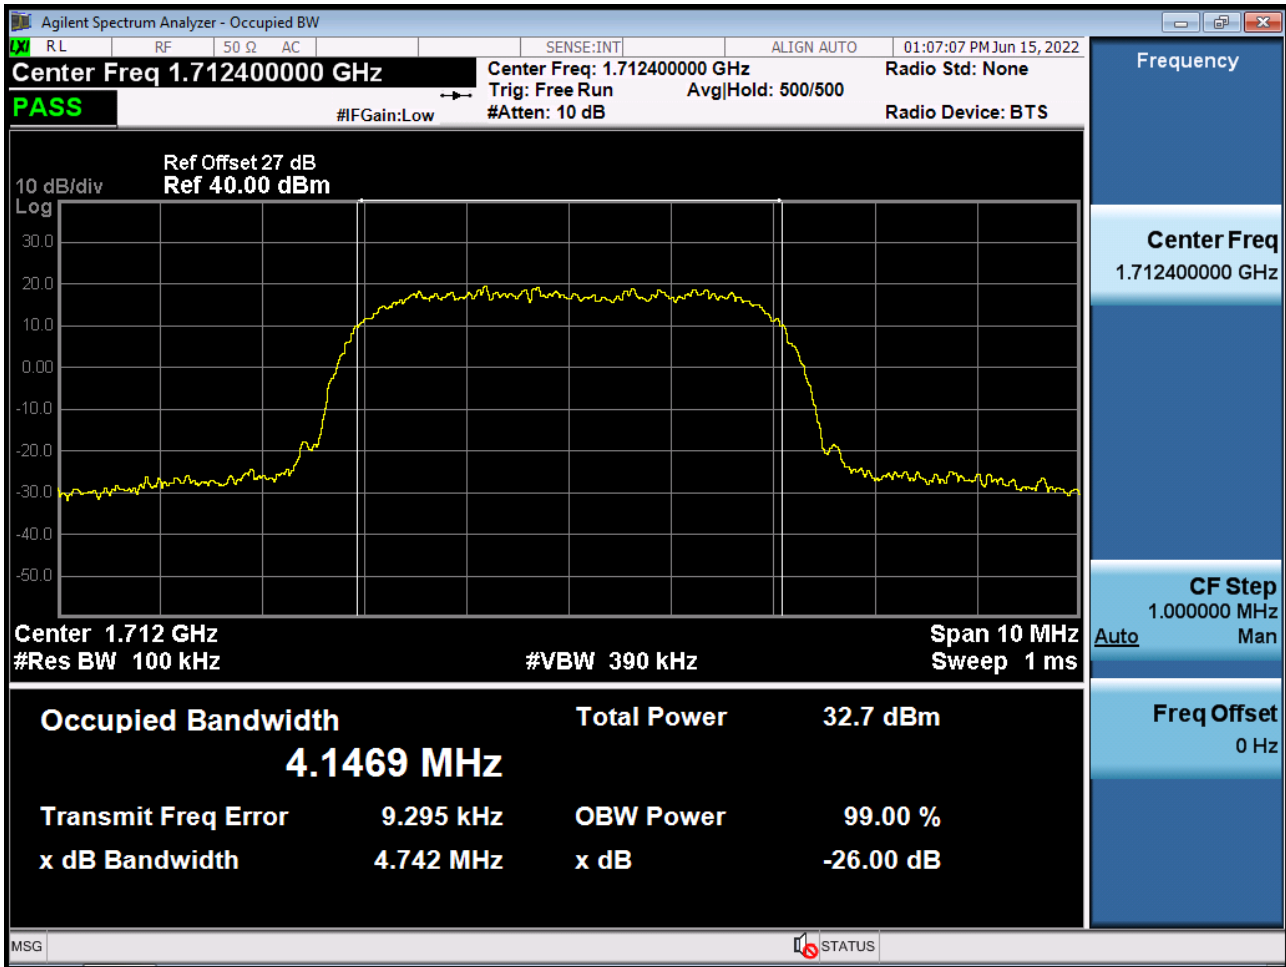

■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

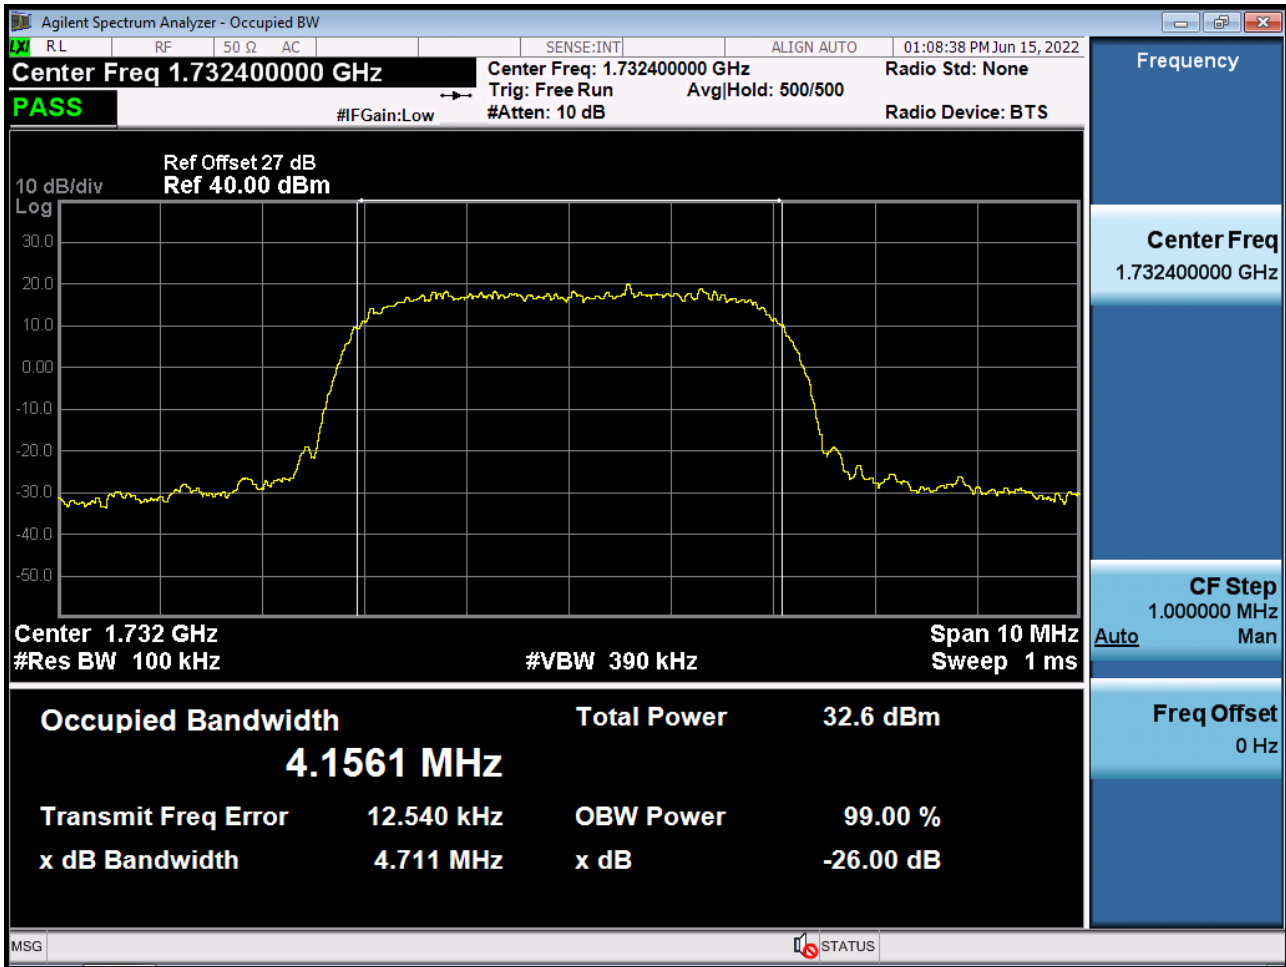


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

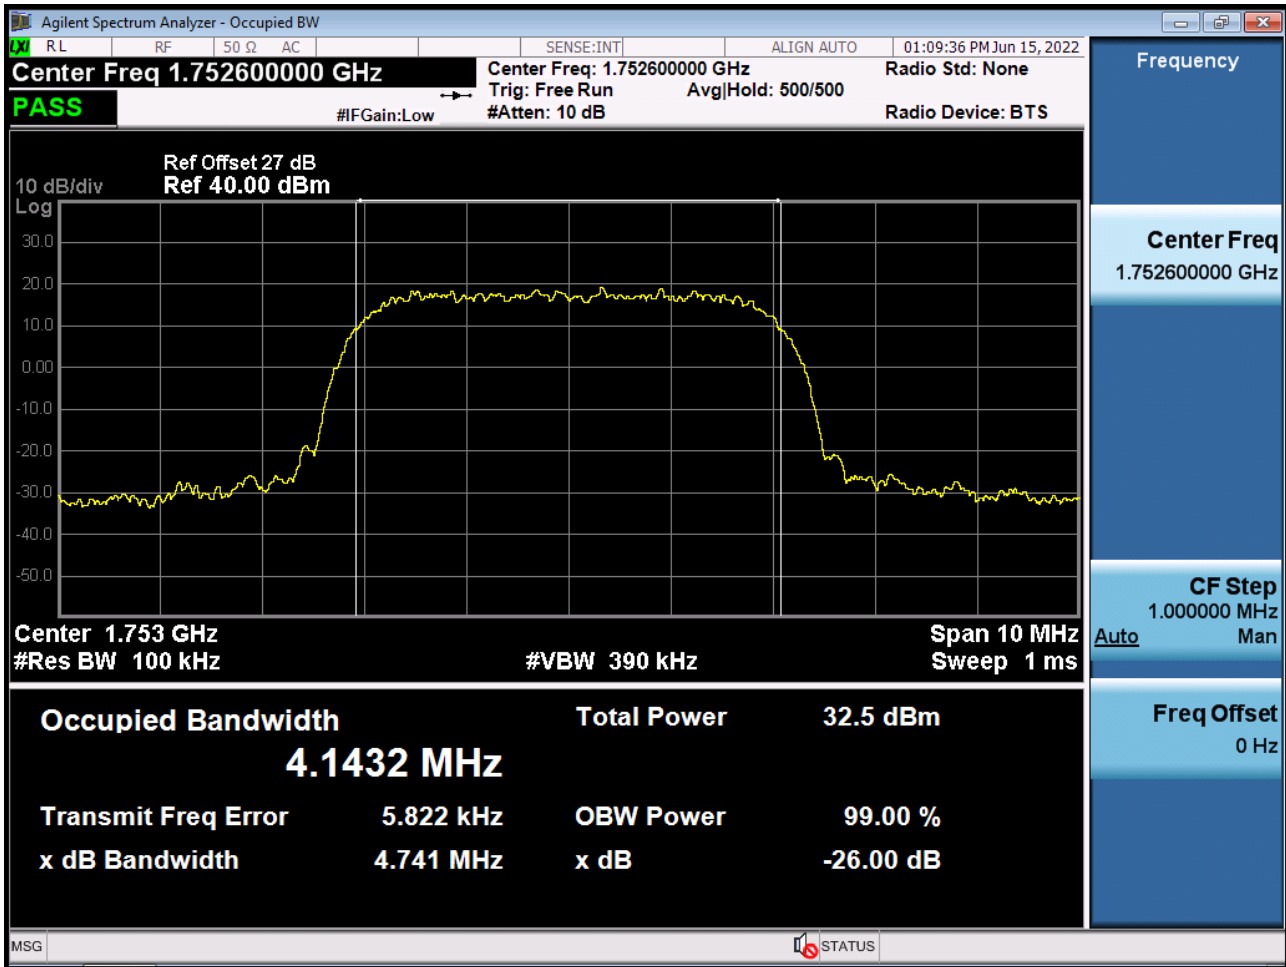


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{PK}




■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

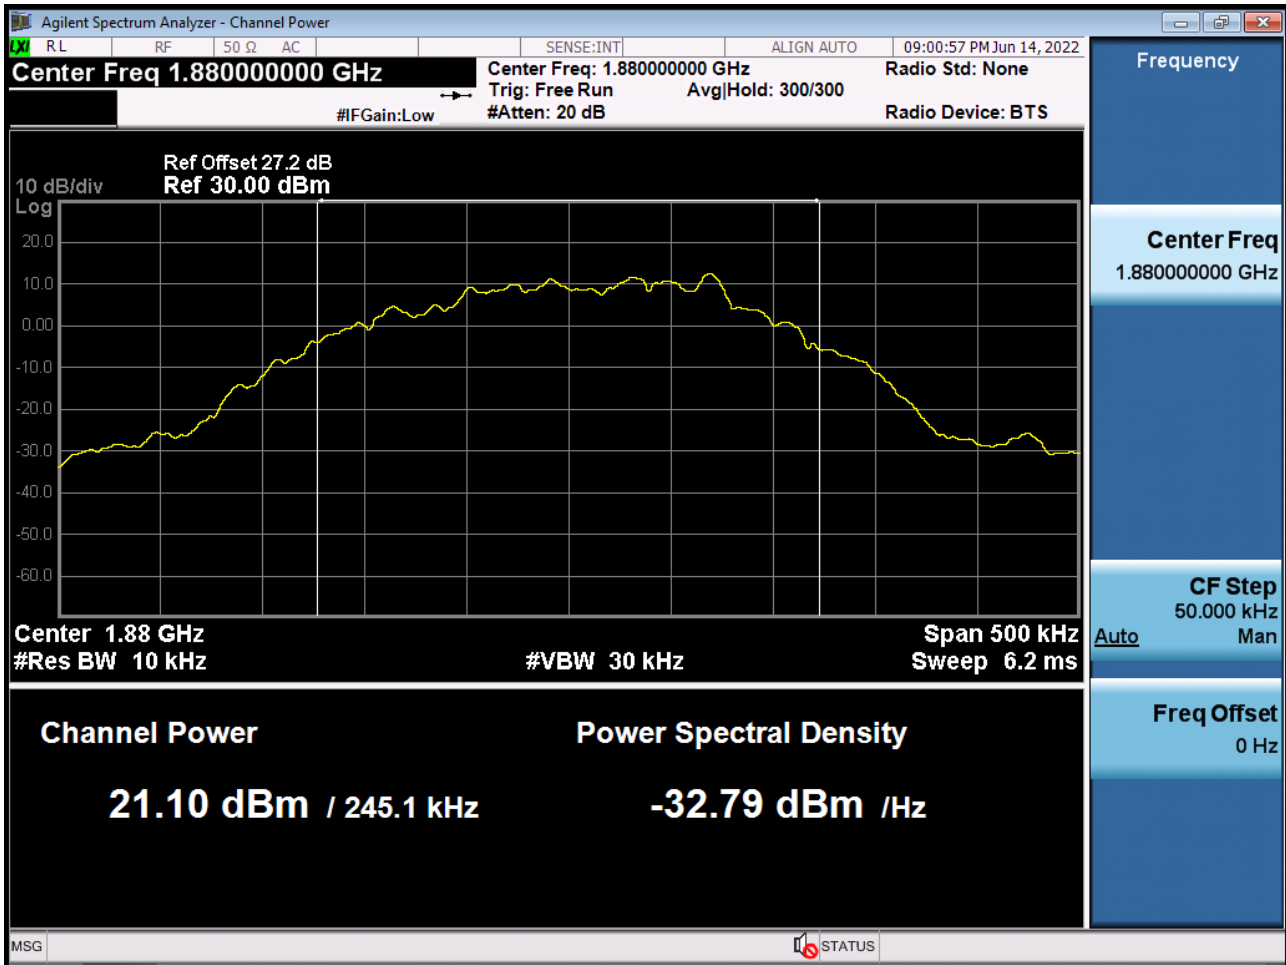

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

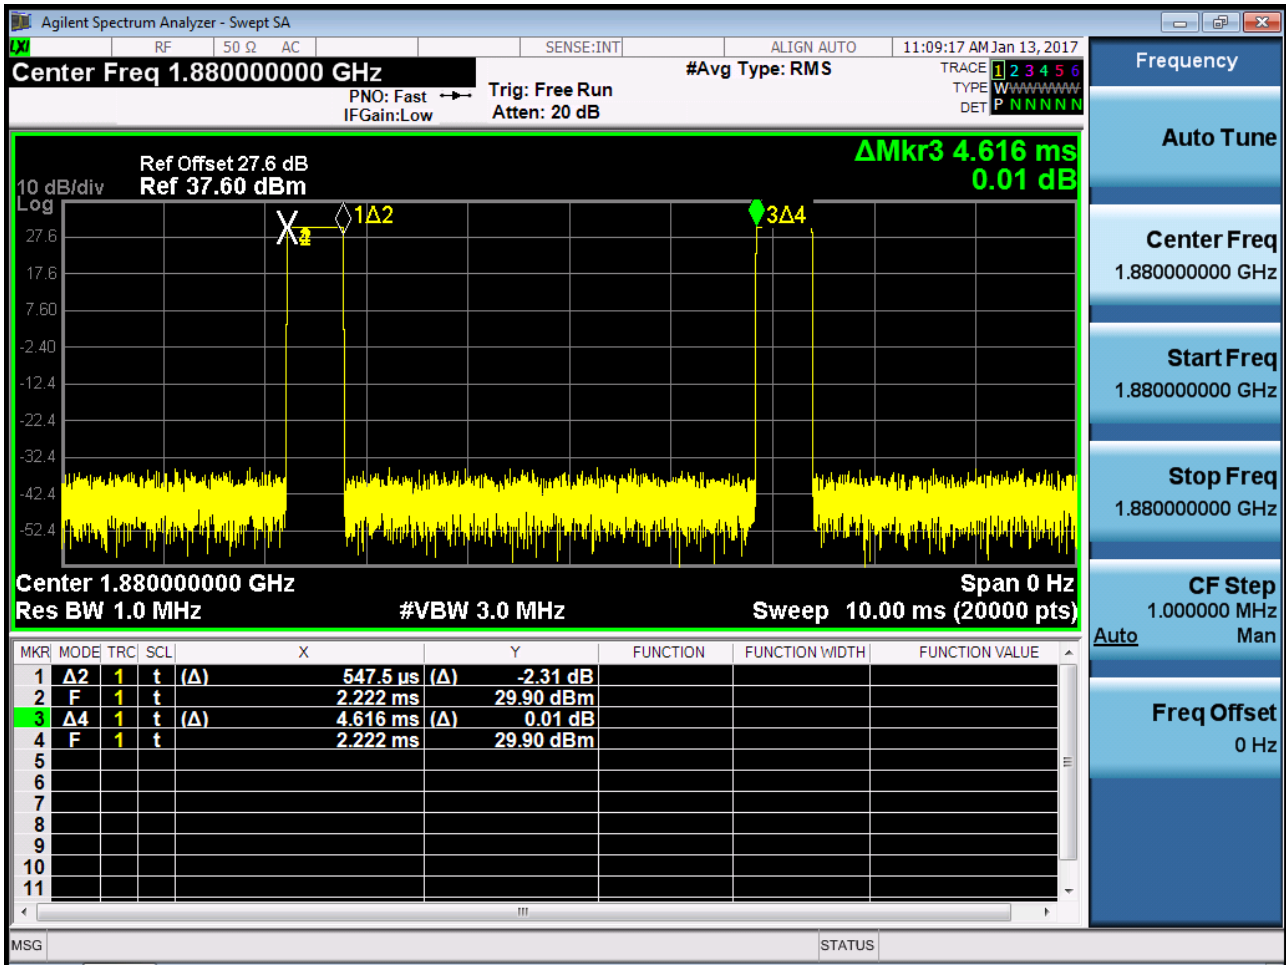


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

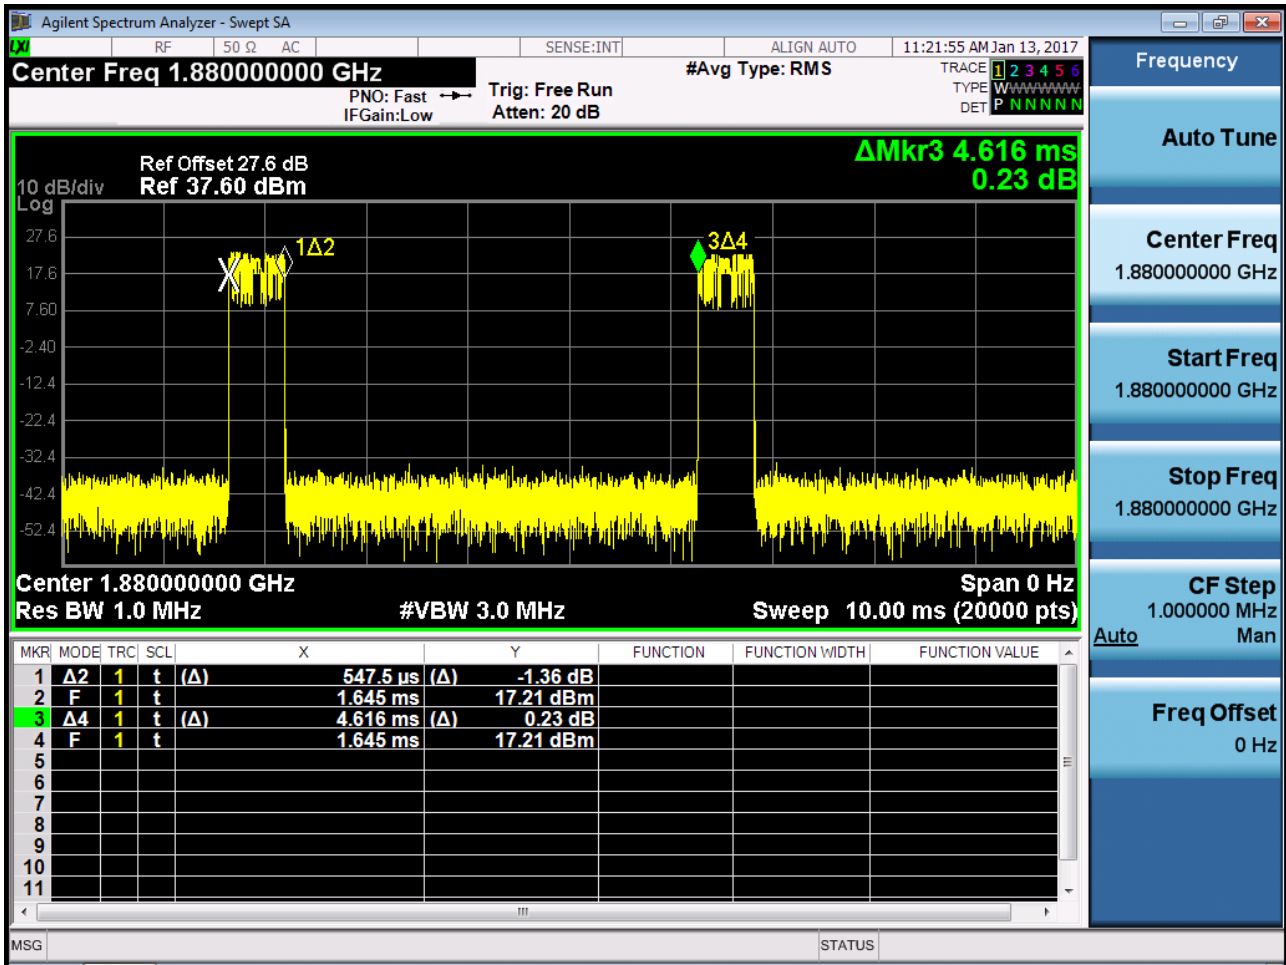


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{PK}




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

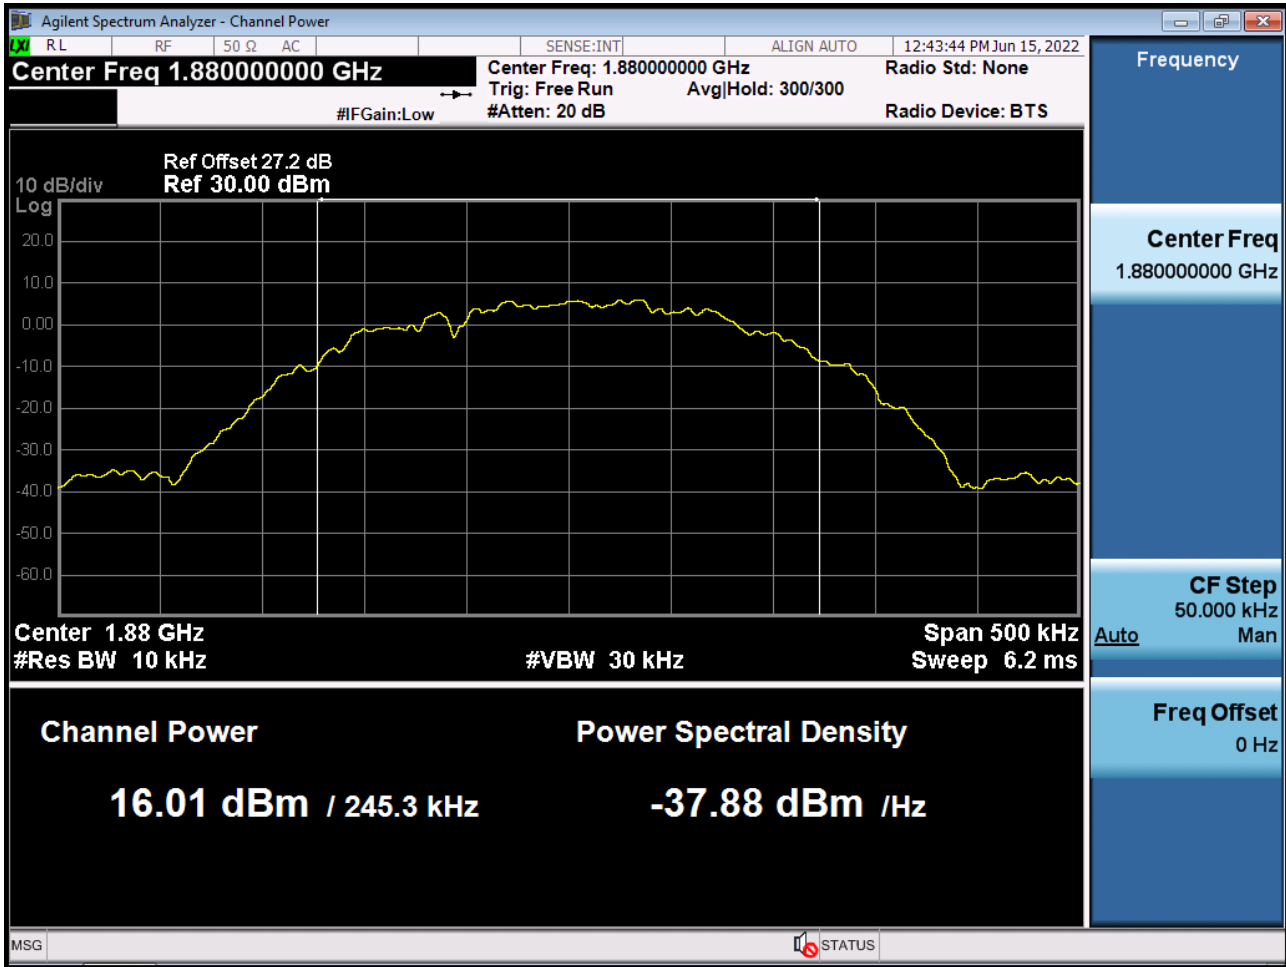


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

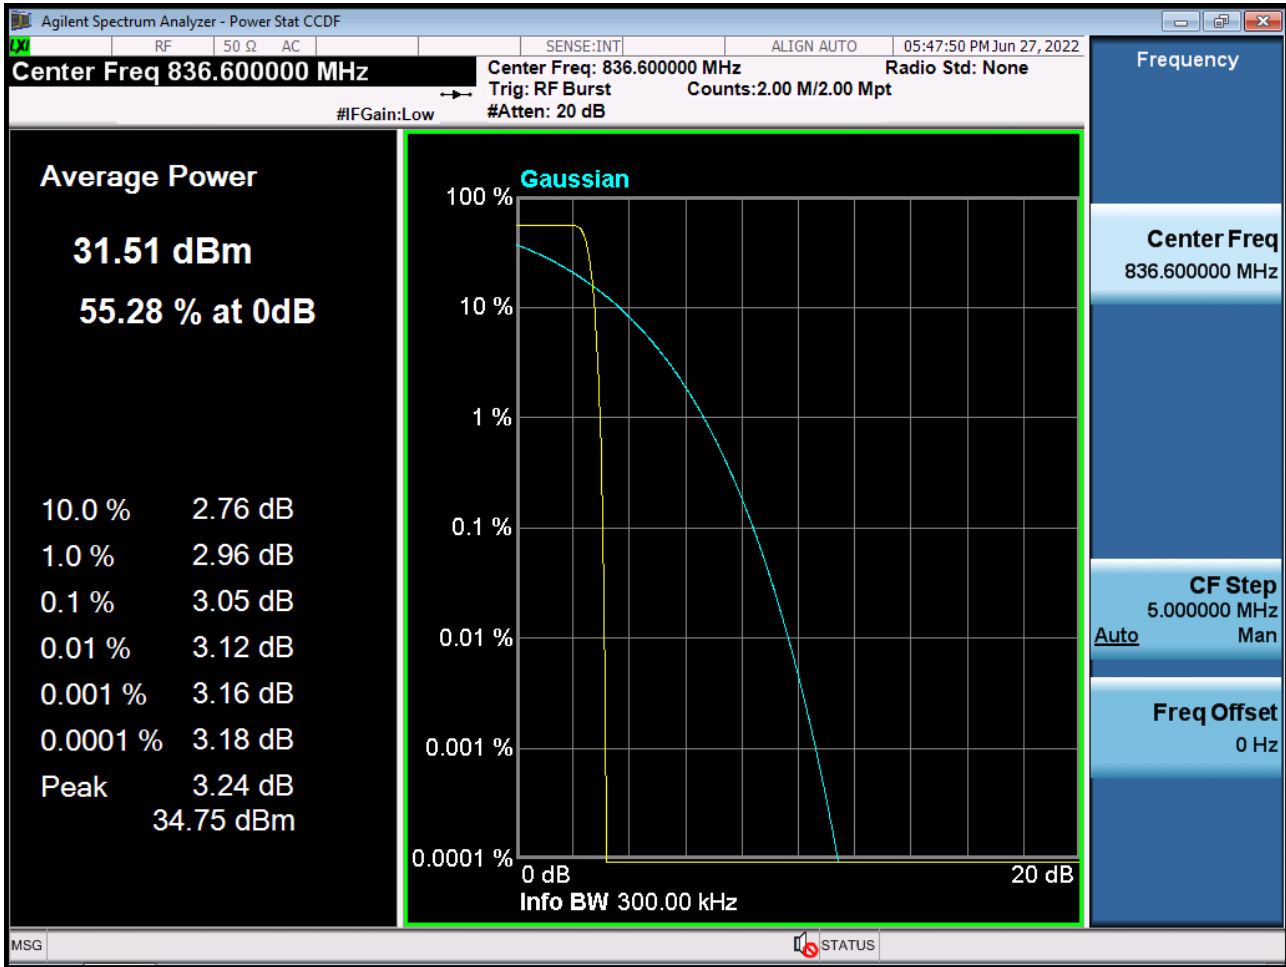


■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

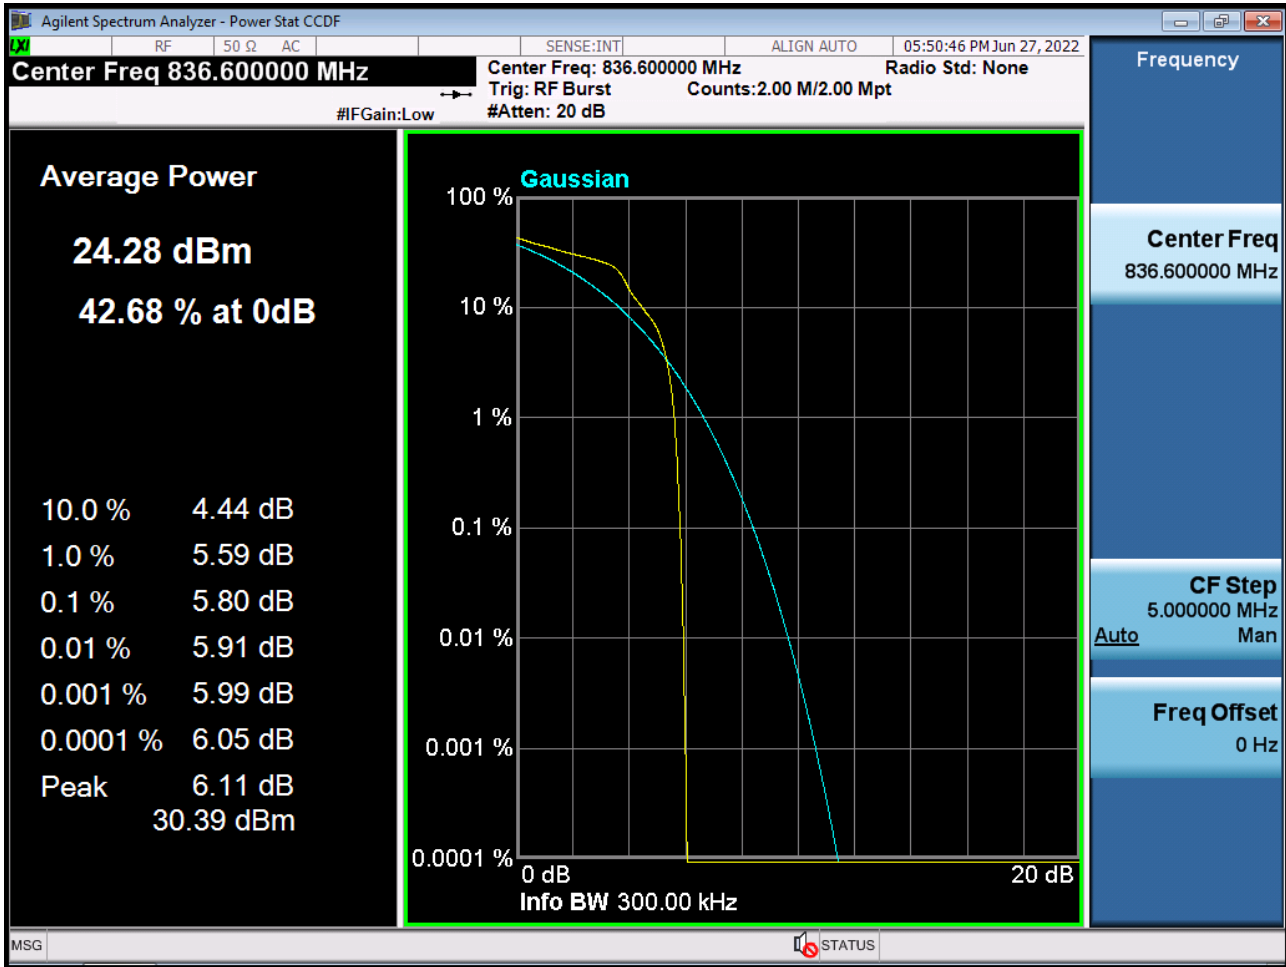


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

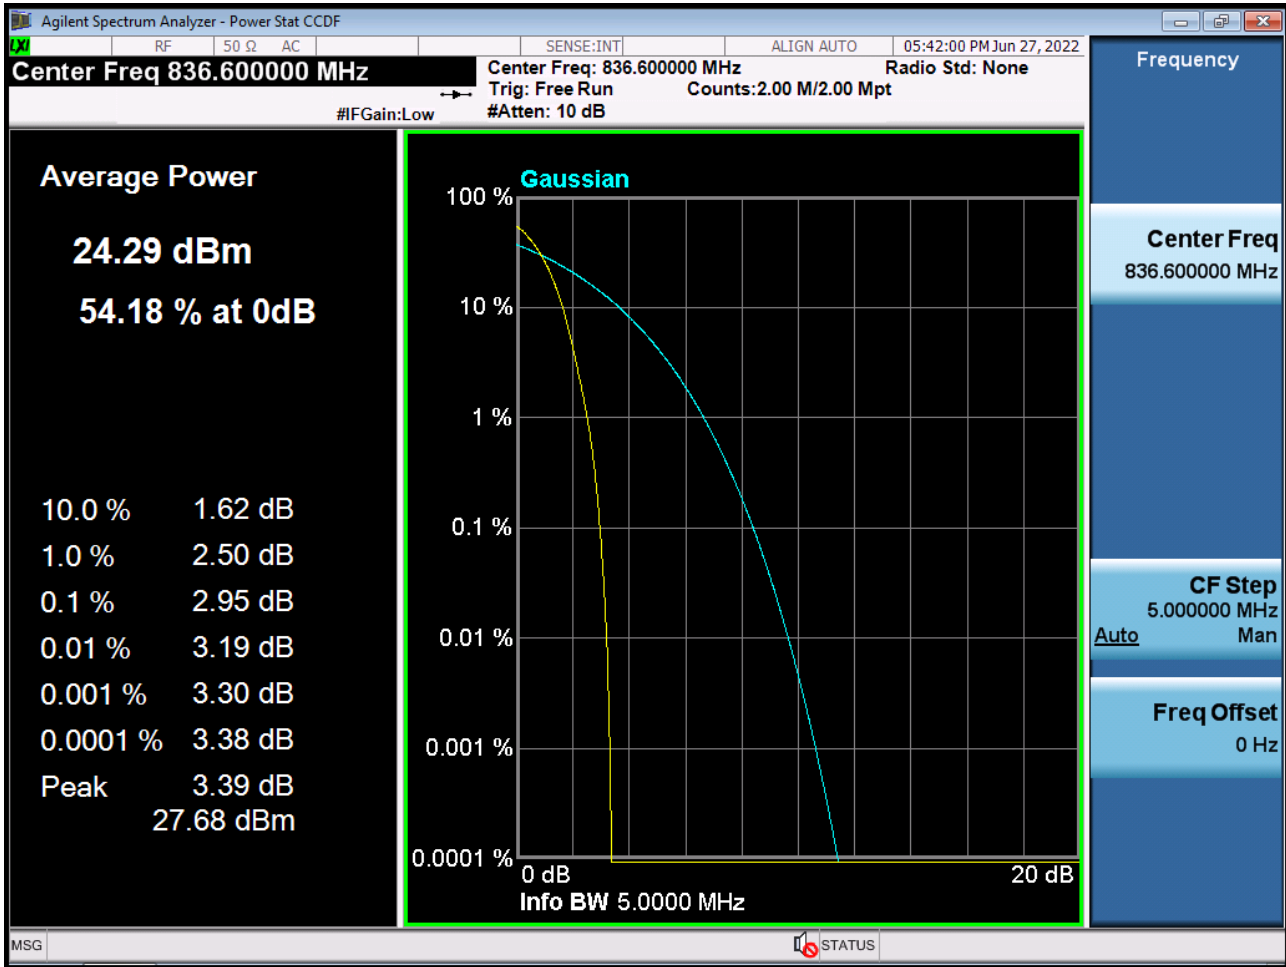


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

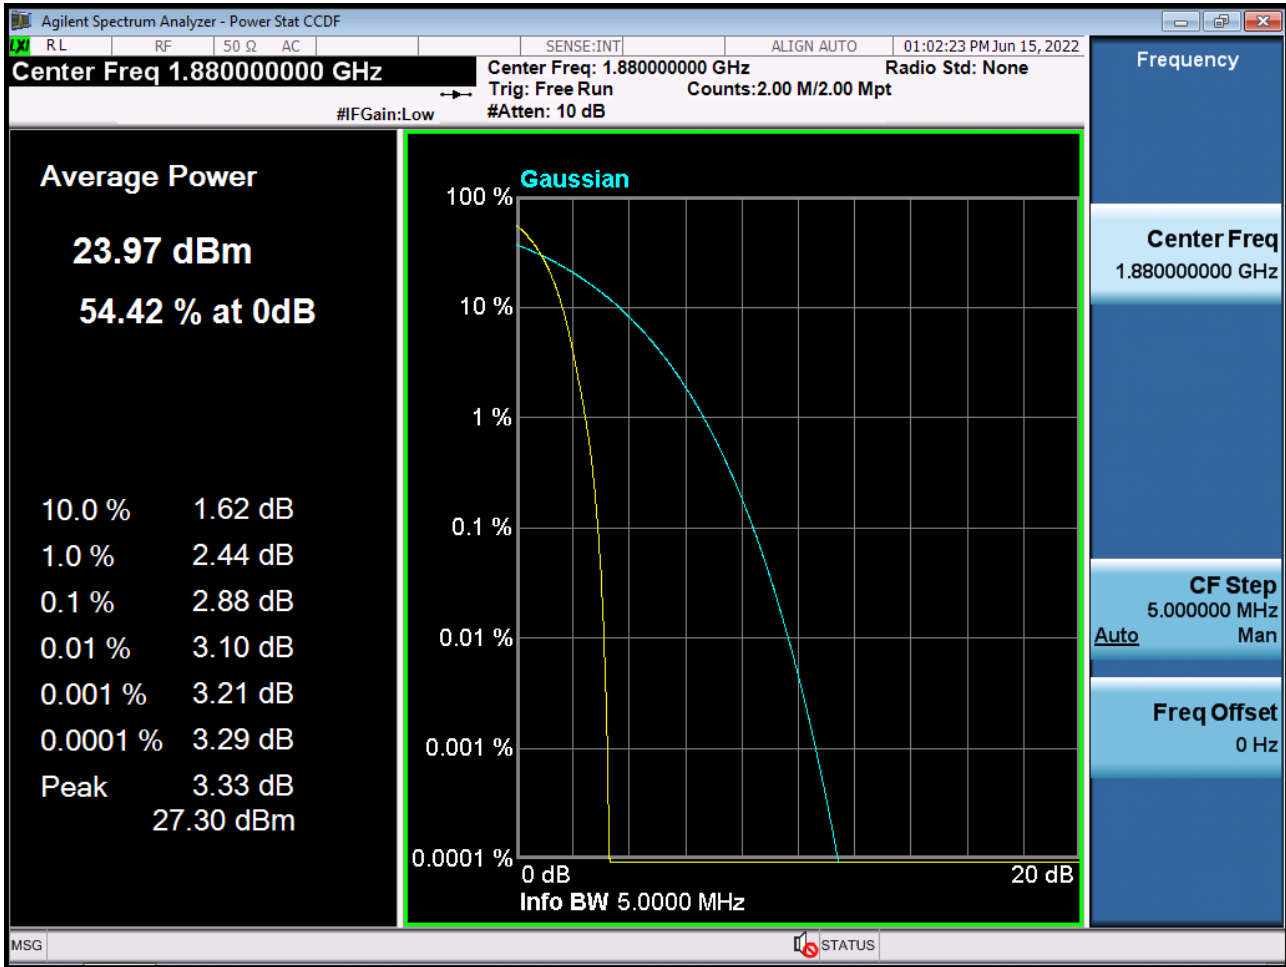


■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

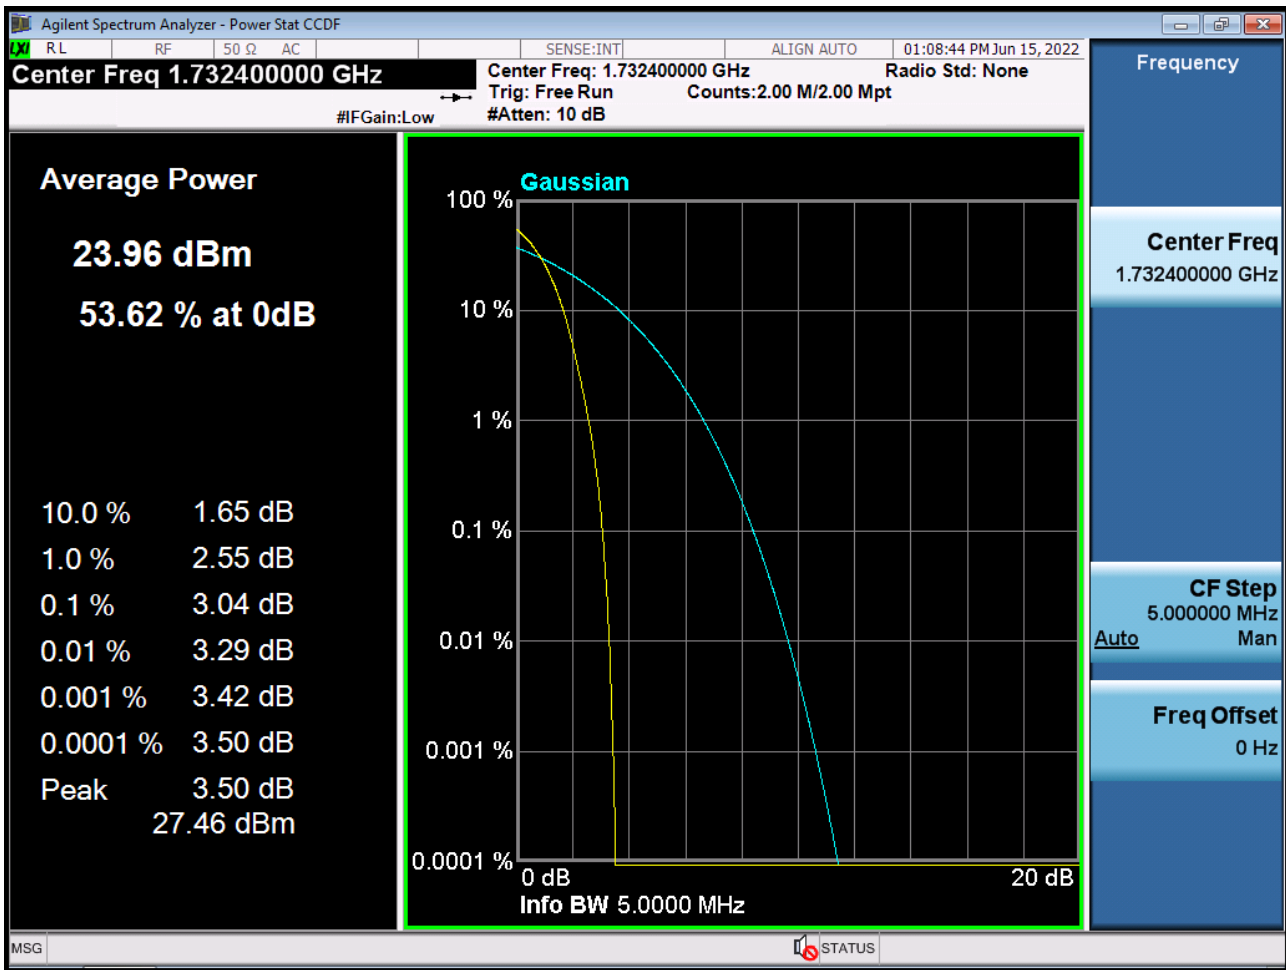


■ GSM850 MODE (128 CH.) Block Edge 1

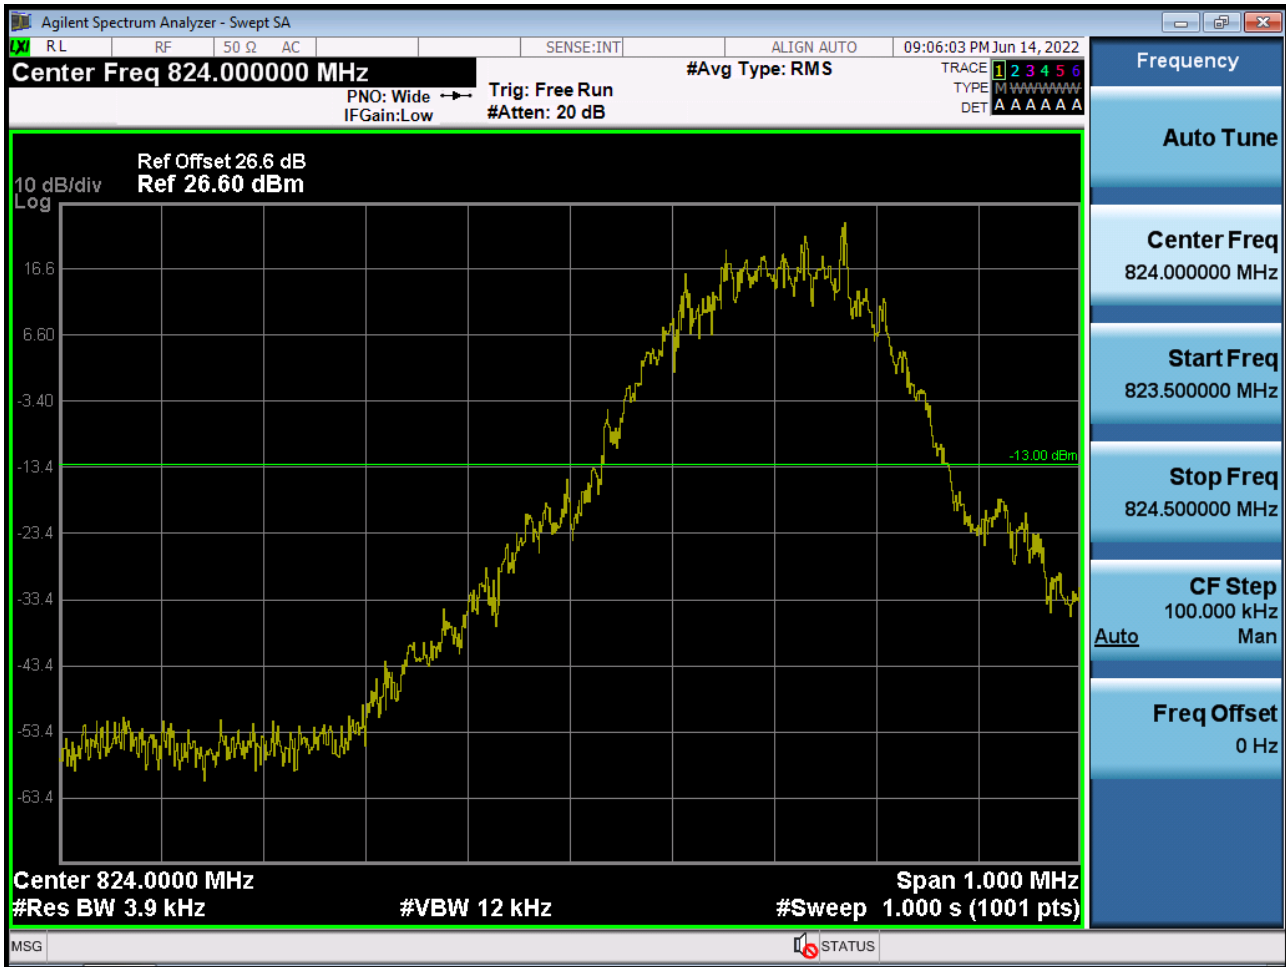


■ GSM850 MODE (128 CH.) Block Edge 2

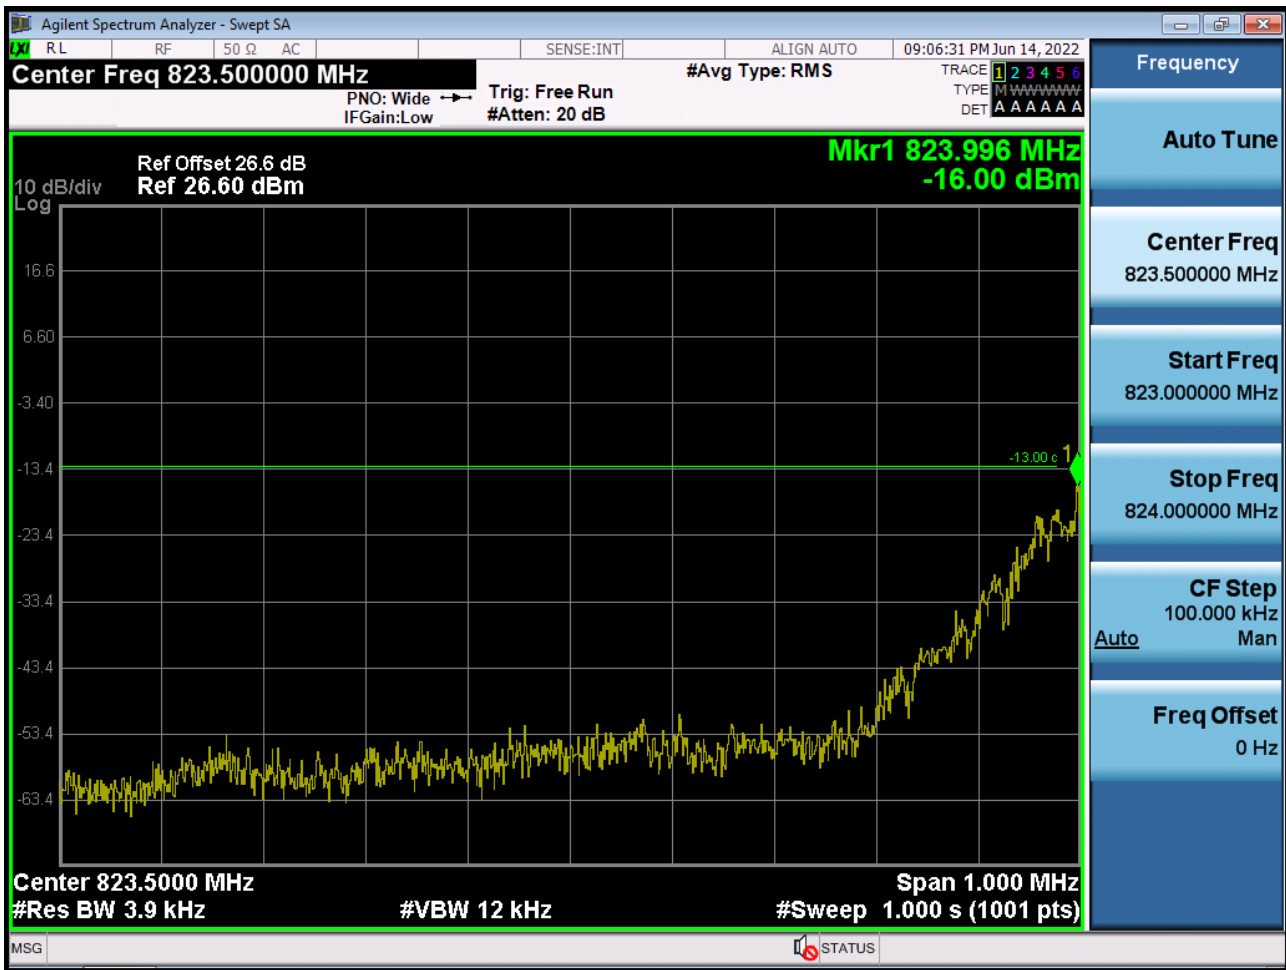


■ GSM850 MODE (128 CH.) Block Edge 3

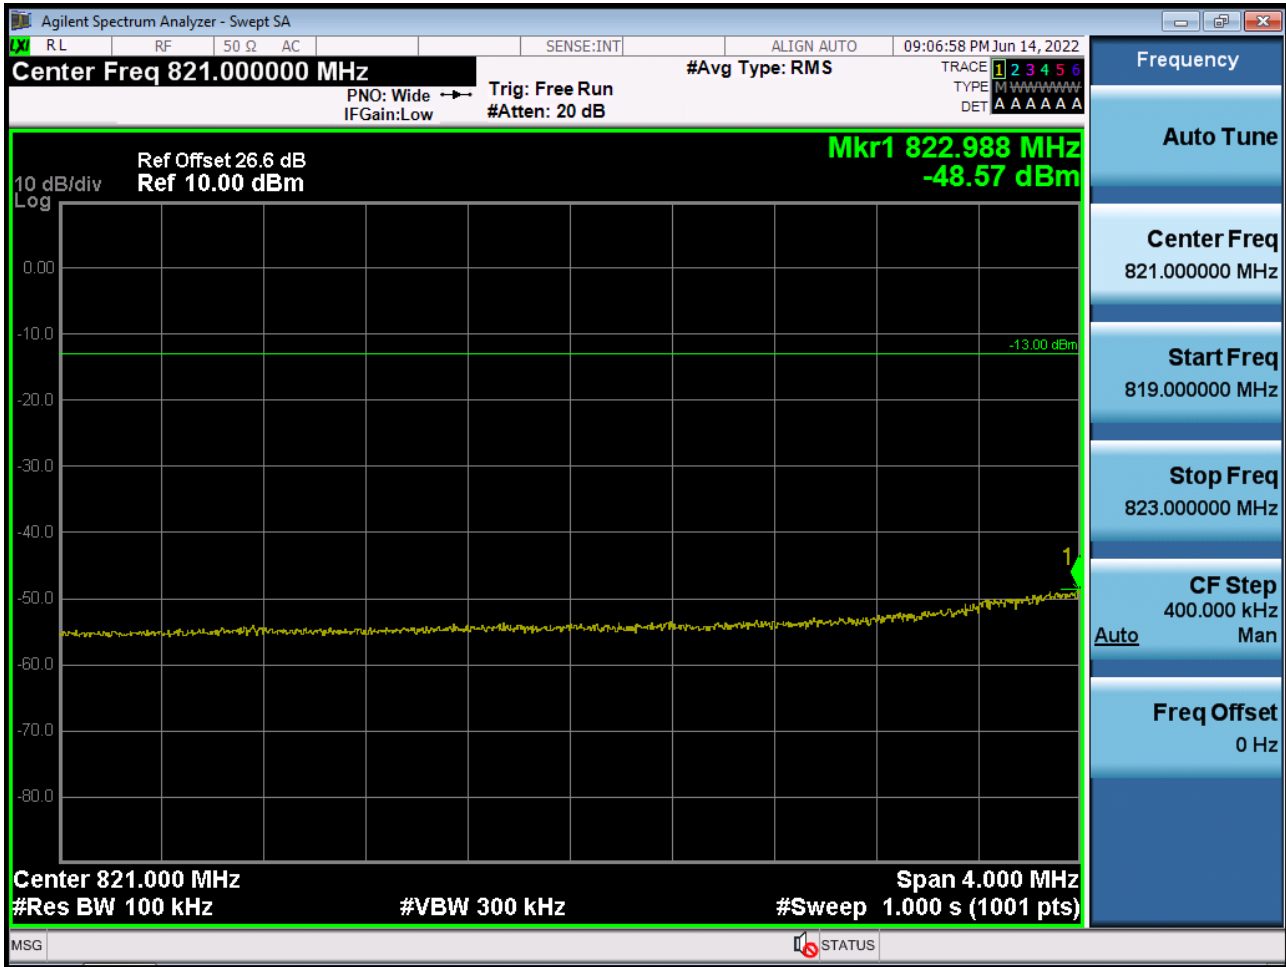


■ GSM850 MODE (251 CH.) Block Edge 1

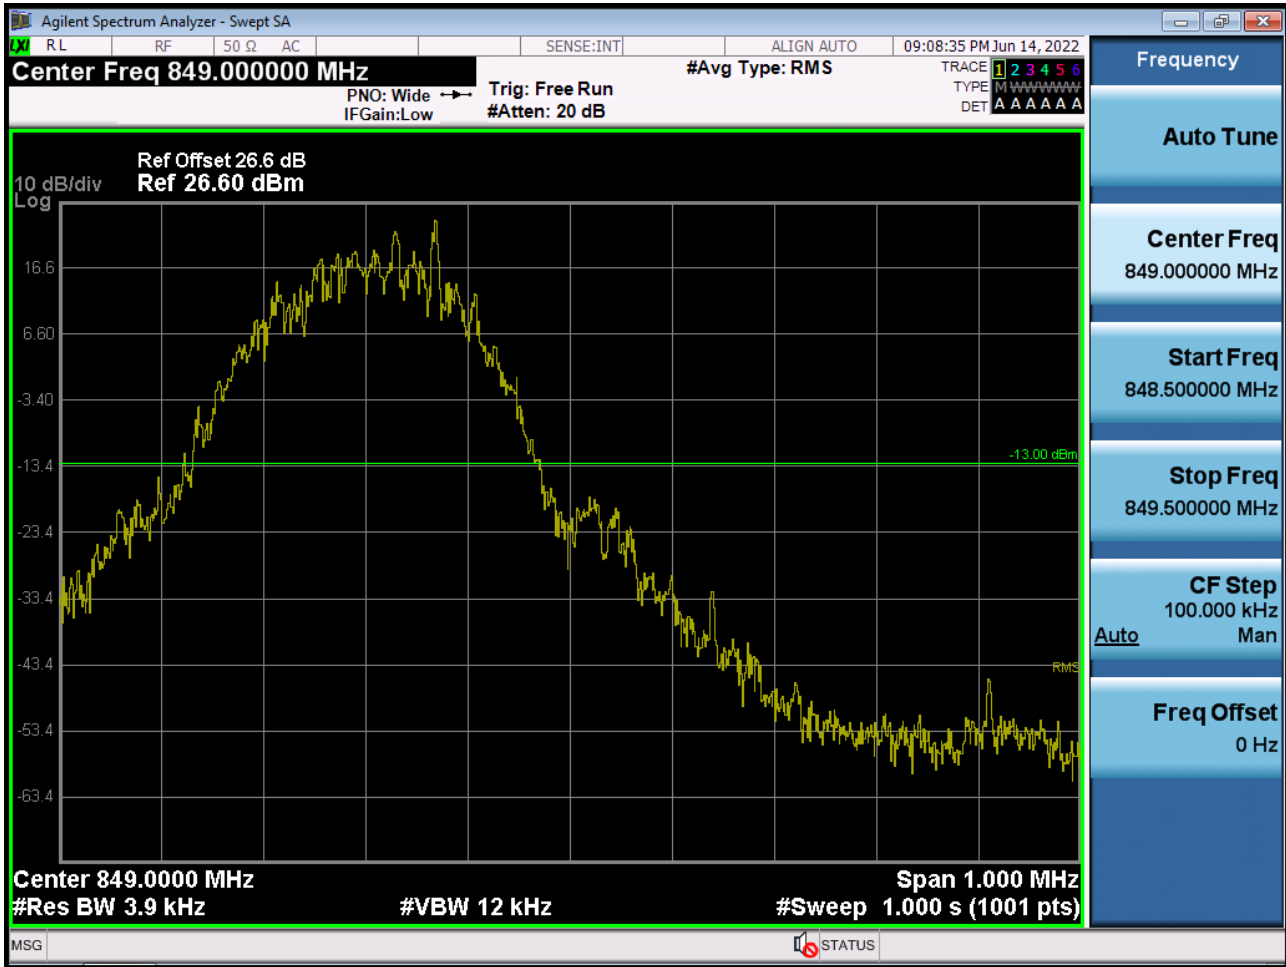


■ GSM850 MODE (251 CH.) Block Edge 2

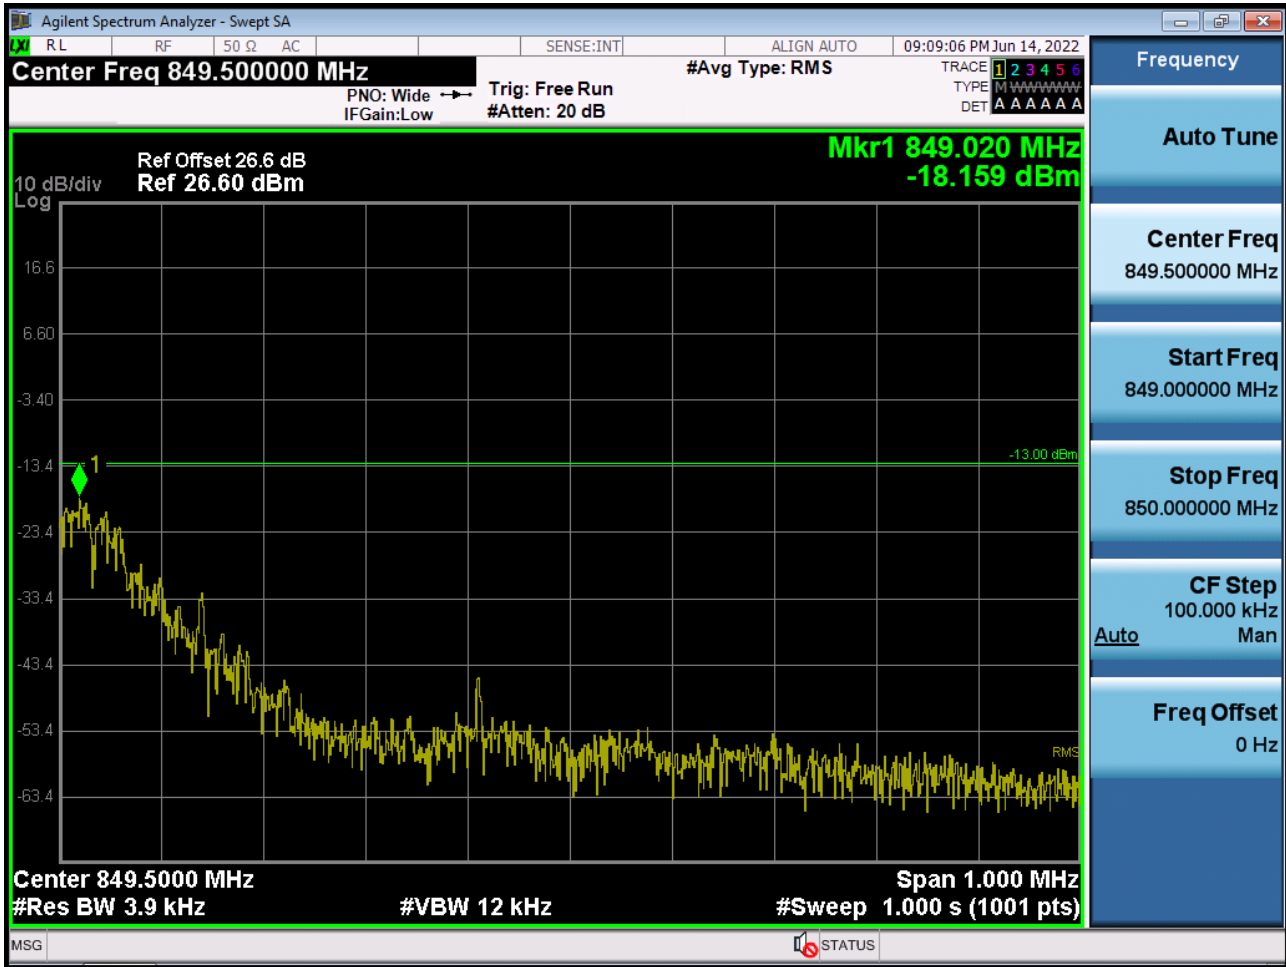


■ GSM850 MODE (251 CH.) Block Edge 3

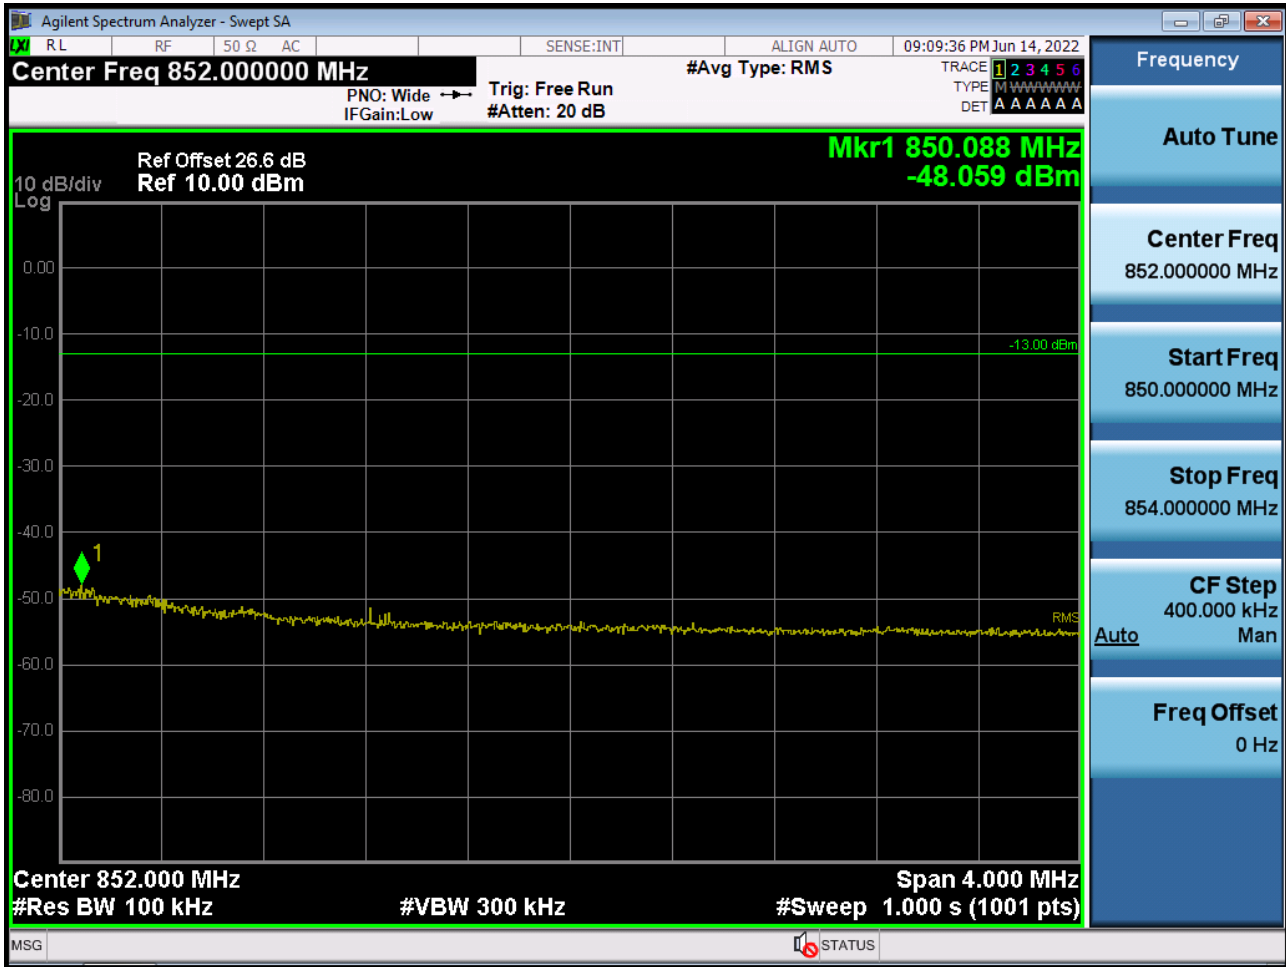


■ EDGE MODE (128 CH.) Block Edge 1

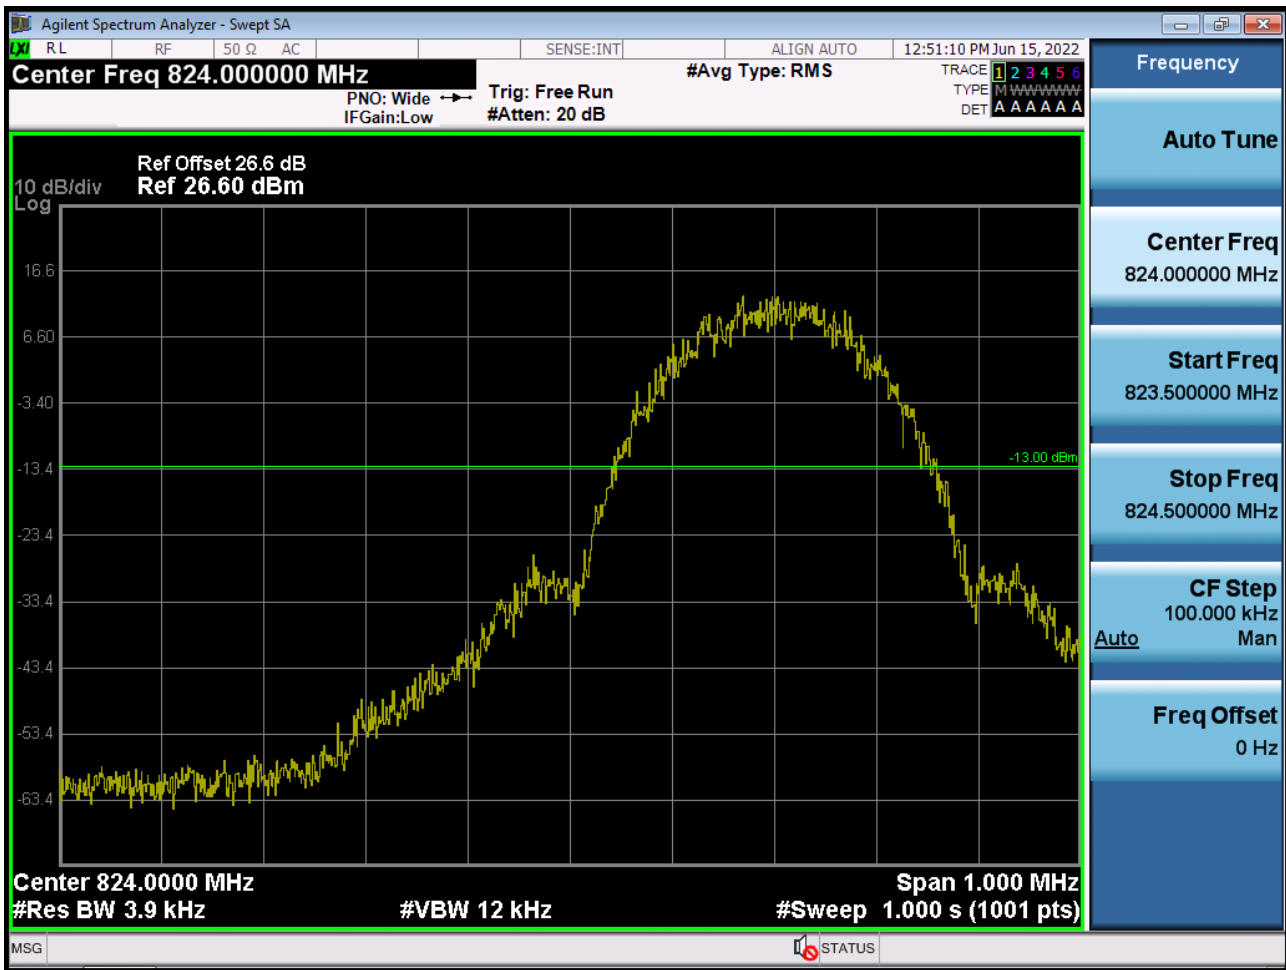


■ EDGE MODE (128 CH.) Block Edge 2

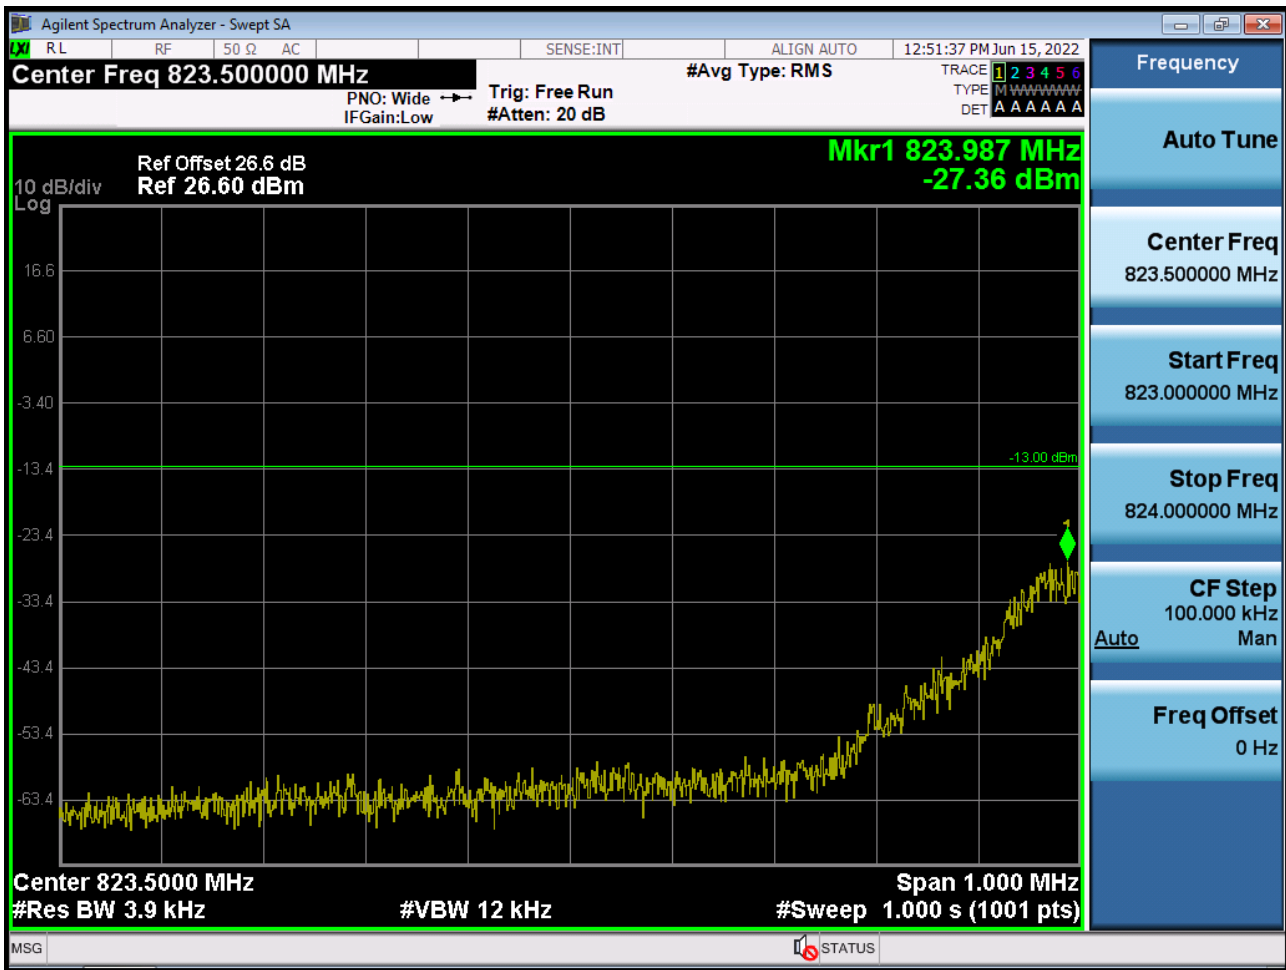


■ EDGE MODE (128 CH.) Block Edge 3

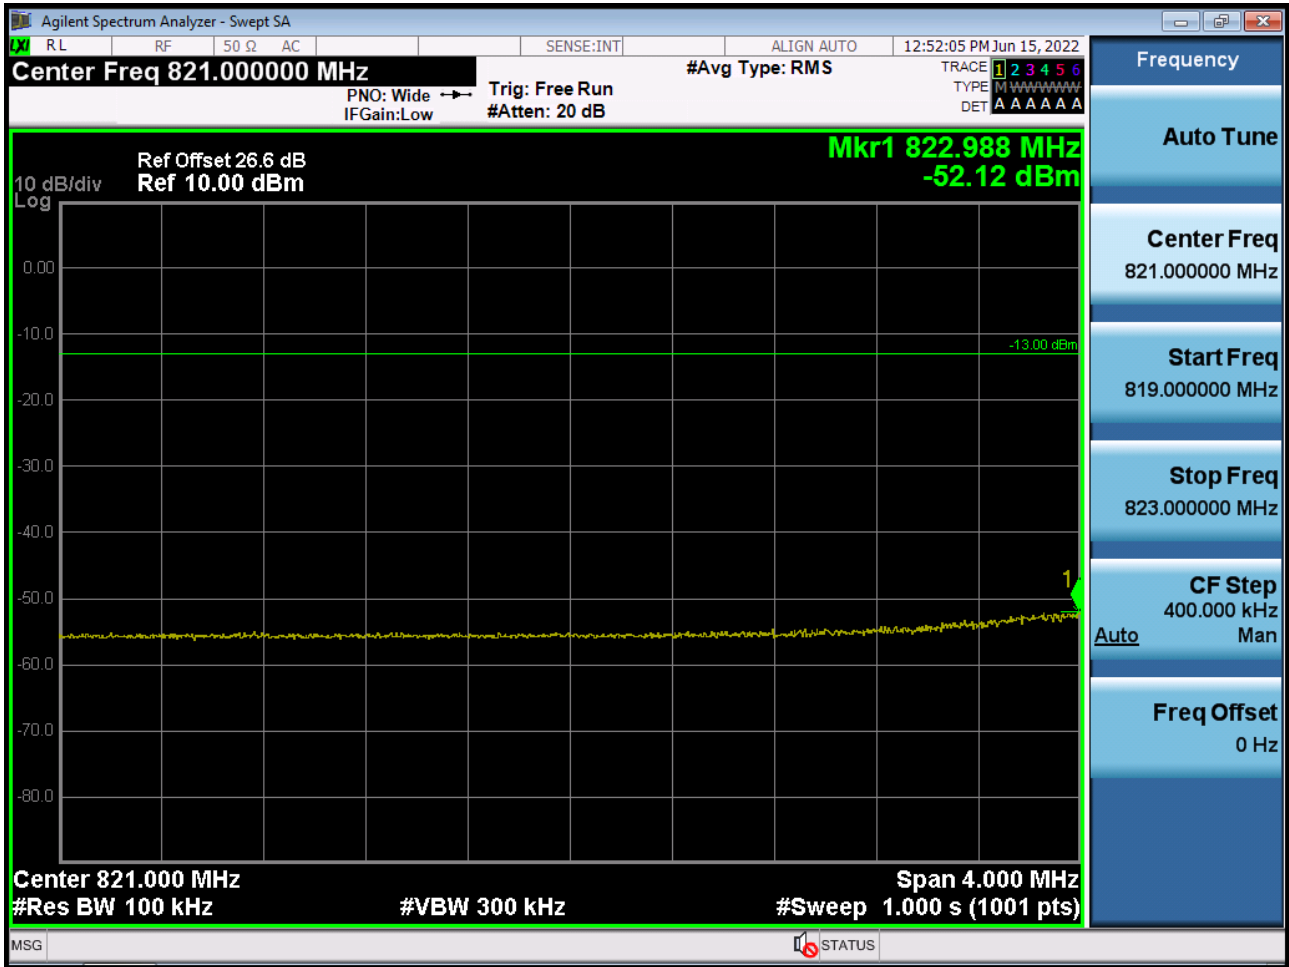


■ EDGE MODE (251 CH.) Block Edge 1

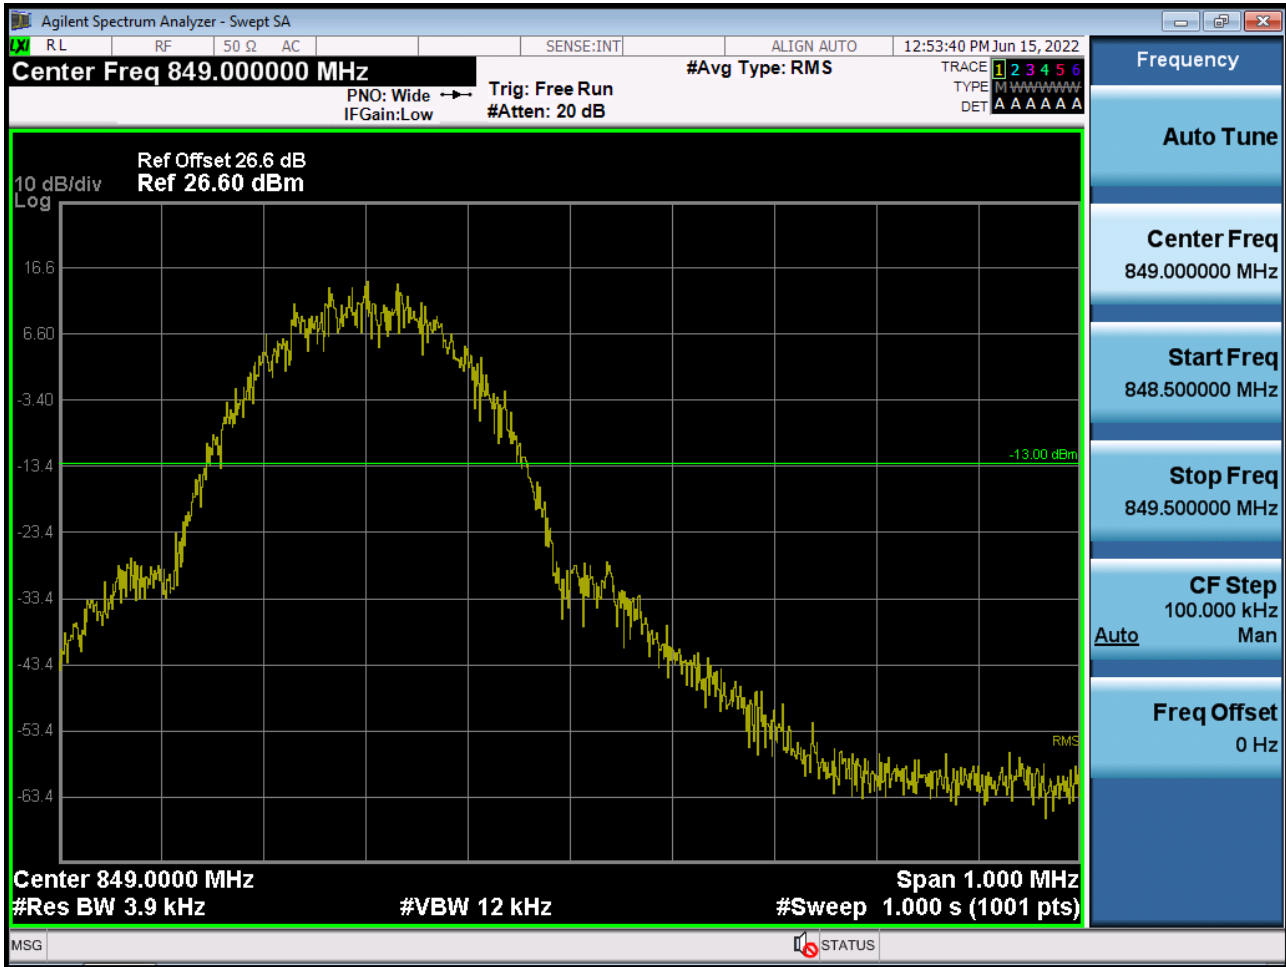


■ EDGE MODE (251 CH.) Block Edge 2

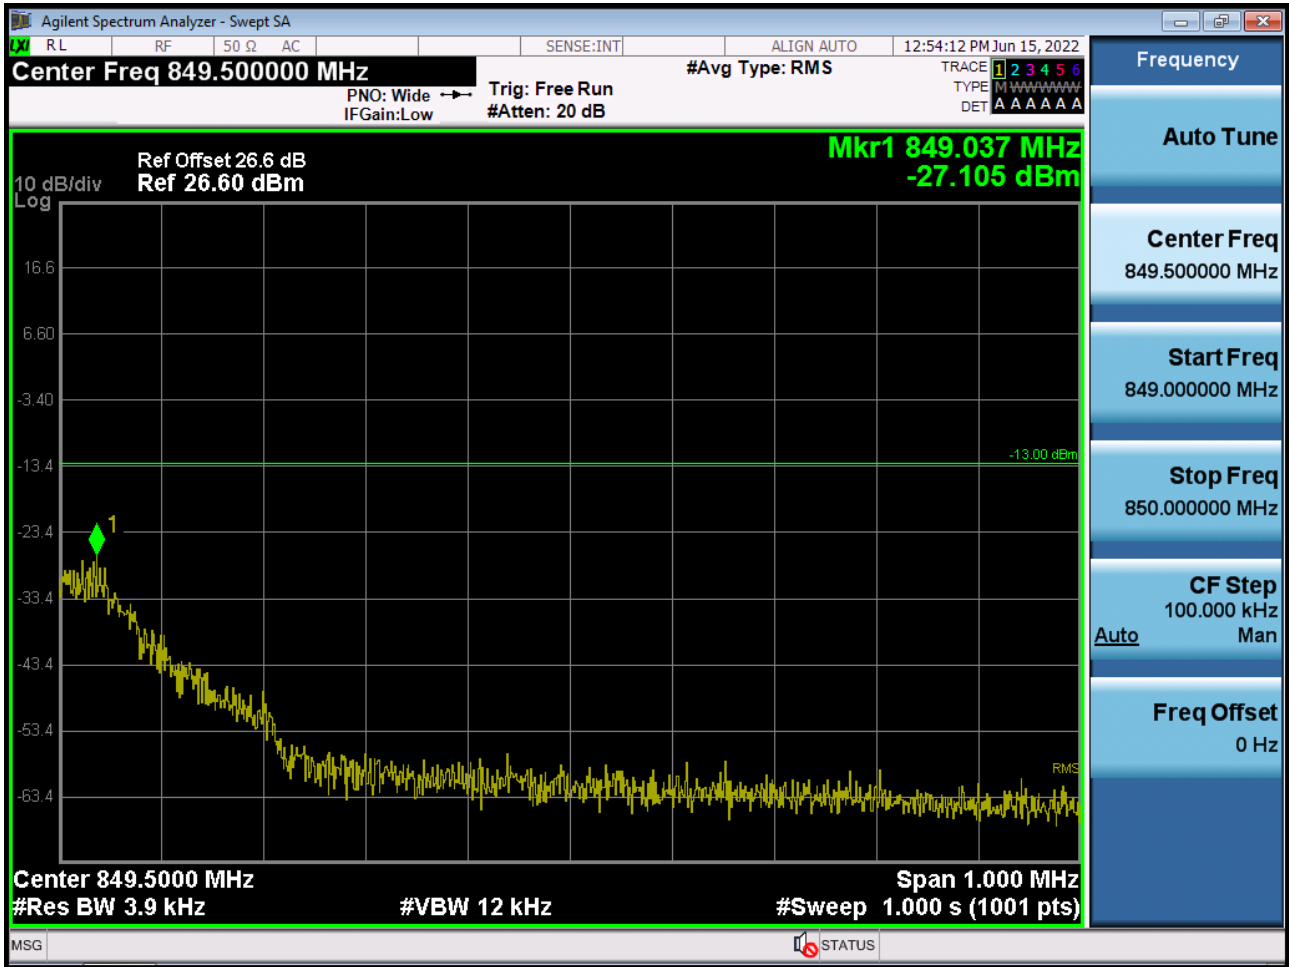


■ EDGE MODE (251 CH.) Block Edge 3

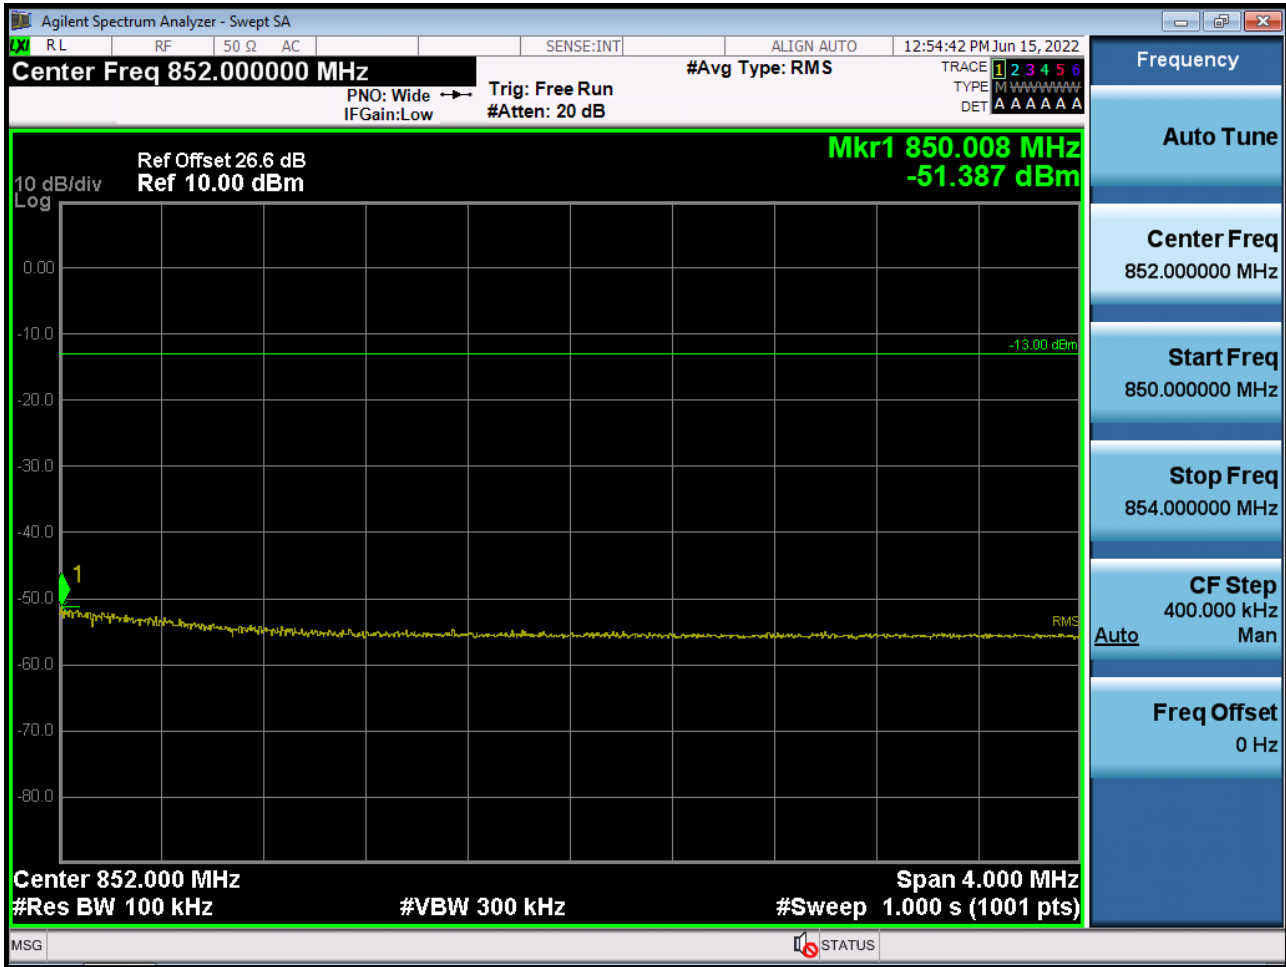


■ GSM1900 MODE (512 CH.) Block Edge 1

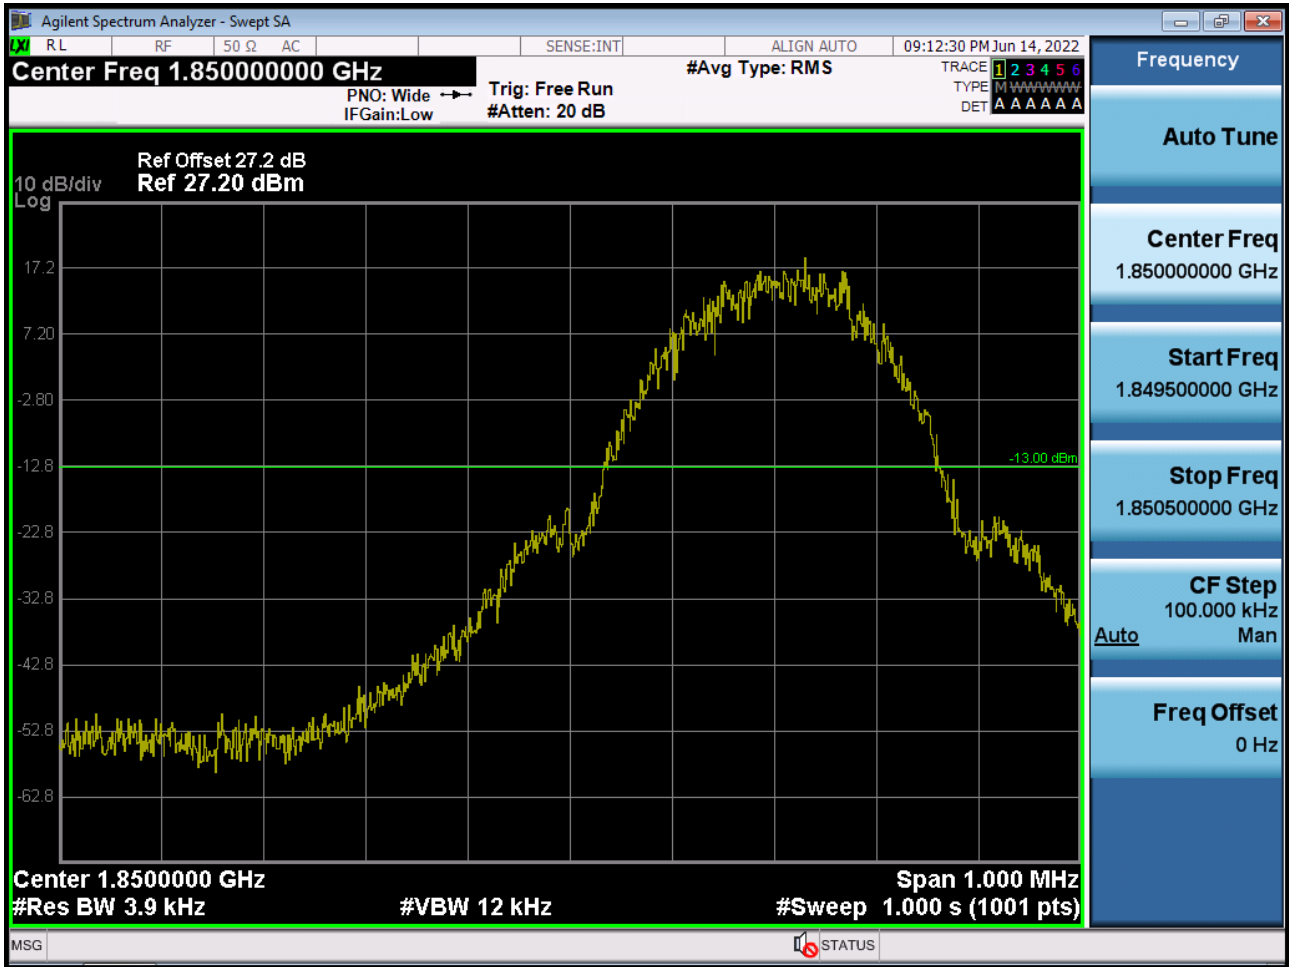

■ GSM1900 MODE (512 CH.) Block Edge 2

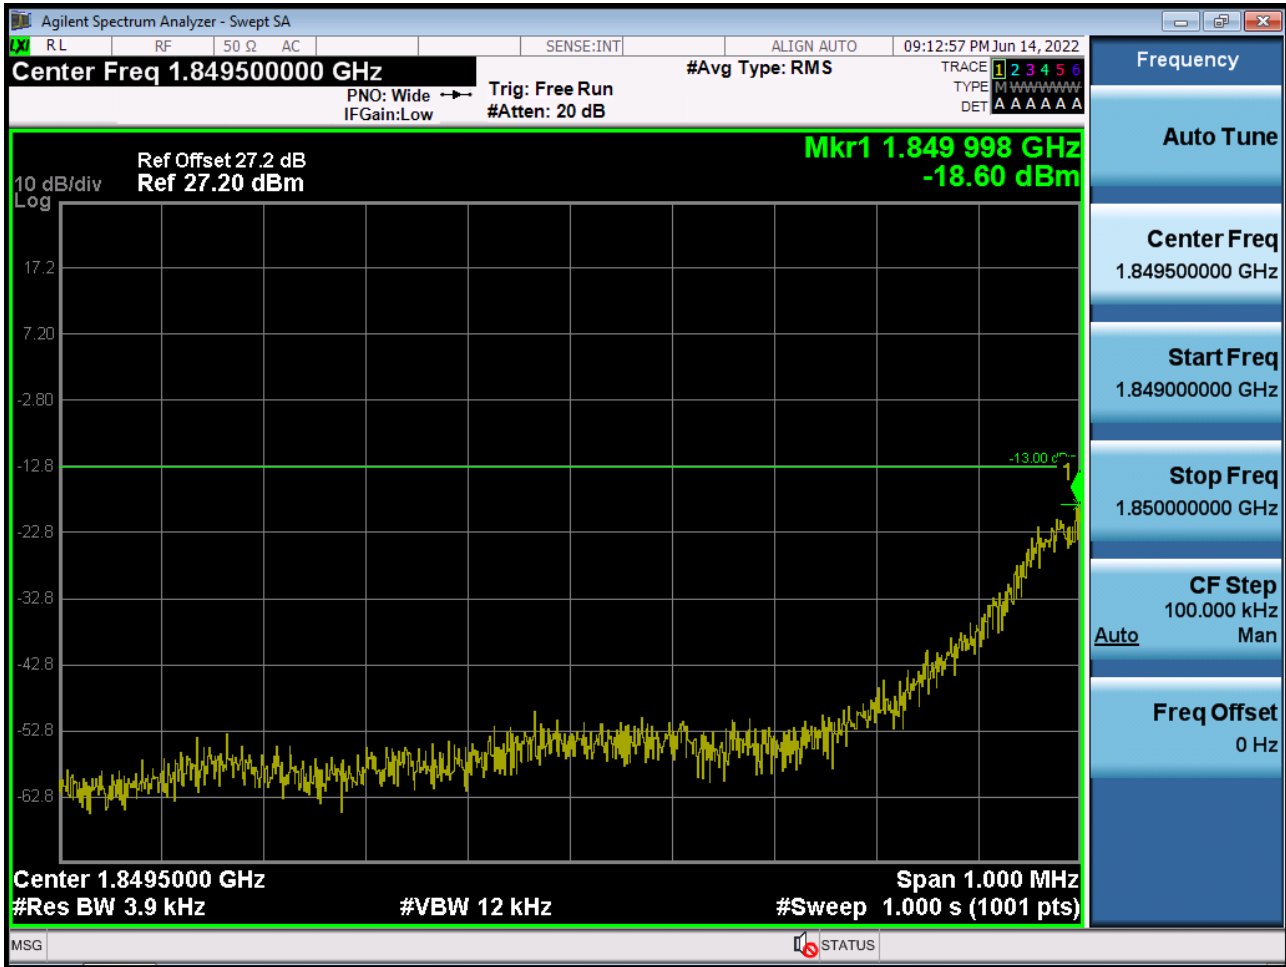


■ GSM1900 MODE (512 CH.) Block Edge 3

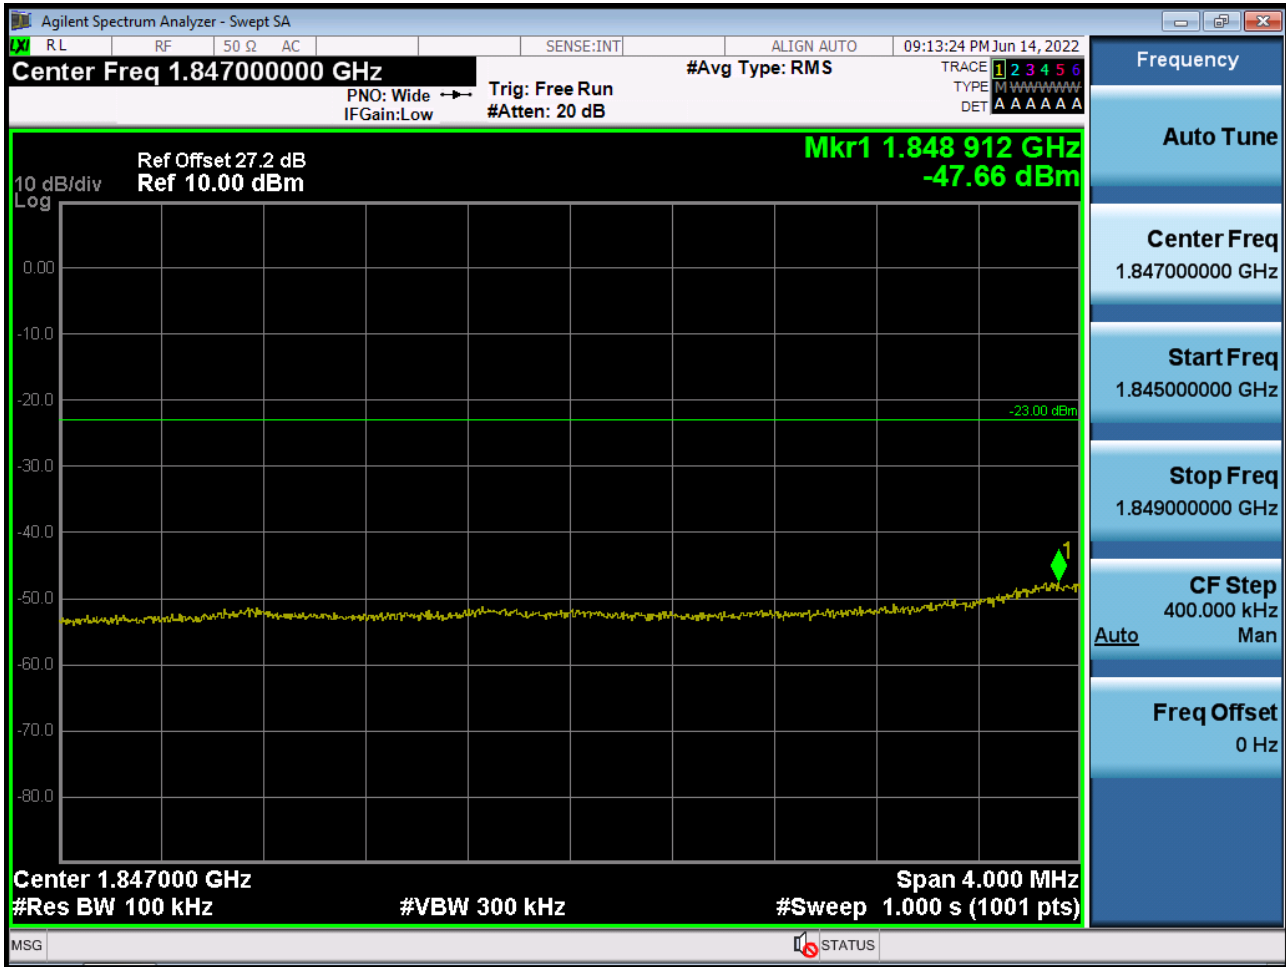


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -47.66 dBm + 10 dB = -37.66 dBm

■ GSM1900 MODE (810 CH.) Block Edge 1

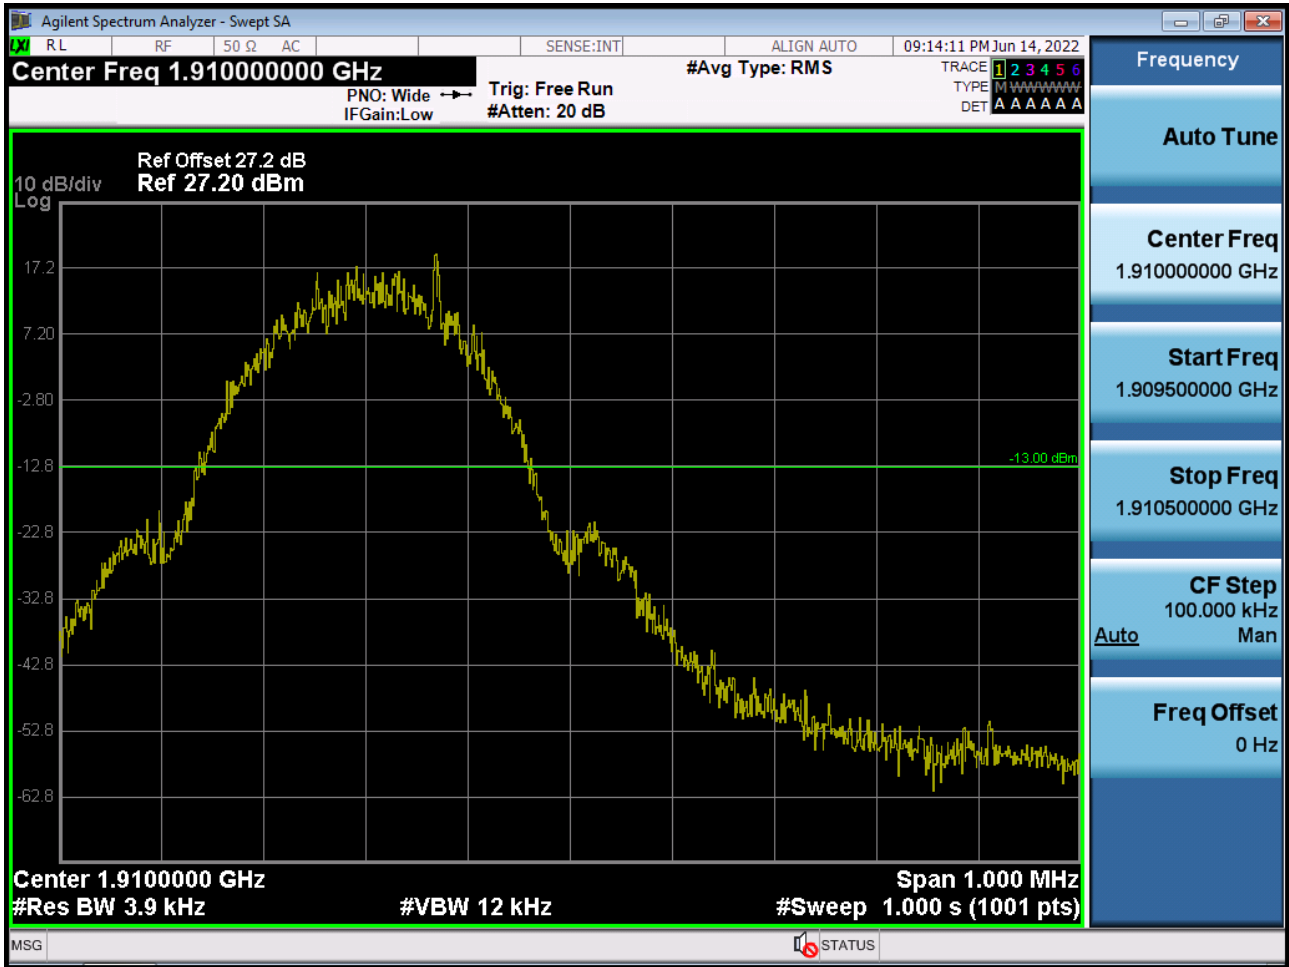

■ GSM1900 MODE (810 CH.) Block Edge 2

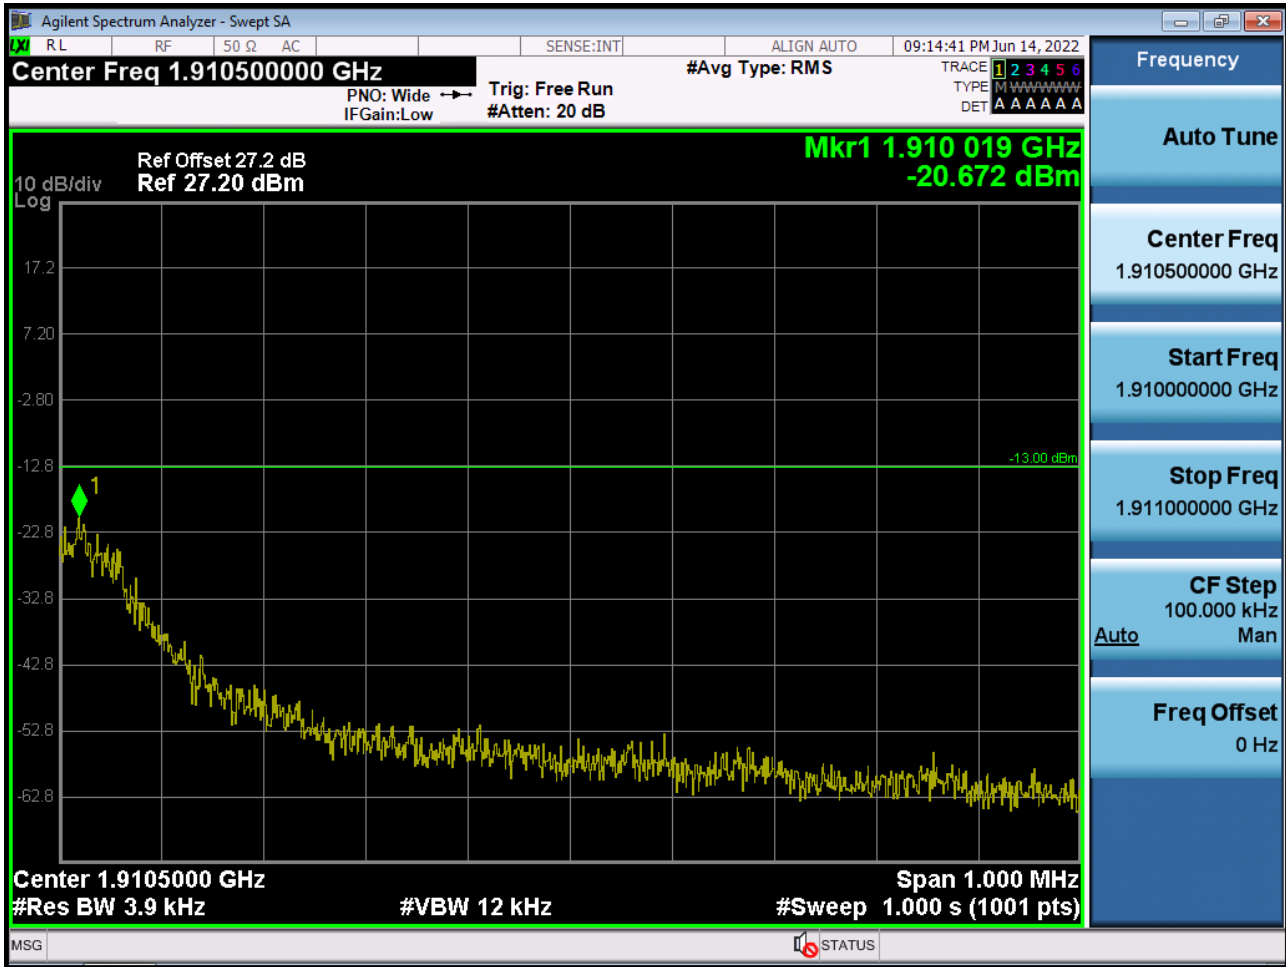


■ GSM1900 MODE (810 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -48.402 dBm + 10 dB = -38.402 dBm

■ EDGE MODE (512 CH.) Block Edge 1

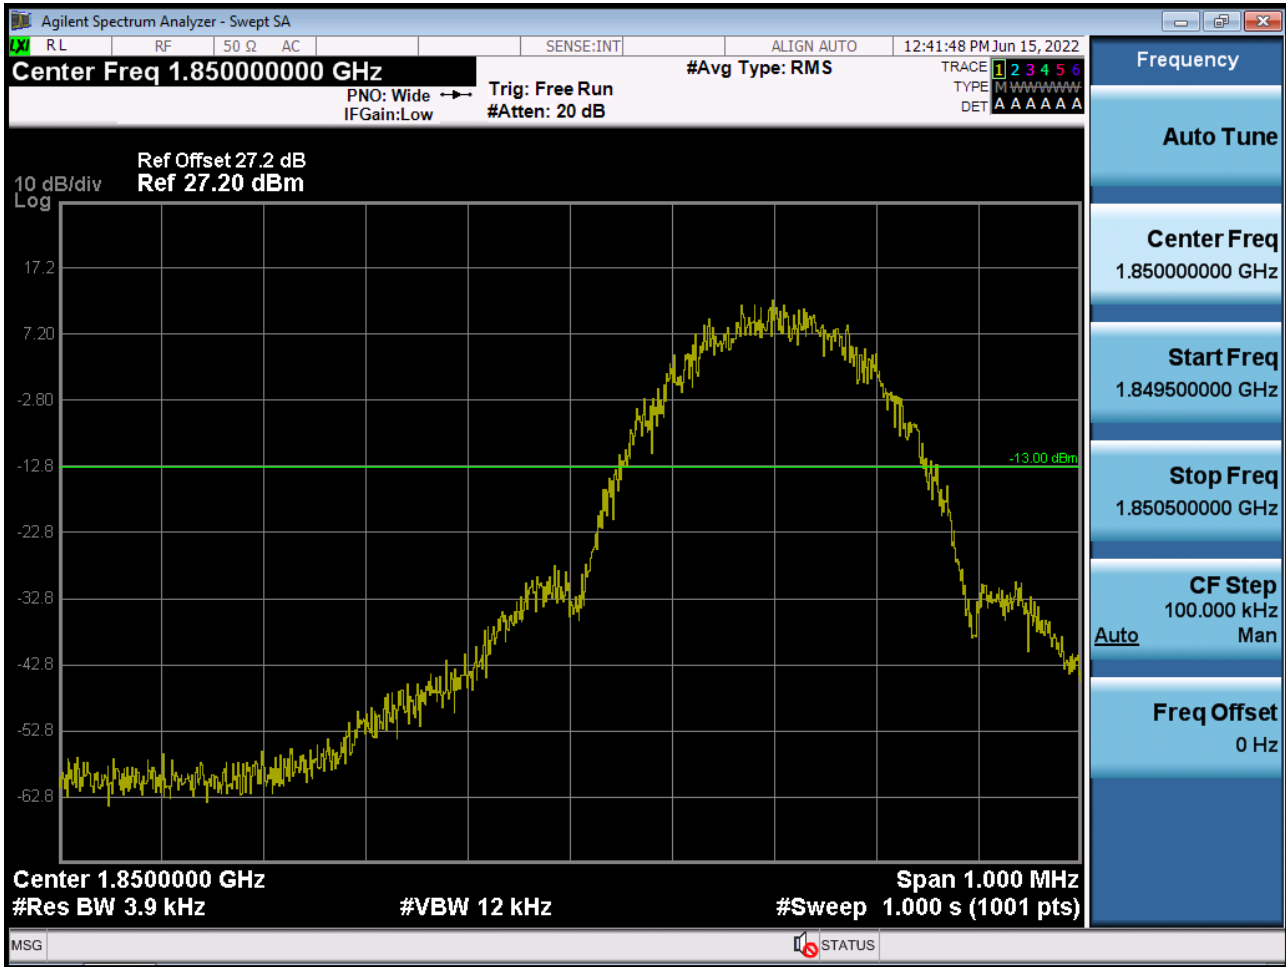

■ EDGE MODE (512 CH.) Block Edge 2

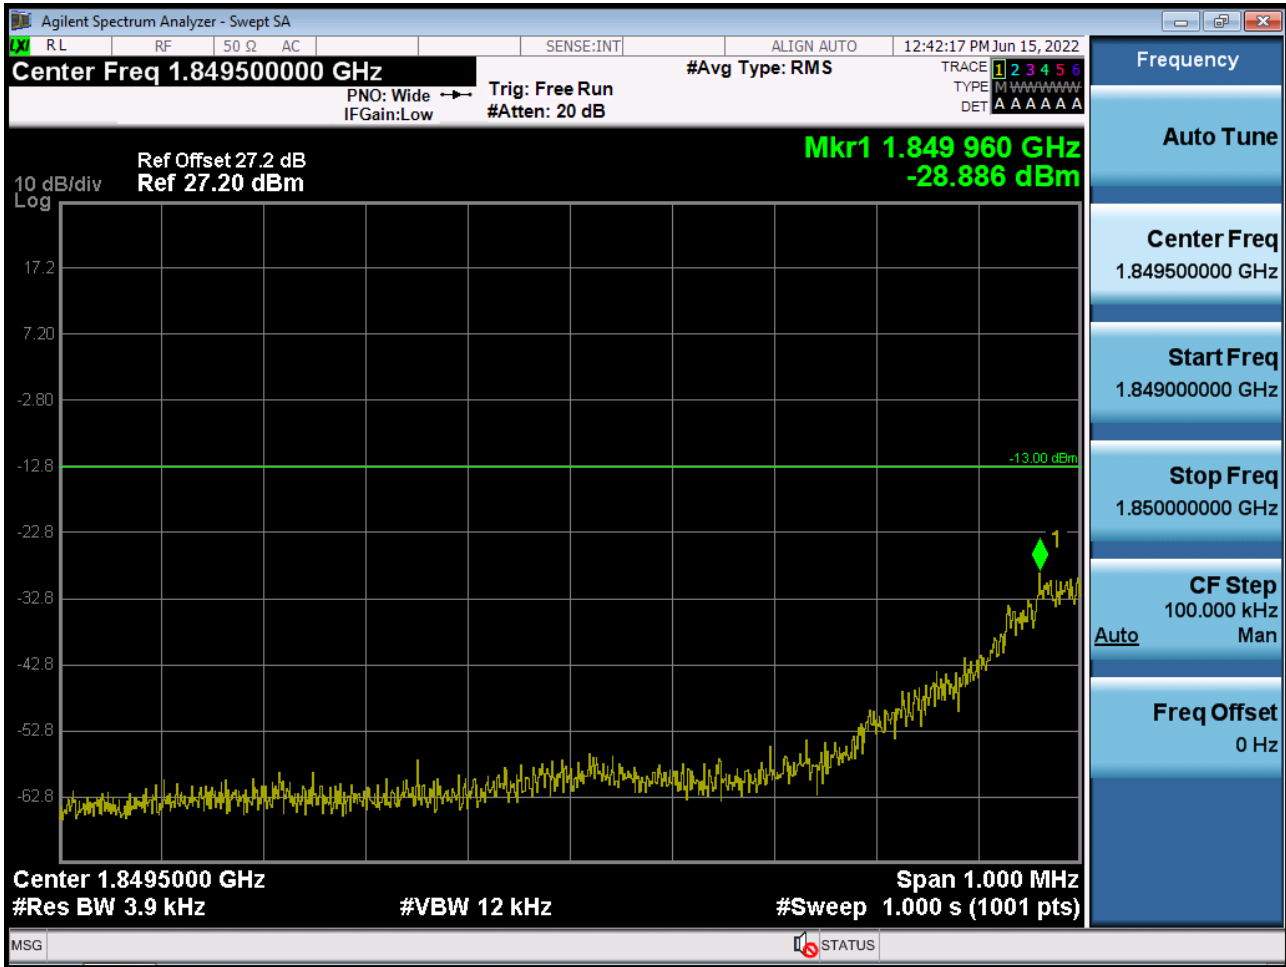

■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -51.34 dBm + 10 dB = -41.34 dBm

■ EDGE MODE (810 CH.) Block Edge 1



■ EDGE MODE (810 CH.) Block Edge 2

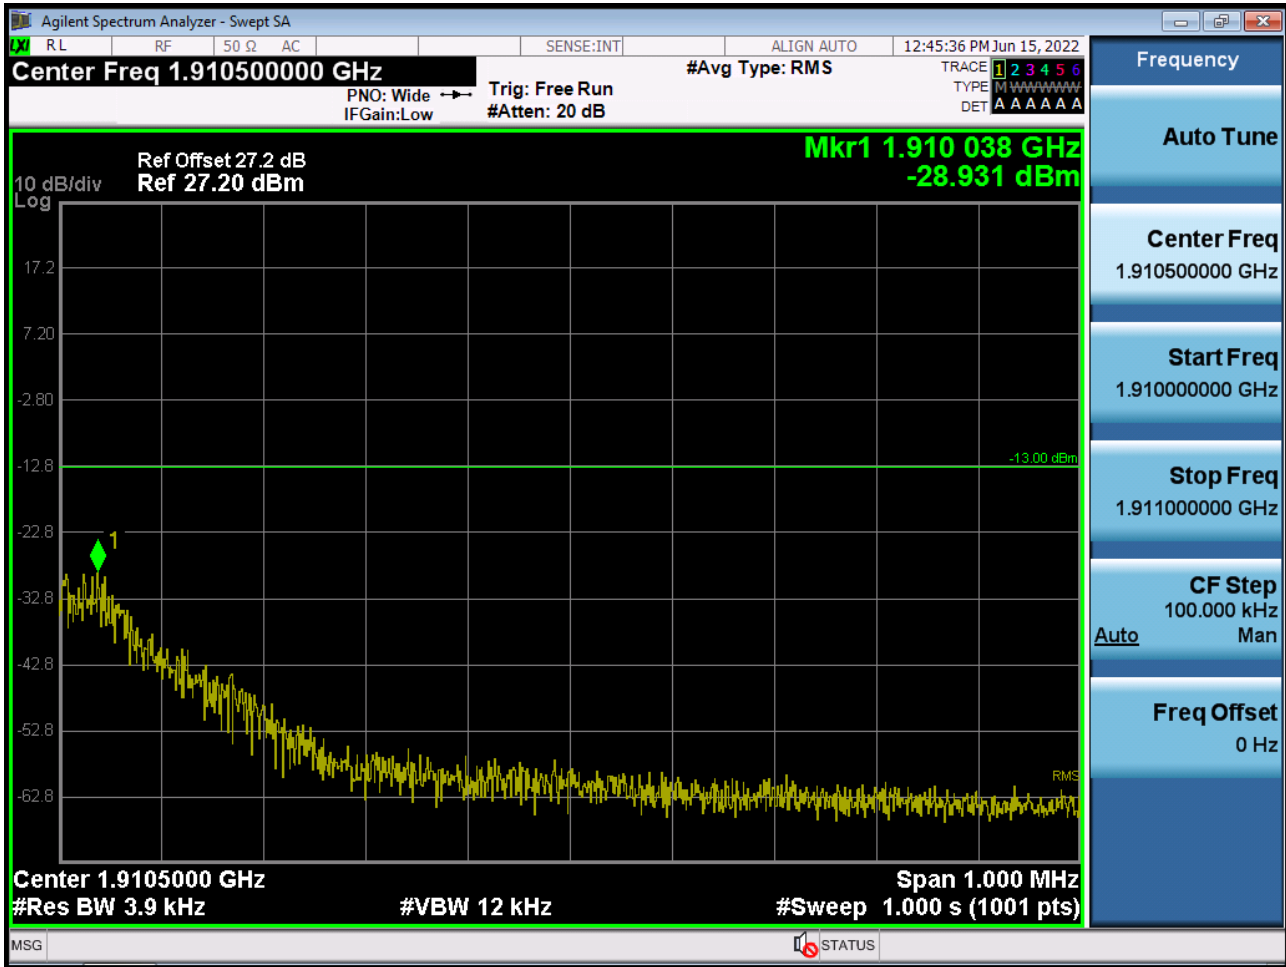

■ EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.729 dBm + 10 dB = -40.729 dBm

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Block Edge



■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span



■ WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




■ WCDMA1700 MODE (1513 CH.) Block Edge




■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

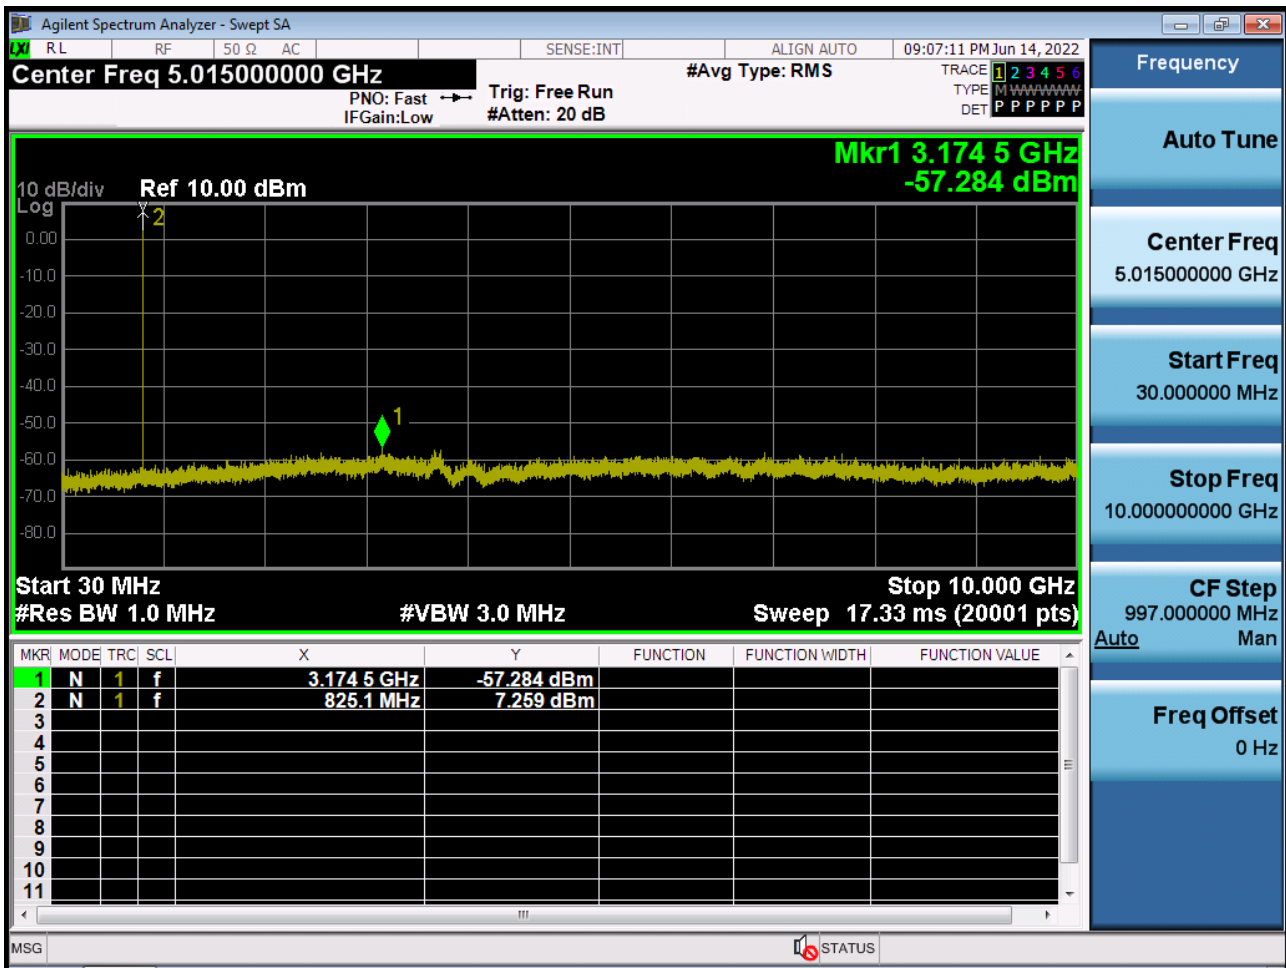


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

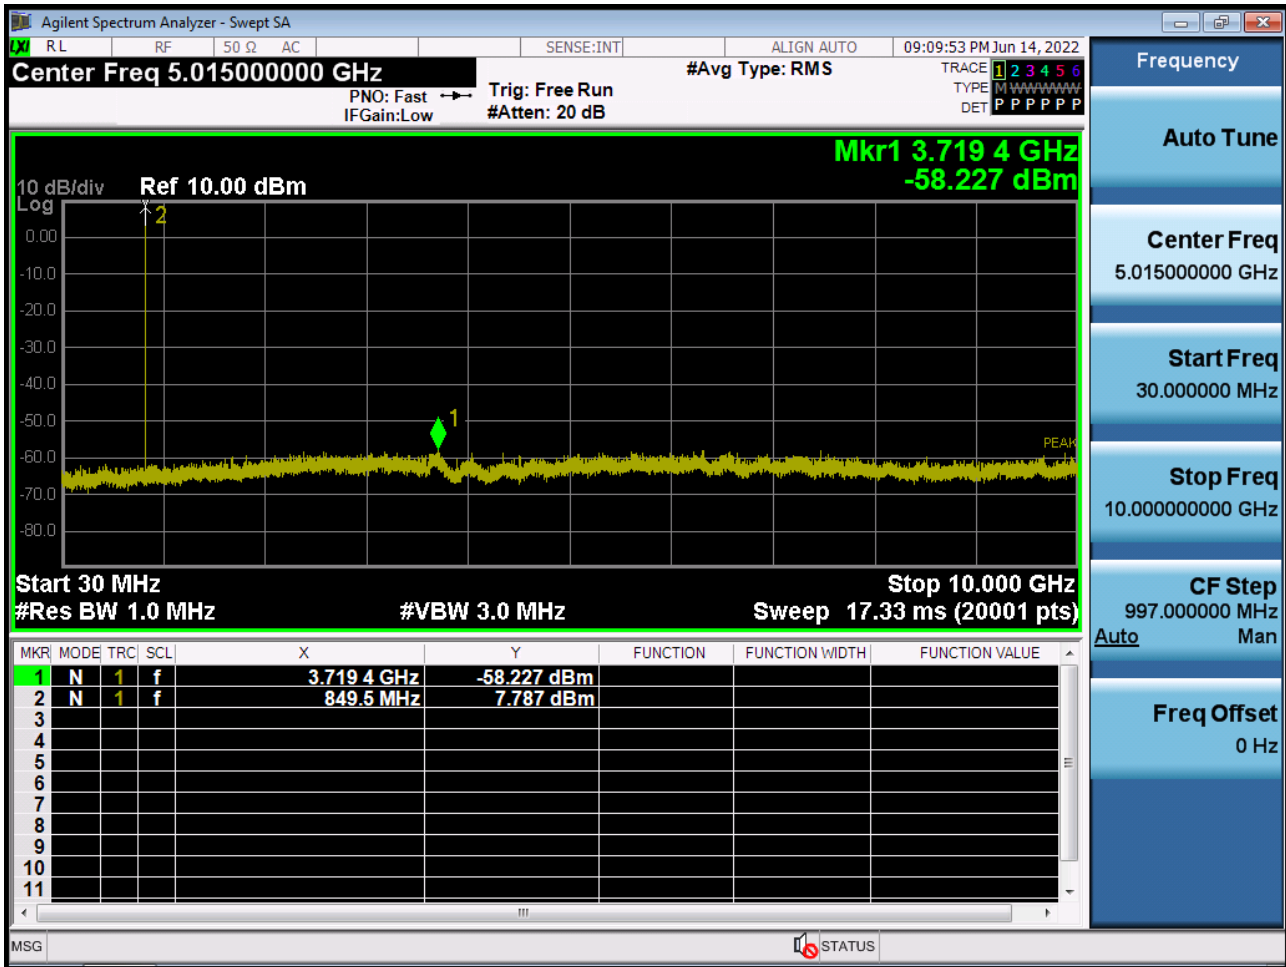


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

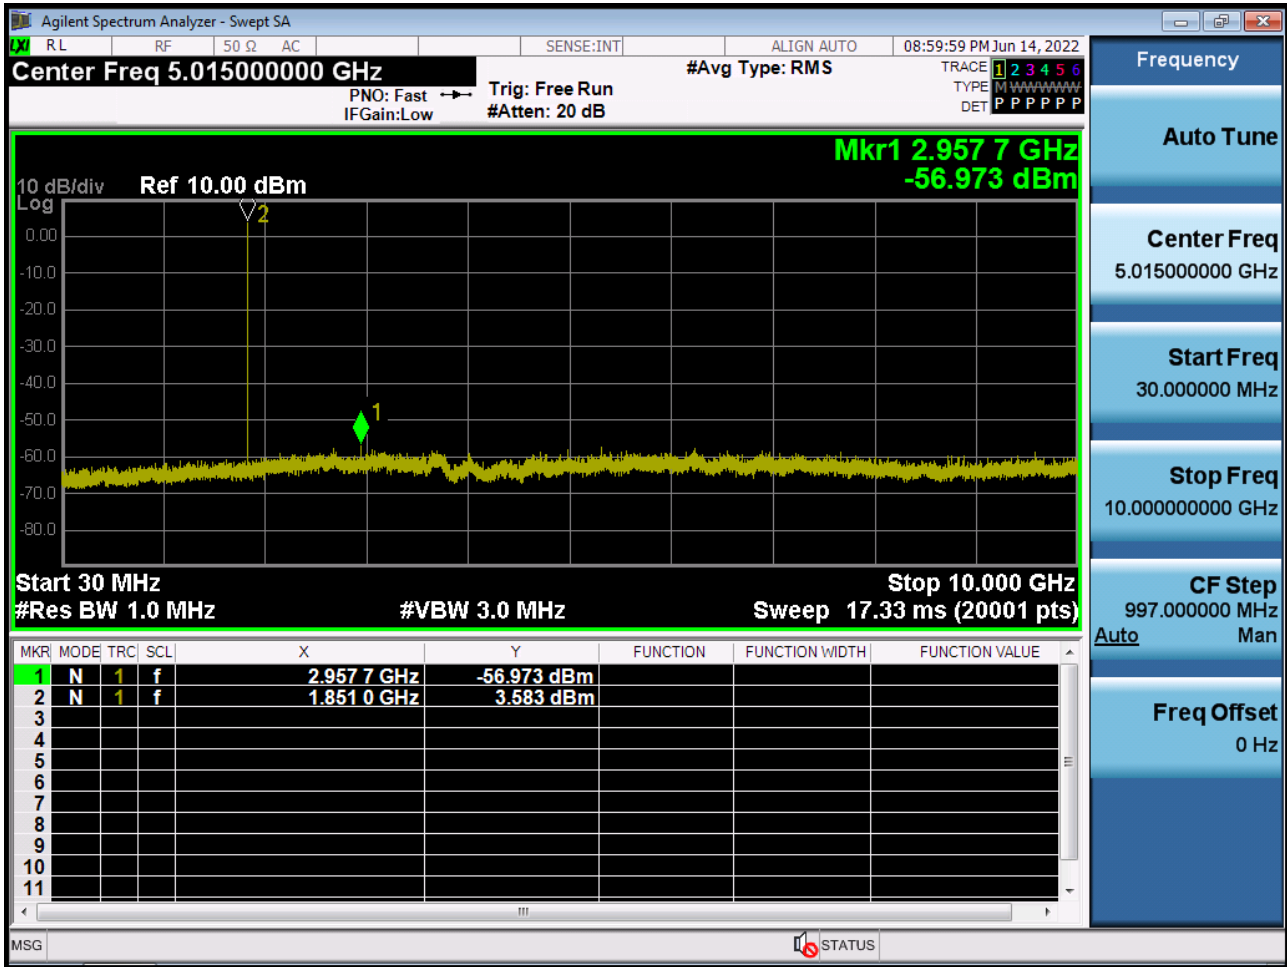


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

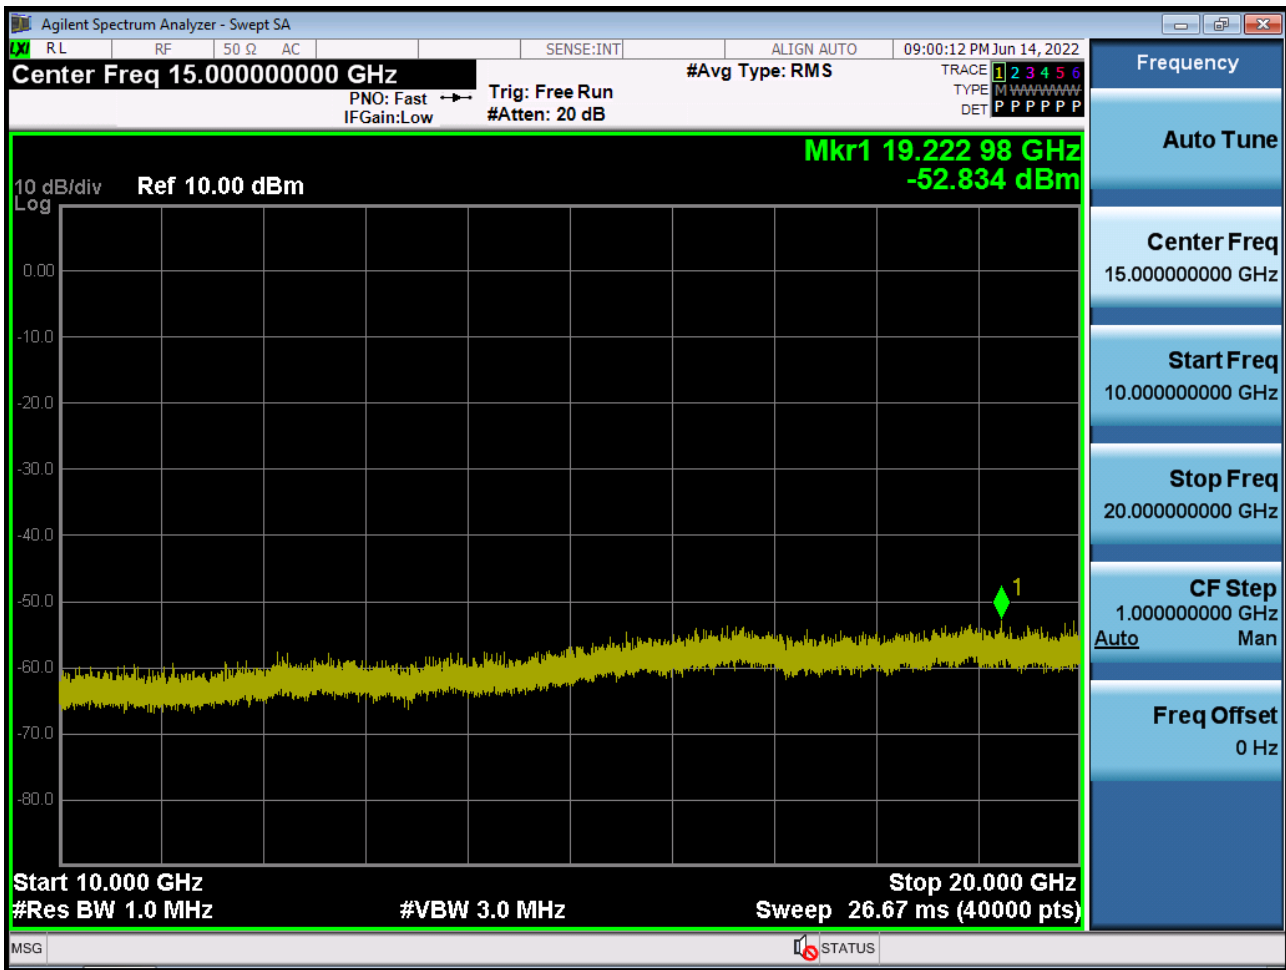


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

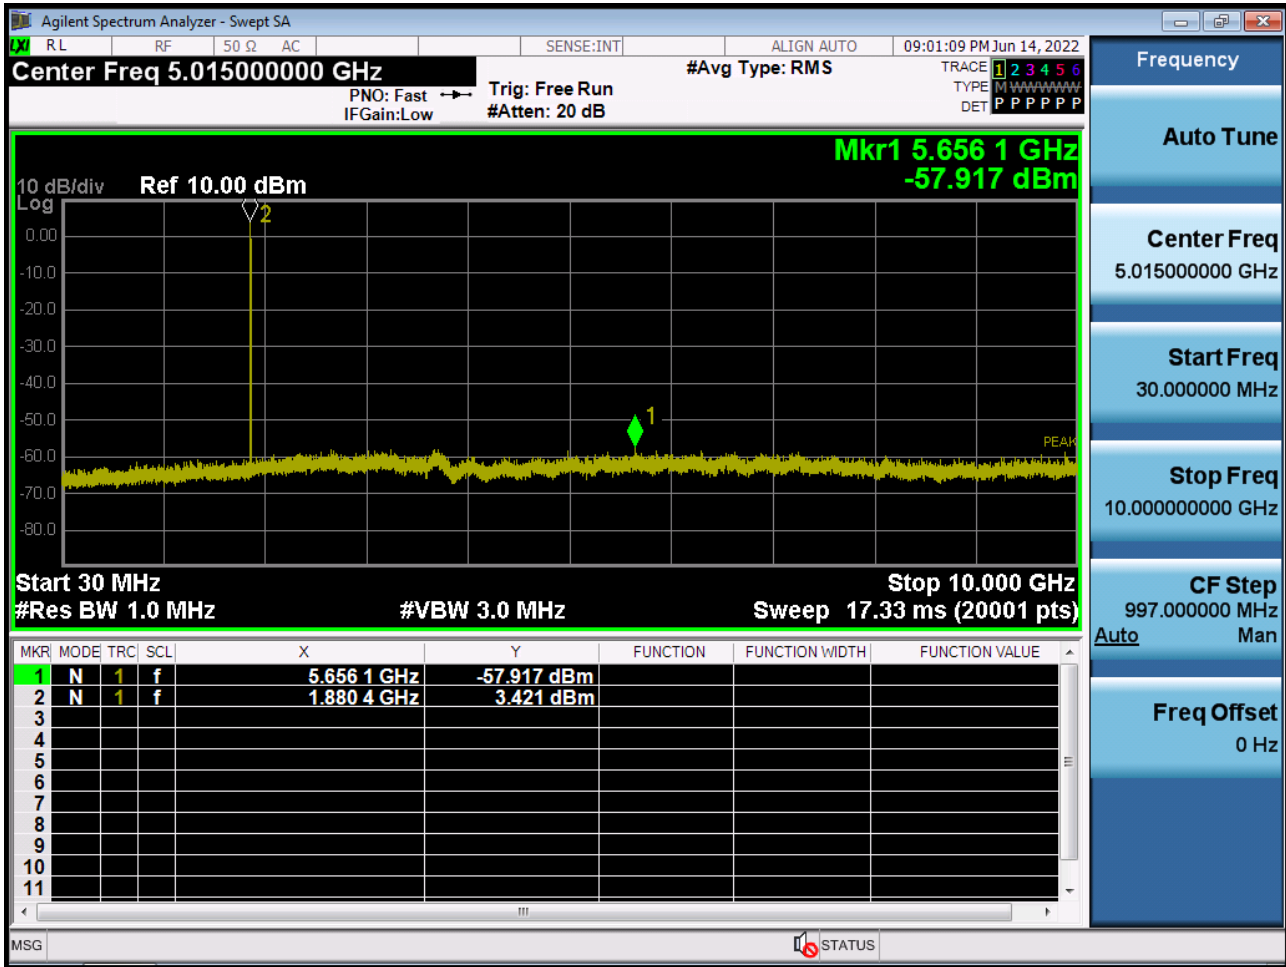


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

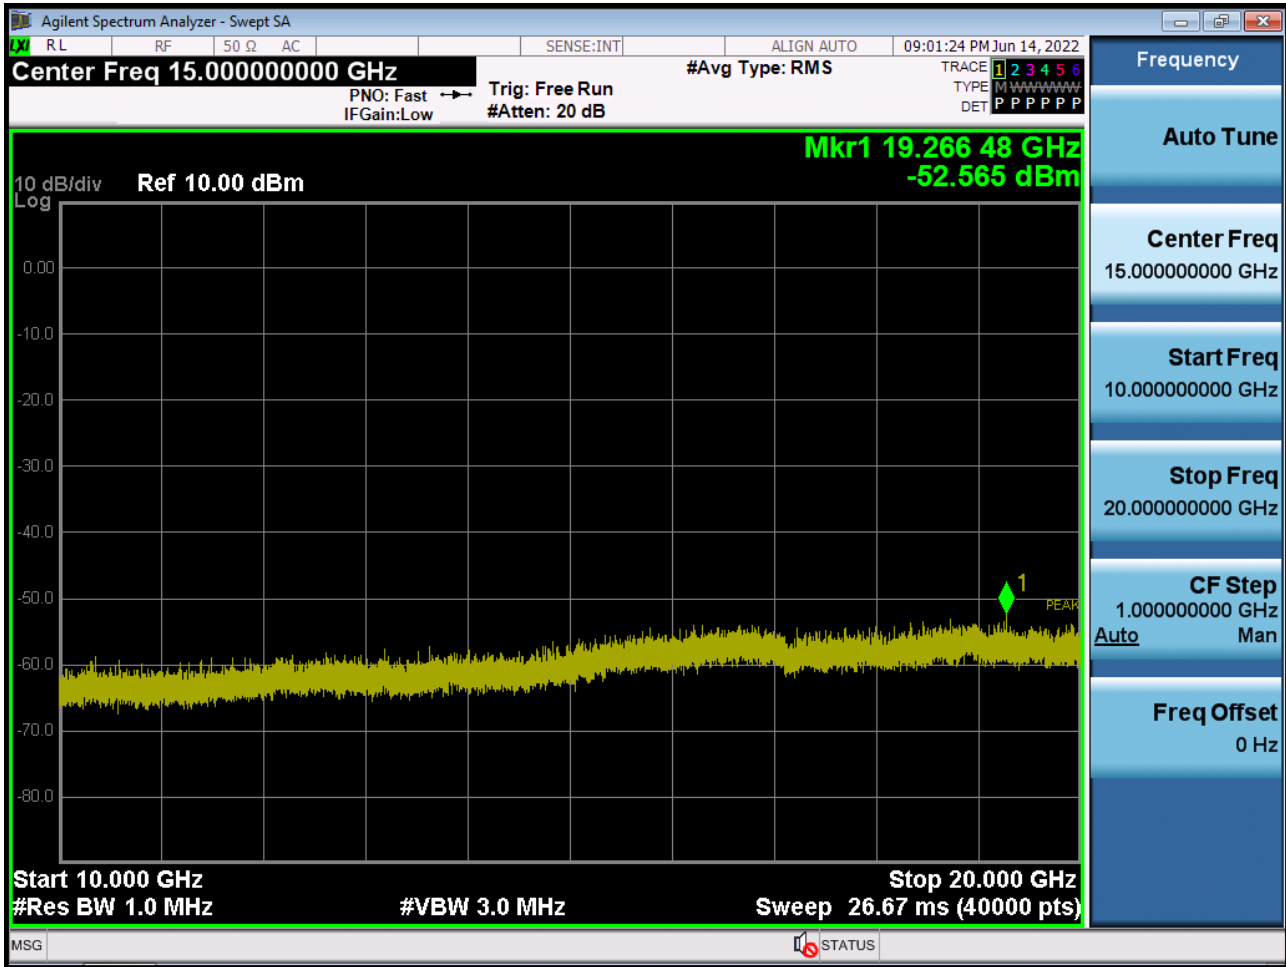


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

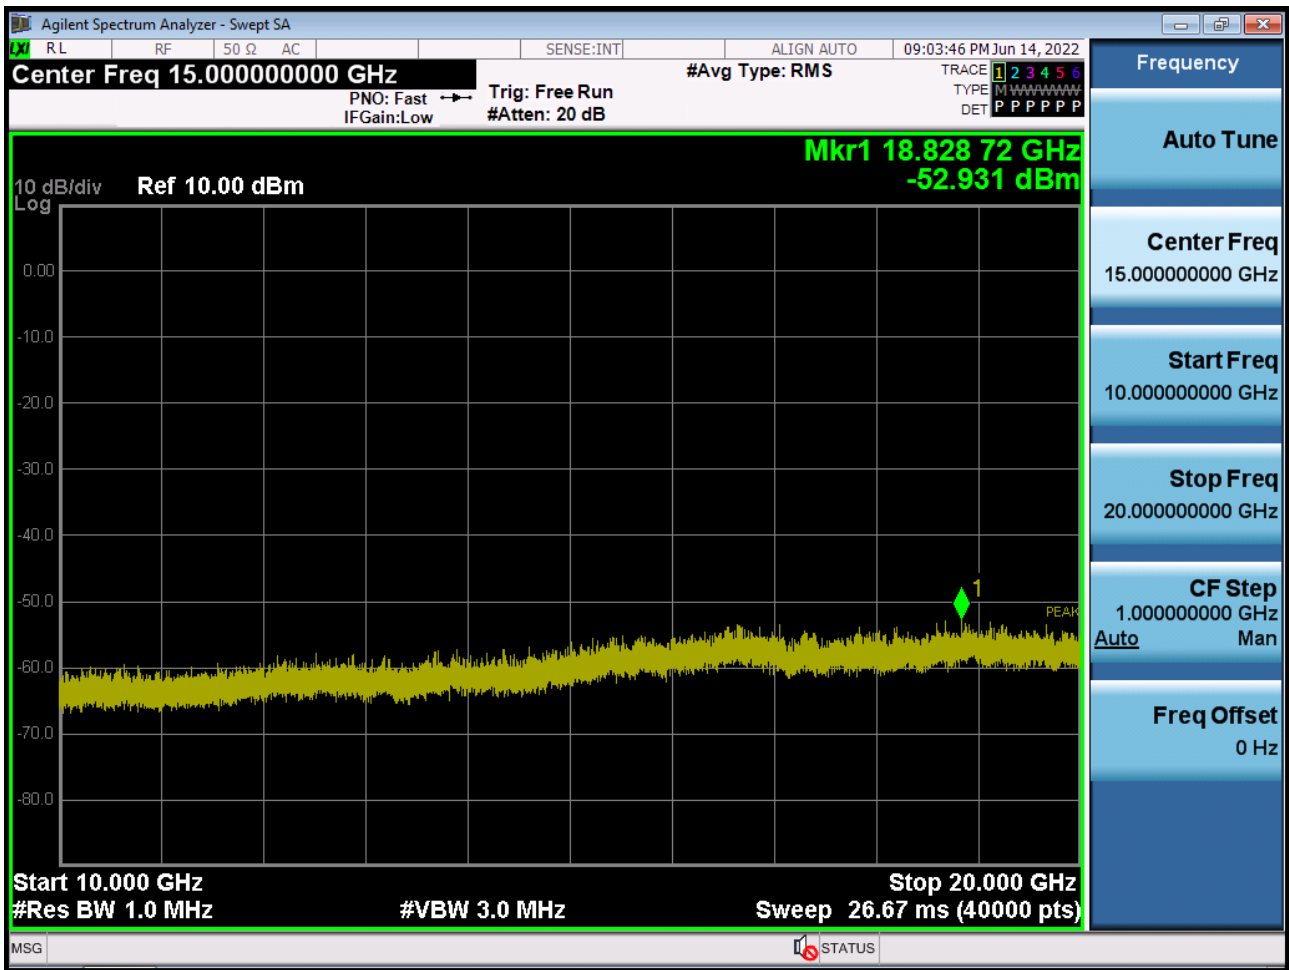


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

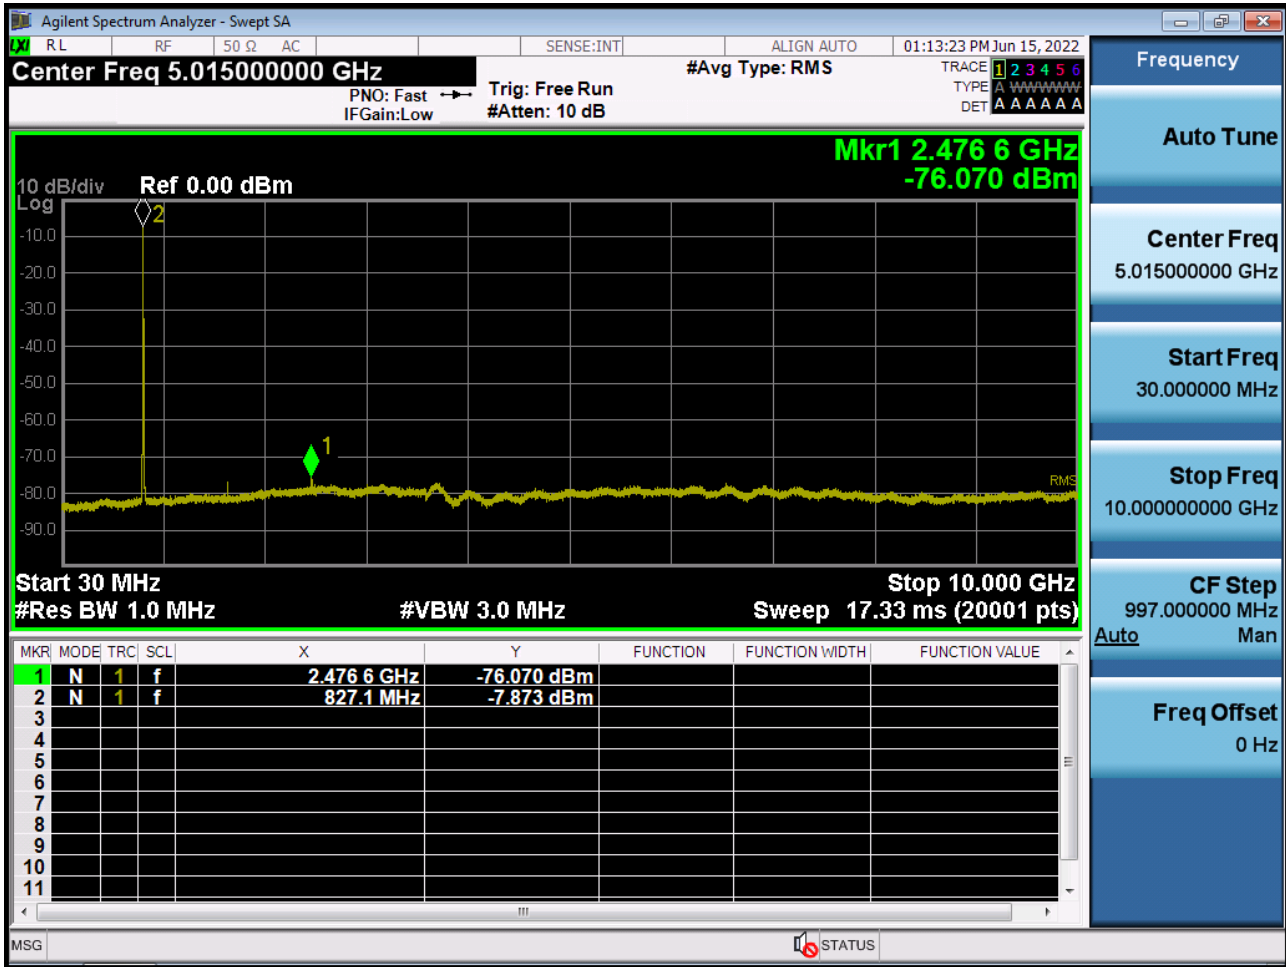


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

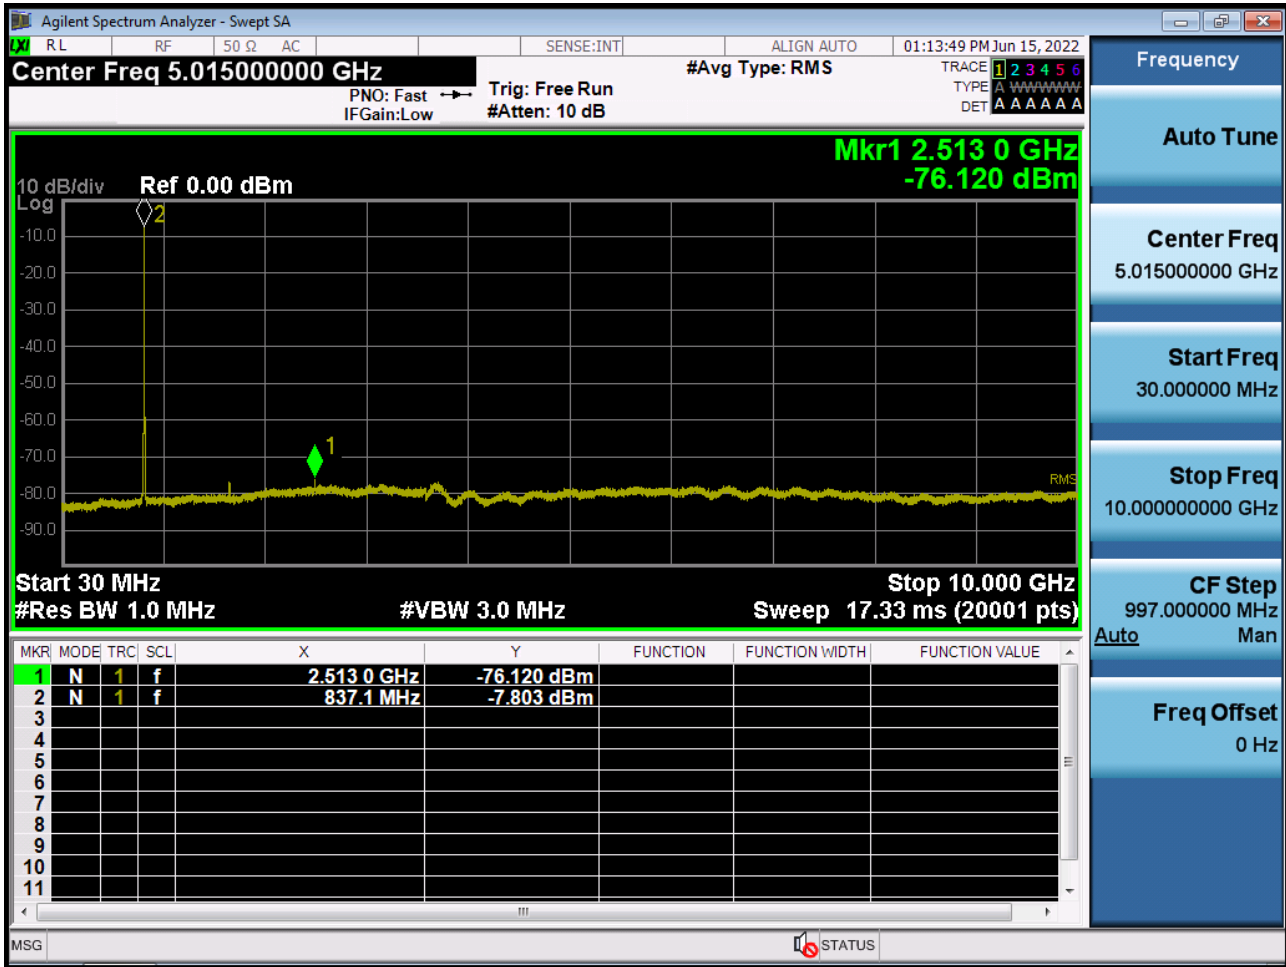

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

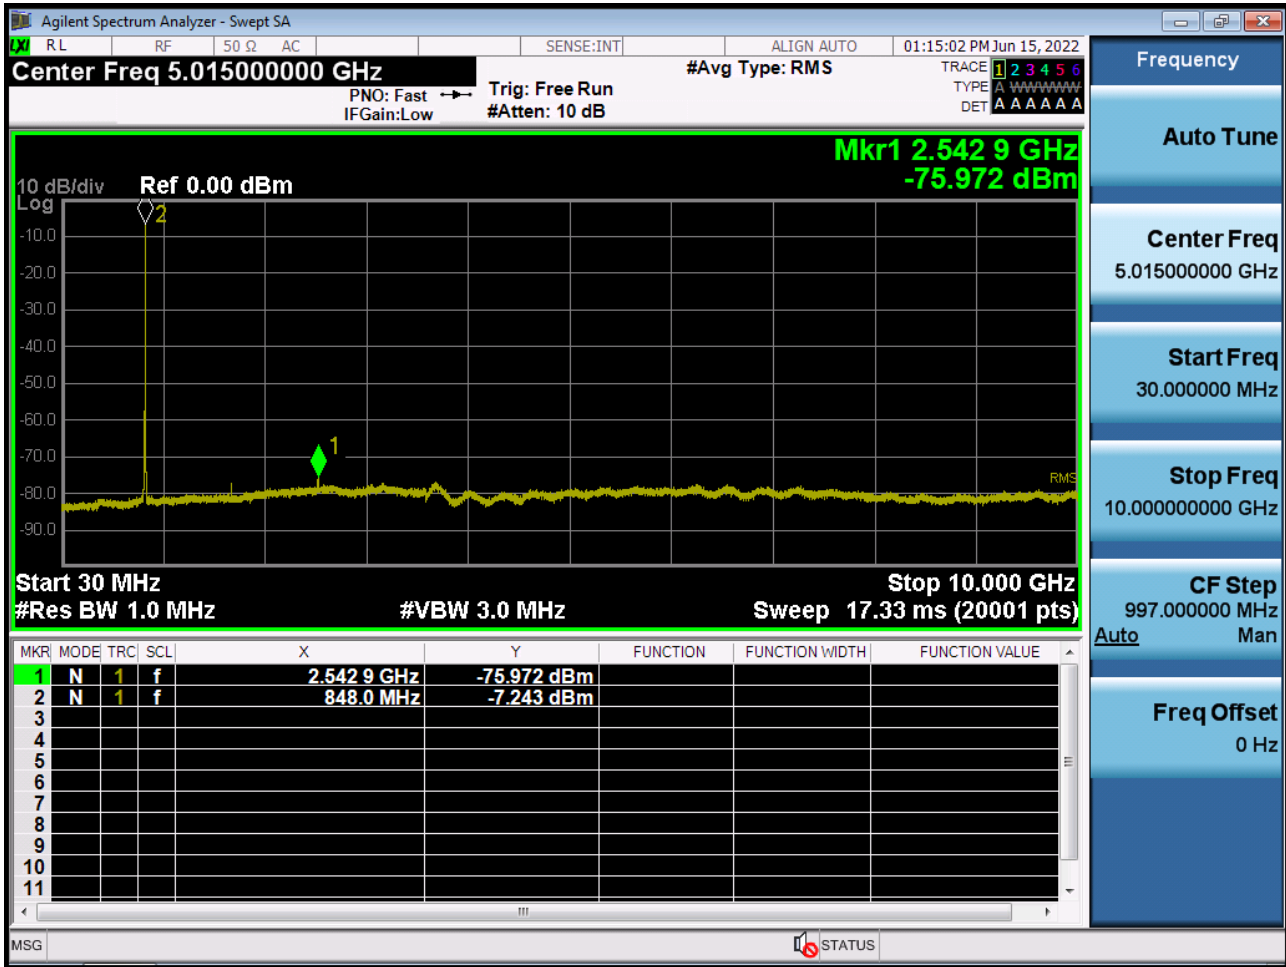


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

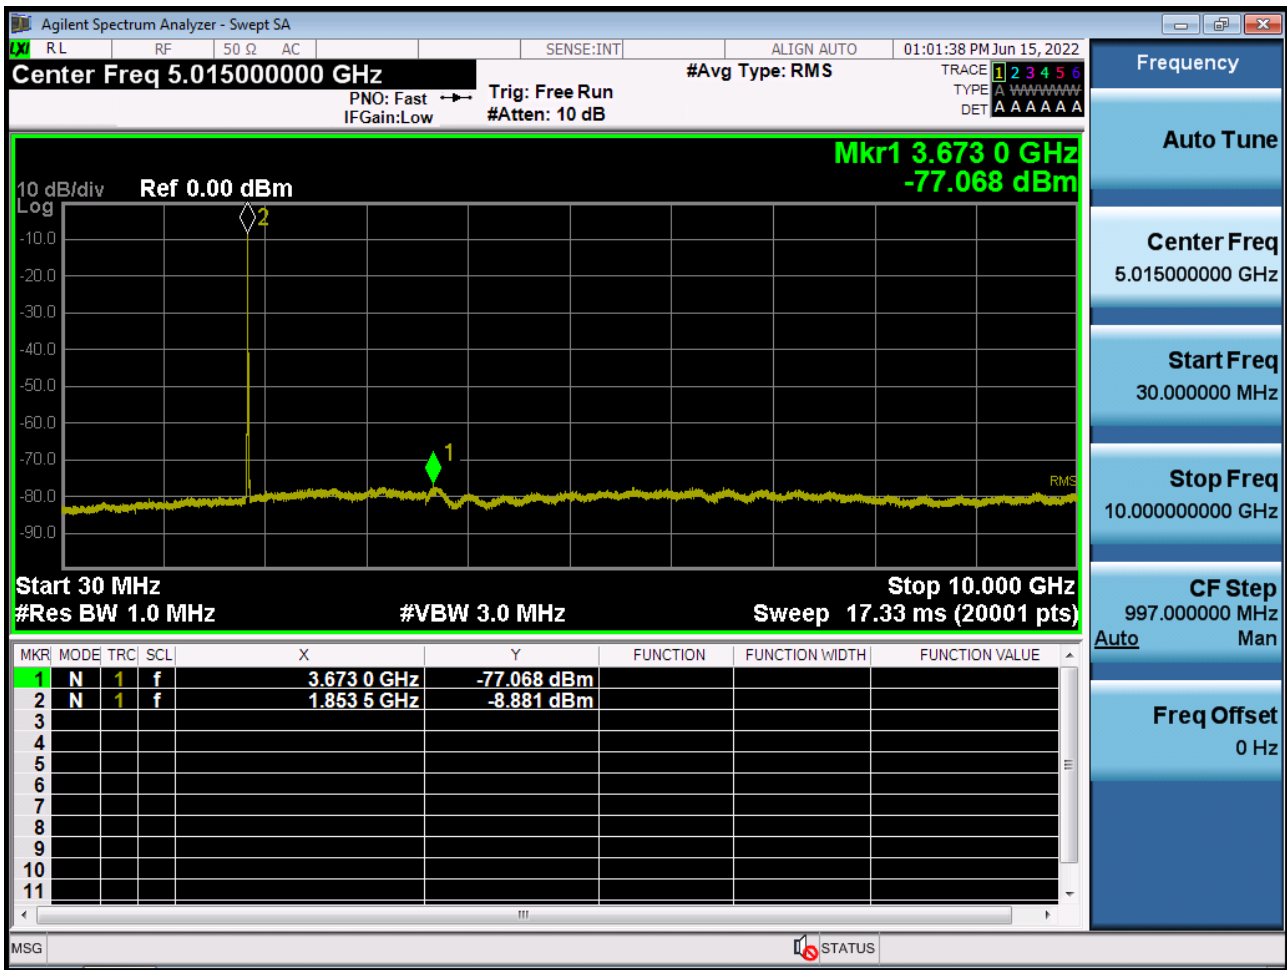

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

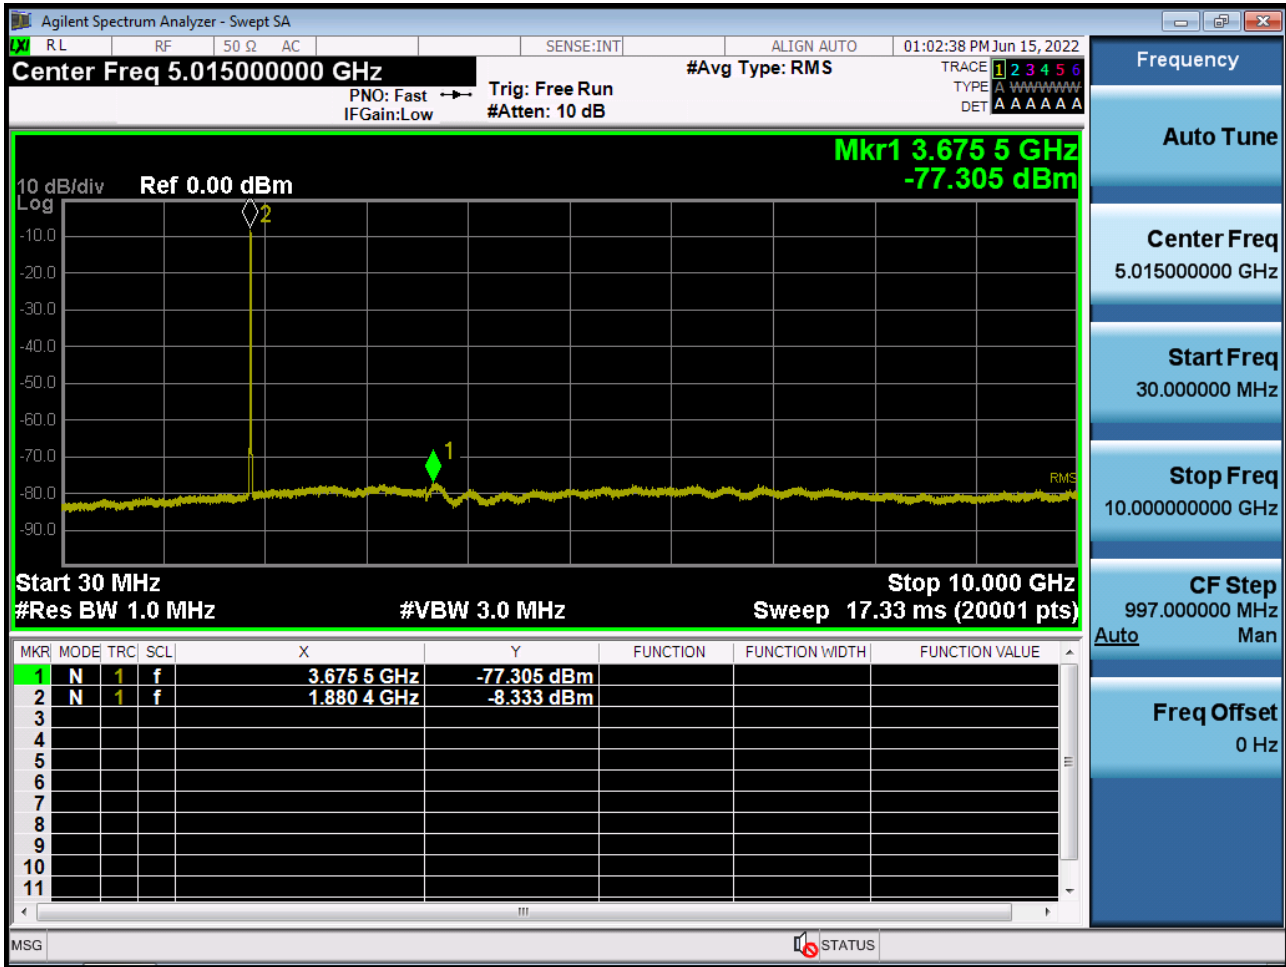

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

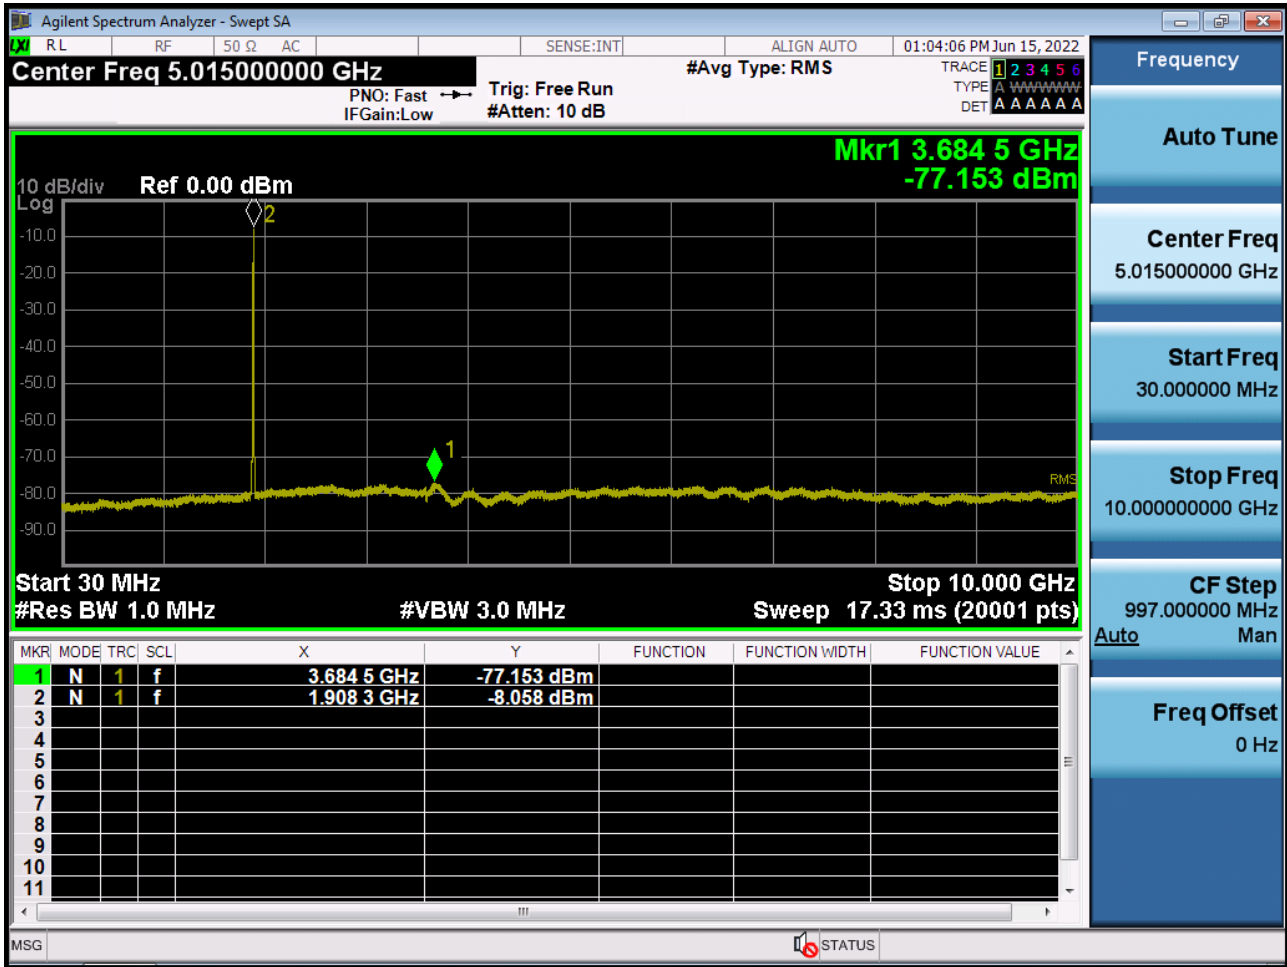

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

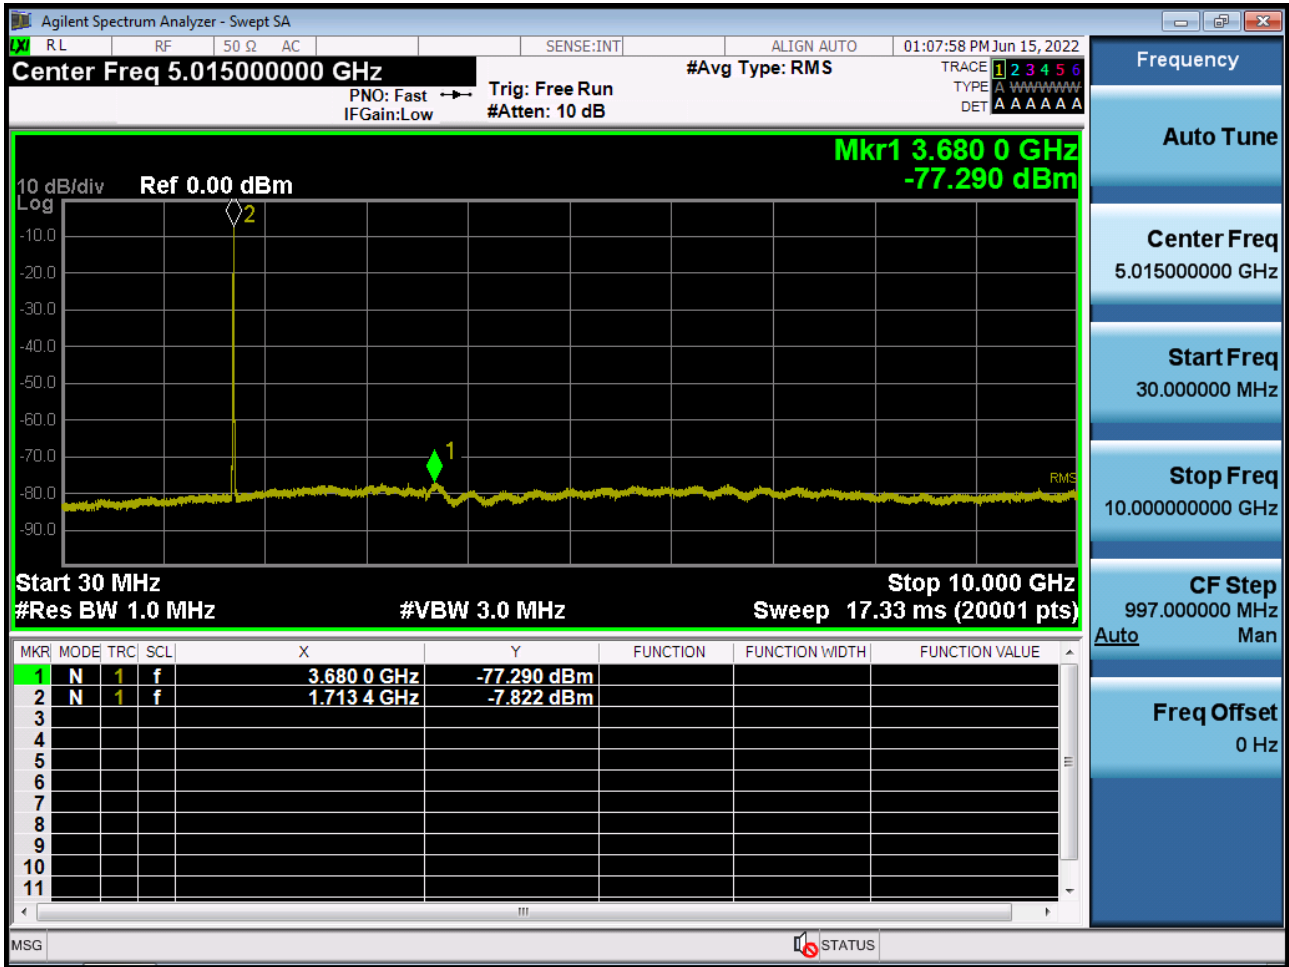


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

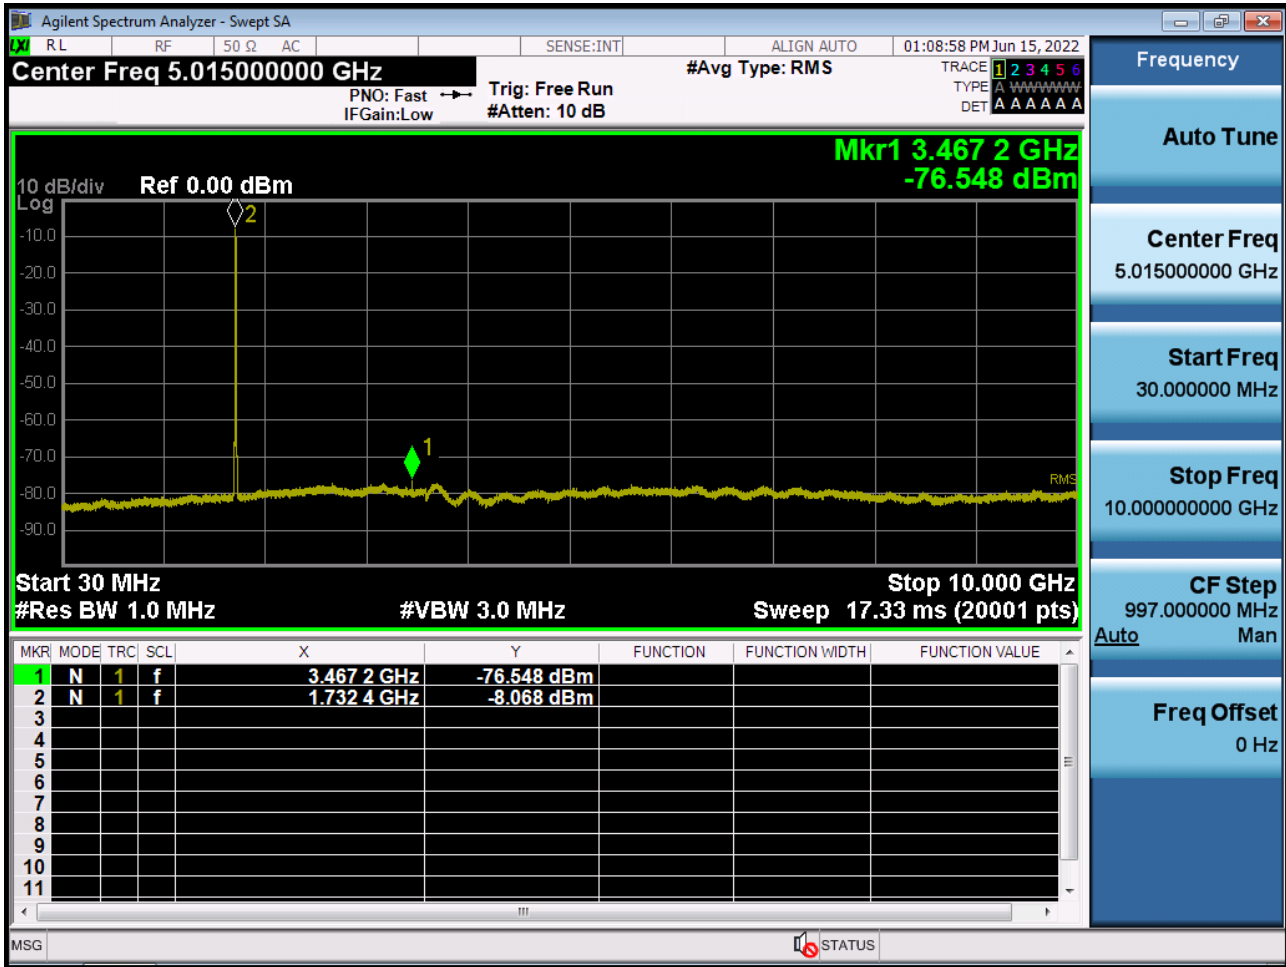

■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2

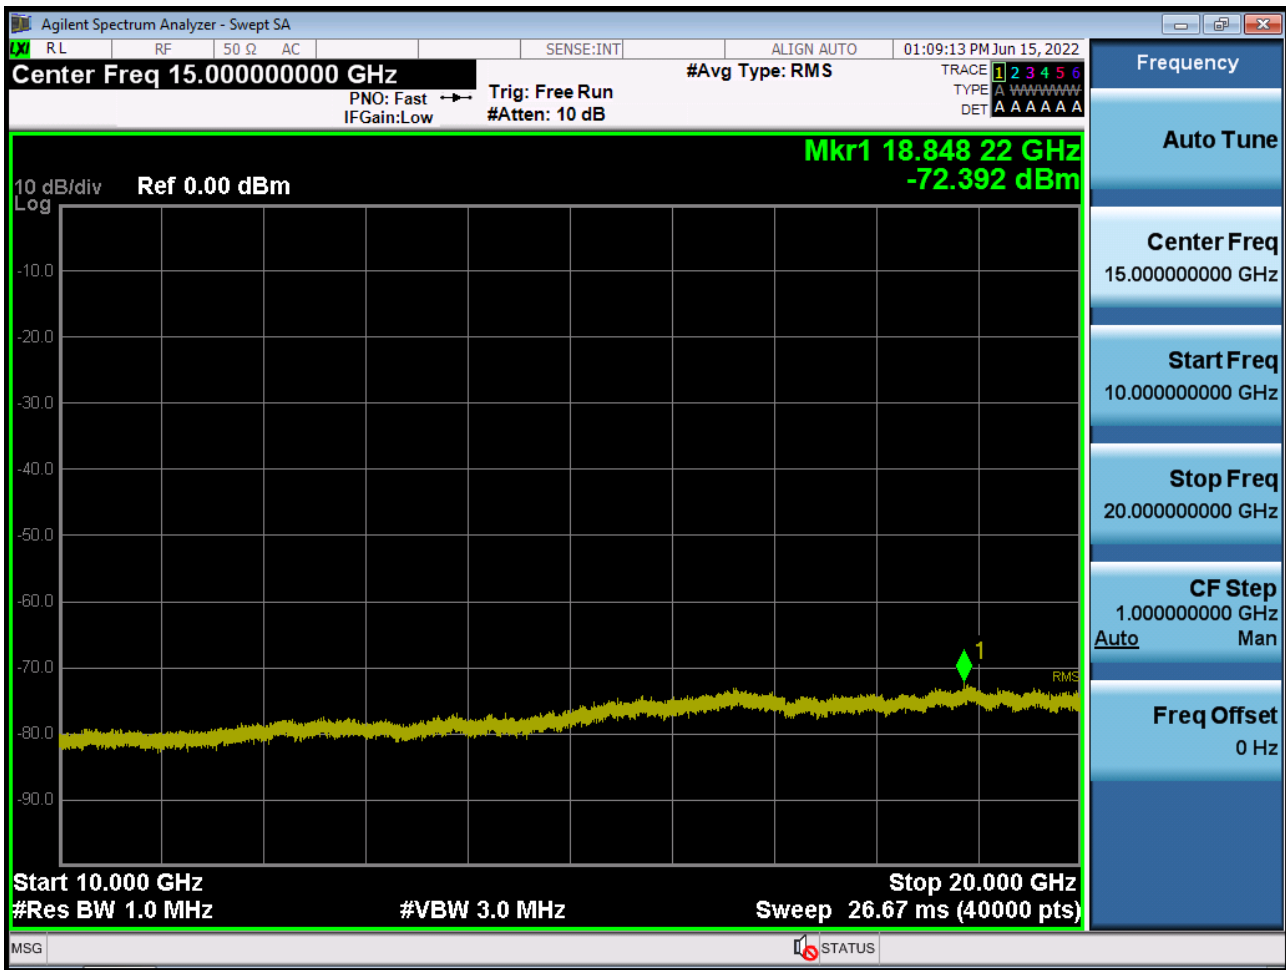

■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

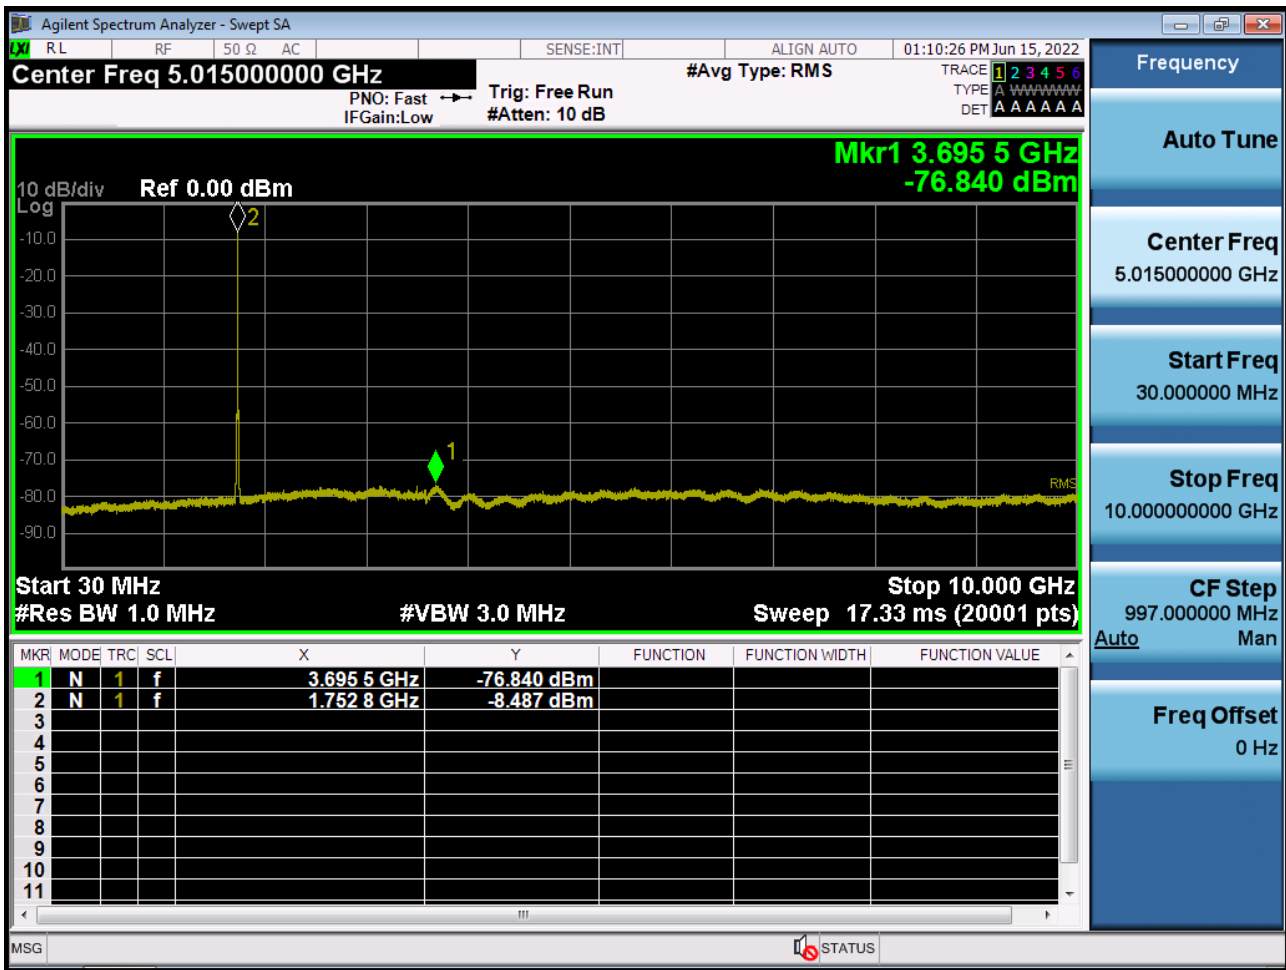

■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2206-FC041-P