



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

04/10/19 – 05/08/19

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

1M1904030051-01-R1.A3L

FCC ID:

A3LSMA102U

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:


SM-A102U

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)
PCE	CDMA/EVDO BC10 (900S)	817.90 - 823.10 MHz	0.33	0.47	0.54
PCE	CDMA/EVDO BC20 (S22H)	824.70 - 848.31 MHz	0.47	0.64	0.44
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.38	0.30	0.40
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.31	0.30	0.33
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.13	0.15	0.27
PCE	UMTS 850	826.40 - 846.60 MHz	0.28	0.37	0.39
PCE	UMTS 1755	1712.4 - 1752.8 MHz	0.29	0.48	0.48
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.33	0.34	0.60
PCE	LTE Band 71	665.5 - 695.5 MHz	0.24	0.32	0.43
PCE	LTE Band 12	699.7 - 715.3 MHz	0.23	0.33	0.39
PCE	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.18	0.41	0.49
PCE	LTE Band 14	790.5 - 795.5 MHz	0.15	0.37	0.41
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.26	0.29	0.35
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.30	0.49	0.50
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.35	0.33	0.39
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A
PCE	LTE Band 30	2307.5 - 2312.5 MHz	0.19	0.28	0.51
PCE	LTE Band 7	2502.5 - 2567.5 MHz	0.18	0.41	0.37
PCE	LTE Band 41	2496.5 - 2687.5 MHz	0.20	0.45	0.36
PCE	LTE Band 38	2572.5 - 2617.5 MHz	N/A	N/A	N/A
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.13	<0.1	0.23
NII	U-NII3	5180 - 5240 MHz	N/A	N/A	N/A
NII	U-NII2A	5260 - 5320 MHz	0.19	0.34	N/A
NII	U-NII2C	5500 - 5720 MHz	0.35	0.52	N/A
NII	U-NII3	5745 - 5825 MHz	0.15	0.24	0.41
DSS/DTS	Bluetooth	2402 - 2480 MHz	N/A	N/A	N/A
Simultaneous SAR per KDB 690783 D01v0103:			1.11	1.16	1.15

Note: This revised Test Report (S/N: 1M1904030051-01-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President





The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: A3LSMA102U	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 1 of 114

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	13
3	INTRODUCTION	14
4	DOSIMETRIC ASSESSMENT	15
5	DEFINITION OF REFERENCE POINTS	16
6	TEST CONFIGURATION POSITIONS	17
7	RF EXPOSURE LIMITS	20
8	FCC MEASUREMENT PROCEDURES.....	21
9	RF CONDUCTED POWERS	29
10	SYSTEM VERIFICATION.....	74
11	SAR DATA SUMMARY	77
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	93
13	SAR MEASUREMENT VARIABILITY	106
14	ADDITIONAL TESTING PER FCC GUIDANCE	107
15	EQUIPMENT LIST	110
16	MEASUREMENT UNCERTAINTIES.....	111
17	CONCLUSION.....	112
18	REFERENCES	113
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS		

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 2 of 114

1 DEVICE UNDER TEST



1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 14	Voice/Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 30	Voice/Data	2307.5 - 2312.5 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
LTE Band 38	Voice/Data	2572.5 - 2617.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device utilizes a single step power reduction mechanism for SAR compliance under portable hotspot conditions for some wireless modes and bands. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 3 of 114

1.3 Nominal and Maximum Output Power Specifications



This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum 2G/3G/4G Output Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.5	33.5	31.5	30.0	28.5	28.0	26.0	25.0	23.5
	Nominal	32.5	32.5	30.5	29.0	27.5	27.0	25.0	24.0	22.5
GSM/GPRS/EDGE 1900	Maximum	31.0	31.0	28.0	26.0	24.0	27.0	25.0	24.0	22.5
	Nominal	30.0	30.0	27.0	25.0	23.0	26.0	24.0	23.0	21.5

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	25.0	24.0	22.0	24.0
	Nominal	24.0	23.0	21.0	23.0
UMTS Band 4 (1750 MHz)	Maximum	25.0	24.0	22.0	24.0
	Nominal	24.0	23.0	21.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	25.0	24.5	22.5	24.5
	Nominal	24.0	23.5	21.5	23.5



Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (\$90S)	Maximum	25.5
	Nominal	24.5
CDMA/EVDO BC0 (\$22H)	Maximum	25.5
	Nominal	24.5
PCS CDMA/EVDO	Maximum	25.5
	Nominal	24.5

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 4 of 114

Mode / Band		Modulated Average (dBm)
LTE Band 71	Maximum	25.0
	Nominal	24.0
LTE Band 12	Maximum	25.0
	Nominal	24.0
LTE Band 17	Maximum	25.0
	Nominal	24.0
LTE Band 13	Maximum	25.0
	Nominal	24.0
LTE Band 14	Maximum	24.5
	Nominal	23.5
LTE Band 26 (Cell)	Maximum	25.5
	Nominal	24.5
LTE Band 5 (Cell)	Maximum	25.5
	Nominal	24.5
LTE Band 66 (AWS)	Maximum	25.0
	Nominal	24.0
LTE Band 4 (AWS)	Maximum	25.0
	Nominal	24.0
LTE Band 25 (PCS)	Maximum	25.0
	Nominal	24.0
LTE Band 2 (PCS)	Maximum	25.0
	Nominal	24.0
LTE Band 30	Maximum	25.0
	Nominal	24.0
LTE Band 7	Maximum	24.0
	Nominal	23.0
LTE Band 41 (PC3)	Maximum	24.5
	Nominal	23.5
LTE Band 41 (PC2)	Maximum	27.5
	Nominal	26.5
LTE Band 38	Maximum	24.5
	Nominal	23.5

1.3.2 Reduced 2G/3G/4G Output Power



Mode / Band		Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GPRS/EDGE 1900	Maximum	29.0	26.0	24.0	22.5	27.0	25.0	24.0	22.5
	Nominal	28.0	25.0	23.0	21.5	26.0	24.0	23.0	21.5

FCC ID: A3LSMA102U	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 5 of 114

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC- HSDPA
UMTS Band 4 (1750 MHz)	Maximum	23.0	22.0	21.5	22.0
	Nominal	22.0	21.0	20.5	21.0
UMTS Band 2 (1900 MHz)	Maximum	23.0	22.5	22.0	22.5
	Nominal	22.0	21.5	21.0	21.5

Mode / Band		Modulated Average (dBm)
PCS CDMA/EVDO	Maximum	23.0
	Nominal	22.0

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	23.0
	Nominal	22.0
LTE Band 4 (AWS)	Maximum	23.0
	Nominal	22.0
LTE Band 25 (PCS)	Maximum	23.0
	Nominal	22.0
LTE Band 2 (PCS)	Maximum	23.0
	Nominal	22.0
LTE Band 30	Maximum	23.0
	Nominal	22.0
LTE Band 7	Maximum	20.5
	Nominal	19.5
LTE Band 41 (PC3)	Maximum	22.5
	Nominal	21.5
LTE Band 41 (PC2)	Maximum	22.5
	Nominal	21.5
LTE Band 38	Maximum	22.5
	Nominal	21.5



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 6 of 114

1.3.3 Maximum Bluetooth and WLAN Output Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
Channel		1 - 11	12	13
IEEE 802.11b (2.4 GHz)	Maximum	19.0	18.0	15.0
	Nominal	18.0	17.0	14.0
IEEE 802.11g (2.4 GHz)	Maximum	18.0	14.5	5.5
	Nominal	17.0	13.5	4.5
IEEE 802.11n (2.4 GHz)	Maximum	18.0	14.5	5.5
	Nominal	17.0	13.5	4.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)												
		20 MHz Bandwidth					40 MHz Bandwidth				80 MHz Bandwidth			
	Channel	36-48	52	64	100-144	149-165	38-46	54	62 - 102	110 - 159	42	58	106	122-155
IEEE 802.11a (5 GHz)	Maximum	19.0	19.0	15.0	18.0	17.0								
	Nominal	18.0	18.0	14.0	17.0	16.0								
IEEE 802.11n (5 GHz)	Maximum	19.0	19.0	15.0	18.0	17.0	17.0	17.0	14.5	15.0				
	Nominal	18.0	18.0	14.0	17.0	16.0	16.0	16.0	13.5	14.0				
IEEE 802.11ac (5 GHz)	Maximum	19.0	19.0	15.0	17.0	17.0	17.0	17.0	14.5	15.0	14.0	12.5	12.0	13.0
	Nominal	18.0	18.0	14.0	16.0	16.0	16.0	16.0	13.5	14.0	13.0	11.5	11.0	12.0



Mode/Band		Modulated Average (dBm)
Bluetooth	Maximum	8.5
	Nominal	7.5
Bluetooth EDR	Maximum	7.5
	Nominal	6.5
Bluetooth LE	Maximum	6.0
	Nominal	5.0

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 7 of 114	

1.3.4 Reduced WLAN Output Power

Mode / Band		Modulated Average (dBm)		
Channel		1 - 11	12	13
IEEE 802.11b (2.4 GHz)	Maximum	15.0	15.0	15.0
	Nominal	14.0	14.0	14.0
IEEE 802.11g (2.4 GHz)	Maximum	15.0	14.5	5.5
	Nominal	14.0	13.5	4.5
IEEE 802.11n (2.4 GHz)	Maximum	15.0	14.5	5.5
	Nominal	14.0	13.5	4.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)												
		20 MHz Bandwidth					40 MHz Bandwidth				80 MHz Bandwidth			
	Channel	36-48	52	64	100-144	149-165	38-46	54	62	102-159	42	58	106	122-155
IEEE 802.11a (5 GHz)	Maximum	14.0	14.0	14.0	14.0	14.0								
	Nominal	13.0	13.0	13.0	13.0	13.0								
IEEE 802.11n (5 GHz)	Maximum	14.0	14.0	14.0	14.0	14.0	14.0	14.0	14.0	14.0				
	Nominal	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0				
IEEE 802.11ac (5 GHz)	Maximum	14.0	14.0	14.0	14.0	14.0	14.0	14.0	14.0	14.0	14.0	12.5	12.0	13.0
	Nominal	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	11.5	11.0	12.0

FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 8 of 114

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F.

Table 1-1
Device Edges/Sides for SAR Testing

Device Sides/Edges for SAR Testing						
Mode	Back	Front	Top	Bottom	Right	Left
EVDO BC10 (§90S)	Yes	Yes	No	Yes	Yes	No
EVDO BC0 (§22H)	Yes	Yes	No	Yes	Yes	No
PCS EVDO	Yes	Yes	No	Yes	No	Yes
GPRS 850	Yes	Yes	No	Yes	Yes	No
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	No
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
LTE Band 71	Yes	Yes	No	Yes	Yes	No
LTE Band 12	Yes	Yes	No	Yes	Yes	No
LTE Band 13	Yes	Yes	No	Yes	Yes	No
LTE Band 14	Yes	Yes	No	Yes	Yes	No
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	No
LTE Band 66 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 30	Yes	Yes	No	Yes	No	Yes
LTE Band 7	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C operations are disabled.

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 9 of 114

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
4	1x CDMA voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
5	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	
6	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	
7	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
8	GSM voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
9	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
10	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	
11	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
12	UMTS + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
13	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
14	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	
15	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
16	LTE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
17	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	* Pre-installed VOIP applications are considered
18	CDMA/EVDO data + 5 GHz Wi-Fi	Yes*	Yes*	Yes	* Pre-installed VOIP applications are considered
19	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes^*	Yes*	Yes^	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
20	CDMA/EVDO data + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^*	Yes*	Yes^	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
21	GPRS/EDGE + 2.4 GHz Wi-Fi	N/A	N/A	Yes	
22	GPRS/EDGE + 5 GHz Wi-Fi	N/A	N/A	Yes	
23	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes^	^ Bluetooth Tethering is considered
24	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	N/A	N/A	Yes^	^ Bluetooth Tethering is considered

- 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII-2A, and U-NII-2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VoWIFI.
- This device supports Bluetooth Tethering

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 10 of 114	

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, head Bluetooth SAR was not required; $[(7 / 5) * \sqrt{2.480}] = 2.2 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(7 / 15) * \sqrt{2.480}] = 0.7 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, hotspot Bluetooth SAR was not required; $[(7 / 10) * \sqrt{2.480}] = 1.1 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6 and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02.



This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only for 5 GHz
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 11 of 114

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Appendix H.

This device supports 64QAM on the uplink and the downlink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64QAM is $\leq \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.



This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.1).

1.7 Guidance Applied



- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 12 of 114

LTE Information				
Form Factor	Portable Handset			
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)			
	LTE Band 12 (699.7 - 713.3 MHz)			
	LTE Band 17 (706.5 - 713.5 MHz)			
	LTE Band 13 (779.5 - 784.5 MHz)			
	LTE Band 14 (790.5 - 795.5 MHz)			
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)			
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)			
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)			
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)			
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)			
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)			
	LTE Band 30 (2307.5 - 2312.5 MHz)			
	LTE Band 7 (2502.5 - 2567.5 MHz)			
	LTE Band 41 (2498.5 - 2687.5 MHz)			
	LTE Band 38 (2572.5 - 2617.5 MHz)			
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 17: 5 MHz, 10 MHz			
	LTE Band 13: 5 MHz, 10 MHz			
	LTE Band 14: 5 MHz, 10 MHz			
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz			
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 30: 5 MHz, 10 MHz			
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 38: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High
	High			
LTE Band 71: 5 MHz	665.5 (133147)	680.5 (133297)	695.5 (133447)	
LTE Band 71: 10 MHz	668 (133172)	680.5 (133297)	693 (133422)	
LTE Band 71: 15 MHz	670.5 (133197)	680.5 (133297)	690.5 (133397)	
LTE Band 71: 20 MHz	673 (133222)	680.5 (133297)	688 (133372)	
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)	
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)	
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)	
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A	
LTE Band 14: 5 MHz	790.5 (23305)	793 (23330)	795.5 (23355)	
LTE Band 14: 10 MHz	N/A	793 (23330)	N/A	
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)	
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)	
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)	
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)	
LTE Band 26 (Cell): 15 MHz	821.5 (26765)	831.5 (26865)	841.5 (26965)	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)	
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	1745 (132322)	1779.3 (132665)	
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	1745 (132322)	1778.5 (132657)	
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	1745 (132322)	1777.5 (132647)	
LTE Band 66 (AWS): 10 MHz	1715 (132022)	1745 (132322)	1775 (132622)	
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	1745 (132322)	1772.5 (132597)	
LTE Band 66 (AWS): 20 MHz	1720 (132072)	1745 (132322)	1770 (132572)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)	
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26647)	1882.5 (26365)	1914.3 (26683)	
LTE Band 25 (PCS): 3 MHz	1851.5 (26655)	1882.5 (26365)	1913.5 (26675)	
LTE Band 25 (PCS): 5 MHz	1852.5 (26665)	1882.5 (26365)	1912.5 (26665)	
LTE Band 25 (PCS): 10 MHz	1855 (26690)	1882.5 (26365)	1910 (26640)	
LTE Band 25 (PCS): 15 MHz	1857.5 (26715)	1882.5 (26365)	1907.5 (26615)	
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)	
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)	
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)	
LTE Band 30: 5 MHz	2307.5 (27685)	2310 (27710)	2312.5 (27735)	
LTE Band 30: 10 MHz	N/A	2310 (27710)	N/A	
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)	
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)	
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)	
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 38: 5 MHz	2572.5 (37775)	2595 (38000)	2617.5 (38225)	
LTE Band 38: 10 MHz	2575 (37800)	2595 (38000)	2615 (38200)	
LTE Band 38: 15 MHz	2577.5 (37825)	2595 (38000)	2612.5 (38175)	
LTE Band 38: 20 MHz	2580 (37850)	2595 (38000)	2610 (38150)	
UE Category	DL UE Cat 8 (QPSK, 16QAM, 64QAM), UL UE Cat 5 (QPSK, 16QAM, 64QAM)			
Modulations Supported in UL	QPSK, 16QAM, 64QAM			
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES			
A-MPR (Additional MPR) disabled for SAR Testing?	YES			
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations			
LTE Additional Information	This device does not support full CA features on 3GPP Release 12. It supports carrier aggregation as shown in Appendix H.4.1 uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 12 Features are not supported: Relay, HotNet, Enhanced MIMO, eCIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.			

FCC ID: A3LSMA102U		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 13 of 114		

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 14 of 114

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMA102U		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 15 of 114

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

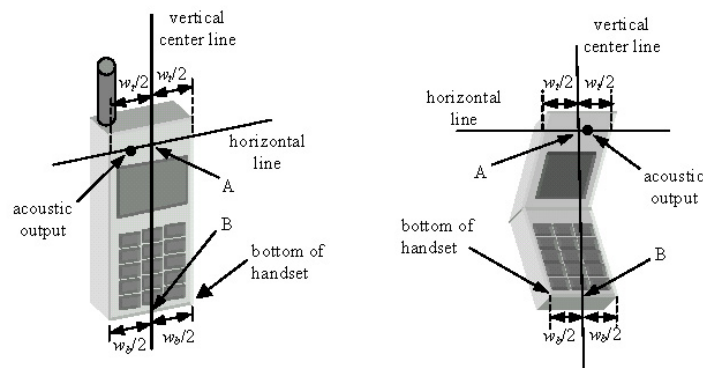




Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 16 of 114

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

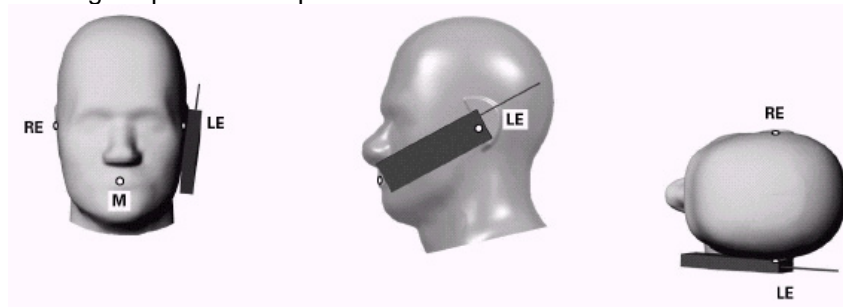




Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 17 of 114

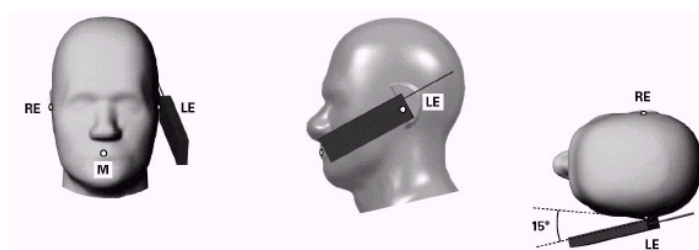


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

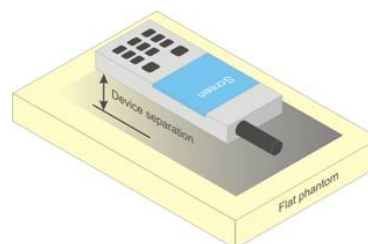




Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 18 of 114

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations



Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 19 of 114

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 20 of 114

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”



The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 21 of 114

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements



SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 22 of 114

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.



8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 23 of 114

primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.5.6 SAR Measurement Conditions for DC-HSDPA



SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 24 of 114

8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:



- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output

FCC ID: A3LSMA102U	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 25 of 114

power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.7.2 U-NII-1 and U-NII-2A



For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 26 of 114

positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.



8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.7.7 Initial Test Configuration Procedure



For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 27 of 114

8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 28 of 114

9.1 CDMA Conducted Powers

Table 9-1
Maximum Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	24.26	24.19	23.90	24.17	24.20	24.27	24.34
Cellular	1013	22H	824.7	24.32	24.18	24.04	24.21	24.20	24.55	24.54
	384	22H	836.52	24.23	24.03	23.93	24.13	24.05	24.38	24.43
	777	22H	848.31	23.70	23.92	23.96	23.89	23.92	23.75	24.05
PCS	25	24E	1851.25	24.67	24.62	24.48	24.67	24.66	24.40	24.52
	600	24E	1880	24.68	24.65	24.75	24.67	24.67	24.36	24.33
	1175	24E	1908.75	24.57	24.53	24.80	24.57	24.60	24.16	24.21

Table 9-2
Reduced Conducted Power

Band	Channel	Rule Part	Frequency	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	21.60	21.59	21.47	21.40
	600	24E	1880	21.51	21.50	21.36	21.32
	1175	24E	1908.75	21.32	21.32	21.19	21.19

Note 1: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.

Note 2: CDMA 1x Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.






Figure 9-1
Power Measurement Setup

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 29 of 114

9.2 GSM Conducted Powers

Table 9-3
Maximum Conducted Power

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.39	32.20	29.83	28.45	26.79	26.29	23.86	22.50	21.00
	190	32.61	32.54	30.20	28.81	27.24	26.53	24.19	22.69	21.29
	251	32.65	32.73	30.60	28.57	27.35	26.70	24.43	22.94	21.57
GSM 1900	512	29.86	29.80	26.72	24.74	23.03	25.88	23.67	21.98	20.73
	661	29.42	29.43	26.41	24.37	22.69	25.42	23.18	21.58	20.00
	810	29.28	29.33	26.44	24.49	22.79	25.60	23.33	21.78	20.07

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.36	23.17	23.81	24.19	23.78	17.26	17.84	18.24	17.99
	190	23.58	23.51	24.18	24.55	24.23	17.50	18.17	18.43	18.28
	251	23.62	23.70	24.58	24.31	24.34	17.67	18.41	18.68	18.56
GSM 1900	512	20.83	20.77	20.70	20.48	20.02	16.85	17.65	17.72	17.72
	661	20.39	20.40	20.39	20.11	19.68	16.39	17.16	17.32	16.99
	810	20.25	20.30	20.42	20.23	19.78	16.57	17.31	17.52	17.06

GSM 850	Frame	23.47	23.47	24.48	24.74	24.49	17.97	18.98	19.74	19.49
GSM 1900	Avg.Targets:	20.97	20.97	20.98	20.74	19.99	16.97	17.98	18.74	18.49





FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 30 of 114

Table 9-4
Reduced Conducted Power

Maximum Burst-Averaged Output Power									
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	28.06	25.46	23.63	21.81	25.88	23.67	21.98	20.73
	661	27.95	25.24	23.27	21.44	25.42	23.18	21.58	20.00
	810	27.61	24.89	23.15	21.42	25.60	23.33	21.78	20.07

Calculated Maximum Frame-Averaged Output Power									
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	19.03	19.44	19.37	18.80	16.85	17.65	17.72	17.72
	661	18.92	19.22	19.01	18.43	16.39	17.16	17.32	16.99
	810	18.58	18.87	18.89	18.41	16.57	17.31	17.52	17.06

GSM 1900	Frame Avg.Targets:	18.97	18.98	18.74	18.49	16.97	17.98	18.74	18.49
-----------------	-------------------------------	-------	-------	--------------	-------	-------	-------	-------	-------

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 31 of 114



Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8-PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 12 (Max 4 Tx uplink slots)
EDGE Multislot class: 12 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-2
Power Measurement Setup

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 32 of 114	



9.3 UMTS Conducted Powers

Table 9-5
Maximum Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.98	25.00	25.00	24.15	24.15	24.53	23.88	24.21	24.38	-
99		12.2 kbps AMR	25.00	24.96	25.00	24.17	24.13	24.48	23.88	24.23	24.37	-
6	HSDPA	Subtest 1	22.07	22.07	22.08	22.26	22.18	22.10	21.92	22.17	22.21	0
6		Subtest 2	21.18	21.26	21.12	21.32	21.20	21.14	20.98	21.26	21.30	0
6		Subtest 3	22.29	22.32	22.21	22.30	22.22	22.30	21.95	22.32	22.42	0.5
6		Subtest 4	21.26	21.32	21.21	20.82	20.67	20.68	21.08	21.30	21.50	0.5
6	HSUPA	Subtest 1	19.68	19.69	19.71	18.95	18.83	19.16	19.38	19.52	19.85	0
6		Subtest 2	17.73	17.75	17.72	18.18	18.02	18.10	17.88	18.02	18.38	2
6		Subtest 3	21.97	21.99	21.98	21.73	21.56	21.86	21.90	22.07	22.43	1
6		Subtest 4	17.75	17.72	17.72	18.62	17.92	17.54	17.87	18.00	17.87	2
6		Subtest 5	21.94	21.99	21.86	21.55	21.48	21.98	21.81	22.10	22.17	0
8	DC-HSDPA	Subtest 1	22.00	22.10	21.98	22.06	21.90	21.66	21.70	22.13	22.05	0
8		Subtest 2	22.29	22.36	22.18	22.03	21.95	21.69	21.73	22.07	22.02	0
8		Subtest 3	21.24	21.38	21.15	20.88	20.83	20.72	20.84	21.27	21.14	0.5
8		Subtest 4	21.02	21.14	20.99	20.68	20.56	20.16	20.83	21.17	21.08	0.5

Table 9-6
Reduced Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.28	22.25	22.47	22.14	22.25	22.50	-
99		12.2 kbps AMR	22.26	22.21	22.44	22.16	22.24	22.49	-
6	HSDPA	Subtest 1	21.88	21.83	21.87	21.74	22.06	22.13	0
6		Subtest 2	20.97	20.85	20.90	20.71	20.98	21.05	0
6		Subtest 3	21.98	21.88	21.99	21.72	21.98	21.99	0.5
6		Subtest 4	20.48	20.38	20.39	20.74	21.03	21.01	0.5
6	HSUPA	Subtest 1	18.83	18.85	18.88	19.23	19.54	19.61	0
6		Subtest 2	18.09	17.91	17.83	17.71	17.98	17.99	2
6		Subtest 3	21.13	21.03	21.11	21.73	21.91	21.99	1
6		Subtest 4	18.55	17.86	17.55	17.68	17.98	17.54	2
6		Subtest 5	21.45	21.31	21.39	21.59	21.89	21.99	0
8	DC-HSDPA	Subtest 1	21.98	21.73	21.50	21.51	21.90	21.81	0
8		Subtest 2	21.16	20.97	20.73	21.42	21.59	21.46	0
8		Subtest 3	20.48	20.24	20.18	20.63	20.84	20.97	0.5
8		Subtest 4	20.45	20.25	19.98	20.60	20.96	20.85	0.5

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 33 of 114

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.






Figure 9-3
Power Measurement Setup

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 34 of 114

9.4 LTE Conducted Powers

9.4.1 LTE Band 71

Table 9-7
LTE Band 71 Conducted Powers - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.21	0	0
	1	50	24.05		0
	1	99	23.88		0
	50	0	22.98	0-1	1
	50	25	22.88		1
	50	50	22.81		1
	100	0	22.85		1
16QAM	1	0	22.96	0-1	1
	1	50	22.80		1
	1	99	22.66		1
	50	0	22.02	0-2	2
	50	25	21.91		2
	50	50	21.81		2
	100	0	21.92		2
64QAM	1	0	22.08	0-2	2
	1	50	21.96		2
	1	99	21.70		2
	50	0	20.89	0-3	3
	50	25	20.78		3
	50	50	20.76		3
	100	0	20.84		3

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-8
LTE Band 71 Conducted Powers - 15 MHz Bandwidth

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.83	0	0
	1	36	23.78		0
	1	74	23.70		0
	36	0	22.89	0-1	1
	36	18	22.89		1
	36	37	22.81		1
	75	0	22.85		1
16QAM	1	0	22.73	0-1	1
	1	36	22.70		1
	1	74	22.75		1
	36	0	21.90	0-2	2
	36	18	21.84		2
	36	37	21.82		2
	75	0	21.90		2
64QAM	1	0	21.87	0-2	2
	1	36	21.90		2
	1	74	21.79		2
	36	0	20.90	0-3	3
	36	18	20.86		3
	36	37	20.84		3
	75	0	20.82		3

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 35 of 114

Table 9-9
LTE Band 71 Conducted Powers - 10 MHz Bandwidth

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.56	23.85	23.88	0	0
	1	25	23.92	23.80	23.77		0
	1	49	23.92	23.75	23.76		0
	25	0	23.05	22.87	22.90	0-1	1
	25	12	23.01	22.88	22.88		1
	25	25	22.97	22.84	22.86		1
16QAM	50	0	22.99	22.83	22.88	0-1	1
	1	0	22.80	22.77	22.85		1
	1	25	22.89	22.70	22.78		1
	1	49	22.75	22.67	22.78	0-2	1
	25	0	22.11	21.95	21.93		2
	25	12	22.07	21.92	21.92		2
64QAM	25	25	22.03	21.93	21.89	0-2	2
	50	0	22.02	21.88	21.94		2
	1	0	22.19	21.90	21.96		0-2
	1	25	22.15	21.96	21.94	2	
	1	49	22.01	21.91	21.91	0-3	
	25	0	20.94	20.89	20.90		3
25	12	20.93	20.86	20.87	3		
25	25	20.94	20.85	20.87	3		
50	0	20.96	20.83	20.88		3	

Table 9-10
LTE Band 71 Conducted Powers - 5 MHz Bandwidth

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.98	23.80	23.80	0	0
	1	12	24.00	23.81	23.77		0
	1	24	23.95	23.81	23.72		0
	12	0	23.03	22.88	22.83	0-1	1
	12	6	23.04	22.87	22.83		1
	12	13	23.03	22.87	22.89		1
16QAM	25	0	22.99	22.89	22.81	0-1	1
	1	0	22.91	22.85	22.75		1
	1	12	22.93	22.77	22.79		1
	1	24	22.90	22.83	22.80	0-2	1
	12	0	22.05	21.93	21.93		2
	12	6	22.03	21.92	21.92		2
64QAM	12	13	21.97	21.90	21.90	0-2	2
	25	0	21.98	21.94	21.89		2
	1	0	21.90	21.83	21.90		0-2
	1	12	21.93	21.83	21.85	2	
	1	24	21.85	21.74	21.92	0-3	
	12	0	20.89	20.80	20.82		3
12	6	20.88	20.76	20.79	3		
	12	13	20.87	20.75	20.78		3
	25	0	20.94	20.81	20.77		

FCC ID: A3LSMA102U



SAR EVALUATION REPORT



Approved by:
Quality Manager

Document S/N:
1M1904030051-01-R1.A3L

Test Dates:
04/10/19 – 05/08/19

DUT Type:
Portable Handset

Page 36 of 114

9.4.2

LTE Band 12

Table 9-11
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz) Conducted Power [dBm]		
QPSK	1	0	24.55	0	0
	1	25	24.45		0
	1	49	24.30		0
	25	0	23.38	0-1	1
	25	12	23.33		1
	25	25	23.27		1
16QAM	50	0	23.35	0-1	1
	1	0	23.33		1
	1	25	23.28		1
	1	49	23.15	0-2	1
	25	0	22.39		2
	25	12	22.34		2
64QAM	25	25	22.29	0-2	2
	50	0	22.36		2
	1	0	22.29	0-2	2
	1	25	22.21		2
	1	49	22.03	0-3	2
	25	0	21.28		3
	25	12	21.25		3
	25	25	21.19		3
	50	0	21.24		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-12
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.37	24.45	24.54	0	0	
	1	12	24.32	24.37	24.55		0	
	1	24	24.35	24.35	24.33		0	
	12	0	23.32	23.36	23.50	0-1	1	
	12	6	23.29	23.34	23.46		1	
	12	13	23.28	23.35	23.47		1	
16QAM	25	0	23.27	23.34	23.47	0-1	1	
	1	0	23.34	23.27	23.40		1	
	1	12	23.30	23.22	23.41		1	
	1	24	23.25	23.23	23.29	0-2	1	
	12	0	22.30	22.42	22.47		2	
	12	6	22.29	22.42	22.46		2	
64QAM	12	13	22.28	22.40	22.48	0-2	2	
	25	0	22.31	22.40	22.46		2	
	64QAM	1	0	22.26	22.30	22.56	0-2	2
		1	12	22.31	22.16	22.48		2
		1	24	22.32	22.13	22.34		2
		64QAM	12	0	21.23	21.23	21.33	0-3
12			6	21.23	21.22	21.28	3	
12			13	21.23	21.19	21.34	3	
64QAM	25	0	21.26	21.24	21.34		3	





FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 37 of 114

Table 9-13
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.37	24.44	24.45	0	0
	1	7	24.38	24.42	24.50		0
	1	14	24.37	24.47	24.42		0
	8	0	23.34	23.41	23.45	0-1	1
	8	4	23.32	23.40	23.46		1
	8	7	23.32	23.38	23.42		1
15	0	23.25	23.35	23.41		1	
16QAM	1	0	23.23	23.30	23.25	0-1	1
	1	7	23.20	23.38	23.31		1
	1	14	23.28	23.35	23.41		1
	8	0	22.30	22.37	22.45	0-2	2
	8	4	22.31	22.44	22.44		2
	8	7	22.30	22.39	22.44		2
15	0	22.29	22.35	22.45		2	
64QAM	1	0	22.37	22.35	22.35	0-2	2
	1	7	22.34	22.37	22.36		2
	1	14	22.30	22.42	22.30		2
	8	0	21.13	21.28	21.24	0-3	3
	8	4	21.15	21.30	21.27		3
	8	7	21.14	21.28	21.26		3
15	0	21.24	21.29	21.32		3	

Table 9-14
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12							
1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.31	24.35	24.44	0	0
	1	2	24.25	24.31	24.41		0
	1	5	24.27	24.32	24.00		0
	3	0	24.25	24.36	24.37		0
	3	2	24.26	24.37	24.35		0
	3	3	24.25	24.38	24.36	0	
16QAM	6	0	23.27	23.36	23.40	0-1	1
	1	0	23.21	23.21	23.20	0-1	1
	1	2	23.15	23.27	23.25		1
	1	5	23.22	23.20	23.30		1
	3	0	23.39	23.39	23.41		1
	3	2	23.36	23.34	23.47		1
	3	3	23.35	23.35	23.43	1	
64QAM	6	0	22.35	22.34	22.45	0-2	2
	1	0	22.39	22.42	22.38	0-2	2
	1	2	22.42	22.45	22.43		2
	1	5	22.43	22.34	22.51		2
	3	0	22.20	22.32	22.37		2
	3	2	22.19	22.35	22.41		2
	3	3	22.18	22.28	22.44	2	
6	0	21.28	21.30	21.33	0-3	3	

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 38 of 114

9.4.3

LTE Band 13



Table 9-15
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz) Conducted Power [dBm]		
QPSK	1	0	24.63	0	0
	1	25	24.60		0
	1	49	24.53		0
	25	0	23.47	0-1	1
	25	12	23.41		1
	25	25	23.37		1
	50	0	23.39		1
16QAM	1	0	23.42	0-1	1
	1	25	23.38		1
	1	49	23.27		1
	25	0	22.44	0-2	2
	25	12	22.40		2
	25	25	22.34		2
	50	0	22.41		2
64QAM	1	0	22.49	0-2	2
	1	25	22.39		2
	1	49	22.29		2
	25	0	21.34	0-3	3
	25	12	21.33		3
	25	25	21.28		3
	50	0	21.34		3

Table 9-16
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz) Conducted Power [dBm]		
QPSK	1	0	24.52	0	0
	1	12	24.53		0
	1	24	24.51		0
	12	0	23.50	0-1	1
	12	6	23.50		1
	12	13	23.40		1
	25	0	23.50		1
16QAM	1	0	23.41	0-1	1
	1	12	23.45		1
	1	24	23.44		1
	12	0	22.54	0-2	2
	12	6	22.52		2
	12	13	22.51		2
	25	0	22.45		2
64QAM	1	0	22.30	0-2	2
	1	12	22.30		2
	1	24	22.29		2
	12	0	21.43	0-3	3
	12	6	21.40		3
	12	13	21.36		3
	25	0	21.41		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 39 of 114	

9.4.4

LTE Band 14



Table 9-17
LTE Band 14 Conducted Powers - 10 MHz Bandwidth

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel 23330 (793.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
			Conducted Power [dBm]		
QPSK	1	0	24.48	0	0
	1	25	24.40		0
	1	49	24.26		0
	25	0	23.28	0-1	1
	25	12	23.26		1
	25	25	23.19		1
16QAM	50	0	23.26	0-1	1
	1	0	23.43		1
	1	25	23.29		1
	1	49	23.19	0-2	1
	25	0	22.30		2
	25	12	22.23		2
64QAM	25	25	22.18	0-2	2
	50	0	22.25		2
	1	0	22.45	0-2	2
	1	25	22.37		2
	1	49	22.22	0-3	2
	25	0	21.19		3
64QAM	25	12	21.12		3
	25	25	21.08		3
	50	0	21.17		3

Table 9-18
LTE Band 14 Conducted Powers - 5 MHz Bandwidth

LTE Band 14 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel 23330 (793.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
			Conducted Power [dBm]		
QPSK	1	0	24.48	0	0
	1	12	24.43		0
	1	24	24.36		0
	12	0	23.38	0-1	1
	12	6	23.37		1
	12	13	23.34		1
16QAM	25	0	23.36	0-1	1
	1	0	23.06		1
	1	12	22.92		1
	1	24	22.88	0-2	1
	12	0	22.14		2
	12	6	22.12		2
64QAM	12	13	22.08	0-2	2
	25	0	22.14		2
	1	0	22.20	0-2	2
	1	12	22.10		2
	1	24	22.11	0-3	2
	12	0	21.27		3
64QAM	12	6	21.20		3
	12	13	21.18		3
	25	0	21.23		3

Note: LTE Band 14 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 40 of 114	

9.4.5

LTE Band 26 (Cell)

Table 9-19
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.75	0	0
	1	36	24.64		0
	1	74	24.76		0
	36	0	23.52	0-1	1
	36	18	23.48		1
	36	37	23.46		1
16QAM	75	0	23.48	0-1	1
	1	0	23.50		1
	1	36	23.42		1
	1	74	23.32	0-2	1
	36	0	22.50		2
	36	18	22.47		2
64QAM	36	37	22.42	0-2	2
	75	0	22.51		2
	1	0	22.65	0-2	2
	1	36	22.53		2
	1	74	22.47	0-3	2
	36	0	21.49		3
	36	18	21.41		3
	36	37	21.40		3
	75	0	21.44		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-20
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.75	24.85	24.98	0	0
	1	25	24.69	24.82	24.92		0
	1	49	24.67	24.76	24.80		0
	25	0	23.66	23.68	23.82	0-1	1
	25	12	23.65	23.67	23.79		1
	25	25	23.64	23.65	23.77		1
	50	0	23.65	23.67	23.78		1
16QAM	1	0	23.62	23.80	23.81	0-1	1
	1	25	23.67	23.73	23.80		1
	1	49	23.59	23.69	23.15		1
	25	0	22.65	22.67	22.86	0-2	2
	25	12	22.63	22.63	22.82		2
	25	25	22.62	22.64	22.83		2
	50	0	22.56	22.65	22.83		2
64QAM	1	0	22.64	22.62	22.82	0-2	2
	1	25	22.66	22.55	22.81		2
	1	49	22.62	22.49	22.25		2
	25	0	21.60	21.67	21.78	0-3	3
	25	12	21.60	21.65	21.75		3
	25	25	21.60	21.63	21.77		3
	50	0	21.58	21.62	21.75		3

FCC ID: A3LSMA102U



SAR EVALUATION REPORT



Approved by:
Quality Manager

Document S/N:

Test Dates:

DUT Type:

1M1904030051-01-R1.A3L

04/10/19 – 05/08/19

Portable Handset

Page 41 of 114

Table 9-21
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.70	24.75	24.82	0	0
	1	12	24.69	24.73	24.84		0
	1	24	24.67	24.73	24.77		0
	12	0	23.69	23.70	23.83	0-1	1
	12	6	23.67	23.68	23.84		1
	12	13	23.68	23.70	23.84		1
	25	0	23.69	23.67	23.80		1
16QAM	1	0	23.65	23.57	23.75	0-1	1
	1	12	23.70	23.57	23.76		1
	1	24	23.54	23.43	23.72		1
	12	0	22.64	22.66	22.86	0-2	2
	12	6	22.65	22.66	22.84		2
	12	13	22.64	22.67	22.85		2
	25	0	22.58	22.61	22.83		2
64QAM	1	0	22.62	22.56	22.79	0-2	2
	1	12	22.57	22.54	22.73		2
	1	24	22.52	22.49	22.77		2
	12	0	21.60	21.55	21.79	0-3	3
	12	6	21.60	21.54	21.78		3
	12	13	21.55	21.57	21.77		3
	25	0	21.59	21.64	21.76		3

Table 9-22
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.70	24.72	24.87	0	0
	1	7	24.69	24.69	24.88		0
	1	14	24.65	24.73	24.91		0
	8	0	23.67	23.74	23.87	0-1	1
	8	4	23.71	23.70	23.88		1
	8	7	23.71	23.69	23.90		1
	15	0	23.64	23.65	23.84		1
16QAM	1	0	23.62	23.63	23.75	0-1	1
	1	7	23.45	23.62	23.83		1
	1	14	23.68	23.54	23.80		1
	8	0	22.67	22.65	22.89	0-2	2
	8	4	22.62	22.64	22.91		2
	8	7	22.63	22.68	22.89		2
	15	0	22.58	22.64	22.85		2
64QAM	1	0	22.65	22.61	22.73	0-2	2
	1	7	22.70	22.62	22.72		2
	1	14	22.69	22.65	22.73		2
	8	0	21.54	21.57	21.76	0-3	3
	8	4	21.53	21.56	21.77		3
	8	7	21.55	21.60	21.79		3
	15	0	21.61	21.68	21.82		3





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 42 of 114	

Table 9-23
LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.67	24.63	24.89	0	0
	1	2	24.72	24.59	24.86		0
	1	5	24.68	24.72	24.88		0
	3	0	24.63	24.60	24.77		0
	3	2	24.62	24.59	24.78		0
	3	3	24.63	24.60	24.85		0
	6	0	23.70	23.65	23.86	0-1	1
16QAM	1	0	23.77	23.50	23.69	0-1	1
	1	2	23.80	23.49	23.65		1
	1	5	23.79	23.53	23.69		1
	3	0	23.75	23.70	23.86		1
	3	2	23.79	23.74	23.94		1
	3	3	23.71	23.63	24.02	1	
64QAM	6	0	22.75	22.72	22.92	0-2	2
	1	0	22.63	22.79	22.93	0-2	2
	1	2	22.65	22.78	22.92		2
	1	5	22.67	22.76	22.93		2
	3	0	22.62	22.65	22.96		2
	3	2	22.65	22.67	22.94		2
	3	3	22.62	22.65	22.93		2
6	0	21.66	21.56	21.74	0-3	3	

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 43 of 114

9.4.6

LTE Band 66 (AWS)

Table 9-24
LTE Band 66 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.05	24.07	24.24	0	0
	1	50	23.95	23.84	24.07		0
	1	99	23.70	23.61	23.93		0
	50	0	22.88	22.77	22.91	0-1	1
	50	25	22.81	22.67	22.81		1
	50	50	22.74	22.60	22.72		1
	100	0	22.80	22.65	22.83		1
16QAM	1	0	22.88	22.66	23.01	0-1	1
	1	50	22.74	22.45	22.86		1
	1	99	22.58	22.22	22.73		1
	50	0	21.88	21.80	21.87	0-2	2
	50	25	21.78	21.67	21.82		2
	50	50	21.75	21.57	21.74		2
	100	0	21.80	21.71	21.80		2
64QAM	1	0	21.95	22.03	22.01	0-2	2
	1	50	21.79	21.77	21.81		2
	1	99	21.59	21.61	21.64		2
	50	0	20.90	20.82	20.83	0-3	3
	50	25	20.85	20.72	20.71		3
	50	50	20.79	20.59	20.66		3
	100	0	20.92	20.73	20.79		3

Table 9-25
LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.14	24.11	24.23	0	0
	1	36	24.00	23.96	24.13		0
	1	74	23.90	23.76	24.06		0
	36	0	23.03	22.98	23.09	0-1	1
	36	18	22.98	22.89	23.03		1
	36	37	22.89	22.82	22.98		1
	75	0	22.95	22.90	23.03	1	
16QAM	1	0	23.00	23.21	23.15	0-1	1
	1	36	22.85	22.93	23.09		1
	1	74	22.87	22.87	22.93		1
	36	0	22.14	21.97	22.08	0-2	2
	36	18	22.01	21.89	22.05		2
	36	37	21.95	21.82	22.00		2
	75	0	22.02	21.91	22.03	2	
64QAM	1	0	22.17	22.09	22.00	0-2	2
	1	36	22.04	21.90	21.92		2
	1	74	21.95	21.78	21.76		2
	36	0	21.04	20.94	20.98	0-3	3
	36	18	21.01	20.85	20.93		3
	36	37	20.96	20.75	20.89		3
	75	0	20.97	20.89	20.90	3	



FCC ID: A3LSMA102U	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 44 of 114

Table 9-26
LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.06	24.07	24.20	0	0
	1	25	23.95	23.95	24.13		0
	1	49	23.88	23.90	24.08		0
	25	0	22.90	22.93	23.02	0-1	1
	25	12	22.86	22.87	23.03		1
	25	25	22.83	22.80	22.99		1
50	0	22.87	22.86	23.00		1	
16QAM	1	0	23.00	22.86	23.30	0-1	1
	1	25	22.87	22.72	23.15		1
	1	49	22.80	22.61	22.95		1
	25	0	22.03	21.98	22.11	0-2	2
	25	12	21.94	21.96	22.08		2
	25	25	21.92	21.90	22.04		2
50	0	21.93	21.91	22.02		2	
64QAM	1	0	21.79	21.93	22.00	0-2	2
	1	25	21.78	21.83	21.98		2
	1	49	21.72	21.71	21.94		2
	25	0	20.98	21.01	20.98	0-3	3
	25	12	20.97	20.94	20.94		3
	25	25	20.88	20.86	20.90		3
	50	0	20.89	20.91	20.92		3

Table 9-27
LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.82	24.00	24.15	0	0
	1	12	23.80	23.90	24.12		0
	1	24	23.84	23.85	24.13		0
	12	0	22.86	22.90	23.07	0-1	1
	12	6	22.82	22.86	23.04		1
	12	13	22.79	22.85	23.03		1
16QAM	25	0	22.82	22.86	23.04	0-1	1
	1	0	22.77	22.73	23.05		1
	1	12	22.74	22.61	23.03		1
	1	24	22.82	22.60	22.90	0-2	1
	12	0	21.93	21.95	22.06		2
	12	6	21.90	21.90	22.02		2
64QAM	12	13	21.88	21.85	22.03	0-2	2
	25	0	21.87	21.91	22.00		2
	1	0	21.86	21.80	22.05		0-2
	1	12	21.89	21.70	22.02	2	
	1	24	21.84	21.83	21.94	2	
	64QAM	12	0	20.86	20.90	20.92	0-3
12		6	20.84	20.85	20.91	3	
12		13	20.82	20.80	20.92	3	
25		0	20.81	20.83	20.94		3



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 45 of 114	

Table 9-28
LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.88	24.03	24.07	0	0	
	1	7	23.87	23.95	24.05		0	
	1	14	23.86	23.92	24.06		0	
	8	0	22.85	22.89	23.02	0-1	1	
	8	4	22.84	22.90	23.02		1	
	8	7	22.81	22.89	23.03		1	
16QAM	15	0	22.80	22.82	22.98	0-1	1	
	1	0	22.90	22.93	22.86		1	
	1	7	22.93	22.78	22.84		1	
	1	14	22.73	22.84	22.85	0-2	1	
	8	0	21.85	21.95	22.02		2	
	8	4	21.84	21.93	22.01		2	
64QAM	8	7	21.82	21.86	21.98	0-2	2	
	15	0	21.83	21.87	21.99		2	
	64QAM	1	0	21.83	21.76	21.89	0-2	2
		1	7	21.80	21.77	22.02		2
		1	14	21.79	21.74	21.98		2
		8	0	20.84	20.80	20.92	0-3	3
8		4	20.86	20.78	20.89	3		
8		7	20.82	20.77	20.91	3		
	15	0	20.90	20.89	20.91		3	

Table 9-29
LTE Band 66 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.82	23.89	23.98	0	0
	1	2	23.83	23.87	23.97		0
	1	5	23.86	23.89	24.01		0
	3	0	23.78	23.85	23.96		0
	3	2	23.80	23.82	23.96		0
	3	3	23.78	23.82	23.93		0
	6	0	22.84	22.83	22.97	0-1	1
16QAM	1	0	22.78	22.66	22.83	0-1	1
	1	2	22.69	22.62	22.92		1
	1	5	22.77	22.75	22.94		1
	3	0	23.00	22.96	23.05		1
	3	2	22.99	23.00	23.10		1
	3	3	22.94	22.89	23.00		1
	6	0	21.94	21.90	21.89	0-2	2
64QAM	1	0	21.71	21.94	21.97	0-2	2
	1	2	21.70	21.91	21.98		2
	1	5	21.69	21.87	21.99		2
	3	0	21.93	21.89	21.93		2
	3	2	21.92	21.88	21.90		2
	3	3	21.92	21.89	21.92		2
	6	0	20.92	20.80	20.81	0-3	3



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 46 of 114	

Table 9-30
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.41	22.45	22.40	0	0
	1	50	22.33	22.14	22.37		0
	1	99	22.07	21.97	22.24		0
	50	0	22.19	22.14	22.14	0-1	0
	50	25	22.19	22.04	22.09		0
	50	50	22.06	21.95	22.11		0
	100	0	22.17	21.99	22.07		0
16QAM	1	0	22.15	22.32	22.25	0-1	0
	1	50	22.30	21.85	22.44		0
	1	99	21.74	21.61	21.92		0
	50	0	22.28	22.12	22.43	0-2	0
	50	25	22.20	22.00	22.25		0
	50	50	22.14	21.91	22.22		0
	100	0	22.14	22.07	22.16		0
64QAM	1	0	22.36	22.10	22.32	0-2	0
	1	50	22.25	21.95	21.78		0
	1	99	22.06	21.69	21.89		0
	50	0	21.20	21.05	21.20	0-3	1
	50	25	21.15	20.96	21.03		1
	50	50	21.16	20.83	21.02		1
	100	0	21.23	21.13	21.12		1

Table 9-31
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.13	22.15	22.12	0	0
	1	36	21.95	21.97	21.98		0
	1	74	21.83	21.70	21.81		0
	36	0	22.04	22.05	22.00	0-1	0
	36	18	22.00	21.94	21.97		0
	36	37	21.93	21.81	21.88		0
	75	0	22.05	21.92	21.97		0
16QAM	1	0	22.31	22.13	22.08	0-1	0
	1	36	22.06	21.90	21.89		0
	1	74	21.96	21.80	21.85		0
	36	0	22.10	22.00	22.03	0-2	0
	36	18	22.00	21.92	22.00		0
	36	37	21.96	21.80	21.95		0
	75	0	21.94	21.90	21.97		0
64QAM	1	0	22.13	21.97	22.11	0-2	0
	1	36	22.04	21.84	21.92		0
	1	74	21.89	21.63	21.83		0
	36	0	21.16	21.08	20.96	0-3	1
	36	18	21.10	20.99	20.90		1
	36	37	21.05	20.91	20.88		1
	75	0	21.05	20.96	20.97		1



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 47 of 114

Table 9-32
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.98	22.02	22.10	0	0
	1	25	21.92	21.87	22.01		0
	1	49	21.85	21.76	21.95		0
	25	0	21.99	21.96	21.96	0-1	0
	25	12	21.94	21.91	21.93		0
	25	25	21.88	21.81	21.89		0
16QAM	50	0	21.92	21.89	21.92	0-1	0
	1	0	21.96	22.09	22.25		0
	1	25	21.85	21.86	22.16		0
	1	49	21.86	21.84	22.07	0-2	0
	25	0	22.02	22.00	22.16		0
	25	12	22.00	21.96	22.05		0
64QAM	25	25	21.94	21.89	22.02	0-2	0
	50	0	21.92	21.97	21.99		0
	1	0	22.04	21.87	22.00	0-2	0
	1	25	22.04	21.71	21.94		0
	1	49	21.97	21.69	21.91		0
	25	0	21.00	21.03	20.99	0-3	1
	25	12	20.97	21.00	20.98		1
	25	25	20.94	20.93	20.97		1
	50	0	20.94	20.94	20.97		1

Table 9-33
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.92	21.96	21.95	0	0
	1	12	21.84	21.95	21.96		0
	1	24	21.83	21.91	21.95		0
	12	0	21.88	21.97	21.97	0-1	0
	12	6	21.84	21.91	22.00		0
	12	13	21.85	21.86	21.98		0
16QAM	25	0	21.84	21.89	21.98	0-1	0
	1	0	21.90	22.01	22.13		0
	1	12	21.95	21.91	22.16		0
	1	24	21.92	21.88	22.13	0-2	0
	12	0	21.93	21.94	22.07		0
	12	6	21.90	21.90	22.05		0
	12	13	21.87	21.85	22.03		0
64QAM	25	0	21.86	21.99	22.00	0-2	0
	1	0	21.89	21.86	22.08		0
	1	12	21.88	21.87	22.03		0
	1	24	21.89	21.79	21.99	0-3	0
	12	0	20.89	20.88	20.93		1
	12	6	20.88	20.87	20.92		1
	12	13	20.85	20.81	20.93		1
	25	0	20.96	20.90	20.89		1





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 48 of 114	

Table 9-34
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.93	21.98	22.07	0	0
	1	7	21.89	21.91	22.06		0
	1	14	21.89	21.88	22.03		0
	8	0	21.88	21.92	21.95	0-1	0
	8	4	21.85	21.89	21.95		0
	8	7	21.87	21.86	21.92		0
16QAM	15	0	21.88	21.89	21.95	0-1	0
	1	0	21.86	21.94	21.98		0
	1	7	21.80	21.89	21.94		0
	1	14	21.74	21.87	22.04	0-2	0
	8	0	21.86	21.93	21.97		0
	8	4	21.83	21.94	21.94		0
64QAM	8	7	21.82	21.90	21.92	0-2	0
	15	0	21.84	21.92	21.98		0
	1	0	21.93	21.90	21.90		0-2
	1	7	21.90	21.78	21.84	0	
	1	14	21.81	21.79	22.01	0	
	8	0	20.89	20.94	20.90	0-3	1
8	4	20.91	20.91	20.90	1		
8	7	20.90	20.90	20.94	1		
	15	0	20.97	20.89	20.95		1

Table 9-35
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.88	21.83	21.87	0	0
	1	2	21.86	21.81	21.89		0
	1	5	21.90	21.81	21.88		0
	3	0	21.93	21.86	21.91		0
	3	2	21.94	21.88	21.90		0
	3	3	21.94	21.84	21.91		0
	6	0	21.93	21.87	21.93	0-1	0
16QAM	1	0	21.92	21.80	21.78	0-1	0
	1	2	21.84	21.85	21.75		0
	1	5	21.74	21.87	21.77		0
	3	0	22.05	21.99	22.12		0
	3	2	21.98	21.80	22.14		0
	3	3	21.94	21.92	22.14	0	
64QAM	6	0	21.98	21.97	21.94	0-2	0
	1	0	22.01	21.85	21.97	0-2	0
	1	2	22.00	21.83	21.98		0
	1	5	22.04	21.91	21.92		0
	3	0	21.88	21.88	21.74		0
	3	2	21.86	21.90	21.69		0
64QAM	3	3	21.88	21.91	21.75	0-3	0
	6	0	21.00	20.82	20.97		1

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 49 of 114	

9.4.7

LTE Band 25 (PCS)

Table 9-36
LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.03	24.10	24.45	0	0
	1	50	24.00	24.06	24.41		0
	1	99	23.96	24.03	24.40		0
	50	0	22.92	22.99	23.25	0-1	1
	50	25	22.94	22.94	23.23		1
	50	50	22.88	22.93	23.24		1
	100	0	22.86	22.97	23.24		1
16QAM	1	0	22.88	22.93	23.23	0-1	1
	1	50	22.84	22.92	23.13		1
	1	99	22.78	22.89	23.11		1
	50	0	22.00	22.03	22.34	0-2	2
	50	25	21.96	22.02	22.24		2
	50	50	21.97	21.99	22.23		2
	100	0	21.89	21.96	22.24		2
64QAM	1	0	21.90	22.18	22.37	0-2	2
	1	50	22.02	22.11	22.25		2
	1	99	21.90	22.09	22.19		2
	50	0	20.94	21.05	21.32	0-3	3
	50	25	20.95	21.01	21.18		3
	50	50	20.96	20.96	21.20		3
	100	0	20.93	21.04	21.31		3

Table 9-37
LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.87	24.14	24.39	0	0
	1	36	23.88	24.04	24.32		0
	1	74	23.90	23.96	24.33		0
	36	0	22.94	22.98	23.27	0-1	1
	36	18	22.93	22.98	23.28		1
	36	37	22.95	22.96	23.28		1
	75	0	22.94	22.97	23.25		1
16QAM	1	0	22.80	22.90	23.32	0-1	1
	1	36	22.81	22.82	23.28		1
	1	74	22.75	22.73	23.23		1
	36	0	22.03	22.03	22.24	0-2	2
	36	18	22.01	22.03	22.25		2
	36	37	22.03	22.00	22.25		2
	75	0	22.02	22.04	22.29		2
64QAM	1	0	21.73	21.75	22.11	0-2	2
	1	36	21.85	21.66	22.14		2
	1	74	21.81	21.63	22.15		2
	36	0	20.93	20.92	21.08	0-3	3
	36	18	20.94	20.85	21.08		3
	36	37	20.90	20.89	21.15		3
	75	0	20.89	20.88	21.18		3



FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 50 of 114	

Table 9-38
LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.91	24.00	24.25	0	0
	1	25	23.90	24.02	24.21		0
	1	49	23.93	23.99	24.18		0
	25	0	22.92	22.98	23.20	0-1	1
	25	12	22.94	22.95	23.22		1
	25	25	22.93	22.96	23.23		1
	50	0	22.93	22.96	23.25		1
16QAM	1	0	22.75	22.97	23.03	0-1	1
	1	25	22.76	22.95	23.06		1
	1	49	22.75	22.98	23.02		1
	25	0	22.02	22.02	22.27	0-2	2
	25	12	22.05	22.03	22.28		2
	25	25	22.05	22.03	22.29		2
	50	0	22.00	22.02	22.30		2
64QAM	1	0	21.77	21.79	22.02	0-2	2
	1	25	21.83	21.77	22.10		2
	1	49	21.87	21.72	22.09		2
	25	0	20.92	20.90	21.17	0-3	3
	25	12	20.93	20.89	21.18		3
	25	25	20.94	20.92	21.17		3
	50	0	20.88	20.90	21.15		3

Table 9-39
LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.97	24.03	24.31	0	0
	1	12	23.98		24.29		0
	1	24	23.99		24.31		0
	12	0	22.96	22.99	23.30	0-1	1
	12	6	22.98	22.97	23.30		1
	12	13	22.96	22.96	23.30		1
	25	0	22.97	22.97	23.32		1
16QAM	1	0	22.62	22.75	22.92	0-1	1
	1	12	22.68	22.72	22.89		1
	1	24	22.67	22.73	22.91		1
	12	0	22.10	22.04	22.36	0-2	2
	12	6	22.08	22.03	22.39		2
	12	13	22.12	22.01	22.38		2
	25	0	22.04	22.05	22.39		2
64QAM	1	0	21.95	21.67	22.22	0-2	2
	1	12	21.97	21.59	22.28		2
	1	24	22.00	21.69	22.23		2
	12	0	20.96	20.81	21.21	0-3	3
	12	6	20.92	20.81	21.19		3
	12	13	20.95	20.82	21.20		3
	25	0	20.92	20.85	21.20		3



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 51 of 114	

Table 9-40
LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.94	24.00	24.31	0	0
	1	7	23.95	23.96	24.30		0
	1	14	23.93	23.99	24.35		0
	8	0	22.97	22.93	23.29	0-1	1
	8	4	22.96	22.97	23.30		1
	8	7	23.00	22.96	23.30		1
	15	0	22.99	22.96	23.32		1
16QAM	1	0	22.87	22.92	23.25	0-1	1
	1	7	23.00	22.92	23.10		1
	1	14	23.01	22.89	23.03		1
	8	0	22.00	22.00	22.38	0-2	2
	8	4	22.02	21.97	22.40		2
	8	7	22.02	21.98	22.37		2
	15	0	21.98	22.02	22.13		2
64QAM	1	0	21.92	21.70	22.21	0-2	2
	1	7	21.92	21.80	22.15		2
	1	14	21.95	21.79	22.10		2
	8	0	20.83	20.86	21.20	0-3	3
	8	4	20.84	20.91	21.21		3
	8	7	20.85	20.85	21.19		3
	15	0	20.94	20.82	21.24		3

Table 9-41
LTE Band 25 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.85	23.92	24.22	0	0
	1	2	23.84	23.89	24.21		0
	1	5	23.88	23.94	24.25		0
	3	0	23.88	23.90	24.21		0
	3	2	23.89	23.90	24.24		0
	3	3	23.90	23.89	24.22		0
	6	0	23.00	22.96	23.30	0-1	1
16QAM	1	0	22.92	22.75	23.36	0-1	1
	1	2	22.90	22.73	23.35		1
	1	5	22.88	22.80	23.34		1
	3	0	22.94	22.91	23.37		1
	3	2	22.96	22.87	23.36		1
	3	3	22.92	22.91	23.31		1
	6	0	22.07	21.97	22.34	0-2	2
64QAM	1	0	21.97	21.85	22.23	0-2	2
	1	2	21.97	21.96	22.27		2
	1	5	22.00	22.00	22.20		2
	3	0	21.94	21.84	22.24		2
	3	2	21.98	21.83	22.27		2
	3	3	21.97	21.82	22.25		2
	6	0	20.99	20.74	21.10	0-3	3



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 52 of 114	

Table 9-42
LTE Band 25 (PCS) Reduced Conducted Powers -20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.52	22.42	22.49	0	0
	1	50	22.44	22.38	22.35		0
	1	99	22.33	22.29	22.36		0
	50	0	22.49	22.39	22.63	0-1	0
	50	25	22.41	22.34	22.59		0
	50	50	22.33	22.31	22.59		0
	100	0	22.39	22.34	22.51		0
16QAM	1	0	22.46	22.33	22.67	0-1	0
	1	50	22.38	22.24	22.56		0
	1	99	22.29	22.25	22.67		0
	50	0	22.48	22.37	22.58	0-2	0
	50	25	22.45	22.29	22.54		0
	50	50	22.37	22.20	22.56		0
	100	0	22.31	22.29	22.65		0
64QAM	1	0	22.38	22.25	22.39	0-2	0
	1	50	22.05	22.43	22.65		0
	1	99	22.01	22.23	22.30		0
	50	0	21.33	21.31	21.57	0-3	1
	50	25	21.32	21.18	21.61		1
	50	50	21.36	21.23	21.60		1
	100	0	21.37	21.32	21.59		1

Table 9-43
LTE Band 25 (PCS) Reduced Conducted Powers -15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.84	21.90	22.19	0	0
	1	36	21.93	21.86	22.12		0
	1	74	21.82	21.77	22.15		0
	36	0	21.91	22.00	22.20	0-1	0
	36	18	21.91	21.95	22.18		0
	36	37	21.88	21.94	22.19		0
	75	0	21.89	21.97	22.26		0
16QAM	1	0	21.93	22.03	21.99	0-1	0
	1	36	21.91	22.00	22.11		0
	1	74	21.83	21.86	22.09		0
	36	0	21.88	21.92	22.19	0-2	0
	36	18	21.90	21.92	22.17		0
	36	37	21.87	21.87	22.20		0
	75	0	21.95	21.98	22.24		0
64QAM	1	0	21.86	21.61	22.16	0-2	0
	1	36	21.96	21.58	22.21		0
	1	74	21.99	21.64	22.23		0
	36	0	20.92	20.71	21.16	0-3	1
	36	18	20.96	20.71	21.20		1
	36	37	20.95	20.68	21.22		1
	75	0	20.93	20.67	21.18		1



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 53 of 114	

Table 9-44
LTE Band 25 (PCS) Reduced Conducted Powers -10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.00	21.87	22.22	0	0
	1	25	21.97	21.82	22.20		0
	1	49	22.00	21.77	22.23		0
	25	0	21.93	21.92	22.13	0-1	0
	25	12	21.97	21.90	22.15		0
	25	25	21.95	21.90	22.14		0
	50	0	21.97	21.90	22.11		0
16QAM	1	0	21.80	21.73	22.02	0-1	0
	1	25	21.95	21.78	21.90		0
	1	49	21.74	21.80	22.00		0
	25	0	22.00	21.94	22.18	0-2	0
	25	12	22.01	21.95	22.21		0
	25	25	22.00	21.94	22.20		0
	50	0	21.96	21.93	22.14		0
64QAM	1	0	21.88	21.87	22.02	0-2	0
	1	25	21.87	21.89	22.10		0
	1	49	21.88	21.92	22.05		0
	25	0	20.90	20.96	21.18	0-3	1
	25	12	20.93	20.94	21.20		1
	25	25	20.97	20.93	21.27		1
	50	0	20.94	20.97	21.22		1

Table 9-45
LTE Band 25 (PCS) Reduced Conducted Powers -5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.92	21.88	22.25	0	0
	1	12	21.93	21.82	22.23		0
	1	24	21.92	21.81	22.21		0
	12	0	21.96	21.93	22.24	0-1	0
	12	6	21.97	21.91	22.22		0
	12	13	22.00	21.93	22.20		0
	25	0	21.96	21.91	22.23		0
16QAM	1	0	21.80	21.91	21.94	0-1	0
	1	12	21.83	21.77	21.98		0
	1	24	21.79	21.77	21.95		0
	12	0	21.98	22.00	22.29	0-2	0
	12	6	21.99	22.01	22.27		0
	12	13	22.01	21.99	22.28		0
	25	0	22.00	21.95	22.32		0
64QAM	1	0	22.02	21.94	22.10	0-2	0
	1	12	22.03	21.88	22.20		0
	1	24	22.05	21.81	22.22		0
	12	0	20.93	20.85	21.35	0-3	1
	12	6	20.95	20.89	21.34		1
	12	13	20.93	20.88	21.33		1
	25	0	20.98	20.92	21.30		1





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 54 of 114	

Table 9-46
LTE Band 25 (PCS) Reduced Conducted Powers -3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.98	21.88	22.20	0	0
	1	7	22.00	21.89	22.19		0
	1	14	21.97	21.86	22.17		0
	8	0	22.03	21.95	22.22	0-1	0
	8	4	22.00	21.94	22.23		0
	8	7	22.00	21.93	22.21		0
	15	0	21.97	21.91	22.19		0
16QAM	1	0	21.85	21.80	22.02	0-1	0
	1	7	21.89	21.81	22.15		0
	1	14	22.08	21.78	22.10		0
	8	0	21.98	21.95	22.27	0-2	0
	8	4	22.01	21.97	22.21		0
	8	7	22.04	21.94	22.22		0
	15	0	22.00	21.94	22.21		0
64QAM	1	0	21.89	21.77	22.33	0-2	0
	1	7	21.96	21.86	22.28		0
	1	14	21.95	21.77	22.17		0
	8	0	20.90	20.98	21.25	0-3	1
	8	4	20.91	21.00	21.23		1
	8	7	20.92	20.96	21.23		1
	15	0	20.92	20.96	21.29		1

Table 9-47
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.99	21.83	22.17	0	0
	1	2	21.95	21.85	22.18		0
	1	5	22.03	21.84	22.20		0
	3	0	21.94	21.89	22.20		0
	3	2	21.95	21.90	22.18		0
	3	3	21.97	21.90	22.19		0
	6	0	22.02	21.89	22.19	0-1	0
16QAM	1	0	21.97	22.04	21.96	0-1	0
	1	2	22.01	21.96	21.97		0
	1	5	21.99	21.95	22.13		0
	3	0	22.08	21.93	22.33		0
	3	2	22.08	21.92	22.30		0
	3	3	22.11	21.87	22.29		0
	6	0	22.06	21.94	22.15	0-2	0
64QAM	1	0	22.04	21.81	22.20	0-2	0
	1	2	22.03	21.81	22.27		0
	1	5	22.06	21.79	22.14		0
	3	0	21.90	21.84	22.22		0
	3	2	21.98	21.87	22.25		0
	3	3	21.96	21.91	22.20		0
	6	0	20.89	20.90	21.36	0-3	1

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 55 of 114	

9.4.8

LTE Band 30

Table 9-48
LTE Band 30 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.57	0	0
	1	25	24.55		0
	1	49	23.97		0
	25	0	23.19	0-1	1
	25	12	23.17		1
	25	25	23.17		1
16QAM	50	0	23.13	0-1	1
	1	0	22.98		1
	1	25	22.87		1
	1	49	22.86	0-2	1
	25	0	22.10		2
	25	12	22.14		2
64QAM	25	25	22.13	0-2	2
	50	0	22.08		2
	1	0	21.91	0-2	2
	1	25	22.18		2
	1	49	22.05	0-3	2
	25	0	21.19		3
64QAM	25	12	21.20		3
	25	25	21.14		3
	50	0	21.17		3

Table 9-49
LTE Band 30 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.56	0	0
	1	12	24.62		0
	1	24	24.61		0
	12	0	23.57	0-1	1
	12	6	23.61		1
	12	13	23.60		1
16QAM	25	0	23.61	0-1	1
	1	0	23.45		1
	1	12	23.44	0-1	1
	1	24	23.42		1
	12	0	22.35	0-2	2
	12	6	22.35		2
64QAM	12	13	22.42		2
	25	0	22.40	0-2	2
	1	0	22.34		2
	1	12	22.44	0-2	2
	1	24	22.34		2
	12	0	21.31	0-3	3
64QAM	12	6	21.35		3
	12	13	21.37		3
	25	0	21.39		3

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 56 of 114



Table 9-50
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.47	0	0
	1	25	22.50		0
	1	49	22.43		0
	25	0	22.21	0-1	0
	25	12	22.20		0
	25	25	22.20		0
16QAM	50	0	22.20	0-1	0
	1	0	22.04		0
	1	25	21.97		0
	1	49	22.12	0-2	0
	25	0	22.15		0
	25	12	22.14		0
64QAM	25	25	22.15	0-2	0
	50	0	22.15		0
	1	0	22.00	0-2	0
	1	25	21.95		0
	1	49	21.99	0-3	0
	25	0	21.25		1
	25	12	21.23		1
	25	25	21.20		1
	50	0	21.16		1

Table 9-51
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.40	0	0
	1	12	22.40		0
	1	24	22.37		0
	12	0	22.43	0-1	0
	12	6	22.44		0
	12	13	22.46		0
16QAM	25	0	22.45	0-1	0
	1	0	22.42		0
	1	12	22.42		0
	1	24	22.37	0-2	0
	12	0	22.44		0
	12	6	22.49		0
64QAM	12	13	22.42	0-2	0
	25	0	22.48		0
	1	0	22.29	0-2	0
	1	12	22.45		0
	1	24	22.49	0-3	0
	12	0	21.20		1
	12	6	21.23		1
	12	13	21.22		1
	25	0	21.19		1

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 57 of 114	

9.4.9

LTE Band 7

Table 9-52
LTE Band 7 Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.32	23.27	23.51	0	0
	1	50	23.22	23.30	23.47		0
	1	99	23.15	23.40	23.37		0
	50	0	22.12	22.14	22.32	0-1	1
	50	25	22.08	22.16	22.30		1
	50	50	22.04	22.19	22.26		1
	100	0	22.10	22.15	22.28		1
16QAM	1	0	22.17	22.17	22.45	0-1	1
	1	50	22.11	22.20	22.34		1
	1	99	22.06	22.30	22.24		1
	50	0	21.10	21.18	21.38	0-2	2
	50	25	21.08	21.19	21.34		2
	50	50	21.06	21.25	21.29		2
	100	0	21.08	21.18	21.31		2
64QAM	1	0	21.14	21.17	21.45	0-2	2
	1	50	21.06	21.22	21.37		2
	1	99	21.01	21.28	21.28		2
	50	0	20.21	20.25	20.49	0-3	3
	50	25	20.16	20.28	20.44		3
	50	50	20.15	20.33	20.40		3
	100	0	20.24	20.34	20.52		3

Table 9-53
LTE Band 7 Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.38	23.39	23.36	0	0
	1	36	23.36	23.39	23.33		0
	1	74	23.33	23.34	23.40		0
	36	0	22.33	22.31	22.33	0-1	1
	36	18	22.29	22.30	22.31		1
	36	37	22.30	22.31	22.30		1
	75	0	22.31	22.29	22.34		1
16QAM	1	0	22.50	22.33	22.20	0-1	1
	1	36	22.36	22.34	22.19		1
	1	74	22.36	22.36	22.17		1
	36	0	21.34	21.34	21.33	0-2	2
	36	18	21.34	21.34	21.33		2
	36	37	21.33	21.32	21.34		2
	75	0	21.35	21.33	21.35		2
64QAM	1	0	21.13	21.11	21.41	0-2	2
	1	36	21.15	21.17	21.35		2
	1	74	21.24	21.20	21.37		2
	36	0	20.28	20.19	20.31	0-3	3
	36	18	20.31	20.20	20.35		3
	36	37	20.28	20.21	20.34		3
	75	0	20.26	20.17	20.33		3



FCC ID: A3LSMA102U	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 58 of 114

Table 9-54
LTE Band 7 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.42	23.40	23.39	0	0
	1	25	23.40	23.39	23.32		0
	1	49	23.41	23.40	23.41		0
	25	0	22.27	22.24	22.22	0-1	1
	25	12	22.28	22.25	22.21		1
	25	25	22.31	22.23	22.21		1
16QAM	50	0	22.30	22.22	22.25	0-1	1
	1	0	22.29	22.30	22.37		1
	1	25	22.30	22.20	22.40		1
	1	49	22.19	22.20	22.25	0-2	1
	25	0	21.37	21.33	21.34		2
	25	12	21.40	21.32	21.31		2
64QAM	25	25	21.42	21.29	21.30	0-2	2
	50	0	21.38	21.30	21.28		2
	1	0	21.16	21.10	21.15	0-2	2
	1	25	21.25	21.15	21.18		2
	1	49	21.25	21.17	21.20		2
	25	0	20.23	20.22	20.22	0-3	3
25	12	20.25	20.23	20.27	3		
25	25	20.28	20.22	20.23	3		
	50	0	20.22	20.21	20.24		3

Table 9-55
LTE Band 7 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 7 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.42	23.30	23.28	0	0	
	1	12	23.41	23.29	23.29		0	
	1	24	23.44	23.31	23.31		0	
	12	0	22.34	22.28	22.23	0-1	1	
	12	6	22.32	22.25	22.22		1	
	12	13	22.31	22.24	22.23		1	
16QAM	25	0	22.30	22.26	22.24	0-1	1	
	1	0	22.28	22.27	22.09		0-1	1
	1	12	22.40	22.10	22.10			1
	1	24	22.34	22.15	22.11	0-2		1
	12	0	21.39	21.36	21.34		2	
	12	6	21.40	21.35	21.32		2	
64QAM	12	13	21.38	21.34	21.35	0-2	2	
	25	0	21.39	21.29	21.27		2	
	1	0	21.24	21.01	21.01		0-2	2
	1	12	21.30	21.03	21.09	0-3		2
	1	24	21.26	20.99	21.02			2
	12	0	20.25	20.17	20.15		0-3	3
12	6	20.25	20.14	20.17	3			
12	13	20.30	20.17	20.16	3			
	25	0	20.25	20.21	20.21		3	



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 59 of 114	

Table 9-56
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.97	20.07	19.99	0	0
	1	50	20.01	20.01	19.98		0
	1	99	19.96	20.03	19.99		0
	50	0	19.86	19.78	19.77	0-1	0
	50	25	19.83	19.75	19.77		0
	50	50	19.82	19.75	19.72		0
	100	0	19.84	19.79	19.75		0
16QAM	1	0	19.86	19.91	19.91	0-1	0
	1	50	19.93	19.77	19.85		0
	1	99	19.86	19.89	19.84		0
	50	0	19.98	19.89	19.91	0-2	0
	50	25	19.99	19.86	19.87		0
	50	50	19.96	19.88	19.84		0
	100	0	19.98	19.92	19.88		0
64QAM	1	0	20.20	20.06	20.00	0-2	0
	1	50	20.05	19.82	20.03		0
	1	99	20.15	19.77	19.97		0
	50	0	19.92	19.77	20.02	0-3	0
	50	25	19.98	19.91	20.02		0
	50	50	19.95	19.92	19.97		0
	100	0	20.06	19.95	20.06		0

Table 9-57
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.85	19.84	19.90	0	0
	1	36	19.82	19.84	19.91		0
	1	74	19.80	19.85	19.88		0
	36	0	19.74	19.77	19.80	0-1	0
	36	18	19.76	19.79	19.80		0
	36	37	19.74	19.73	19.82		0
	75	0	19.74	19.77	19.81		0
16QAM	1	0	19.60	19.74	19.79	0-1	0
	1	36	19.63	19.71	19.78		0
	1	74	19.53	19.63	19.86		0
	36	0	19.74	19.81	19.85	0-2	0
	36	18	19.72	19.80	19.80		0
	36	37	19.70	19.80	19.81		0
	75	0	19.75	19.77	19.82		0
64QAM	1	0	19.82	19.80	19.89	0-2	0
	1	36	19.85	19.87	19.90		0
	1	74	19.91	19.92	19.93		0
	36	0	19.95	19.91	19.97	0-3	0
	36	18	19.94	19.93	20.00		0
	36	37	19.99	19.96	20.01		0
	75	0	19.92	19.93	19.98		0





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 60 of 114	

Table 9-58
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.88	19.81	19.87	0	0
	1	25	19.87	19.81	19.90		0
	1	49	19.86	19.80	19.85		0
	25	0	19.72	19.70	19.73	0-1	0
	25	12	19.74	19.72	19.75		0
	25	25	19.73	19.73	19.74		0
	50	0	19.74	19.72	19.74		0
16QAM	1	0	19.62	19.60	19.71	0-1	0
	1	25	19.64	19.65	19.81		0
	1	49	19.62	19.67	19.79		0
	25	0	19.74	19.75	19.76	0-2	0
	25	12	19.75	19.77	19.73		0
	25	25	19.77	19.75	19.77		0
	50	0	19.74	19.71	19.71		0
64QAM	1	0	19.87	19.81	19.80	0-2	0
	1	25	19.89	19.94	19.78		0
	1	49	19.94	19.95	19.75		0
	25	0	19.90	19.91	19.88	0-3	0
	25	12	19.90	19.91	19.88		0
	25	25	19.93	19.92	19.88		0
	50	0	19.89	19.89	19.87		0

Table 9-59
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.88	19.76	19.83	0	0
	1	12	19.82	19.75	19.84		0
	1	24	19.83	19.80	19.85		0
	12	0	19.77	19.71	19.73	0-1	0
	12	6	19.72	19.70	19.72		0
	12	13	19.79	19.71	19.72		0
	25	0	19.76	19.72	19.70		0
16QAM	1	0	19.61	19.46	19.80	0-1	0
	1	12	19.66	19.45	19.79		0
	1	24	19.44	19.47	19.83		0
	12	0	19.79	19.72	19.68	0-2	0
	12	6	19.80	19.72	19.72		0
	12	13	19.79	19.71	19.70		0
	25	0	19.77	19.74	19.70		0
64QAM	1	0	20.02	19.82	19.78	0-2	0
	1	12	20.03	19.80	19.85		0
	1	24	19.98	19.76	19.89		0
	12	0	19.93	19.85	19.83	0-3	0
	12	6	19.94	19.85	19.86		0
	12	13	19.98	19.86	19.88		0
	25	0	19.96	19.88	19.78		0

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 61 of 114	

9.4.10

LTE Band 41 PC3

Table 9-60
LTE Band 41 PC3 Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.28	23.38	23.29	23.03	23.26	0	0
	1	50	23.24	23.37	23.14	23.06	23.20		0
	1	99	23.19	23.28	23.10	23.10	23.17		0
	50	0	22.34	22.47	22.31	22.09	22.30	0-1	1
	50	25	22.36	22.54	22.26	22.16	22.28		1
	50	50	22.23	22.43	22.21	22.05	22.26		1
	100	0	22.32	22.44	22.28	22.03	22.29		1
16QAM	1	0	22.29	22.35	22.41	21.73	22.32	0-1	1
	1	50	22.38	22.14	21.98	21.85	22.26		1
	1	99	22.27	22.06	21.99	21.84	22.12		1
	50	0	21.43	21.49	21.21	21.05	21.36	0-2	2
	50	25	21.36	21.46	21.28	21.02	21.25		2
	50	50	21.29	21.48	21.11	20.96	21.21		2
	100	0	21.36	21.39	21.22	20.99	21.29		2
64QAM	1	0	20.91	20.91	20.89	20.52	20.98	0-2	2
	1	50	20.79	20.82	20.84	20.70	21.18		2
	1	99	21.07	21.03	20.91	20.63	21.01		2
	50	0	20.27	20.45	20.38	20.10	20.59	0-3	3
	50	25	20.32	20.50	20.37	20.15	20.53		3
	50	50	20.27	20.53	20.28	20.15	20.54		3
	100	0	20.32	20.46	20.34	20.18	20.58		3

Table 9-61
LTE Band 41 PC3 Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.63	23.48	23.27	23.40	23.29	0	0
	1	36	23.53	23.49	23.23	23.43	23.33		0
	1	74	23.53	23.55	23.07	23.41	23.25		0
	36	0	22.37	22.26	22.08	22.19	22.21	0-1	1
	36	18	22.33	22.31	22.08	22.23	22.20		1
	36	37	22.32	22.31	22.06	22.26	22.22		1
	75	0	22.34	22.34	22.09	22.26	22.23		1
16QAM	1	0	22.54	22.31	22.05	22.24	22.05	0-1	1
	1	36	22.55	22.28	22.06	22.23	22.03		1
	1	74	22.45	22.42	22.01	22.25	22.01		1
	36	0	21.55	21.37	21.20	21.26	21.30	0-2	2
	36	18	21.55	21.41	21.17	21.20	21.25		2
	36	37	21.43	21.43	21.14	21.28	21.24		2
	75	0	21.47	21.43	21.19	21.37	21.30		2
64QAM	1	0	21.10	21.13	20.89	20.90	20.89	0-2	2
	1	36	21.13	21.18	20.80	20.98	20.72		2
	1	74	21.01	21.19	20.86	21.06	20.84		2
	36	0	20.54	20.39	20.20	20.35	20.33	0-3	3
	36	18	20.49	20.47	20.10	20.38	20.29		3
	36	37	20.51	20.47	20.22	20.35	20.27		3
	75	0	20.53	20.47	20.19	20.41	20.32		3



FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 62 of 114

Table 9-62
LTE Band 41 PC3 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.70	23.60	23.35	23.43	22.71	0	0
	1	25	23.65	23.60	23.40	23.46	22.71		0
	1	49	23.66	23.62	23.14	23.53	22.72		0
	25	0	22.35	22.31	22.08	22.14	21.67	0-1	1
	25	12	22.35	22.35	22.08	22.21	21.67		1
	25	25	22.34	22.38	22.05	22.22	21.66		1
	50	0	22.35	22.36	22.05	22.23	21.65		1
16QAM	1	0	22.41	22.31	22.03	22.05	21.44	0-1	1
	1	25	22.33	22.37	22.00	22.07	21.48		1
	1	49	22.33	22.44	21.95	22.21	21.47		1
	25	0	21.51	21.36	21.12	21.22	20.71	0-2	2
	25	12	21.39	21.41	21.13	21.26	20.68		2
	25	25	21.37	21.40	21.01	21.27	20.68		2
	50	0	21.49	21.49	21.21	21.36	20.79		2
64QAM	1	0	21.12	21.15	20.97	20.98	20.40	0-2	2
	1	25	21.04	21.24	20.91	20.99	20.43		2
	1	49	21.01	21.25	20.88	21.03	20.39		2
	25	0	20.52	20.44	20.15	20.33	19.76	0-3	3
	25	12	20.52	20.46	20.12	20.37	19.75		3
	25	25	20.42	20.34	20.12	20.37	19.76		3
	50	0	20.47	20.46	20.18	20.35	19.76		3

Table 9-63
LTE Band 41 PC3 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.59	23.51	23.33	23.43	23.31	0	0
	1	12	23.58	23.47	23.37	23.41	23.28		0
	1	24	23.58	23.48	23.26	23.40	23.31		0
	12	0	22.37	22.29	22.06	22.17	22.15	0-1	1
	12	6	22.36	22.31	22.06	22.19	22.19		1
	12	13	22.35	22.34	22.04	22.19	22.18		1
	25	0	22.36	22.32	22.03	22.17	22.18		1
16QAM	1	0	22.38	22.15	21.87	21.96	22.04	0-1	1
	1	12	22.35	22.28	21.91	22.03	22.05		1
	1	24	22.35	22.17	21.89	22.15	22.12		1
	12	0	21.45	21.42	21.12	21.24	21.24	0-2	2
	12	6	21.43	21.41	21.01	21.23	21.24		2
	12	13	21.44	21.44	21.02	21.27	21.23		2
	25	0	21.38	21.37	21.06	21.23	21.20		2
64QAM	1	0	21.25	21.13	20.71	21.03	20.96	0-2	2
	1	12	21.19	21.17	20.70	21.07	20.96		2
	1	24	21.28	21.16	20.67	21.03	20.96		2
	12	0	20.47	20.43	20.11	20.31	20.36	0-3	3
	12	6	20.43	20.46	20.09	20.25	20.27		3
	12	13	20.42	20.46	20.07	20.34	20.26		3
	25	0	20.49	20.46	20.11	20.35	20.28		3



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 63 of 114	

Table 9-64
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.88	22.13	21.91	21.98	21.88	0	0
	1	50	21.75	22.04	21.99	21.95	21.73		0
	1	99	21.94	22.01	21.81	21.92	21.63		0
	50	0	21.82	22.02	21.86	21.96	21.82	0-1	0
	50	25	21.81	22.01	21.81	21.99	21.77		0
	50	50	21.80	21.95	21.86	21.94	21.71		0
	100	0	21.86	21.98	21.88	21.93	21.83		0
16QAM	1	0	21.88	21.92	21.81	21.94	21.88	0-1	0
	1	50	21.90	21.91	21.82	21.88	21.77		0
	1	99	21.89	21.82	21.83	21.86	21.82		0
	50	0	21.41	21.59	21.42	21.57	21.46	0-2	0
	50	25	21.40	21.54	21.39	21.48	21.41		0
	50	50	21.40	21.49	21.34	21.52	21.36		0
	100	0	21.31	21.68	21.37	21.53	21.46		0
64QAM	1	0	21.46	21.47	21.38	21.42	21.21	0-2	0
	1	50	21.49	21.42	21.31	21.44	21.23		0
	1	99	21.45	21.38	21.46	21.60	21.21		0
	50	0	20.65	20.62	20.55	20.56	20.66	0-3	1
	50	25	20.62	20.62	20.55	20.53	20.54		1
	50	50	20.67	20.66	20.50	20.64	20.51		1
	100	0	20.69	20.74	20.62	20.64	20.63		1

Table 9-65
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	21.82	21.78	21.99	21.93	21.80	0	0	
	1	36	21.77	21.78	21.94	21.93	21.75		0-1	0
	1	74	21.81	21.73	21.91	21.95	21.66			0
	36	0	22.34	22.33	21.63	21.89	21.75	0		
	36	18	22.35	22.32	21.61	21.88	21.70	0-1		0
	36	37	22.32	22.35	21.60	21.89	21.67		0	
	75	0	22.30	22.31	21.59	21.89	21.73		0	
16QAM	1	0	21.85	21.87	21.53	21.73	21.62	0-1	0	
	1	36	21.81	21.74	21.60	21.73	21.55		0-2	0
	1	74	21.78	21.74	21.56	21.71	21.46			0
	36	0	22.46	22.35	21.79	21.96	21.80	0		
	36	18	22.37	22.29	21.73	21.96	21.76	0-2		0
	36	37	22.44	22.36	21.74	21.97	21.72		0	
	75	0	22.38	22.36	21.70	22.01	21.80		0	
64QAM	1	0	21.54	21.66	21.86	21.88	21.78	0-2	0	
	1	36	21.47	21.65	21.84	21.85	21.72		0-3	0
	1	74	21.49	21.55	21.80	22.10	21.65			0
	36	0	20.66	20.71	20.50	20.58	20.50	1		
	36	18	20.62	20.72	20.46	20.58	20.45	0-3		1
	36	37	20.59	20.70	20.45	20.59	20.47		1	
	75	0	20.63	20.71	20.47	20.58	20.45		1	





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 64 of 114	

Table 9-66
LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	21.87	21.95	22.00	21.71	21.80	0	0	
	1	25	21.80	21.92	21.96	21.73	21.76		0-1	0
	1	49	21.80	21.88	21.91	21.71	21.68			0
	25	0	21.78	21.88	21.92	21.67	21.71	0		
	25	12	21.76	21.85	21.90	21.67	21.69	0-1		0
	25	25	21.75	21.86	21.89	21.66	21.66		0	
	50	0	21.75	21.87	21.92	21.67	21.70		0	
16QAM	1	0	21.62	21.57	21.77	21.45	21.58	0-1	0	
	1	25	21.57	21.55	21.68	21.42	21.56		0-2	0
	1	49	21.49	21.52	21.63	21.43	21.46			0
	25	0	21.88	21.95	22.01	21.78	21.80	0		
	25	12	21.85	21.94	21.99	21.76	21.78	0-2		0
	25	25	21.84	21.91	21.99	21.77	21.75		0	
	50	0	21.86	21.93	22.01	21.77	21.80		0	
64QAM	1	0	21.82	22.00	21.98	21.60	21.75	0-2	0	
	1	25	21.80	21.97	21.96	21.61	21.70		0-3	0
	1	49	21.74	21.95	21.93	21.59	21.65			0
	25	0	20.46	20.50	20.67	20.40	20.40	1		
	25	12	20.42	20.51	20.63	20.38	20.38	0-3		1
	25	25	20.41	20.49	20.60	20.39	20.30		1	
	50	0	20.43	20.52	20.65	20.40	20.39		1	

Table 9-67
LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.71	21.82	21.95	21.80	21.78	0	0
	1	12	21.73	21.81	21.93	21.81	21.77		0
	1	24	21.70	21.77	21.92	21.80	21.75		0
	12	0	21.67	21.77	21.92	21.77	21.74	0-1	0
	12	6	21.66	21.76	21.91	21.75	21.73		0
	12	13	21.65	21.75	21.90	21.75	21.71		0
	25	0	21.66	21.77	21.90	21.76	21.72		0
16QAM	1	0	21.41	21.42	21.67	21.67	21.57	0-1	0
	1	12	21.40	21.40	21.68	21.69	21.60		0
	1	24	21.39	21.39	21.65	21.66	21.54		0
	12	0	21.65	21.74	21.94	21.82	21.80	0-2	0
	12	6	21.65	21.73	21.95	21.81	21.76		0
	12	13	21.64	21.71	21.92	21.82	21.76		0
	25	0	21.72	21.85	21.98	21.87	21.80		0
64QAM	1	0	21.68	21.77	21.95	21.80	21.79	0-2	0
	1	12	21.71	21.78	21.97	21.79	21.77		0
	1	24	21.72	21.71	21.95	21.80	21.72		0
	12	0	20.40	20.48	20.73	20.58	20.50	0-3	1
	12	6	20.36	20.49	20.72	20.57	20.45		1
	12	13	20.36	20.49	20.72	20.58	20.46		1
	25	0	20.46	20.50	20.74	20.61	20.50		1

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 65 of 114	

9.4.11

LTE Band 41 PC2

Table 9-68
LTE Band 41 PC2 Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.06	26.27	26.33	25.79	26.02	0	0
	1	50	26.07	26.15	26.28	25.70	26.07		0
	1	99	26.11	26.00	26.23	25.79	25.96		0
	50	0	25.74	25.89	25.64	25.59	25.86	0-1	0
	50	25	25.70	25.92	25.55	25.56	25.78		0
	50	50	25.70	25.91	25.56	25.58	25.78		0
	100	0	25.75	25.97	25.62	25.50	25.78		0
16QAM	1	0	25.66	25.90	25.46	25.25	25.75	0-1	0
	1	50	25.84	25.88	25.45	25.39	25.71		0
	1	99	25.77	25.98	25.49	25.48	25.86		0
	50	0	24.97	24.96	24.80	24.65	24.96	0-2	1
	50	25	24.92	24.93	24.64	24.70	24.91		1
	50	50	24.92	24.87	24.73	24.70	24.85		1
	100	0	24.83	24.95	24.73	24.57	24.84		1
64QAM	1	0	24.44	24.57	24.44	24.58	24.56	0-2	1
	1	50	24.35	24.47	24.42	24.56	24.58		1
	1	99	24.41	24.55	24.40	24.59	24.48		1
	50	0	23.96	23.94	23.83	23.52	23.92	0-3	2
	50	25	23.90	23.97	23.78	23.54	23.81		2
	50	50	23.88	24.00	23.81	23.62	23.82		2
	100	0	23.87	23.97	23.73	23.70	23.91		2

Table 9-69
LTE Band 41 PC2 Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.52	26.35	26.20	25.60	25.87	0	0
	1	36	26.57	26.31	26.21	25.62	25.85		0
	1	74	26.55	26.35	26.15	25.58	25.85		0
	36	0	26.46	26.28	26.04	25.48	25.75	0-1	0
	36	18	26.47	26.25	26.01	25.44	25.76		0
	36	37	26.46	26.24	25.99	25.40	25.75		0
	75	0	26.45	26.27	26.00	25.44	25.77		0
16QAM	1	0	26.45	25.66	25.62	25.27	25.58	0-1	0
	1	36	26.48	25.65	25.63	25.20	25.57		0
	1	74	26.48	25.59	25.59	25.23	25.61		0
	36	0	25.46	25.25	25.00	24.45	24.70	0-2	1
	36	18	25.47	25.18	25.02	24.40	24.70		1
	36	37	25.48	25.18	25.01	24.36	24.69		1
	75	0	25.49	25.29	25.00	24.35	24.75		1
64QAM	1	0	25.22	25.05	24.95	24.16	24.04	0-2	1
	1	36	25.22	25.06	24.93	24.06	24.16		1
	1	74	25.25	25.00	24.87	24.31	24.06		1
	36	0	24.49	24.23	24.00	23.51	23.75	0-3	2
	36	18	24.46	24.20	24.00	23.44	23.73		2
	36	37	24.50	24.18	24.01	23.40	23.67		2
	75	0	24.50	24.19	23.98	23.45	23.75		2



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 66 of 114	

Table 9-70
LTE Band 41 PC2 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.48	26.50	26.20	25.88	25.95	0	0
	1	25	26.51	26.45	26.16	25.80	25.89		0
	1	49	26.53	26.39	26.20	25.75	25.90		0
	25	0	26.39	26.29	26.06	25.48	25.76	0-1	0
	25	12	26.39	26.29	26.04	25.45	25.77		0
	25	25	26.34	26.21	26.03	25.42	25.76		0
	50	0	26.38	26.28	26.05	25.46	25.75		0
16QAM	1	0	26.15	25.90	25.95	25.29	25.40	0-1	0
	1	25	26.14	25.84	25.93	25.25	25.44		0
	1	49	26.14	25.82	25.89	25.25	25.45		0
	25	0	25.40	25.28	24.98	24.55	24.81	0-2	1
	25	12	25.35	25.24	24.97	24.52	24.82		1
	25	25	25.36	25.20	24.93	24.54	24.80		1
	50	0	25.45	25.32	25.11	24.44	24.77		1
64QAM	1	0	25.22	25.15	24.90	24.62	24.42	0-2	1
	1	25	25.26	25.14	24.97	24.56	24.41		1
	1	49	25.24	25.10	24.89	24.55	24.43		1
	25	0	24.40	24.30	24.11	23.60	23.85	0-3	2
	25	12	24.39	24.29	24.10	23.53	23.85		2
	25	25	24.39	24.27	24.07	23.50	23.81		2
	50	0	24.40	24.16	24.05	23.46	23.73		2

Table 9-71
LTE Band 41 PC2 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.58	26.35	26.30	25.66	25.88	0	0
	1	12	26.59	26.36	26.28	25.63	25.89		0
	1	24	26.58	26.33	26.30	25.60	25.91		0
	12	0	26.48	26.18	26.08	25.50	25.79	0-1	0
	12	6	26.46	26.17	26.09	25.48	25.76		0
	12	13	26.48	26.18	26.06	25.45	25.79		0
	25	0	26.47	26.17	26.04	25.47	25.78		0
16QAM	1	0	26.23	25.70	25.85	25.20	25.66	0-1	0
	1	12	26.21	25.69	25.82	25.15	25.62		0
	1	24	26.23	25.68	25.86	25.14	25.64		0
	12	0	25.46	25.18	25.10	24.54	24.72	0-2	1
	12	6	25.47	25.19	25.09	24.50	24.73		1
	12	13	25.48	25.18	25.09	24.49	24.72		1
	25	0	25.47	25.18	25.03	24.44	24.70		1
64QAM	1	0	25.40	25.12	24.91	24.55	24.58	0-2	1
	1	12	25.39	25.11	24.95	24.56	24.59		1
	1	24	25.35	25.08	24.92	24.49	24.60		1
	12	0	24.36	24.15	24.08	23.48	23.71	0-3	2
	12	6	24.35	24.27	24.07	23.45	23.74		2
	12	13	24.46	24.13	24.05	23.46	23.75		2
	25	0	24.50	24.25	24.09	23.43	23.80		2



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 67 of 114	

Table 9-72
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.03	22.21	22.05	22.23	22.03	0	0
	1	50	21.99	22.25	22.03	22.26	21.96		0
	1	99	21.97	22.06	21.96	22.19	21.90		0
	50	0	21.77	21.98	21.90	21.99	21.79	0-1	0
	50	25	21.75	21.99	21.75	21.94	21.77		0
	50	50	21.73	21.96	21.71	22.01	21.70		0
	100	0	21.82	22.00	21.84	22.00	21.76		0
16QAM	1	0	21.68	21.89	22.15	21.90	22.03	0-1	0
	1	50	21.72	21.83	22.15	21.94	21.88		0
	1	99	21.71	21.83	21.80	21.96	21.93		0
	50	0	21.87	22.00	21.94	22.04	21.88	0-2	0
	50	25	21.77	22.10	21.89	21.99	21.78		0
	50	50	21.82	21.98	21.83	22.05	21.79		0
	100	0	21.85	22.10	21.89	22.04	21.86		0
64QAM	1	0	21.62	22.05	22.01	22.00	21.71	0-2	0
	1	50	21.66	22.08	21.75	22.01	21.64		0
	1	99	21.58	22.08	21.68	22.04	21.54		0
	50	0	21.85	22.06	21.79	22.08	21.75	0-3	0
	50	25	21.84	21.93	21.93	21.99	21.82		0
	50	50	21.81	21.98	21.87	22.00	21.74		0
	100	0	21.48	22.05	21.92	22.01	21.80		0

Table 9-73
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.85	21.68	21.73	21.59	21.96	0	0
	1	36	21.77	21.71	21.80	21.53	21.97		0
	1	74	21.75	21.71	21.72	21.49	21.90		0
	36	0	21.98	21.94	21.97	21.81	22.15	0-1	0
	36	18	21.95	21.94	21.93	21.77	22.13		0
	36	37	21.95	21.97	21.94	21.75	22.12		0
	75	0	21.93	21.94	21.93	21.72	22.15		0
16QAM	1	0	21.74	21.75	21.99	21.72	22.14	0-1	0
	1	36	21.86	21.88	21.98	21.76	22.15		0
	1	74	21.95	22.04	21.92	21.70	22.10		0
	36	0	22.15	22.10	22.12	21.91	22.26	0-2	0
	36	18	22.09	22.12	22.09	21.90	22.27		0
	36	37	22.07	22.14	22.08	21.87	22.27		0
	75	0	22.05	22.04	22.00	21.88	22.30		0
64QAM	1	0	21.80	21.53	21.60	21.68	21.85	0-2	0
	1	36	21.84	21.70	21.60	21.38	21.69		0
	1	74	21.90	21.71	21.81	21.45	21.72		0
	36	0	22.03	21.96	22.11	21.72	21.94	0-3	0
	36	18	22.03	22.02	22.13	21.68	21.95		0
	36	37	22.03	22.04	22.13	21.68	21.95		0
	75	0	21.98	21.94	22.05	21.72	21.90		0





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 68 of 114	

Table 9-74
LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.77	21.80	21.79	21.57	21.91	0	0
	1	25	21.74	21.77	21.71	21.61	21.91		0
	1	49	21.72	21.75	21.71	21.52	21.90		0
	25	0	21.66	21.64	21.65	21.48	21.87	0-1	0
	25	12	21.64	21.65	21.63	21.44	21.85		0
	25	25	21.67	21.66	21.65	21.44	21.86		0
	50	0	21.60	21.58	21.60	21.39	21.76		0
16QAM	1	0	21.75	21.83	22.05	21.69	22.10	0-1	0
	1	25	21.77	21.84	22.06	21.65	22.07		0
	1	49	21.75	21.84	21.81	21.56	22.05		0
	25	0	21.72	21.70	21.73	21.53	21.92	0-2	0
	25	12	21.75	21.65	21.66	21.50	21.93		0
	25	25	21.78	21.69	21.66	21.58	21.94		0
	50	0	21.63	21.64	21.64	21.47	21.83		0
64QAM	1	0	21.78	21.78	21.63	21.47	21.67	0-2	0
	1	25	21.88	21.85	21.56	21.64	21.68		0
	1	49	21.68	21.87	21.69	21.48	21.75		0
	25	0	21.75	21.61	21.71	21.44	21.53	0-3	0
	25	12	21.74	21.65	21.72	21.47	21.60		0
	25	25	21.75	21.67	21.75	21.43	21.59		0
	50	0	21.63	21.59	21.68	21.42	21.54		0

Table 9-75
LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.76	21.72	21.69	21.60	21.92	0	0
	1	12	21.71	21.73	21.70	21.57	21.92		0
	1	24	21.73	21.75	21.70	21.66	21.95		0
	12	0	21.70	21.68	21.62	21.48	21.88	0-1	0
	12	6	21.71	21.68	21.62	21.49	21.87		0
	12	13	21.69	21.65	21.63	21.47	21.88		0
	25	0	21.64	21.70	21.62	21.48	21.87		0
16QAM	1	0	21.80	21.90	21.74	21.80	21.92	0-1	0
	1	12	21.84	22.10	21.80	21.68	21.90		0
	1	24	21.83	21.99	21.64	21.61	21.90		0
	12	0	21.70	21.80	21.74	21.55	22.03	0-2	0
	12	6	21.71	21.78	21.72	21.54	22.00		0
	12	13	21.71	21.82	21.77	21.49	22.01		0
	25	0	21.75	21.68	21.65	21.49	21.89		0
64QAM	1	0	21.59	21.78	21.94	21.76	21.69	0-2	0
	1	12	21.61	21.77	21.83	21.59	21.80		0
	1	24	21.50	21.71	21.95	21.52	21.70		0
	12	0	21.60	21.63	21.73	21.45	21.60	0-3	0
	12	6	21.72	21.60	21.73	21.49	21.55		0
	12	13	21.81	21.67	21.76	21.45	21.64		0
	25	0	21.77	21.62	21.69	21.41	21.60		0

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 69 of 114	

9.5 WLAN Conducted Powers

Table 9-76
2.4 GHz WLAN Maximum Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	18.92	17.80	17.98
2437	6	18.75	17.86	17.92
2462	11	18.82	17.82	17.84

Table 9-77
5 GHz WLAN Maximum Average RF Power

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	18.66	18.32	18.37
5200	40	18.63	18.61	18.40
5220	44	18.49	18.43	18.52
5240	48	18.58	18.44	18.37
5260	52	18.43	18.49	18.41
5280	56	18.77	18.98	18.75
5300	60	18.98	18.86	18.95
5320	64	14.73	14.88	14.13
5500	100	17.95	17.92	16.89
5600	120	17.61	17.85	16.98
5620	124	17.76	17.66	16.76
5720	144	17.84	17.06	16.82
5745	149	16.97	16.94	16.83
5785	157	16.52	16.46	16.52
5825	165	16.44	16.39	16.43

Table 9-78
2.4 GHz WLAN Reduced Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	14.87	14.84	14.90
2437	6	14.85	14.89	14.76
2462	11	14.84	14.93	14.66



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 70 of 114	

Table 9-79
5 GHz WLAN Reduced Average RF Power

5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	13.87	13.91
5230	46	13.90	13.92
5270	54	13.94	13.95
5310	62	13.98	13.95
5510	102	13.87	13.94
5590	118	13.74	13.70
5630	126	13.94	13.65
5710	142	13.57	13.80
5755	151	13.87	13.53
5795	159	13.51	13.59

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

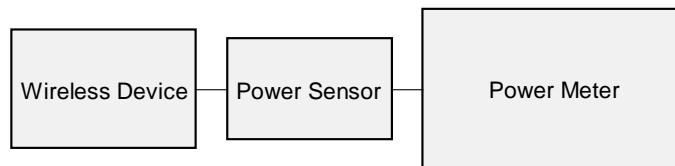






Figure 9-4
Power Measurement Setup

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 71 of 114	

9.6 Bluetooth Conducted Powers

Table 9-80
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	6.75	4.728
2441	1.0	39	7.98	6.280
2480	1.0	78	7.28	5.344
2402	2.0	0	5.30	3.392
2441	2.0	39	6.49	4.459
2480	2.0	78	5.85	3.849
2402	3.0	0	5.41	3.473
2441	3.0	39	6.60	4.568
2480	3.0	78	5.94	3.925

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 72 of 114

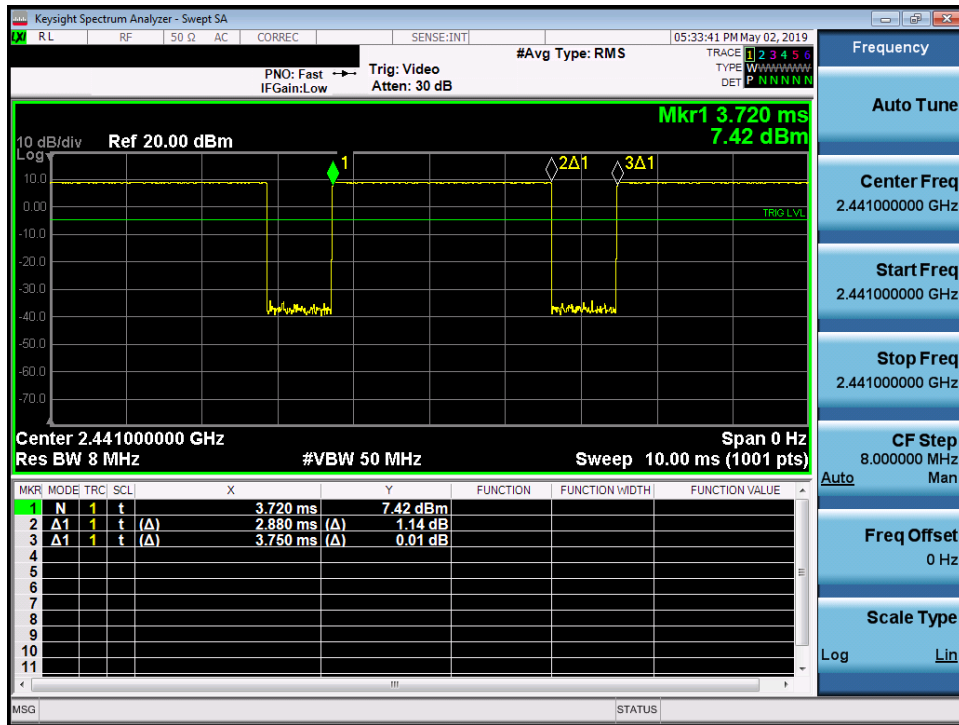


Figure 9-5
Bluetooth Transmission Plot

Equation 9-1
Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.88\text{ms}}{3.75\text{ms}} * 100\% = 76.8\%$$

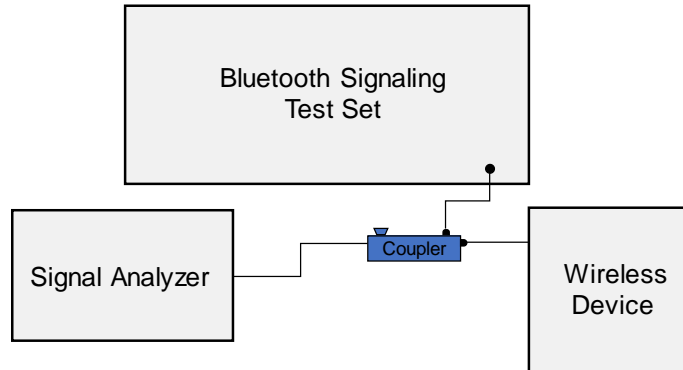


Figure 9-6
Power Measurement Setup



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 73 of 114

10 SYSTEM VERIFICATION

10.1 Tissue Verification



Table 10-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
4/24/2019	750H	21.1	680	0.870	42.111	0.888	42.305	-2.03%	-0.46%
			695	0.875	42.067	0.889	42.227	-1.57%	-0.38%
			700	0.877	42.054	0.889	42.201	-1.35%	-0.35%
			710	0.880	42.017	0.890	42.149	-1.12%	-0.31%
			740	0.891	41.936	0.893	41.994	-0.22%	-0.14%
			755	0.896	41.904	0.894	41.916	0.22%	-0.03%
			770	0.901	41.873	0.895	41.838	0.67%	0.08%
			785	0.907	41.816	0.896	41.760	1.23%	0.13%
5/4/2019	750H	20.5	680	0.862	43.788	0.888	42.305	-2.93%	3.51%
			695	0.867	43.742	0.889	42.227	-2.47%	3.59%
			700	0.869	43.727	0.889	42.201	-2.25%	3.62%
			710	0.872	43.699	0.890	42.149	-2.02%	3.68%
			740	0.883	43.612	0.893	41.994	-1.12%	3.85%
			755	0.889	43.564	0.894	41.916	-0.56%	3.93%
			770	0.894	43.511	0.895	41.838	-0.11%	4.00%
			785	0.900	43.463	0.896	41.760	0.45%	4.08%
4/17/2019	835H	21.8	800	0.905	43.423	0.897	41.682	0.89%	4.18%
			820	0.925	41.421	0.899	41.578	2.89%	-0.38%
4/24/2019	835H	22.7	835	0.930	41.382	0.900	41.500	3.33%	-0.28%
			850	0.935	41.346	0.916	41.500	2.07%	-0.37%
4/10/2019	1750H	22.7	820	0.931	41.940	0.899	41.578	3.56%	0.87%
			835	0.936	41.890	0.900	41.500	4.00%	0.94%
5/6/2019	1750H	22.4	850	0.942	41.857	0.916	41.500	2.84%	0.86%
			1710	1.325	38.729	1.348	40.142	-1.71%	-3.52%
5/1/2019	1900H	22.3	1750	1.350	38.660	1.371	40.079	-1.53%	-3.54%
			1790	1.373	38.604	1.394	40.016	-1.51%	-3.53%
5/8/2019	1900H	22.8	1710	1.367	41.745	1.348	40.142	1.41%	3.99%
			1750	1.392	41.682	1.371	40.079	1.53%	4.00%
5/2/2019	2450H	22.0	1790	1.417	41.611	1.394	40.016	1.65%	3.99%
			1850	1.434	40.786	1.400	40.000	2.43%	1.97%
4/29/2019	2450H	19.9	1880	1.452	40.754	1.400	40.000	3.71%	1.88%
			1910	1.469	40.715	1.400	40.000	4.93%	1.79%
4/29/2019	2450H	22.8	1850	1.381	39.570	1.400	40.000	-1.36%	-1.08%
			1880	1.411	39.433	1.400	40.000	0.79%	-1.42%
5/2/2019	2450H	22.0	1910	1.443	39.301	1.400	40.000	3.07%	-1.75%
			2300	1.703	38.234	1.670	39.500	1.98%	-3.21%
4/29/2019	2450H	19.9	2310	1.710	38.218	1.679	39.480	1.85%	-3.20%
			2320	1.718	38.203	1.687	39.460	1.84%	-3.19%
4/29/2019	2450H	22.8	2400	1.762	37.853	1.756	39.289	1.48%	-3.65%
			2450	1.820	37.749	1.800	39.200	1.11%	-3.70%
5/07/2019	5200H-5800H	23.3	2500	1.861	37.672	1.855	39.136	0.32%	-3.74%
			2400	1.755	38.914	1.756	39.289	-0.06%	-0.96%
5/07/2019	5200H-5800H	23.3	2450	1.792	38.836	1.800	39.200	-0.44%	-0.93%
			2500	1.830	38.768	1.855	39.136	-1.35%	-0.94%
5/07/2019	5200H-5800H	23.3	2550	1.867	38.672	1.909	39.073	-2.20%	-1.03%
			2600	1.905	38.595	1.964	39.009	-3.00%	-1.06%
5/07/2019	5200H-5800H	23.3	2650	1.943	38.514	2.018	38.945	-3.72%	-1.11%
			2700	1.980	38.428	2.073	38.882	-4.49%	-1.17%
5/07/2019	5200H-5800H	23.3	5180	4.569	36.167	4.635	36.009	-1.42%	0.44%
			5200	4.593	36.133	4.655	35.986	-1.33%	0.41%
5/07/2019	5200H-5800H	23.3	5220	4.616	36.087	4.676	35.963	-1.28%	0.34%
			5240	4.635	36.055	4.696	35.940	-1.30%	0.32%
5/07/2019	5200H-5800H	23.3	5260	4.655	36.023	4.717	35.917	-1.31%	0.30%
			5280	4.681	35.974	4.737	35.894	-1.18%	0.22%
5/07/2019	5200H-5800H	23.3	5300	4.707	35.941	4.758	35.871	-1.07%	0.20%
			5320	4.727	35.910	4.778	35.849	-1.07%	0.17%
5/07/2019	5200H-5800H	23.3	5500	4.928	35.586	4.963	35.643	-0.71%	-0.16%
			5520	4.952	35.552	4.983	35.620	-0.62%	-0.19%
5/07/2019	5200H-5800H	23.3	5540	4.982	35.512	5.004	35.597	-0.44%	-0.24%
			5560	5.007	35.485	5.024	35.574	-0.34%	-0.25%
5/07/2019	5200H-5800H	23.3	5580	5.028	35.454	5.045	35.551	-0.34%	-0.27%
			5600	5.048	35.409	5.065	35.529	-0.34%	-0.34%
5/07/2019	5200H-5800H	23.3	5620	5.074	35.367	5.086	35.506	-0.24%	-0.39%
			5640	5.100	35.324	5.106	35.483	-0.12%	-0.45%
5/07/2019	5200H-5800H	23.3	5660	5.124	35.284	5.127	35.460	-0.06%	-0.50%
			5680	5.147	35.269	5.147	35.437	0.00%	-0.47%
5/07/2019	5200H-5800H	23.3	5700	5.171	35.241	5.168	35.414	0.06%	-0.49%
			5745	5.225	35.143	5.214	35.363	0.21%	-0.62%
5/07/2019	5200H-5800H	23.3	5765	5.249	35.104	5.234	35.340	0.29%	-0.67%
			5785	5.273	35.079	5.255	35.317	0.34%	-0.67%
5/07/2019	5200H-5800H	23.3	5800	5.289	35.059	5.270	35.300	0.36%	-0.68%
			5805	5.294	35.052	5.275	35.294	0.36%	-0.68%
5/07/2019	5200H-5800H	23.3	5825	5.315	35.018	5.296	35.271	0.36%	-0.72%

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 74 of 114

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
4/24/2019	750B	21.0	680	0.936	54.763	0.958	55.804	-2.30%	-1.87%
			695	0.941	54.730	0.959	55.745	-1.88%	-1.82%
			700	0.943	54.721	0.959	55.726	-1.67%	-1.80%
			710	0.947	54.697	0.960	55.687	-1.35%	-1.78%
			740	0.958	54.621	0.963	55.570	-0.52%	-1.71%
			755	0.964	54.585	0.964	55.512	0.00%	-1.67%
			770	0.969	54.555	0.965	55.453	0.41%	-1.62%
			785	0.975	54.522	0.966	55.395	0.93%	-1.58%
			800	0.981	54.492	0.967	55.336	1.45%	-1.53%
			820	0.995	52.856	0.969	55.258	2.68%	-4.35%
5/1/2019	835B	22.4	835	1.001	52.822	0.970	55.200	3.20%	-4.31%
			850	1.006	52.791	0.988	55.154	1.82%	-4.28%
			820	0.995	53.293	0.969	55.258	2.68%	-3.56%
5/6/2019	835B	19.9	835	1.001	53.243	0.970	55.200	3.20%	-3.55%
			850	1.005	53.225	0.988	55.154	1.72%	-3.50%
			1710	1.476	52.158	1.463	53.537	0.89%	-2.58%
4/24/2019	1750B	22.7	1750	1.505	52.108	1.488	53.432	1.14%	-2.48%
			1790	1.535	52.039	1.514	53.326	1.39%	-2.41%
			1850	1.516	52.789	1.520	53.300	-0.26%	-0.96%
4/17/2019	1900B	23.7	1880	1.549	52.679	1.520	53.300	1.91%	-1.17%
			1910	1.584	52.587	1.520	53.300	4.21%	-1.34%
			1850	1.504	52.383	1.520	53.300	-1.05%	-1.72%
4/23/2019	1900B	22.6	1880	1.538	52.295	1.520	53.300	1.18%	-1.89%
			1910	1.570	52.209	1.520	53.300	3.29%	-2.05%
			1850	1.526	53.221	1.520	53.300	0.39%	-0.15%
4/29/2019	1900B	22.9	1880	1.560	53.108	1.520	53.300	2.63%	-0.36%
			1910	1.593	53.005	1.520	53.300	4.80%	-0.55%
			1850	1.526	52.535	1.520	53.300	0.39%	-1.44%
5/1/2019	1900B	22.5	1880	1.557	52.423	1.520	53.300	2.43%	-1.65%
			1910	1.590	52.330	1.520	53.300	4.61%	-1.82%
			2400	1.990	51.130	1.902	52.767	4.63%	-3.10%
4/15/2019	2450B	22.4	2450	2.046	50.998	1.950	52.700	4.92%	-3.23%
			2500	2.104	50.863	2.021	52.636	4.11%	-3.37%
			2400	1.967	51.655	1.902	52.767	3.42%	-2.11%
4/22/2019	2450B	22.4	2450	2.022	51.534	1.950	52.700	3.69%	-2.21%
			2500	2.080	51.370	2.021	52.636	2.92%	-2.41%
			2550	2.140	51.233	2.092	52.573	2.29%	-2.55%
			2600	2.197	51.112	2.163	52.509	1.57%	-2.66%
			2650	2.259	50.962	2.234	52.445	1.12%	-2.83%
			2700	2.320	50.817	2.305	52.382	0.65%	-2.99%
			2300	1.895	52.660	1.809	52.900	4.75%	-0.45%
			2310	1.904	52.647	1.816	52.887	4.85%	-0.45%
			2320	1.913	52.630	1.826	52.873	4.76%	-0.46%
			2400	1.985	52.499	1.902	52.767	4.36%	-0.51%
5/6/2019	2450B	22.2	2450	2.030	52.408	1.950	52.700	4.10%	-0.55%
			2500	2.074	52.353	2.021	52.636	2.62%	-0.54%
			2550	2.121	52.255	2.092	52.573	1.39%	-0.60%
			2600	2.171	52.185	2.163	52.509	0.37%	-0.62%
			2650	2.217	52.106	2.234	52.445	-0.76%	-0.65%
			2700	2.268	52.018	2.305	52.382	-1.61%	-0.69%
			5180	5.277	47.494	5.276	49.041	0.02%	-3.15%
			5200	5.310	47.457	5.299	49.014	0.21%	-3.18%
			5220	5.337	47.394	5.323	48.987	0.26%	-3.25%
			5240	5.369	47.350	5.346	48.960	0.43%	-3.29%
04/14/2019	5200B-5800B	22.0	5260	5.390	47.306	5.369	48.933	0.39%	-3.32%
			5280	5.418	47.296	5.393	48.906	0.46%	-3.29%
			5300	5.448	47.266	5.416	48.879	0.59%	-3.30%
			5320	5.475	47.222	5.439	48.851	0.66%	-3.33%
			5500	5.720	46.889	5.650	48.607	1.24%	-3.53%
			5520	5.750	46.841	5.673	48.580	1.36%	-3.58%
			5540	5.793	46.783	5.696	48.553	1.70%	-3.65%
			5560	5.822	46.735	5.720	48.526	1.78%	-3.69%
			5580	5.852	46.731	5.743	48.499	1.90%	-3.65%
			5600	5.876	46.696	5.766	48.471	1.91%	-3.66%
			5620	5.897	46.645	5.790	48.444	1.85%	-3.71%
			5640	5.933	46.589	5.813	48.417	2.06%	-3.78%
			5660	5.974	46.538	5.837	48.390	2.35%	-3.83%
			5680	6.003	46.517	5.860	48.363	2.44%	-3.82%
			5700	6.029	46.514	5.883	48.336	2.48%	-3.77%
			5745	6.097	46.410	5.936	48.275	2.71%	-3.86%
			5765	6.123	46.351	5.959	48.248	2.75%	-3.93%
			5785	6.159	46.306	5.982	48.220	2.96%	-3.97%
			5800	6.181	46.301	6.000	48.200	3.02%	-3.94%
			5805	6.187	46.300	6.006	48.193	3.01%	-3.93%
			5825	6.211	46.284	6.029	48.166	3.02%	-3.91%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 75 of 114

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-2
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
H	750	HEAD	04/24/2019	24.6	21.1	0.200	1003	7409	1.750	8.280	8.750	5.68%
H	750	HEAD	05/04/2019	22.1	21.2	0.200	1161	7409	1.730	8.030	8.650	7.72%
D	835	HEAD	04/17/2019	22.1	21.8	0.200	4d132	3914	1.980	9.590	9.900	3.23%
D	835	HEAD	04/24/2019	23.1	22.7	0.200	4d132	3914	1.970	9.590	9.850	2.71%
L	1750	HEAD	04/10/2019	23.0	22.7	0.100	1150	7308	3.590	36.500	35.900	-1.64%
H	1750	HEAD	05/06/2019	21.9	22.4	0.100	1008	7409	3.640	36.200	36.400	0.55%
H	1900	HEAD	05/01/2019	23.2	22.3	0.100	5d080	7409	4.190	39.800	41.900	5.28%
G	1900	HEAD	05/08/2019	23.8	22.8	0.100	5d149	7410	4.060	39.300	40.600	3.31%
E	2300	HEAD	05/02/2019	24.2	22.3	0.100	1064	3589	4.710	47.600	47.100	-1.05%
L	2450	HEAD	04/29/2019	20.1	19.9	0.100	719	7308	5.180	51.900	51.800	-0.19%
E	2450	HEAD	04/29/2019	24.4	22.8	0.100	981	3589	5.280	52.300	52.800	0.96%
E	2600	HEAD	04/29/2019	24.4	22.8	0.100	1064	3589	5.770	57.000	57.700	1.23%
H	5250	HEAD	05/07/2019	21.9	21.7	0.050	1237	7409	3.890	81.300	77.800	-4.31%
H	5600	HEAD	05/07/2019	21.9	21.7	0.050	1237	7409	4.110	85.700	82.200	-4.08%
H	5750	HEAD	05/07/2019	21.9	21.7	0.050	1237	7409	3.840	80.600	76.800	-4.71%
L	750	BODY	04/24/2019	21.7	20.5	0.200	1161	7308	1.730	8.430	8.650	2.61%
J	835	BODY	05/01/2019	23.3	22.4	0.200	4d132	7488	1.870	9.670	9.350	-3.31%
J	835	BODY	05/06/2019	20.0	19.5	0.200	4d132	7488	2.040	9.670	10.200	5.48%
J	1750	BODY	04/24/2019	23.3	22.7	0.100	1148	7488	3.700	37.000	37.000	0.00%
G	1900	BODY	04/17/2019	21.1	22.1	0.100	5d149	7410	4.220	39.400	42.200	7.11%
G	1900	BODY	04/23/2019	22.6	21.9	0.100	5d149	7410	4.010	39.400	40.100	1.78%
G	1900	BODY	04/29/2019	21.6	21.2	0.100	5d149	7410	4.300	39.400	43.000	9.14%
G	1900	BODY	05/01/2019	23.2	21.7	0.100	5d149	7410	4.210	39.400	42.100	6.85%
L	2300	BODY	05/06/2019	21.9	20.7	0.100	1073	7308	5.060	47.700	50.600	6.08%
K	2450	BODY	04/15/2019	22.5	22.3	0.100	797	7417	5.130	51.100	51.300	0.39%
K	2450	BODY	04/22/2019	21.2	22.4	0.100	797	7417	5.310	51.100	53.100	3.91%
L	2450	BODY	05/06/2019	21.9	20.7	0.100	719	7308	5.110	50.100	51.100	2.00%
K	2600	BODY	04/22/2019	21.1	22.4	0.100	1126	7417	5.550	54.100	55.500	2.59%
L	2600	BODY	05/06/2019	21.9	20.7	0.100	1004	7308	5.670	54.800	56.700	3.47%
L	5250	BODY	04/14/2019	22.0	21.5	0.050	1057	7308	3.560	75.900	71.200	-6.19%
L	5600	BODY	04/14/2019	22.0	21.5	0.050	1057	7308	4.020	79.900	80.400	0.63%
L	5750	BODY	04/14/2019	22.0	21.5	0.050	1057	7308	3.540	76.700	70.800	-7.69%

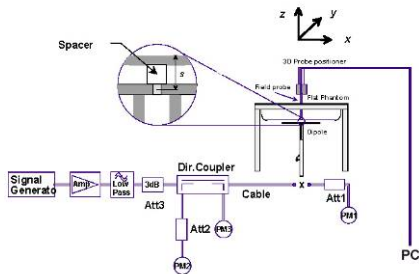




Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 76 of 114

11 SAR DATA SUMMARY



11.1 Standalone Head SAR Data

Table 11-1
CDMA BC10 (§90S) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	24.19	0.05	Right	Cheek	12734	1:1	0.235	1.352	0.318	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	24.19	0.07	Right	Tilt	12734	1:1	0.144	1.352	0.195	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	24.19	0.02	Left	Cheek	12734	1:1	0.220	1.352	0.297	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	24.19	-0.08	Left	Tilt	12734	1:1	0.145	1.352	0.196	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	24.34	0.03	Right	Cheek	12734	1:1	0.250	1.306	0.327	A1
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	24.34	0.04	Right	Tilt	12734	1:1	0.159	1.306	0.208	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	24.34	0.03	Left	Cheek	12734	1:1	0.235	1.306	0.307	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	24.34	0.17	Left	Tilt	12734	1:1	0.135	1.306	0.176	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-2
CDMA BC0 (§22H) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	24.03	0.04	Right	Cheek	12734	1:1	0.333	1.403	0.467	A2
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	24.03	-0.08	Right	Tilt	12734	1:1	0.207	1.403	0.290	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	24.03	0.06	Left	Cheek	12734	1:1	0.307	1.403	0.431	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	24.03	-0.01	Left	Tilt	12734	1:1	0.214	1.403	0.300	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	24.43	0.07	Right	Cheek	12734	1:1	0.301	1.279	0.385	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	24.43	-0.07	Right	Tilt	12734	1:1	0.187	1.279	0.239	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	24.43	0.12	Left	Cheek	12734	1:1	0.273	1.279	0.349	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	24.43	0.00	Left	Tilt	12734	1:1	0.153	1.279	0.196	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset			Page 77 of 114

**Table 11-3
PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	25.5	24.65	0.02	Right	Cheek	12692	1:1	0.309	1.216	0.376	A3
1880.00	600	PCS CDMA	RC3 / SO55	25.5	24.65	-0.01	Right	Tilt	12692	1:1	0.151	1.216	0.184	
1880.00	600	PCS CDMA	RC3 / SO55	25.5	24.65	0.03	Left	Cheek	12692	1:1	0.274	1.216	0.333	
1880.00	600	PCS CDMA	RC3 / SO55	25.5	24.65	0.04	Left	Tilt	12692	1:1	0.161	1.216	0.196	
1880.00	600	PCS CDMA	EVDO Rev. A	25.5	24.33	-0.05	Right	Cheek	12692	1:1	0.250	1.309	0.327	
1880.00	600	PCS CDMA	EVDO Rev. A	25.5	24.33	0.11	Right	Tilt	12692	1:1	0.158	1.309	0.207	
1880.00	600	PCS CDMA	EVDO Rev. A	25.5	24.33	0.02	Left	Cheek	12692	1:1	0.239	1.309	0.313	
1880.00	600	PCS CDMA	EVDO Rev. A	25.5	24.33	0.18	Left	Tilt	12692	1:1	0.166	1.309	0.217	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-4
GSM 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.5	32.61	0.06	Right	Cheek	10223	1:8.3	0.252	1.227	0.309	A4
836.60	190	GSM 850	GSM	33.5	32.61	0.02	Right	Tilt	10223	1:8.3	0.134	1.227	0.164	
836.60	190	GSM 850	GSM	33.5	32.61	0.06	Left	Cheek	10223	1:8.3	0.229	1.227	0.281	
836.60	190	GSM 850	GSM	33.5	32.61	-0.01	Left	Tilt	10223	1:8.3	0.141	1.227	0.173	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5
GSM 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1850.20	512	GSM 1900	GSM	31.0	29.86	-0.13	Right	Cheek	10272	1:8.3	0.101	1.300	0.131	A5
1850.20	512	GSM 1900	GSM	31.0	29.86	0.19	Right	Tilt	10272	1:8.3	0.060	1.300	0.078	
1850.20	512	GSM 1900	GSM	31.0	29.86	0.07	Left	Cheek	10272	1:8.3	0.087	1.300	0.113	
1850.20	512	GSM 1900	GSM	31.0	29.86	-0.08	Left	Tilt	10272	1:8.3	0.076	1.300	0.099	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 78 of 114

Table 11-6
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.0	25.00	0.19	Right	Cheek	10223	1:1	0.278	1.000	0.278	
836.60	4183	UMTS 850	RMC	25.0	25.00	-0.02	Right	Tilt	10223	1:1	0.186	1.000	0.186	
836.60	4183	UMTS 850	RMC	25.0	25.00	0.12	Left	Cheek	10223	1:1	0.280	1.000	0.280	A6
836.60	4183	UMTS 850	RMC	25.0	25.00	0.03	Left	Tilt	10223	1:1	0.173	1.000	0.173	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-7
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	25.0	24.15	0.04	Right	Cheek	12692	1:1	0.196	1.216	0.238	
1732.40	1412	UMTS 1750	RMC	25.0	24.15	-0.11	Right	Tilt	12692	1:1	0.175	1.216	0.213	
1732.40	1412	UMTS 1750	RMC	25.0	24.15	-0.01	Left	Cheek	12692	1:1	0.235	1.216	0.286	A7
1732.40	1412	UMTS 1750	RMC	25.0	24.15	0.07	Left	Tilt	12692	1:1	0.212	1.216	0.258	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-8
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	25.0	24.21	0.07	Right	Cheek	10272	1:1	0.274	1.199	0.329	A8
1880.00	9400	UMTS 1900	RMC	25.0	24.21	-0.10	Right	Tilt	10272	1:1	0.155	1.199	0.186	
1880.00	9400	UMTS 1900	RMC	25.0	24.21	0.12	Left	Cheek	10272	1:1	0.228	1.199	0.273	
1880.00	9400	UMTS 1900	RMC	25.0	24.21	0.16	Left	Tilt	10272	1:1	0.155	1.199	0.186	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 79 of 114

Table 11-9
LTE Band 71 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	0.09	0	Right	Cheek	QPSK	1	0	10264	1:1	0.201	1.199	0.241	A9
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	0.08	1	Right	Cheek	QPSK	50	0	10264	1:1	0.161	1.265	0.204	
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	0.02	0	Right	Tilt	QPSK	1	0	10264	1:1	0.101	1.199	0.121	
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	0.10	1	Right	Tilt	QPSK	50	0	10264	1:1	0.081	1.265	0.102	
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	-0.01	0	Left	Cheek	QPSK	1	0	10264	1:1	0.143	1.199	0.171	
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	0.08	1	Left	Cheek	QPSK	50	0	10264	1:1	0.121	1.265	0.153	
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	0.12	0	Left	Tilt	QPSK	1	0	10264	1:1	0.086	1.199	0.103	
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	-0.13	1	Left	Tilt	QPSK	50	0	10264	1:1	0.058	1.265	0.073	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-10
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	-0.11	0	Right	Cheek	QPSK	1	0	12692	1:1	0.207	1.109	0.230	A10
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	0.08	1	Right	Cheek	QPSK	25	0	12692	1:1	0.166	1.153	0.191	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	-0.01	0	Right	Tilt	QPSK	1	0	12692	1:1	0.118	1.109	0.131	
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	0.05	1	Right	Tilt	QPSK	25	0	12692	1:1	0.109	1.153	0.126	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	-0.03	0	Left	Cheek	QPSK	1	0	12692	1:1	0.198	1.109	0.220	
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	0.03	1	Left	Cheek	QPSK	25	0	12692	1:1	0.152	1.153	0.175	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	0.09	0	Left	Tilt	QPSK	1	0	12692	1:1	0.109	1.109	0.121	
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	0.03	1	Left	Tilt	QPSK	25	0	12692	1:1	0.091	1.153	0.105	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-11
LTE Band 13 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.19	0	Right	Cheek	QPSK	1	0	12692	1:1	0.166	1.089	0.181	A11
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	0.19	1	Right	Cheek	QPSK	25	0	12692	1:1	0.117	1.130	0.132	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.06	0	Right	Tilt	QPSK	1	0	12692	1:1	0.083	1.089	0.090	
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	0.10	1	Right	Tilt	QPSK	25	0	12692	1:1	0.070	1.130	0.079	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	0.03	0	Left	Cheek	QPSK	1	0	12692	1:1	0.120	1.089	0.131	
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	0.12	1	Left	Cheek	QPSK	25	0	12692	1:1	0.092	1.130	0.104	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.09	0	Left	Tilt	QPSK	1	0	12692	1:1	0.072	1.089	0.078	
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	-0.03	1	Left	Tilt	QPSK	25	0	12692	1:1	0.058	1.130	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 80 of 114

Table 11-12
LTE Band 14 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	0.07	0	Right	Cheek	QPSK	1	0	12692	1:1	0.148	1.005	0.149	A12
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	0.10	1	Right	Cheek	QPSK	25	0	12692	1:1	0.122	1.052	0.128	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	-0.09	0	Right	Tilt	QPSK	1	0	12692	1:1	0.097	1.005	0.097	
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	0.09	1	Right	Tilt	QPSK	25	0	12692	1:1	0.079	1.052	0.083	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	0.17	0	Left	Cheek	QPSK	1	0	12692	1:1	0.131	1.005	0.132	
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	0.01	1	Left	Cheek	QPSK	25	0	12692	1:1	0.102	1.052	0.107	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	0.06	0	Left	Tilt	QPSK	1	0	12692	1:1	0.081	1.005	0.081	
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	0.00	1	Left	Tilt	QPSK	25	0	12692	1:1	0.063	1.052	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-13
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	-0.12	0	Right	Cheek	QPSK	1	74	10223	1:1	0.215	1.186	0.255	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	0.19	1	Right	Cheek	QPSK	36	0	10223	1:1	0.128	1.253	0.160	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	-0.02	0	Right	Tilt	QPSK	1	74	10223	1:1	0.113	1.186	0.134	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	0.17	1	Right	Tilt	QPSK	36	0	10223	1:1	0.073	1.253	0.091	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.07	0	Left	Cheek	QPSK	1	74	10223	1:1	0.222	1.186	0.263	A13
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	0.03	1	Left	Cheek	QPSK	36	0	10223	1:1	0.137	1.253	0.172	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.07	0	Left	Tilt	QPSK	1	74	10223	1:1	0.116	1.186	0.138	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	-0.01	1	Left	Tilt	QPSK	36	0	10223	1:1	0.076	1.253	0.095	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-14
LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.24	0.12	0	Right	Cheek	QPSK	1	0	12692	1:1	0.240	1.191	0.286	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.0	22.91	0.02	1	Right	Cheek	QPSK	50	0	12692	1:1	0.205	1.285	0.263	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.24	0.12	0	Right	Tilt	QPSK	1	0	12692	1:1	0.175	1.191	0.208	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.0	22.91	0.17	1	Right	Tilt	QPSK	50	0	12692	1:1	0.148	1.285	0.190	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.24	-0.09	0	Left	Cheek	QPSK	1	0	12692	1:1	0.253	1.191	0.301	A14
1770.00	132572	High	LTE Band 66 (AWS)	20	24.0	22.91	0.02	1	Left	Cheek	QPSK	50	0	12692	1:1	0.199	1.285	0.256	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.24	0.05	0	Left	Tilt	QPSK	1	0	12692	1:1	0.216	1.191	0.257	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.0	22.91	0.05	1	Left	Tilt	QPSK	50	0	12692	1:1	0.165	1.285	0.212	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 81 of 114

Table 11-15
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.45	-0.02	0	Right	Cheek	QPSK	1	0	12692	1:1	0.308	1.135	0.350	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.25	0.14	1	Right	Cheek	QPSK	50	0	12692	1:1	0.231	1.189	0.275	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.45	0.08	0	Right	Tilt	QPSK	1	0	12692	1:1	0.177	1.135	0.201	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.25	0.10	1	Right	Tilt	QPSK	50	0	12692	1:1	0.141	1.189	0.168	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.45	-0.12	0	Left	Cheek	QPSK	1	0	12692	1:1	0.311	1.135	0.353	A15
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.25	-0.01	1	Left	Cheek	QPSK	50	0	12692	1:1	0.234	1.189	0.278	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.45	0.00	0	Left	Tilt	QPSK	1	0	12692	1:1	0.215	1.135	0.244	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.25	0.13	1	Left	Tilt	QPSK	50	0	12692	1:1	0.168	1.189	0.200	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-16
LTE Band 30 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot	
MHz	Ch.														(W/kg)		(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	25.0	24.57	0.11	0	Right	Cheek	QPSK	1	0	10272	1:1	0.173	1.104	0.191	A16
2310.00	27710	Mid	LTE Band 30	10	24.0	23.19	0.09	1	Right	Cheek	QPSK	25	0	10272	1:1	0.132	1.205	0.159	
2310.00	27710	Mid	LTE Band 30	10	25.0	24.57	-0.19	0	Right	Tilt	QPSK	1	0	10272	1:1	0.108	1.104	0.119	
2310.00	27710	Mid	LTE Band 30	10	24.0	23.19	-0.18	1	Right	Tilt	QPSK	25	0	10272	1:1	0.099	1.205	0.119	
2310.00	27710	Mid	LTE Band 30	10	25.0	24.57	-0.11	0	Left	Cheek	QPSK	1	0	10272	1:1	0.157	1.104	0.173	
2310.00	27710	Mid	LTE Band 30	10	24.0	23.19	-0.07	1	Left	Cheek	QPSK	25	0	10272	1:1	0.110	1.205	0.133	
2310.00	27710	Mid	LTE Band 30	10	25.0	24.57	0.18	0	Left	Tilt	QPSK	1	0	10272	1:1	0.067	1.104	0.074	
2310.00	27710	Mid	LTE Band 30	10	24.0	23.19	0.16	1	Left	Tilt	QPSK	25	0	10272	1:1	0.047	1.205	0.057	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-17
LTE Band 7 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2560.00	21350	High	LTE Band 7	20	24.0	23.51	-0.04	0	Right	Cheek	QPSK	1	0	10272	1:1	0.163	1.119	0.182	
2560.00	21350	High	LTE Band 7	20	23.0	22.32	0.10	1	Right	Cheek	QPSK	50	0	10272	1:1	0.125	1.169	0.146	
2560.00	21350	High	LTE Band 7	20	24.0	23.51	0.21	0	Right	Tilt	QPSK	1	0	10272	1:1	0.145	1.119	0.162	
2560.00	21350	High	LTE Band 7	20	23.0	22.32	0.16	1	Right	Tilt	QPSK	50	0	10272	1:1	0.132	1.169	0.154	
2560.00	21350	High	LTE Band 7	20	24.0	23.51	-0.03	0	Left	Cheek	QPSK	1	0	10272	1:1	0.164	1.119	0.184	A17
2560.00	21350	High	LTE Band 7	20	23.0	22.32	0.13	1	Left	Cheek	QPSK	50	0	10272	1:1	0.130	1.169	0.152	
2560.00	21350	High	LTE Band 7	20	24.0	23.51	0.17	0	Left	Tilt	QPSK	1	0	10272	1:1	0.095	1.119	0.106	
2560.00	21350	High	LTE Band 7	20	23.0	22.32	0.18	1	Left	Tilt	QPSK	50	0	10272	1:1	0.072	1.169	0.084	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 82 of 114

Table 11-18
LTE Band 41 Head SAR



MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.38	-0.15	0	Right	Cheek	QPSK	1	0	10272	1:1.58	0.108	1.294	0.140	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.5	22.54	0.15	1	Right	Cheek	QPSK	50	25	10272	1:1.58	0.077	1.247	0.096	
Power Class 2	2549.50	40185	Low-Mid	LTE Band 41	20	27.5	26.27	-0.16	0	Right	Cheek	QPSK	1	0	10272	1:2.31	0.147	1.327	0.195	A18
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.38	0.06	0	Right	Tilt	QPSK	1	0	10272	1:1.58	0.101	1.294	0.131	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.5	22.54	0.08	1	Right	Tilt	QPSK	50	25	10272	1:1.58	0.075	1.247	0.094	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.38	0.17	0	Left	Cheek	QPSK	1	0	10272	1:1.58	0.098	1.294	0.127	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.5	22.54	0.16	1	Left	Cheek	QPSK	50	25	10272	1:1.58	0.077	1.247	0.096	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.38	0.13	0	Left	Tilt	QPSK	1	0	10272	1:1.58	0.048	1.294	0.062	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.5	22.54	0.02	1	Left	Tilt	QPSK	50	25	10272	1:1.58	0.041	1.247	0.051	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-19
DTS Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	15.0	14.87	0.06	Right	Cheek	05664	1	99.7	0.186	0.121	1.030	1.003	0.125	A19
2412	1	802.11b	DSSS	22	15.0	14.87	0.01	Right	Tilt	05664	1	99.7	0.152	-	1.030	1.003	-	
2412	1	802.11b	DSSS	22	15.0	14.87	0.18	Left	Cheek	05664	1	99.7	0.073	-	1.030	1.003	-	
2412	1	802.11b	DSSS	22	15.0	14.87	0.12	Left	Tilt	05664	1	99.7	0.066	-	1.030	1.003	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-20
NII Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5310	62	802.11n	OFDM	40	14.0	13.98	0.19	Right	Cheek	05664	13.5	96.5	0.277	-	1.005	1.036	-	
5310	62	802.11n	OFDM	40	14.0	13.98	0.15	Right	Tilt	05664	13.5	96.5	0.316	0.186	1.005	1.036	0.194	
5310	62	802.11n	OFDM	40	14.0	13.98	0.19	Left	Cheek	05664	13.5	96.5	0.197	-	1.005	1.036	-	
5310	62	802.11n	OFDM	40	14.0	13.98	0.19	Left	Tilt	05664	13.5	96.5	0.244	-	1.005	1.036	-	
5630	126	802.11n	OFDM	40	14.0	13.94	-0.19	Right	Cheek	05664	13.5	96.5	0.470	-	1.014	1.036	-	
5630	126	802.11n	OFDM	40	14.0	13.94	-0.14	Right	Tilt	05664	13.5	96.5	0.766	0.334	1.014	1.036	0.351	A20
5630	126	802.11n	OFDM	40	14.0	13.94	0.00	Left	Cheek	05664	13.5	96.5	0.443	-	1.014	1.036	-	
5630	126	802.11n	OFDM	40	14.0	13.94	0.15	Left	Tilt	05664	13.5	96.5	0.624	-	1.014	1.036	-	
5755	151	802.11n	OFDM	40	14.0	13.87	0.11	Right	Cheek	05664	13.5	96.5	0.236	-	1.030	1.036	-	
5755	151	802.11n	OFDM	40	14.0	13.87	0.19	Right	Tilt	05664	13.5	96.5	0.296	-	1.030	1.036	-	
5755	151	802.11n	OFDM	40	14.0	13.87	0.00	Left	Cheek	05664	13.5	96.5	0.307	-	1.030	1.036	-	
5755	151	802.11n	OFDM	40	14.0	13.87	0.17	Left	Tilt	05664	13.5	96.5	0.368	0.138	1.030	1.036	0.147	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 83 of 114

11.2 Standalone Body-Worn SAR Data

Table 11-21
GSM/UMTS/CDMA Body-Worn SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.											(W/kg)			
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	25.5	24.20	-0.01	15 mm	10264	N/A	1:1	back	0.349	1.349	0.471	A21
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	25.5	24.05	-0.04	15 mm	10264	N/A	1:1	back	0.383	1.396	0.535	A23
1880.00	600	PCS CDMA	TDSO / SO32	25.5	24.67	0.01	15 mm	12692	N/A	1:1	back	0.247	1.211	0.299	A25
836.60	190	GSM 850	GSM	33.5	32.61	-0.04	15 mm	10223	1	1:8.3	back	0.248	1.227	0.304	A27
1850.20	512	GSM 1900	GSM	31.0	29.86	-0.03	15 mm	10272	1	1:8.3	back	0.116	1.300	0.151	A29
836.60	4183	UMTS 850	RMC	25.0	25.00	0.07	15 mm	10223	N/A	1:1	back	0.370	1.000	0.370	A31
1732.40	1412	UMTS 1750	RMC	25.0	24.15	-0.03	15 mm	12692	N/A	1:1	back	0.397	1.216	0.483	A33
1880.00	9400	UMTS 1900	RMC	25.0	24.21	0.06	15 mm	12692	N/A	1:1	back	0.279	1.199	0.335	A35
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-22
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	-0.03	0	10223	QPSK	1	0	15 mm	back	1:1	0.268	1.199	0.321	A37
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	0.00	1	10223	QPSK	50	0	15 mm	back	1:1	0.220	1.265	0.278	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	-0.04	0	10223	QPSK	1	0	15 mm	back	1:1	0.296	1.109	0.328	A39
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	0.00	1	10223	QPSK	25	0	15 mm	back	1:1	0.236	1.153	0.272	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.04	0	10223	QPSK	1	0	15 mm	back	1:1	0.380	1.089	0.414	A41
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	-0.05	1	10223	QPSK	25	0	15 mm	back	1:1	0.312	1.130	0.353	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	-0.10	0	10223	QPSK	1	0	15 mm	back	1:1	0.372	1.005	0.374	A43
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	0.03	1	10223	QPSK	25	0	15 mm	back	1:1	0.296	1.052	0.311	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.09	0	10223	QPSK	1	74	15 mm	back	1:1	0.245	1.186	0.291	A45
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	-0.01	1	10223	QPSK	36	0	15 mm	back	1:1	0.174	1.253	0.218	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.24	0.06	0	12692	QPSK	1	0	15 mm	back	1:1	0.414	1.191	0.493	A47
1770.00	132572	High	LTE Band 66 (AWS)	20	24.0	22.91	0.06	1	12692	QPSK	50	0	15 mm	back	1:1	0.320	1.285	0.411	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.45	-0.02	0	12692	QPSK	1	0	15 mm	back	1:1	0.288	1.135	0.327	A49
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.25	0.02	1	12692	QPSK	50	0	15 mm	back	1:1	0.218	1.189	0.259	
2310.00	27710	Mid	LTE Band 30	10	25.0	24.57	-0.10	0	12692	QPSK	1	0	15 mm	back	1:1	0.253	1.104	0.279	A51
2310.00	27710	Mid	LTE Band 30	10	24.0	23.19	-0.07	1	12692	QPSK	25	0	15 mm	back	1:1	0.199	1.205	0.240	
2560.00	21350	High	LTE Band 7	20	24.0	23.51	-0.07	0	12692	QPSK	1	0	15 mm	back	1:1	0.363	1.119	0.406	A53
2560.00	21350	High	LTE Band 7	20	23.0	22.32	-0.03	1	12692	QPSK	50	0	15 mm	back	1:1	0.280	1.169	0.327	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 84 of 114

Table 11-23
LTE Band 41 Body-Worn SAR



MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	24.5	23.38	-0.07	0	10272	QPSK	1	0	15 mm	back	1:1.58	0.232	1.294	0.300	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	23.5	22.54	-0.03	1	10272	QPSK	50	25	15 mm	back	1:1.58	0.178	1.247	0.222	
Power Class 2	2549.50	40185	Low-Md	LTE Band 41	20	27.5	26.27	-0.11	0	10272	QPSK	1	0	15 mm	back	1:2.31	0.339	1.327	0.450	A55
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											

Table 11-24
DTS Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	19.0	18.92	-0.14	15 mm	05664	1	back	99.7	0.142	0.092	1.019	1.003	0.094	A57
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-25
NII Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5300	60	802.11a	OFDM	20	19.0	18.98	-0.19	15 mm	05763	6	back	98.5	0.675	0.330	1.005	1.015	0.337	
5500	100	802.11a	OFDM	20	18.0	17.95	-0.16	15 mm	05763	6	back	98.5	1.128	0.509	1.012	1.015	0.523	A59
5745	149	802.11a	OFDM	20	17.0	16.97	-0.20	15 mm	05763	6	back	98.5	0.458	0.231	1.007	1.015	0.236	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 85 of 114

11.3 Standalone Hotspot SAR Data

Table 11-26
GPRS/UMTS/CDMA Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.5	24.27	0.00	10 mm	10264	N/A	1:1	back	0.410	1.327	0.544	A22
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.5	24.27	0.00	10 mm	10264	N/A	1:1	front	0.286	1.327	0.380	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.5	24.27	-0.15	10 mm	10264	N/A	1:1	bottom	0.182	1.327	0.242	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.5	24.27	0.11	10 mm	10264	N/A	1:1	right	0.303	1.327	0.402	
824.70	1013	CDMA BC0 (\$22H)	EVDO Rev. 0	25.5	24.55	-0.02	10 mm	10264	N/A	1:1	back	0.326	1.245	0.406	
824.70	1013	CDMA BC0 (\$22H)	EVDO Rev. 0	25.5	24.55	-0.03	10 mm	10264	N/A	1:1	front	0.296	1.245	0.369	
824.70	1013	CDMA BC0 (\$22H)	EVDO Rev. 0	25.5	24.55	0.04	10 mm	10264	N/A	1:1	bottom	0.293	1.245	0.365	
824.70	1013	CDMA BC0 (\$22H)	EVDO Rev. 0	25.5	24.55	0.03	10 mm	10264	N/A	1:1	right	0.356	1.245	0.443	A24
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	21.36	0.02	10 mm	12692	N/A	1:1	back	0.275	1.459	0.401	A26
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	21.36	-0.01	10 mm	12692	N/A	1:1	front	0.245	1.459	0.357	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	21.36	-0.11	10 mm	12692	N/A	1:1	bottom	0.203	1.459	0.296	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	21.36	0.02	10 mm	12692	N/A	1:1	left	0.199	1.459	0.290	
836.60	190	GSM 850	GPRS	30.0	28.81	-0.15	10 mm	10223	3	1:2.76	back	0.184	1.315	0.242	
836.60	190	GSM 850	GPRS	30.0	28.81	-0.11	10 mm	10223	3	1:2.76	front	0.171	1.315	0.225	
836.60	190	GSM 850	GPRS	30.0	28.81	0.01	10 mm	10223	3	1:2.76	bottom	0.128	1.315	0.168	
836.60	190	GSM 850	GPRS	30.0	28.81	0.20	10 mm	10223	3	1:2.76	right	0.251	1.315	0.330	A28
1880.00	661	GSM 1900	GPRS	24.0	23.27	0.01	10 mm	10272	3	1:2.76	back	0.228	1.183	0.270	A30
1880.00	661	GSM 1900	GPRS	24.0	23.27	0.15	10 mm	10272	3	1:2.76	front	0.156	1.183	0.185	
1880.00	661	GSM 1900	GPRS	24.0	23.27	-0.09	10 mm	10272	3	1:2.76	bottom	0.146	1.183	0.173	
1880.00	661	GSM 1900	GPRS	24.0	23.27	-0.07	10 mm	10272	3	1:2.76	left	0.134	1.183	0.159	
836.60	4183	UMTS 850	RMC	25.0	25.00	0.03	10 mm	10223	N/A	1:1	back	0.385	1.000	0.385	A32
836.60	4183	UMTS 850	RMC	25.0	25.00	0.05	10 mm	10223	N/A	1:1	front	0.253	1.000	0.253	
836.60	4183	UMTS 850	RMC	25.0	25.00	-0.01	10 mm	10223	N/A	1:1	bottom	0.253	1.000	0.253	
836.60	4183	UMTS 850	RMC	25.0	25.00	-0.01	10 mm	10223	N/A	1:1	right	0.298	1.000	0.298	
1732.40	1412	UMTS 1750	RMC	23.0	22.25	0.03	10 mm	12692	N/A	1:1	back	0.402	1.189	0.478	A34
1732.40	1412	UMTS 1750	RMC	23.0	22.25	0.02	10 mm	12692	N/A	1:1	front	0.341	1.189	0.405	
1732.40	1412	UMTS 1750	RMC	23.0	22.25	0.02	10 mm	12692	N/A	1:1	bottom	0.155	1.189	0.184	
1732.40	1412	UMTS 1750	RMC	23.0	22.25	-0.15	10 mm	12692	N/A	1:1	left	0.191	1.189	0.227	
1880.00	9400	UMTS 1900	RMC	23.0	22.25	0.00	10 mm	12692	N/A	1:1	back	0.500	1.189	0.595	A36
1880.00	9400	UMTS 1900	RMC	23.0	22.25	0.04	10 mm	12692	N/A	1:1	front	0.420	1.189	0.499	
1880.00	9400	UMTS 1900	RMC	23.0	22.25	-0.01	10 mm	12692	N/A	1:1	bottom	0.424	1.189	0.504	
1880.00	9400	UMTS 1900	RMC	23.0	22.25	-0.04	10 mm	12692	N/A	1:1	left	0.327	1.189	0.389	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID: A3LSMA102U			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 86 of 114	

Table 11-27
LTE Band 71 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	0.00	0	10223	QPSK	1	0	10 mm	back	1:1	0.359	1.199	0.430	A38
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	-0.03	1	10223	QPSK	50	0	10 mm	back	1:1	0.290	1.265	0.367	
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	-0.05	0	10223	QPSK	1	0	10 mm	front	1:1	0.189	1.199	0.227	
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	0.02	1	10223	QPSK	50	0	10 mm	front	1:1	0.154	1.265	0.195	
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	0.07	0	10223	QPSK	1	0	10 mm	bottom	1:1	0.143	1.199	0.171	
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	-0.04	1	10223	QPSK	50	0	10 mm	bottom	1:1	0.118	1.265	0.149	
680.50	133297	Mid	LTE Band 71	20	25.0	24.21	-0.07	0	10223	QPSK	1	0	10 mm	right	1:1	0.121	1.199	0.145	
680.50	133297	Mid	LTE Band 71	20	24.0	22.98	-0.01	1	10223	QPSK	50	0	10 mm	right	1:1	0.108	1.265	0.137	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-28
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	0.00	0	10223	QPSK	1	0	10 mm	back	1:1	0.349	1.109	0.387	A40
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	0.01	1	10223	QPSK	25	0	10 mm	back	1:1	0.272	1.153	0.314	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	0.06	0	10223	QPSK	1	0	10 mm	front	1:1	0.211	1.109	0.234	
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	-0.01	1	10223	QPSK	25	0	10 mm	front	1:1	0.162	1.153	0.187	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	0.09	0	10223	QPSK	1	0	10 mm	bottom	1:1	0.138	1.109	0.153	
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	-0.04	1	10223	QPSK	25	0	10 mm	bottom	1:1	0.113	1.153	0.130	
707.50	23095	Mid	LTE Band 12	10	25.0	24.55	-0.07	0	10223	QPSK	1	0	10 mm	right	1:1	0.159	1.109	0.176	
707.50	23095	Mid	LTE Band 12	10	24.0	23.38	-0.06	1	10223	QPSK	25	0	10 mm	right	1:1	0.126	1.153	0.145	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-29
LTE Band 13 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.03	0	10223	QPSK	1	0	10 mm	back	1:1	0.453	1.089	0.493	A42
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	0.03	1	10223	QPSK	25	0	10 mm	back	1:1	0.339	1.130	0.383	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.16	0	10223	QPSK	1	0	10 mm	front	1:1	0.279	1.089	0.304	
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	0.13	1	10223	QPSK	25	0	10 mm	front	1:1	0.239	1.130	0.270	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.05	0	10223	QPSK	1	0	10 mm	bottom	1:1	0.158	1.089	0.172	
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	-0.10	1	10223	QPSK	25	0	10 mm	bottom	1:1	0.136	1.130	0.154	
782.00	23230	Mid	LTE Band 13	10	25.0	24.63	-0.11	0	10223	QPSK	1	0	10 mm	right	1:1	0.237	1.089	0.258	
782.00	23230	Mid	LTE Band 13	10	24.0	23.47	-0.01	1	10223	QPSK	25	0	10 mm	right	1:1	0.187	1.130	0.211	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 87 of 114

Table 11-30
LTE Band 14 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																(W/kg)		(W/kg)	
MHz	Ch.																		
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	0.11	0	10223	QPSK	1	0	10 mm	back	1:1	0.406	1.005	0.408	A44
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	0.00	1	10223	QPSK	25	0	10 mm	back	1:1	0.321	1.052	0.338	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	0.00	0	10223	QPSK	1	0	10 mm	front	1:1	0.302	1.005	0.304	
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	-0.07	1	10223	QPSK	25	0	10 mm	front	1:1	0.226	1.052	0.238	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	-0.02	0	10223	QPSK	1	0	10 mm	bottom	1:1	0.181	1.005	0.182	
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	-0.02	1	10223	QPSK	25	0	10 mm	bottom	1:1	0.146	1.052	0.154	
793.00	23330	Mid	LTE Band 14	10	24.5	24.48	-0.03	0	10223	QPSK	1	0	10 mm	right	1:1	0.270	1.005	0.271	
793.00	23330	Mid	LTE Band 14	10	23.5	23.28	-0.02	1	10223	QPSK	25	0	10 mm	right	1:1	0.203	1.052	0.214	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-31
LTE Band 26 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.04	0	10223	QPSK	1	74	10 mm	back	1:1	0.295	1.186	0.350	A46
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	-0.01	1	10223	QPSK	36	0	10 mm	back	1:1	0.209	1.253	0.262	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.00	0	10223	QPSK	1	74	10 mm	front	1:1	0.232	1.186	0.275	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	0.05	1	10223	QPSK	36	0	10 mm	front	1:1	0.153	1.253	0.192	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.02	0	10223	QPSK	1	74	10 mm	bottom	1:1	0.160	1.186	0.190	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	0.04	1	10223	QPSK	36	0	10 mm	bottom	1:1	0.098	1.253	0.123	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	24.76	0.04	0	10223	QPSK	1	74	10 mm	right	1:1	0.186	1.186	0.221	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	23.52	-0.02	1	10223	QPSK	36	0	10 mm	right	1:1	0.142	1.253	0.178	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-32
LTE Band 66 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.0	22.45	0.08	0	12692	QPSK	1	0	10 mm	back	1:1	0.415	1.135	0.471	A48
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.0	22.19	-0.02	0	12692	QPSK	50	0	10 mm	back	1:1	0.412	1.205	0.496	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.0	22.45	-0.04	0	12692	QPSK	1	0	10 mm	front	1:1	0.349	1.135	0.396	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.0	22.19	0.02	0	12692	QPSK	50	0	10 mm	front	1:1	0.329	1.205	0.396	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.0	22.45	0.13	0	12692	QPSK	1	0	10 mm	bottom	1:1	0.150	1.135	0.170	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.0	22.19	-0.18	0	12692	QPSK	50	0	10 mm	bottom	1:1	0.150	1.205	0.181	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.0	22.45	0.04	0	12692	QPSK	1	0	10 mm	left	1:1	0.177	1.135	0.201	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.0	22.19	-0.05	0	12692	QPSK	50	0	10 mm	left	1:1	0.167	1.205	0.201	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 88 of 114

Table 11-33
LTE Band 25 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.0	22.52	0.02	0	12692	QPSK	1	0	10 mm	back	1:1	0.346	1.117	0.386	A50
1905.00	26590	High	LTE Band 25 (PCS)	20	23.0	22.63	0.03	0	12692	QPSK	50	0	10 mm	back	1:1	0.313	1.089	0.341	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.0	22.52	0.09	0	12692	QPSK	1	0	10 mm	front	1:1	0.288	1.117	0.322	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.0	22.63	0.20	0	12692	QPSK	50	0	10 mm	front	1:1	0.249	1.089	0.271	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.0	22.52	-0.08	0	12692	QPSK	1	0	10 mm	bottom	1:1	0.234	1.117	0.261	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.0	22.63	-0.03	0	12692	QPSK	50	0	10 mm	bottom	1:1	0.239	1.089	0.260	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.0	22.52	-0.02	0	12692	QPSK	1	0	10 mm	left	1:1	0.204	1.117	0.228	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.0	22.63	-0.04	0	12692	QPSK	50	0	10 mm	left	1:1	0.200	1.089	0.218	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-34
LTE Band 30 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	23.0	22.50	0.01	0	12692	QPSK	1	25	10 mm	back	1:1	0.424	1.122	0.476	A52
2310.00	27710	Mid	LTE Band 30	10	23.0	22.21	-0.07	0	12692	QPSK	25	0	10 mm	back	1:1	0.423	1.199	0.507	
2310.00	27710	Mid	LTE Band 30	10	23.0	22.50	-0.14	0	12692	QPSK	1	25	10 mm	front	1:1	0.203	1.122	0.228	
2310.00	27710	Mid	LTE Band 30	10	23.0	22.21	0.10	0	12692	QPSK	25	0	10 mm	front	1:1	0.201	1.199	0.241	
2310.00	27710	Mid	LTE Band 30	10	23.0	22.50	0.00	0	12692	QPSK	1	25	10 mm	bottom	1:1	0.231	1.122	0.259	
2310.00	27710	Mid	LTE Band 30	10	23.0	22.21	0.04	0	12692	QPSK	25	0	10 mm	bottom	1:1	0.233	1.199	0.279	
2310.00	27710	Mid	LTE Band 30	10	23.0	22.50	-0.06	0	12692	QPSK	1	25	10 mm	left	1:1	0.154	1.122	0.173	
2310.00	27710	Mid	LTE Band 30	10	23.0	22.21	-0.05	0	12692	QPSK	25	0	10 mm	left	1:1	0.153	1.199	0.183	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-35
LTE Band 7 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2535.00	21100	Mid	LTE Band 7	20	20.5	20.07	-0.14	0	12692	QPSK	1	0	10 mm	back	1:1	0.321	1.104	0.354	A54
2510.00	20850	Low	LTE Band 7	20	20.5	19.86	-0.11	0	12692	QPSK	50	0	10 mm	back	1:1	0.305	1.159	0.353	
2535.00	21100	Mid	LTE Band 7	20	20.5	20.07	-0.06	0	12692	QPSK	1	0	10 mm	front	1:1	0.194	1.104	0.214	
2510.00	20850	Low	LTE Band 7	20	20.5	19.86	-0.08	0	12692	QPSK	50	0	10 mm	front	1:1	0.208	1.159	0.241	
2535.00	21100	Mid	LTE Band 7	20	20.5	20.07	-0.02	0	12692	QPSK	1	0	10 mm	bottom	1:1	0.277	1.104	0.306	
2510.00	20850	Low	LTE Band 7	20	20.5	19.86	-0.10	0	12692	QPSK	50	0	10 mm	bottom	1:1	0.319	1.159	0.370	
2535.00	21100	Mid	LTE Band 7	20	20.5	20.07	0.13	0	12692	QPSK	1	0	10 mm	left	1:1	0.150	1.104	0.166	
2510.00	20850	Low	LTE Band 7	20	20.5	19.86	-0.08	0	12692	QPSK	50	0	10 mm	left	1:1	0.151	1.159	0.175	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 89 of 114

Table 11-36
LTE Band 41 Hotspot SAR

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.13	0.03	0	10272	QPSK	1	0	10 mm	back	1:1.58	0.324	1.089	0.353	A56
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.02	0.00	0	10272	QPSK	50	0	10 mm	back	1:1.58	0.318	1.117	0.355	
Power Class 2	2549.50	40185	Low-Md	LTE Band 41	20	22.5	21.98	-0.15	0	10272	QPSK	50	0	10 mm	back	1:2.31	0.214	1.127	0.241	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.13	0.03	0	10272	QPSK	1	0	10 mm	front	1:1.58	0.201	1.089	0.219	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.02	0.06	0	10272	QPSK	50	0	10 mm	front	1:1.58	0.197	1.117	0.220	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.13	-0.06	0	10272	QPSK	1	0	10 mm	bottom	1:1.58	0.271	1.089	0.295	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.02	-0.01	0	10272	QPSK	50	0	10 mm	bottom	1:1.58	0.265	1.117	0.296	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.13	0.12	0	10272	QPSK	1	0	10 mm	left	1:1.58	0.149	1.089	0.162	
Power Class 3	2549.50	40185	Low-Md	LTE Band 41	20	22.5	22.02	0.07	0	10272	QPSK	50	0	10 mm	left	1:1.58	0.150	1.117	0.168	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											



Table 11-37
WLAN Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan W/kg	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																	
2412	1	802.11b	DSSS	22	19.0	18.92	0.13	10 mm	05664	1	back	99.7	0.346	0.226	1.019	1.003	0.231	A58
2412	1	802.11b	DSSS	22	19.0	18.92	0.16	10 mm	05664	1	front	99.7	0.145	-	1.019	1.003	-	
2412	1	802.11b	DSSS	22	19.0	18.92	-0.16	10 mm	05664	1	top	99.7	0.098	-	1.019	1.003	-	
2412	1	802.11b	DSSS	22	19.0	18.92	-0.14	10 mm	05664	1	left	99.7	0.116	-	1.019	1.003	-	
5745	149	802.11a	OFDM	20	17.0	16.97	-0.08	10 mm	05763	6	back	98.5	1.001	0.398	1.007	1.015	0.407	A60
5745	149	802.11a	OFDM	20	17.0	16.97	-0.14	10 mm	05763	6	front	98.5	0.090	-	1.007	1.015	-	
5745	149	802.11a	OFDM	20	17.0	16.97	-0.11	10 mm	05763	6	top	98.5	0.578	0.263	1.007	1.015	0.269	
5745	149	802.11a	OFDM	20	17.0	16.97	-0.17	10 mm	05763	6	left	98.5	0.190	-	1.007	1.015	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body									
Spatial Peak									1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population									averaged over 1 gram									

11.4 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 90 of 114

8. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

GSM Test Notes:



1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

UMTS Notes:

1. UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 91 of 114

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 14 for linearity results.

WLAN Notes:

1. For held-to-ear, and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 92 of 114

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.



When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Head)	Estimated SAR (Head)	Separation Distance (Body)	Estimated SAR (Body)	Separation Distance (Hotspot)	Estimated SAR (Hotspot)
	[MHz]	[dBm]	[mm]	[W/kg]	[mm]	[W/kg]	[mm]	[W/kg]
Bluetooth	2480	8.50	5	0.294	15	0.098	10	0.147

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 93 of 114

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.327	0.125	0.452
	CDMA/EVDO BC0 (§22H)	0.467	0.125	0.592
	PCS CDMA/EVDO	0.376	0.125	0.501
	GSM 850	0.309	0.125	0.434
	GSM 1900	0.131	0.125	0.256
	UMTS 850	0.280	0.125	0.405
	UMTS 1750	0.286	0.125	0.411
	UMTS 1900	0.329	0.125	0.454
	LTE Band 71	0.241	0.125	0.366
	LTE Band 12	0.230	0.125	0.355
	LTE Band 13	0.181	0.125	0.306
	LTE Band 14	0.149	0.125	0.274
	LTE Band 26 (Cell)	0.263	0.125	0.388
	LTE Band 66 (AWS)	0.301	0.125	0.426
	LTE Band 25 (PCS)	0.353	0.125	0.478
	LTE Band 30	0.191	0.125	0.316
	LTE Band 7	0.184	0.125	0.309
	LTE Band 41	0.195	0.125	0.320



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 94 of 114

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.327	0.351	0.678
	CDMA/EVDO BC0 (§22H)	0.467	0.351	0.818
	PCS CDMA/EVDO	0.376	0.351	0.727
	GSM 850	0.309	0.351	0.660
	GSM 1900	0.131	0.351	0.482
	UMTS 850	0.280	0.351	0.631
	UMTS 1750	0.286	0.351	0.637
	UMTS 1900	0.329	0.351	0.680
	LTE Band 71	0.241	0.351	0.592
	LTE Band 12	0.230	0.351	0.581
	LTE Band 13	0.181	0.351	0.532
	LTE Band 14	0.149	0.351	0.500
	LTE Band 26 (Cell)	0.263	0.351	0.614
	LTE Band 66 (AWS)	0.301	0.351	0.652
	LTE Band 25 (PCS)	0.353	0.351	0.704
	LTE Band 30	0.191	0.351	0.542
	LTE Band 7	0.184	0.351	0.535
	LTE Band 41	0.195	0.351	0.546



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 95 of 114	

Table 12-4
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.327	0.294	0.621
	CDMA/EVDO BC0 (§22H)	0.467	0.294	0.761
	PCS CDMA/EVDO	0.376	0.294	0.670
	GSM 850	0.309	0.294	0.603
	GSM 1900	0.131	0.294	0.425
	UMTS 850	0.280	0.294	0.574
	UMTS 1750	0.286	0.294	0.580
	UMTS 1900	0.329	0.294	0.623
	LTE Band 71	0.241	0.294	0.535
	LTE Band 12	0.230	0.294	0.524
	LTE Band 13	0.181	0.294	0.475
	LTE Band 14	0.149	0.294	0.443
	LTE Band 26 (Cell)	0.263	0.294	0.557
	LTE Band 66 (AWS)	0.301	0.294	0.595
	LTE Band 25 (PCS)	0.353	0.294	0.647
	LTE Band 30	0.191	0.294	0.485
	LTE Band 7	0.184	0.294	0.478
	LTE Band 41	0.195	0.294	0.489

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 96 of 114	

Table 12-5
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.327	0.294	0.351	0.972
	CDMA/EVDO BC0 (§22H)	0.467	0.294	0.351	1.112
	PCS CDMA/EVDO	0.376	0.294	0.351	1.021
	GSM 850	0.309	0.294	0.351	0.954
	GSM 1900	0.131	0.294	0.351	0.776
	UMTS 850	0.280	0.294	0.351	0.925
	UMTS 1750	0.286	0.294	0.351	0.931
	UMTS 1900	0.329	0.294	0.351	0.974
	LTE Band 71	0.241	0.294	0.351	0.886
	LTE Band 12	0.230	0.294	0.351	0.875
	LTE Band 13	0.181	0.294	0.351	0.826
	LTE Band 14	0.149	0.294	0.351	0.794
	LTE Band 26 (Cell)	0.263	0.294	0.351	0.908
	LTE Band 66 (AWS)	0.301	0.294	0.351	0.946
	LTE Band 25 (PCS)	0.353	0.294	0.351	0.998
	LTE Band 30	0.191	0.294	0.351	0.836
	LTE Band 7	0.184	0.294	0.351	0.829
	LTE Band 41	0.195	0.294	0.351	0.840

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 97 of 114	

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-6
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.471	0.094	0.565
	CDMA BC0 (§22H)	0.535	0.094	0.629
	PCS CDMA	0.299	0.094	0.393
	GSM 850	0.304	0.094	0.398
	GSM 1900	0.151	0.094	0.245
	UMTS 850	0.370	0.094	0.464
	UMTS 1750	0.483	0.094	0.577
	UMTS 1900	0.335	0.094	0.429
	LTE Band 71	0.321	0.094	0.415
	LTE Band 12	0.328	0.094	0.422
	LTE Band 13	0.414	0.094	0.508
	LTE Band 14	0.374	0.094	0.468
	LTE Band 26 (Cell)	0.291	0.094	0.385
	LTE Band 66 (AWS)	0.493	0.094	0.587
	LTE Band 25 (PCS)	0.327	0.094	0.421
	LTE Band 30	0.279	0.094	0.373
	LTE Band 7	0.406	0.094	0.500
	LTE Band 41	0.450	0.094	0.544



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 98 of 114	

Table 12-7
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.471	0.523	0.994
	CDMA BC0 (§22H)	0.535	0.523	1.058
	PCS CDMA	0.299	0.523	0.822
	GSM 850	0.304	0.523	0.827
	GSM 1900	0.151	0.523	0.674
	UMTS 850	0.370	0.523	0.893
	UMTS 1750	0.483	0.523	1.006
	UMTS 1900	0.335	0.523	0.858
	LTE Band 71	0.321	0.523	0.844
	LTE Band 12	0.328	0.523	0.851
	LTE Band 13	0.414	0.523	0.937
	LTE Band 14	0.374	0.523	0.897
	LTE Band 26 (Cell)	0.291	0.523	0.814
	LTE Band 66 (AWS)	0.493	0.523	1.016
	LTE Band 25 (PCS)	0.327	0.523	0.850
	LTE Band 30	0.279	0.523	0.802
	LTE Band 7	0.406	0.523	0.929
	LTE Band 41	0.450	0.523	0.973



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 99 of 114

Table 12-8
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.471	0.098	0.569
	CDMA BC0 (§22H)	0.535	0.098	0.633
	PCS CDMA	0.299	0.098	0.397
	GSM 850	0.304	0.098	0.402
	GSM 1900	0.151	0.098	0.249
	UMTS 850	0.370	0.098	0.468
	UMTS 1750	0.483	0.098	0.581
	UMTS 1900	0.335	0.098	0.433
	LTE Band 71	0.321	0.098	0.419
	LTE Band 12	0.328	0.098	0.426
	LTE Band 13	0.414	0.098	0.512
	LTE Band 14	0.374	0.098	0.472
	LTE Band 26 (Cell)	0.291	0.098	0.389
	LTE Band 66 (AWS)	0.493	0.098	0.591
	LTE Band 25 (PCS)	0.327	0.098	0.425
	LTE Band 30	0.279	0.098	0.377
	LTE Band 7	0.406	0.098	0.504
	LTE Band 41	0.450	0.098	0.548

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.





FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 100 of 114

Table 12-9
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	CDMA BC10 (§90S)	0.471	0.098	0.523	1.092
	CDMA BC0 (§22H)	0.535	0.098	0.523	1.156
	PCS CDMA	0.299	0.098	0.523	0.920
	GSM 850	0.304	0.098	0.523	0.925
	GSM 1900	0.151	0.098	0.523	0.772
	UMTS 850	0.370	0.098	0.523	0.991
	UMTS 1750	0.483	0.098	0.523	1.104
	UMTS 1900	0.335	0.098	0.523	0.956
	LTE Band 71	0.321	0.098	0.523	0.942
	LTE Band 12	0.328	0.098	0.523	0.949
	LTE Band 13	0.414	0.098	0.523	1.035
	LTE Band 14	0.374	0.098	0.523	0.995
	LTE Band 26 (Cell)	0.291	0.098	0.523	0.912
	LTE Band 66 (AWS)	0.493	0.098	0.523	1.114
	LTE Band 25 (PCS)	0.327	0.098	0.523	0.948
	LTE Band 30	0.279	0.098	0.523	0.900
	LTE Band 7	0.406	0.098	0.523	1.027
	LTE Band 41	0.450	0.098	0.523	1.071

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 101 of 114

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-10
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.544	0.231	0.775
	EVDO BC0 (§22H)	0.443	0.231	0.674
	PCS EVDO	0.401	0.231	0.632
	GPRS 850	0.330	0.231	0.561
	GPRS 1900	0.270	0.231	0.501
	UMTS 850	0.385	0.231	0.616
	UMTS 1750	0.478	0.231	0.709
	UMTS 1900	0.595	0.231	0.826
	LTE Band 71	0.430	0.231	0.661
	LTE Band 12	0.387	0.231	0.618
	LTE Band 13	0.493	0.231	0.724
	LTE Band 14	0.408	0.231	0.639
	LTE Band 26 (Cell)	0.350	0.231	0.581
	LTE Band 66 (AWS)	0.496	0.231	0.727
	LTE Band 25 (PCS)	0.386	0.231	0.617
	LTE Band 30	0.507	0.231	0.738
	LTE Band 7	0.370	0.231	0.601
	LTE Band 41	0.355	0.231	0.586



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 102 of 114

Table 12-11
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.544	0.407	0.951
	EVDO BC0 (§22H)	0.443	0.407	0.850
	PCS EVDO	0.401	0.407	0.808
	GPRS 850	0.330	0.407	0.737
	GPRS 1900	0.270	0.407	0.677
	UMTS 850	0.385	0.407	0.792
	UMTS 1750	0.478	0.407	0.885
	UMTS 1900	0.595	0.407	1.002
	LTE Band 71	0.430	0.407	0.837
	LTE Band 12	0.387	0.407	0.794
	LTE Band 13	0.493	0.407	0.900
	LTE Band 14	0.408	0.407	0.815
	LTE Band 26 (Cell)	0.350	0.407	0.757
	LTE Band 66 (AWS)	0.496	0.407	0.903
	LTE Band 25 (PCS)	0.386	0.407	0.793
	LTE Band 30	0.507	0.407	0.914
	LTE Band 7	0.370	0.407	0.777
	LTE Band 41	0.355	0.407	0.762



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 103 of 114

Table 12-12
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.544	0.147	0.691
	EVDO BC0 (§22H)	0.443	0.147	0.590
	PCS EVDO	0.401	0.147	0.548
	GPRS 850	0.330	0.147	0.477
	GPRS 1900	0.270	0.147	0.417
	UMTS 850	0.385	0.147	0.532
	UMTS 1750	0.478	0.147	0.625
	UMTS 1900	0.595	0.147	0.742
	LTE Band 71	0.430	0.147	0.577
	LTE Band 12	0.387	0.147	0.534
	LTE Band 13	0.493	0.147	0.640
	LTE Band 14	0.408	0.147	0.555
	LTE Band 26 (Cell)	0.350	0.147	0.497
	LTE Band 66 (AWS)	0.496	0.147	0.643
	LTE Band 25 (PCS)	0.386	0.147	0.533
	LTE Band 30	0.507	0.147	0.654
	LTE Band 7	0.370	0.147	0.517
	LTE Band 41	0.355	0.147	0.502

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 104 of 114



Table 12-13
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	EVDO BC10 (§90S)	0.544	0.147	0.407	1.098
	EVDO BC0 (§22H)	0.443	0.147	0.407	0.997
	PCS EVDO	0.401	0.147	0.407	0.955
	GPRS 850	0.330	0.147	0.407	0.884
	GPRS 1900	0.270	0.147	0.407	0.824
	UMTS 850	0.385	0.147	0.407	0.939
	UMTS 1750	0.478	0.147	0.407	1.032
	UMTS 1900	0.595	0.147	0.407	1.149
	LTE Band 71	0.430	0.147	0.407	0.984
	LTE Band 12	0.387	0.147	0.407	0.941
	LTE Band 13	0.493	0.147	0.407	1.047
	LTE Band 14	0.408	0.147	0.407	0.962
	LTE Band 26 (Cell)	0.350	0.147	0.407	0.904
	LTE Band 66 (AWS)	0.496	0.147	0.407	1.050
	LTE Band 25 (PCS)	0.386	0.147	0.407	0.940
	LTE Band 30	0.507	0.147	0.407	1.061
	LTE Band 7	0.370	0.147	0.407	0.924
	LTE Band 41	0.355	0.147	0.407	0.909

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 105 of 114	



13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was not assessed for each frequency band since all measured SAR values are < 0.80 W/kg for 1g SAR and < 2.0 W/kg for 10g SAR.

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 106 of 114

14 ADDITIONAL TESTING PER FCC GUIDANCE

14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

Table 14-1
LTE Band 41 Head Linearity Data

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	24.5	27.5
Measured Output Power (dBm)	23.38	26.27
Measured SAR (W/kg)	0.108	0.147
Measured Power (mW)	217.77	423.64
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	137.85	183.44
% deviation from expected linearity		2.28%

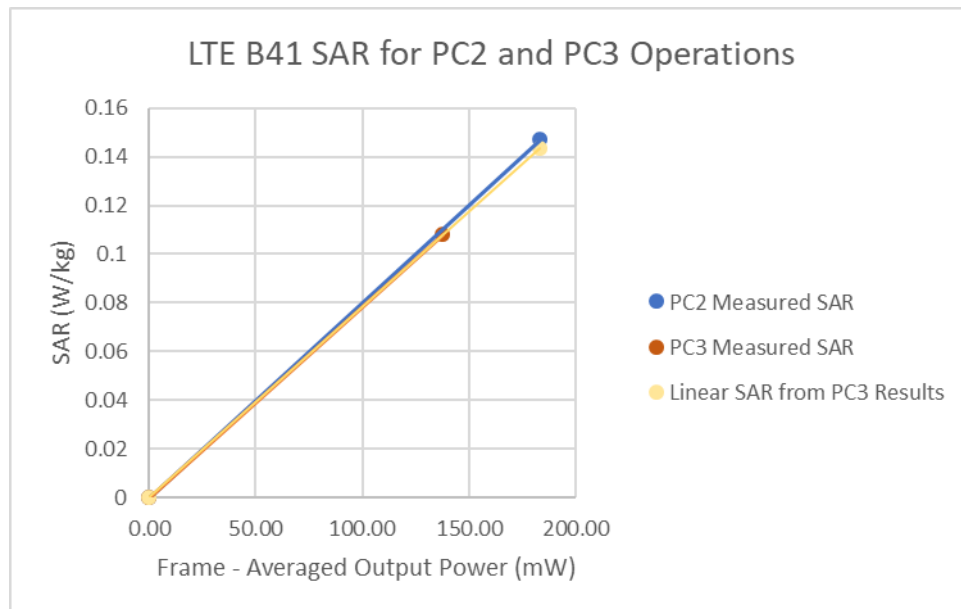


Figure 14-1
LTE Band 41 Head Linearity

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 107 of 114

Table 14-2
LTE Band 41 Body-Worn Linearity Data

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	24.5	27.5
Measured Output Power (dBm)	23.38	26.27
Measured SAR (W/kg)	0.232	0.339
Measured Power (mW)	217.77	423.64
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	137.85	183.44
% deviation from expected linearity		9.81%

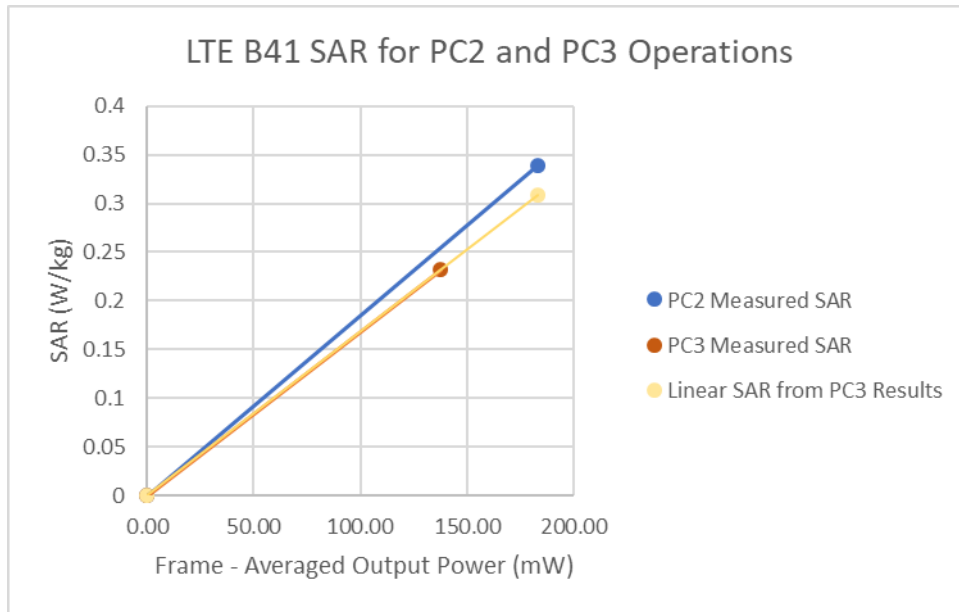


Figure 14-2
LTE Band 41 Body-Worn Linearity



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 108 of 114

Table 14-3
LTE Band 41 Hotspot Linearity Data

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	22.5	22.5
Measured Output Power (dBm)	22.02	21.98
Measured SAR (W/kg)	0.318	0.214
Measured Power (mW)	159.22	157.76
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	100.79	68.31
% deviation from expected linearity		-0.71%

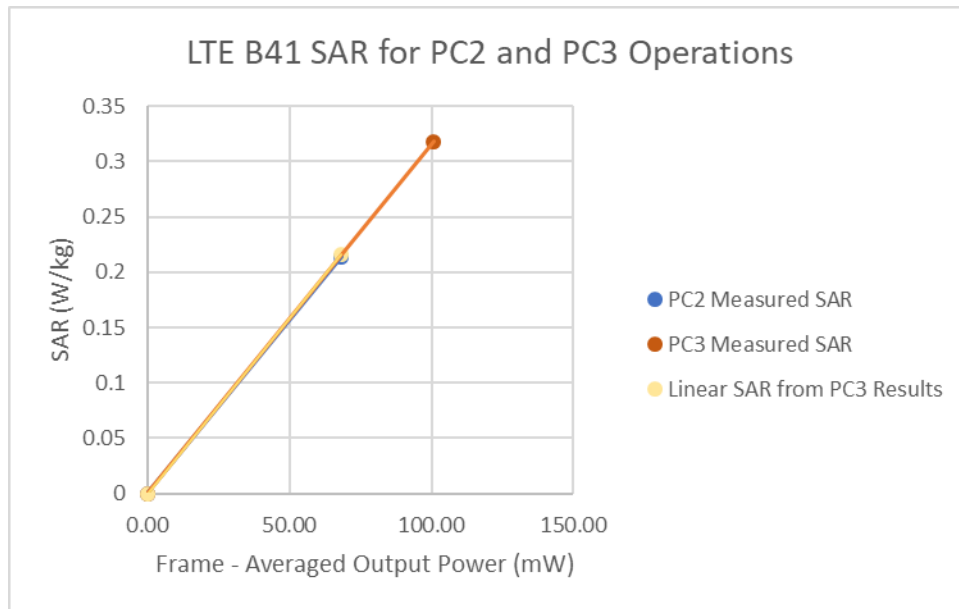




Figure 14-3
LTE Band 41 Hotspot Linearity



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 109 of 114

15 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	E4438C	ESG Vector Signal Generator	3/8/2019	Biennial	3/8/2021	MY42082385
Agilent	N5182A	MXG Vector Signal Generator	11/28/2018	Annual	11/28/2019	MY47420603
Agilent	N5182A-506	MXG Vector Signal Generator	6/19/2018	Annual	6/19/2019	MY48180366
Agilent	8753ES	S-Parameter Network Analyzer	7/30/2018	Annual	7/30/2019	MY40006070
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/30/2018	Annual	8/30/2019	MY40003841
Agilent	E5515C	Wireless Communications Test Set	5/22/2018	Biennial	5/22/2020	GB43193563
Agilent	E5515C	Wireless Communications Test Set	2/7/2018	Triennial	2/7/2021	GB43304447
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Anritsu	ML2496A	Power Meter	6/19/2018	Annual	6/19/2019	1306009
Anritsu	ML2496A	Power Meter	5/21/2018	Annual	5/21/2019	1351001
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339008
Anritsu	MA2411B	Pulse Power Sensor	3/6/2019	Annual	3/6/2020	1339018
Anritsu	MT8820C	Radio Communication Analyzer	3/29/2019	Annual	3/29/2020	6201300731
Anritsu	MT8821C	Radio Communication Analyzer	11/6/2018	Annual	11/6/2019	6200901190
Anritsu	MT8821C	Radio Communication Analyzer	7/26/2018	Annual	7/26/2019	6201144418
Anritsu	MA24106A	USB Power Sensor	6/5/2018	Annual	6/5/2019	1244515
Anritsu	MA24106A	USB Power Sensor	1/31/2019	Annual	1/31/2020	1244524
Anritsu	MT8862A	Wireless Connectivity Test Set	7/3/2018	Annual	7/3/2019	6261782395
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./ Clock/ Humidity Monitor	10/9/2018	Biennial	10/9/2020	181647802
Control Company	4040	Therm./ Clock/ Humidity Monitor	10/9/2018	Biennial	10/9/2020	181647811
Control Company	4352	Ultra Long Stem Thermometer	11/29/2018	Biennial	11/29/2020	181768001
Control Company	4352	Ultra Long Stem Thermometer	11/29/2018	Biennial	11/29/2020	181766777
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mitutoyo	CD-6°CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13261465
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	11/1/2017	Biennial	11/1/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	11/14/2018	Annual	11/14/2019	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	6/9/2018	Annual	6/9/2019	108843
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/30/2018	Annual	10/30/2019	164948
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/11/2018	Annual	9/11/2019	1091
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Biennial	1/15/2020	1003
SPEAG	D750V3	750 MHz SAR Dipole	10/19/2018	Annual	10/19/2019	1161
SPEAG	D835V2	835 MHz SAR Dipole	1/22/2019	Annual	1/22/2020	4d132
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2018	Annual	10/22/2019	1150
SPEAG	D1765V2	1765 MHz SAR Dipole	5/23/2018	Annual	5/23/2019	1008
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Biennial	5/9/2019	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Annual	10/23/2019	5d080
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Annual	10/23/2019	5d149
SPEAG	D2300V2	2300 MHz SAR Dipole	11/8/2017	Biennial	11/8/2019	1064
SPEAG	D2300V2	2300 MHz SAR Dipole	8/13/2018	Annual	8/13/2019	1073
SPEAG	D2450V2	2450 MHz SAR Dipole	8/17/2017	Biennial	8/17/2019	719
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Biennial	9/11/2019	797
SPEAG	D2450V2	2450 MHz SAR Dipole	8/16/2018	Annual	8/16/2019	981
SPEAG	D2600V2	2600 MHz SAR Dipole	4/11/2018	Biennial	4/11/2020	1004
SPEAG	D2600V2	2600 MHz SAR Dipole	6/7/2017	Biennial	6/7/2019	1064
SPEAG	D2600V2	2600 MHz SAR Dipole	8/13/2018	Annual	8/13/2019	1126
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/16/2018	Biennial	1/16/2020	1057
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/10/2018	Annual	8/10/2019	1237
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/14/2019	Annual	2/14/2020	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/3/2018	Annual	10/3/2019	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2018	Annual	7/11/2019	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/22/2018	Annual	8/22/2019	1450
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2019	Annual	1/15/2020	1530
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/13/2019	Annual	2/13/2020	665
SPEAG	EX3DV4	SAR Probe	6/25/2018	Annual	6/25/2019	7409
SPEAG	EX3DV4	SAR Probe	2/19/2019	Annual	2/19/2020	3914
SPEAG	EX3DV4	SAR Probe	8/23/2018	Annual	8/23/2019	7308
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7410
SPEAG	EX3DV4	SAR Probe	1/25/2019	Annual	1/25/2020	3589
SPEAG	EX3DV4	SAR Probe	1/24/2019	Annual	1/24/2020	7488
SPEAG	EX3DV4	SAR Probe	2/19/2019	Annual	2/19/2020	7417



Note 1: Each equipment item was used solely within its respective calibration period.

Note 2: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 110 of 114

16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 111 of 114

17 CONCLUSION

17.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 112 of 114

18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMA102U	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset	Page 113 of 114

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMA102U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1904030051-01-R1.A3L	Test Dates: 04/10/19 – 05/08/19	DUT Type: Portable Handset		Page 114 of 114

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12734

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.94$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 04-24-2019; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 820.1 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: Cell. EVDO Rev. A, Rule Part 90S, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.78 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.250 W/kg

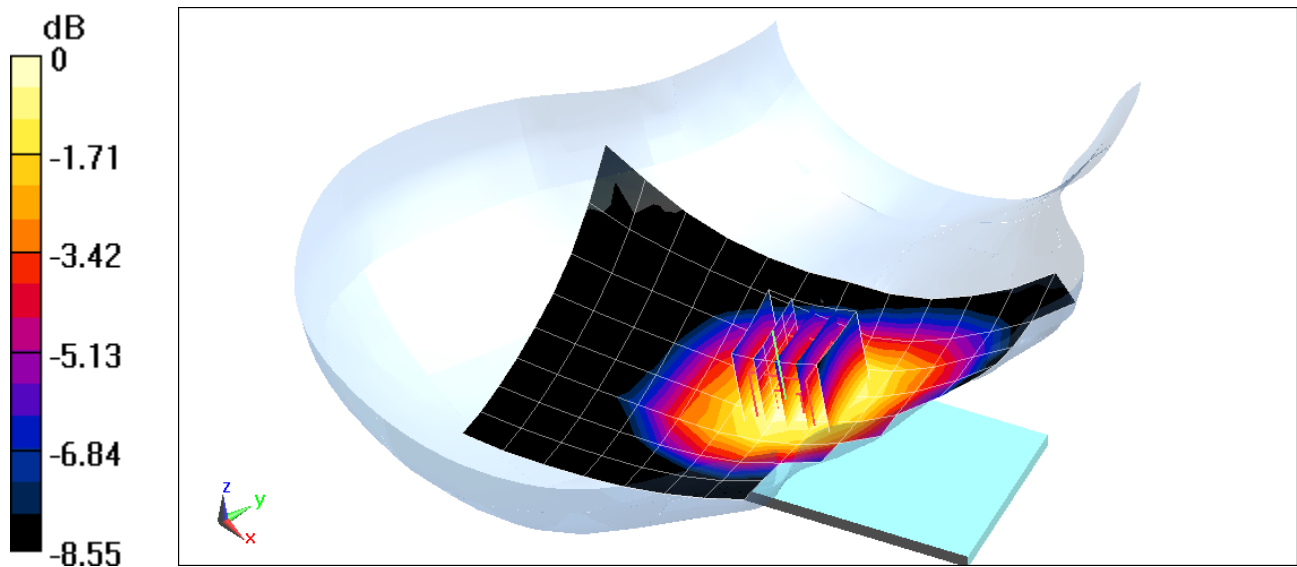

0 dB = 0.296 W/kg = -5.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12734

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.378$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 04-17-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 836.52 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: Cell. CDMA, Rule Part 22H, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.42 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.333 W/kg

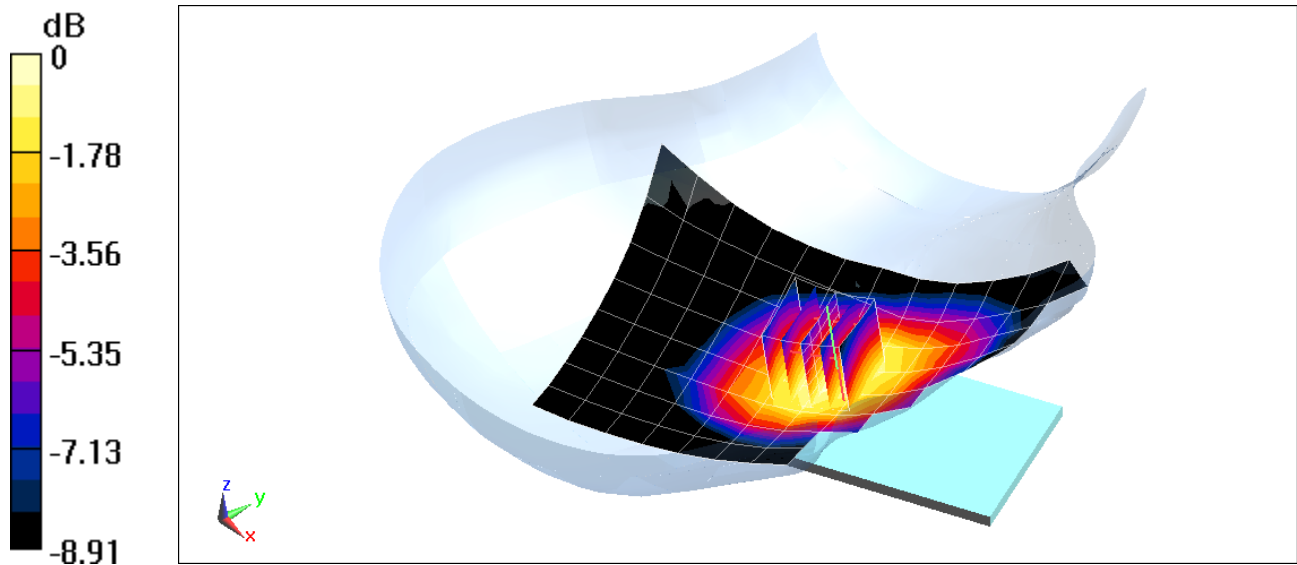

0 dB = 0.396 W/kg = -4.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 39.433$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-08-2019; Ambient Temp: 23.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: PCS CDMA, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.45 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.309 W/kg

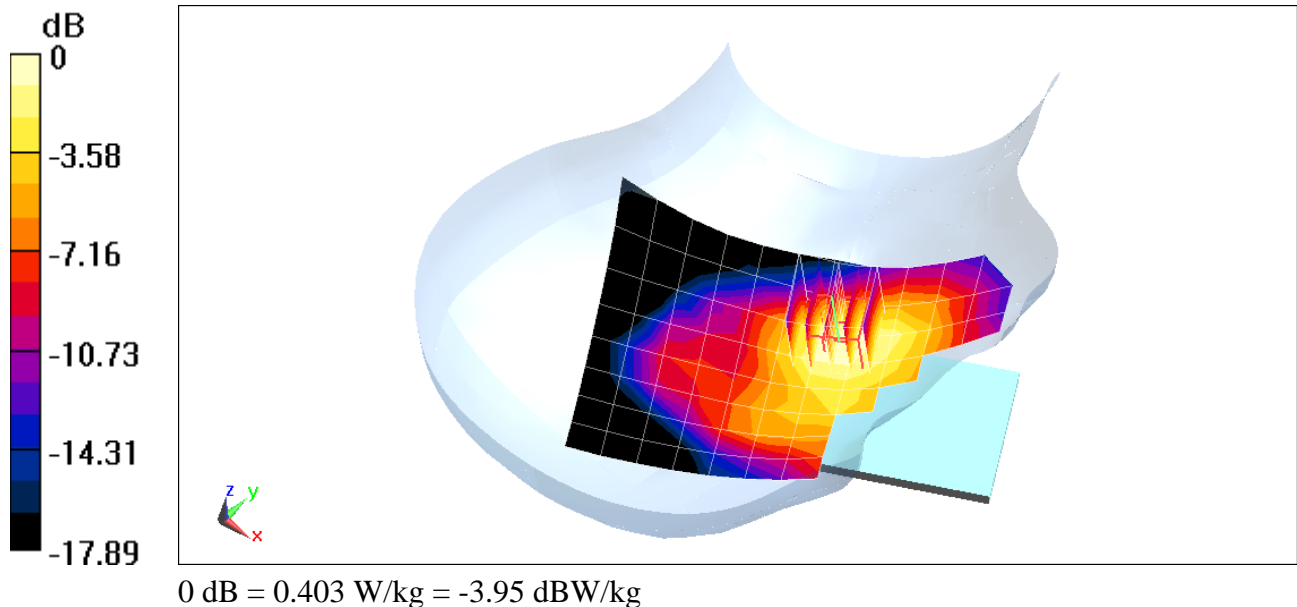

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, _GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.378$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-17-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 836.6 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.72 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.252 W/kg

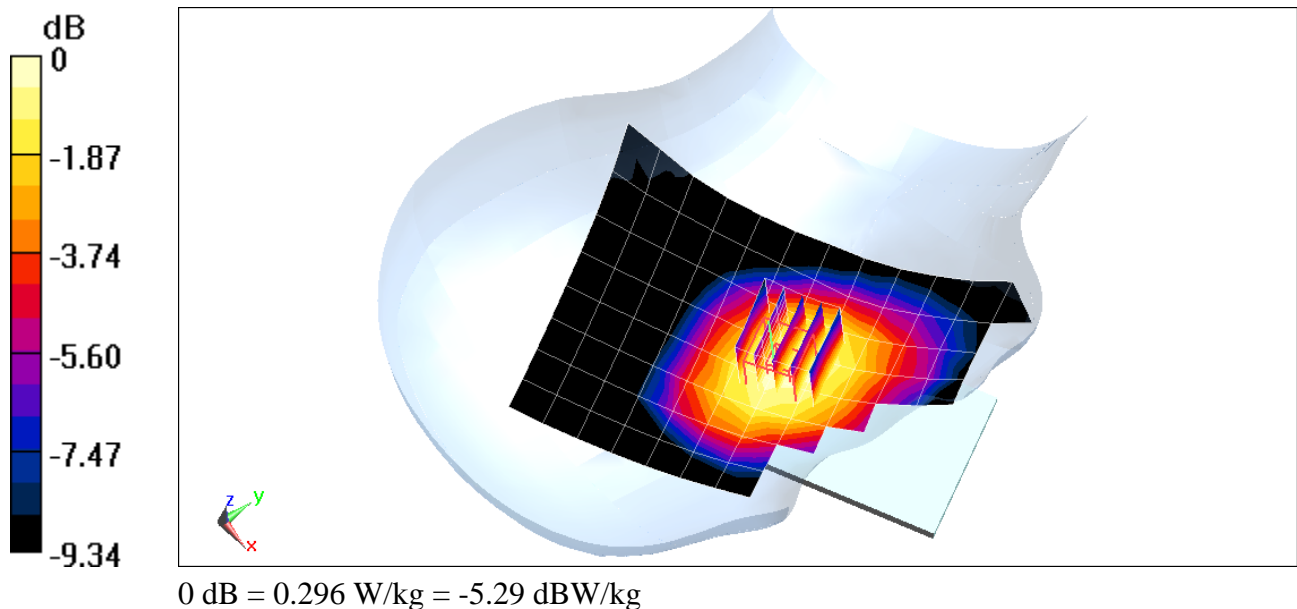

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1850.2 \text{ MHz}$; $\sigma = 1.381 \text{ S/m}$; $\epsilon_r = 39.569$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-08-2019; Ambient Temp: 23.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1850.2 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 1900, Right Head, Cheek, Low.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.002 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.101 W/kg

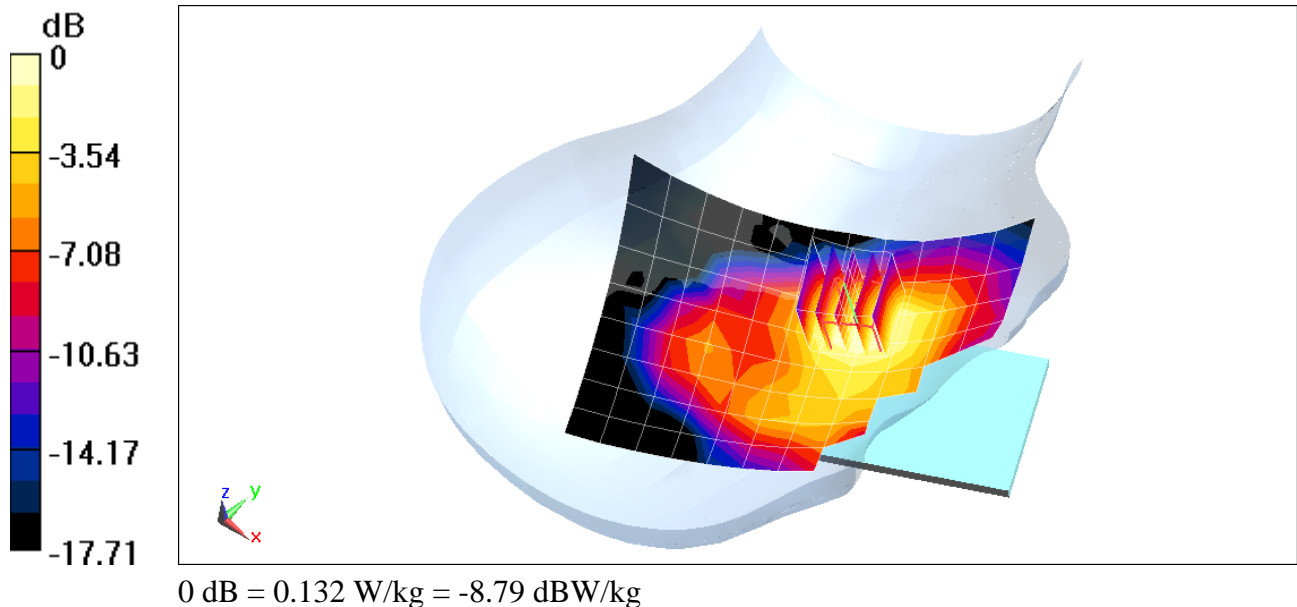

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.378$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-17-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 836.6 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.57 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.280 W/kg

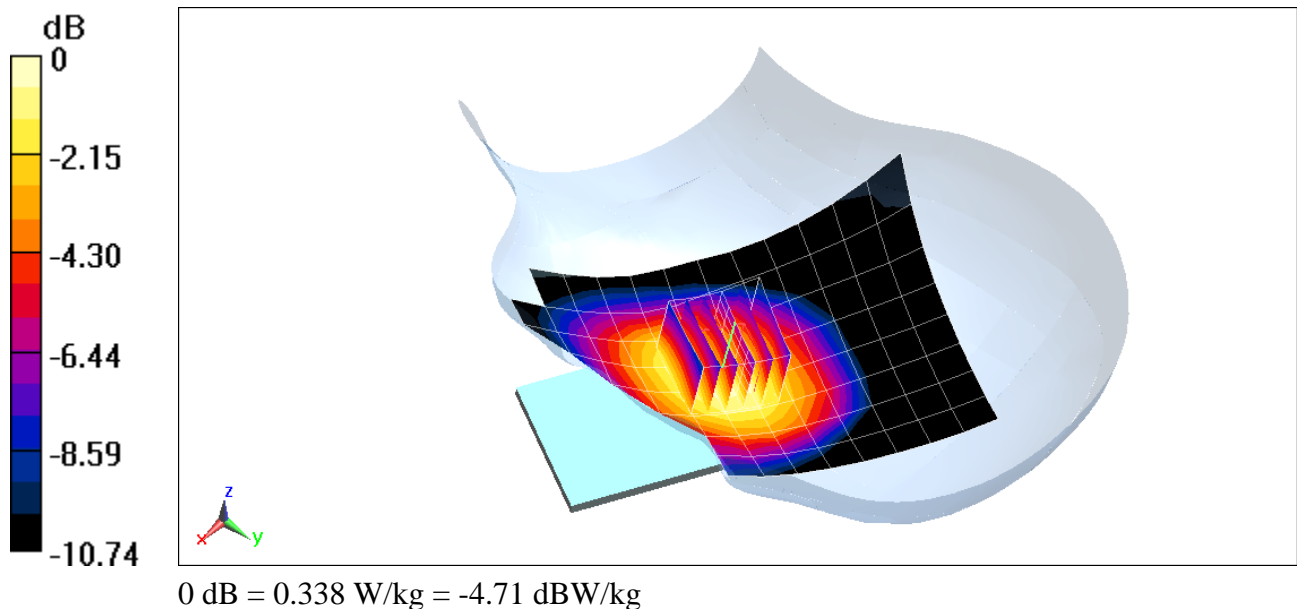

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.339 \text{ S/m}$; $\epsilon_r = 38.69$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-10-2019; Ambient Temp: 23.0°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7308; ConvF(8.66, 8.66, 8.66) @ 1732.4 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.235 W/kg

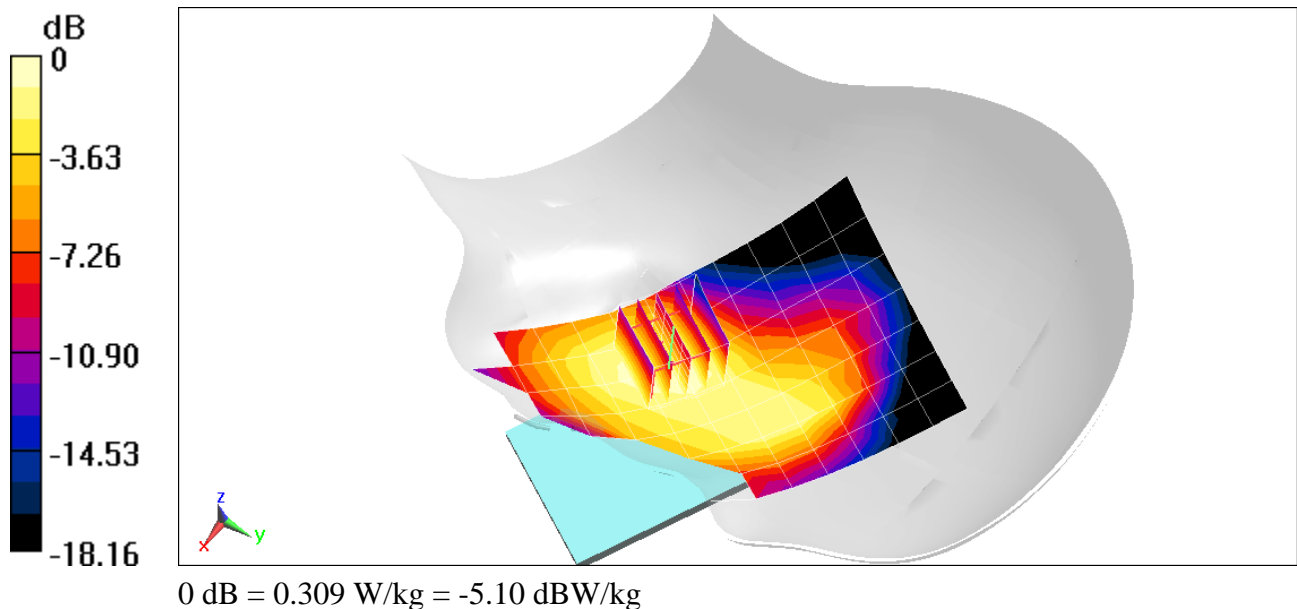

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 39.433$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-08-2019; Ambient Temp: 23.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.52 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.274 W/kg

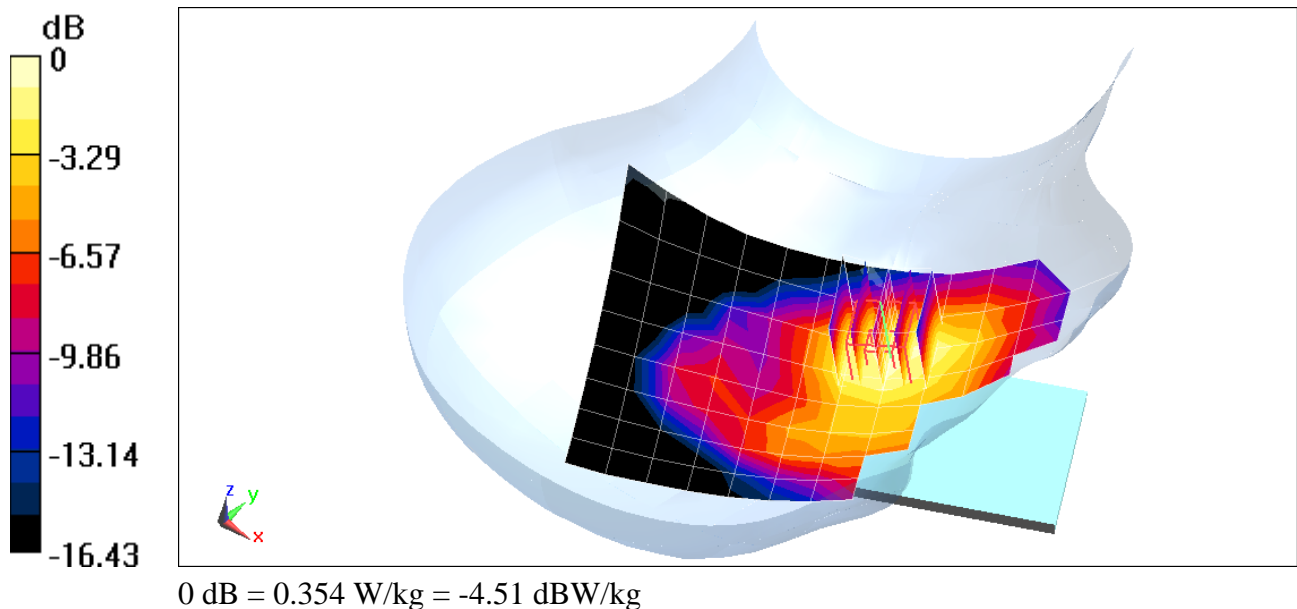

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10264

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 42.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-24-2019; Ambient Temp: 24.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(9.91, 9.91, 9.91) @ 680.5 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 71, Right Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.97 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.201 W/kg

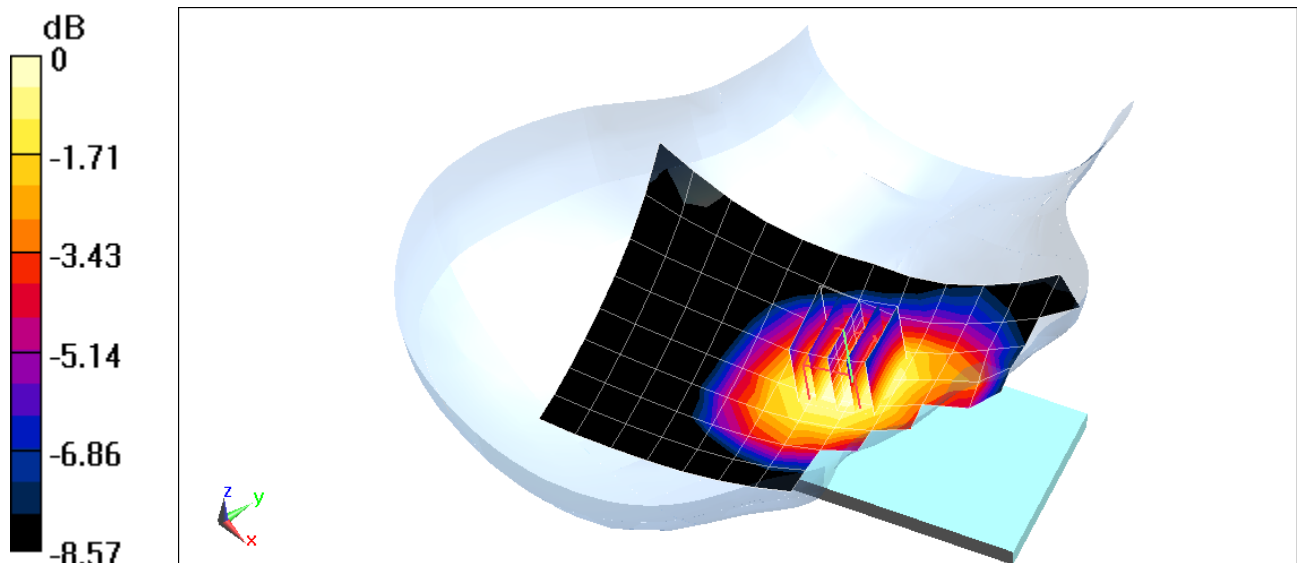

0 dB = 0.240 W/kg = -6.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.871 \text{ S/m}$; $\epsilon_r = 43.706$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7409; ConvF(9.91, 9.91, 9.91) @ 707.5 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.43 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.207 W/kg

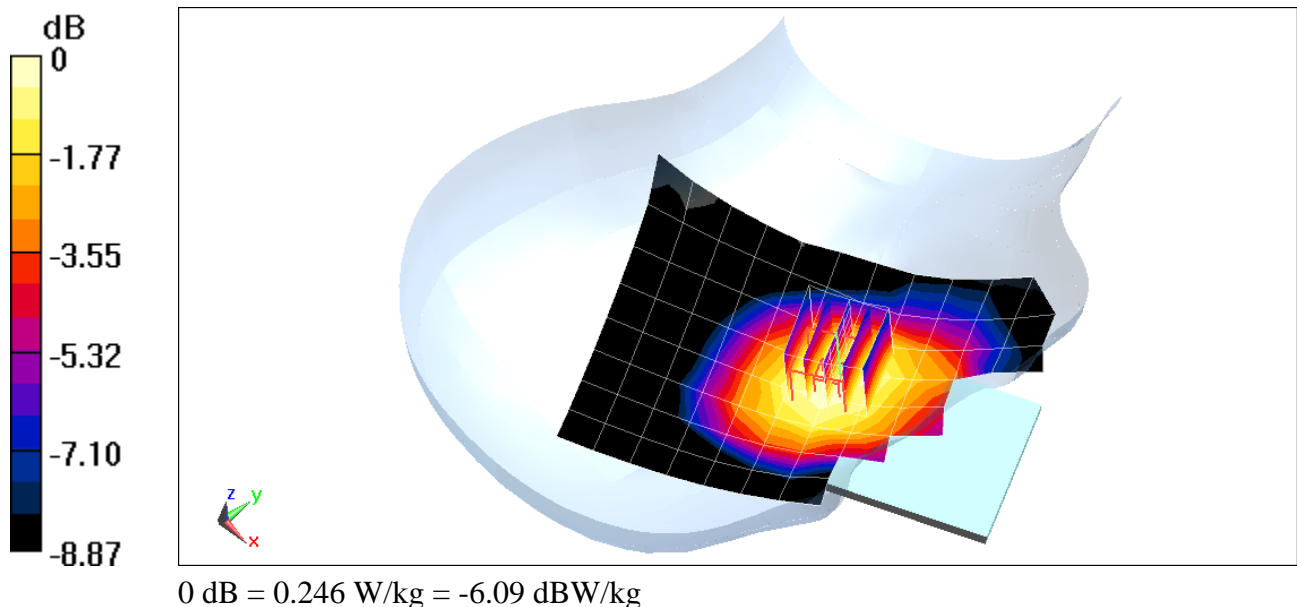

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 43.473$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7409; ConvF(9.91, 9.91, 9.91) @ 782 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.97 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.166 W/kg

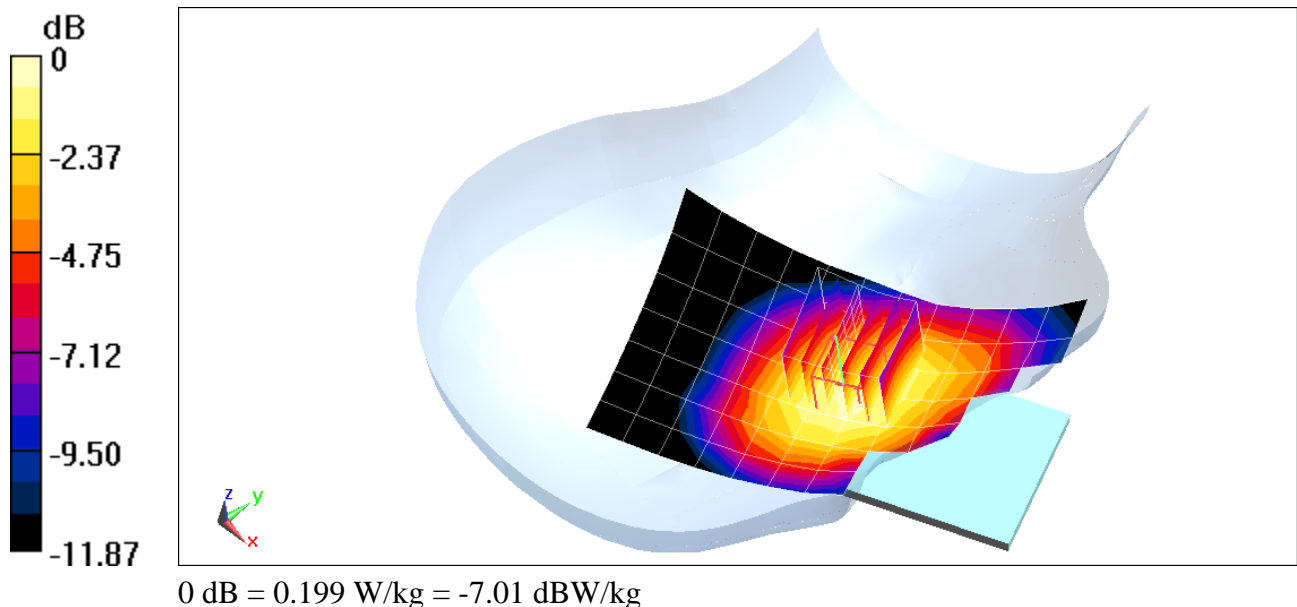

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 43.442$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7409; ConvF(9.91, 9.91, 9.91) @ 793 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 14, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.37 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.148 W/kg

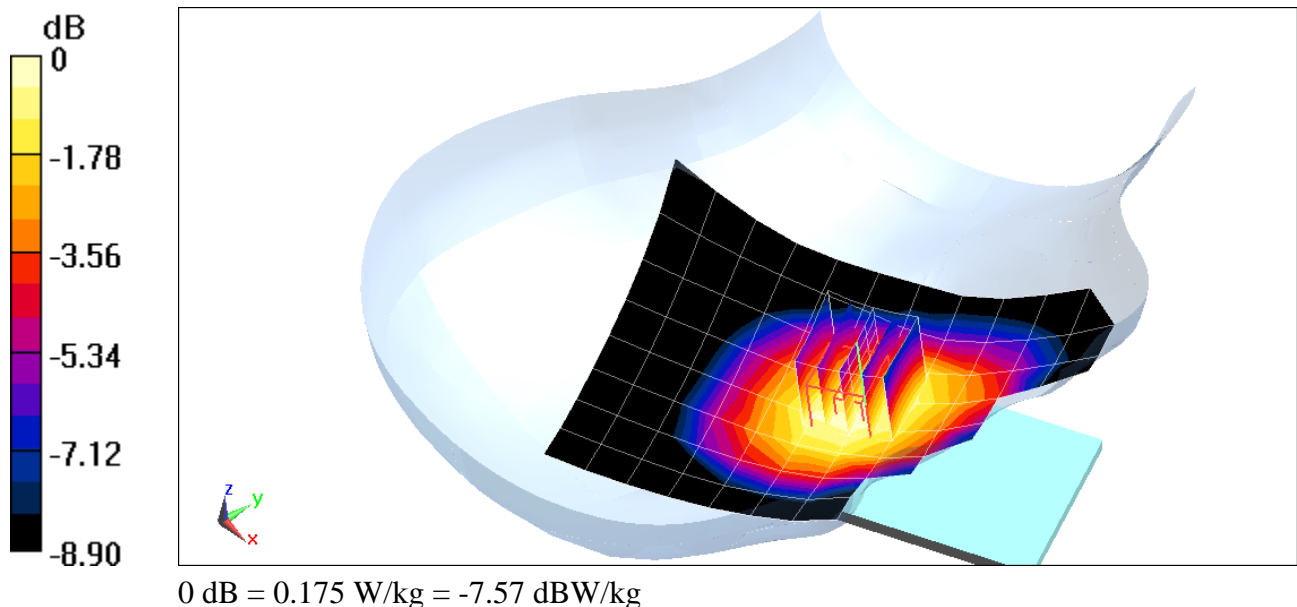

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 41.391$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-17-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 831.5 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.16 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.222 W/kg

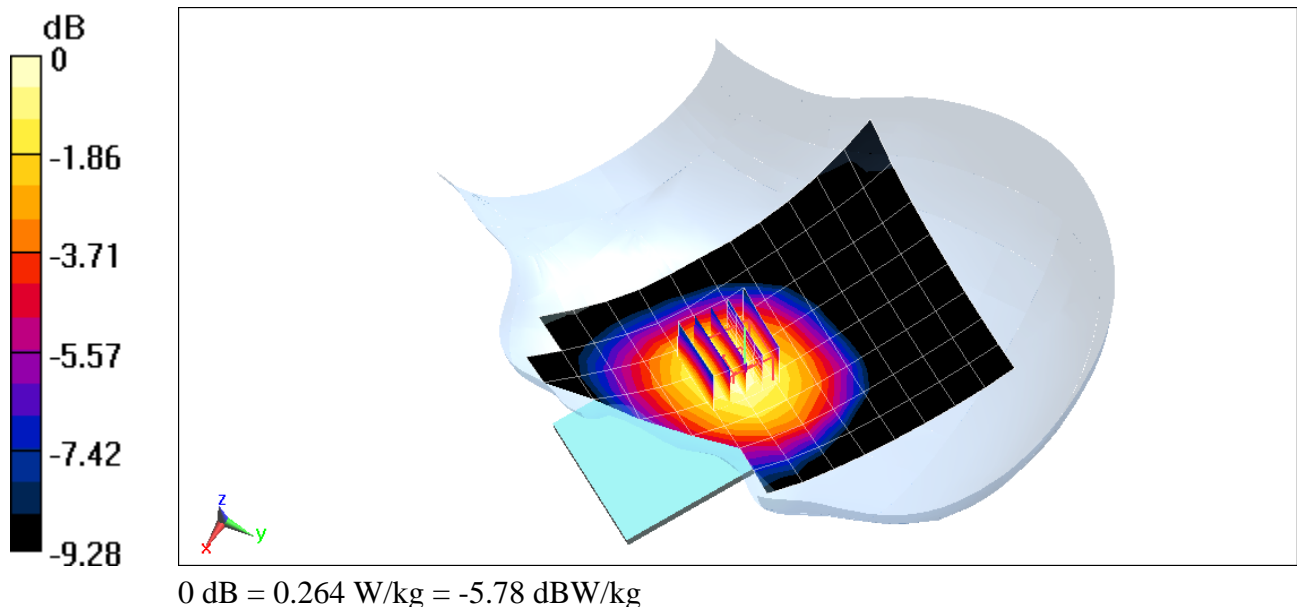

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.404 \text{ S/m}$; $\epsilon_r = 41.647$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7409; ConvF(8.43, 8.43, 8.43) @ 1770 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Left Head, Cheek,
High.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.64 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.253 W/kg

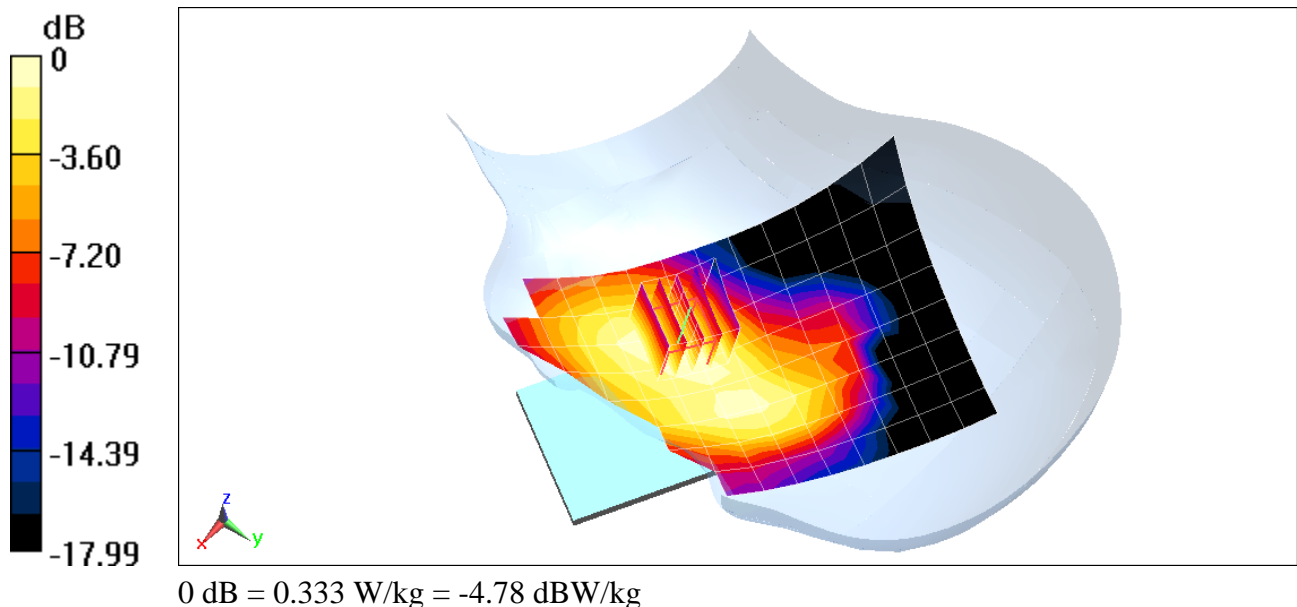

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.466 \text{ S/m}$; $\epsilon_r = 40.721$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05-01-2019; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(8.05, 8.05, 8.05) @ 1905 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.06 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.311 W/kg

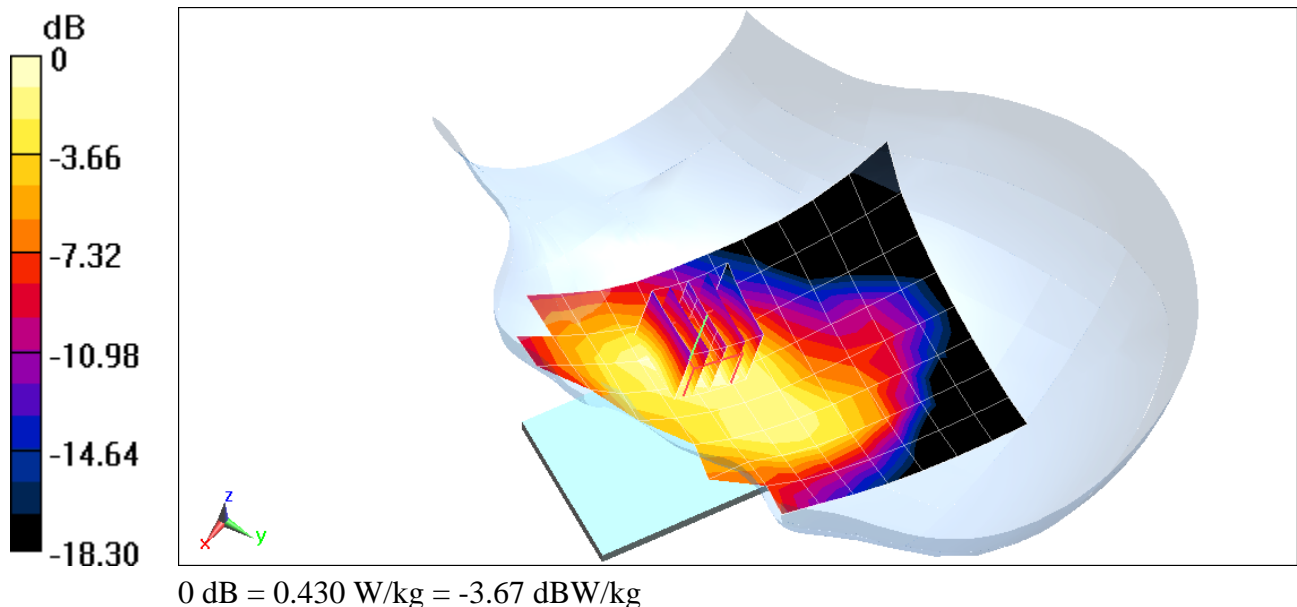

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.71 \text{ S/m}$; $\epsilon_r = 38.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-02-2019; Ambient Temp: 24.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.77, 6.77, 6.77) @ 2310 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 30, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.20 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.173 W/kg

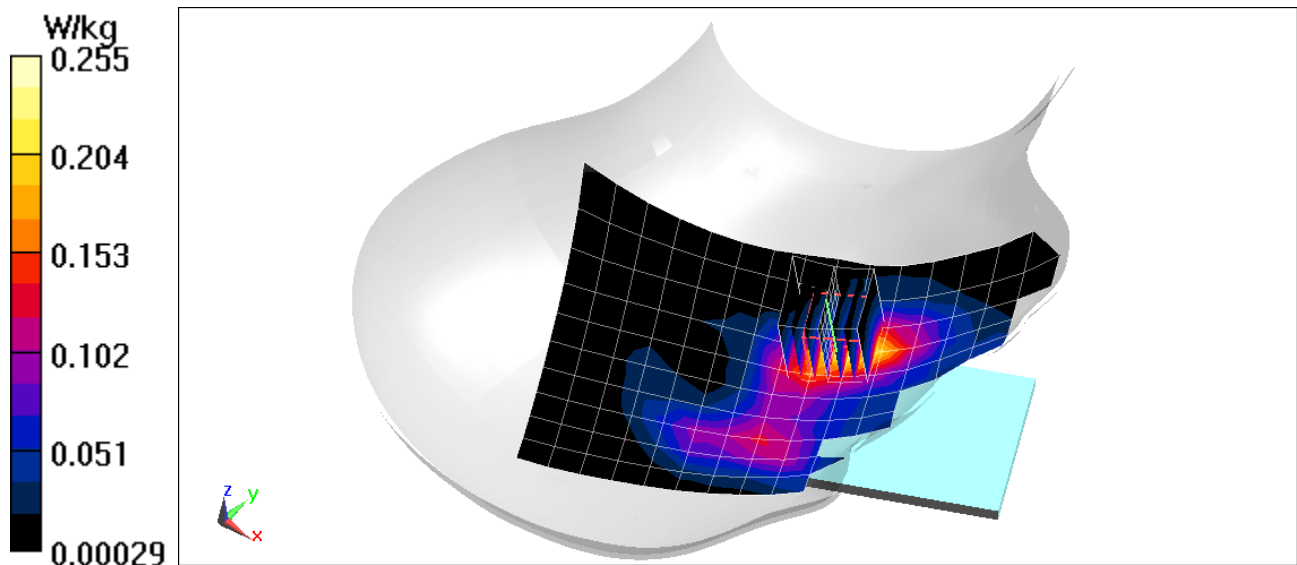

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, _LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2560 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-29-2019; Ambient Temp: 24.4°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(6.25, 6.25, 6.25) @ 2560 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 7, Left Head, Cheek, High.ch, QPSK,
20 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.45 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.164 W/kg

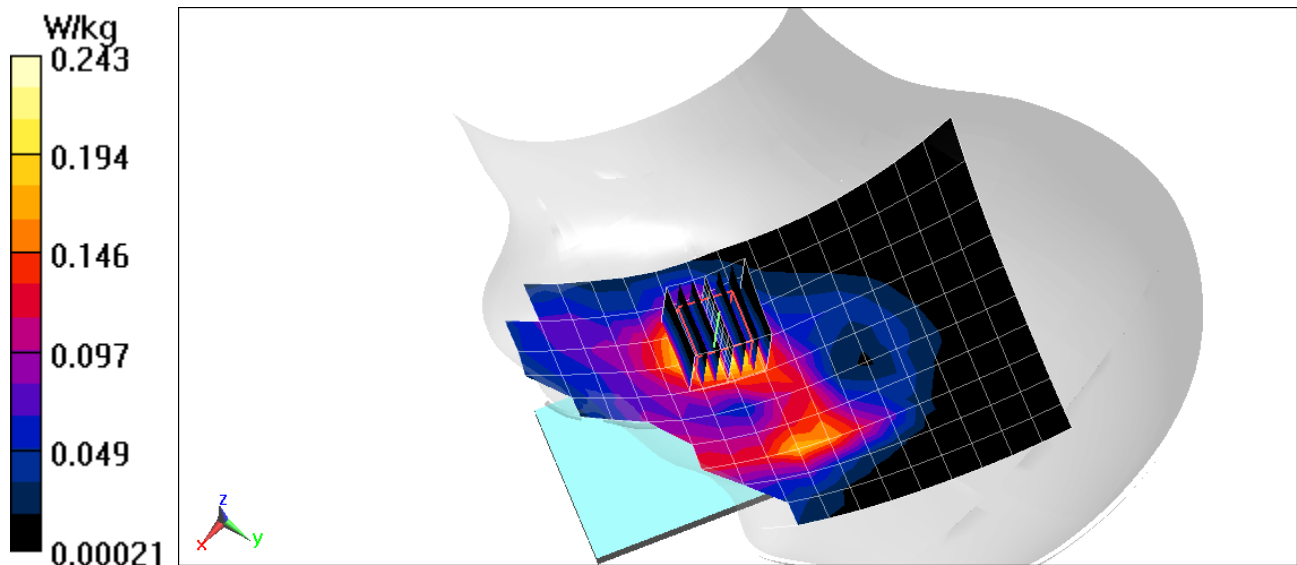

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2549.5 MHz; Duty Cycle: 1:2.31

Medium: 2450 Head Medium parameters used:

$f = 2550$ MHz; $\sigma = 1.867$ S/m; $\epsilon_r = 38.672$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 04-29-2019; Ambient Temp: 24.4°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(6.25, 6.25, 6.25) @ 2549.5 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41 PC2, Right Head, Cheek, Low-Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.577 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.147 W/kg

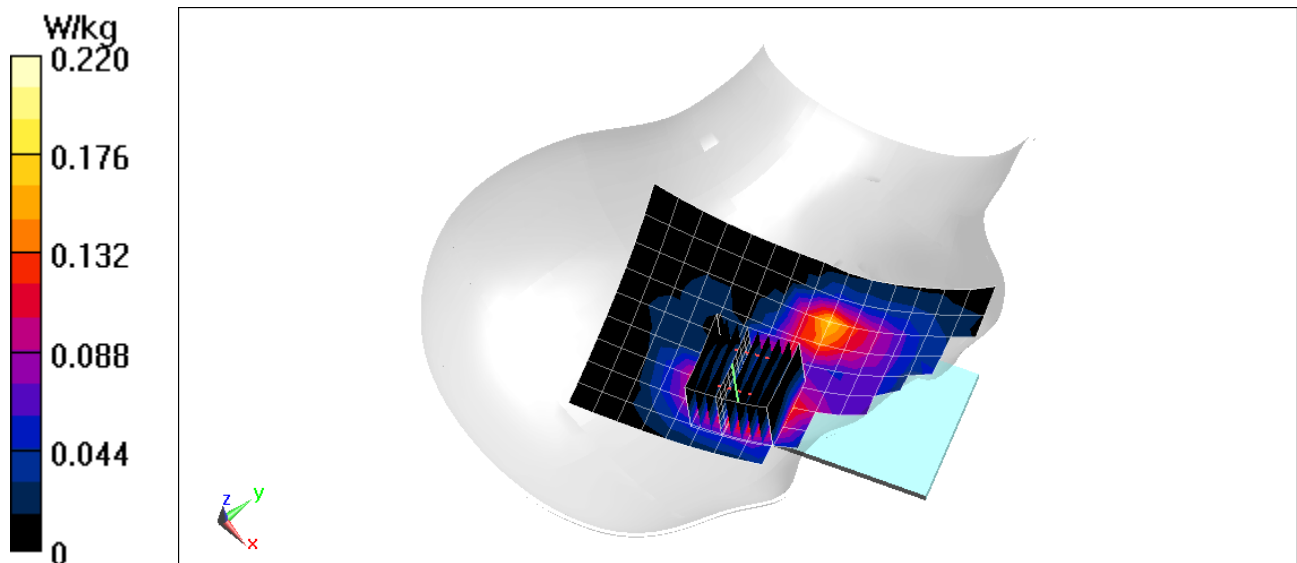

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 05664

Communication System: UID 0, _IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 1.791 \text{ S/m}$; $\epsilon_r = 37.828$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-29-2019; Ambient Temp: 20.1°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7308; ConvF(7.45, 7.45, 7.45) @ 2412 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Right Head, Cheek, Ch 01, 1 Mbps


Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.120 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.121 W/kg

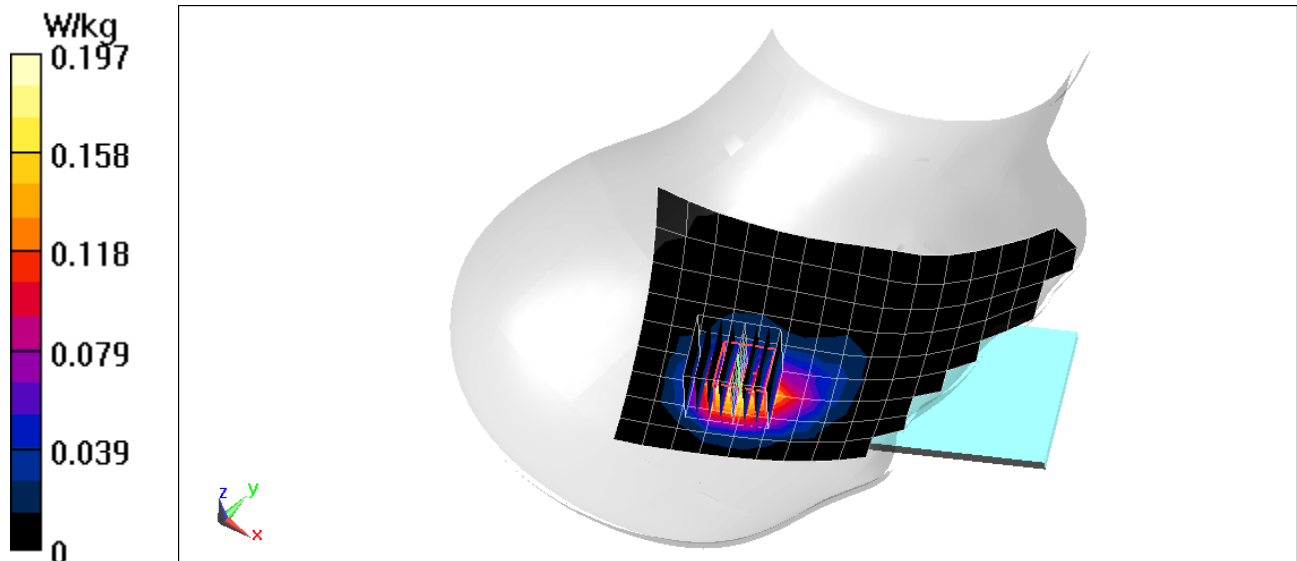

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 05664

Communication System: UID 0, _IEEE 802.11n; Frequency: 5630 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used (interpolated):

$f = 5630 \text{ MHz}$; $\sigma = 5.087 \text{ S/m}$; $\epsilon_r = 35.346$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-07-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7409; ConvF(4.77, 4.77, 4.77) @ 5630 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11n, U-NII-2C, 40 MHz Bandwidth,
Right Head, Tilt, Ch 126, 13.5 Mbps**


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (25x25x7)/Cube 0: Measurement grid: $dx=1\text{mm}$, $dy=1\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 2.615 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.334 W/kg

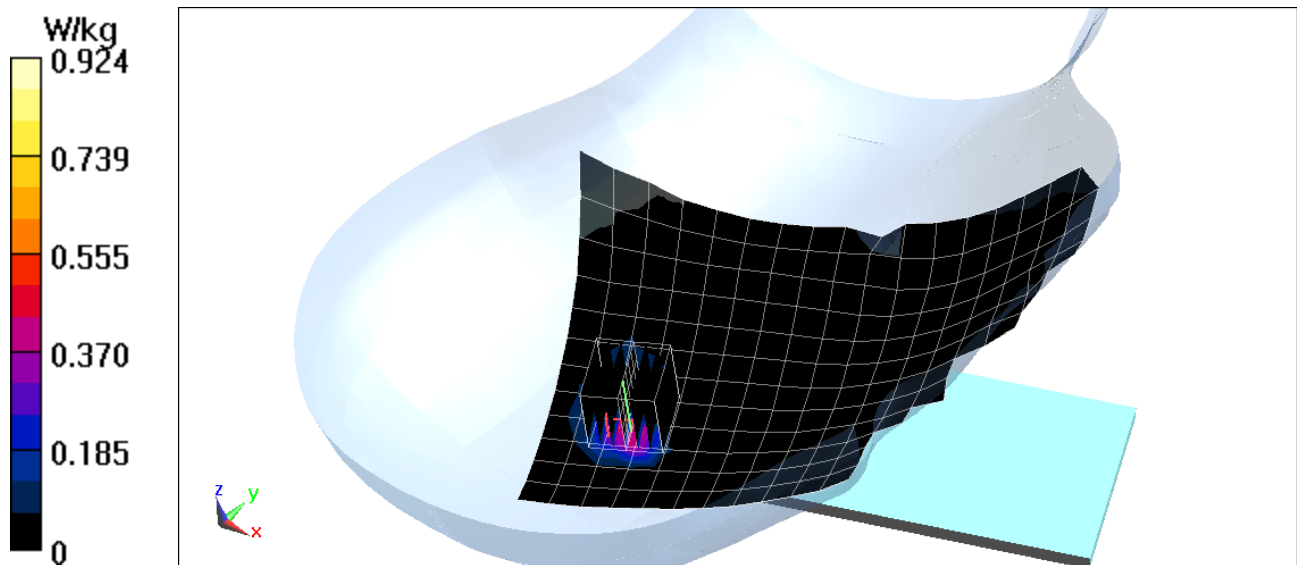

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10264

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.293$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-06-2019; Ambient Temp: 20.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 820.1 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.90 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.349 W/kg

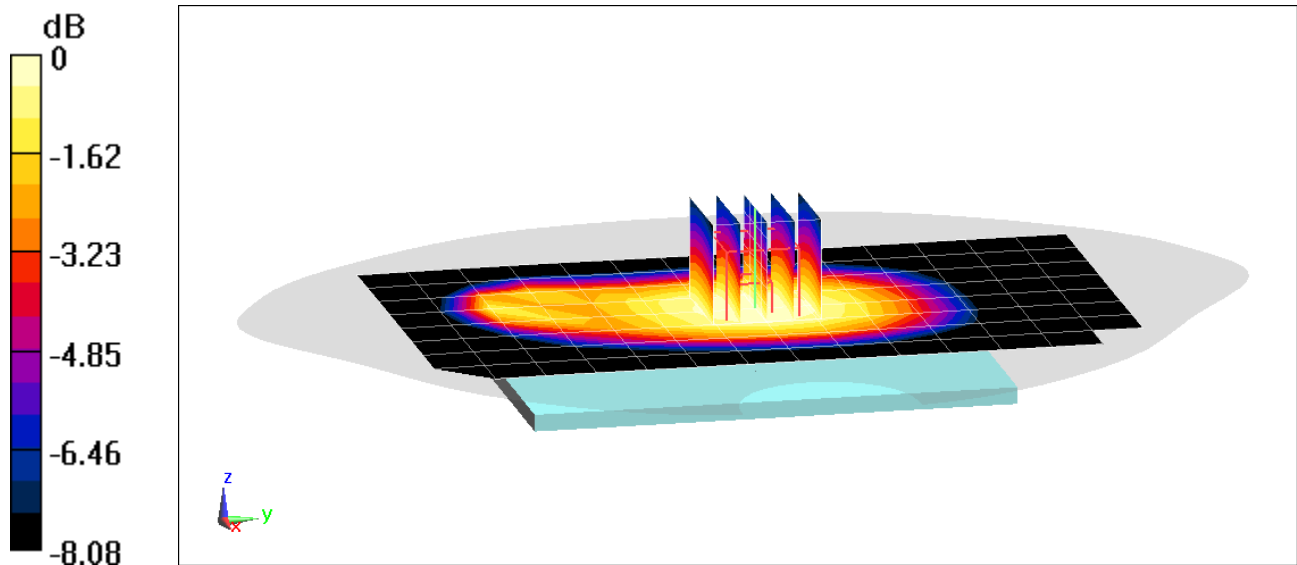

0 dB = 0.429 W/kg = -3.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10264

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.293$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 5-6-2019; Ambient Temp: 20.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 820.1 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: Cell. EVDO BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.53 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.410 W/kg

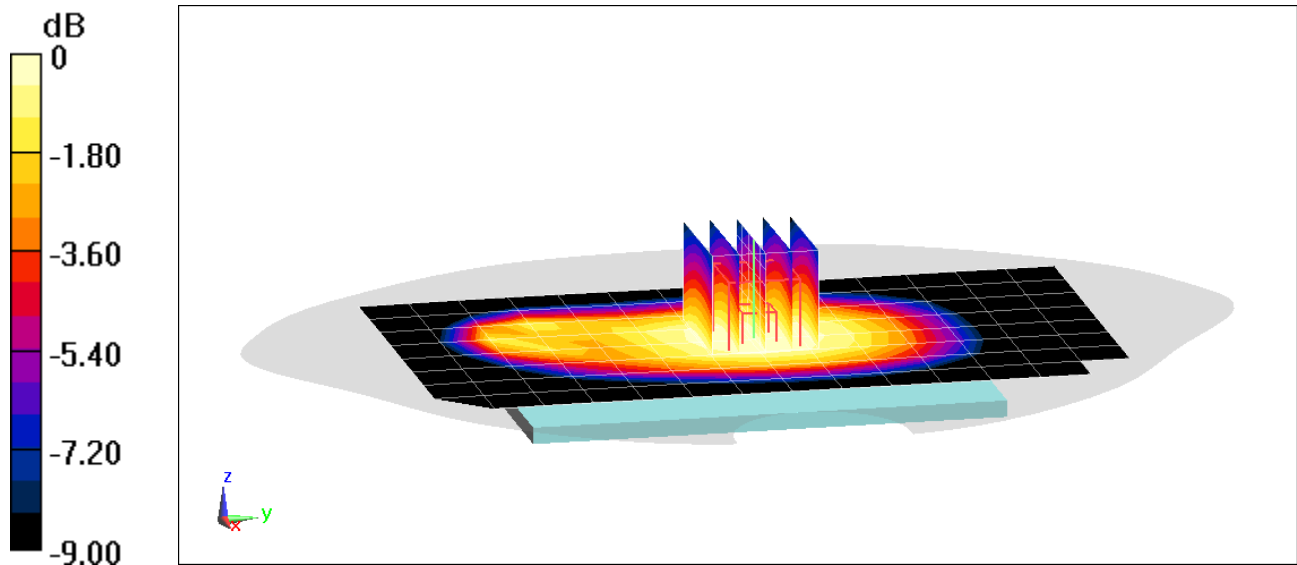

0 dB = 0.495 W/kg = -3.05 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10264

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 53.241$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 5-6-2019; Ambient Temp: 20.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 836.52 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: Cell. CDMA BC0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.81 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.383 W/kg

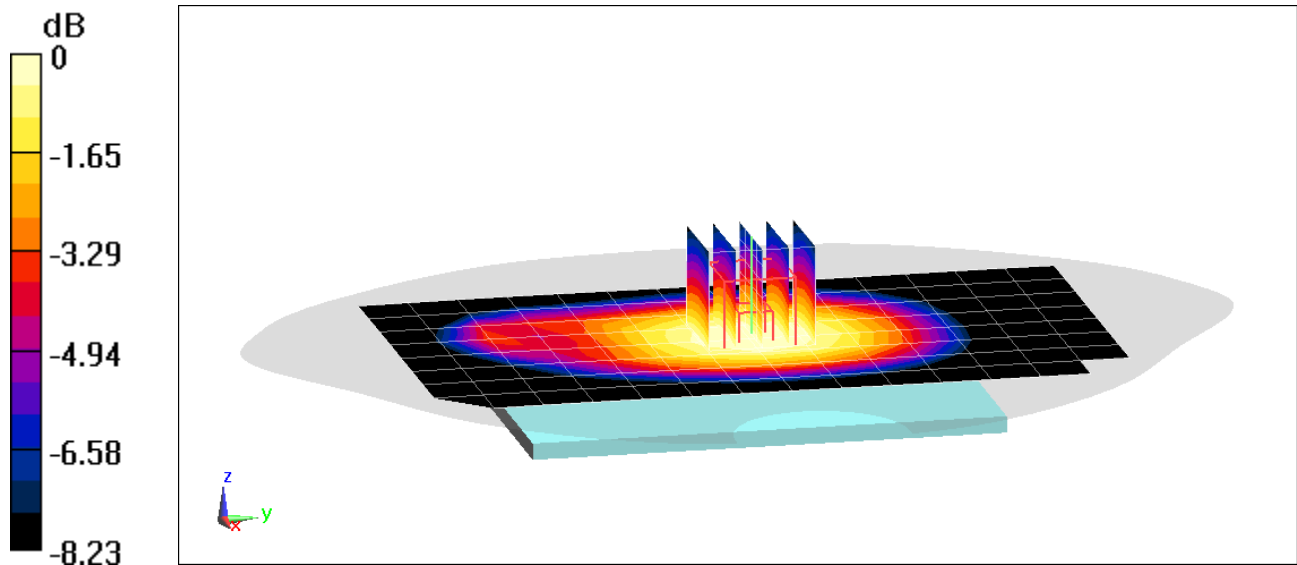

0 dB = 0.467 W/kg = -3.31 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10264

Communication System: UID 0, CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 824.7 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 5-6-2019; Ambient Temp: 20.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 824.7 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: Cell. EVDO BC0, Body SAR, Right Edge, Low.ch


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.24 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.356 W/kg

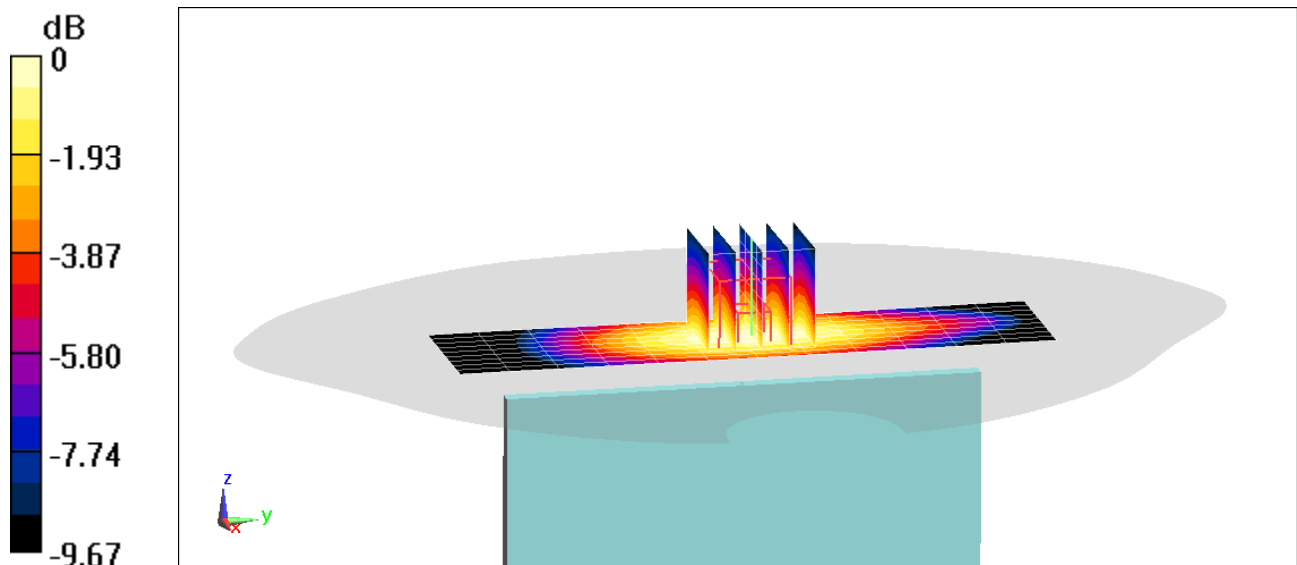

0 dB = 0.466 W/kg = -3.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ S/m}$; $\epsilon_r = 53.108$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-29-2019; Ambient Temp: 21.6 °C; Tissue Temp: 21.2 °C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.91 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.247 W/kg

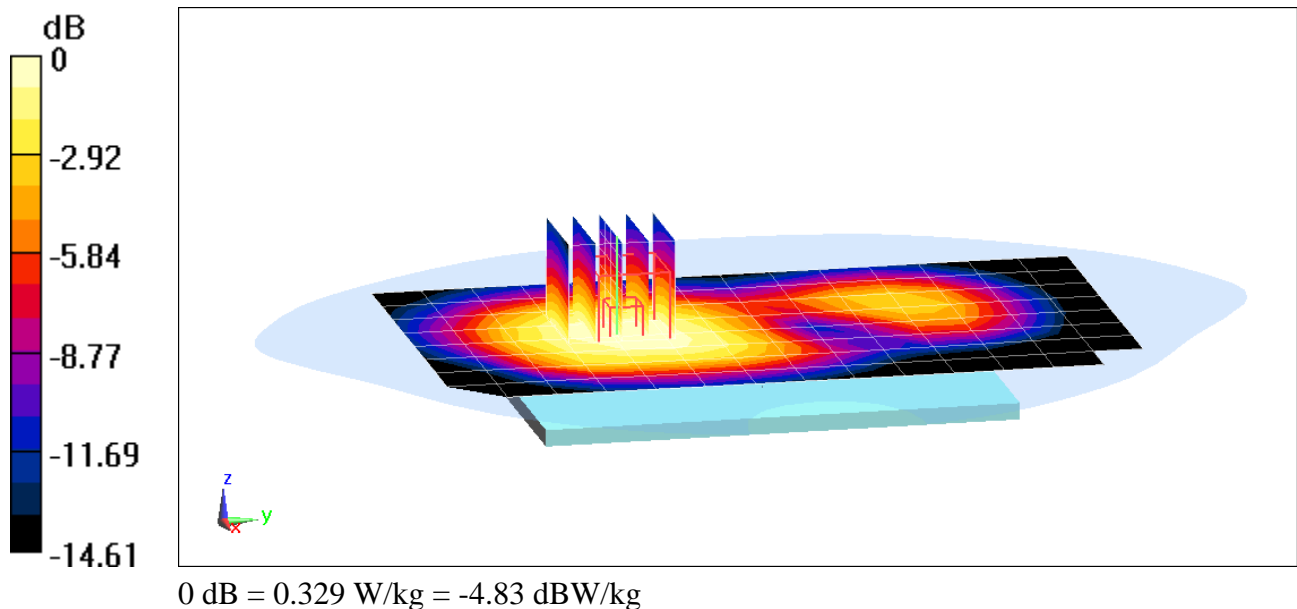

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ S/m}$; $\epsilon_r = 53.108$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-29-2019; Ambient Temp: 21.6 °C; Tissue Temp: 21.2 °C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: PCS EVDO, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.70 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.275 W/kg

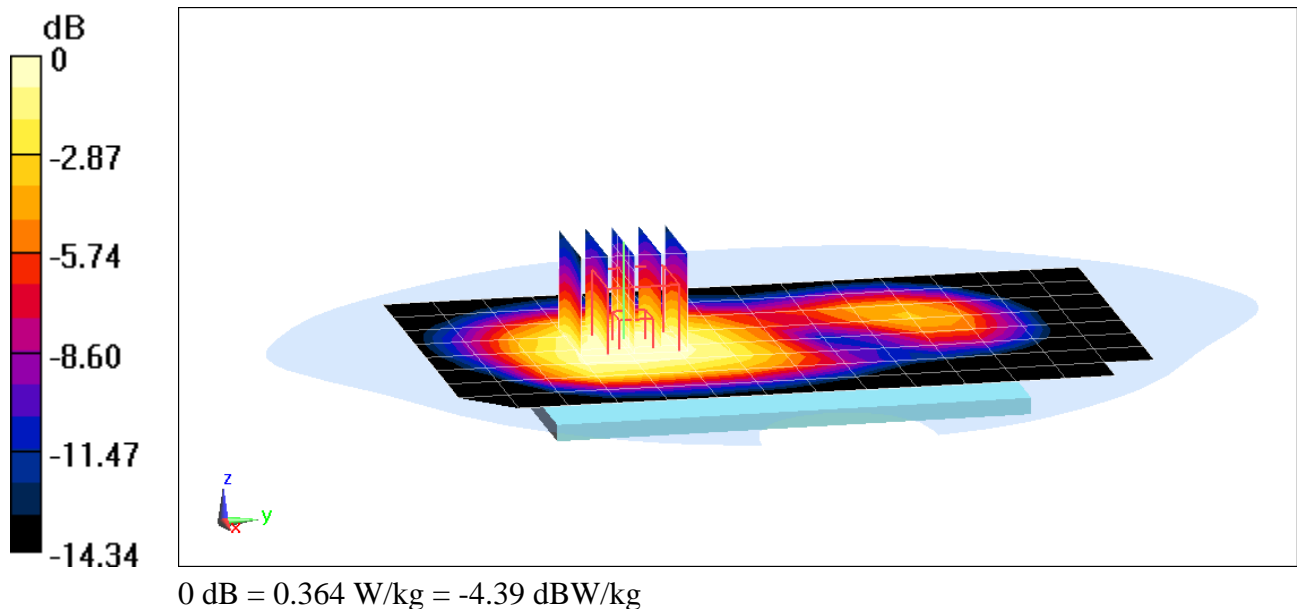

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 52.819$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 836.6 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 850, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.02 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.248 W/kg

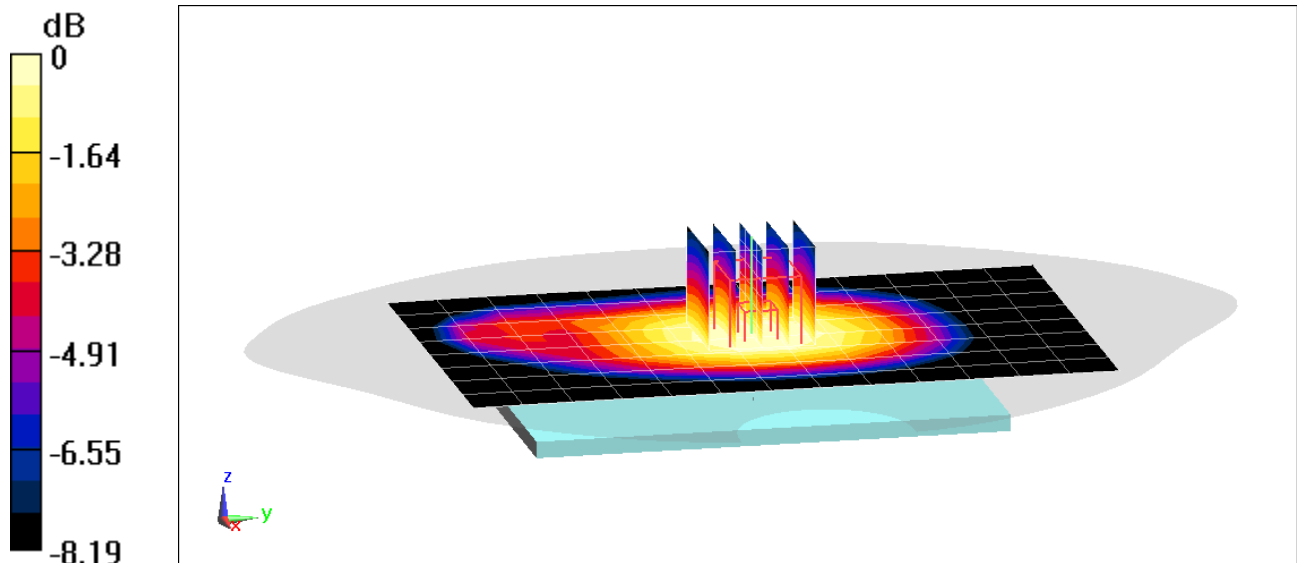

0 dB = 0.303 W/kg = -5.19 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, _GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 52.819$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 836.6 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GPRS 850, Body SAR, Right Edge, Mid.ch, 3 Tx Slots


Area Scan (10x14x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.95 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.251 W/kg

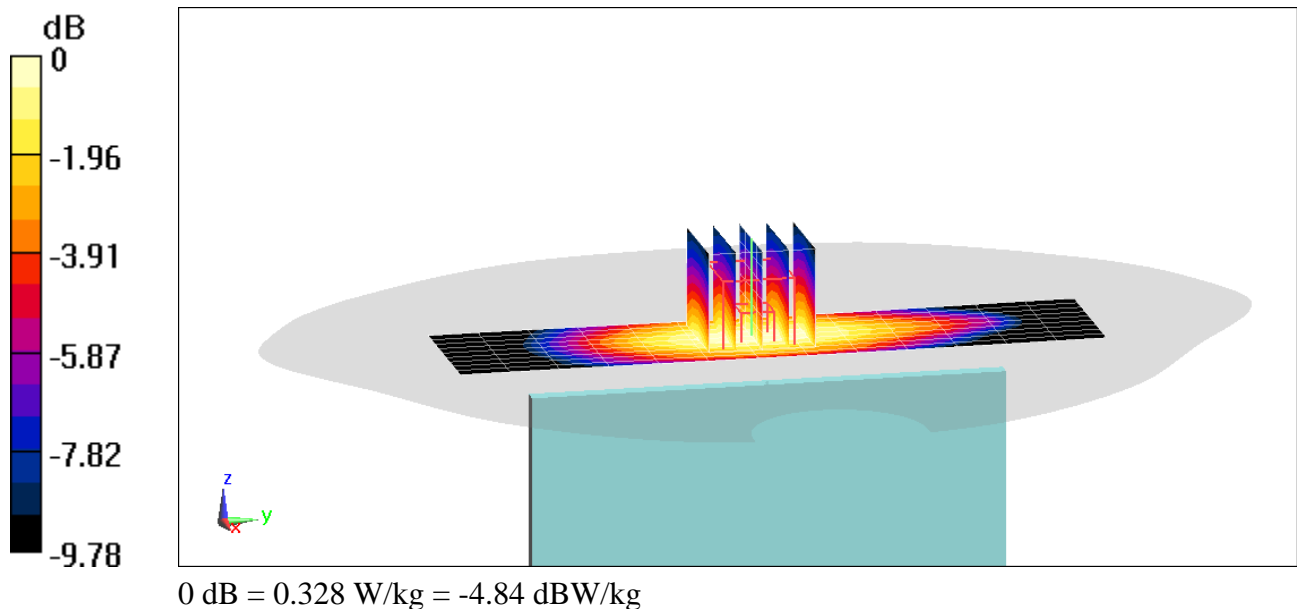

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, _GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1850.2 \text{ MHz}$; $\sigma = 1.504 \text{ S/m}$; $\epsilon_r = 52.382$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-23-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1850.2 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 1900, Body SAR, Back side, Low.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.027 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.116 W/kg

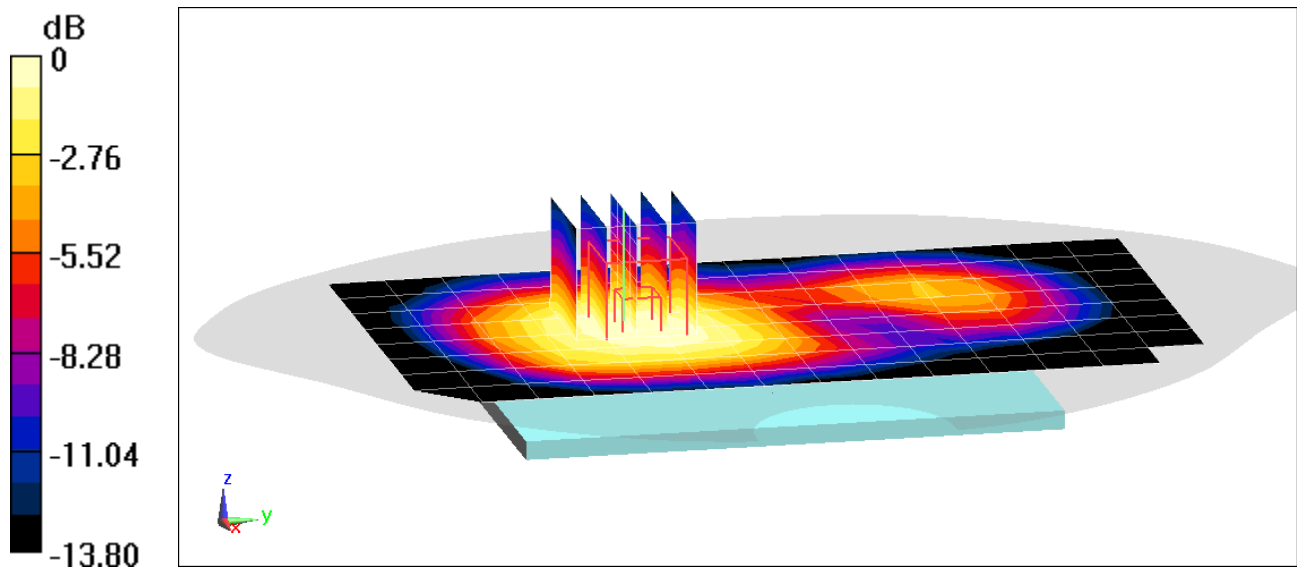

0 dB = 0.155 W/kg = -8.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, _GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.538 \text{ S/m}$; $\epsilon_r = 52.295$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-23-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.45 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.228 W/kg

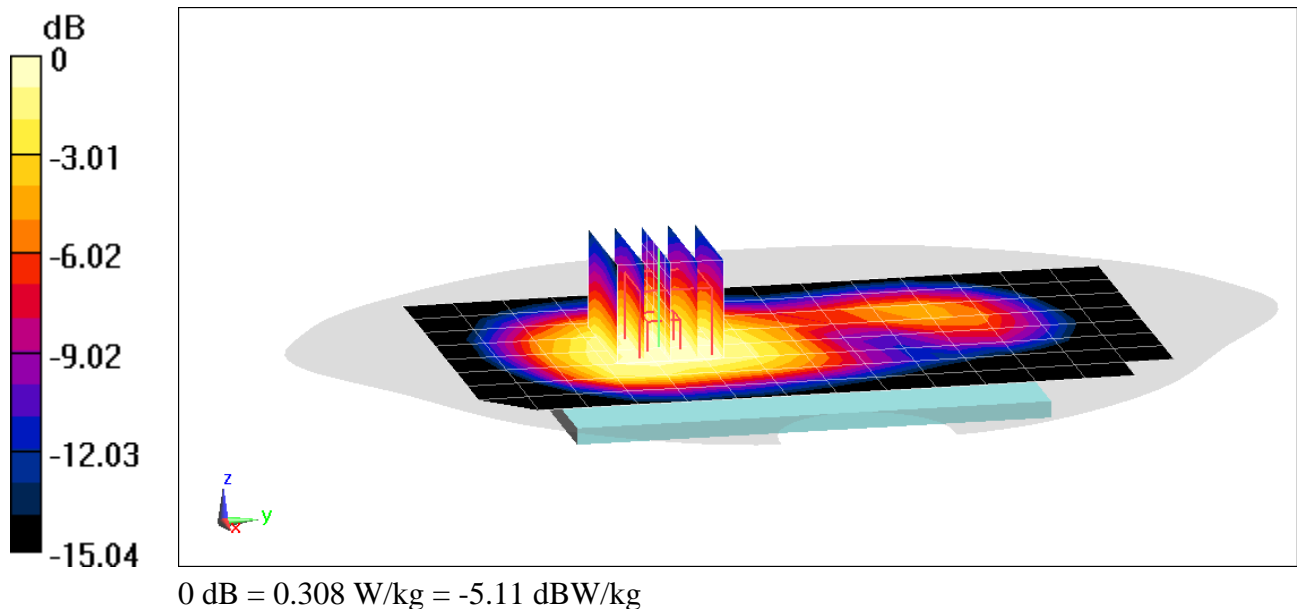

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 52.819$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 836.6 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.37 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.370 W/kg

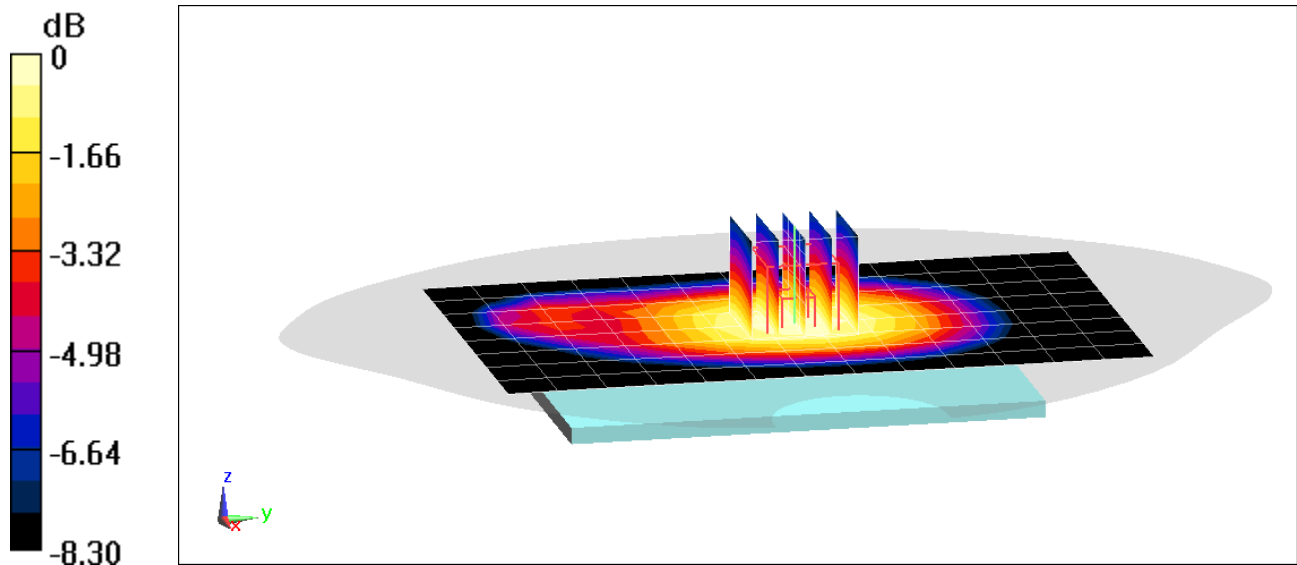

0 dB = 0.452 W/kg = -3.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 52.819$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 836.6 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.81 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.385 W/kg

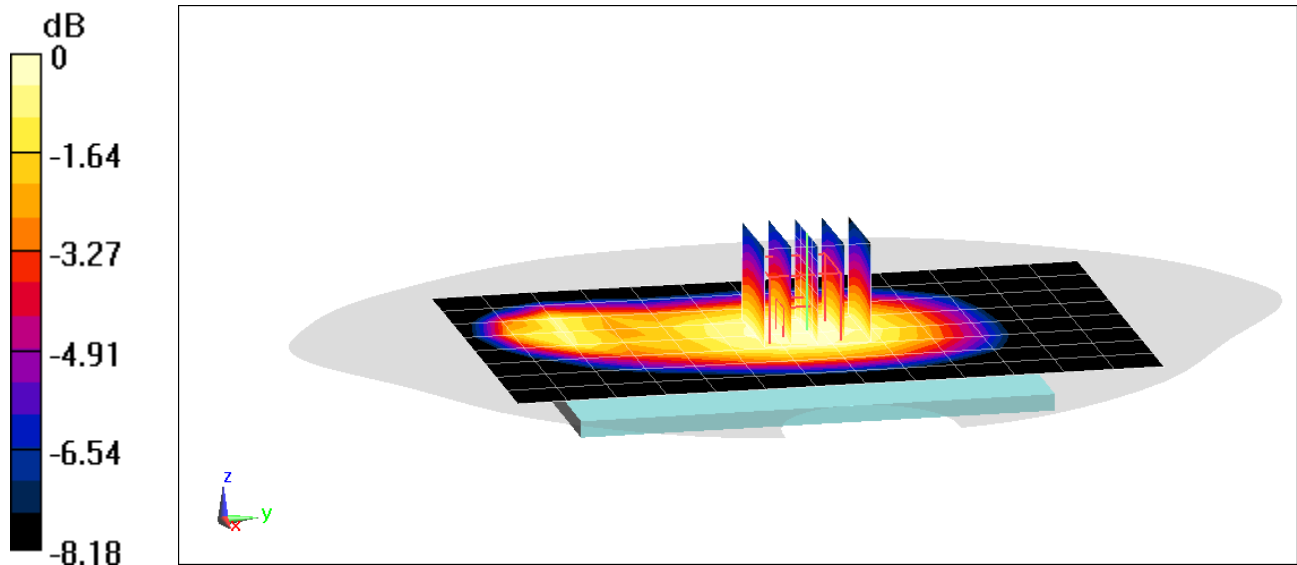

0 dB = 0.468 W/kg = -3.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 52.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(8.68, 8.68, 8.68) @ 1732.4 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.79 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.397 W/kg

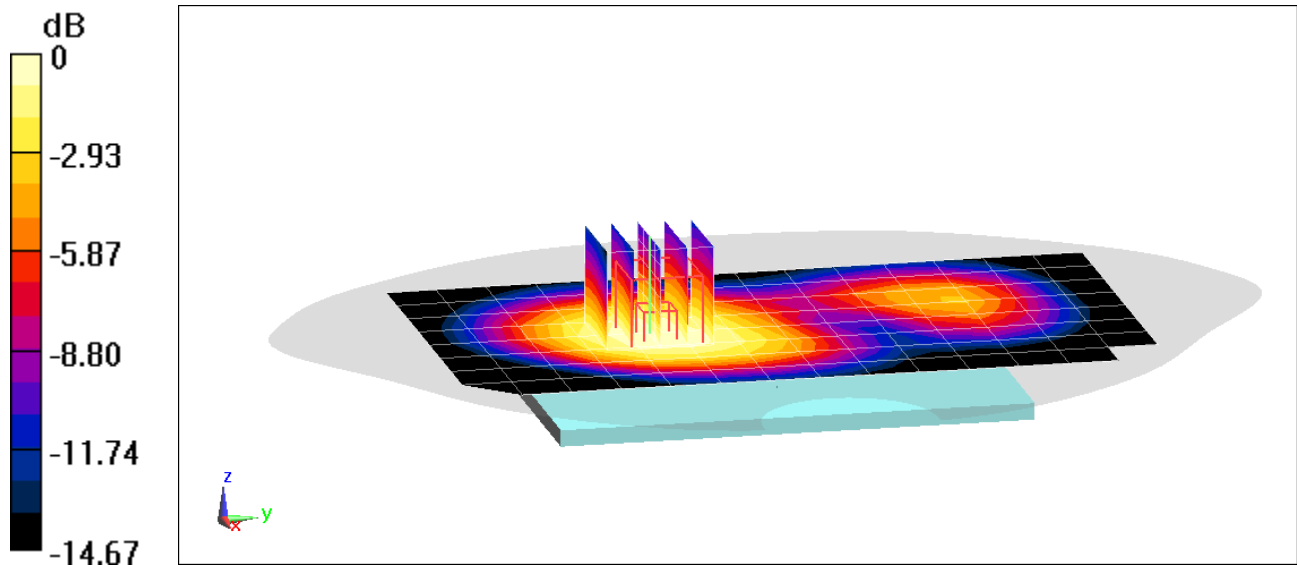

0 dB = 0.531 W/kg = -2.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 52.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(8.68, 8.68, 8.68) @ 1732.4 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.90 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.618 W/kg

SAR(1 g) = 0.402 W/kg

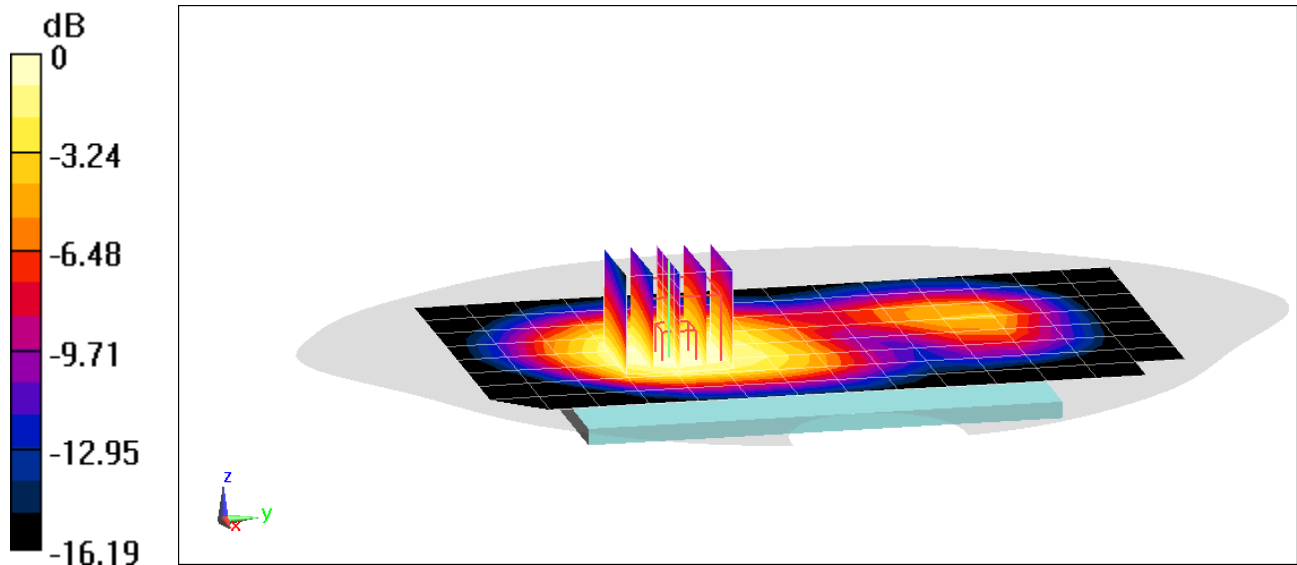

0 dB = 0.538 W/kg = -2.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.549 \text{ S/m}$; $\epsilon_r = 52.679$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-17-2019; Ambient Temp: 21.1°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front 30; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.73 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.279 W/kg

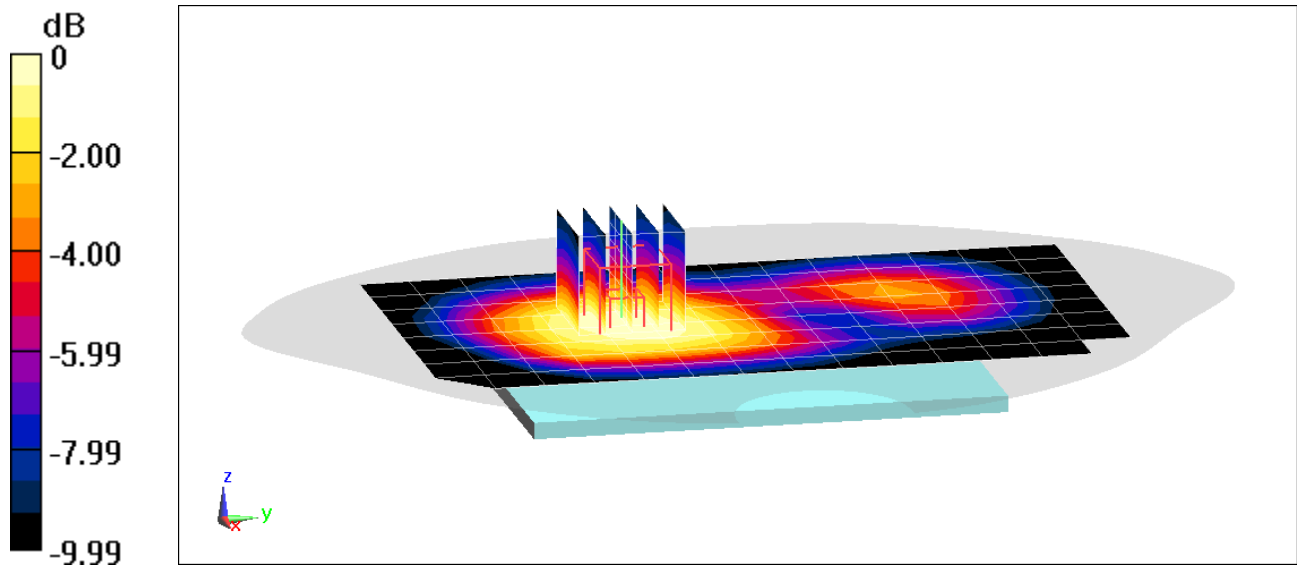

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.549 \text{ S/m}$; $\epsilon_r = 52.679$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2019; Ambient Temp: 21.1°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front 30; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.04 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.500 W/kg

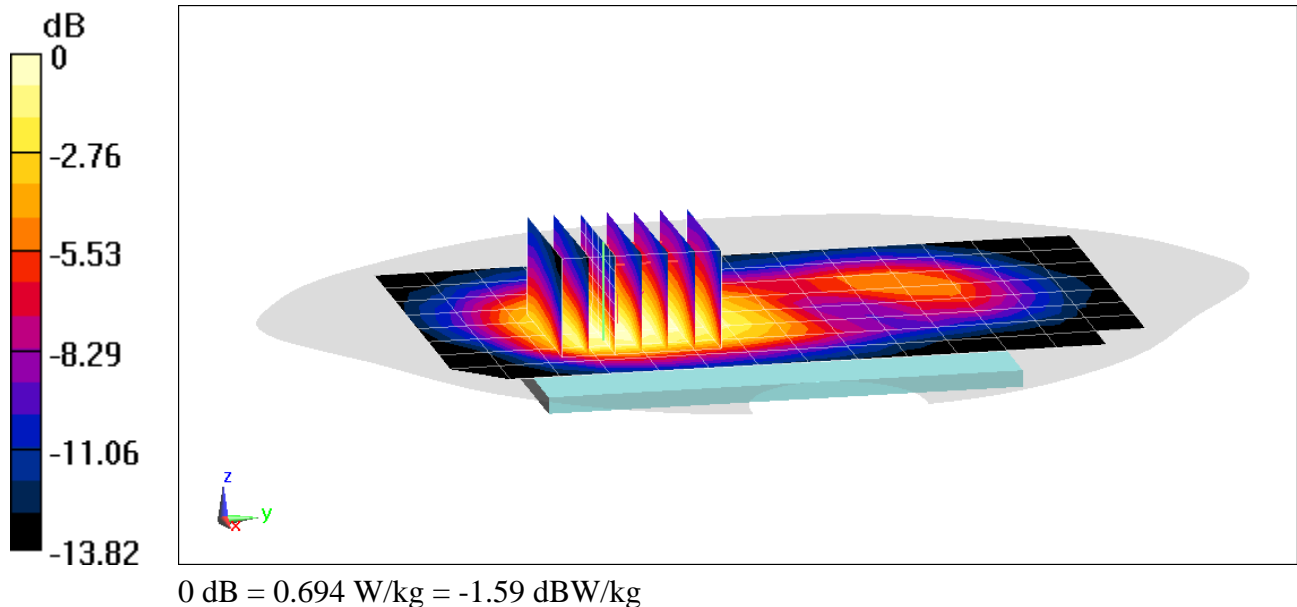

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 54.762$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 680.5 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.29 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.268 W/kg

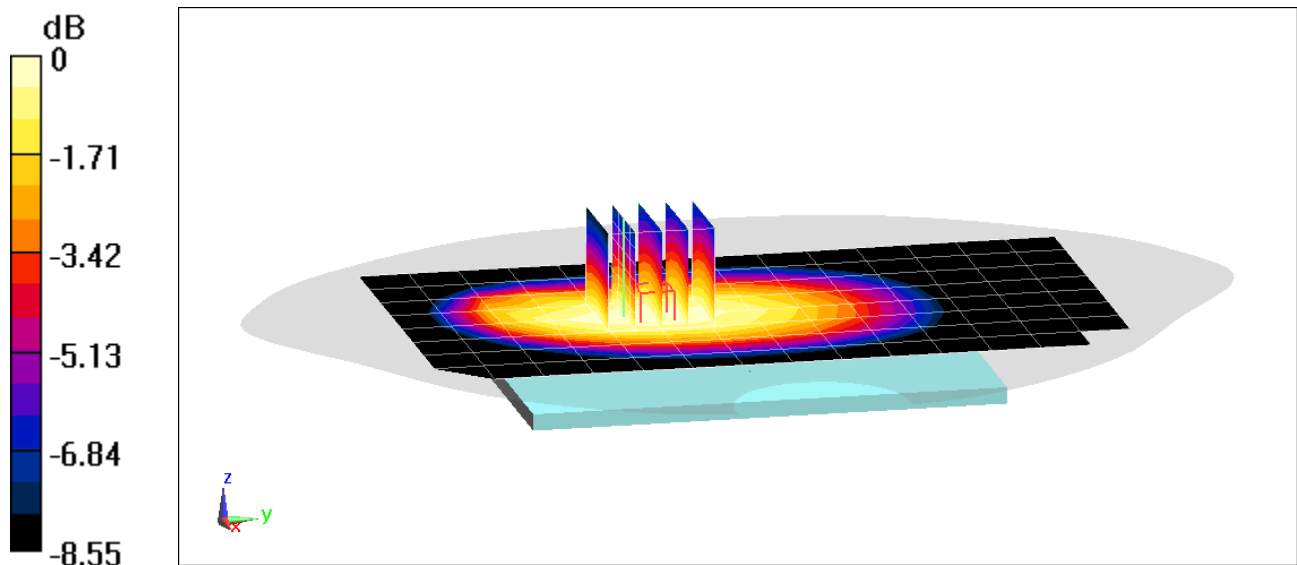

0 dB = 0.324 W/kg = -4.89 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 54.762$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 680.5 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x9x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.90 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.359 W/kg

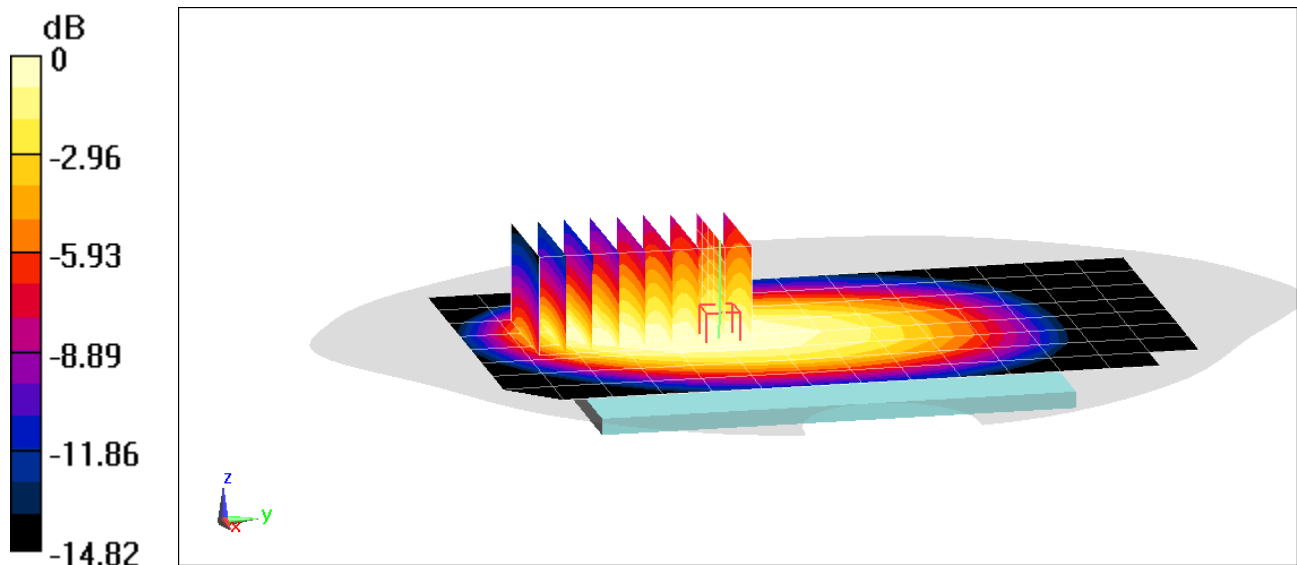

0 dB = 0.431 W/kg = -3.66 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.946 \text{ S/m}$; $\epsilon_r = 54.703$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 707.5 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.13 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.296 W/kg

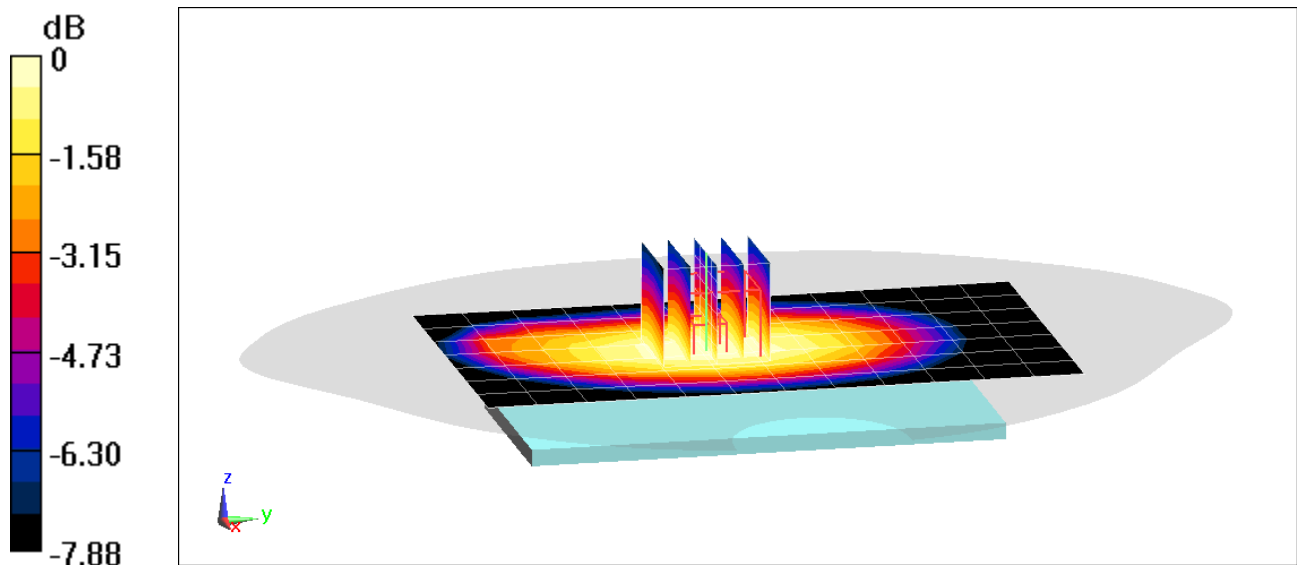

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.946 \text{ S/m}$; $\epsilon_r = 54.703$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 707.5 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.69 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.349 W/kg

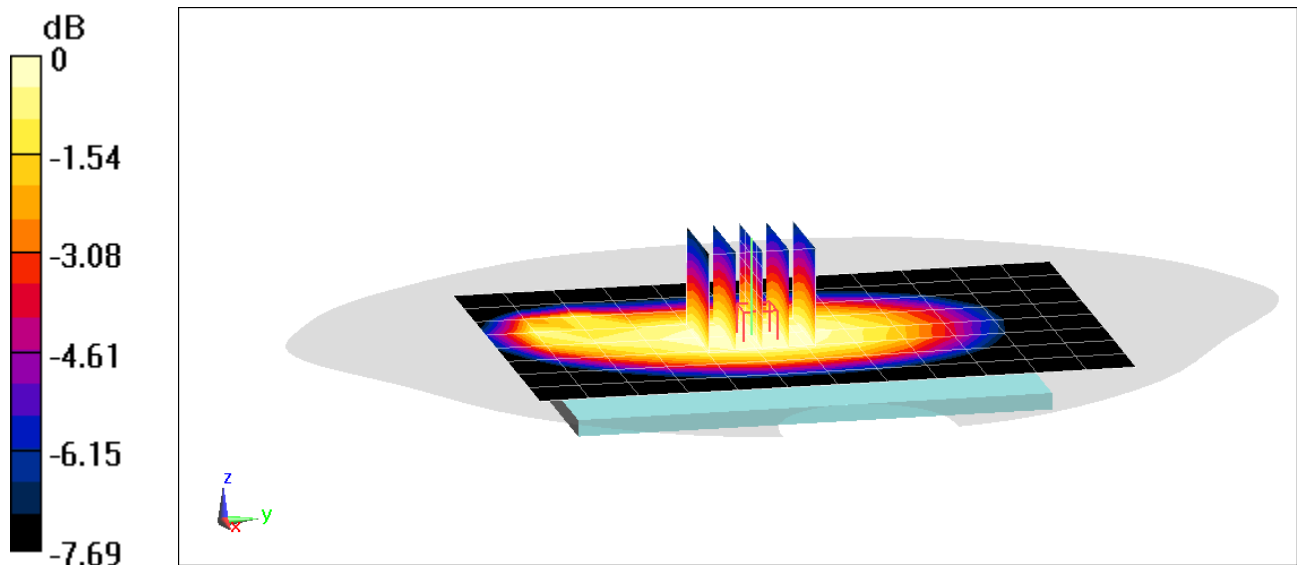

0 dB = 0.412 W/kg = -3.85 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 54.529$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 782 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.02 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.380 W/kg

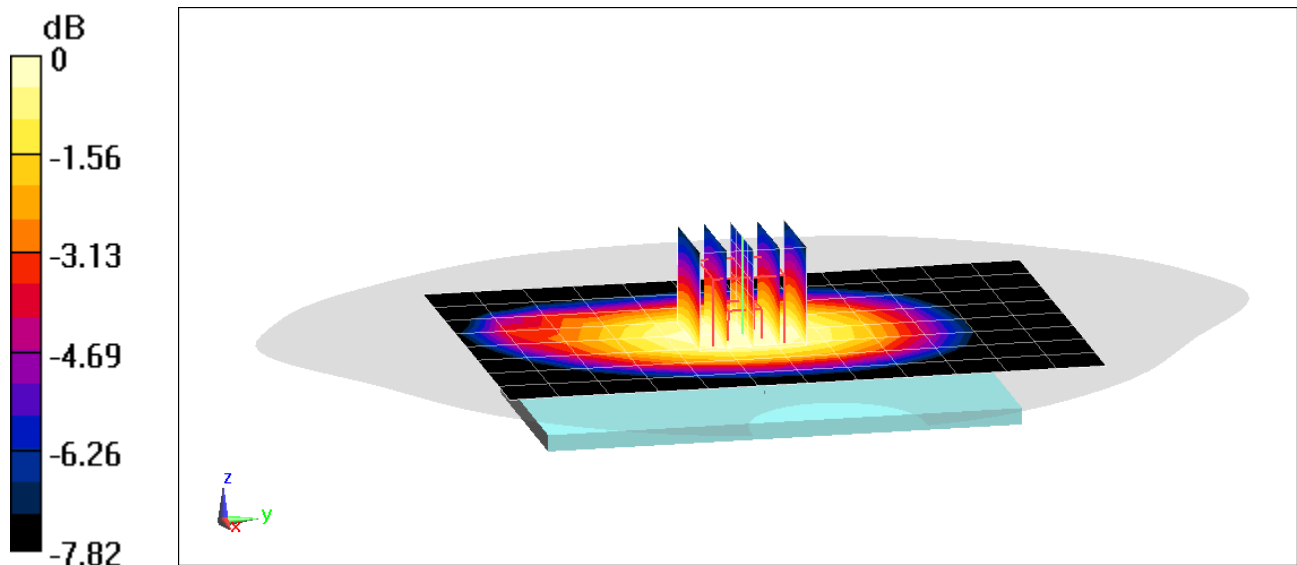

0 dB = 0.457 W/kg = -3.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 54.529$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 782 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.28 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.453 W/kg

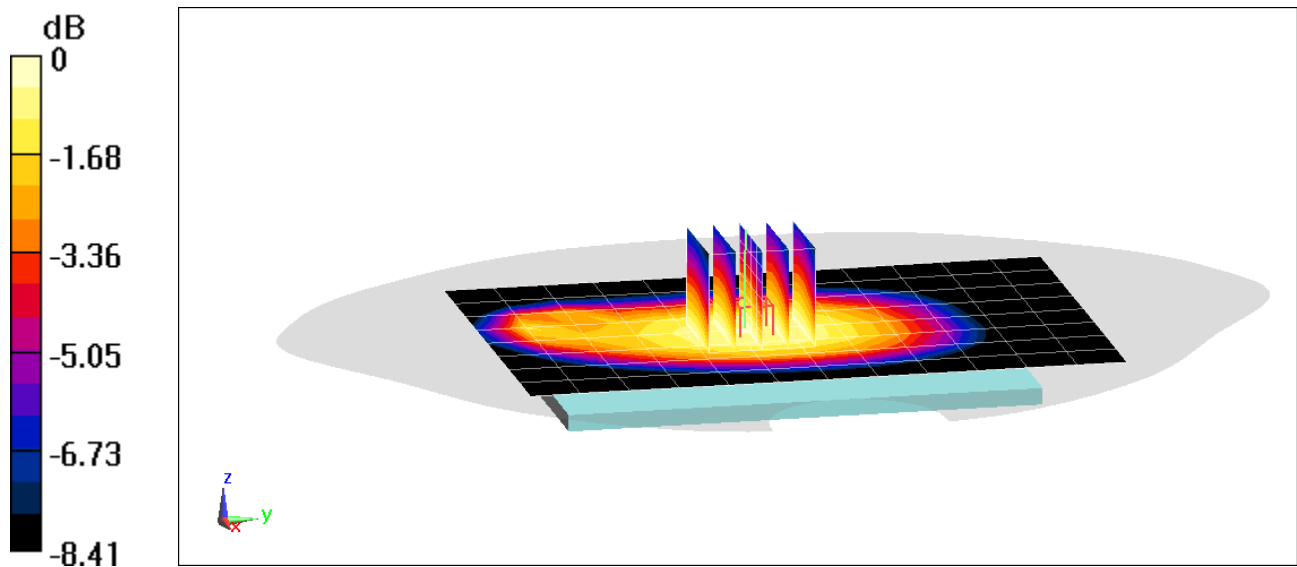

0 dB = 0.531 W/kg = -2.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.978 \text{ S/m}$; $\epsilon_r = 54.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 793 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 14, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.01 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.372 W/kg

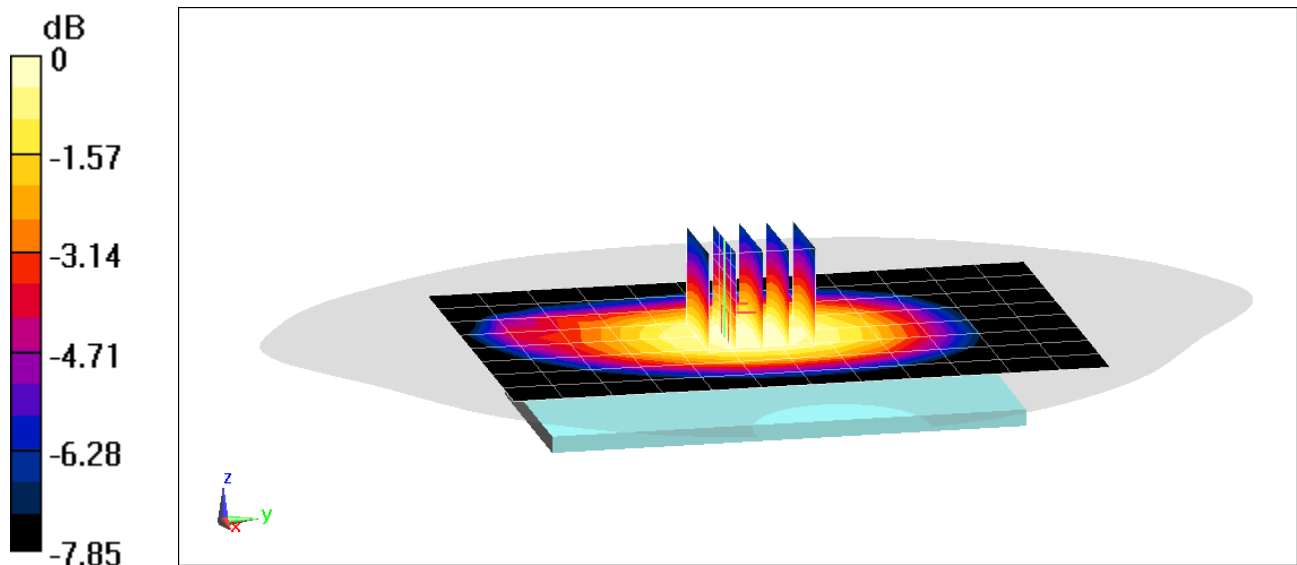

0 dB = 0.444 W/kg = -3.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.978 \text{ S/m}$; $\epsilon_r = 54.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 793 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 14, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.58 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.406 W/kg

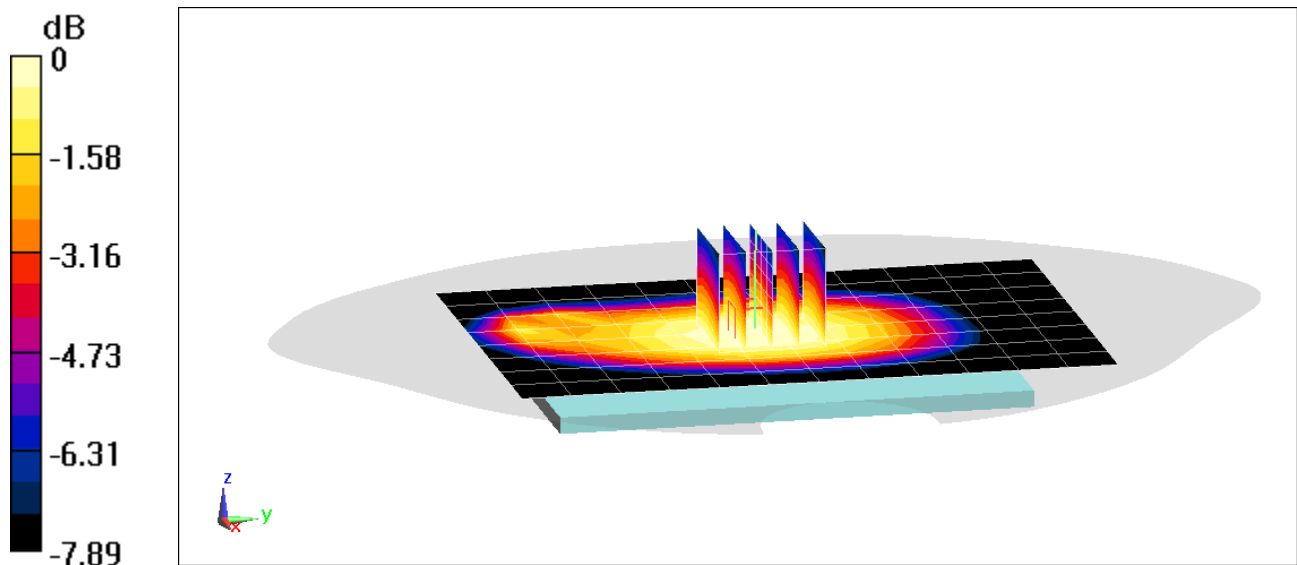

0 dB = 0.476 W/kg = -3.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 52.83$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 831.5 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.22 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.245 W/kg

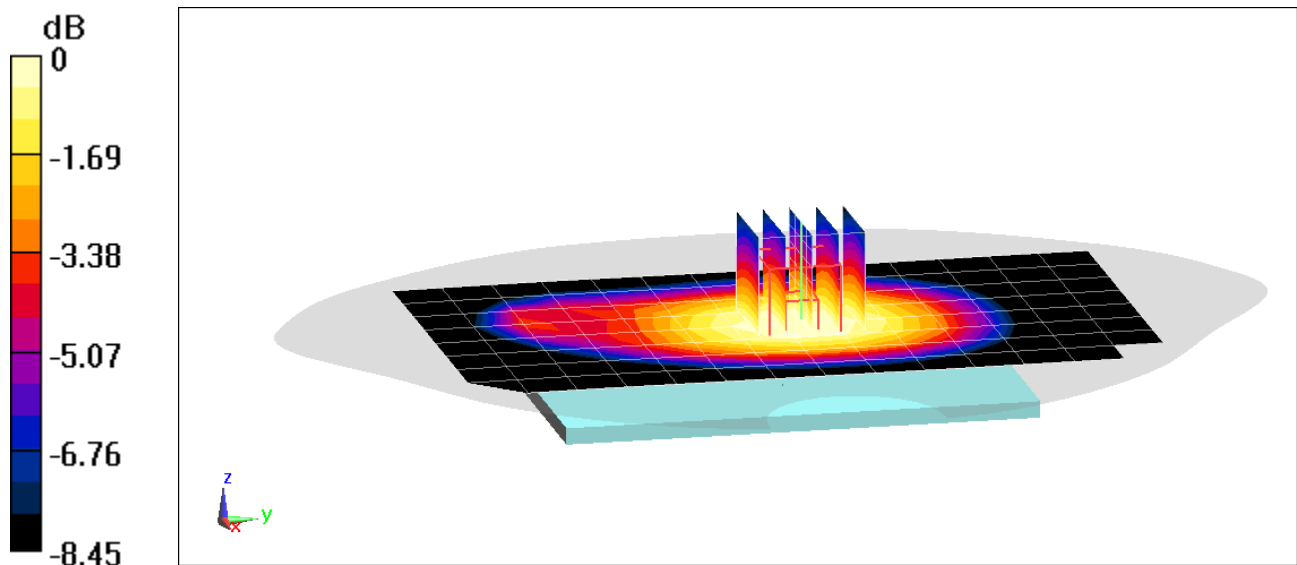

0 dB = 0.299 W/kg = -5.24 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10223

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 52.83$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 831.5 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.32 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.295 W/kg

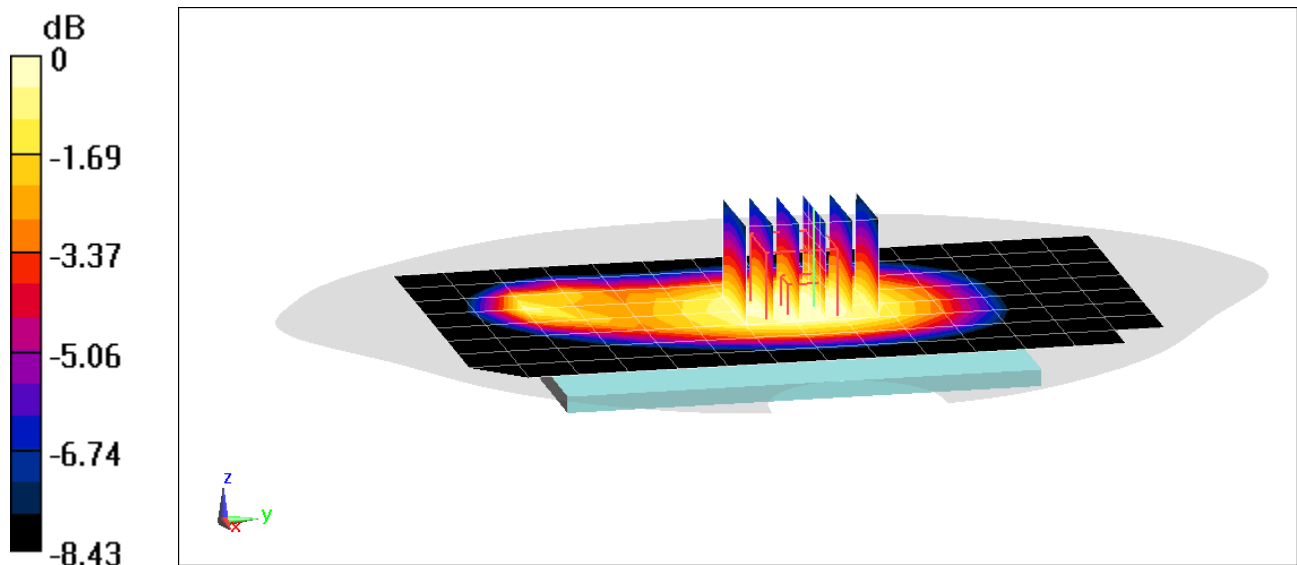

0 dB = 0.362 W/kg = -4.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.52 \text{ S/m}$; $\epsilon_r = 52.073$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(8.68, 8.68, 8.68) @ 1770 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.86 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.414 W/kg

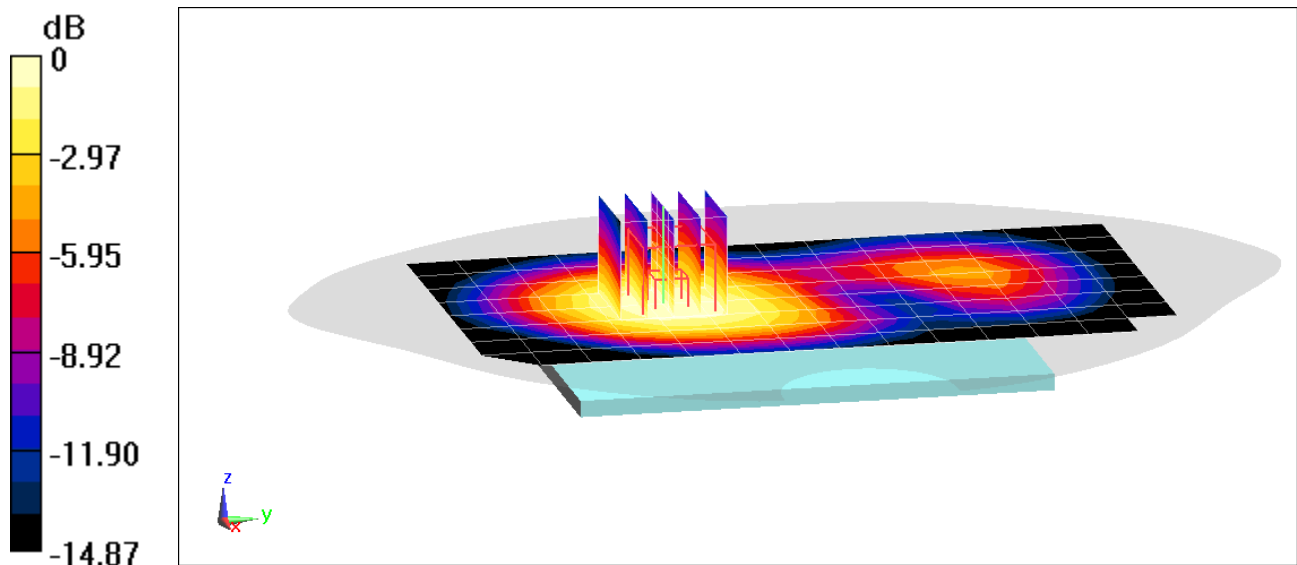

0 dB = 0.551 W/kg = -2.59 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1745 \text{ MHz}$; $\sigma = 1.501 \text{ S/m}$; $\epsilon_r = 52.114$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(8.68, 8.68, 8.68) @ 1745 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.07 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.415 W/kg

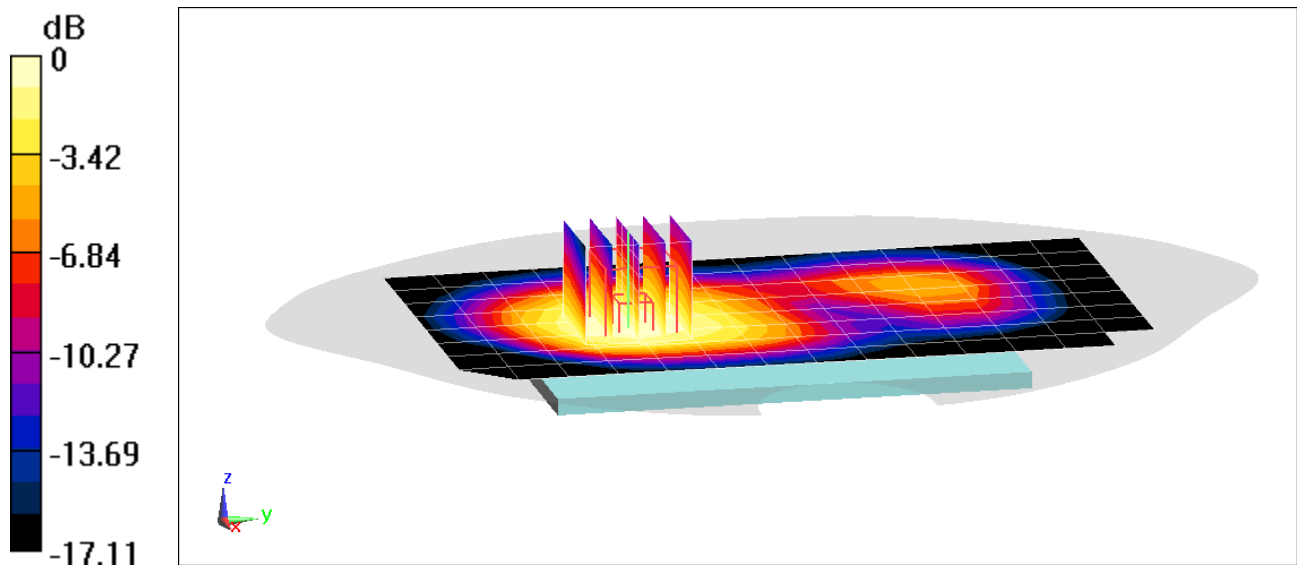

0 dB = 0.553 W/kg = -2.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.584 \text{ S/m}$; $\epsilon_r = 52.346$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-01-2019; Ambient Temp: 23.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1905 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.93 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.288 W/kg

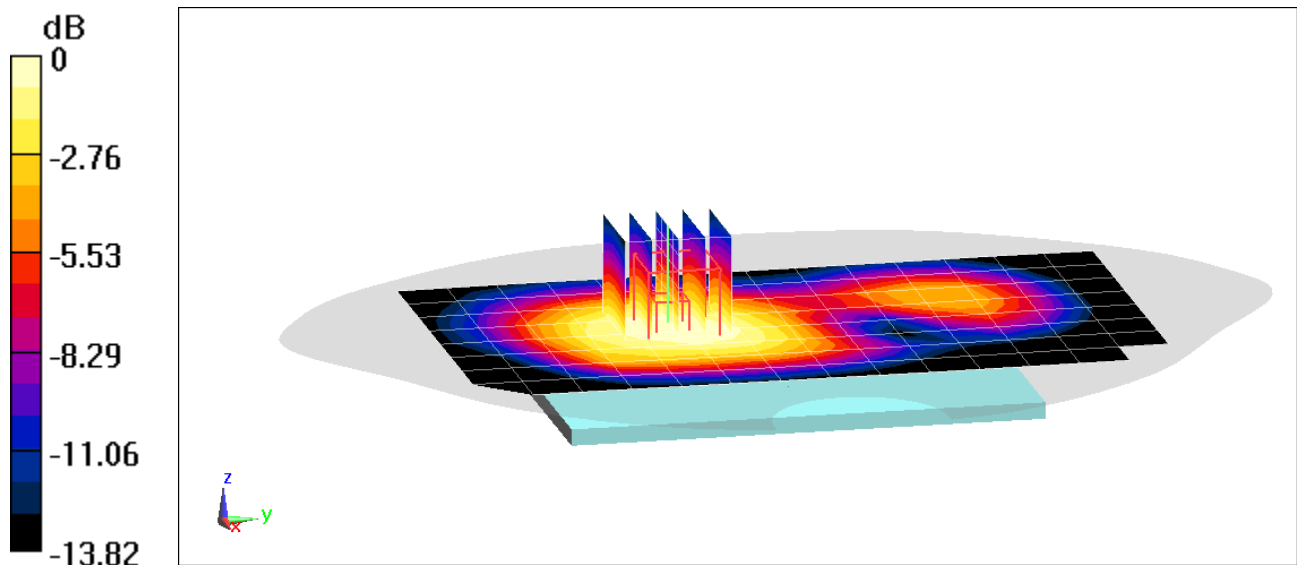

0 dB = 0.389 W/kg = -4.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.536 \text{ S/m}$; $\epsilon_r = 52.498$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-01-2019; Ambient Temp: 23.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1860 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.36 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.346 W/kg

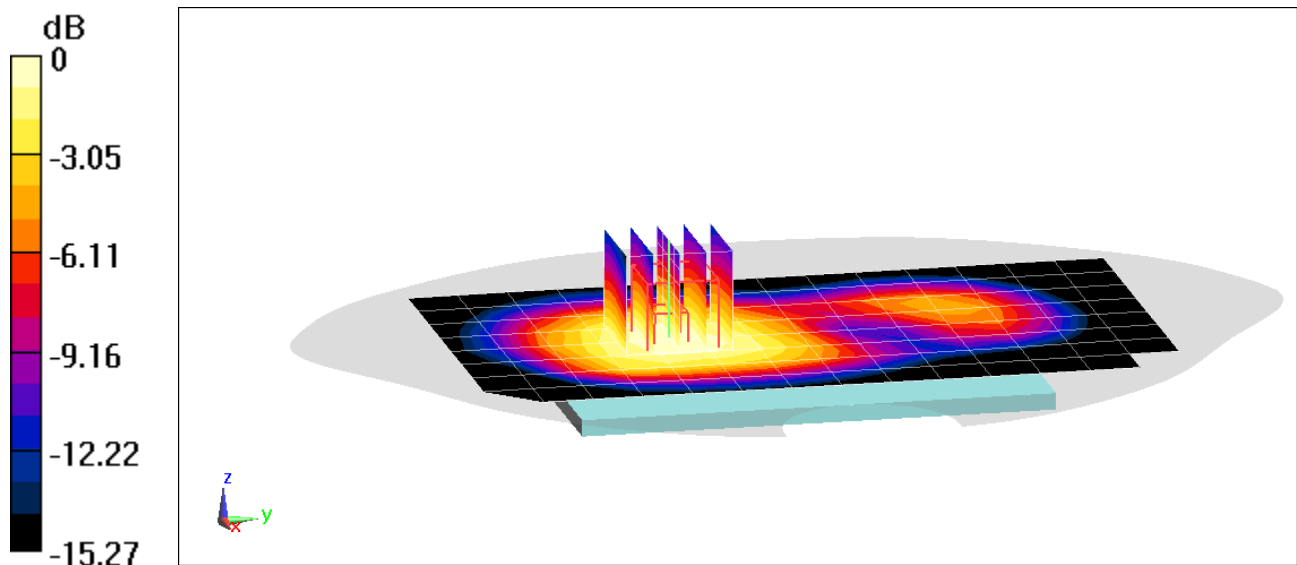

0 dB = 0.464 W/kg = -3.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.904 \text{ S/m}$; $\epsilon_r = 52.647$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.73, 7.73, 7.73) @ 2310 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 30, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.17 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.253 W/kg

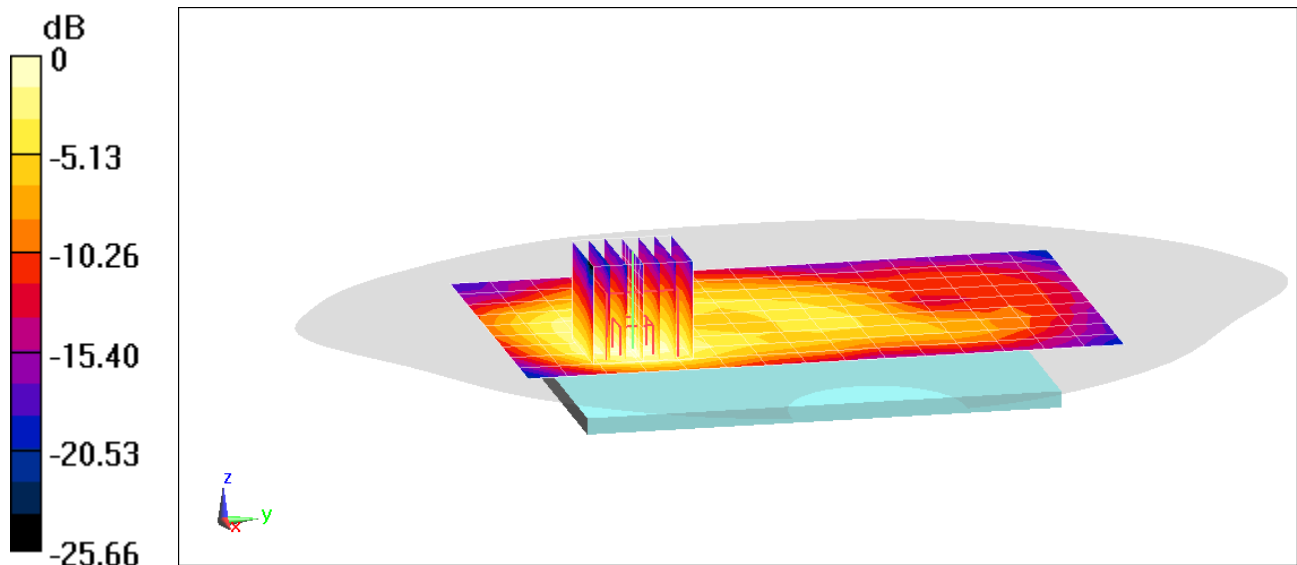

0 dB = 0.402 W/kg = -3.96 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.904 \text{ S/m}$; $\epsilon_r = 52.647$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.73, 7.73, 7.73) @ 2310 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 30, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.932 W/kg

SAR(1 g) = 0.424 W/kg

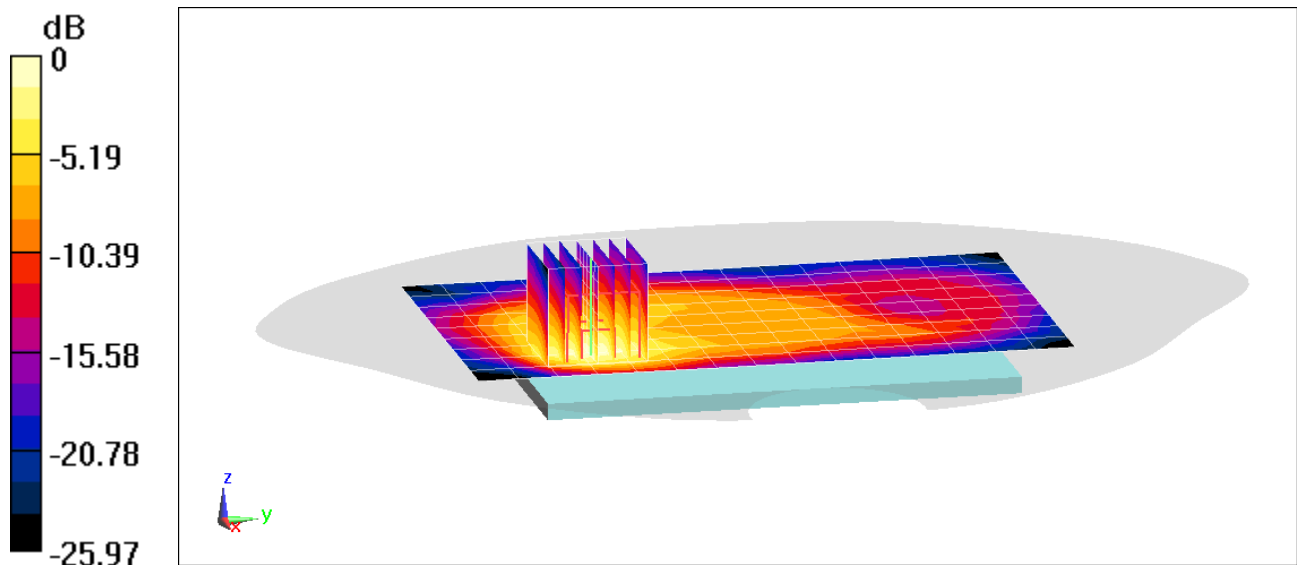

0 dB = 0.711 W/kg = -1.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2560 \text{ MHz}$; $\sigma = 2.131 \text{ S/m}$; $\epsilon_r = 52.241$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.4, 7.4, 7.4) @ 2560 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 7, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.73 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.363 W/kg

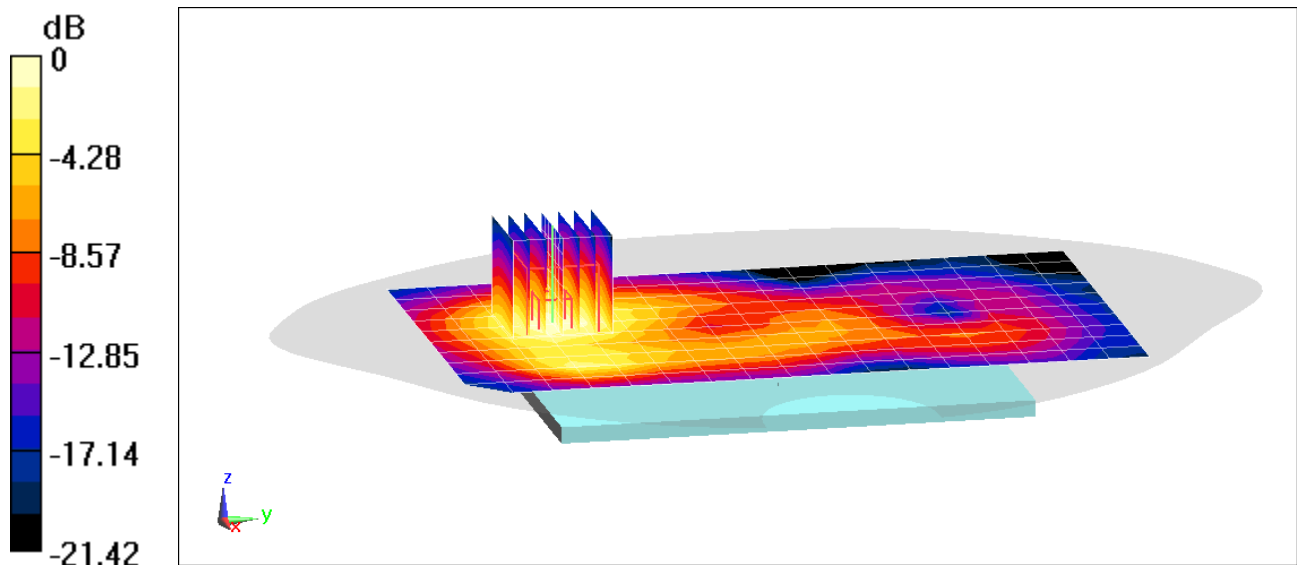

0 dB = 0.566 W/kg = -2.47 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 12692

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$; $\sigma = 2.107 \text{ S/m}$; $\epsilon_r = 52.284$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.4, 7.4, 7.4) @ 2535 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 7, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.20 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.321 W/kg

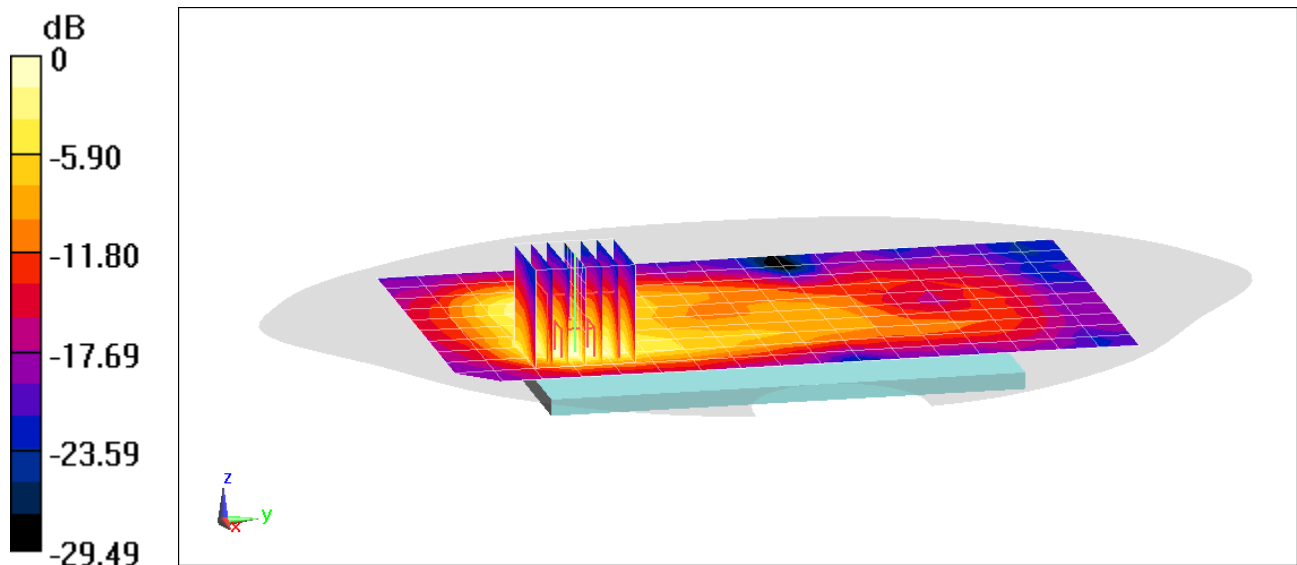

0 dB = 0.588 W/kg = -2.31 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2549.5 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body Medium parameters used:

$f = 2550 \text{ MHz}$; $\sigma = 2.14 \text{ S/m}$; $\epsilon_r = 51.233$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-22-2019; Ambient Temp: 21.1°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7417; ConvF(7.37, 7.37, 7.37) @ 2549.5 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41 PC2, Body SAR, Back side, Low-Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.339 W/kg

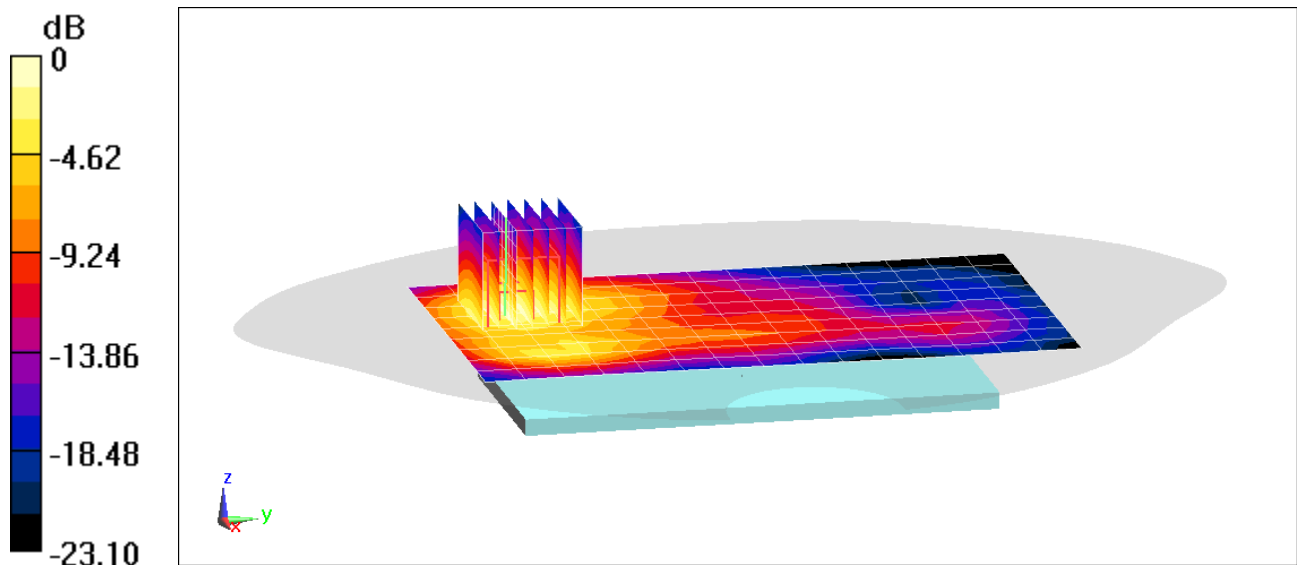

0 dB = 0.527 W/kg = -2.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 10272

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used:

$f = 2550 \text{ MHz}$; $\sigma = 2.14 \text{ S/m}$; $\epsilon_r = 51.233$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-22-2019; Ambient Temp: 21.1°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7417; ConvF(7.37, 7.37, 7.37) @ 2549.5 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41 PC3, Body SAR, Back side, Low-Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.88 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.324 W/kg

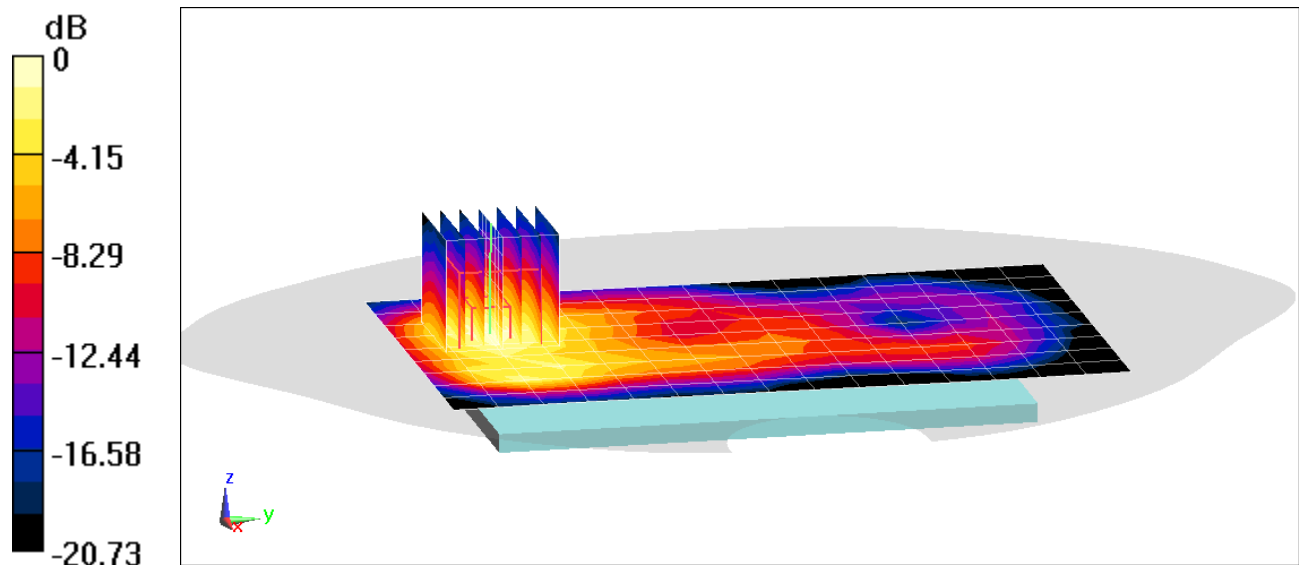

0 dB = 0.517 W/kg = -2.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 05664

Communication System: UID 0, _IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 2.003 \text{ S/m}$; $\epsilon_r = 51.098$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-15-2019; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7417; ConvF(7.51, 7.51, 7.51) @ 2412 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.217 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.092 W/kg

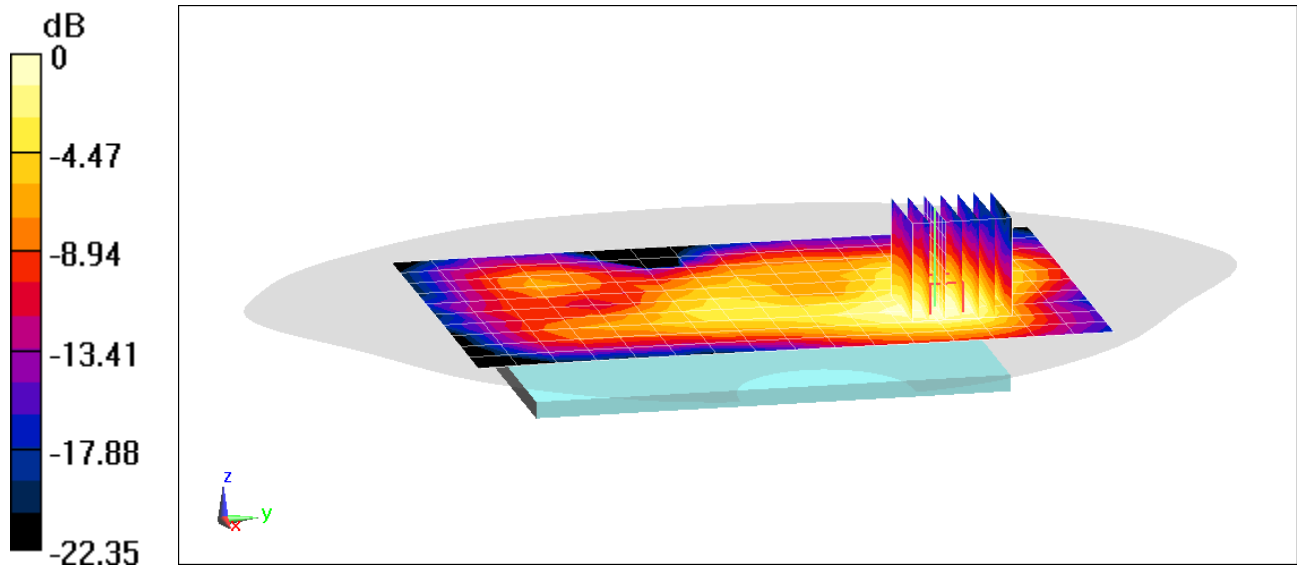

0 dB = 0.143 W/kg = -8.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 05664

Communication System: UID 0, _IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 2.003 \text{ S/m}$; $\epsilon_r = 51.098$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2019; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7417; ConvF(7.51, 7.51, 7.51) @ 2412 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.15 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.226 W/kg

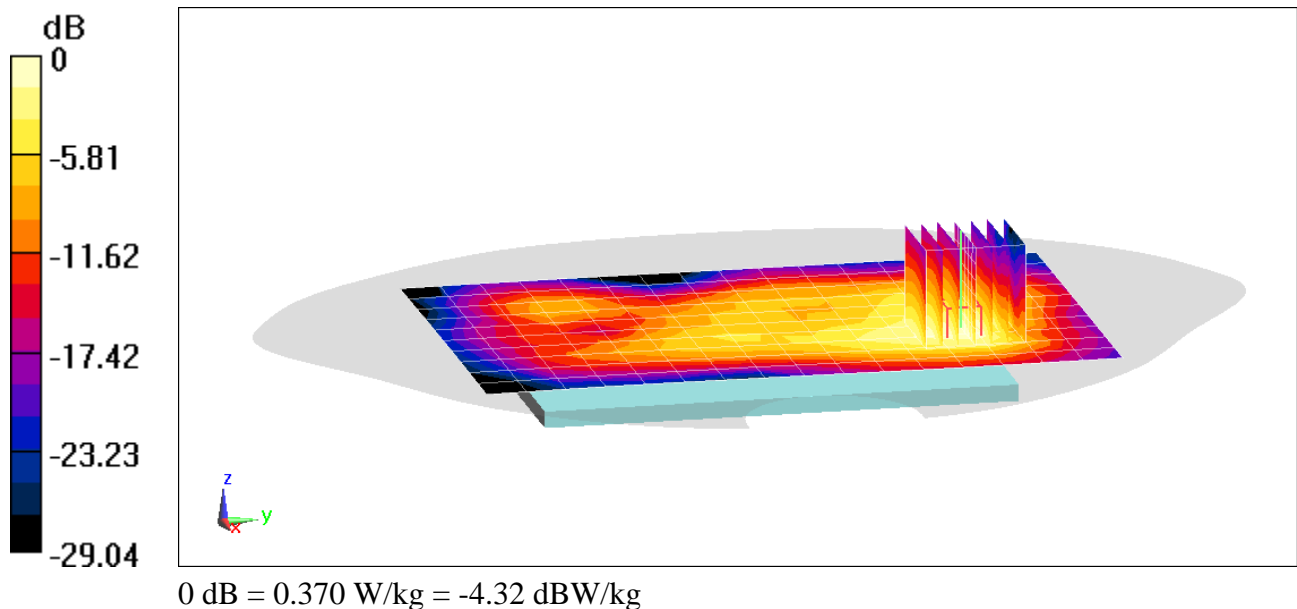

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 05763

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.72 \text{ S/m}$; $\epsilon_r = 46.889$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(4, 4, 4) @ 5500 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11a, UNII-2C, 20 MHz Bandwidth,
Body SAR, Ch 100, 6 Mbps, Back Side**


Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 9.857 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.509 W/kg

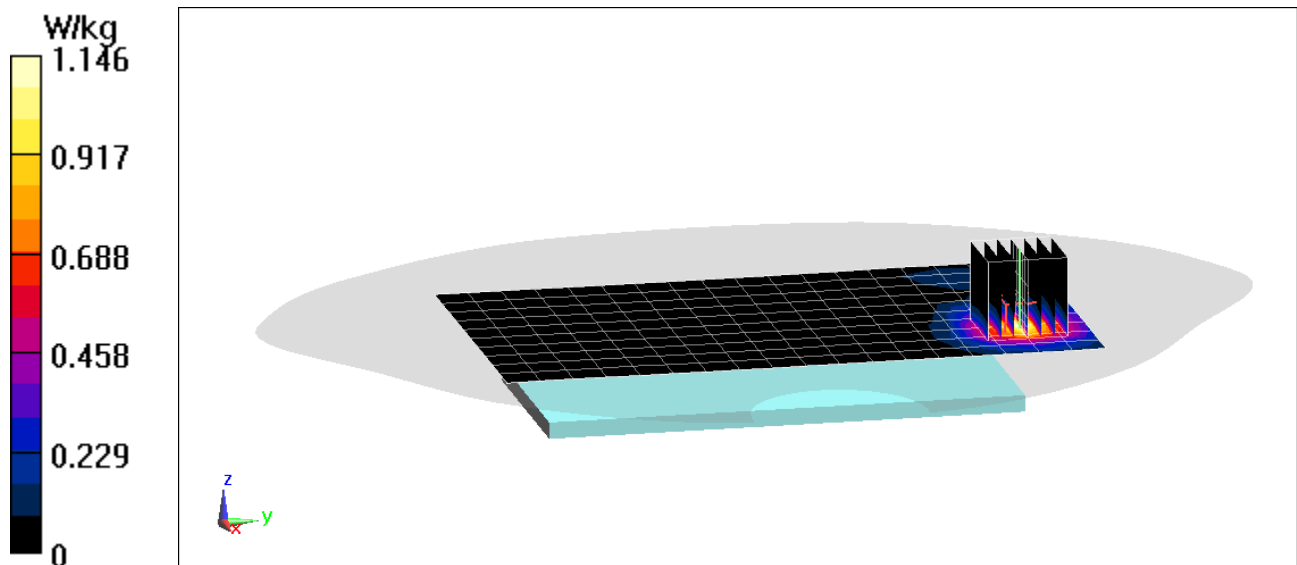

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA102U; Type: Portable Handset; Serial: 05763

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5745 \text{ MHz}$; $\sigma = 6.097 \text{ S/m}$; $\epsilon_r = 46.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(4.18, 4.18, 4.18) @ 5745 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11a, UNII-3, 20 MHz Bandwidth,
Body SAR, Ch 149, 6 Mbps, Back Side**


Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 8.501 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.398 W/kg

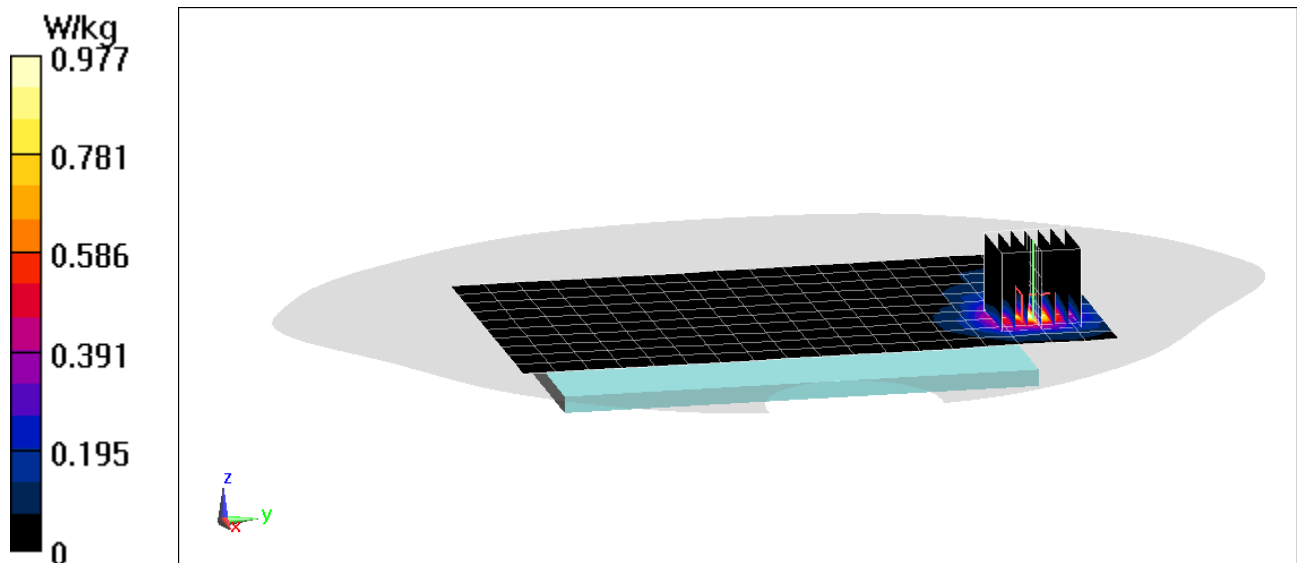

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 41.915$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 24.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(9.91, 9.91, 9.91) @ 750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.75 W/kg

Deviation(1 g) = 5.68%

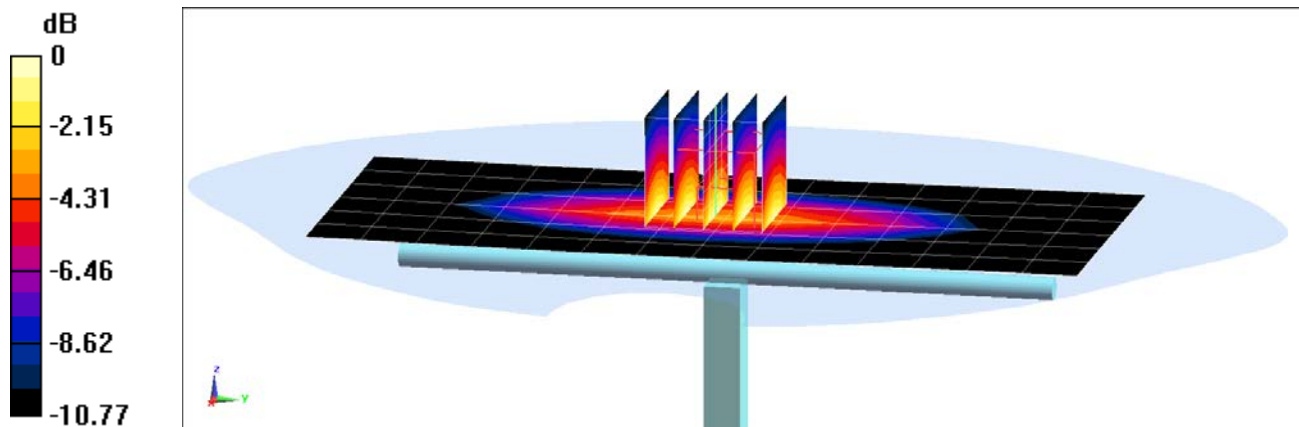

0 dB = 2.37 W/kg = 3.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 43.58$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7409; ConvF(9.91, 9.91, 9.91) @ 750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.73 W/kg

Deviation(1 g) = 7.72%

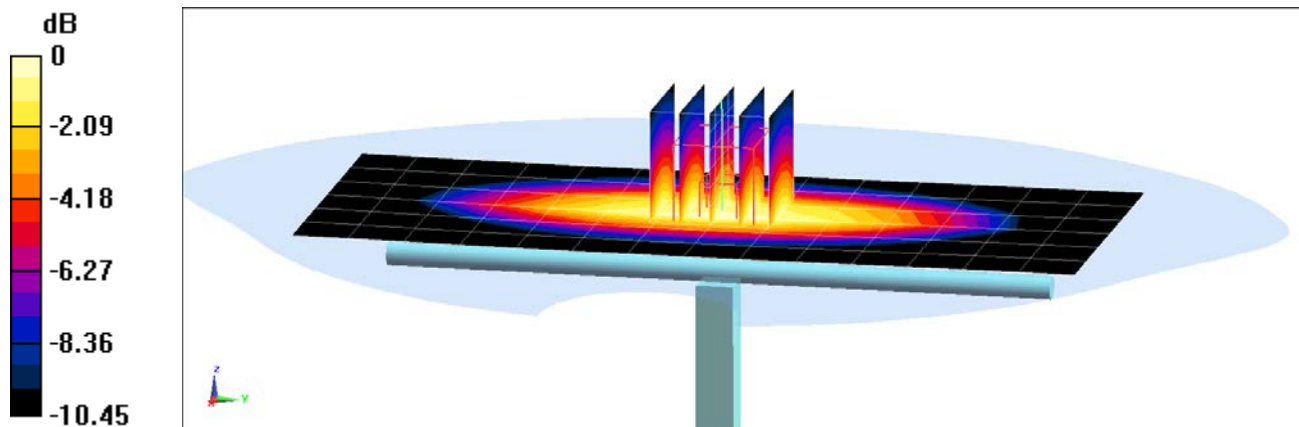

0 dB = 2.34 W/kg = 3.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 41.382$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-17-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 835 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 1.98 W/kg

Deviation(1 g) = 3.23%

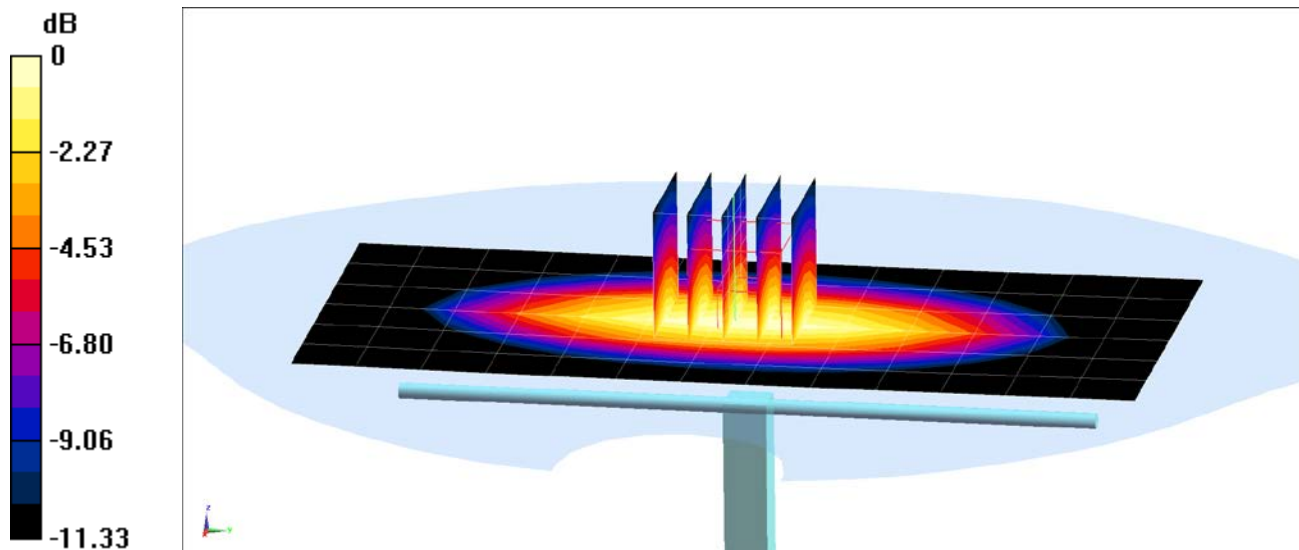

0 dB = 2.71 W/kg = 4.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 41.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3914; ConvF(9.5, 9.5, 9.5) @ 835 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Left For Head SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1687

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 1.97 W/kg

Deviation(1 g) = 2.71%

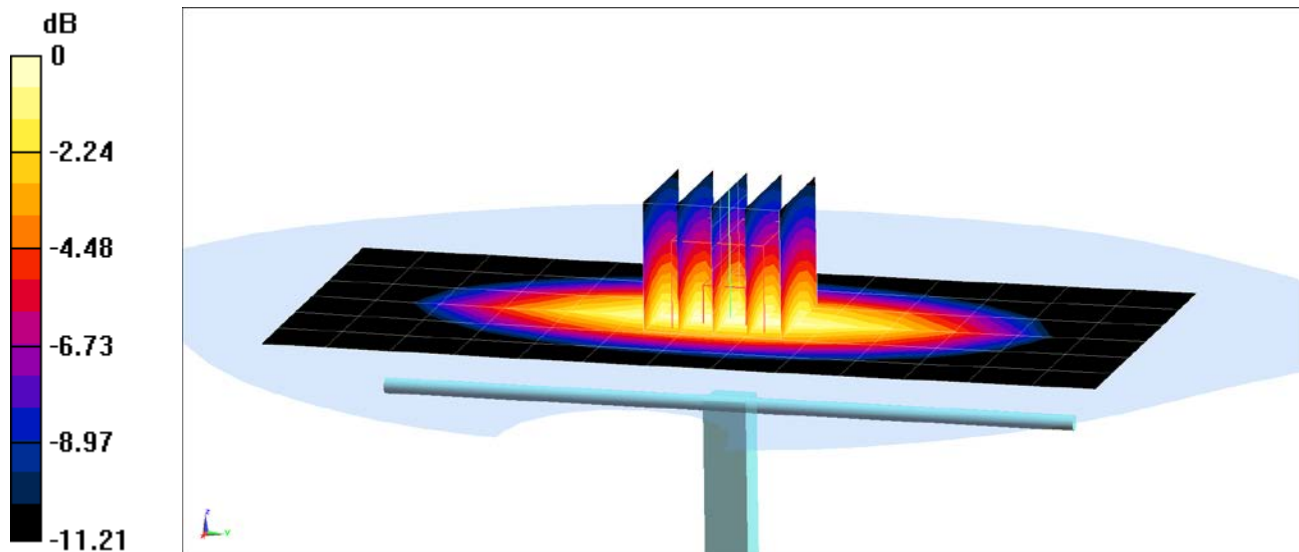

0 dB = 2.69 W/kg = 4.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 38.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-10-2019; Ambient Temp: 23.0°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7308; ConvF(8.66, 8.66, 8.66) @ 1750 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.98 W/kg

SAR(1 g) = 3.59 W/kg

Deviation(1 g) = -1.64%

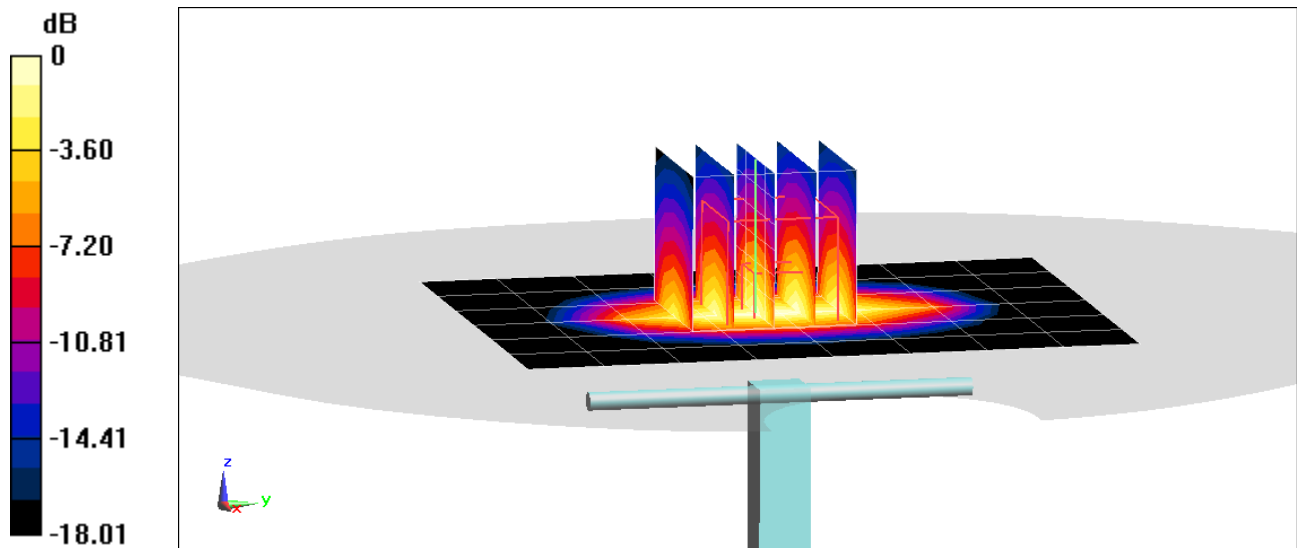

0 dB = 5.63 W/kg = 7.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.392 \text{ S/m}$; $\epsilon_r = 41.682$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7409; ConvF(8.43, 8.43, 8.43) @ 1750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.73 W/kg

SAR(1 g) = 3.64 W/kg

Deviation(1 g) = 0.55%

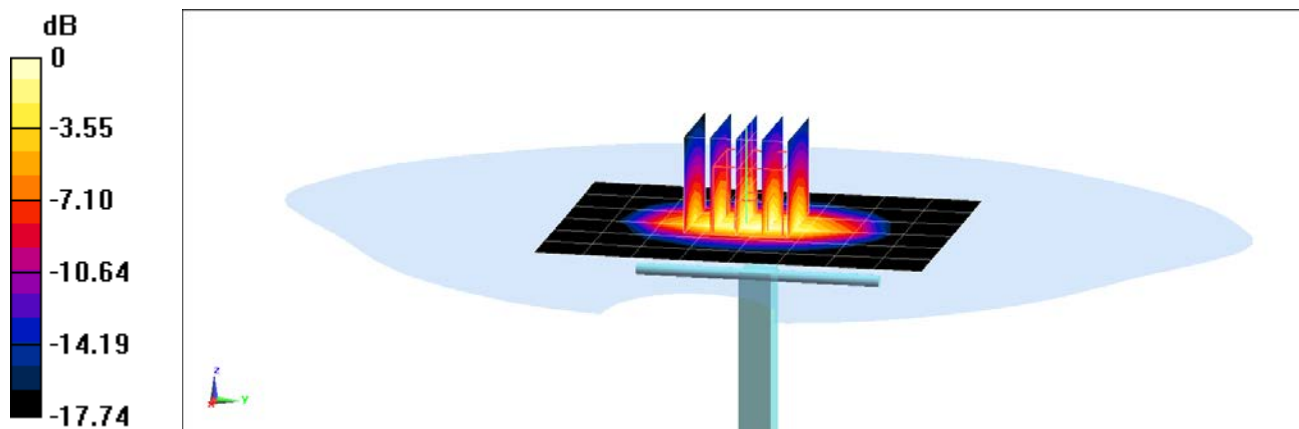

0 dB = 5.60 W/kg = 7.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.463 \text{ S/m}$; $\epsilon_r = 40.728$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-01-2019; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(8.05, 8.05, 8.05) @ 1900 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM 30 with CRP v5.0 right; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.96 W/kg

SAR(1 g) = 4.19 W/kg

Deviation(1 g) = 5.28%

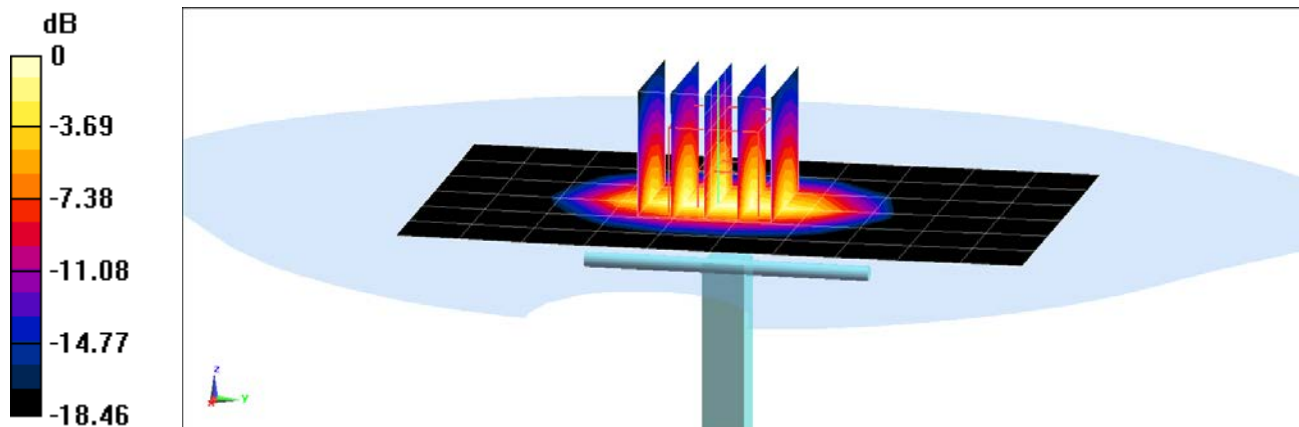

0 dB = 6.57 W/kg = 8.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.432 \text{ S/m}$; $\epsilon_r = 39.345$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-08-2019; Ambient Temp: 23.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.34 W/kg

SAR(1 g) = 4.06 W/kg

Deviation(1 g) = 3.31%

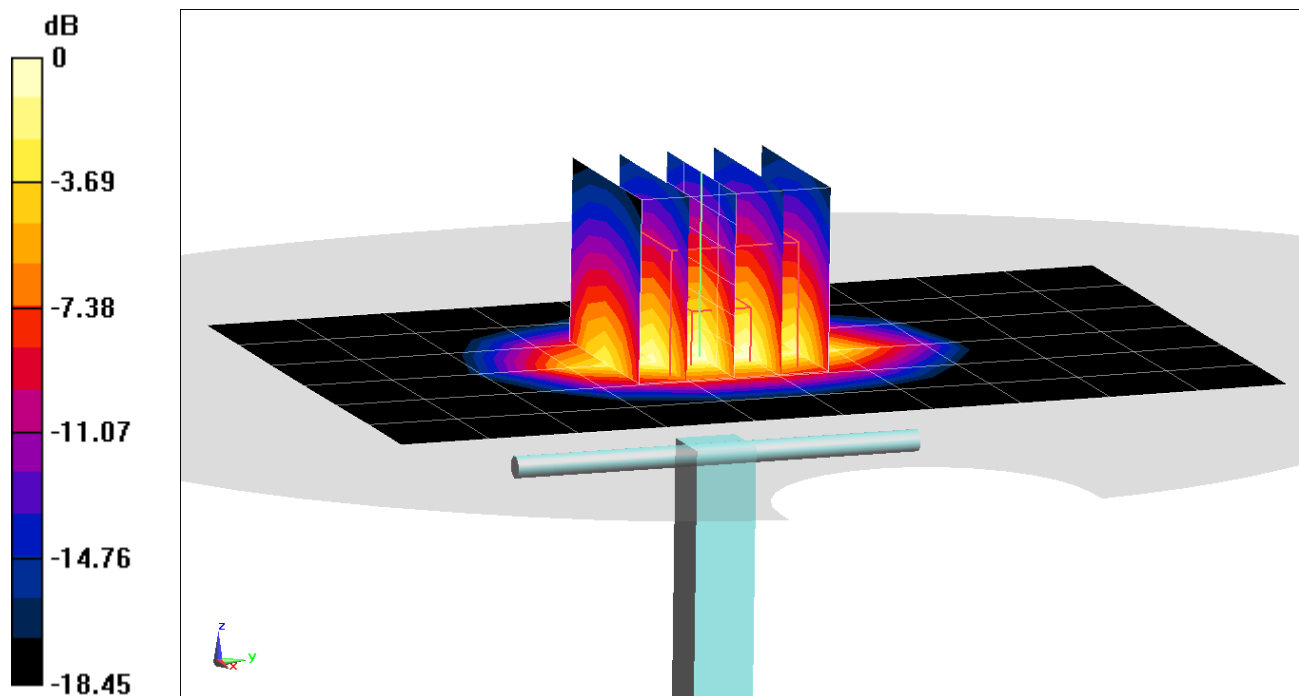

0 dB = 6.26 W/kg = 7.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.703 \text{ S/m}$; $\epsilon_r = 38.234$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-02-2019; Ambient Temp: 24.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.77, 6.77, 6.77) @ 2300 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2300 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 4.71 W/kg

Deviation(1 g) = -1.05%

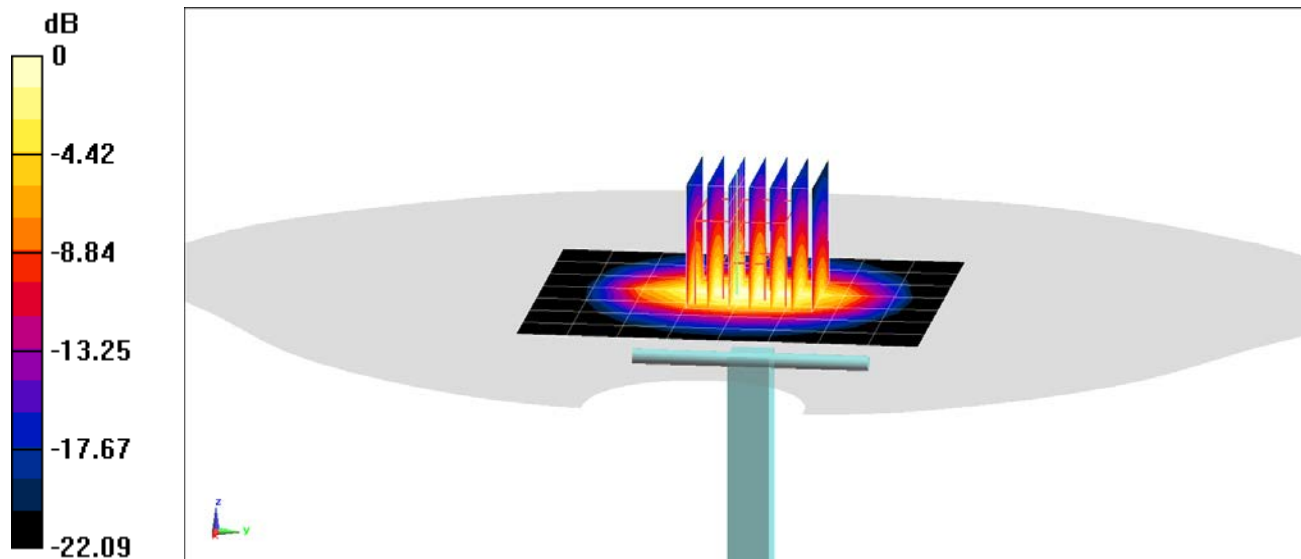

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.82 \text{ S/m}$; $\epsilon_r = 37.749$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-29-2019; Ambient Temp: 20.1°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7308; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.18 W/kg

Deviation(1 g) = -0.19%

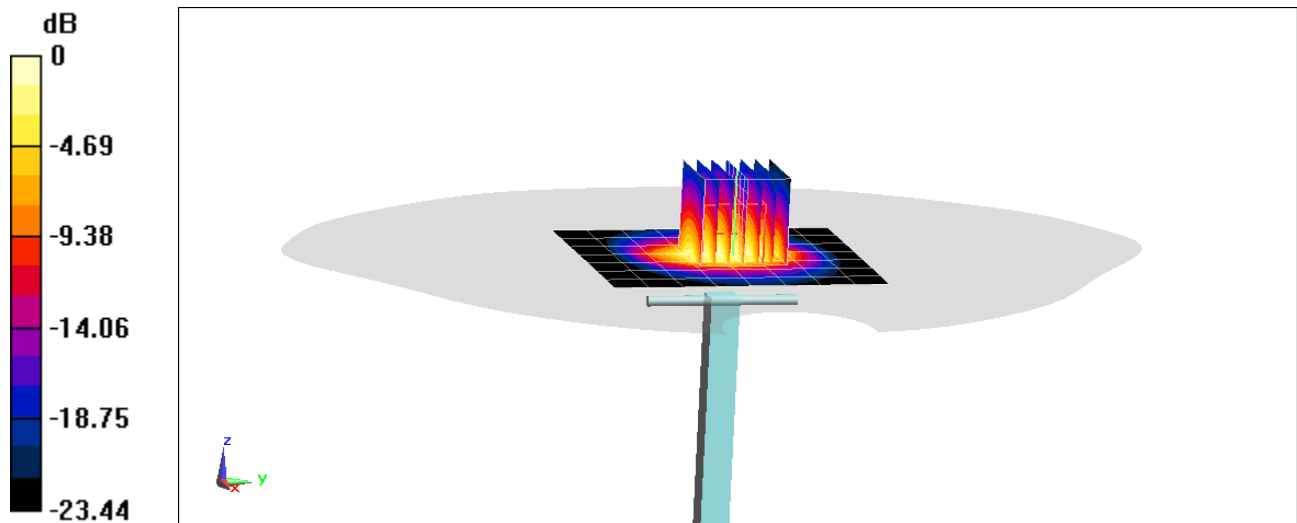

0 dB = 8.73 W/kg = 9.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.792 \text{ S/m}$; $\epsilon_r = 38.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-29-2019; Ambient Temp: 24.4°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(6.46, 6.46, 6.46) @ 2450 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.28 W/kg

Deviation(1 g) = 0.96%

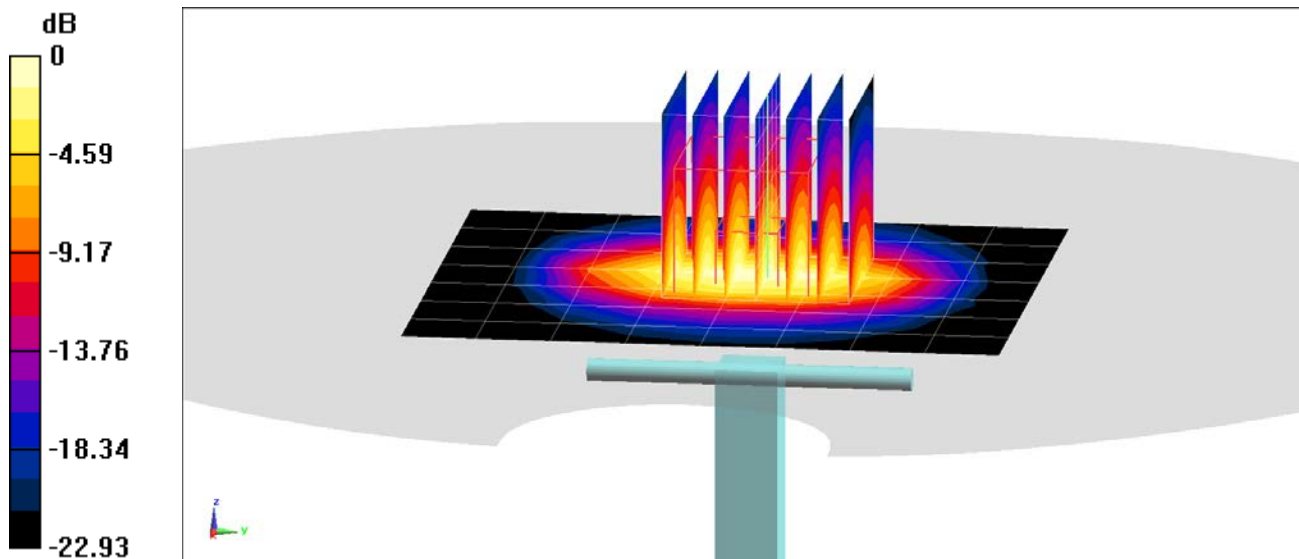

0 dB = 8.91 W/kg = 9.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 1.905 \text{ S/m}$; $\epsilon_r = 38.595$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-29-2019; Ambient Temp: 24.4°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(6.25, 6.25, 6.25) @ 2600 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 5.77 W/kg

Deviation(1 g) = 1.23%

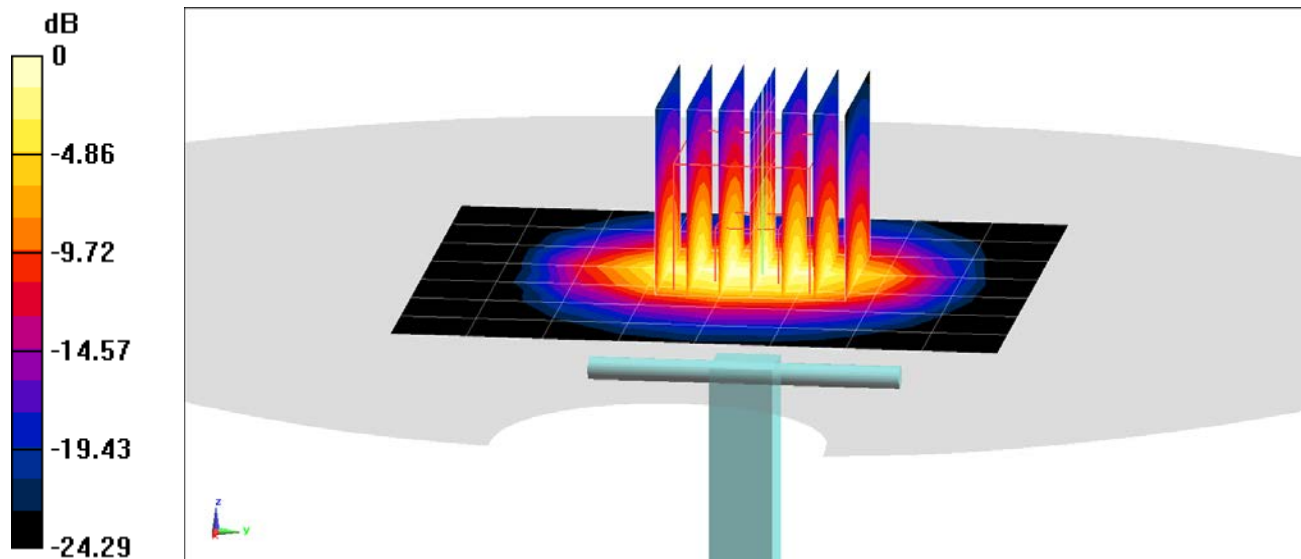

0 dB = 9.91 W/kg = 9.96 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 4.645 \text{ S/m}$; $\epsilon_r = 36.039$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-07-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7409; ConvF(5.2, 5.2, 5.2) @ 5250 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 3.89 W/kg

Deviation(1 g) = -4.31%

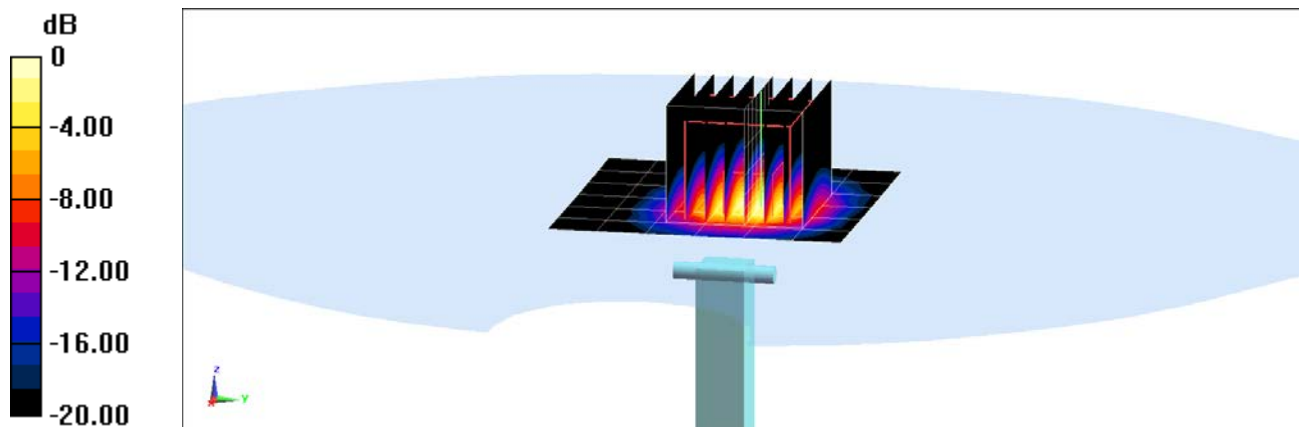

0 dB = 9.19 W/kg = 9.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.048 \text{ S/m}$; $\epsilon_r = 35.409$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-07-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7409; ConvF(4.77, 4.77, 4.77) @ 5600 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 4.11 W/kg

Deviation(1 g) = -4.08%

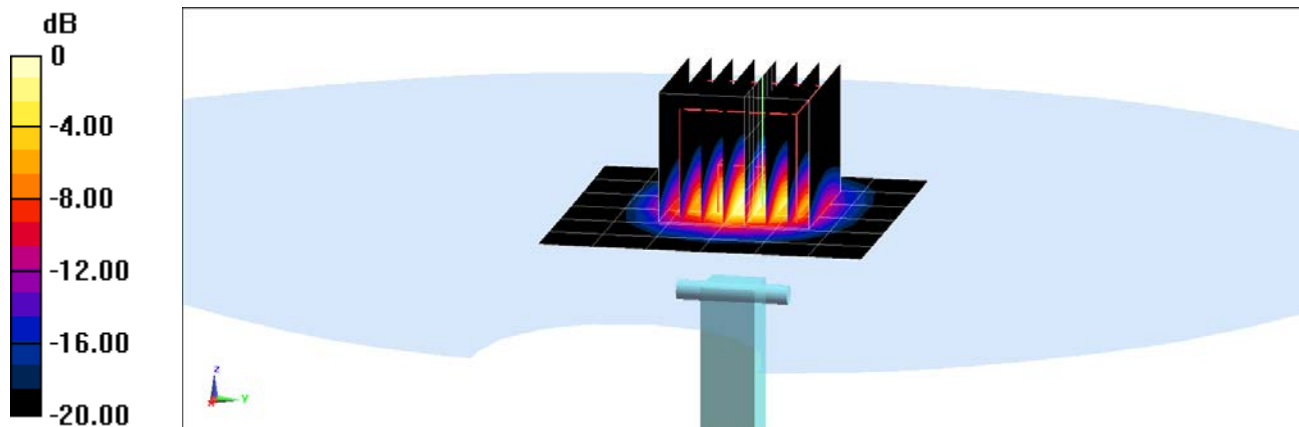

0 dB = 10.1 W/kg = 10.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.133$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-07-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7409; ConvF(4.82, 4.82, 4.82) @ 5750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 3.84 W/kg

Deviation(1 g) = -4.71%

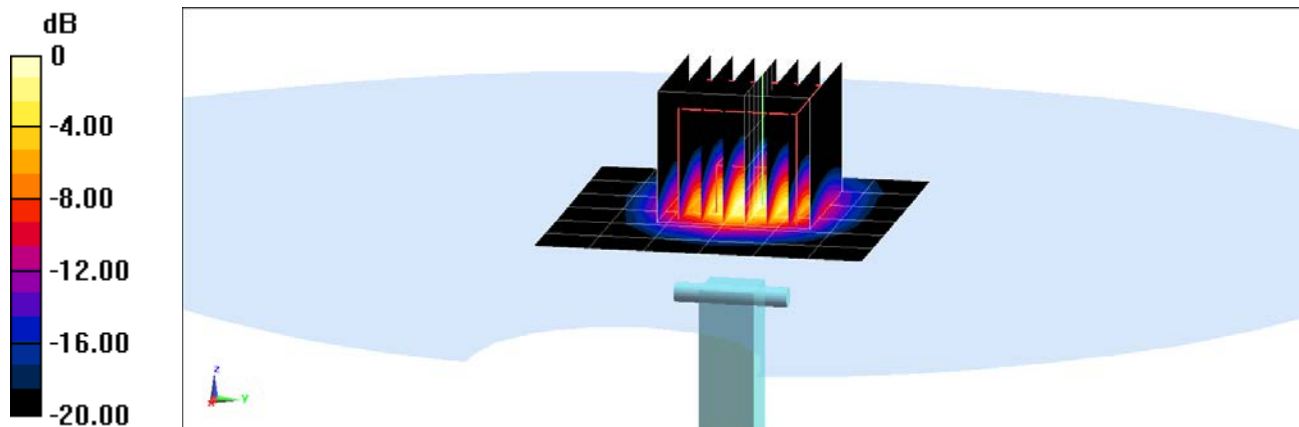

0 dB = 9.24 W/kg = 9.66 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750MHz Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.962 \text{ S/m}$; $\epsilon_r = 54.597$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-24-2019; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7308; ConvF(10.38, 10.38, 10.38) @ 750 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.73 W/kg

Deviation(1 g) = 2.61%

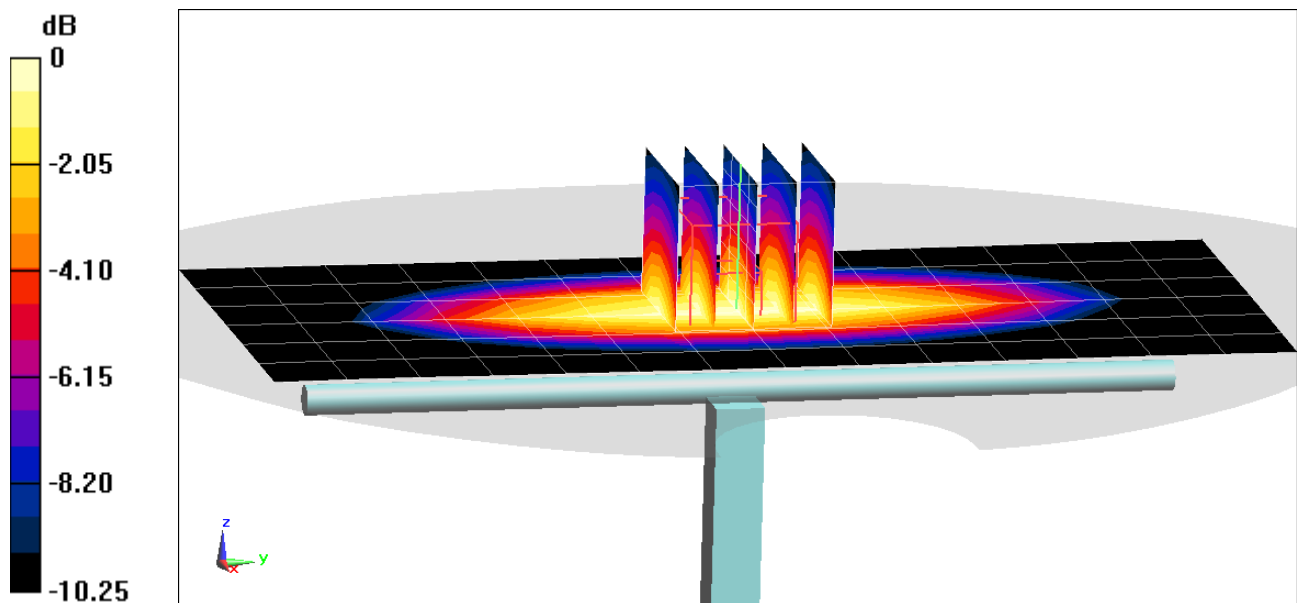

0 dB = 2.32 W/kg = 3.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 52.822$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-01-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 835 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.87 W/kg

Deviation(1 g) = -3.31%

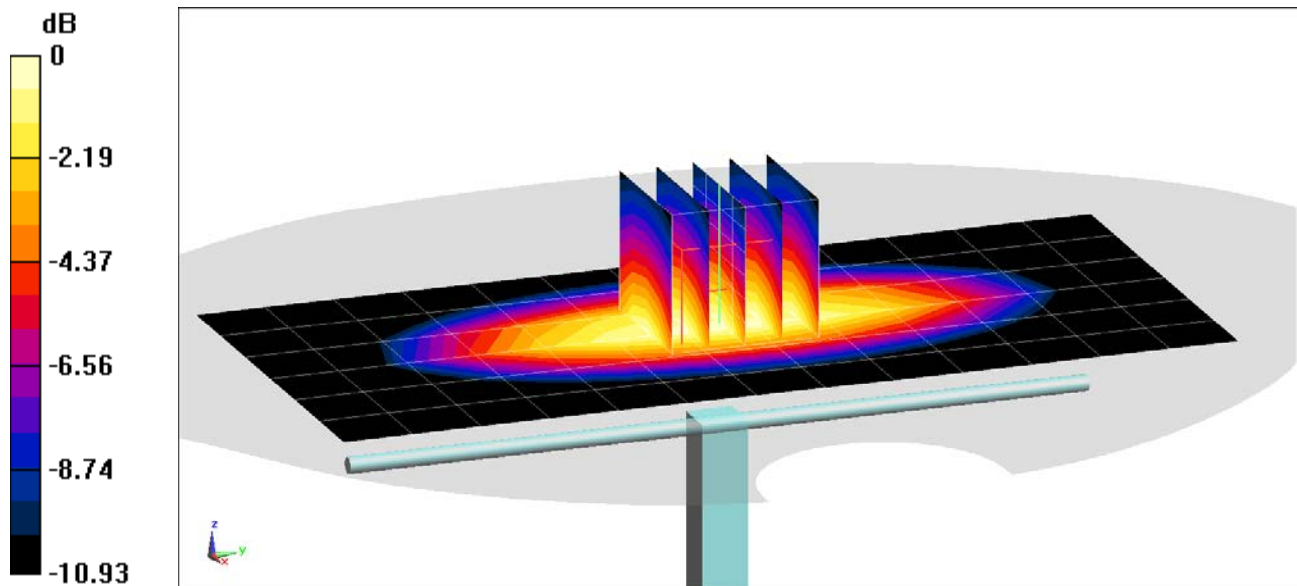

0 dB = 2.53 W/kg = 4.03 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 53.243$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 5-6-2019; Ambient Temp: 20.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7488; ConvF(11.03, 11.03, 11.03) @ 835 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 2.04 W/kg

Deviation(1 g) = 5.48%;

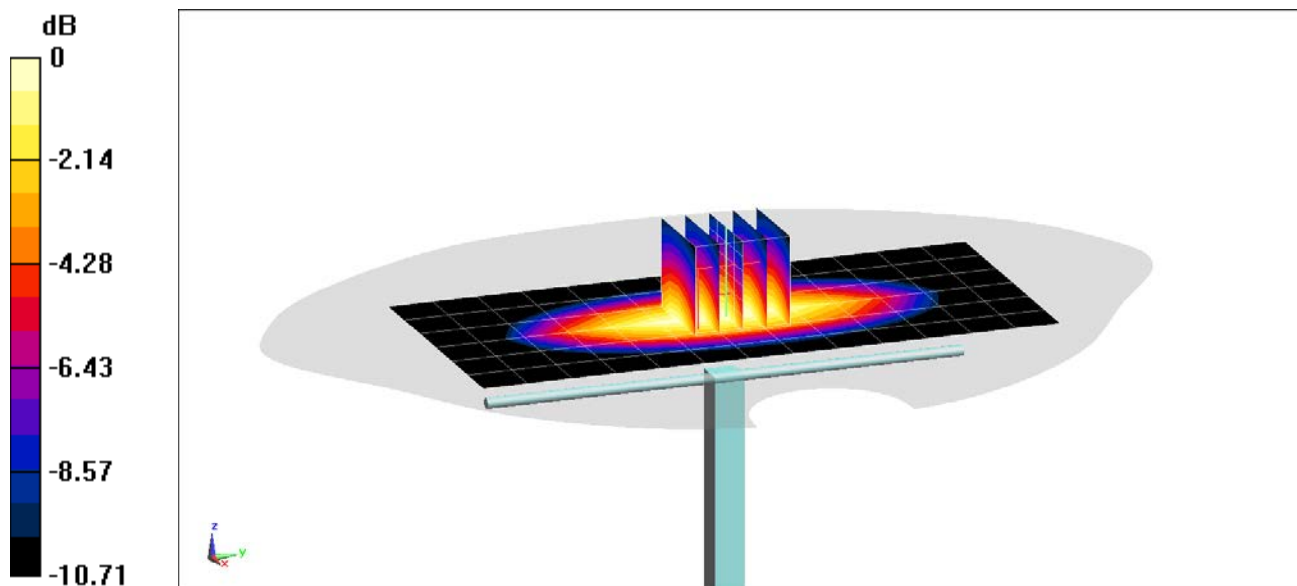

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.505$ S/m; $\epsilon_r = 52.108$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2019; Ambient Temp: 23.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(8.68, 8.68, 8.68) @ 1750 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.63 W/kg

SAR(1 g) = 3.7 W/kg

Deviation(1 g) = 0.00%

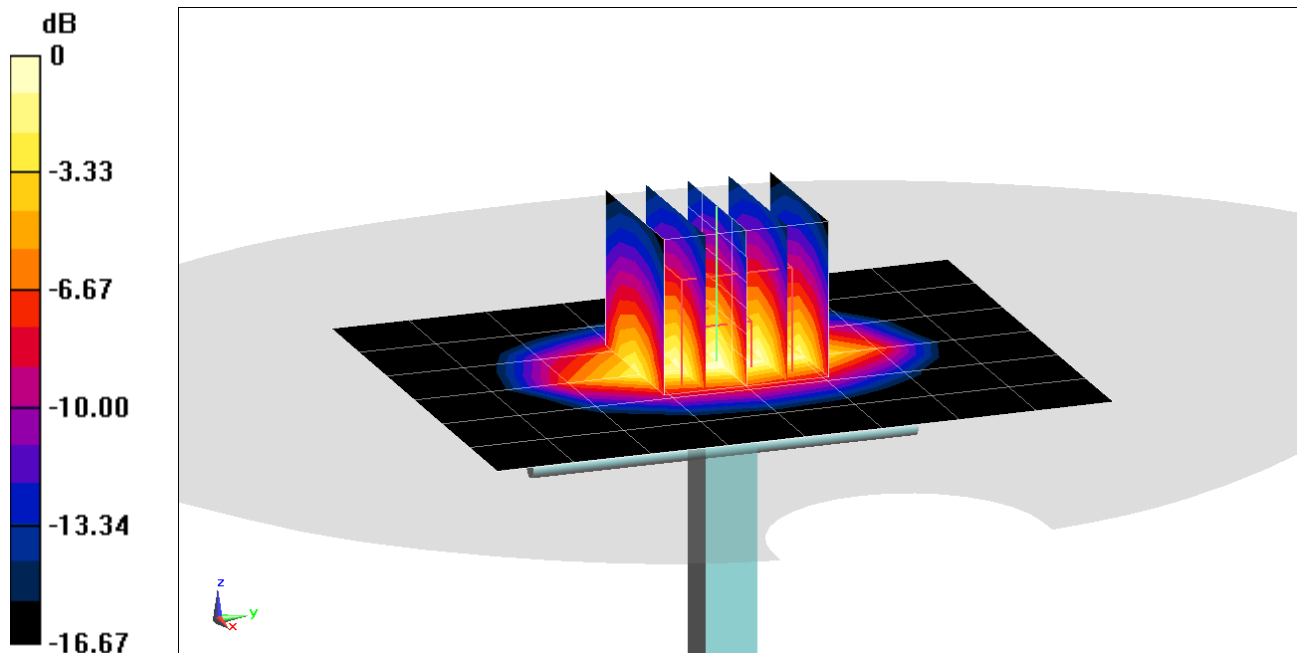

0 dB = 5.65 W/kg = 7.52 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.572 \text{ S/m}$; $\epsilon_r = 52.618$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2019; Ambient Temp: 21.1°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front 30; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.71 W/kg

SAR(1 g) = 4.22 W/kg

Deviation(1 g) = 7.11%

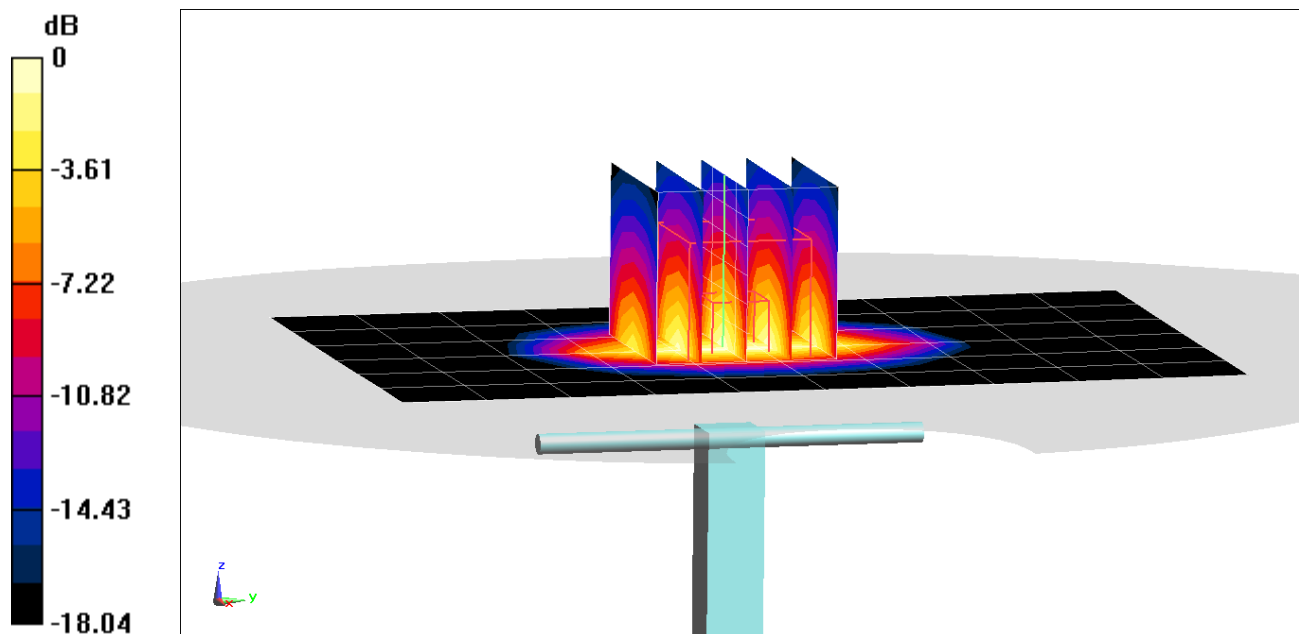

0 dB = 6.54 W/kg = 8.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.559 \text{ S/m}$; $\epsilon_r = 52.238$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-23-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.38 W/kg

SAR(1 g) = 4.01 W/kg

Deviation(1 g) = 1.78%

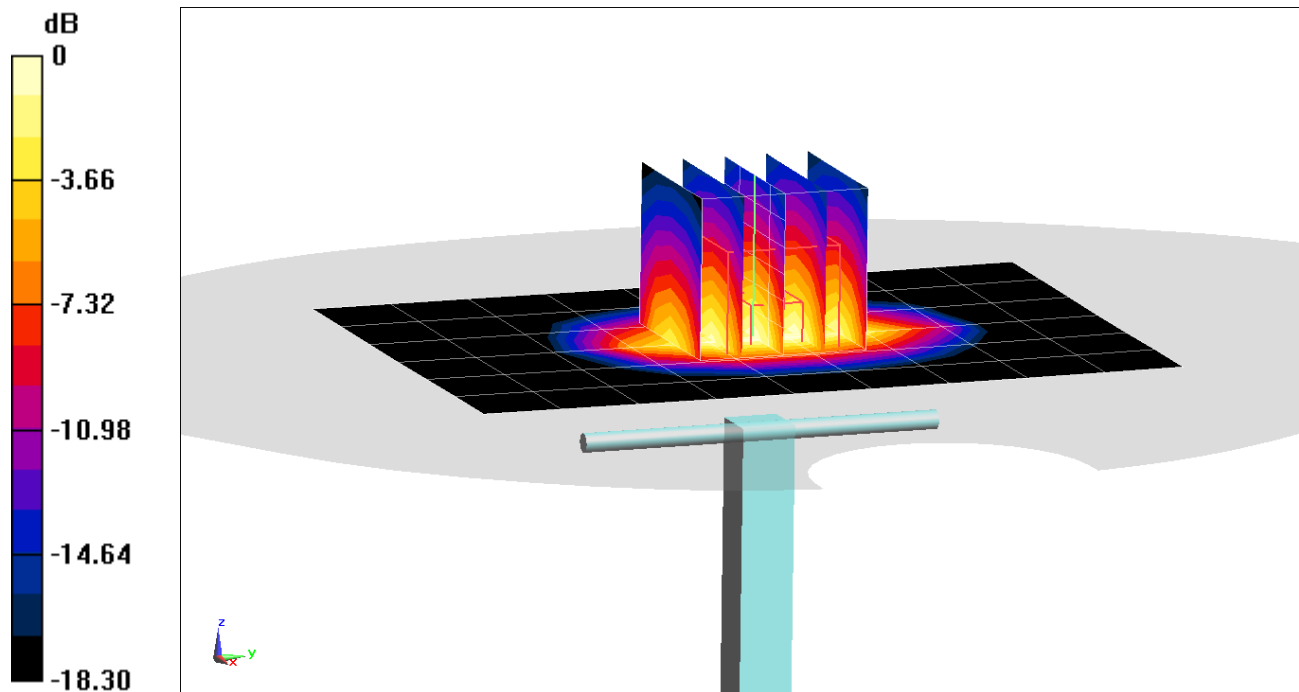

0 dB = 5.08 W/kg = 7.06 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.582 \text{ S/m}$; $\epsilon_r = 53.039$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-29-2019; Ambient Temp: 21.6 °C; Tissue Temp: 21.2 °C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.90 W/kg

SAR(1 g) = 4.3 W/kg

Deviation(1 g) = 9.14%

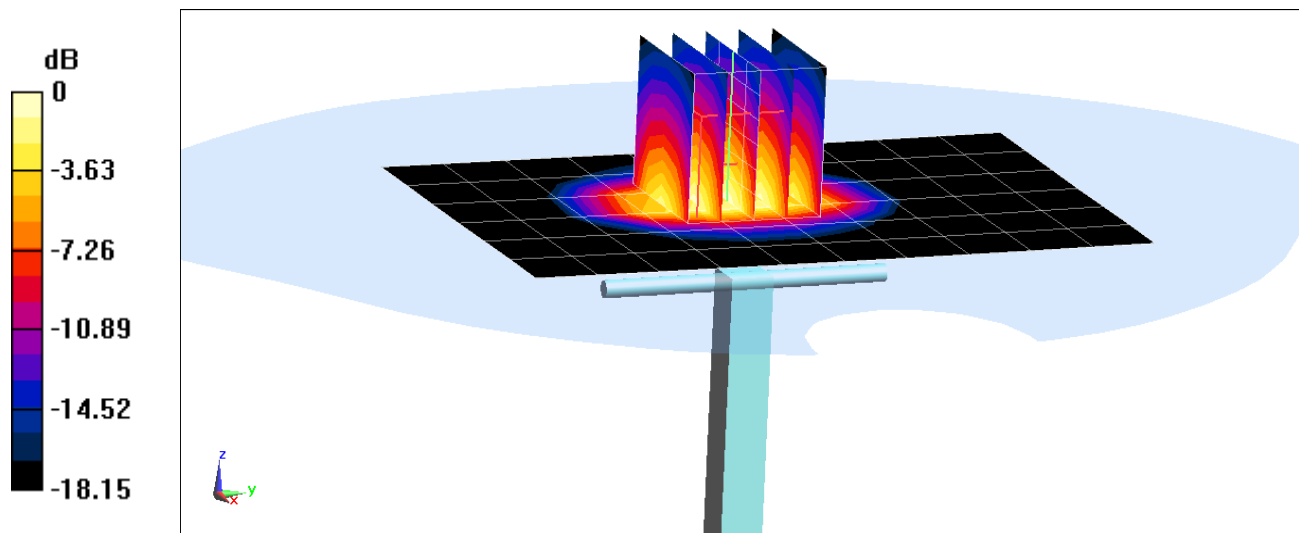

0 dB = 6.70 W/kg = 8.26 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.579 \text{ S/m}$; $\epsilon_r = 52.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-01-2019; Ambient Temp: 23.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.87 W/kg

SAR(1 g) = 4.21 W/kg

Deviation(1 g) = 6.85%

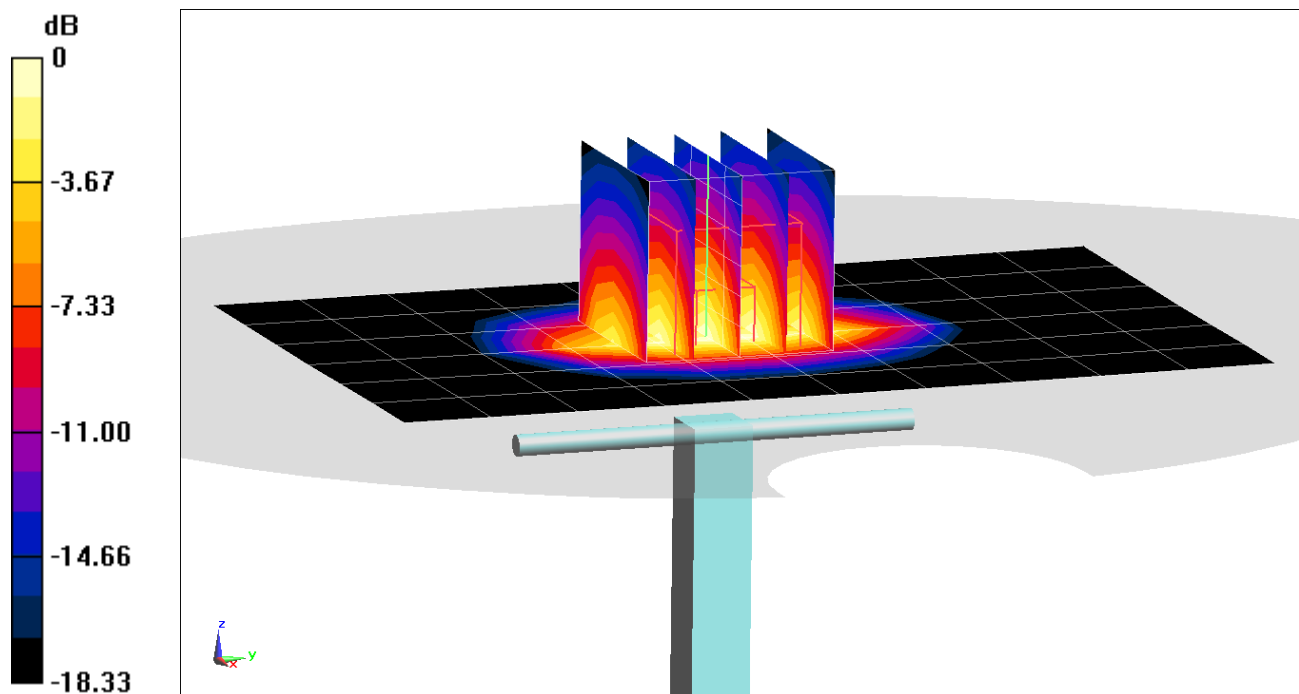

0 dB = 6.59 W/kg = 8.19 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1073

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.895 \text{ S/m}$; $\epsilon_r = 52.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.73, 7.73, 7.73) @ 2300 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2300 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 5.06 W/kg

Deviation(1 g) = 6.08%

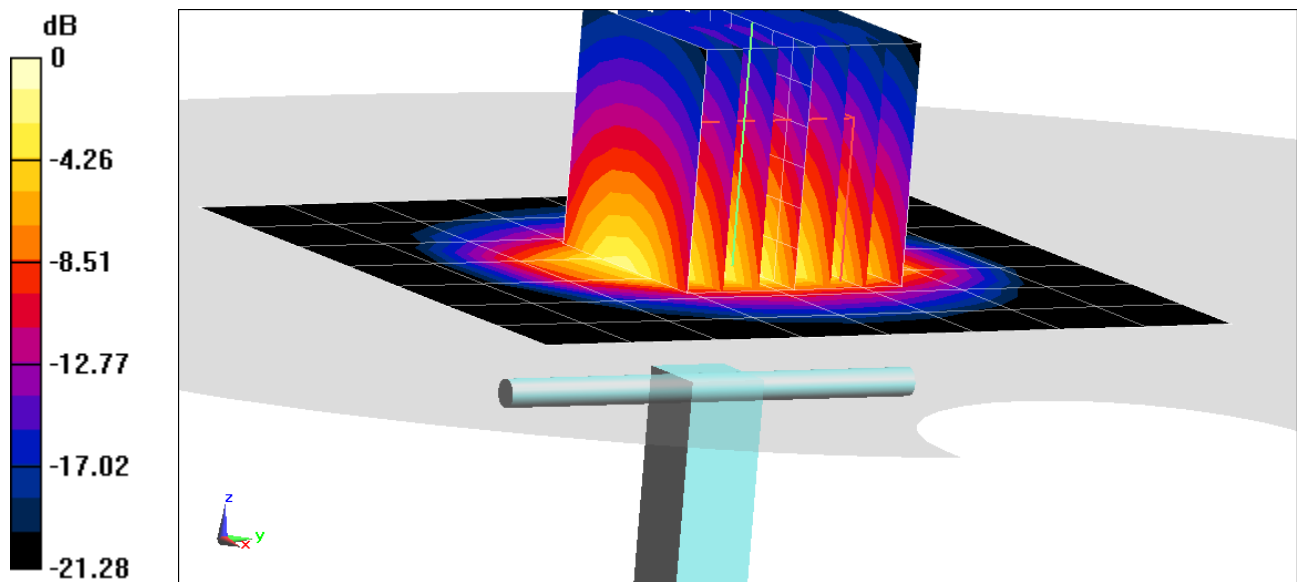

0 dB = 8.33 W/kg = 9.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.046 \text{ S/m}$; $\epsilon_r = 50.998$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2019; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7417; ConvF(7.51, 7.51, 7.51) @ 2450 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.13 W/kg

Deviation(1 g) = 0.39%

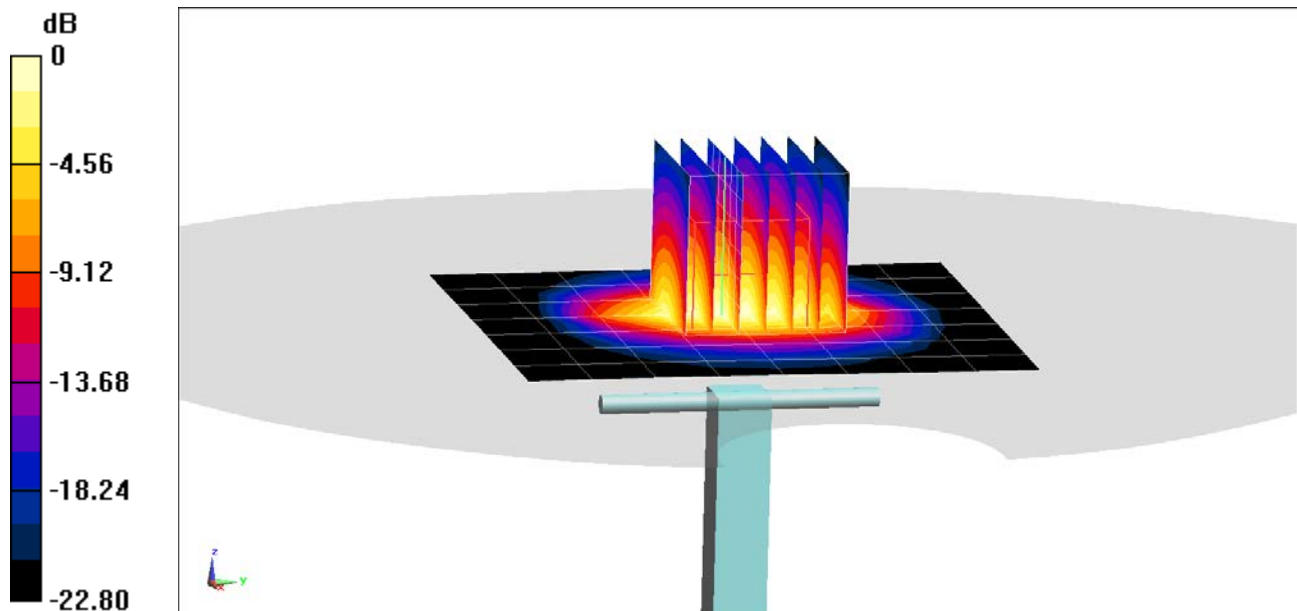

0 dB = 8.48 W/kg = 9.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.022 \text{ S/m}$; $\epsilon_r = 51.534$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-22-2019; Ambient Temp: 21.2°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7417; ConvF(7.51, 7.51, 7.51) @ 2450 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 5.31 W/kg

Deviation(1 g) = 3.91%

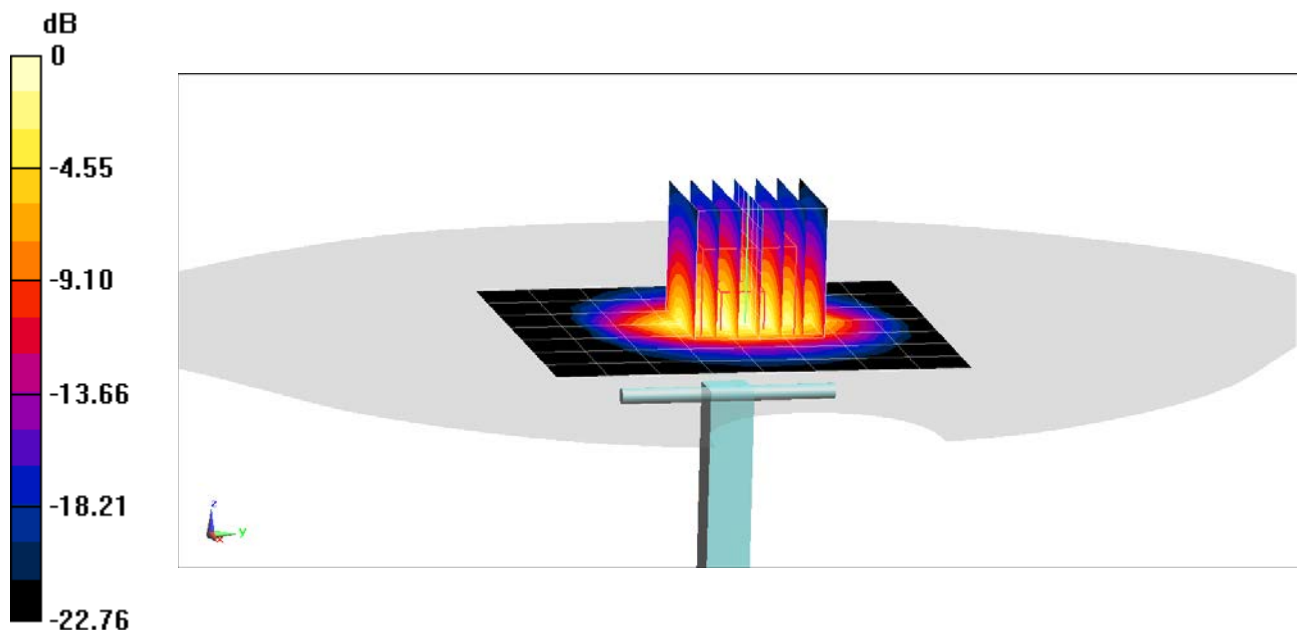

0 dB = 8.98 W/kg = 9.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.03 \text{ S/m}$; $\epsilon_r = 52.408$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.57, 7.57, 7.57) @ 2450 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.11 W/kg

Deviation(1 g) = 2.00%

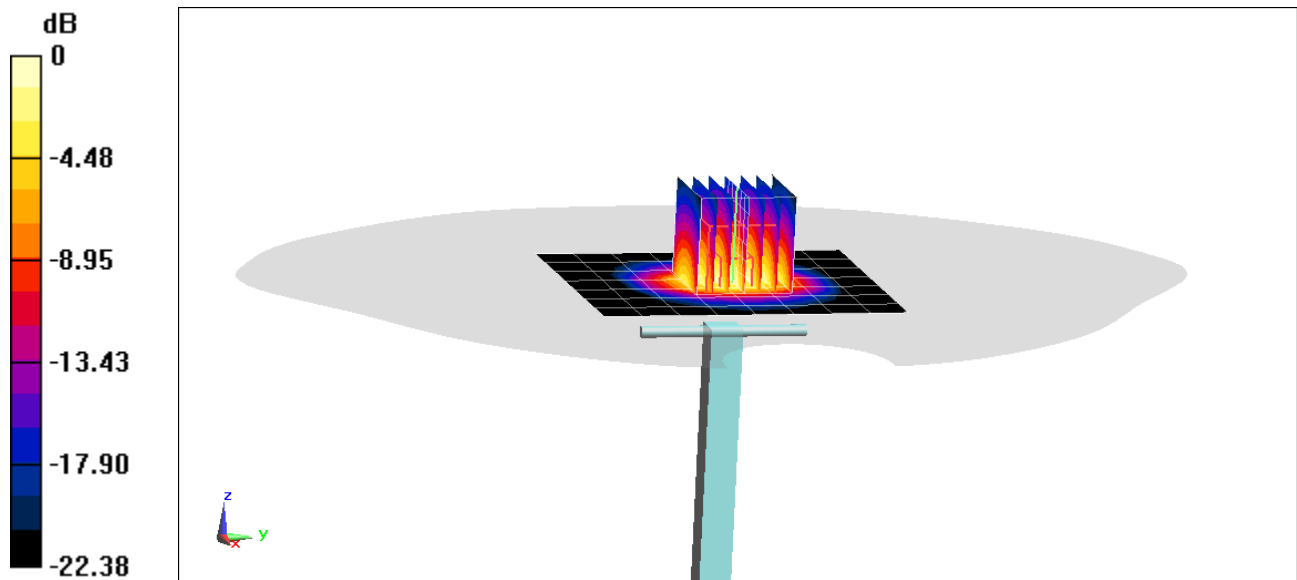

0 dB = 8.63 W/kg = 9.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.197 \text{ S/m}$; $\epsilon_r = 51.112$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-22-2019; Ambient Temp: 21.1°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7417; ConvF(7.37, 7.37, 7.37) @ 2600 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.55 W/kg

Deviation(1 g) = 2.59%

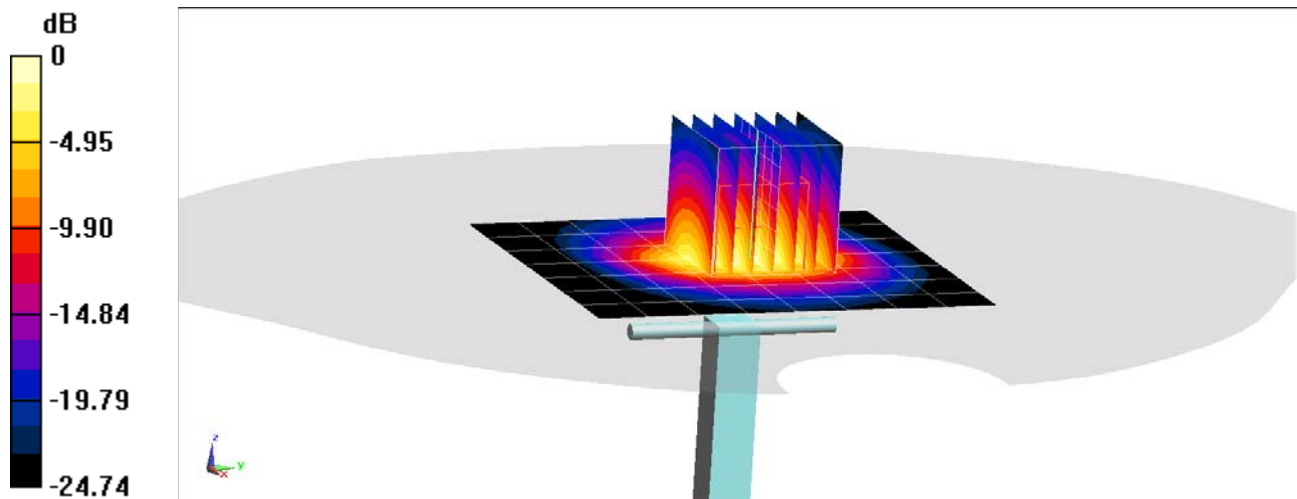

0 dB = 9.69 W/kg = 9.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.171 \text{ S/m}$; $\epsilon_r = 52.185$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(7.4, 7.4, 7.4) @ 2600 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.67 W/kg

Deviation(1 g) = 3.47%

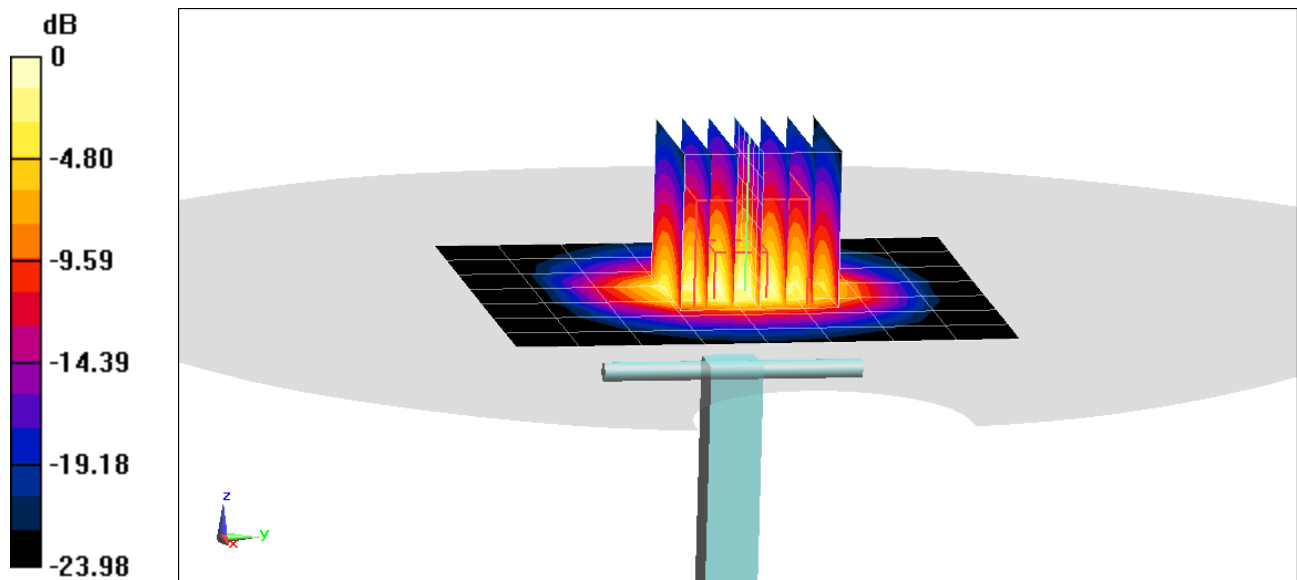

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.38 \text{ S/m}$; $\epsilon_r = 47.328$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(4.48, 4.48, 4.48) @ 5250 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.5 W/kg

SAR(1 g) = 3.56 W/kg

Deviation(1 g) = -6.19%

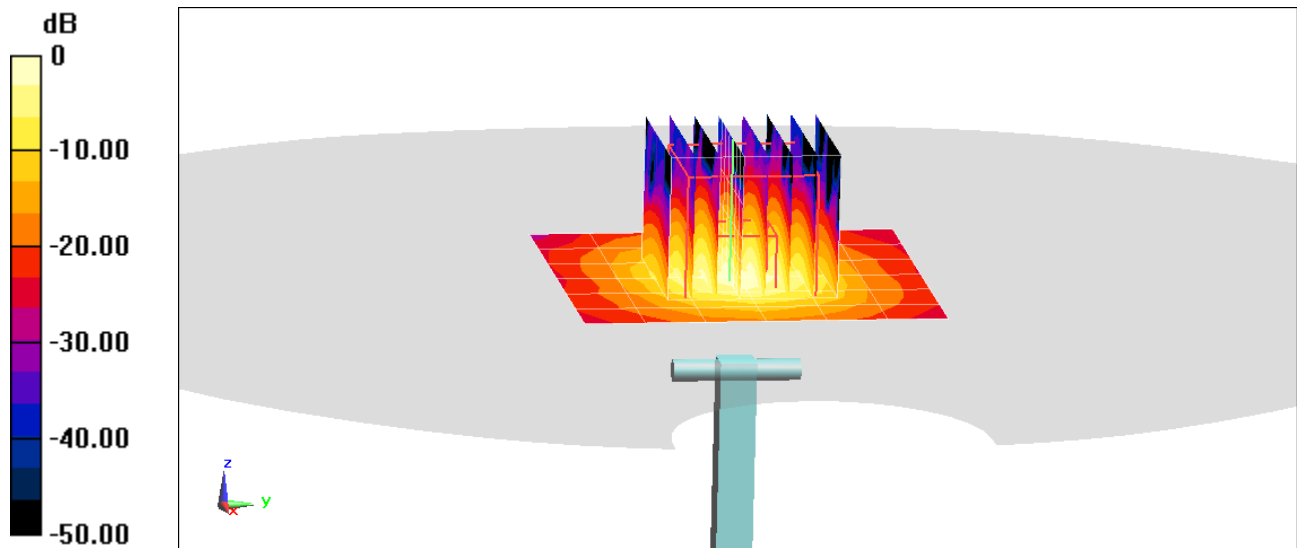

0 dB = 8.55 W/kg = 9.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.876 \text{ S/m}$; $\epsilon_r = 46.696$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(4, 4, 4) @ 5600 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 4.02 W/kg

Deviation(1 g) = 0.63%

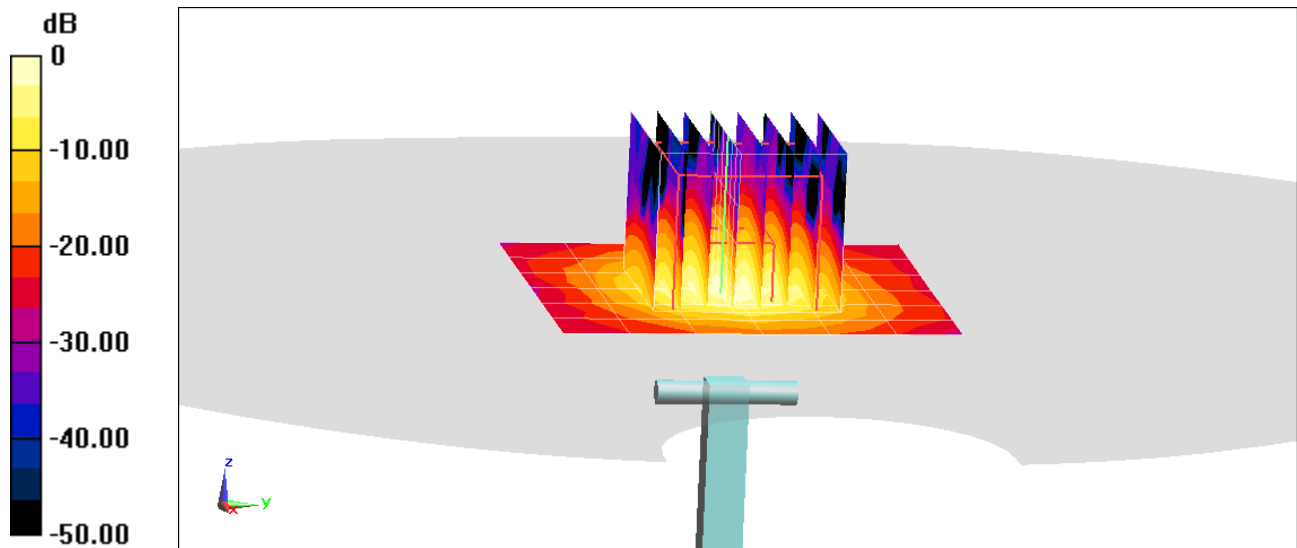

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.103 \text{ S/m}$; $\epsilon_r = 46.395$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(4.18, 4.18, 4.18) @ 5750 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.54 W/kg

Deviation(1 g) = -7.69%

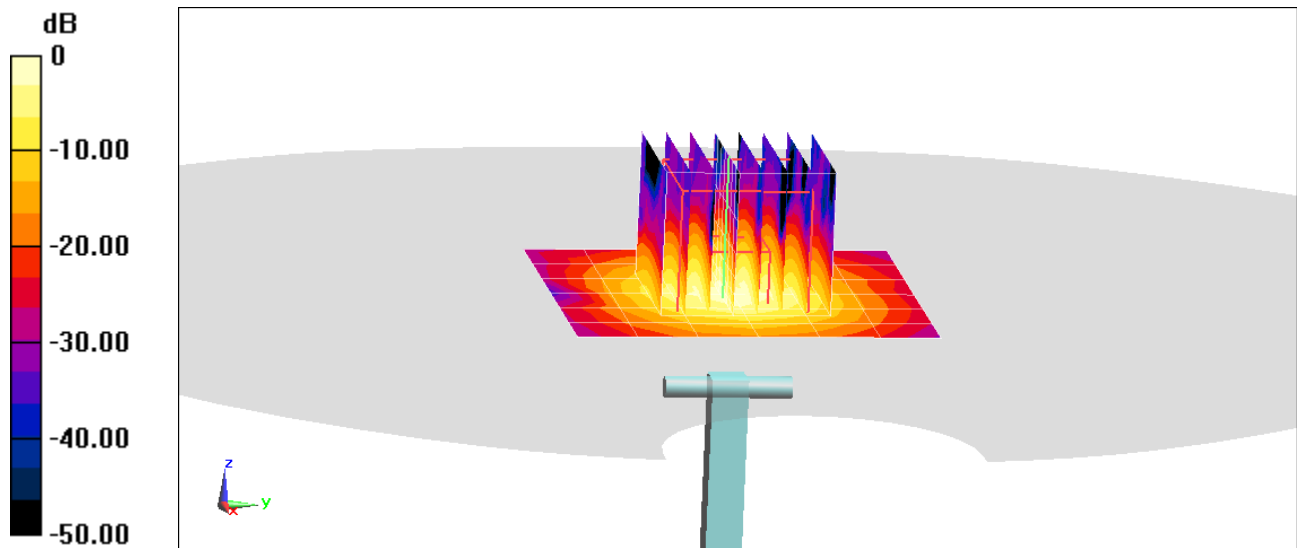

0 dB = 8.88 W/kg = 9.48 dBW/kg

APPENDIX C: PROBE CALIBRATION

**Calibration Laboratory of
Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003_Jan18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leli Klysner** Name: **Leli Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner

Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.9 \pm 6 %	0.90 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.28 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.42 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.0 \pm 6 %	0.96 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.58 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.71 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 Ω - 2.1 j Ω
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2 Ω - 6.2 j Ω
Return Loss	- 24.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.94 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.32 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.06 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.70 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.60 W/kg ± 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

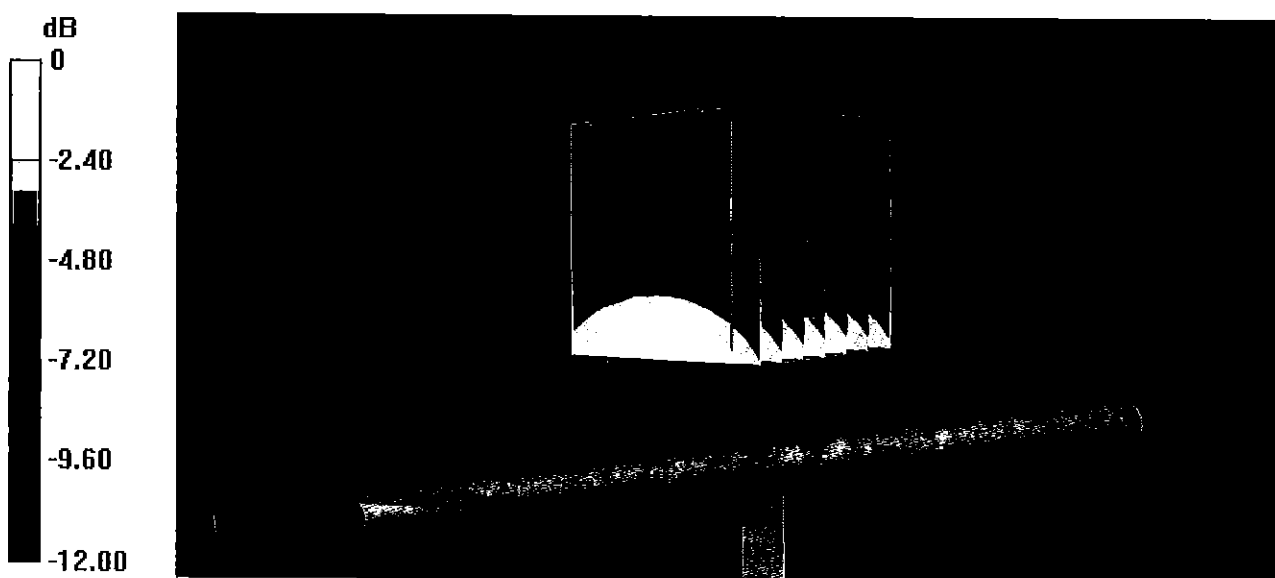


0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07
CH1 S11 1 U FS 1: 53.754 Ω -2.0996 Ω 101.07 pF 750.000 000 MHz


*
Del
CA

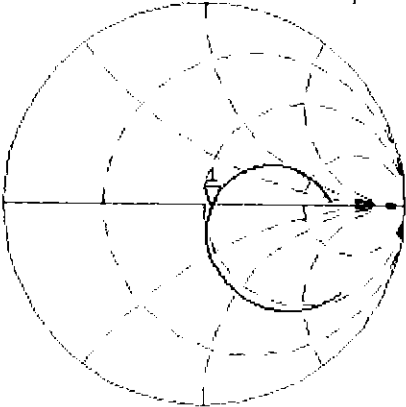

Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.643 dB 750.000 000 MHz

CA
Avg
16
H1d

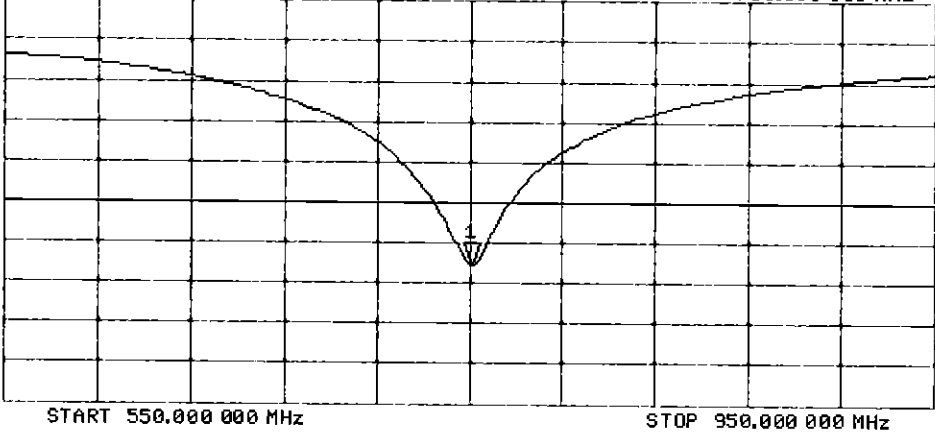

DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x8x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.31 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

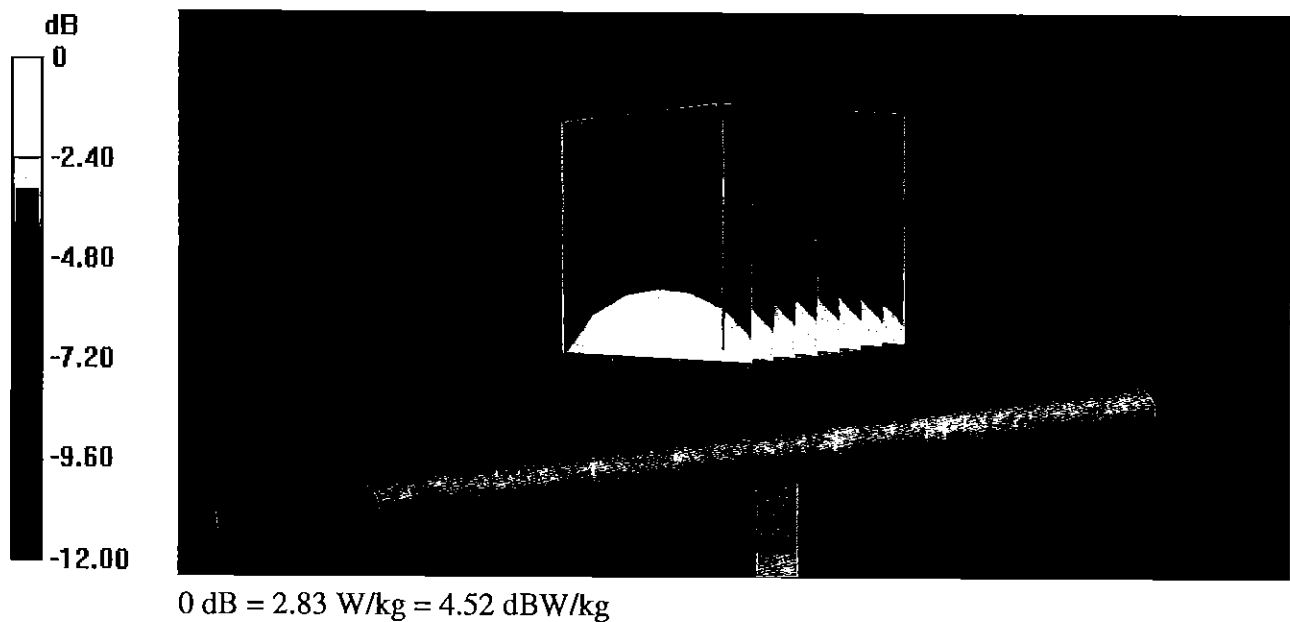

Impedance Measurement Plot for Body TSL

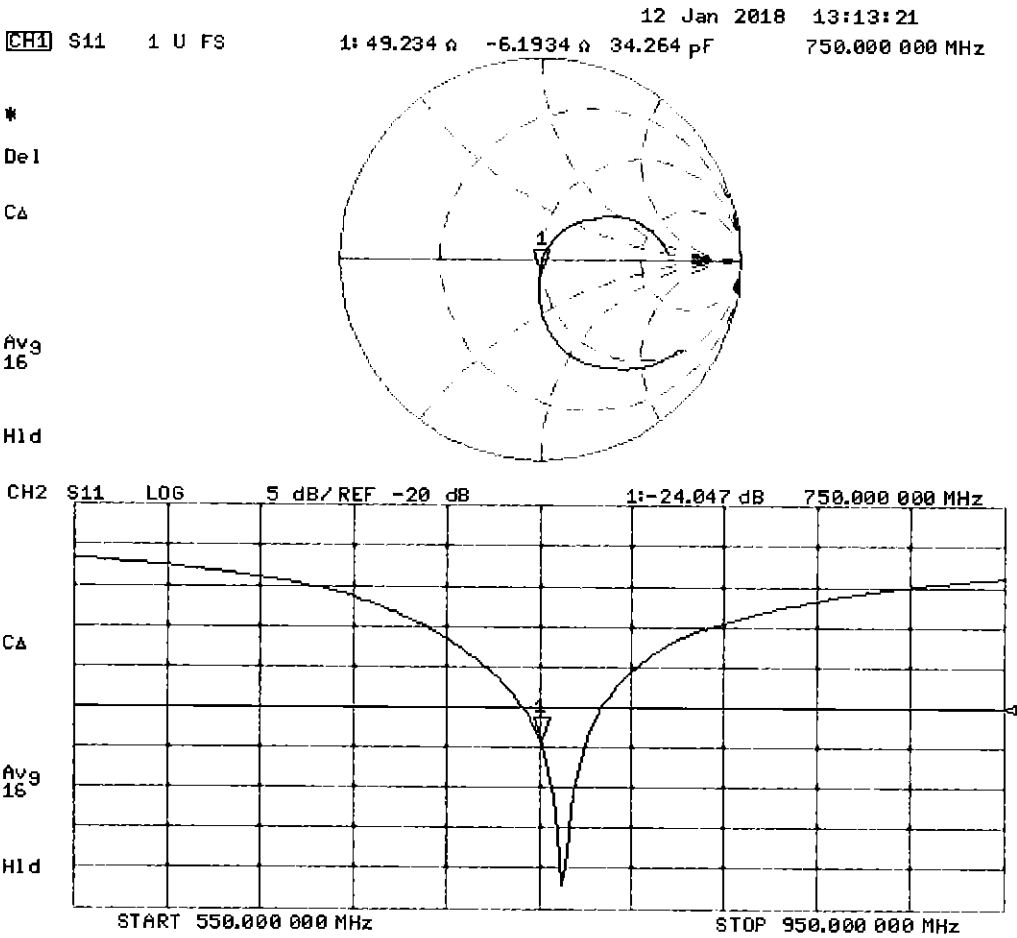

DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.56 W/kg



SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg

Maximum value of SAR (measured) = 2.11 W/kg

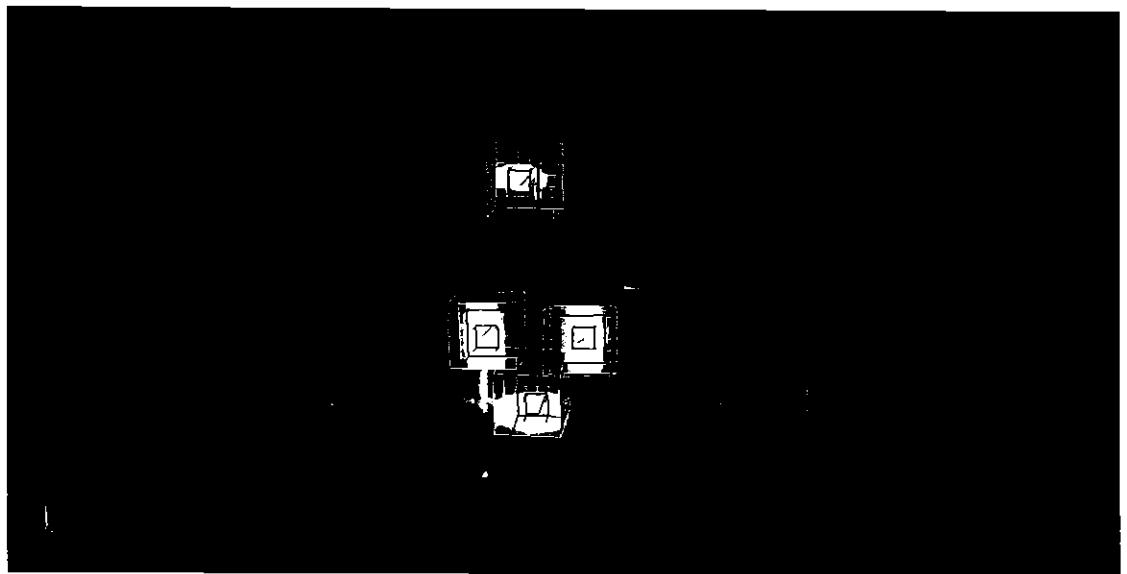

0 dB = 2.58 W/kg = 4.12 dBW/kg

Certification of Calibration

Object D750V3 – SN: 1003

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extension Calibration date: 1/15/2019

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	2/8/2018	Annual	2/8/2019	US39170122
Agilent	N5182A	MXG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY47420800
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Seekonk	NC-100	Torque Wrench	7/11/2018	Annual	7/11/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/3/2018	Annual	10/3/2019	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/11/2018	Annual	9/11/2019	1091
SPEAG	EX3DV4	SAR Probe	8/23/2018	Annual	8/23/2019	7308
SPEAG	EX3DV4	SAR Probe	6/25/2018	Annual	6/25/2019	7409

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
1/15/2018	1/15/2019	1.043	1.656	1.75	5.88%	1.08	1.15	6.09%	53.8	54.8	1	-2.1	-2.2	0.1	-27.6	-25.8	6.50%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
1/15/2018	1/15/2019	1.043	1.716	1.84	7.23%	1.14	1.23	7.71%	49.2	49	0.2	-6.2	-5.1	1.1	-24	-25.6	-6.80%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

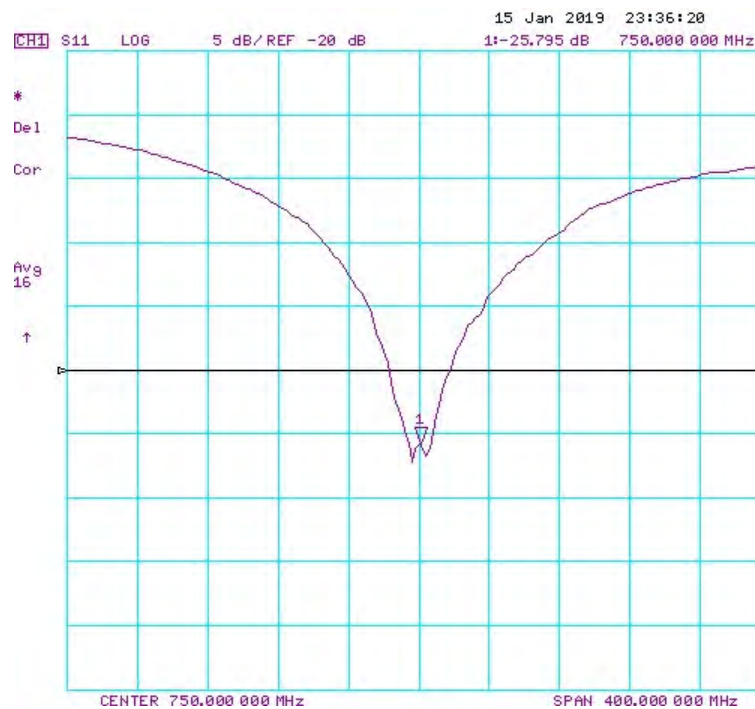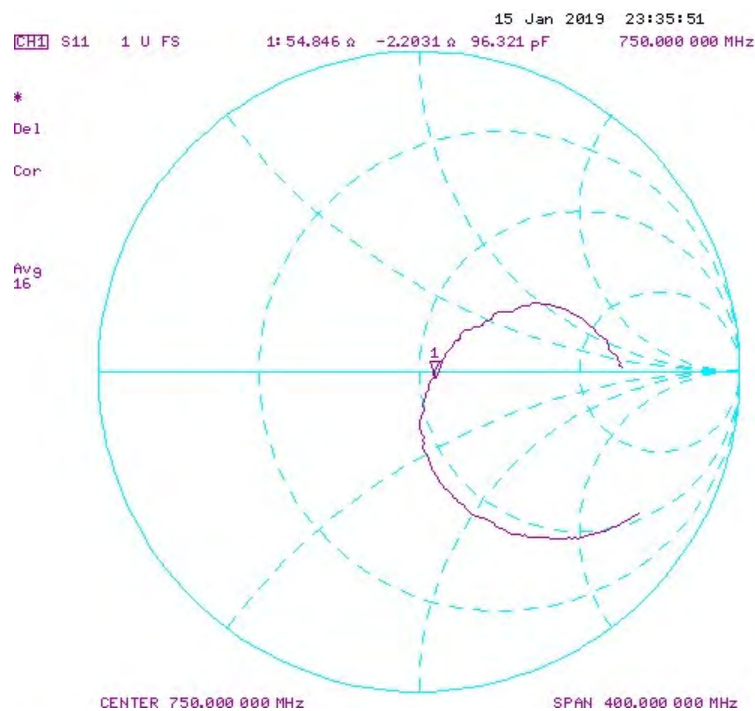

Impedance & Return-Loss Measurement Plot for Body TSL

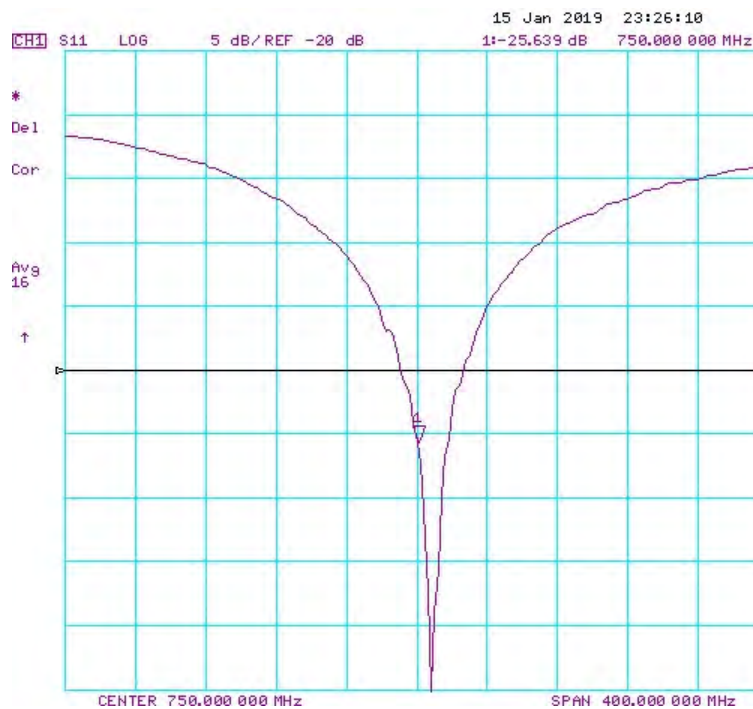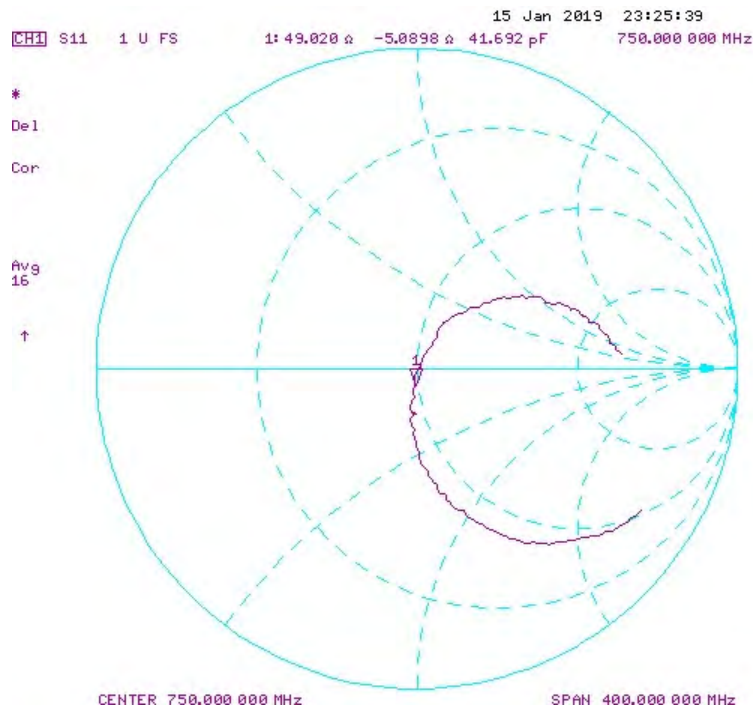



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D750V3-1161_Oct18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1161**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **October 19, 2018**

*BN ✓
10-30-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Manu Seitz** **Manu Seitz** **Manu Seitz**
Name Function Laboratory Technician

Approved by: **Katja Pokovic** **Katja Pokovic** **Katja Pokovic**
Name Function Technical Manager

Issued: October 22, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.8 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.02 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.03 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.26 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.1 \pm 6 %	0.96 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.43 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.39 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.55 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 Ω - 1.9 j Ω
Return Loss	- 25.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.6 Ω - 4.2 j Ω
Return Loss	- 27.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.032 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 19, 2015

DASY5 Validation Report for Head TSL

Date: 19.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.51 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.04 W/kg


SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 2.70 W/kg

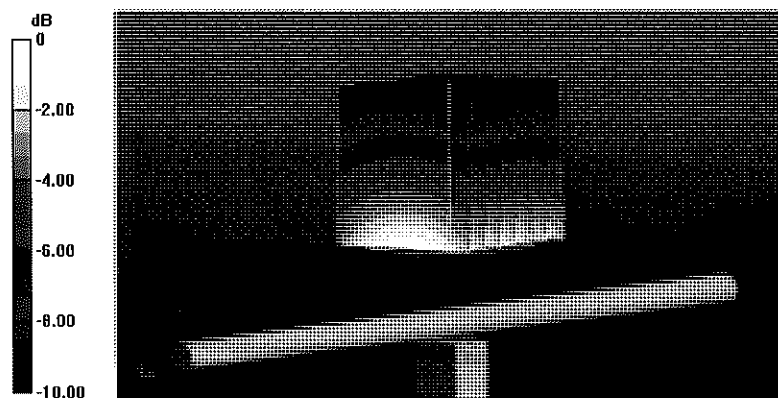

0 dB = 2.70 W/kg = 4.31 dBW/kg

Impedance Measurement Plot for Head TSL

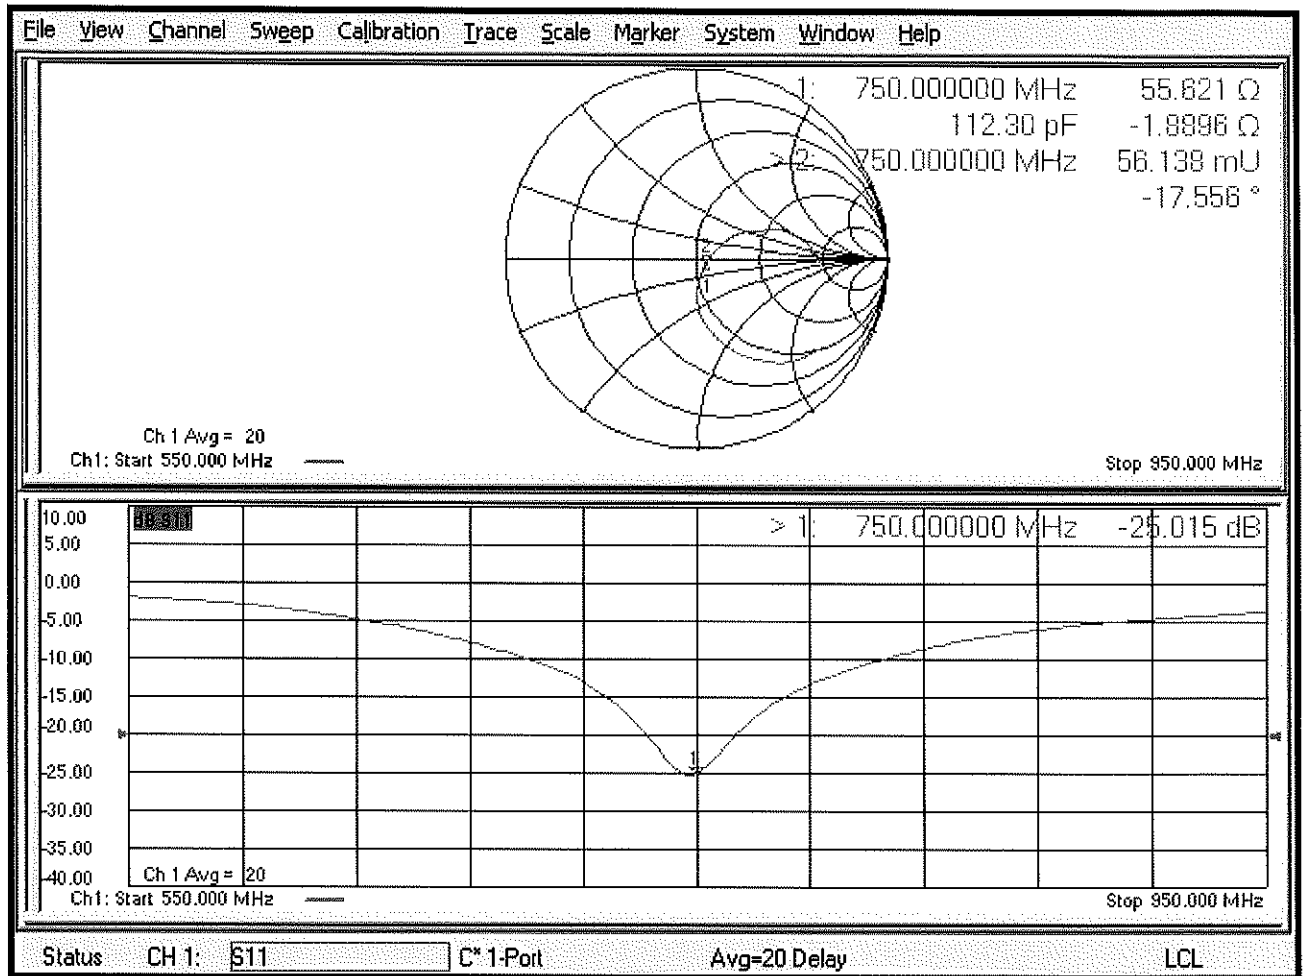

DASY5 Validation Report for Body TSL

Date: 19.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.57 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.18 W/kg


SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

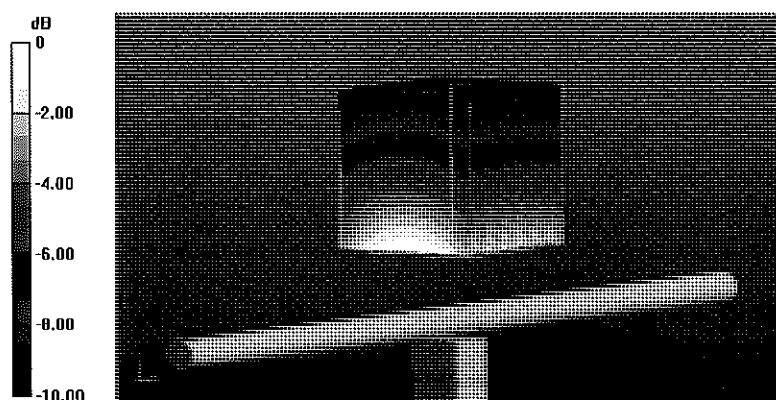

0 dB = 2.83 W/kg = 4.52 dBW/kg

Impedance Measurement Plot for Body TSL

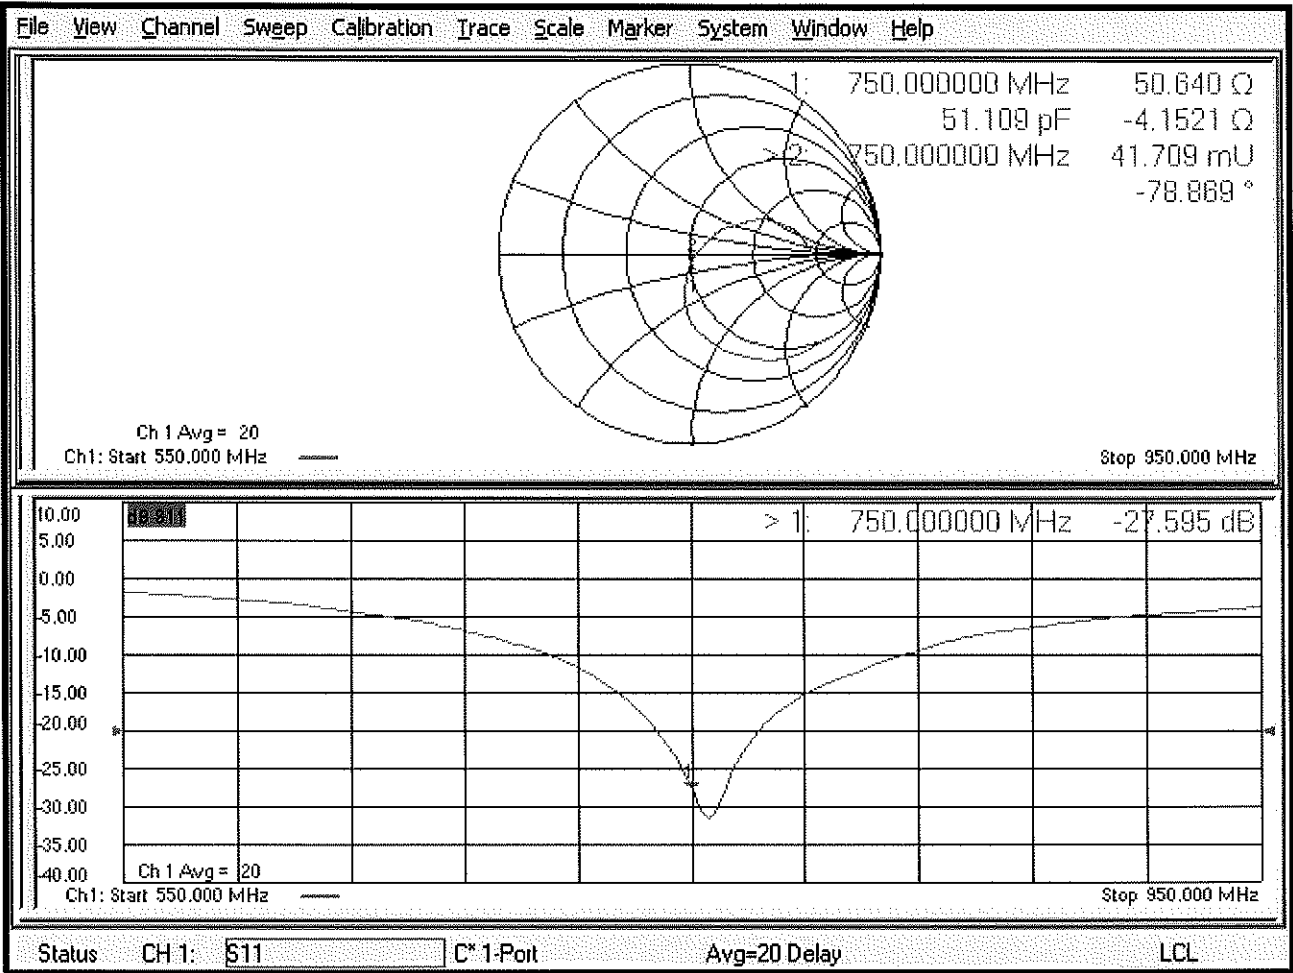



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D835V2-4d132_Jan19**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v11**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

BN ✓
02/06/2019

Calibration date: **January 22, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	31-Dec-18 (No. EX3-7349_Dec18)	Dec-19
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Leif Klysner** **Laboratory Technician**

Signature

Leif Klysner

Approved by: **Katja Pokovic** **Technical Manager**

Katja Pokovic

Issued: January 22, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.3 \pm 6 %	0.92 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.59 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.23 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.6 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.67 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.61 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.35 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.6 Ω - 3.6 j Ω
Return Loss	- 28.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 Ω - 6.2 j Ω
Return Loss	- 23.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.387 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------