




Horizontal/Vertical for 1 GHz ~ 3.5 GHz

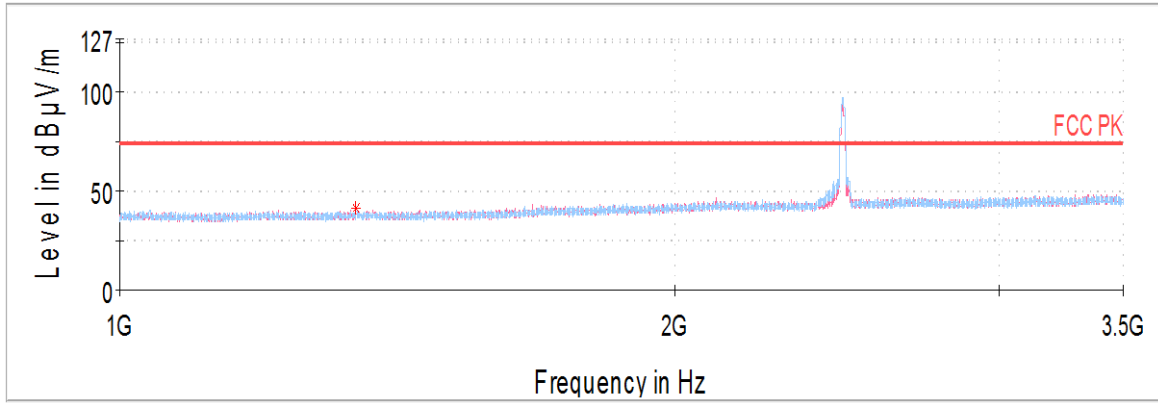

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

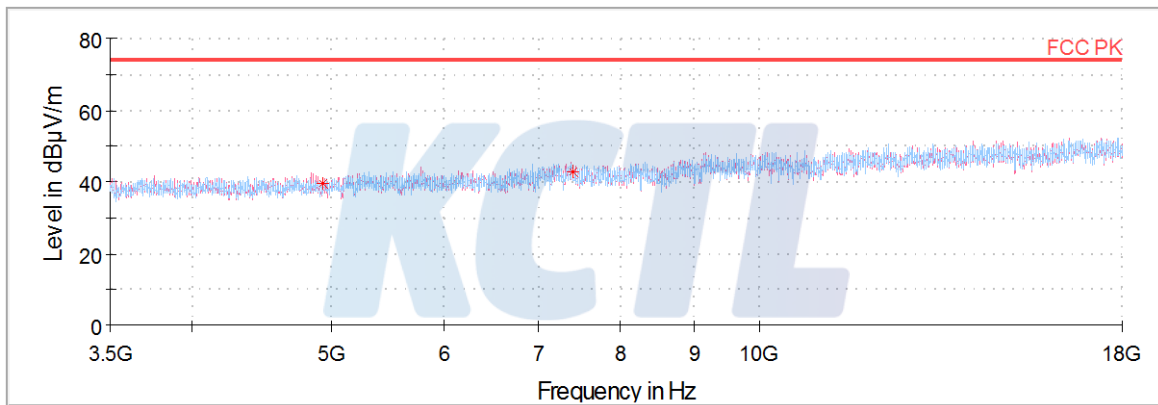

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

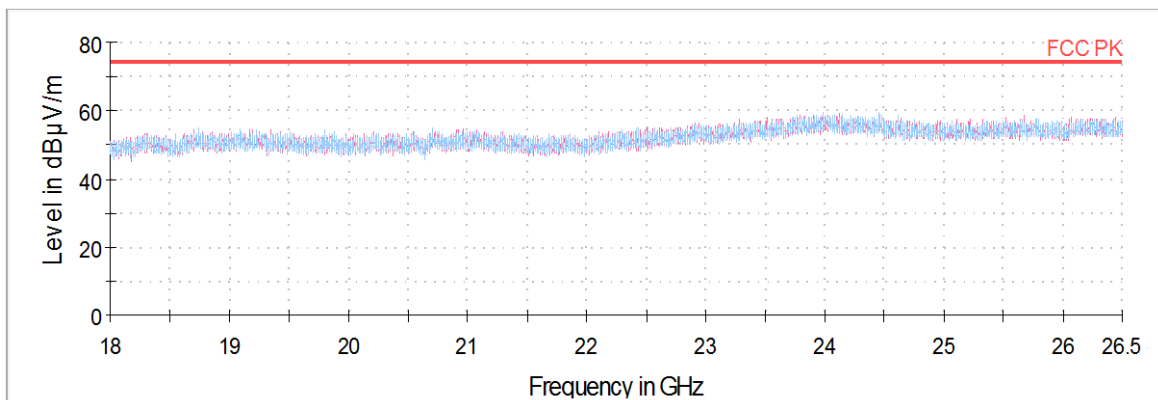

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (41) of (78)




13 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 330.86 ¹⁾	V	49.43	2.78	- 36.64	25.12	-	40.70	74.00	33.30
2 484.21 ¹⁾	H	54.07	3.77	- 30.29	28.72	-	56.27	74.00	17.73
4 944.56 ¹⁾	V	63.97	5.43	- 60.82	32.87	-	41.45	74.00	32.55
7 416.36 ¹⁾	H	61.47	6.80	- 61.76	36.12	-	42.63	74.00	31.37
Average Data									
2 484.21 ¹⁾	H	46.84	3.77	- 30.29	28.72	-	49.04	54.00	4.96

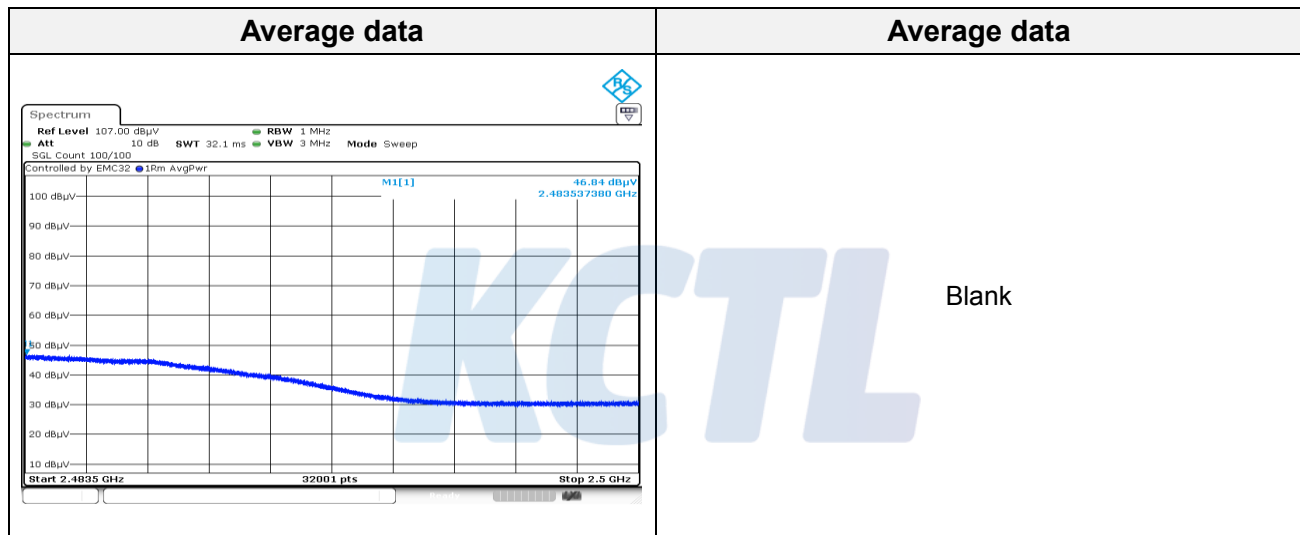


Horizontal/Vertical for Band-edge

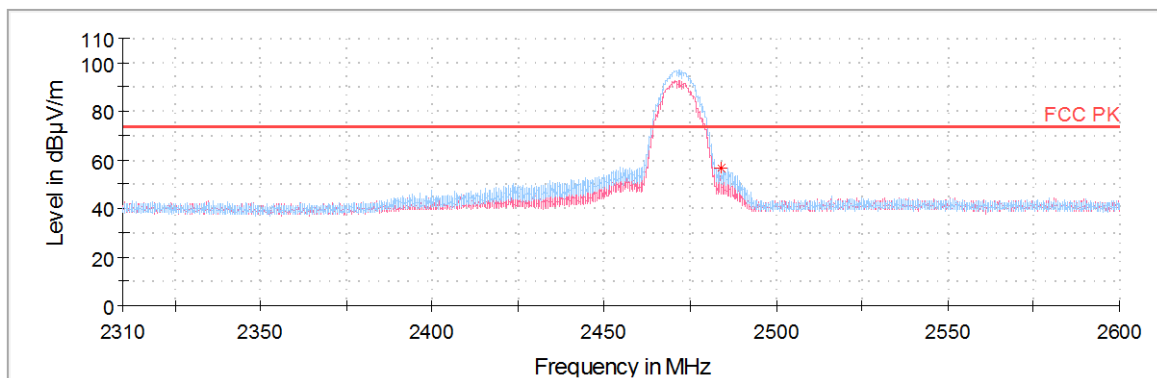


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

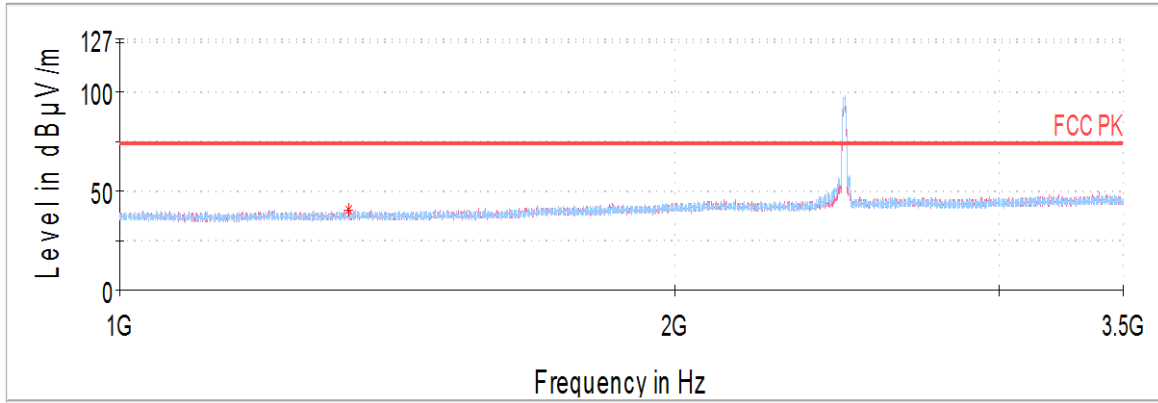

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

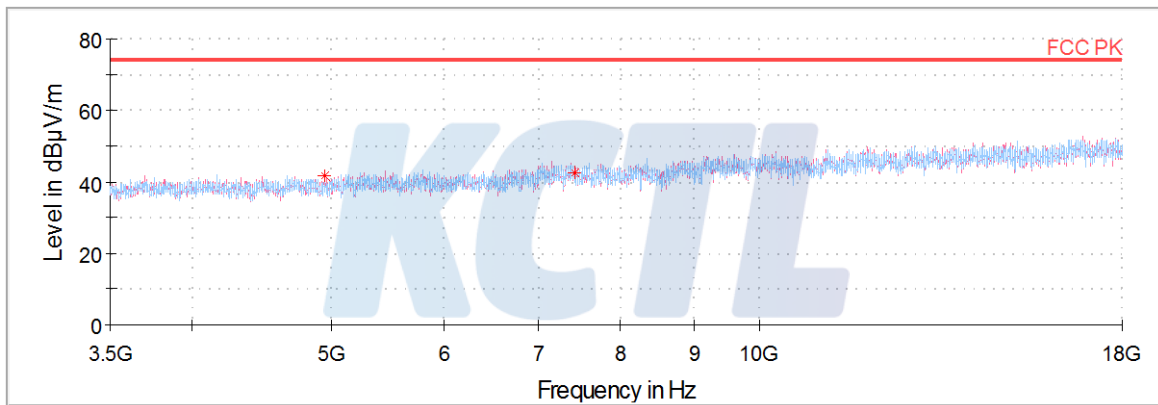



Horizontal/Vertical for 18 GHz ~ 26.5 GHz

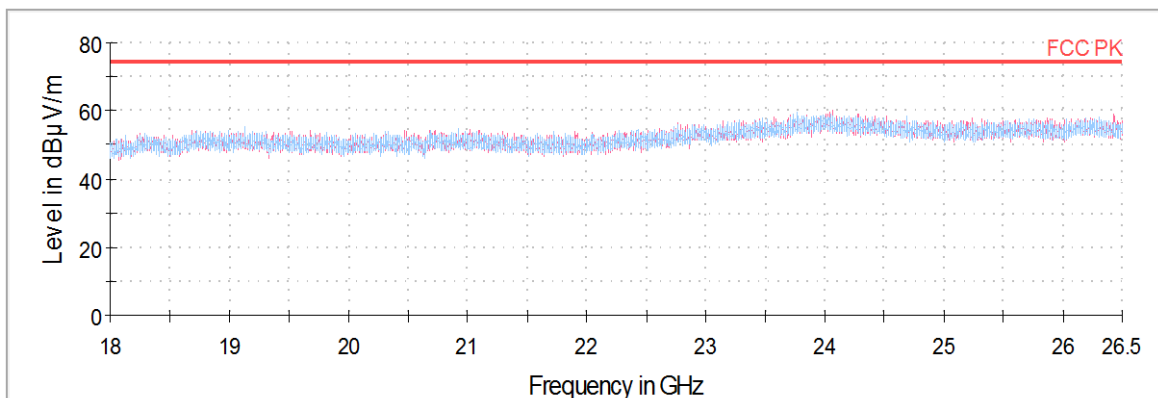


802.11g

1 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 366.25 ¹⁾	H	50.03	2.82	- 36.82	25.27	-	41.30	74.00	32.70
2 389.89 ¹⁾	H	61.08	3.70	- 30.01	28.54	-	63.31	74.00	10.69
4 824.94 ¹⁾	V	62.38	5.35	- 60.89	32.81	-	39.65	74.00	34.35
7 326.64 ¹⁾	V	60.91	6.76	- 61.59	36.03	-	42.11	74.00	31.89
Average Data									
2 389.89 ¹⁾	H	46.61	3.70	- 30.01	28.54	0.29	49.13	54.00	4.87

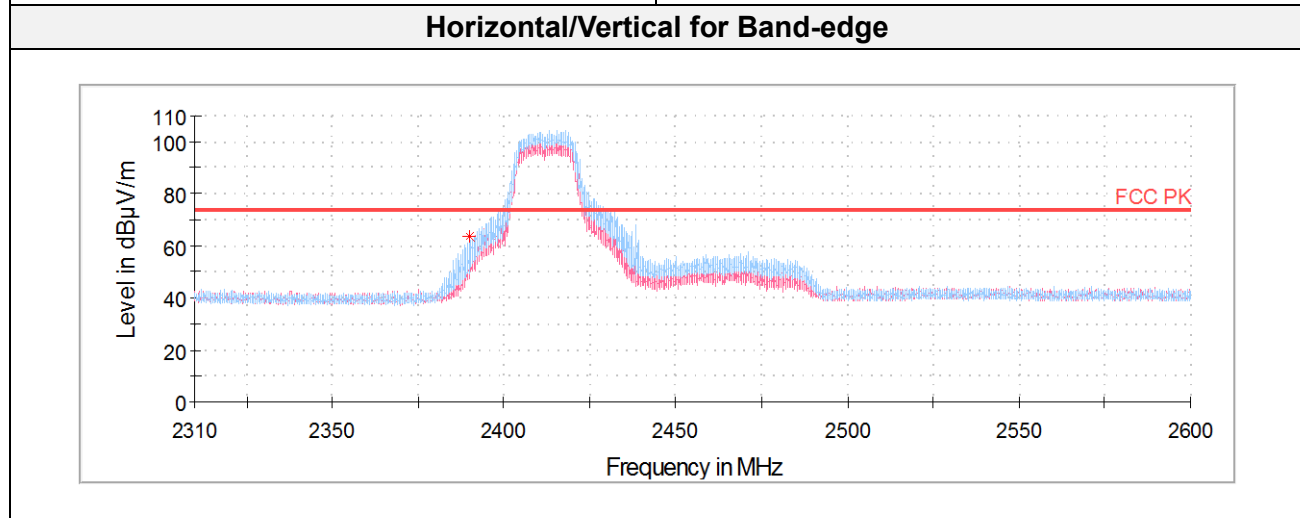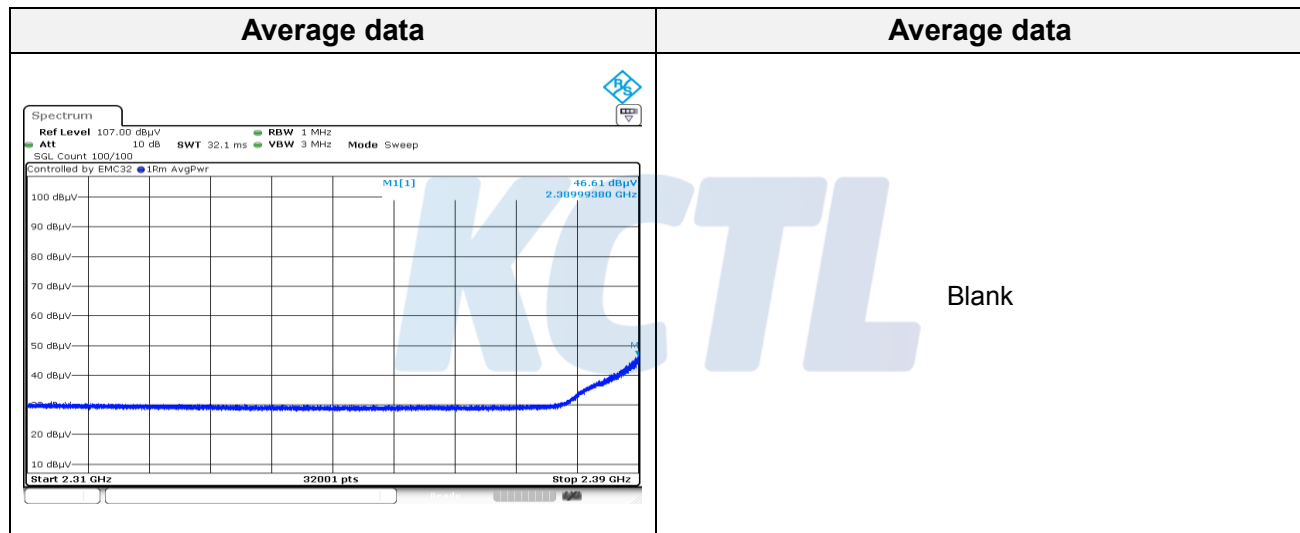


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

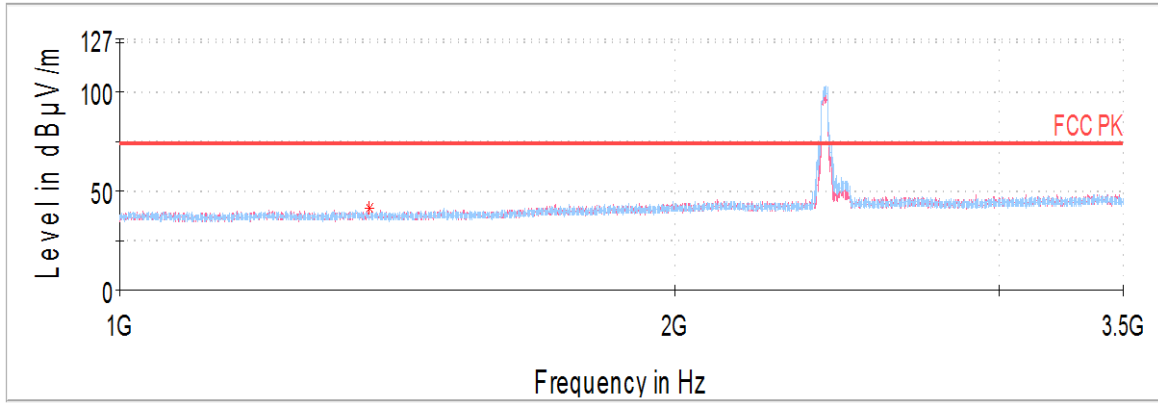

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

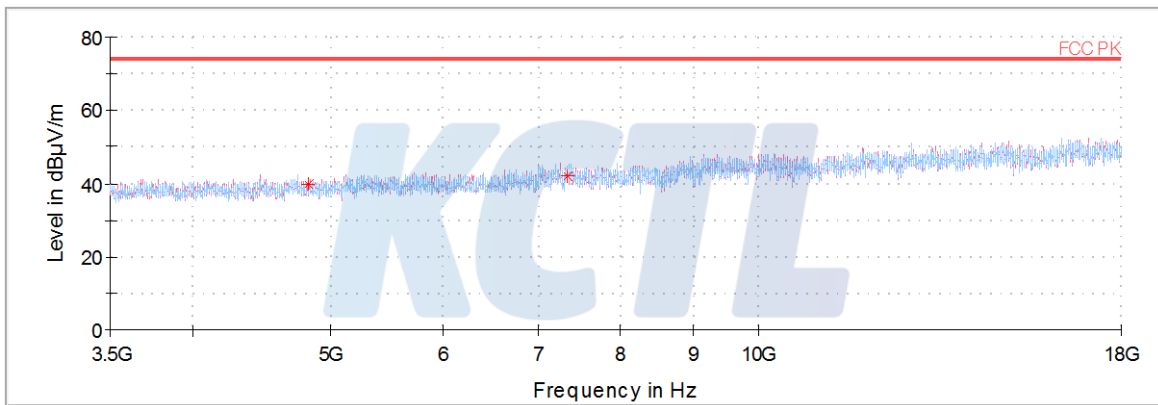

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

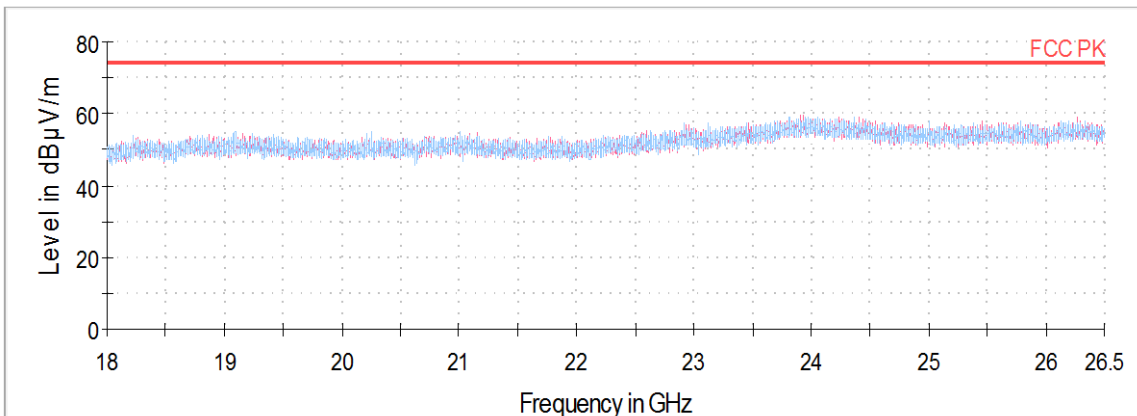

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0038


Page (45) of (78)

KCTL**6 Channel**


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data									
1 343.28 ¹⁾	H	50.78	2.80	- 36.71	25.17	-	42.04	74.00	31.96
4 874.33 ¹⁾	V	62.86	5.39	- 61.05	32.84	-	40.04	74.00	33.96
7 311.23 ¹⁾	H	63.08	6.75	- 61.56	36.01	-	44.28	74.00	29.72
Average Data									
No spurious emissions were detected within 20 dB of the limit.									

KCTL


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

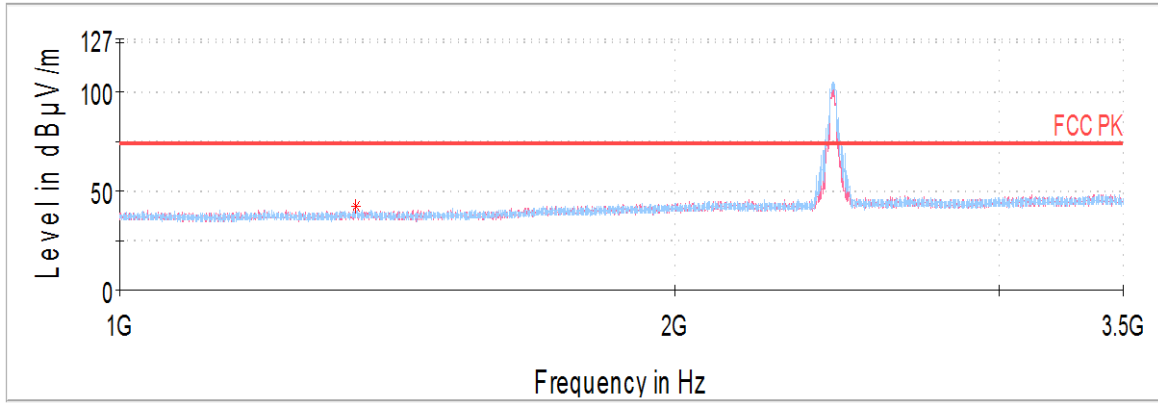

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

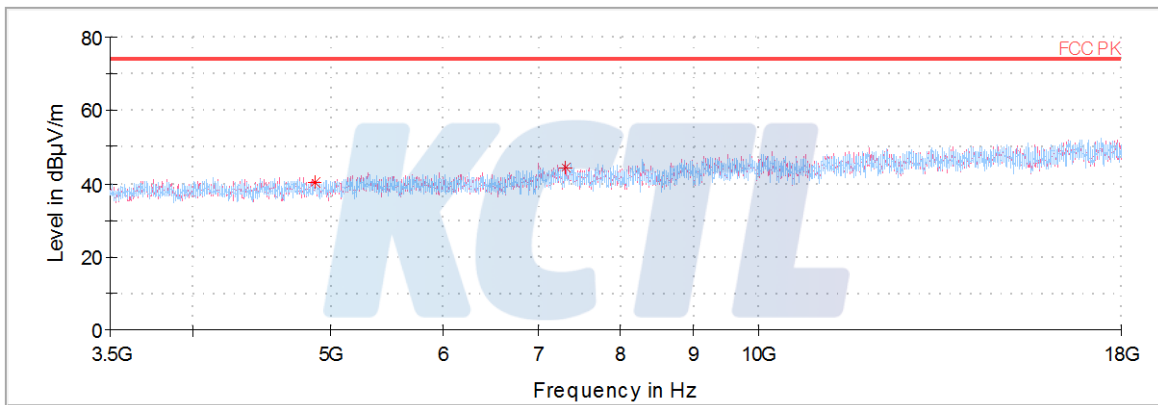

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

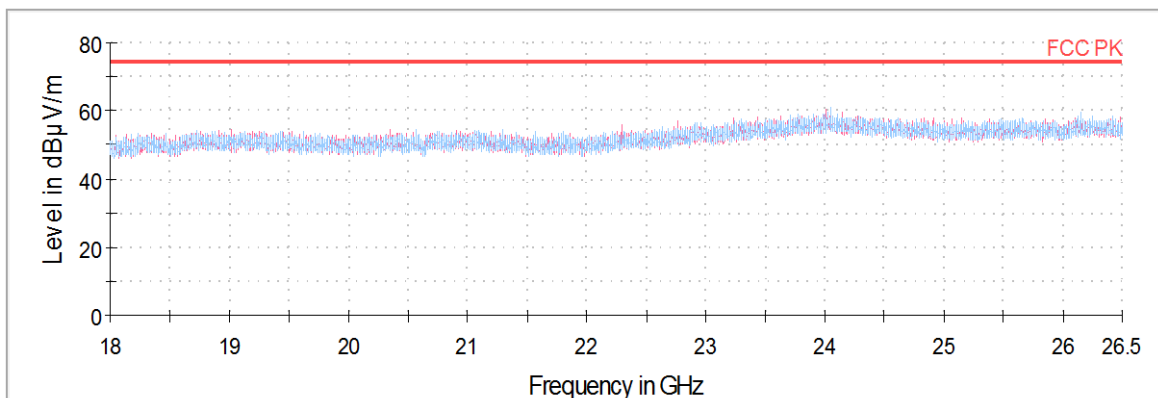

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (47) of (78)




10 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 344.45 ¹⁾	H	49.77	2.80	- 36.72	25.18	-	41.03	74.00	32.97
2 483.53 ¹⁾	H	60.47	3.77	- 30.29	28.72	-	62.67	74.00	11.33
4 914.66 ¹⁾	V	61.22	5.41	- 61.02	32.86	-	38.47	74.00	35.53
7 371.05 ¹⁾	H	63.65	6.78	- 61.67	36.07	-	44.83	74.00	29.17
Average Data									
2 483.53 ¹⁾	H	46.60	3.77	- 30.29	28.72	0.29	49.09	54.00	4.91

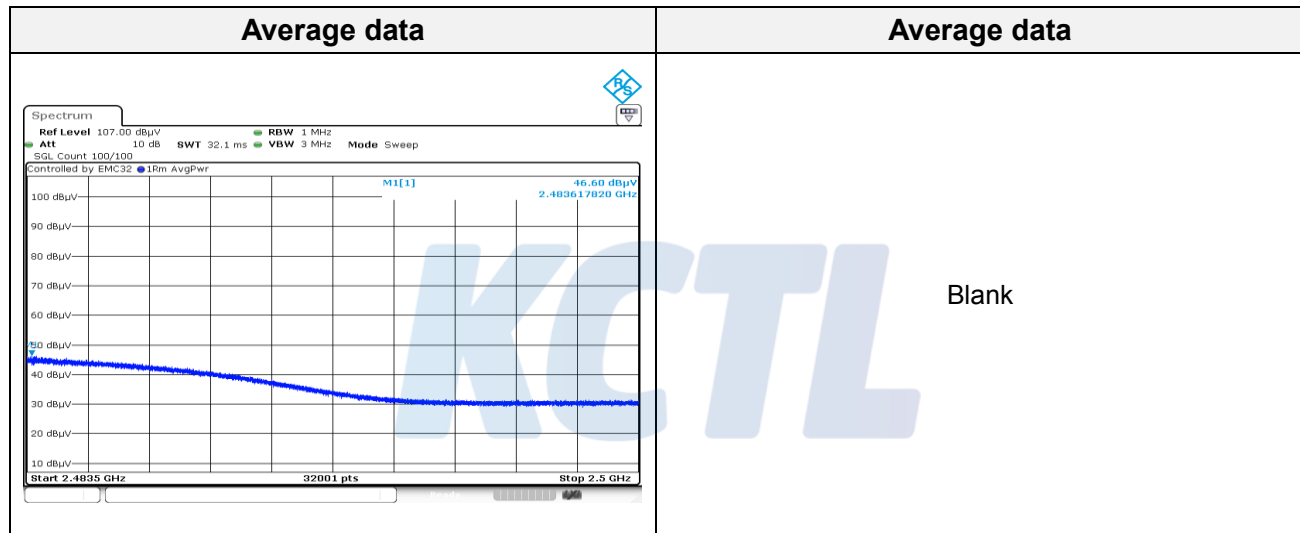


Horizontal/Vertical for Band-edge

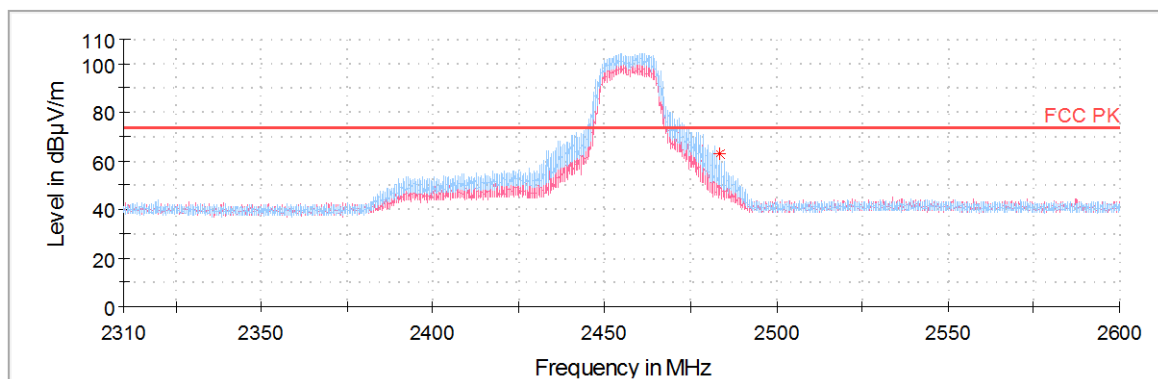


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

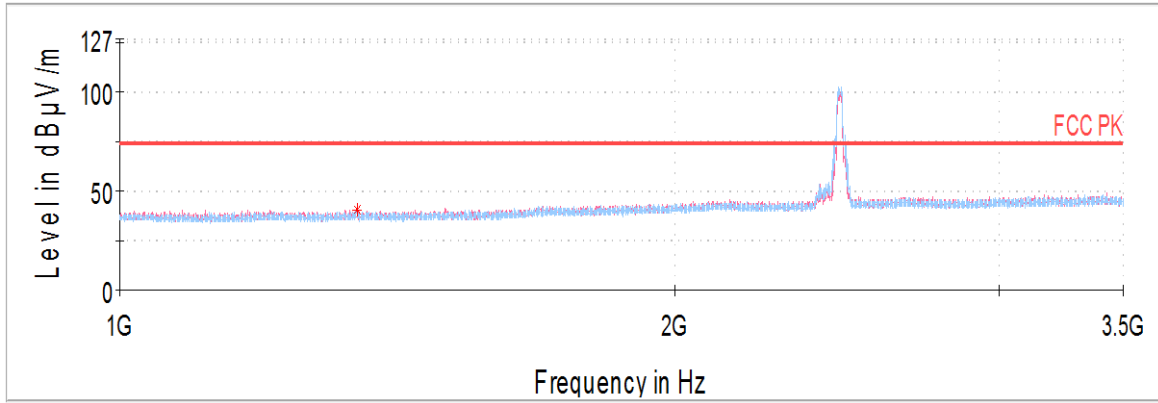

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

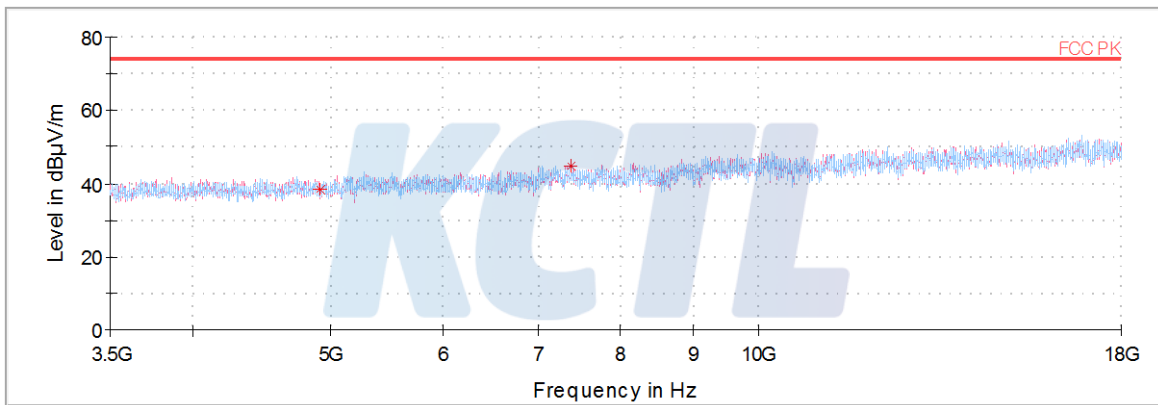

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

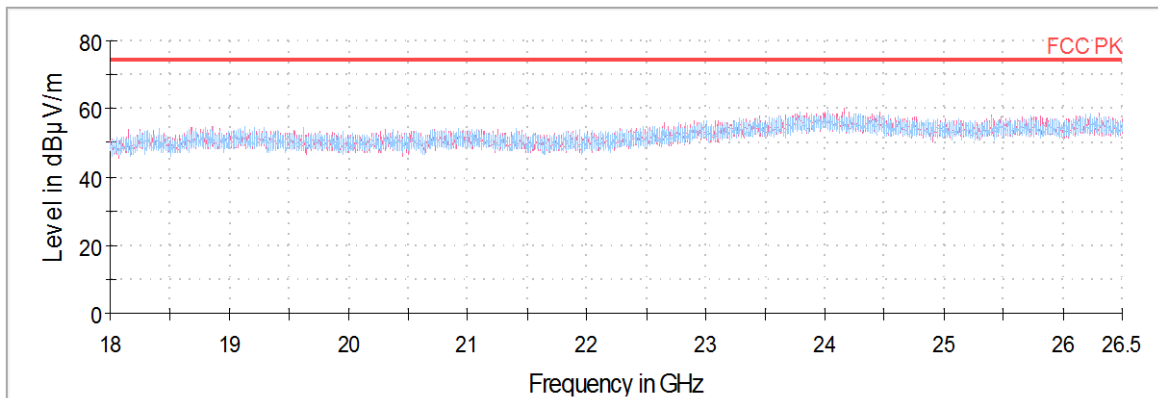

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (49) of (78)




11 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 343.91 ¹⁾	H	49.49	2.80	- 36.72	25.18	-	40.75	74.00	33.25
2 483.68 ¹⁾	H	58.09	3.77	- 30.29	28.72	-	60.29	74.00	13.71
4 924.63 ¹⁾	V	61.83	5.42	- 60.95	32.86	-	39.16	74.00	34.84
7 386.91 ¹⁾	H	63.26	6.79	- 61.71	36.09	-	44.43	74.00	29.57
Average Data									
2 483.68 ¹⁾	H	46.88	3.77	- 30.29	28.72	0.29	49.37	54.00	4.63

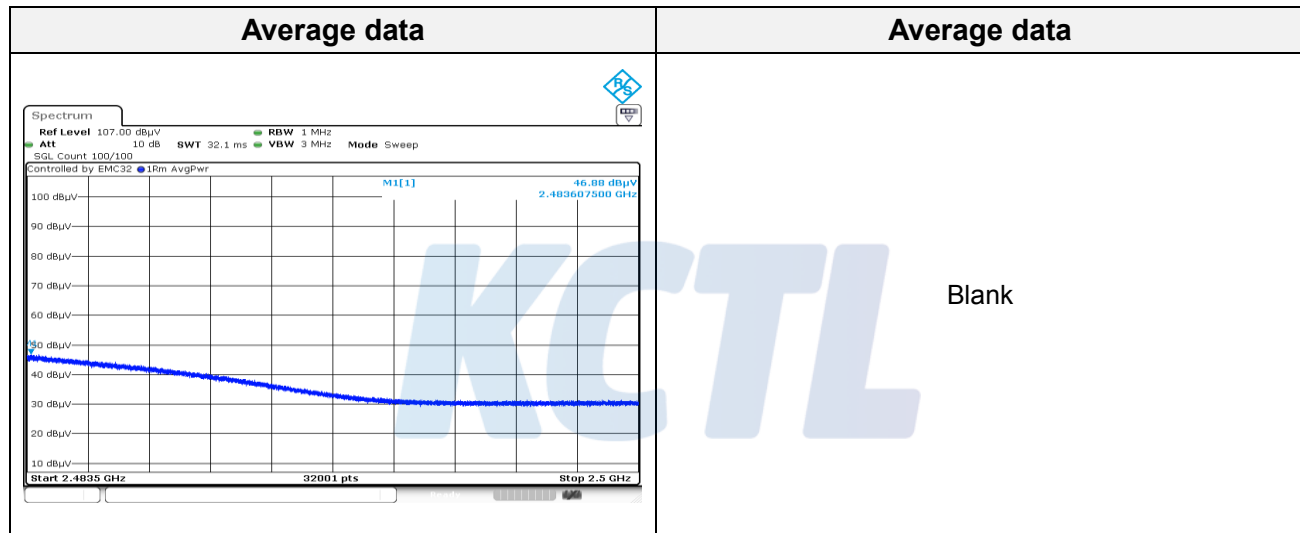


Horizontal/Vertical for Band-edge

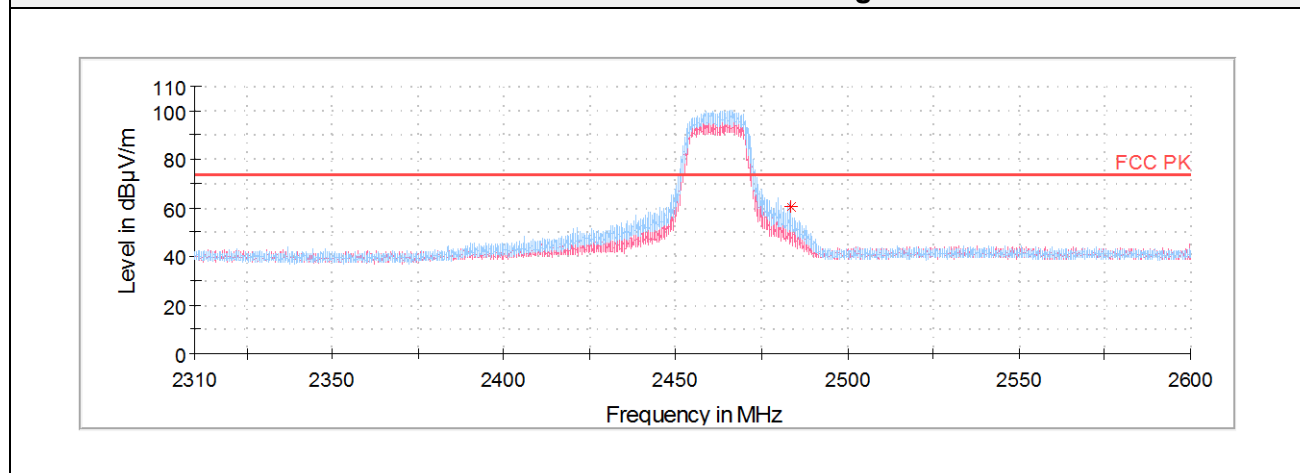


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

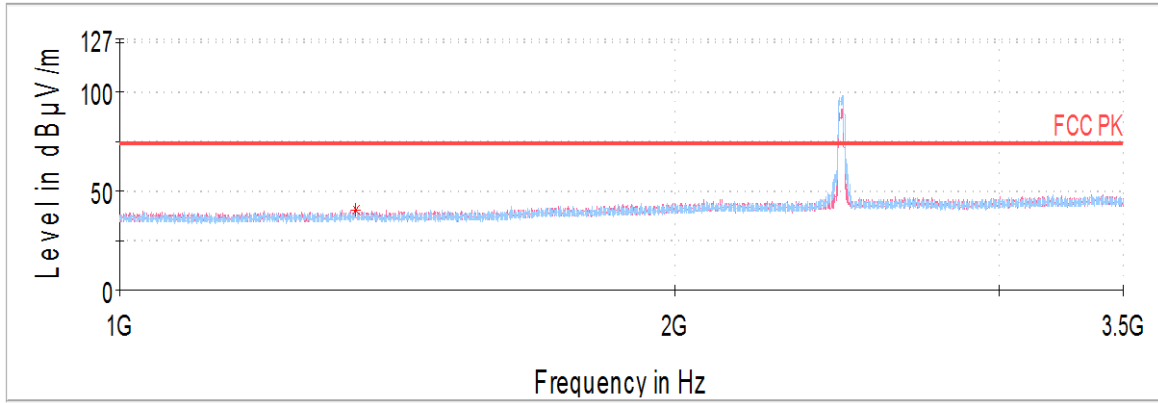

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

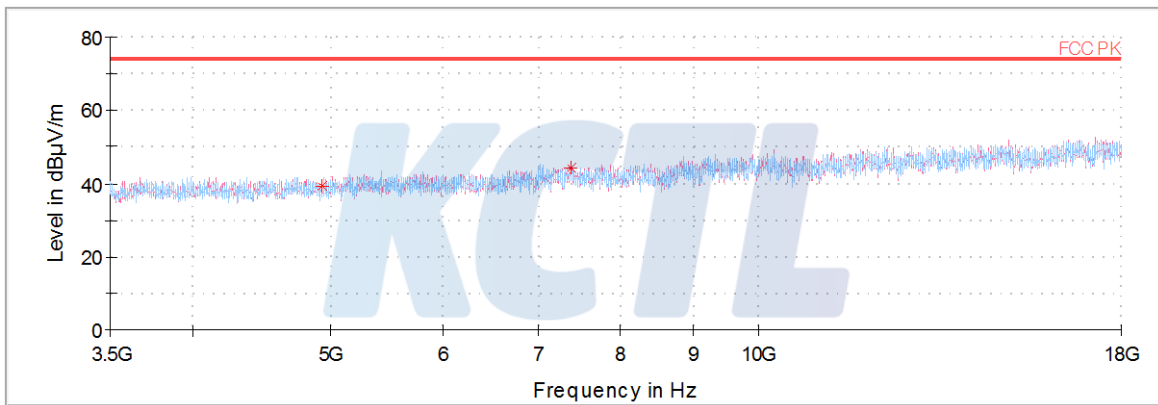

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

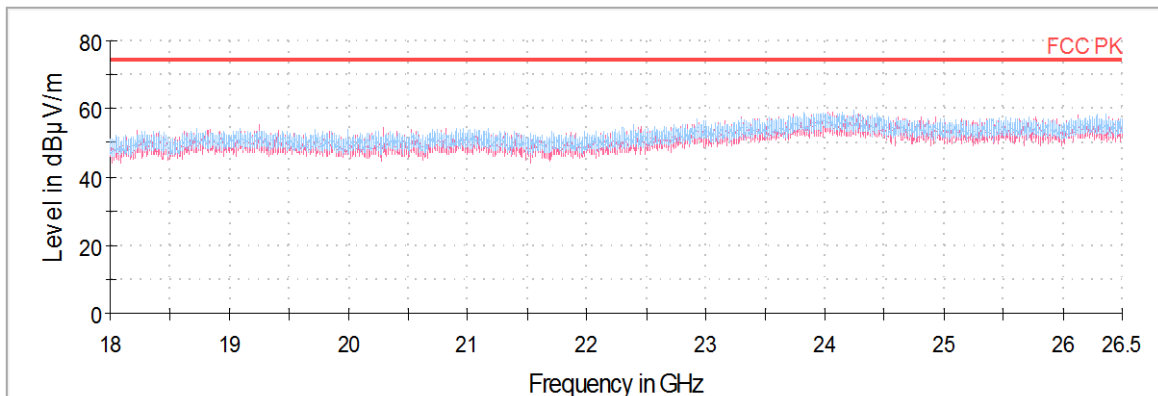

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (51) of (78)




12 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 343.98 ¹⁾	H	49.77	2.80	- 36.72	25.18	-	41.03	74.00	32.97
2 483.87 ¹⁾	H	55.25	3.77	- 30.29	28.72	-	57.45	74.00	16.55
4 934.14 ¹⁾	V	61.20	5.43	- 60.90	32.87	-	38.60	74.00	35.40
7 401.41 ¹⁾	H	62.06	6.79	- 61.73	36.10	-	43.22	74.00	30.78
Average Data									
2 483.87 ¹⁾	H	46.78	3.77	- 30.29	28.72	0.29	49.27	54.00	4.73

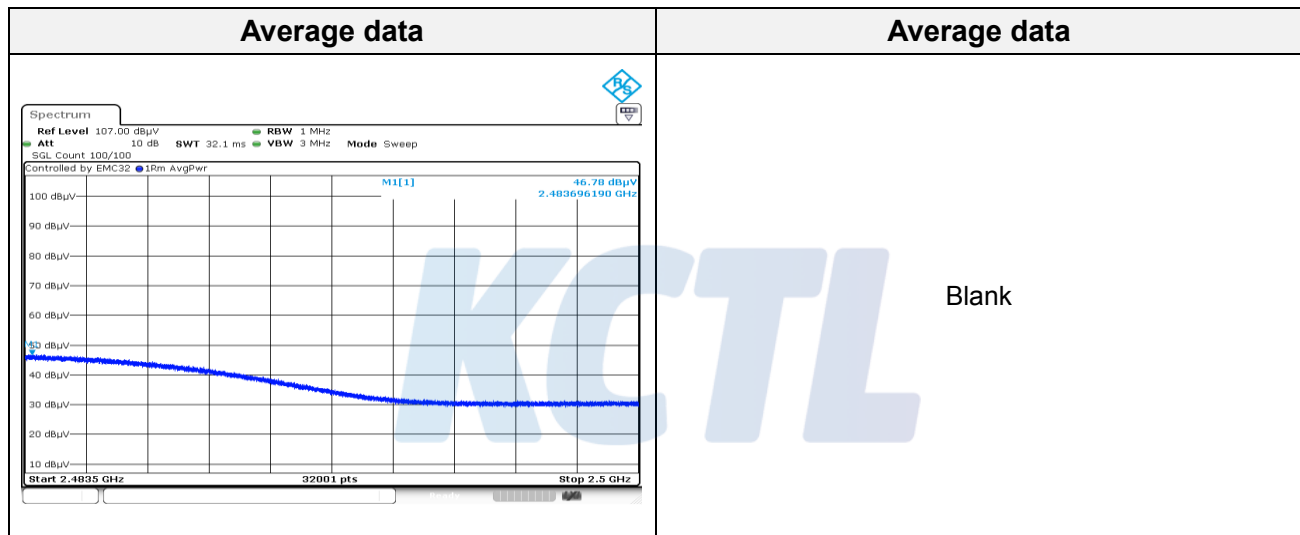


Horizontal/Vertical for Band-edge

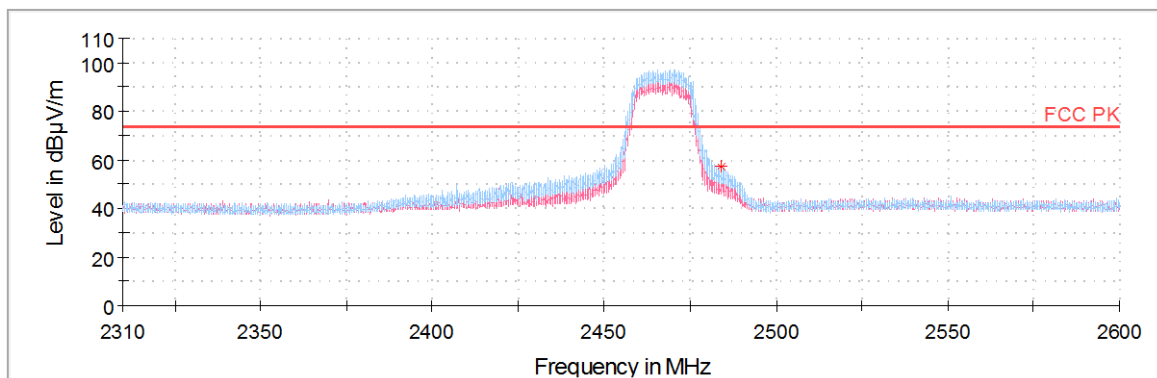


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

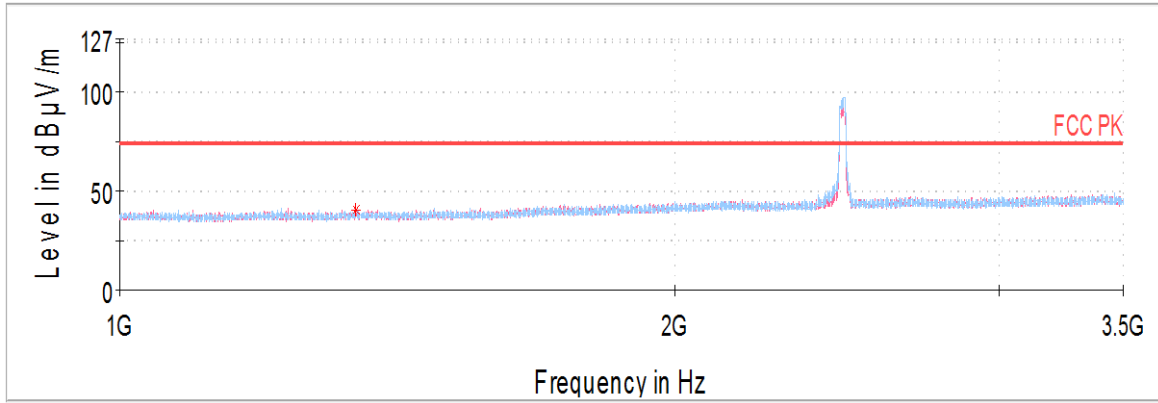

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

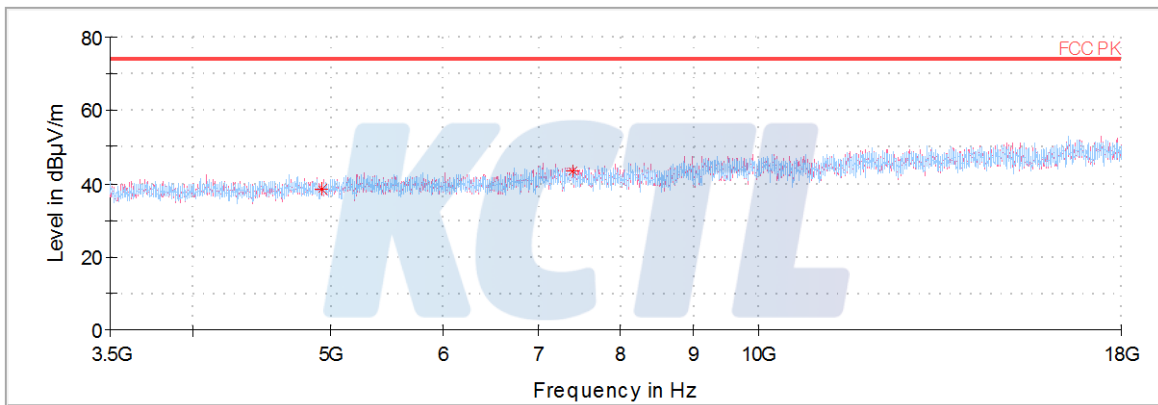

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

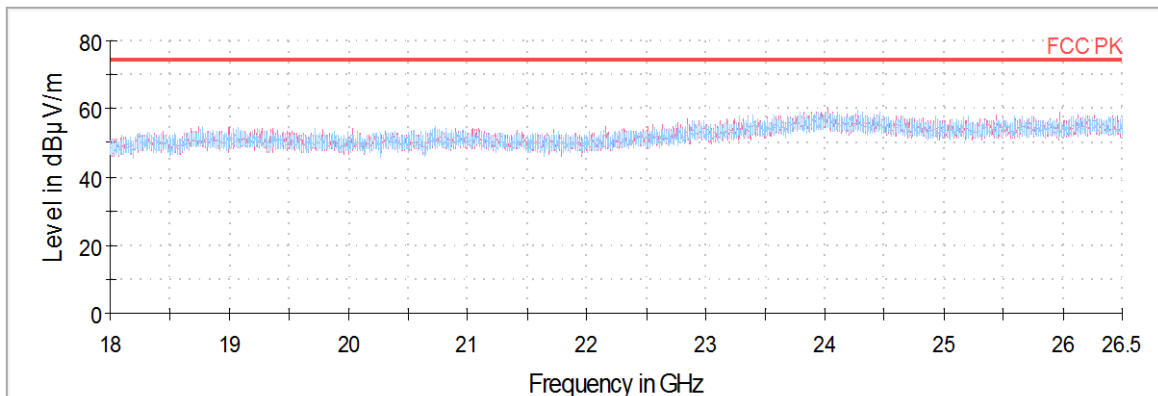

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (53) of (78)




13 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 344.14 ¹⁾	H	50.32	2.80	- 36.72	25.18	-	41.58	74.00	32.42
2 483.58 ¹⁾	H	57.57	3.77	- 30.29	28.72	-	59.77	74.00	14.23
4 944.11 ¹⁾	V	62.19	5.43	- 60.82	32.87	-	39.67	74.00	34.33
7 416.36 ¹⁾	H	61.12	6.80	- 61.76	36.12	-	42.28	74.00	31.72
Average Data									
2 483.58 ¹⁾	H	47.47	3.77	- 30.29	28.72	0.29	49.96	54.00	4.04

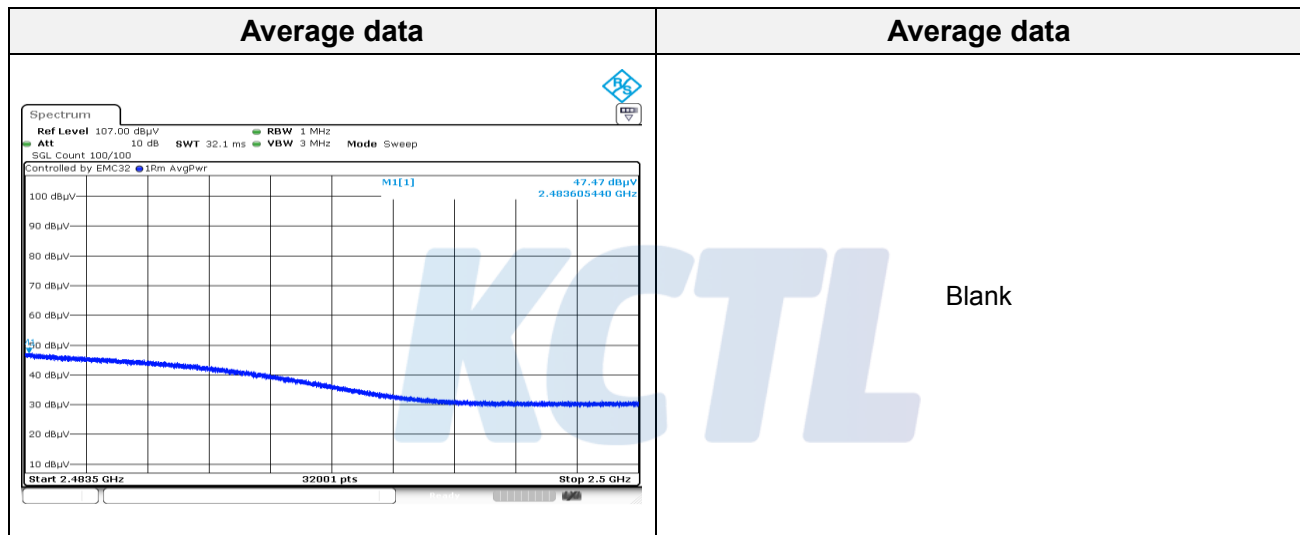


Horizontal/Vertical for Band-edge

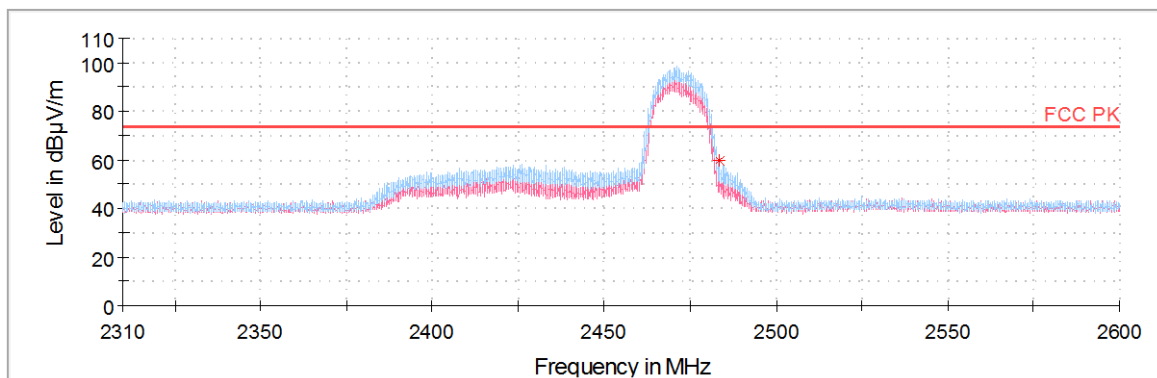


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

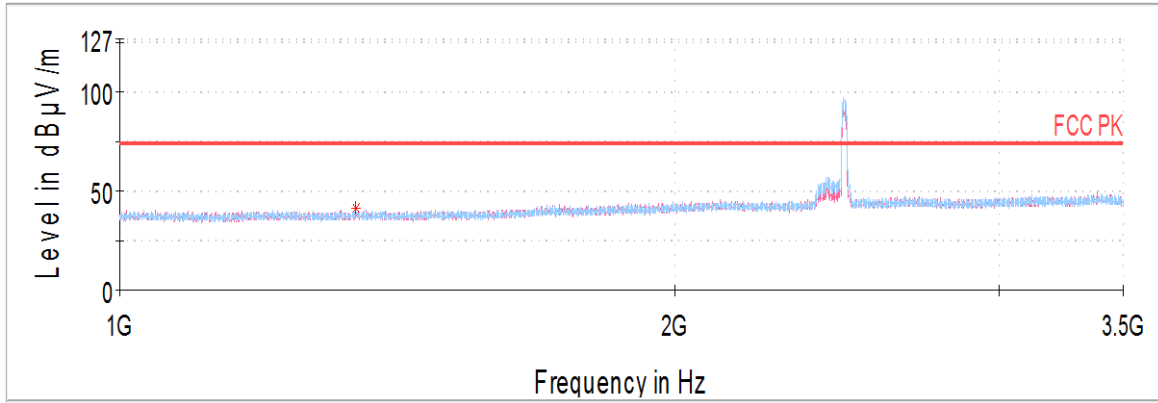

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

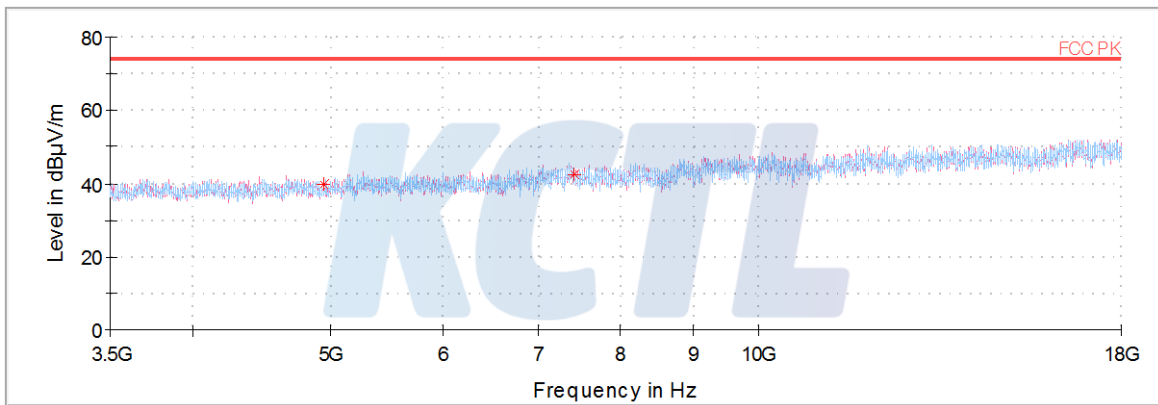

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

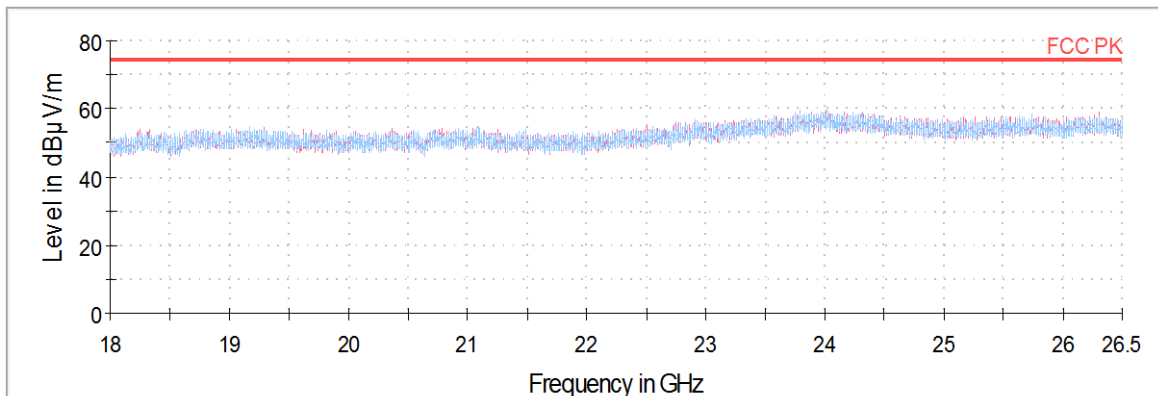

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0038


Page (55) of (78)




802.11n20

1 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 343.83 ¹⁾	H	49.76	2.80	- 36.72	25.18	-	41.02	74.00	32.98
2 389.73 ¹⁾	H	62.69	3.70	- 30.01	28.54	-	64.92	74.00	9.08
4 824.03 ¹⁾	V	63.10	5.35	- 60.89	32.81	-	40.37	74.00	33.63
7 236.47	H	61.90	6.72	- 61.42	35.94	-	43.14	74.00	30.86
Average Data									
2 389.73 ¹⁾	H	47.46	3.70	- 30.01	28.54	0.31	50.00	54.00	4.00

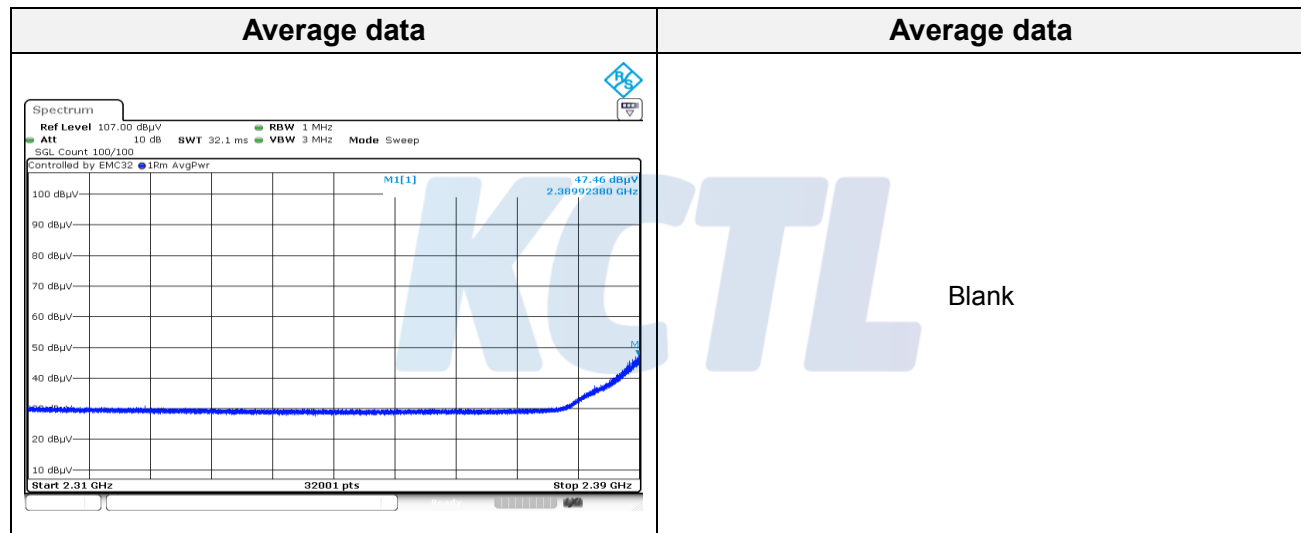


Horizontal/Vertical for Band-edge

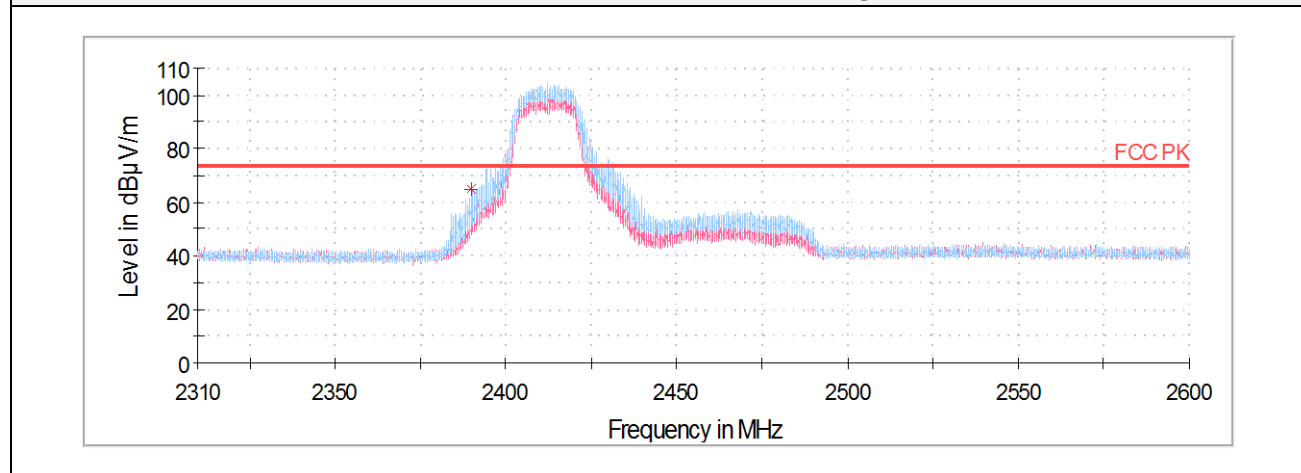


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

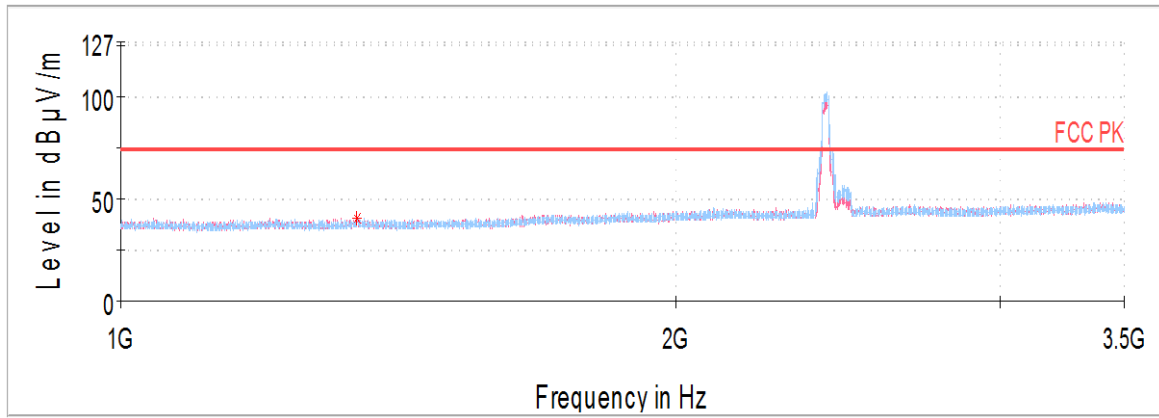

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

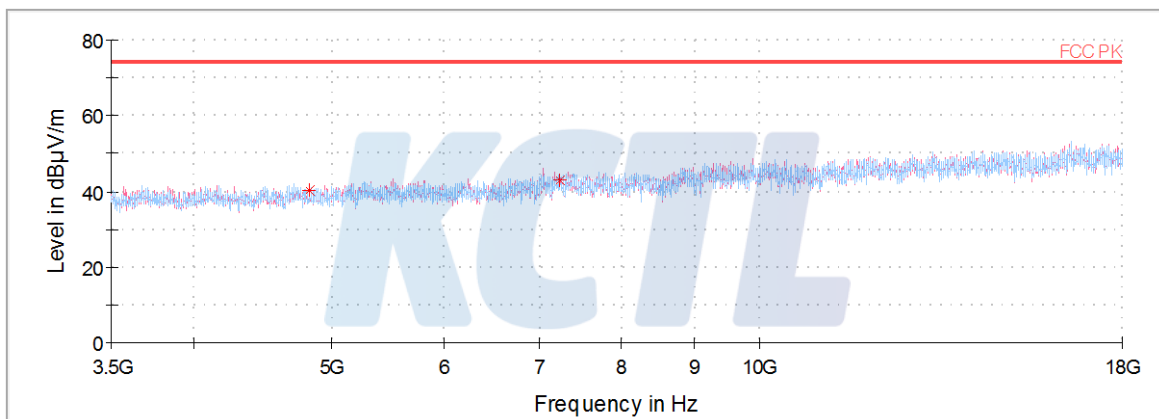

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

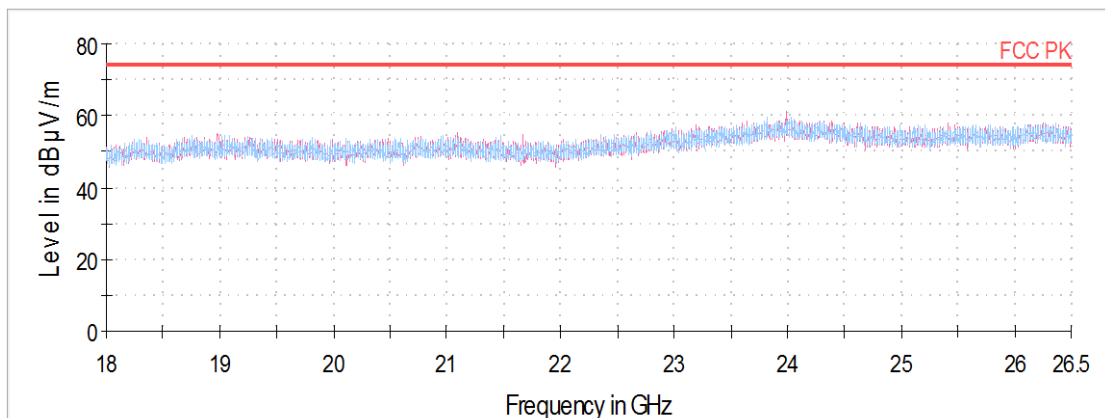

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0038


Page (57) of (78)

**6 Channel**


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data									
1 344.22 ¹⁾	H	49.47	2.80	- 36.72	25.18	-	40.73	74.00	33.27
4 874.78 ¹⁾	H	63.78	5.39	- 61.05	32.84	-	40.96	74.00	33.04
7 311.69 ¹⁾	V	61.77	6.75	- 61.56	36.01	-	42.97	74.00	31.03
Average Data									
No spurious emissions were detected within 20 dB of the limit.									




Horizontal/Vertical for 1 GHz ~ 3.5 GHz

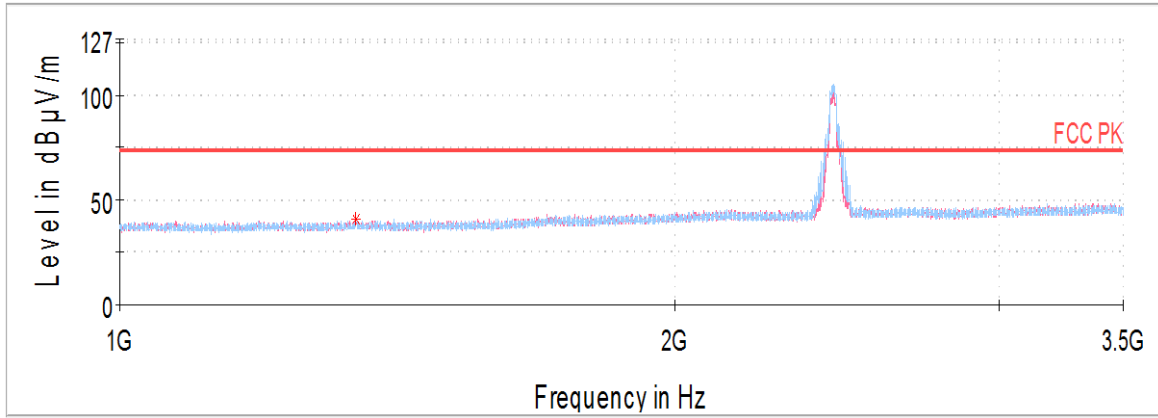

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

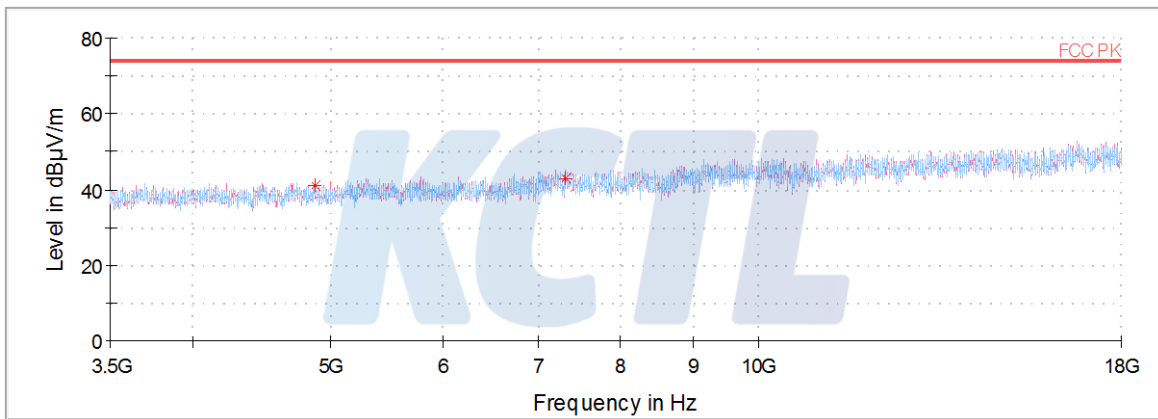

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

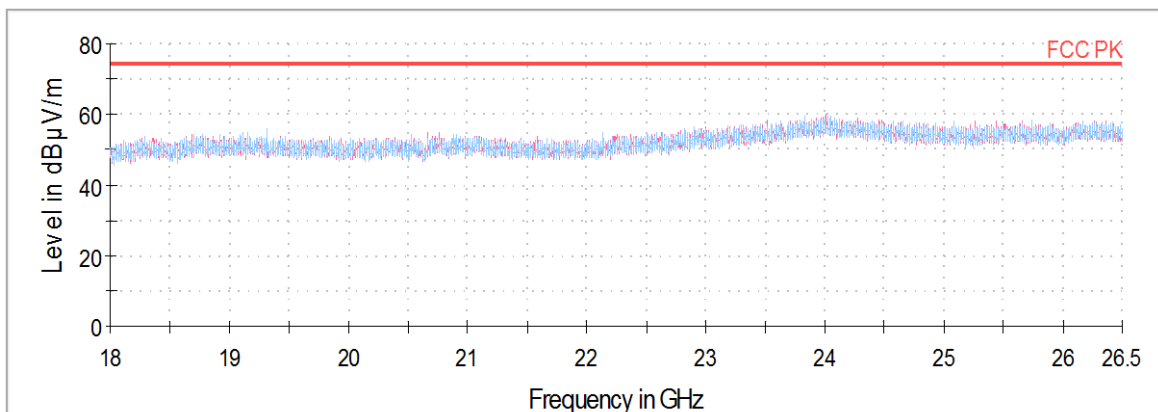

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (59) of (78)




10 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 344.14 ¹⁾	H	50.14	2.80	- 36.72	25.18	-	41.40	74.00	32.60
2 483.92 ¹⁾	H	62.06	3.77	- 30.29	28.72	-	64.26	74.00	9.74
4 914.20 ¹⁾	V	60.58	5.41	- 61.03	32.86	-	37.82	74.00	36.18
7 371.05 ¹⁾	V	62.01	6.78	- 61.67	36.07	-	43.19	74.00	30.81
Average Data									
2 483.92 ¹⁾	H	46.86	3.77	- 30.29	28.72	0.31	49.37	54.00	4.63

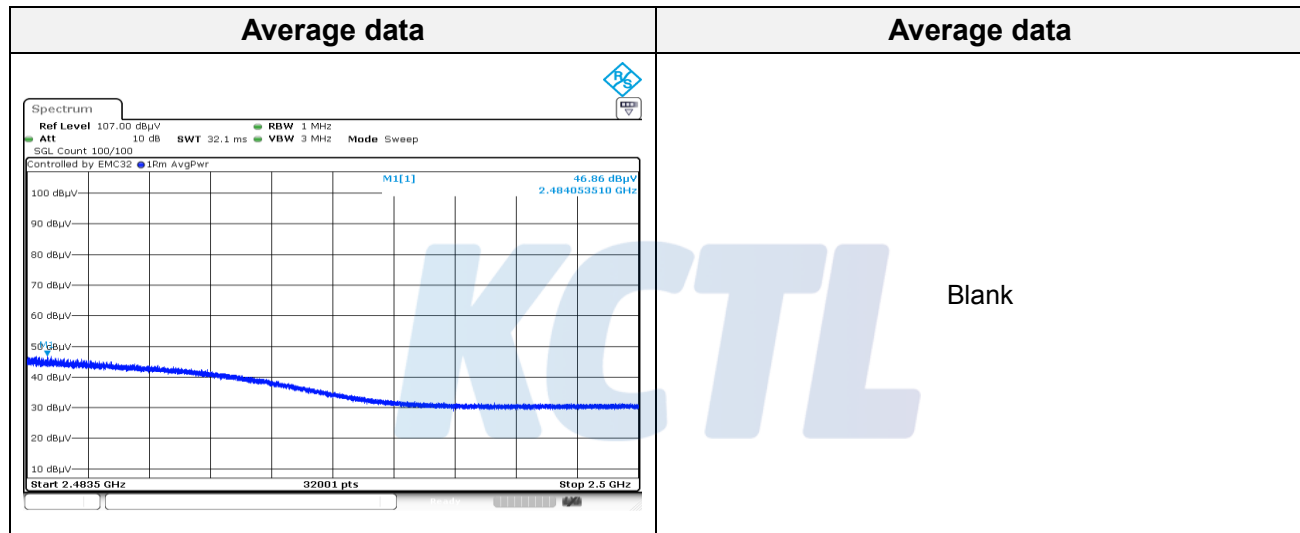


Horizontal/Vertical for Band-edge

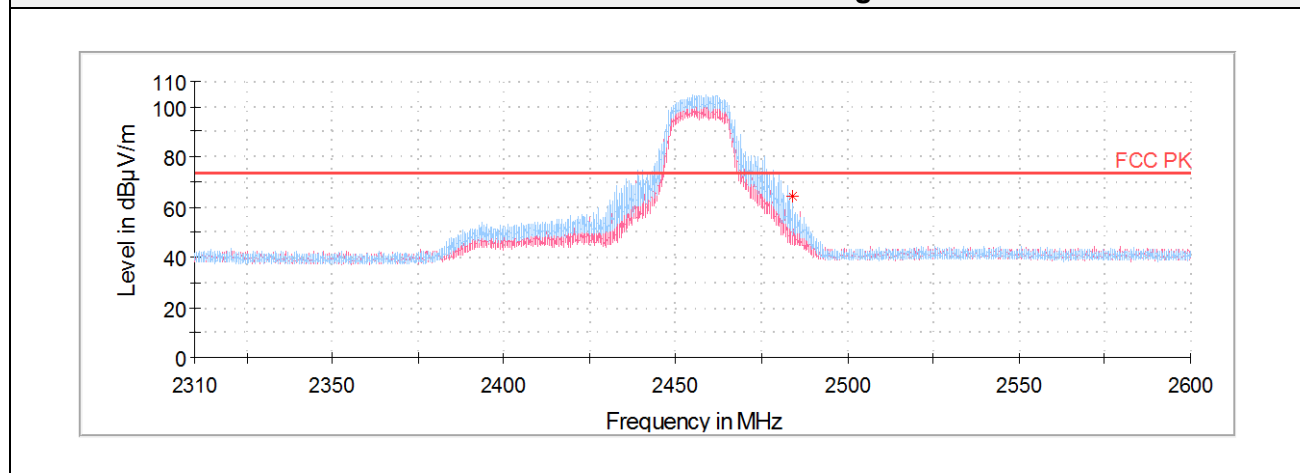


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

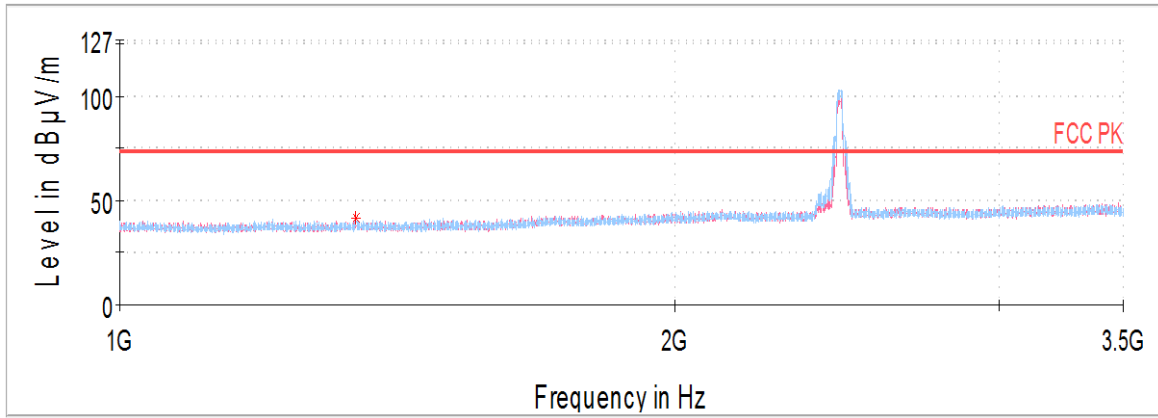

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

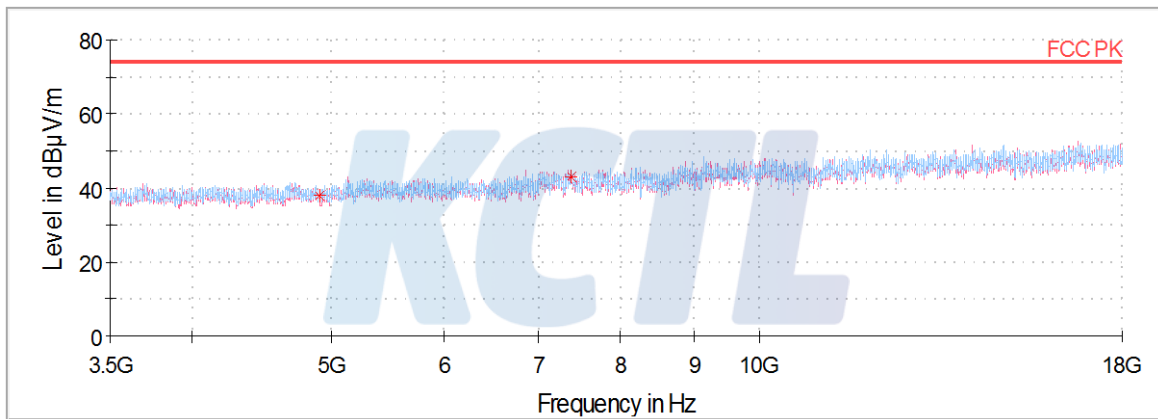

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

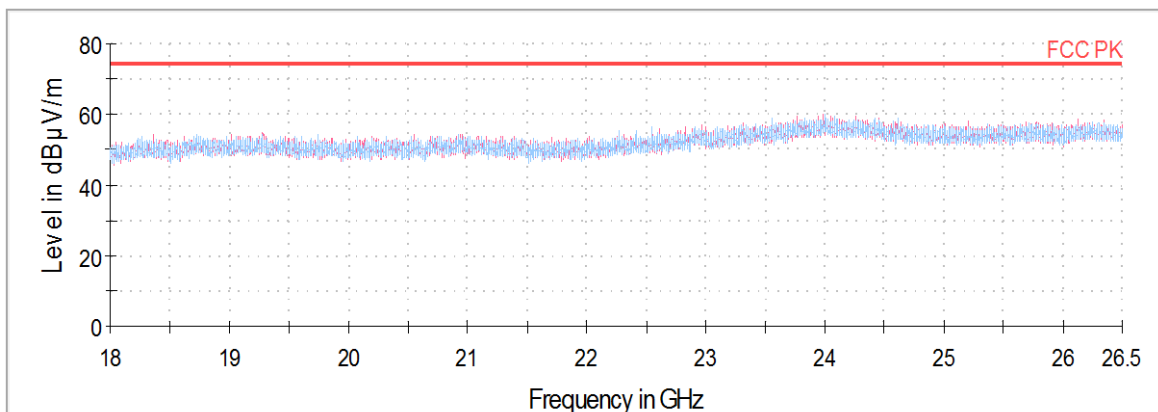

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (61) of (78)




11 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 343.52 ¹⁾	H	49.89	2.80	- 36.71	25.17	-	41.15	74.00	32.85
2 483.54 ¹⁾	H	61.33	3.77	- 30.29	28.72	-	63.53	74.00	10.47
4 923.72 ¹⁾	V	64.72	5.42	- 60.96	32.86	-	42.04	74.00	31.96
7 386.00 ¹⁾	V	62.07	6.79	- 61.71	36.09	-	43.24	74.00	30.76
Average Data									
2 483.54 ¹⁾	H	47.02	3.77	- 30.29	28.72	0.31	49.53	54.00	4.47

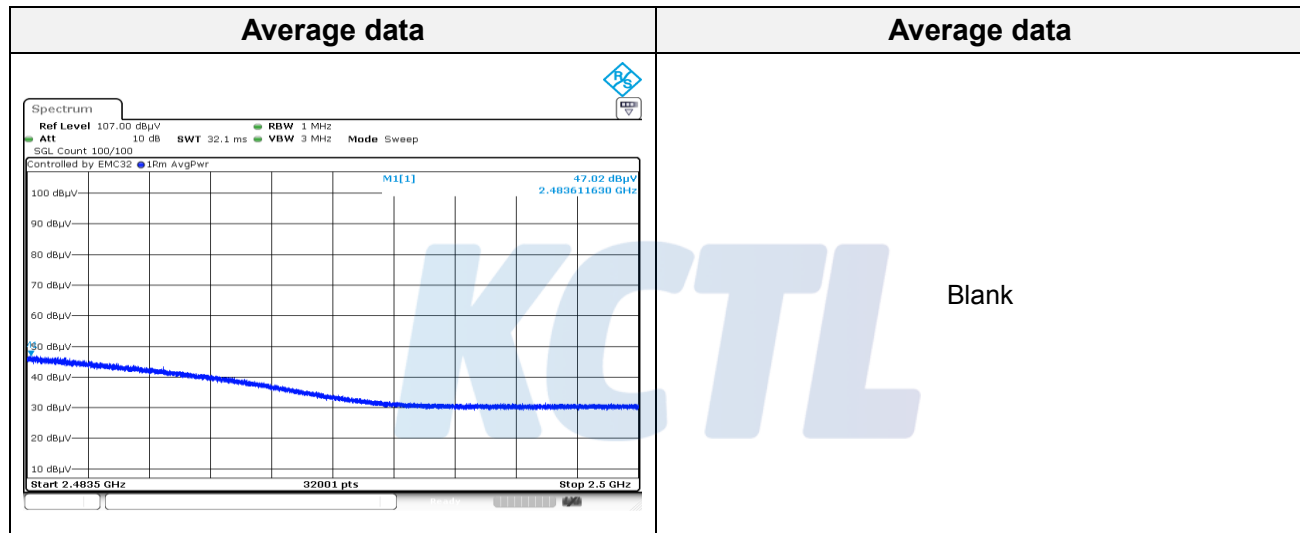


Horizontal/Vertical for Band-edge

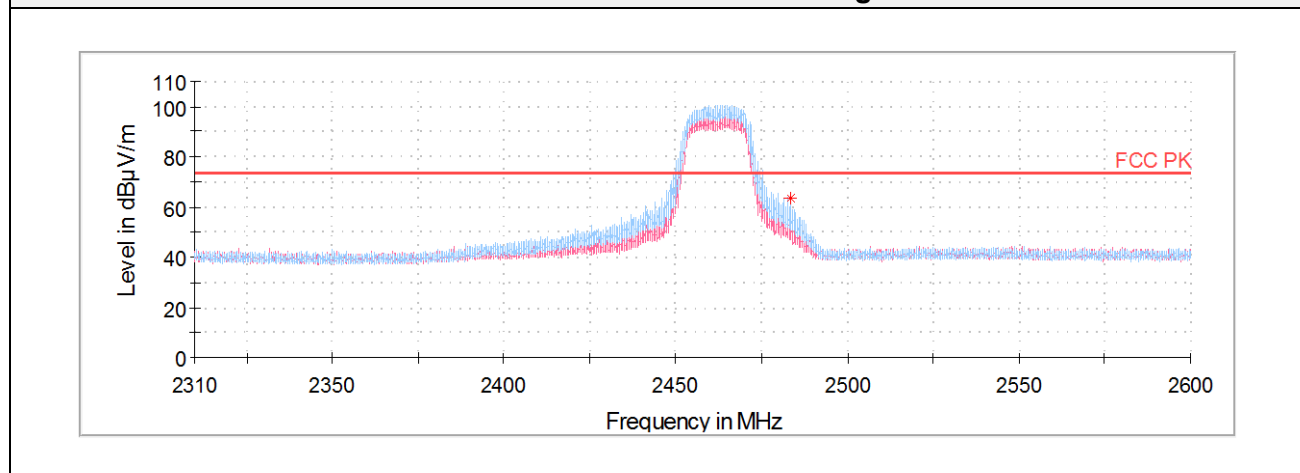


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

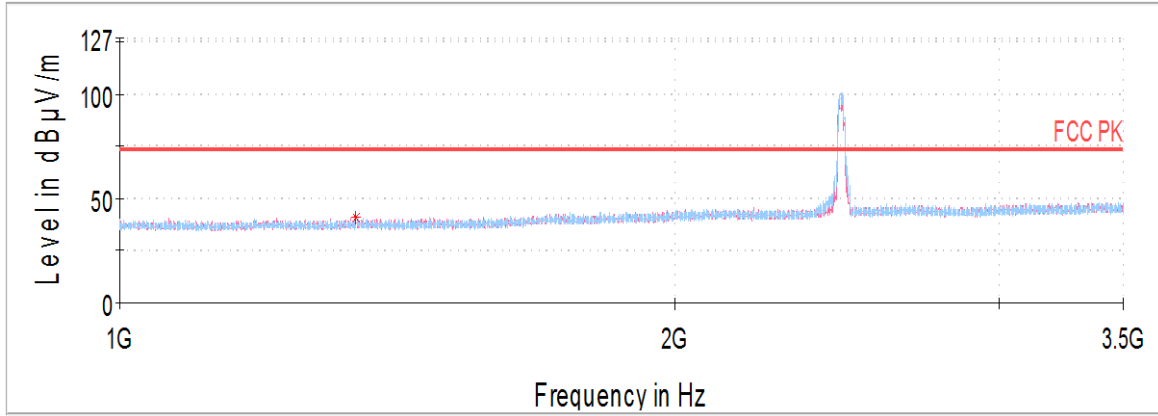

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

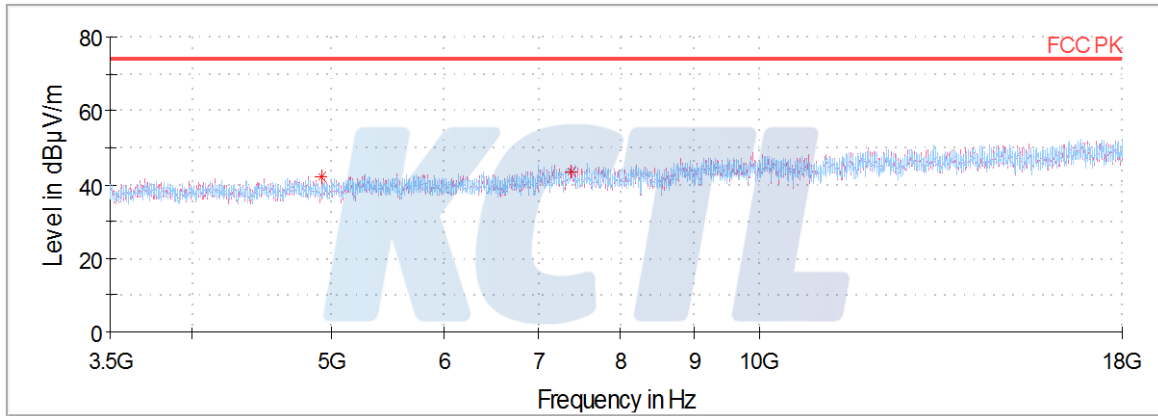

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

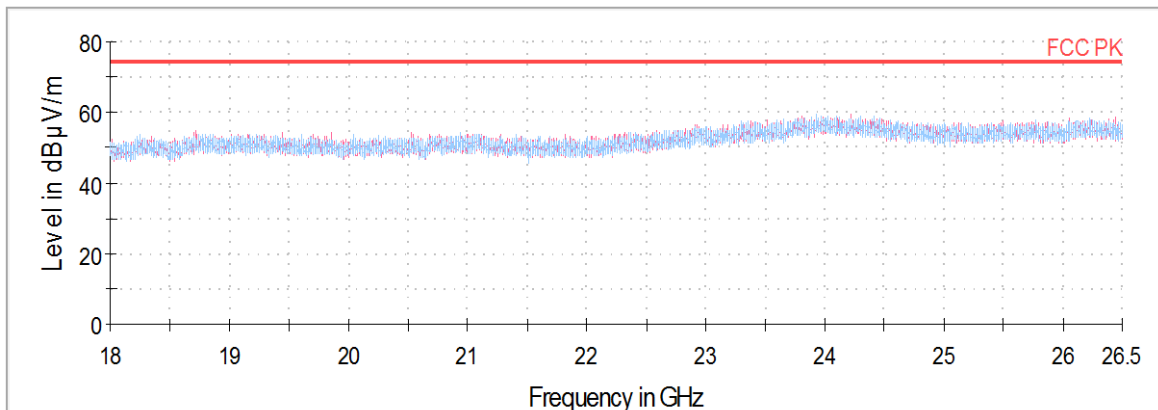

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (63) of (78)




12 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 343.67 ¹⁾	H	49.39	2.80	- 36.71	25.17	-	40.65	74.00	33.35
2 484.13 ¹⁾	H	55.54	3.77	- 30.29	28.72	-	57.74	74.00	16.26
4 934.14 ¹⁾	H	61.62	5.43	- 60.90	32.87	-	39.02	74.00	34.98
7 401.86 ¹⁾	H	62.89	6.79	- 61.73	36.10	-	44.05	74.00	29.95
Average Data									
2 484.13 ¹⁾	H	46.51	3.77	- 30.29	28.72	0.31	49.02	54.00	4.98

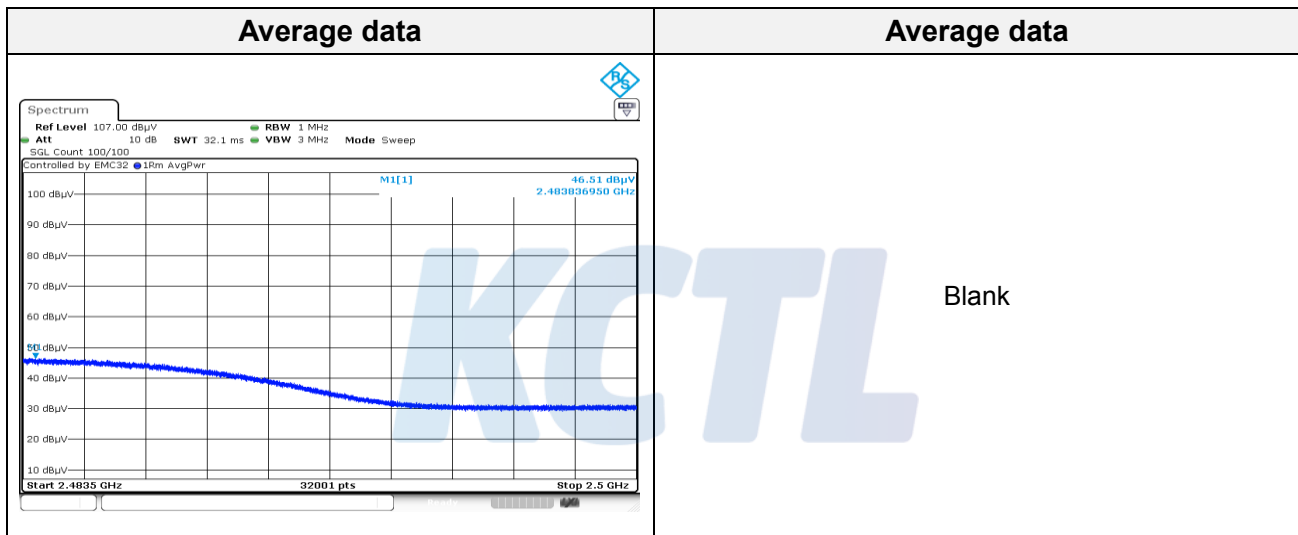


Horizontal/Vertical for Band-edge

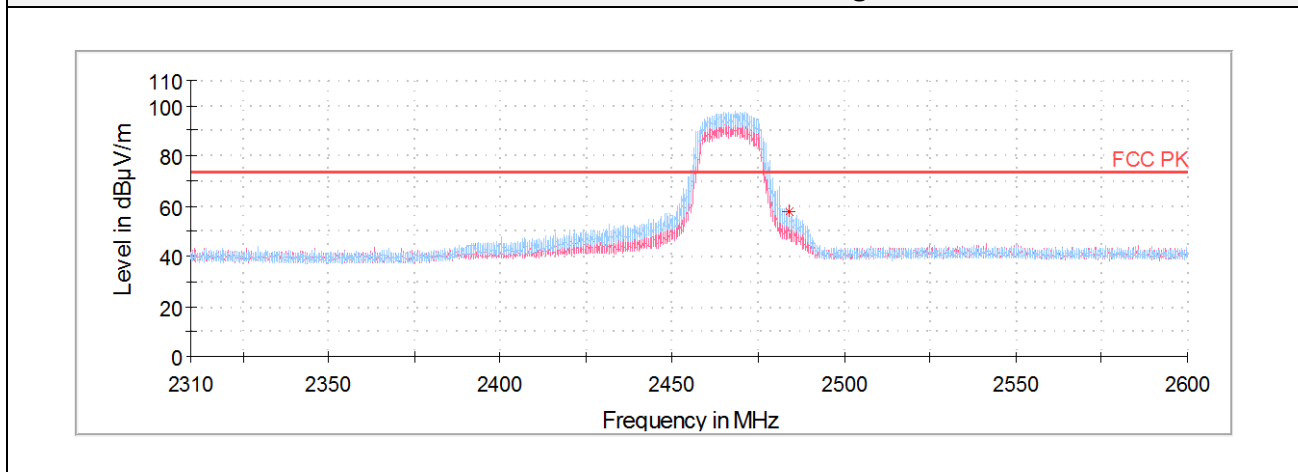


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

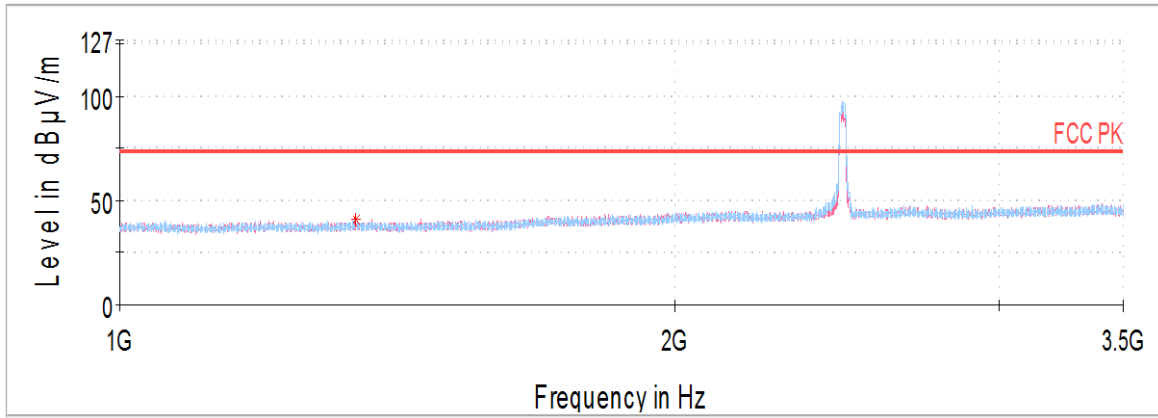

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

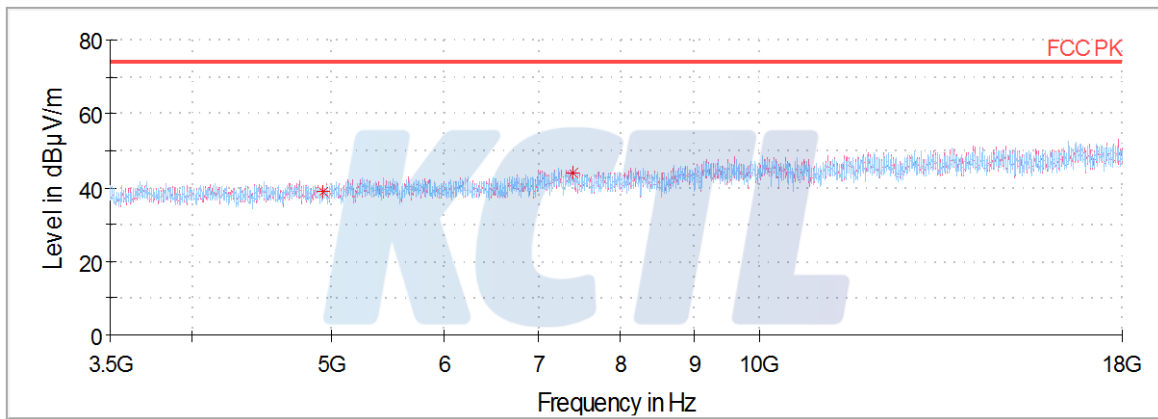

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

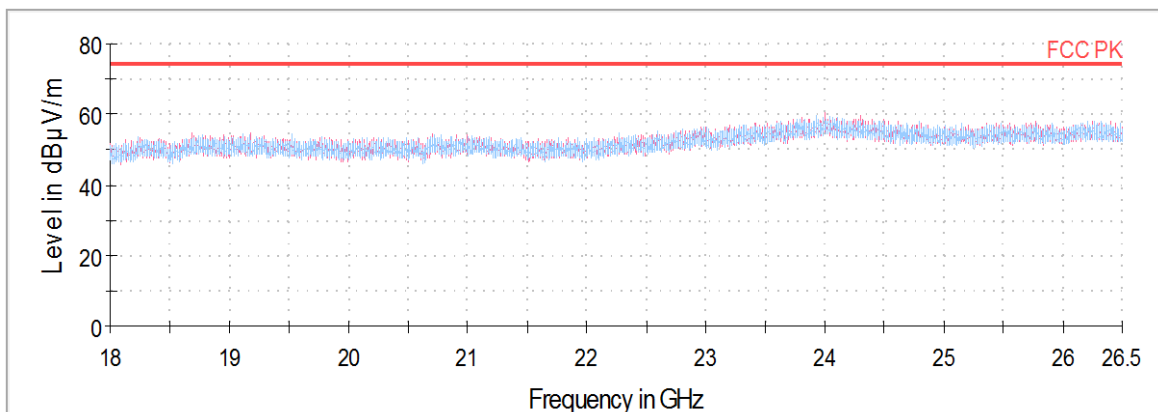

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (65) of (78)




13 Channel


Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 344.45 ¹⁾	H	50.97	2.80	- 36.72	25.18	-	42.23	74.00	31.77
2 484.64 ¹⁾	H	55.39	3.77	- 30.29	28.72	-	57.59	74.00	16.41
4 944.11 ¹⁾	V	61.50	5.43	- 60.82	32.87	-	38.98	74.00	35.02
7 416.81 ¹⁾	V	62.27	6.80	- 61.76	36.12	-	43.43	74.00	30.57
Average Data									
2 484.64 ¹⁾	H	46.29	3.77	- 30.29	28.72	0.31	48.80	54.00	5.20

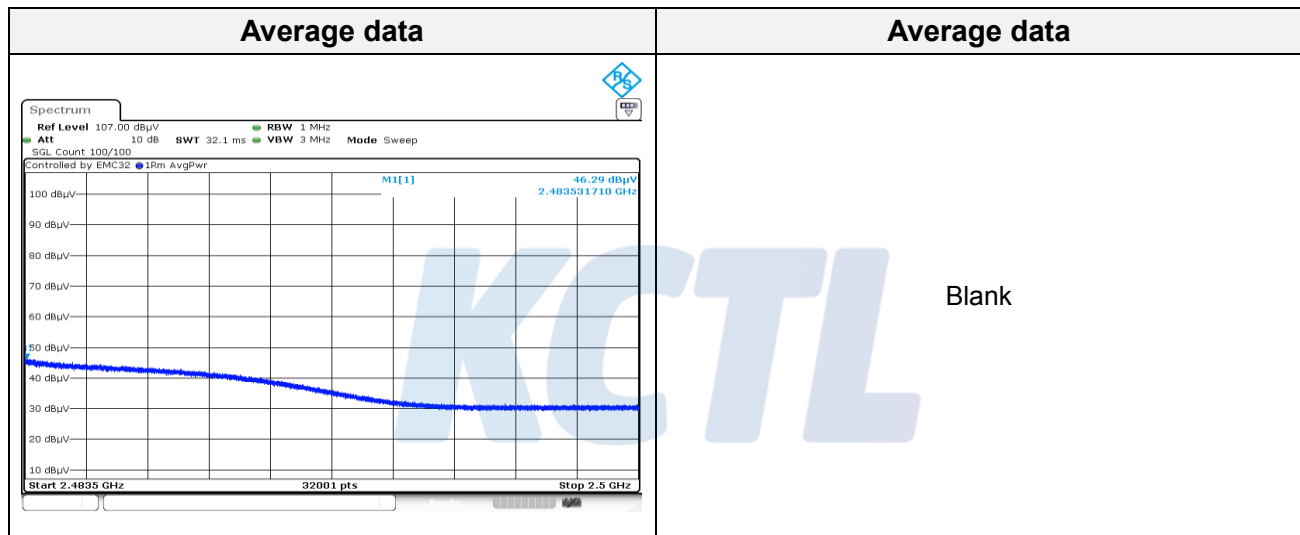


Horizontal/Vertical for Band-edge

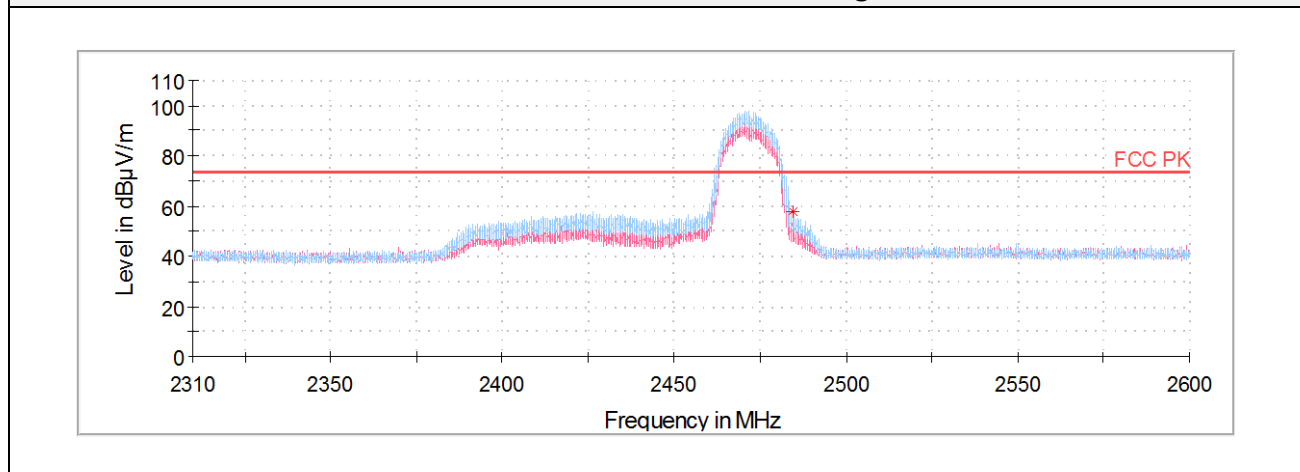


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

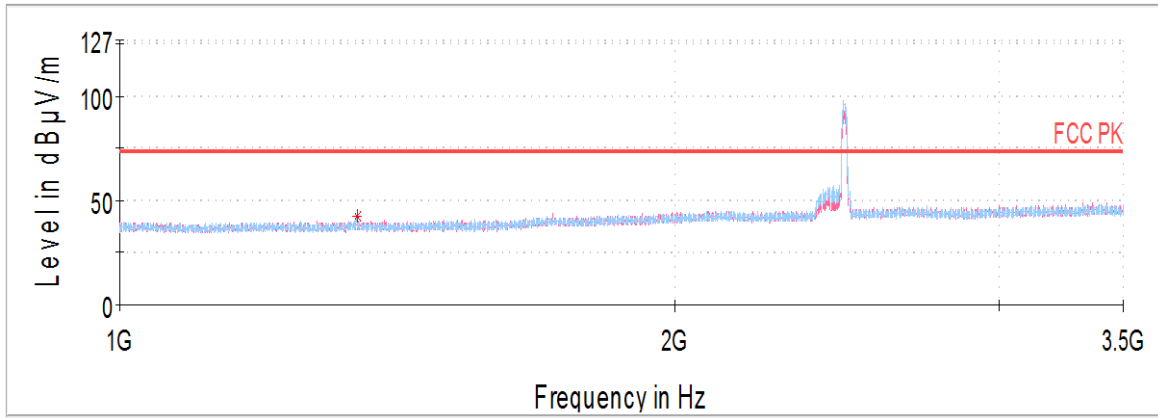

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

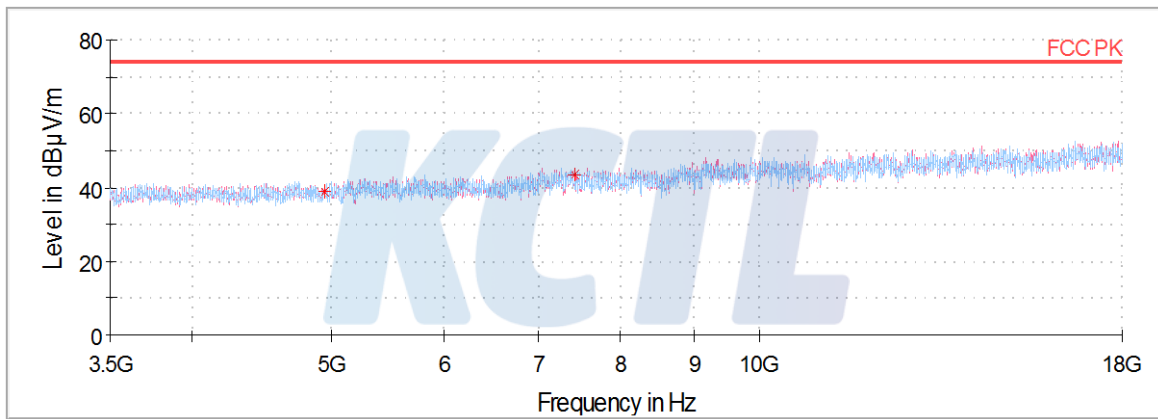

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

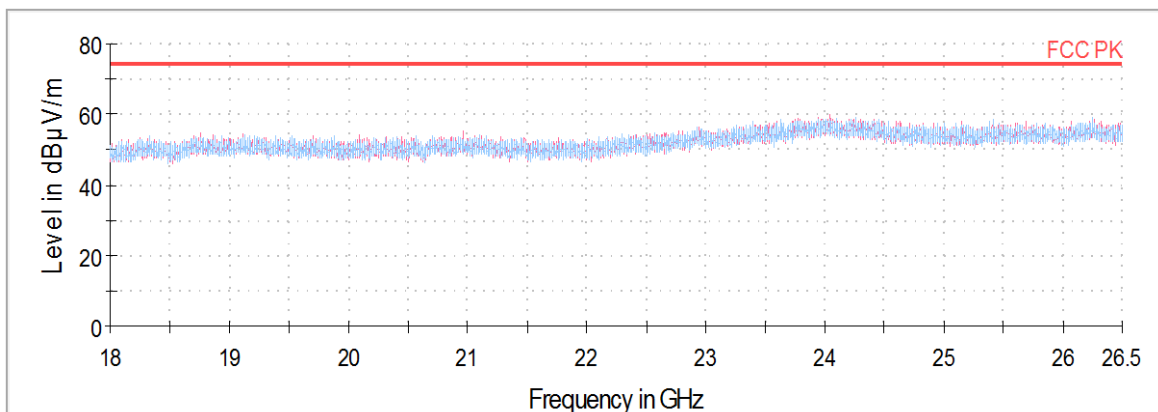

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0038

Page (67) of (78)




Test results 802.11b


Reference

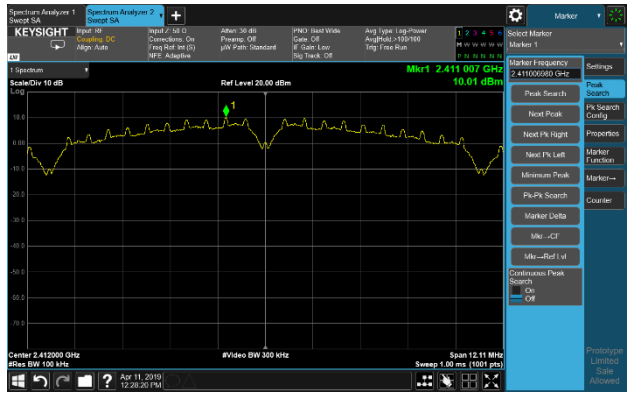


2 412 MHz

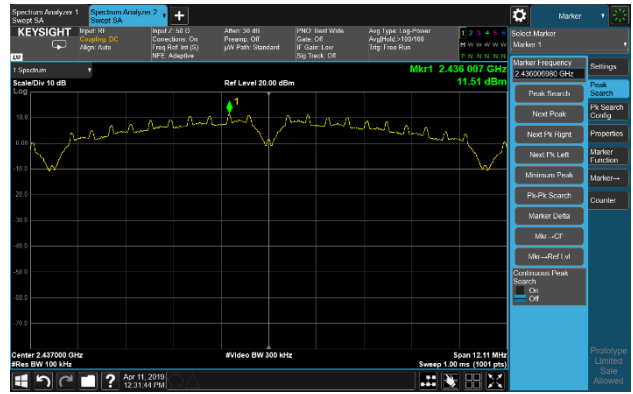


2 437 MHz

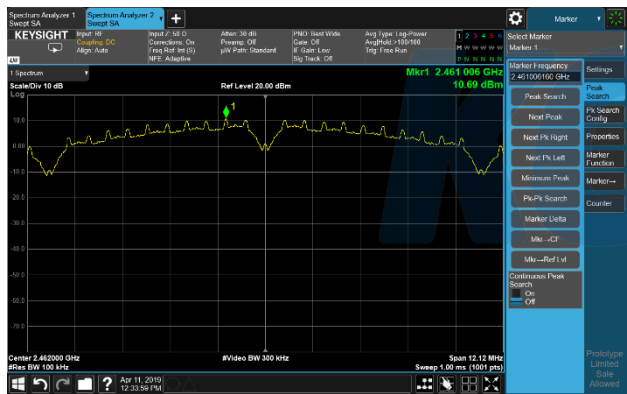

2 462 MHz

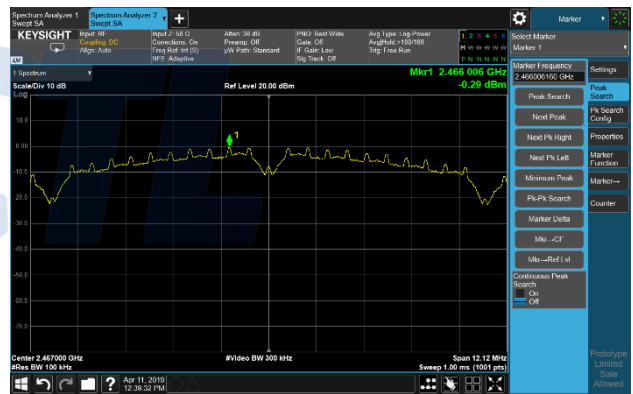


2 467 MHz

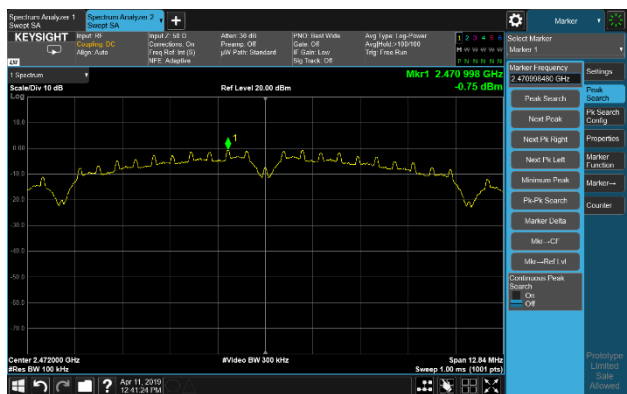

2 472 MHz


Blank

Conducted Emissions

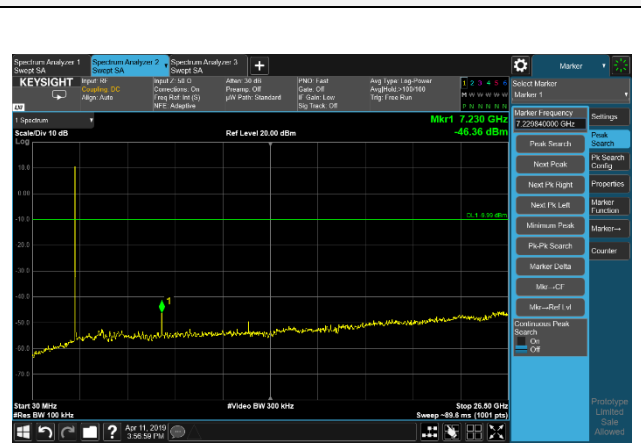


2 412 MHz


Band edge

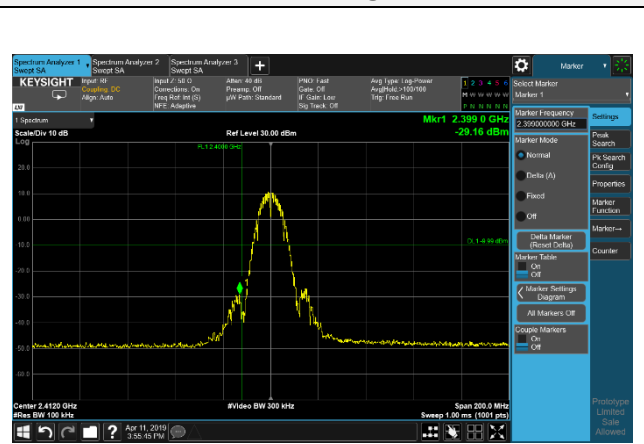


2 412 MHz

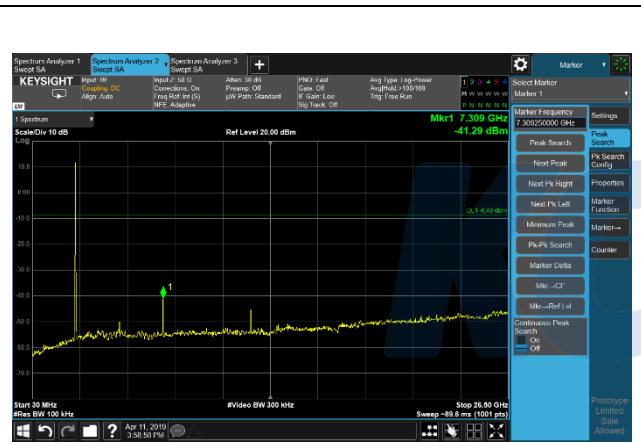

2 437 MHz

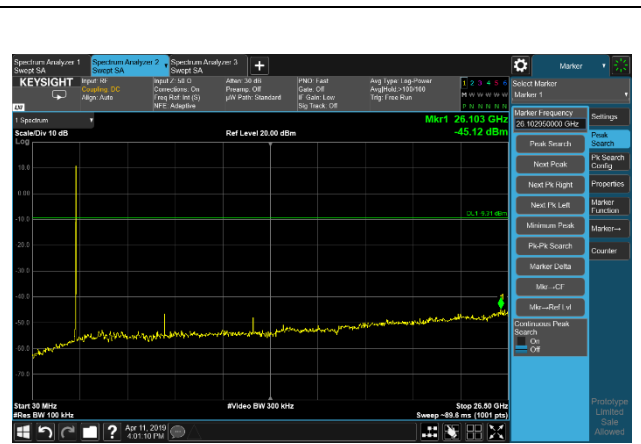


2 462 MHz

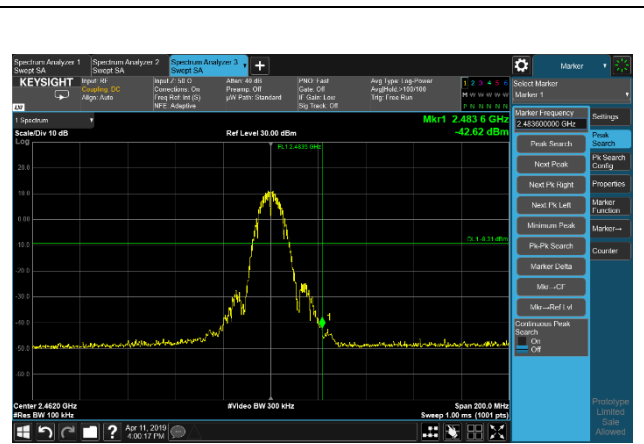


2 462 MHz

Conducted Emissions

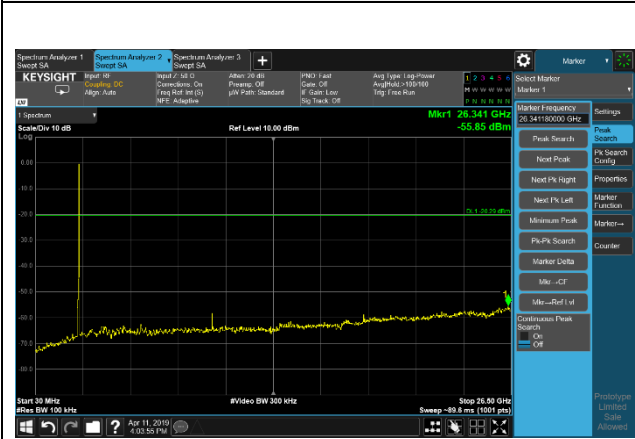


2 467 MHz


Band edge

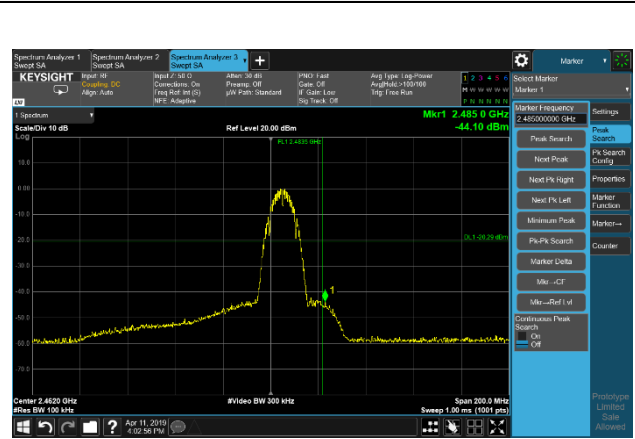

2 467 MHz

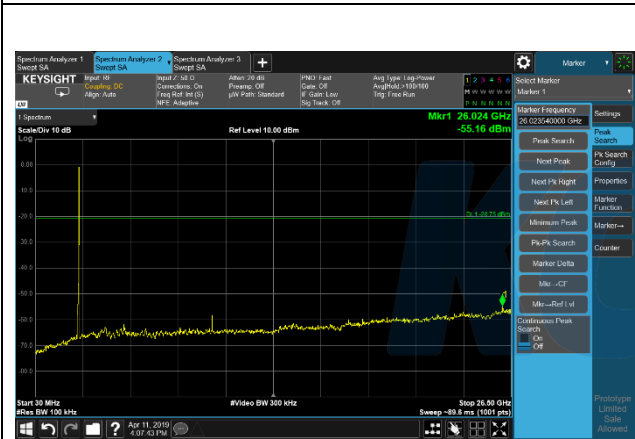

2 472 MHz

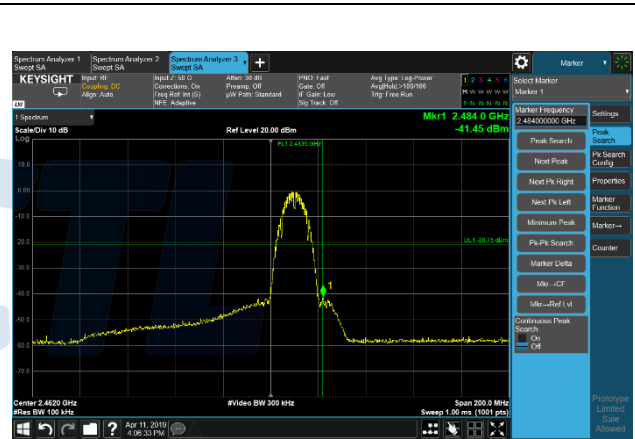


2 472 MHz

Test results
802.11g

Reference




2 412 MHz

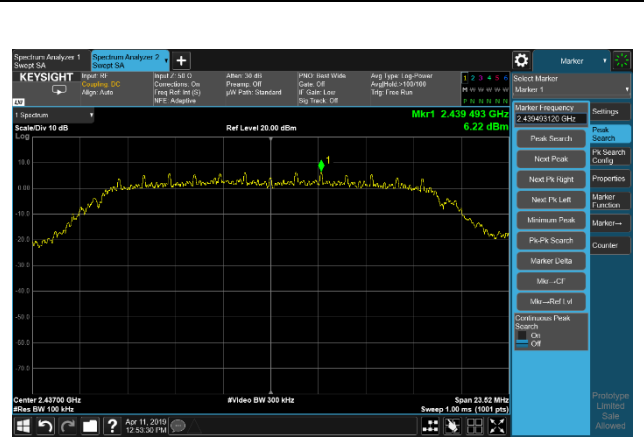

2 437 MHz




2 457 MHz

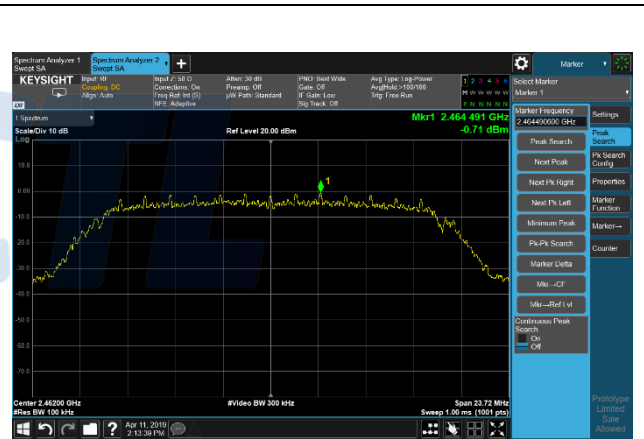

2 462 MHz




2 467 MHz

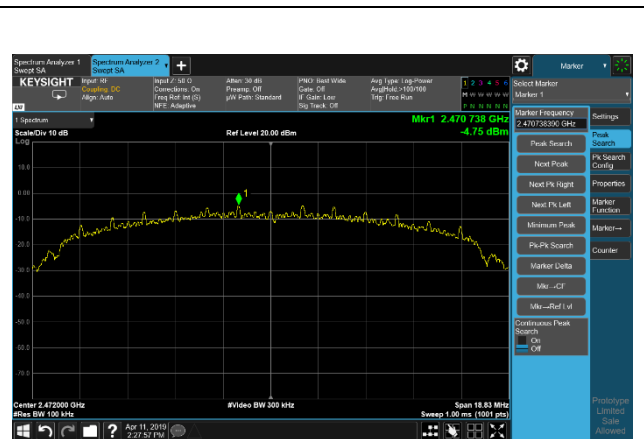


2 472 MHz

Conducted Emissions

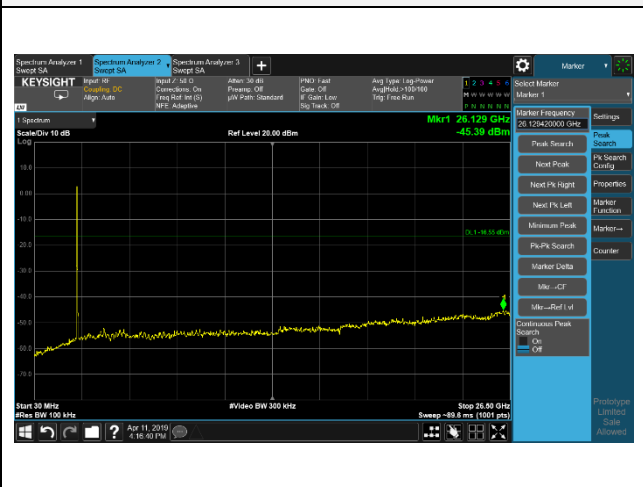


2 412 MHz


Band edge

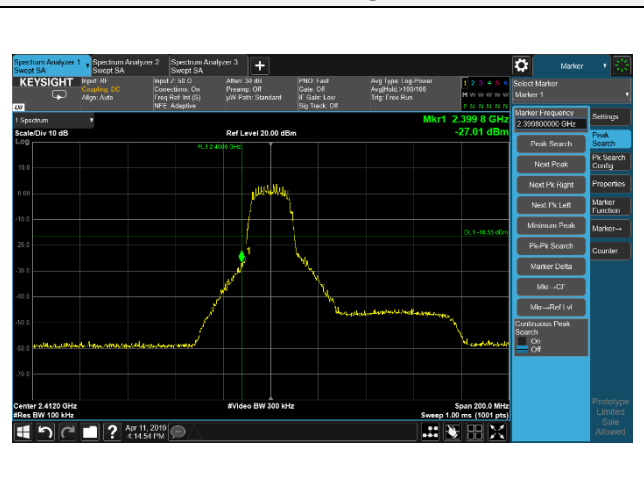


2 412 MHz

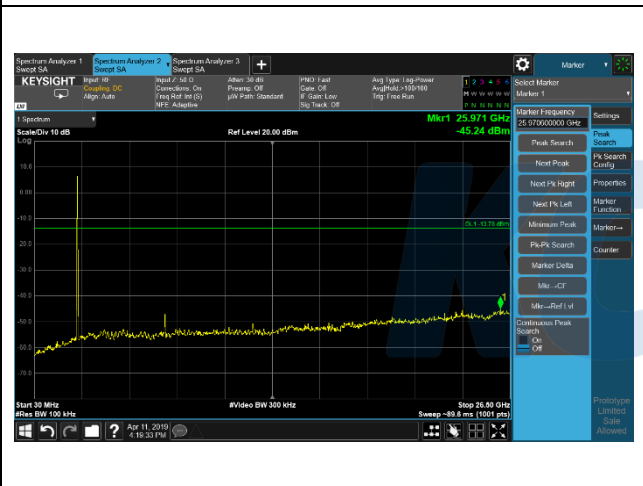

2 437 MHz

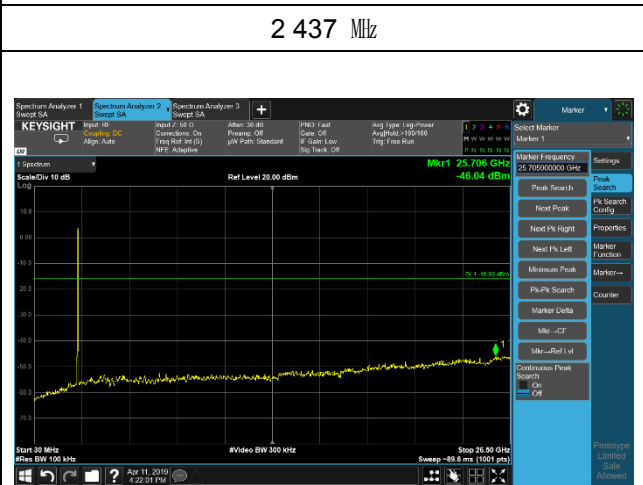


2 457 MHz

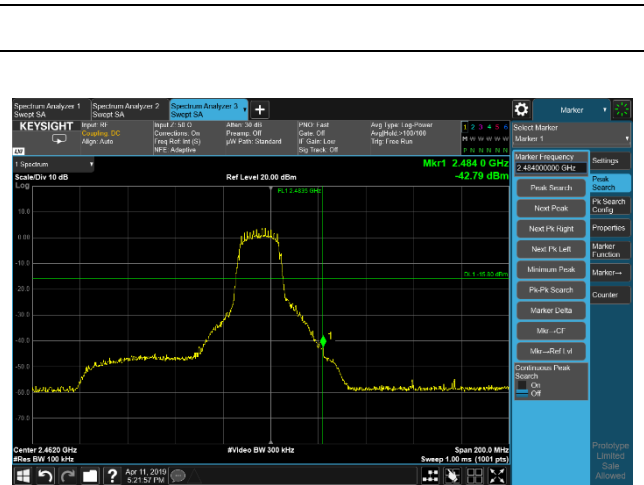


2 457 MHz

Conducted Emissions

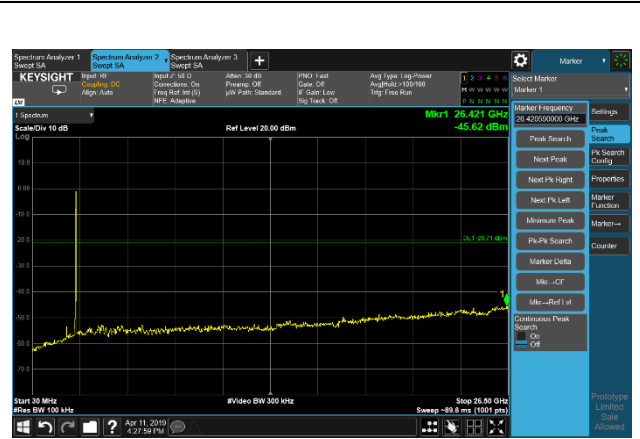


2 462 MHz


Band edge

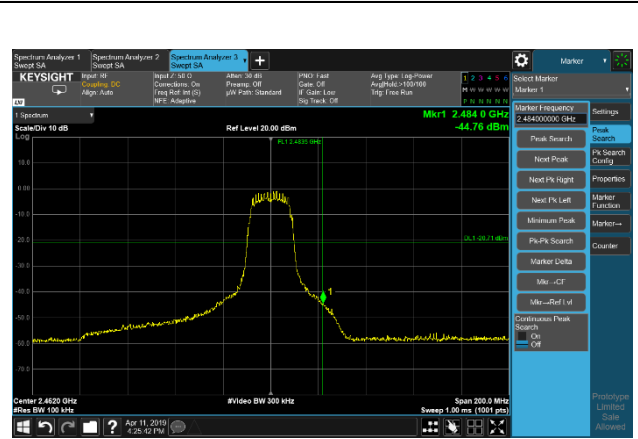


2 462 MHz

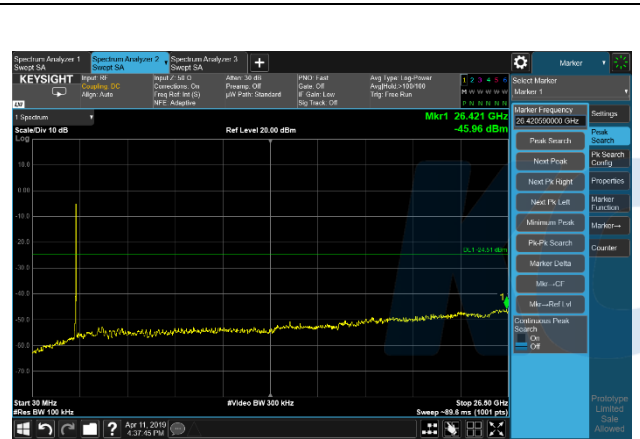


2 467 MHz

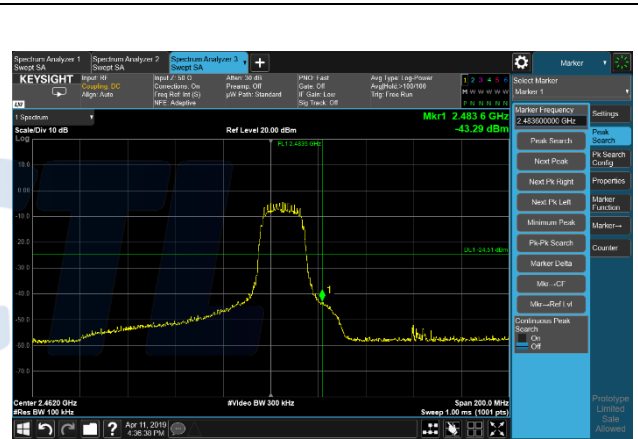

2 467 MHz

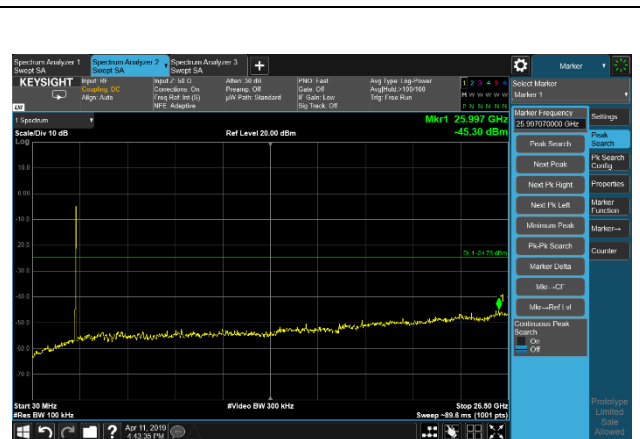


2 472 MHz

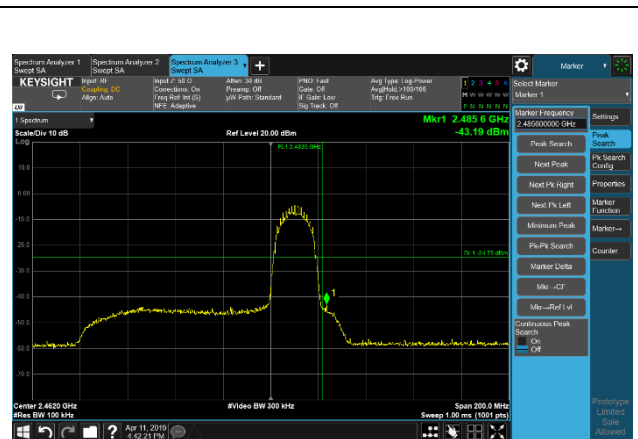


2 472 MHz

Test results
802.11n HT20

Reference

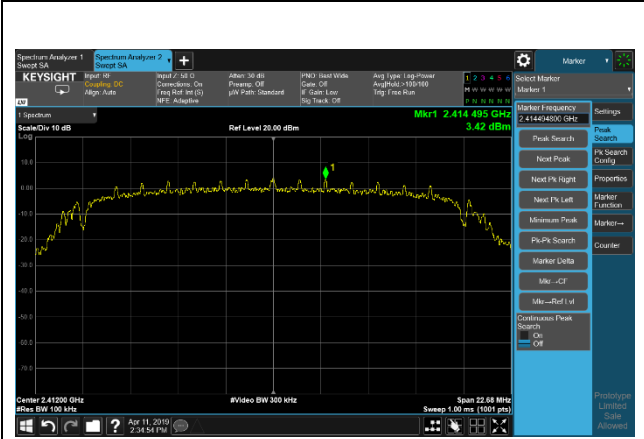

2 412 MHz

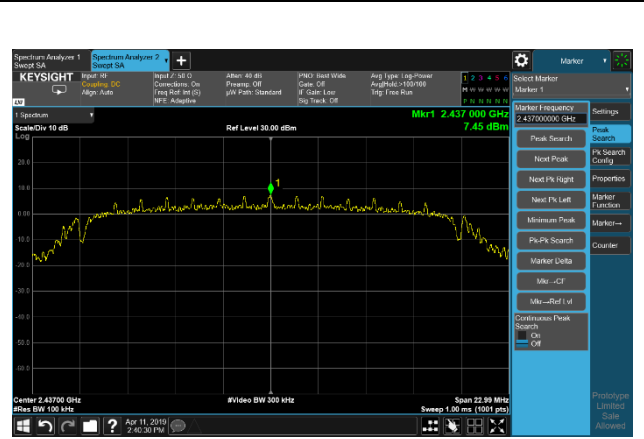

2 437 MHz



2 457 MHz



2 462 MHz




2 467 MHz




2 472 MHz

Conducted Emissions

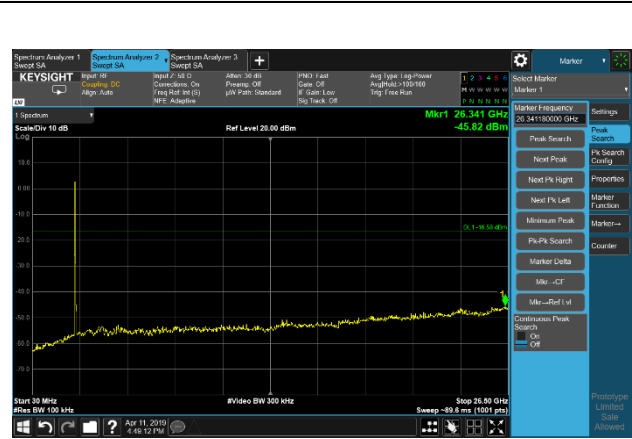


2 412 MHz

Band edge

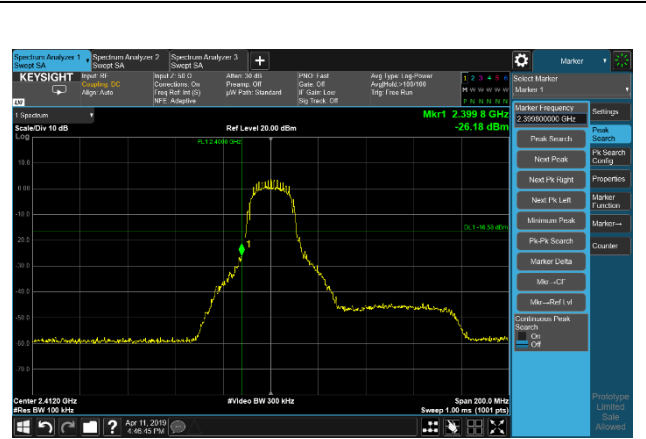


2 412 MHz

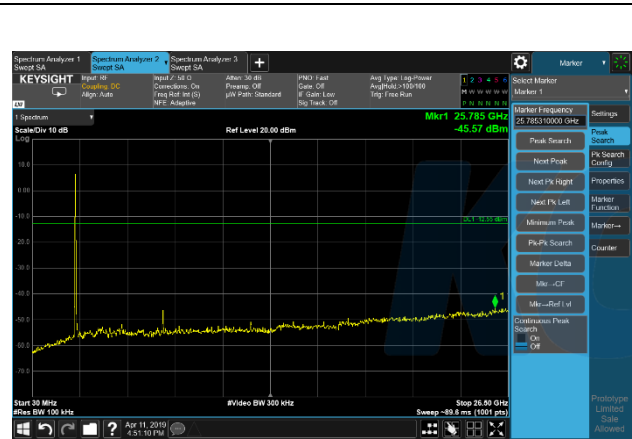


2 437 MHz



Blank

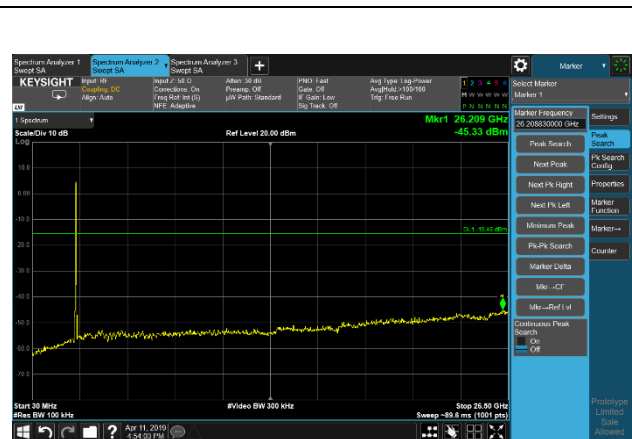


2 457 MHz

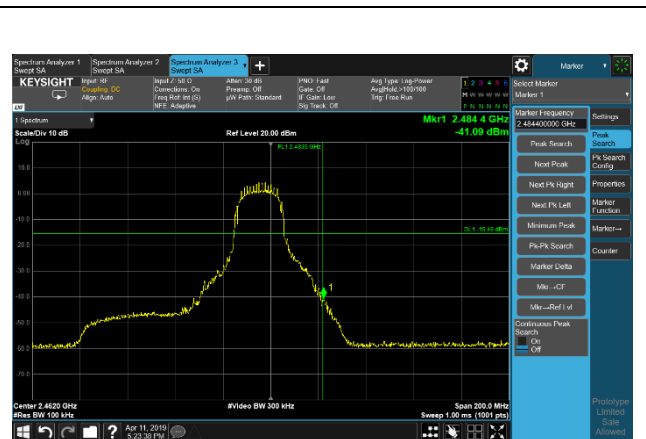


2 457 MHz

Conducted Emissions

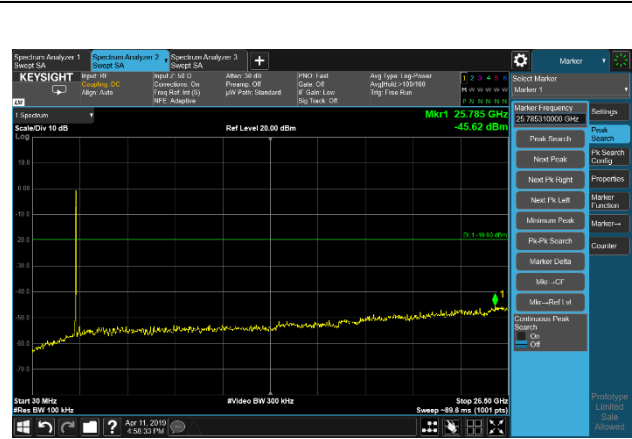


2 462 MHz


Band edge

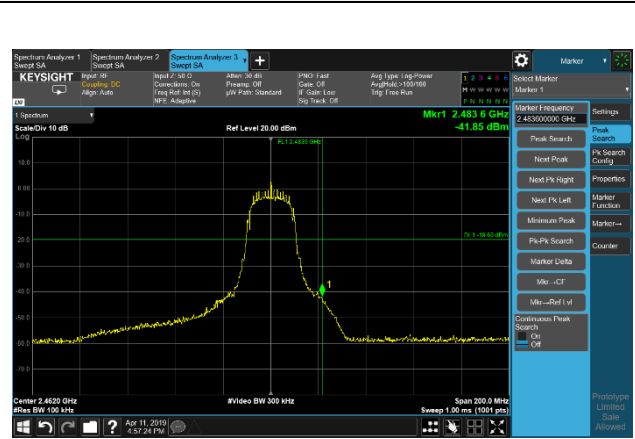


2 462 MHz

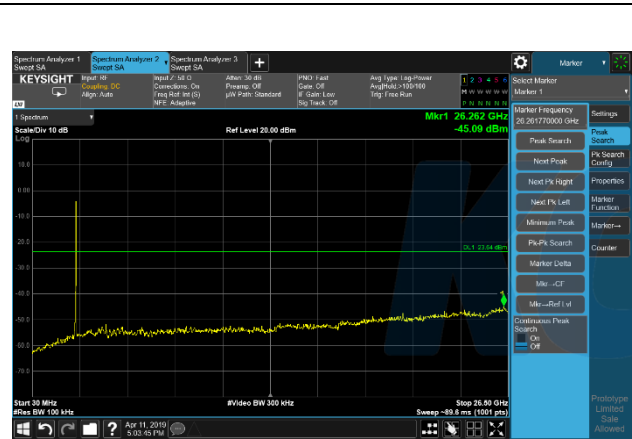


2 467 MHz

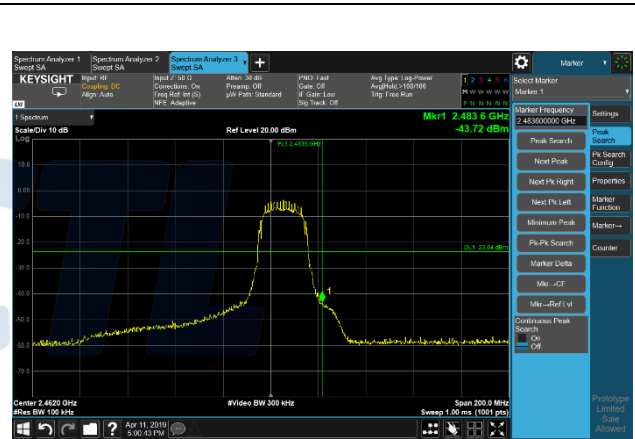

2 467 MHz

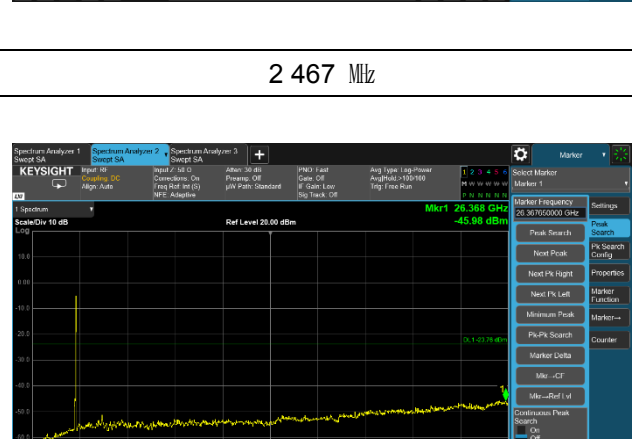


2 472 MHz

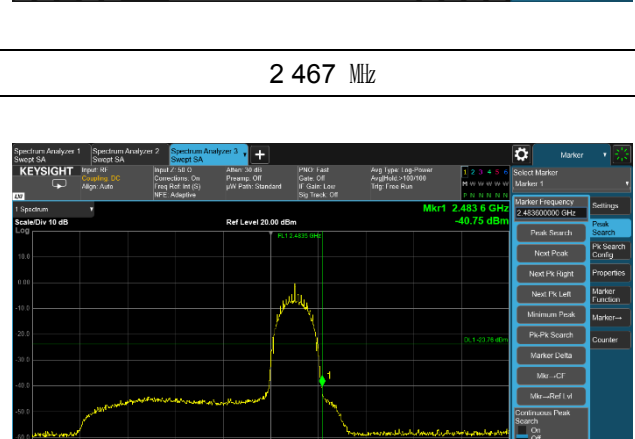

2 472 MHz

7.5. AC Conducted emission

Test setup

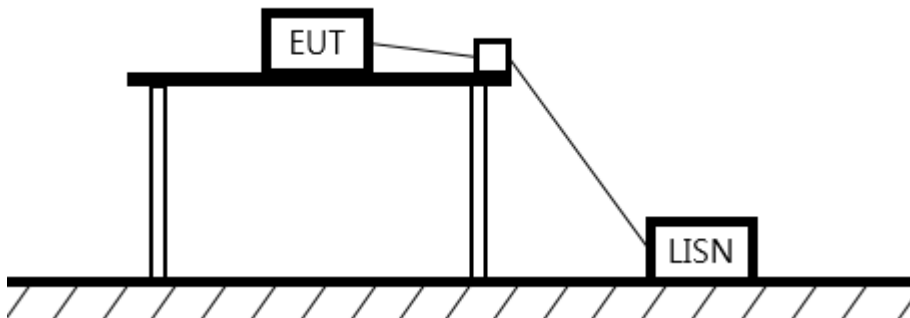

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0038

Page (77) of (78)




Test results

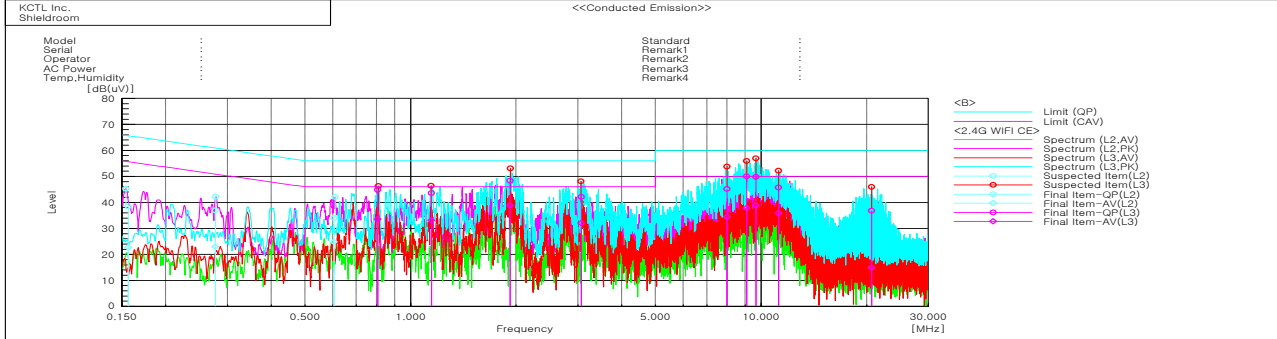

Final Result

--- N_A Phase ---										
No.	Frequency	Reading QP	Reading CAV	c. f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.15633	28.6	12.8	9.9	38.5	22.7	65.7	55.7	27.2	33.0
2	0.27747	27.2	13.3	9.7	36.9	23.0	60.9	50.9	24.0	27.9
3	0.60492	24.0	14.9	9.9	33.9	24.8	56.0	46.0	22.1	21.2

--- L1_A Phase ---										
No.	Frequency	Reading QP	Reading CAV	c. f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.80566	34.9	23.6	9.9	44.8	33.5	56.0	46.0	11.2	12.5
2	1.14582	33.8	23.2	9.8	43.6	33.0	56.0	46.0	12.4	13.0
3	1.92289	38.5	29.0	9.8	48.3	38.8	56.0	46.0	7.7	7.2
4	3.06847	32.2	22.1	9.9	42.1	32.0	56.0	46.0	13.9	14.0
5	7.99415	35.1	24.3	10.1	45.2	34.4	60.0	50.0	14.8	15.6
6	9.08908	39.8	27.6	10.2	50.0	37.8	60.0	50.0	10.0	12.2
7	9.66755	39.5	28.5	10.3	49.8	38.8	60.0	50.0	10.2	11.2
8	11.21546	35.3	25.5	10.4	45.7	35.9	60.0	50.0	14.3	14.1
9	20.68878	25.9	4.0	10.9	36.8	14.9	60.0	50.0	23.2	35.1

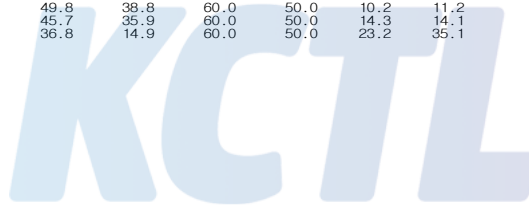

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0038

Page (78) of (78)



8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
PXA Signal Analyzer	KEYSIGHT	N9040B	US55230151	19.10.31
Spectrum Analyzer	R&S	FSV30	100807	19.08.01
Wideband Power Sensor	R & S	NRP-Z81	102398	20.01.25
ATTENUATOR	R & S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31212	19.05.14
EMI TEST RECEIVER	R & S	ESCI	100732	19.08.23
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	19.08.23
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086635	19.05.10
Horn antenna	ETS.lindgren	3117	161225	19.05.18
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	19.08.01
AMPLIFIER	L-3 Narda-MITEQ	AFS5-00101800-25-S- 5	2054571	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2003683	19.05.15
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33 -8P	2000997	19.08.02
LOOP Antenna	R & S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	19.05.14
TWO-LINE V - NETWORK	R&S	ENV216	101584	20.04.05
EMI TEST RECEIVER	R & S	ESCI3	100718	19.08.23
Vector Signal Generator	R & S	SMBV100A	257566	20.01.04
Signal Generator	R & S	SMR40	100007	19.05.15
Cable Assembly	RadiAll	2301761768000PJ	1724.659	-
Cable Assembly	gigalane	RG-400	-	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-

End of test report