

7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.

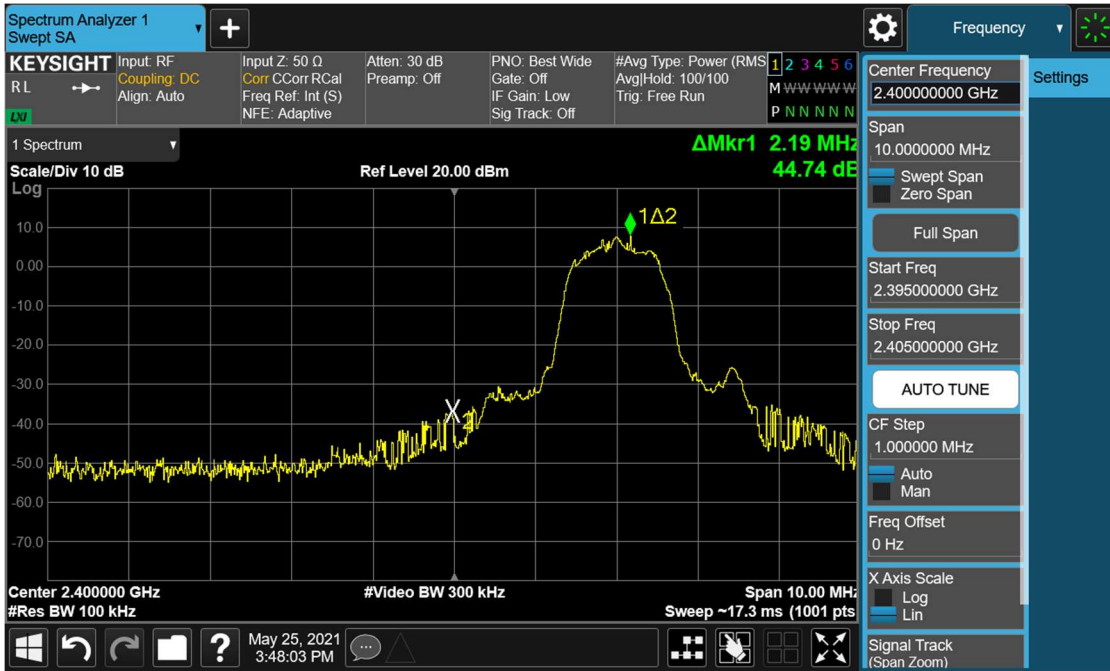


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 29 of 58



Plot 7-28. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0)



Plot 7-29. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 30 of 58



Plot 7-30. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps – Ch. 0)



Plot 7-31. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps – Ch. 78)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 31 of 58

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. **The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW \geq RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

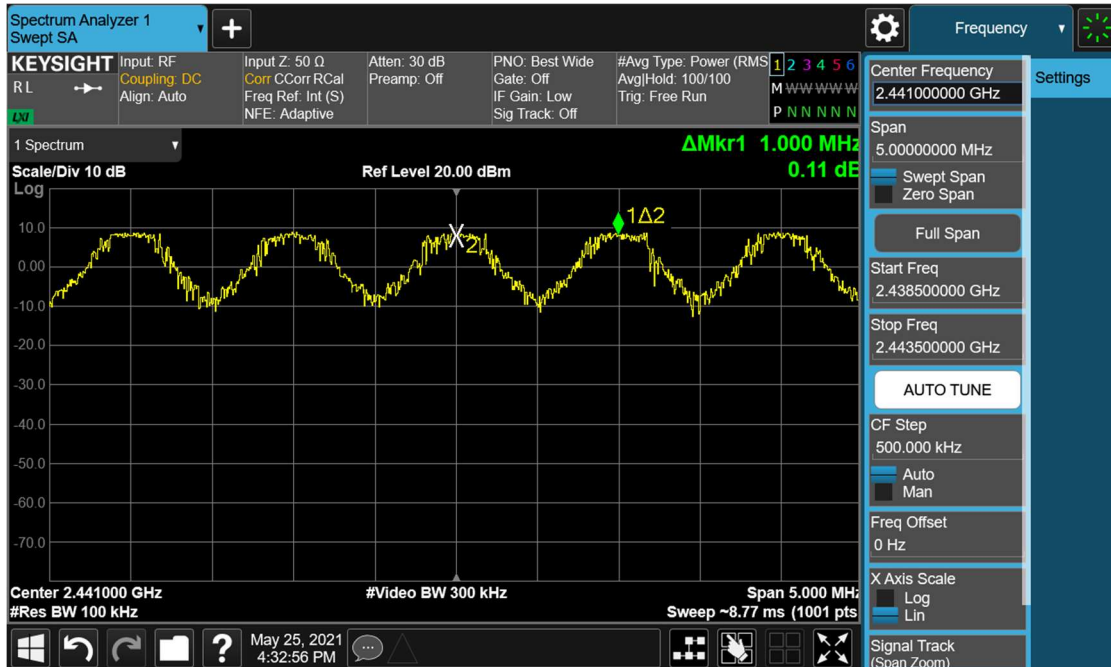
Test Notes

The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.



FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 32 of 58

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.693
2441	1.0	GFSK	39	0.615
2480	1.0	GFSK	78	0.693
2402	2.0	$\pi/4$ -DQPSK	0	0.897
2441	2.0	$\pi/4$ -DQPSK	39	0.895
2480	2.0	$\pi/4$ -DQPSK	78	0.897
2402	3.0	8DPSK	0	0.881
2441	3.0	8DPSK	39	0.873
2480	3.0	8DPSK	78	0.897

Table 7-4. Minimum Channel Separation



Plot 7-32. Channel Spacing Plot (Bluetooth)

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 33 of 58

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW \leq channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 34 of 58



Plot 7-33. Time of Occupancy Plot (Bluetooth)



Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- 266.67 hops/second / 79 channels = 3.38 hops/second (# of hops/second on one channel)
- 3.38 hops/second/channel \times 31.6 seconds = 106.67 hops (# hops over a 31.6 second period)
- 106.67 hops \times 2.875 ms/channel = 306.7 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- 133.3 hops/s / 20 channels = 6.67 hops/second (# of hops/second on one channel)
- 6.67 hops/s / channel \times 8 seconds = 53.34 hops (# hops over a 8 second period)
- 53.34 hops \times 2.875 ms/channel = 153.4 ms (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 35 of 58

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.

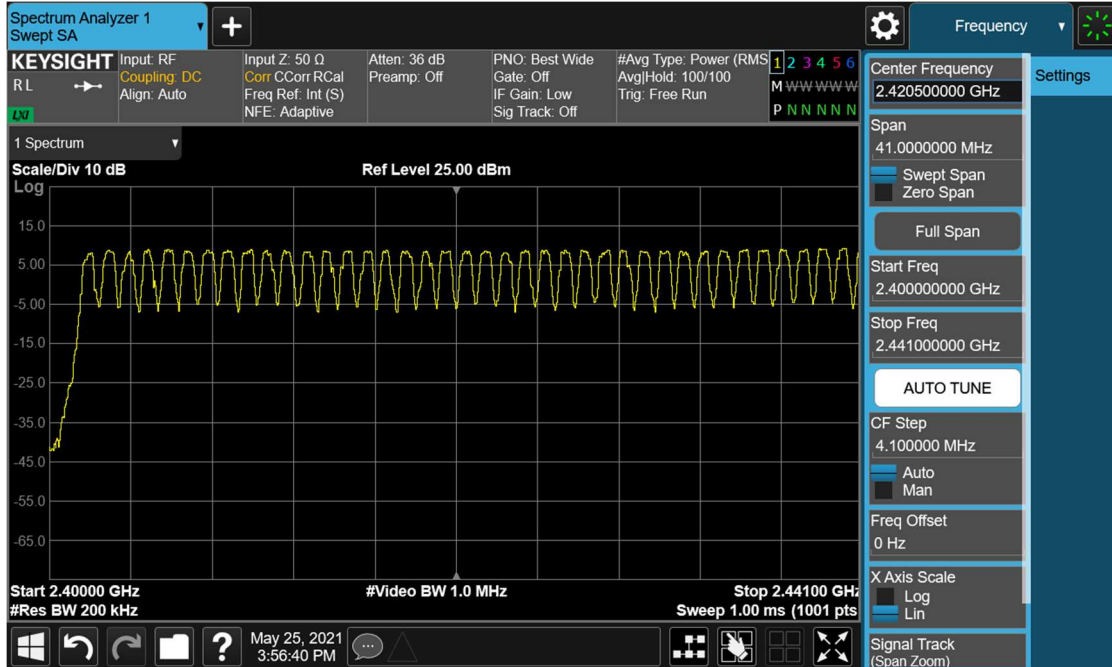


Figure 7-6. Test Instrument & Measurement Setup

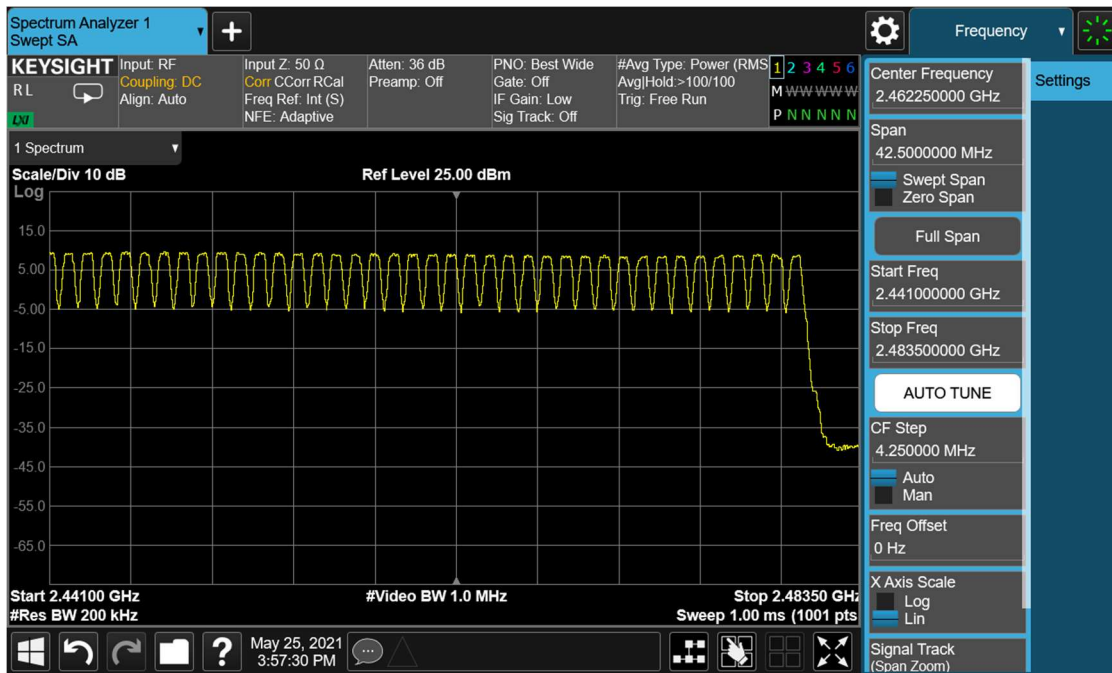
Test Notes

The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.



FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 36 of 58



Plot 7-34. Low End Spectrum Channel Hopping Plot (Bluetooth)



Plot 7-35. High End Spectrum Channel Hopping Plot (Bluetooth)

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 37 of 58

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.

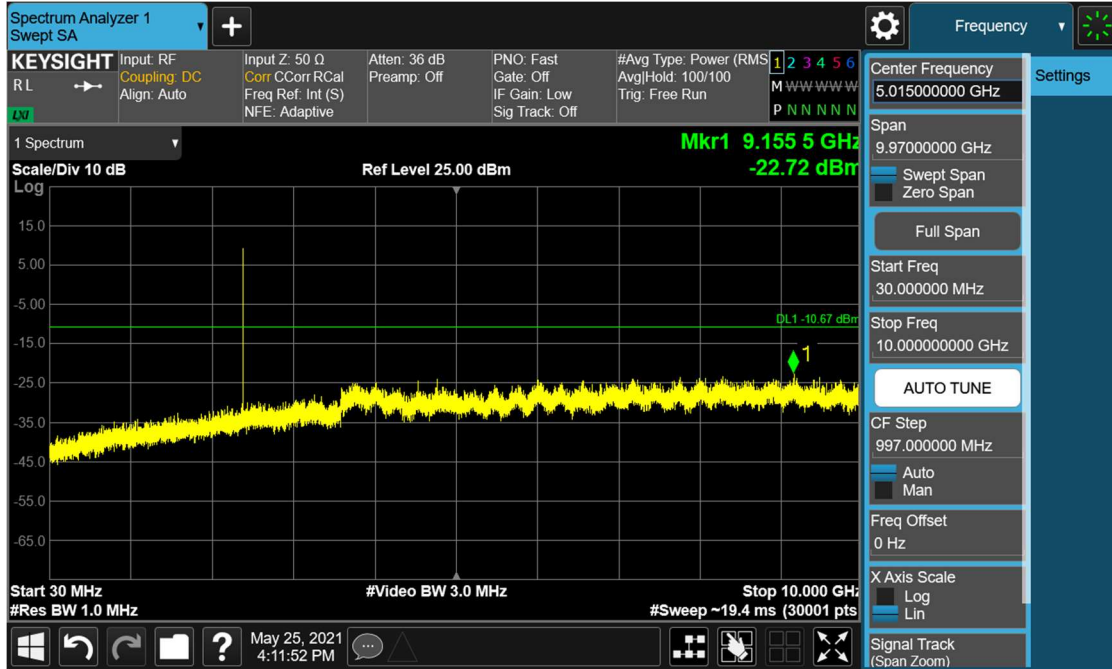


Figure 7-7. Test Instrument & Measurement Setup

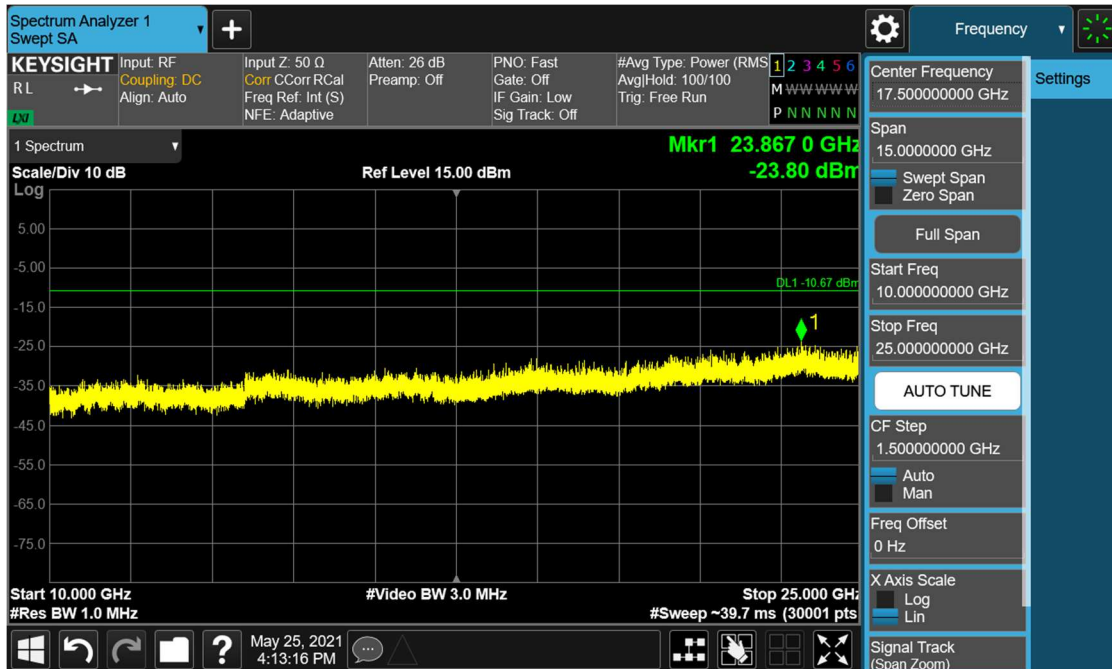
Test Notes

Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at 3Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 38 of 58

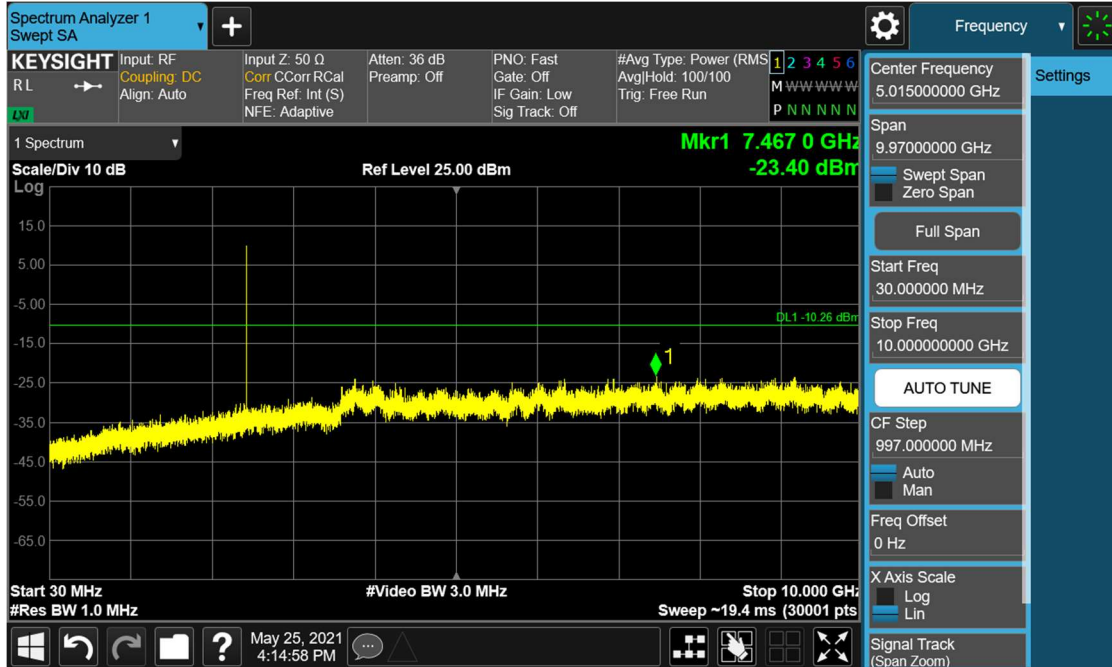


Plot 7-36. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

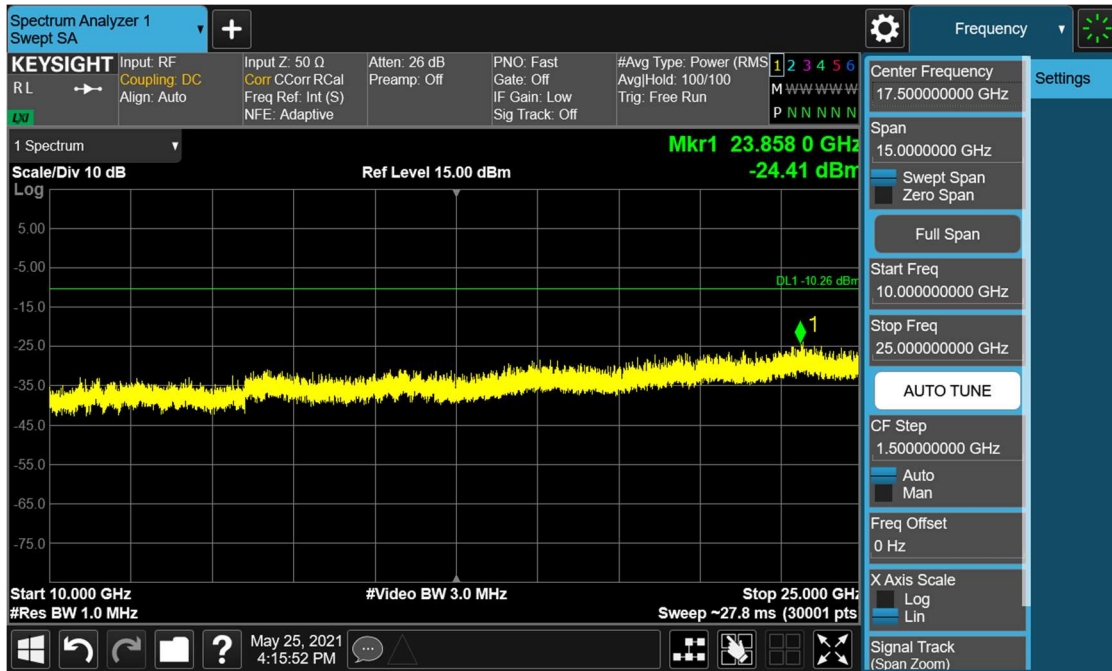


Plot 7-37. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 39 of 58

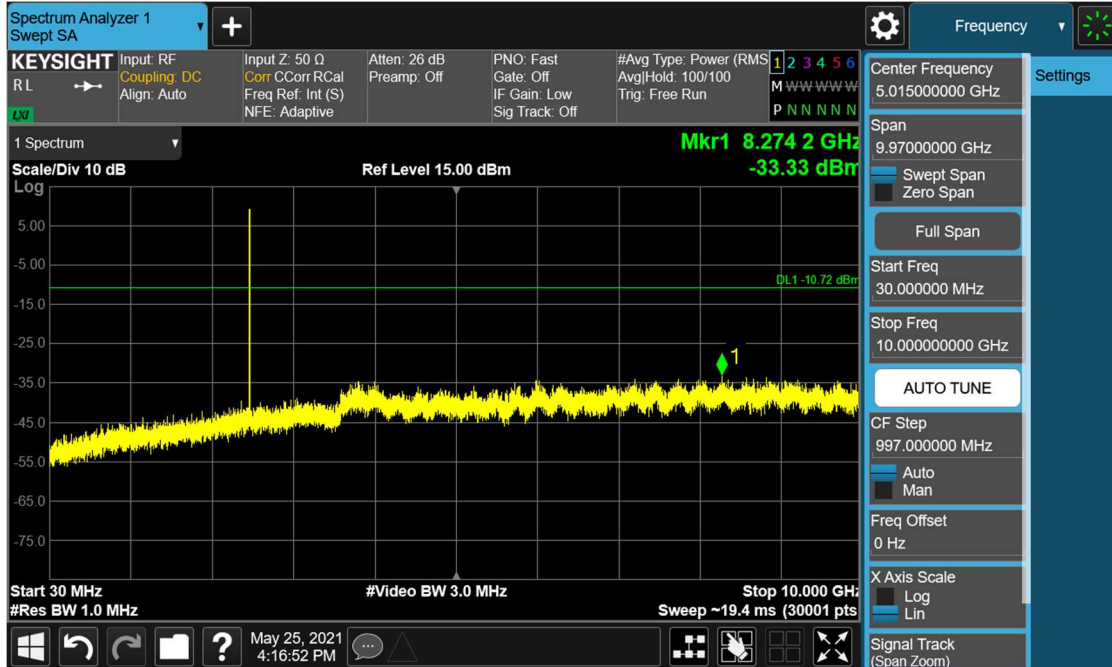


Plot 7-38. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

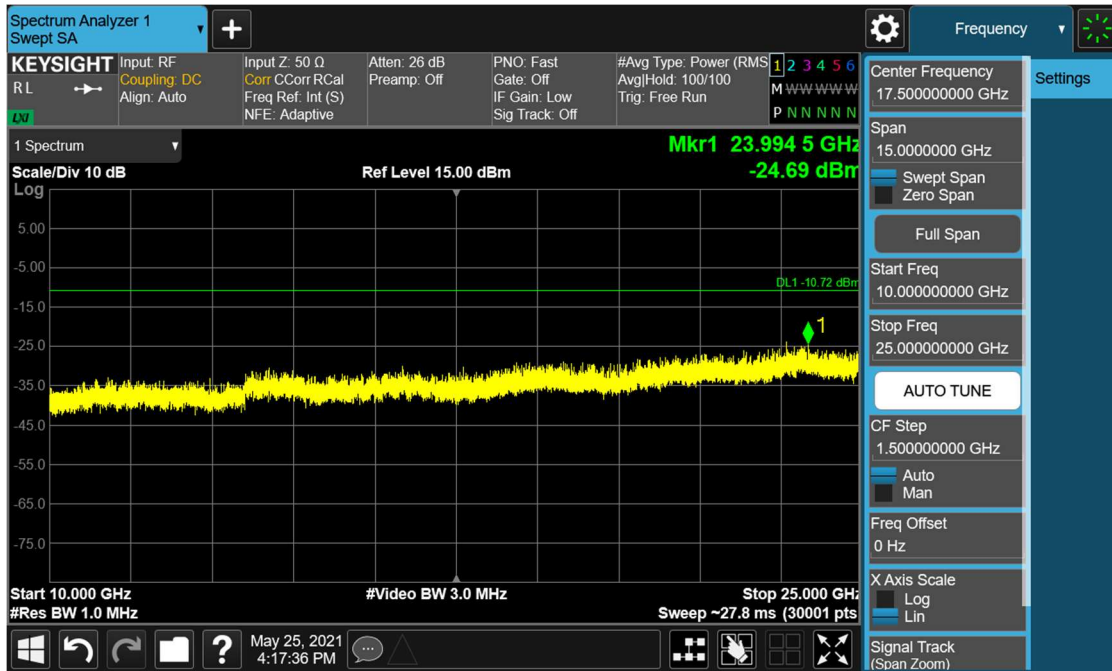


Plot 7-39. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 40 of 58



Plot 7-40. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)



Plot 7-41. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

FCC ID: A3LSMA127FN	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 41 of 58

7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-5 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-5. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3



Test Settings

Average Field Strength Measurements per Section 4.1.4.2.3 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 1kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize

Peak Field Strength Measurements per Section 4.1.4.2.2 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-6 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 42 of 58	

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-6. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

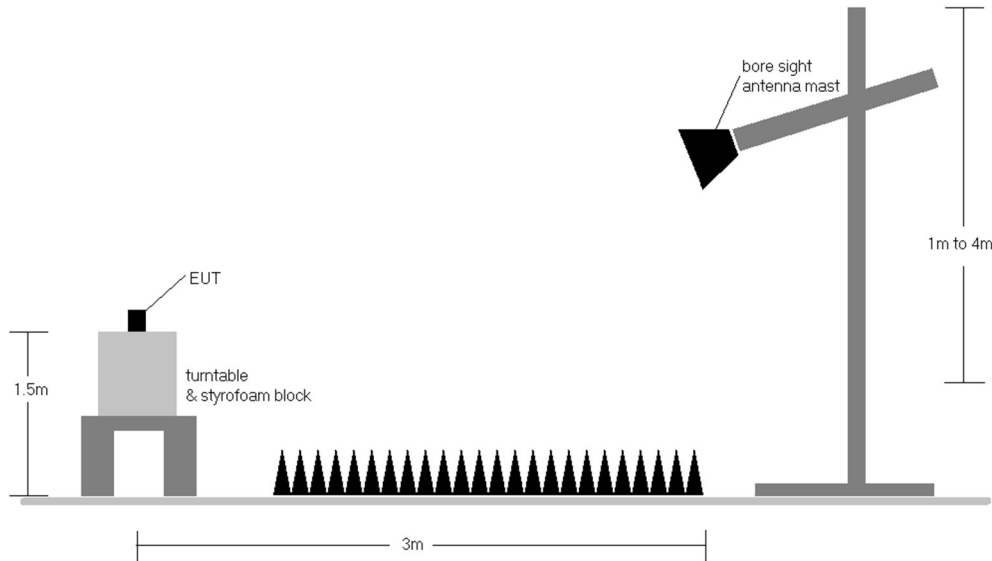




Figure 7-8. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-5.
2. No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. The duty cycle correction factor was not applied to noise floor measurements.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.



FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 43 of 58

Sample Calculation

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

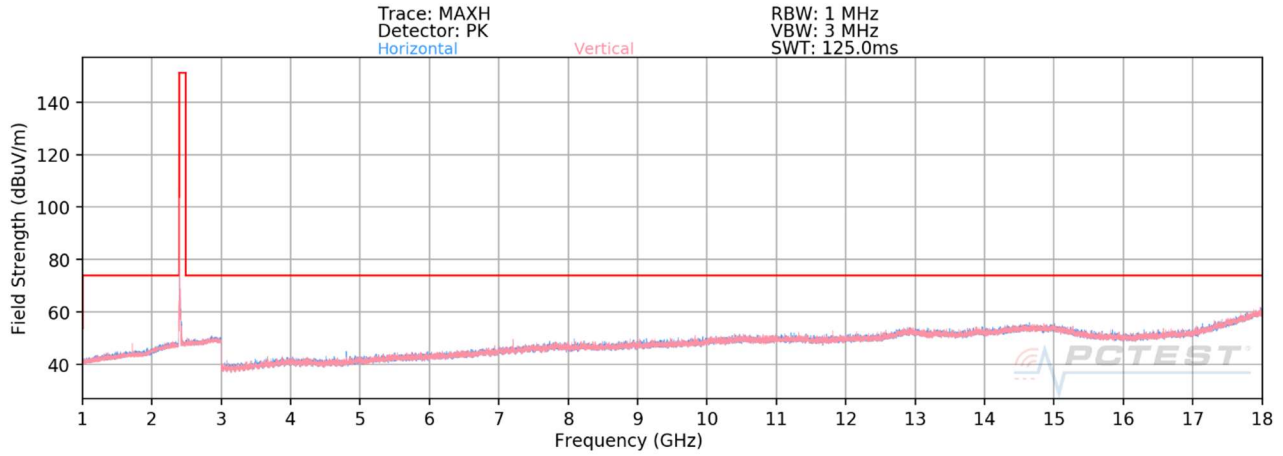
Duty Cycle Correction Factor Calculation

- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms
- Duty cycle correction factor = $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$

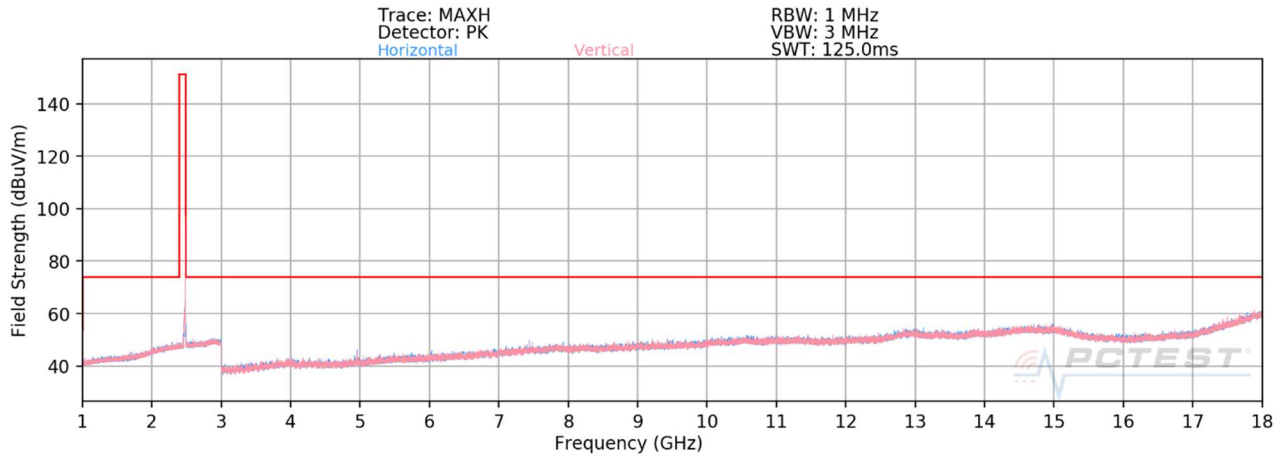
FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 44 of 58	

Radiated Spurious Emission Measurements

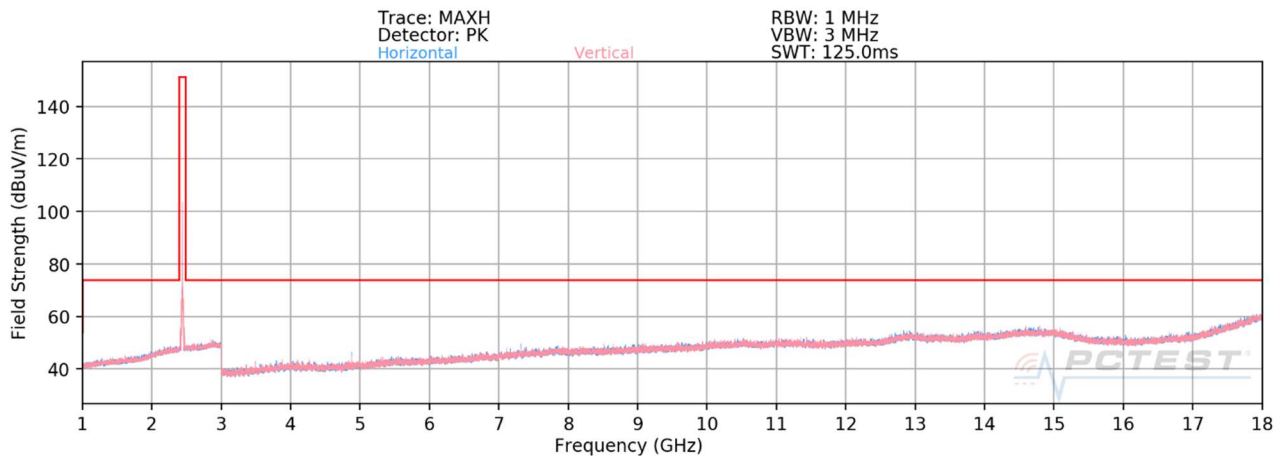
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]





Plot 7-42. Radiated Spurious Plot above 1GHz (BT – Ch. 0)



Plot 7-43. Radiated Spurious Plot above 1GHz (BT – Ch. 39)

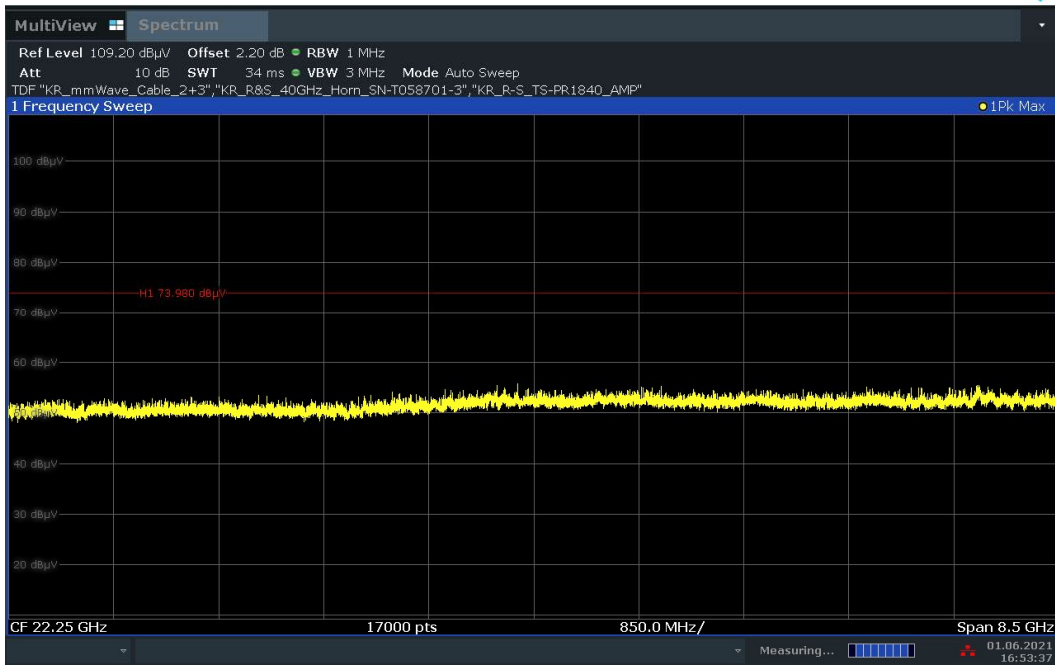


Plot 7-44. Radiated Spurious Plot above 1GHz (BT – Ch. 78)

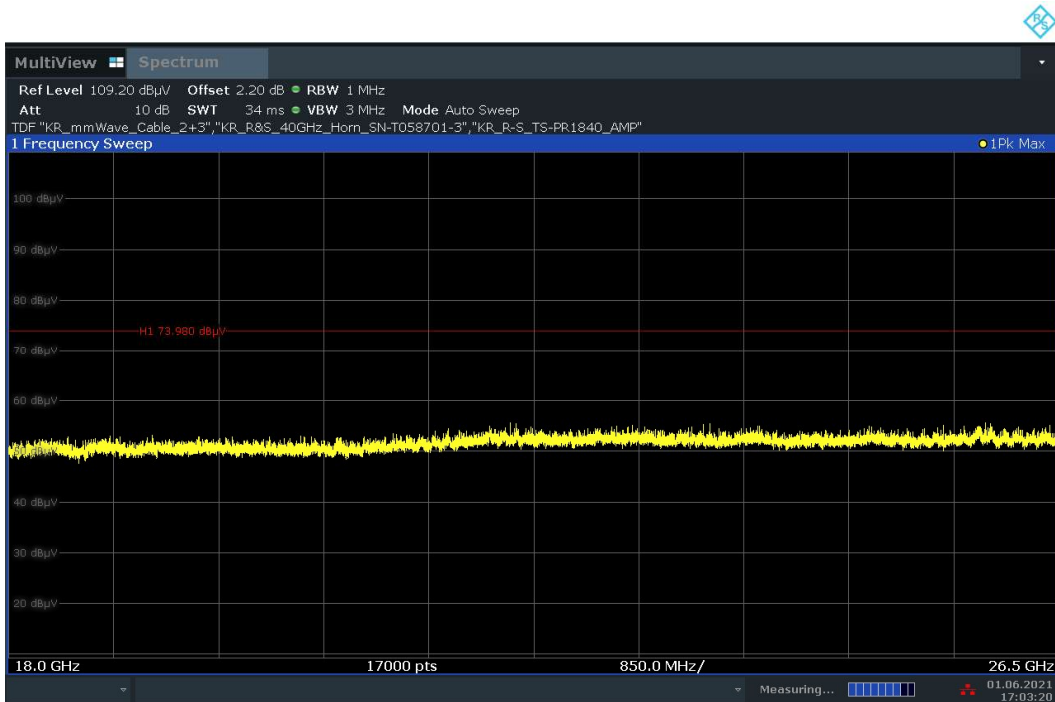
FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 45 of 58

Radiated Spurious Emissions Measurements (Above 18GHz)



§15.209; RSS-Gen [8.9]



Plot 7-45. Radiated Spurious Plot above 18GHz – H Pol.



Plot 7-46. Radiated Spurious Plot above 18GHz – V Pol.

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 46 of 58

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	105	49	-71.59	2.55	15.46	53.98	-38.52
4804.00	Peak	H	105	49	-63.78	2.55	45.77	73.98	-28.21
12010.00	Avg	H	-	-	-79.44	15.23	42.79	53.98	-11.19
12010.00	Peak	H	-	-	-67.56	15.23	54.67	73.98	-19.31

Table 7-7. Radiated Measurements

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	103	52	-68.61	2.64	18.53	53.98	-35.45
4882.00	Peak	H	103	52	-62.42	2.64	47.22	73.98	-26.76
7323.00	Avg	H	101	48	-72.38	8.53	20.65	53.98	-33.33
7323.00	Peak	H	101	48	-64.81	8.53	50.72	73.98	-23.26
12205.00	Avg	H	-	-	-85.48	15.73	37.25	53.98	-16.73
12205.00	Peak	H	-	-	-73.38	15.73	49.35	73.98	-24.63

Table 7-8. Radiated Measurements

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 47 of 58



Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	100	80	-67.92	2.64	19.22	53.98	-34.76
4960.00	Peak	H	100	80	-62.29	2.64	47.35	73.98	-26.63
7440.00	Avg	H	101	50	-71.15	8.99	22.34	53.98	-31.64
7440.00	Peak	H	101	50	-64.69	8.99	51.30	73.98	-22.68
12400.00	Avg	H	-	-	-85.26	15.68	37.42	53.98	-16.56
12400.00	Peak	H	-	-	-73.36	15.68	49.32	73.98	-24.66

Table 7-9. Radiated Measurements

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 48 of 58

7.10 Radiated Restricted Band Edge Measurements

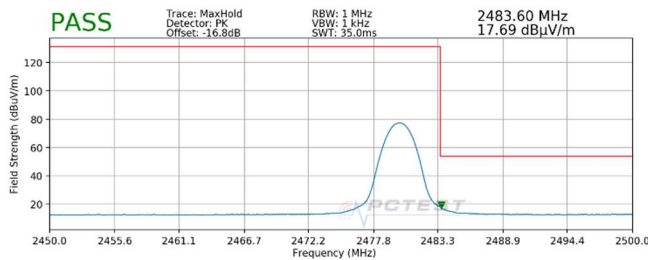
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting. Two different amplitude offsets were used depending on whether peak or average measurements were measured. The average measurements use a duty cycle correction factor (DCCF).

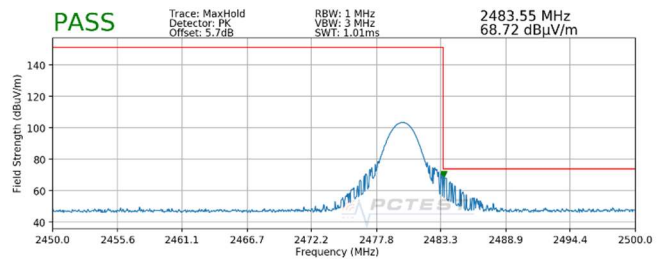
The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain} + \text{DCCF}$$



Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78



Plot 7-47. Radiated Restricted Upper Band Edge Measurement (Average)



Plot 7-48. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 49 of 58

7.11 Radiated Spurious Emissions Measurements – Below 1GHz §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-10 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-10. Radiated Limits



Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 50 of 58	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

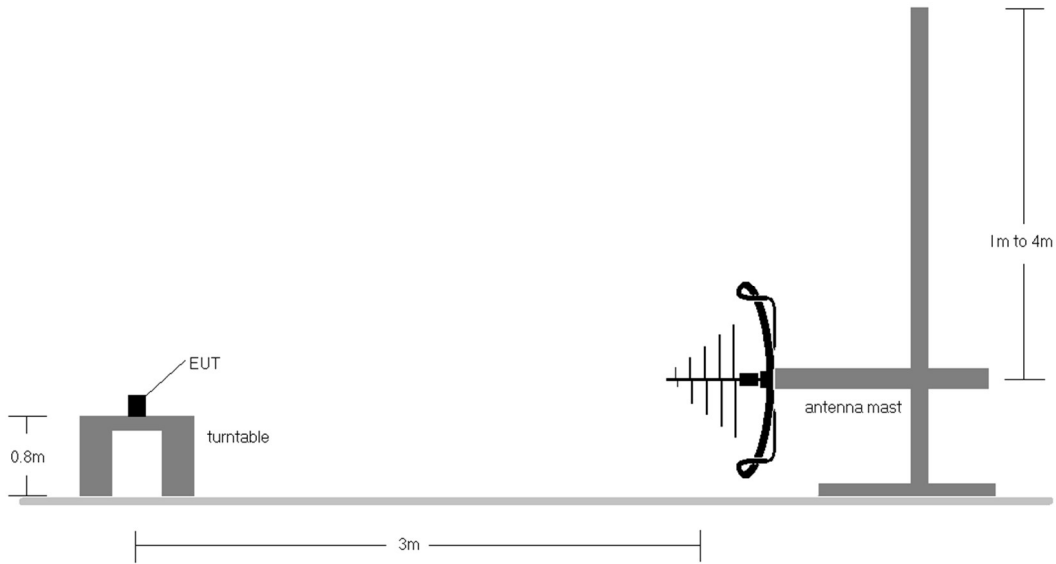





Figure 7-9. Radiated Test Setup < 1GHz

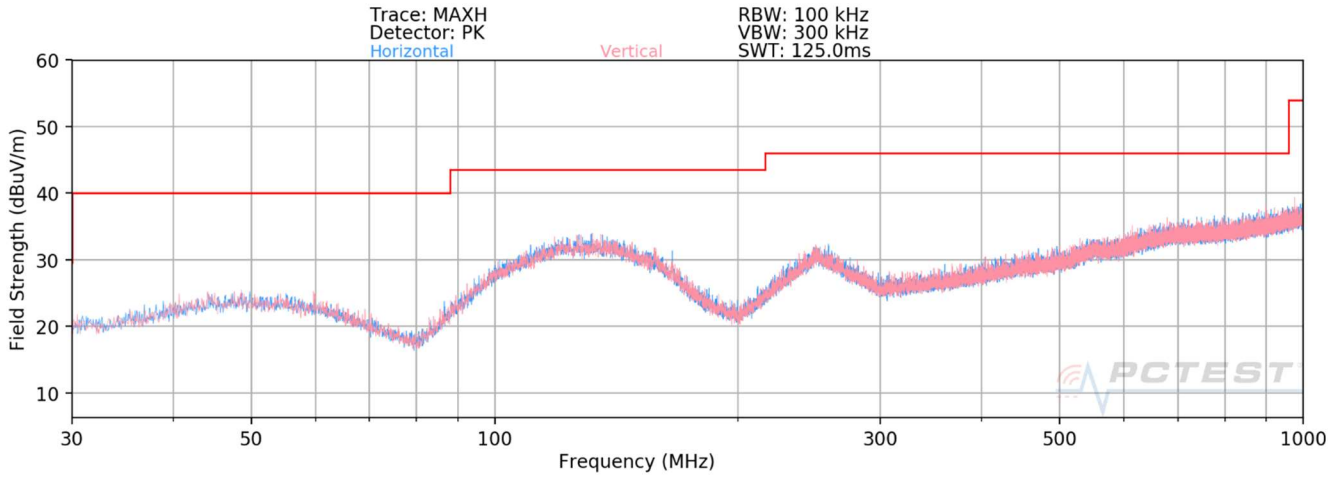
FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)	Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 51 of 58

Test Notes



1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-10.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. The unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 52 of 58	

Radiated Spurious Emissions Measurements (Below 1GHz)
§15.209; RSS-Gen [8.9]



Plot 7-49. Radiated Spurious Plot below 1GHz

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 53 of 58	

7.12 Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-11. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2



Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 54 of 58

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

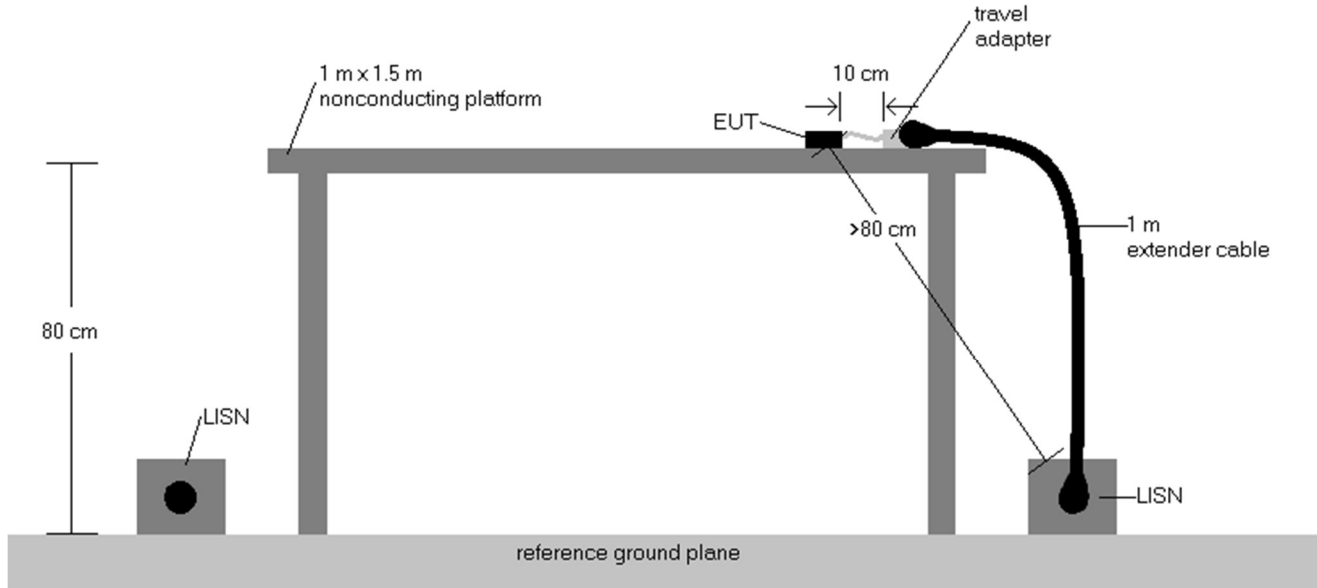


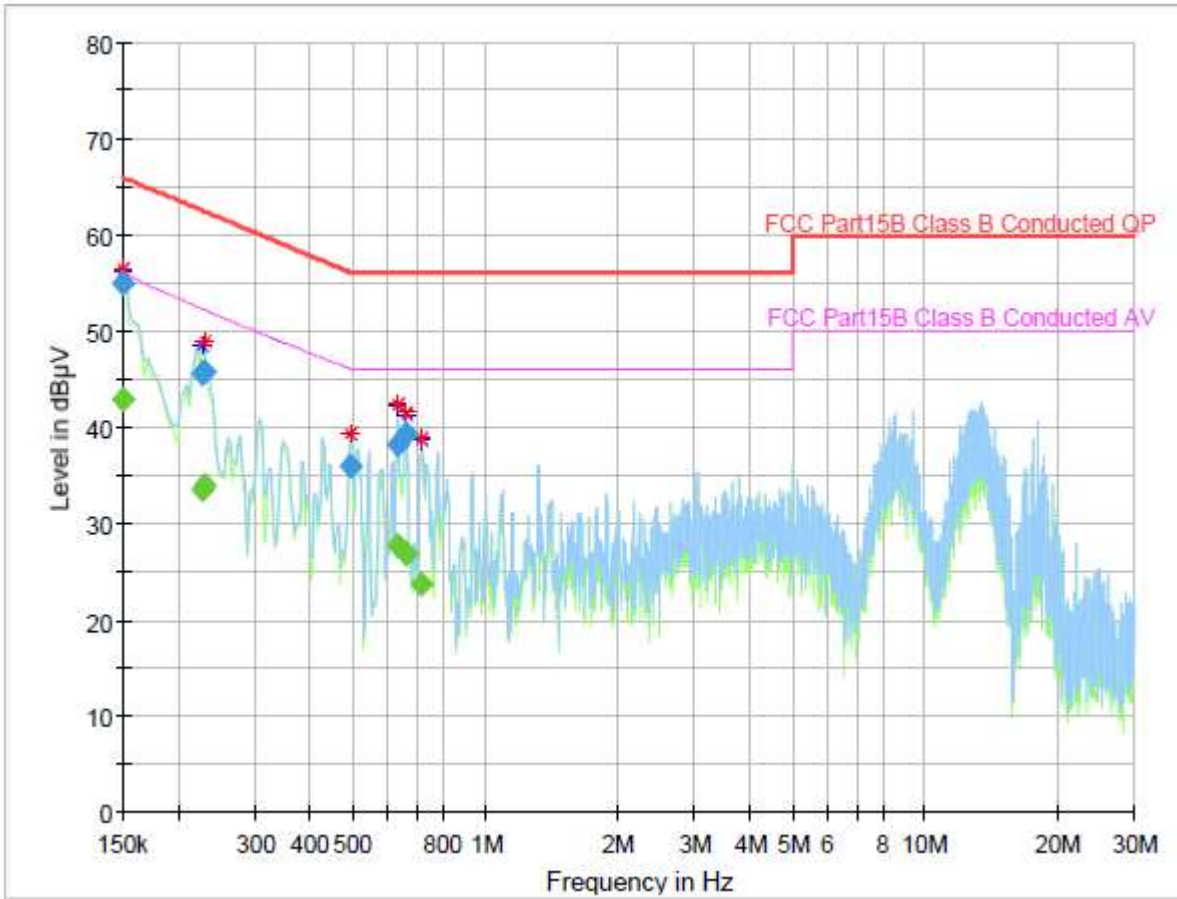


Figure 7-10. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 55 of 58





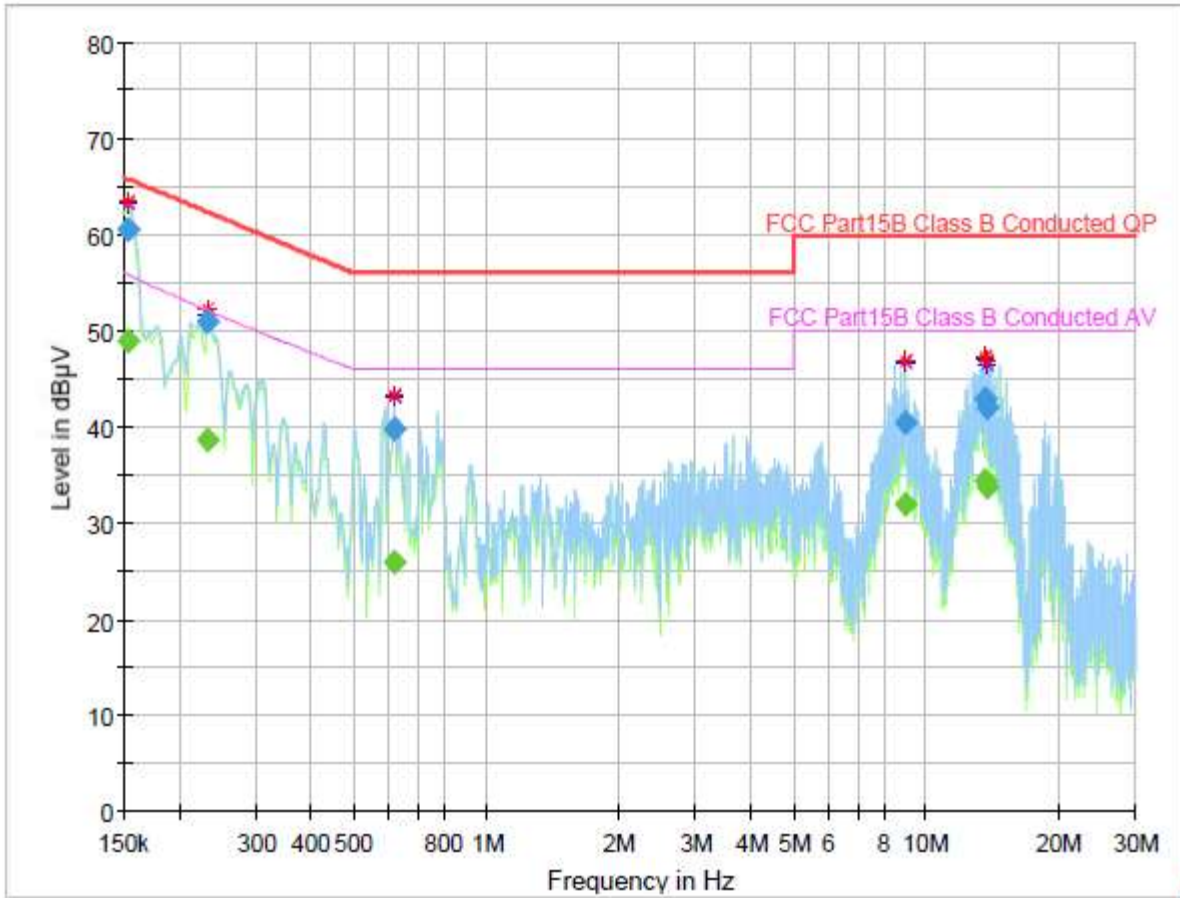
Plot 7-50. Line-Conducted Test Plot (L1)

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	42.81	56.00	13.19	1000.0	9.000	L1	9.7
0.150000	54.96	---	66.00	11.04	1000.0	9.000	L1	9.7
0.227610	---	33.44	52.31	18.88	1000.0	9.000	L1	9.7
0.227610	45.48	---	62.54	17.06	1000.0	9.000	L1	9.7
0.230595	---	33.89	52.20	18.31	1000.0	9.000	L1	9.7
0.230595	45.90	---	62.43	16.53	1000.0	9.000	L1	9.7
0.496260	36.06	---	56.06	20.00	1000.0	9.000	L1	10.0
0.633570	---	27.69	46.00	18.31	1000.0	9.000	L1	10.0
0.633570	38.12	---	56.00	17.88	1000.0	9.000	L1	10.0
0.660435	---	26.80	46.00	19.20	1000.0	9.000	L1	9.9
0.660435	39.30	---	56.00	16.70	1000.0	9.000	L1	9.9
0.717150	---	23.75	46.00	22.25	1000.0	9.000	L1	9.9

Table 7-12. Line-Conducted Test Table (L1)

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 56 of 58





Plot 7-12. Line-Conducted Test Plot (N)

Final Result



Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.152985	---	48.99	55.82	6.83	1000.0	9.000	N	9.7
0.152985	60.63	---	65.84	5.21	1000.0	9.000	N	9.7
0.233580	---	38.69	52.09	13.41	1000.0	9.000	N	9.7
0.233580	50.94	---	62.32	11.38	1000.0	9.000	N	9.7
0.618645	---	25.87	46.00	20.13	1000.0	9.000	N	9.9
0.618645	39.74	---	56.00	16.26	1000.0	9.000	N	9.9
8.958735	---	32.03	50.00	17.97	1000.0	9.000	N	9.9
8.958735	40.49	---	60.00	19.51	1000.0	9.000	N	9.9
13.579515	---	34.50	50.00	15.50	1000.0	9.000	N	10.0
13.579515	42.90	---	60.00	17.10	1000.0	9.000	N	10.0
13.773540	---	33.80	50.00	16.20	1000.0	9.000	N	10.0
13.773540	42.06	---	60.00	17.94	1000.0	9.000	N	10.0

Table 7-13. Line-Conducted Test Table (N)

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset		Page 57 of 58

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMA127FN** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMA127FN		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1K2105110019-06.A3L	Test Dates: 5/13 ~ 6/1/2021	EUT Type: Portable handset	Page 58 of 58	