

7.4 Power Spectral Density – Bluetooth (LE) §15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 28 of 56

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Bluetooth Mode	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2402	125 kbps	0	LE	-1.32	8.0	-9.32
2440	125 kbps	19	LE	-2.50	8.0	-10.50
2480	125 kbps	39	LE	-0.78	8.0	-8.78
2402	500 kbps	0	LE	-1.53	8.0	-9.53
2440	500 kbps	19	LE	-2.88	8.0	-10.88
2480	500 kbps	39	LE	-1.30	8.0	-9.30
2402	1 Mbps	0	LE	-10.92	8.0	-18.92
2440	1 Mbps	19	LE	-11.98	8.0	-19.98
2480	1 Mbps	39	LE	-10.26	8.0	-18.26
2402	2 Mbps	0	LE	-10.77	8.0	-18.77
2440	2 Mbps	19	LE	-11.83	8.0	-19.83
2480	2 Mbps	39	LE	-10.45	8.0	-18.45

Table 7-4. Conducted Power Density Measurements

FCC ID: A3LSMA127M	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 29 of 56

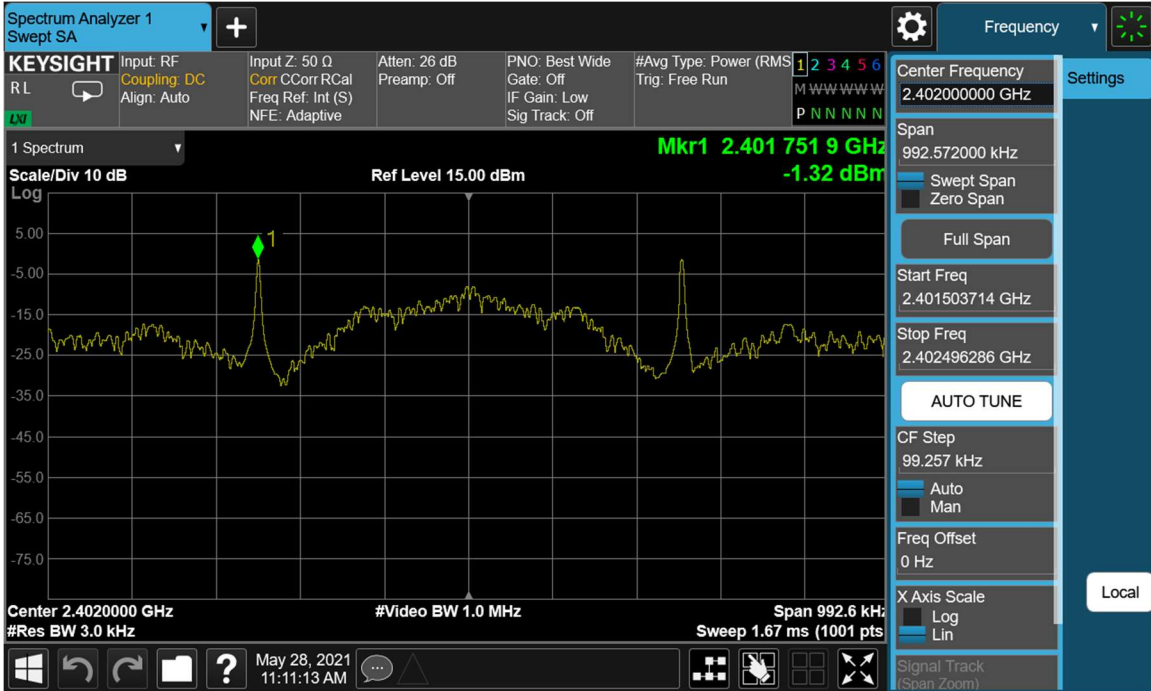

Plot 7-25. Power Spectral Density Plot (Bluetooth (LE), 125kbps – Ch. 0)




Plot 7-26. Power Spectral Density Plot (Bluetooth (LE), 125kbps – Ch. 19)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 30 of 56




Plot 7-27. Power Spectral Density Plot (Bluetooth (LE), 125kbps – Ch. 39)

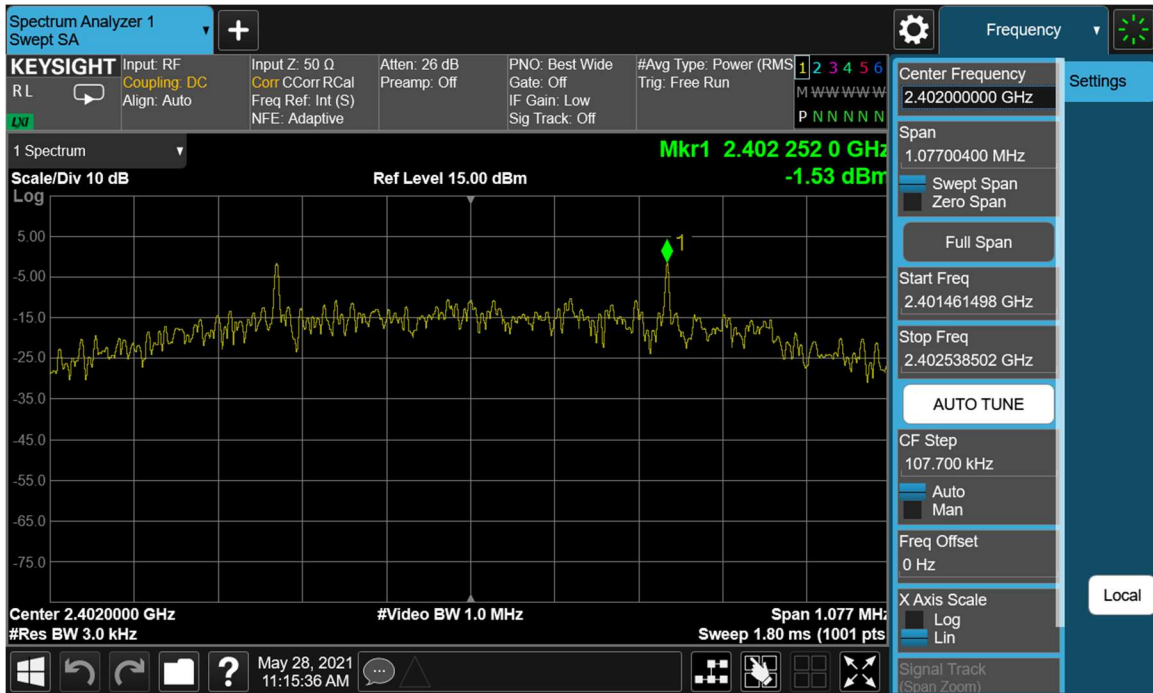


Plot 7-28. Power Spectral Density Plot (Bluetooth (LE), 500kbps – Ch. 0)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 31 of 56

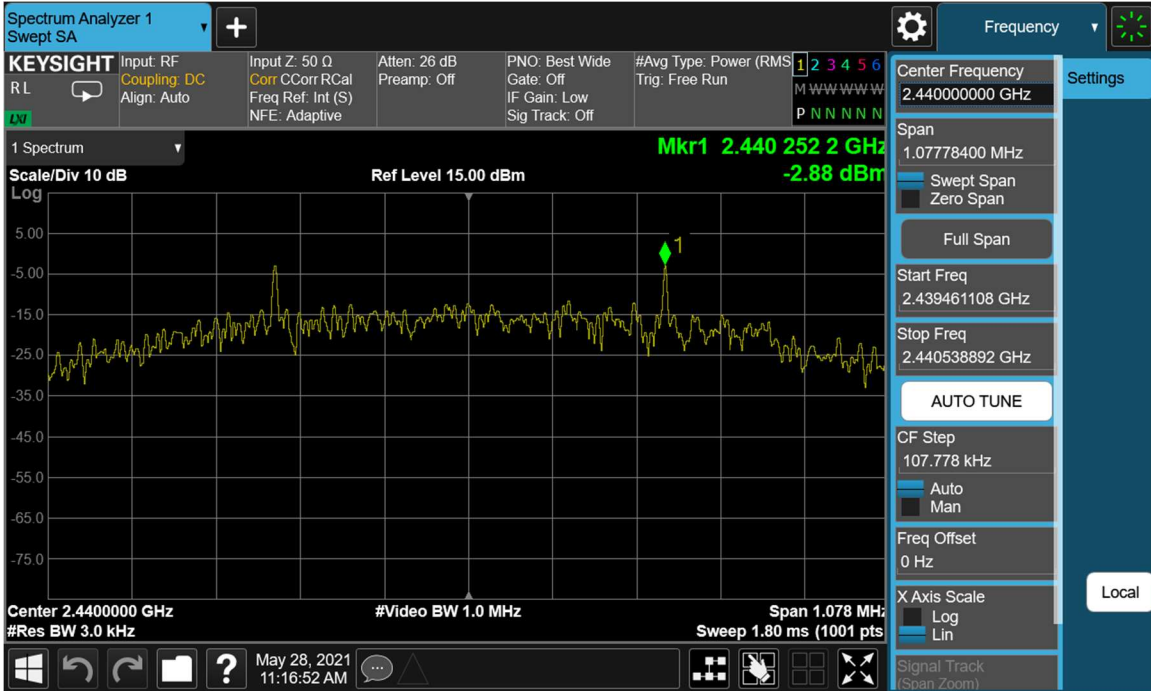


Plot 7-29. Power Spectral Density Plot (Bluetooth (LE), 500kbps – Ch. 19)

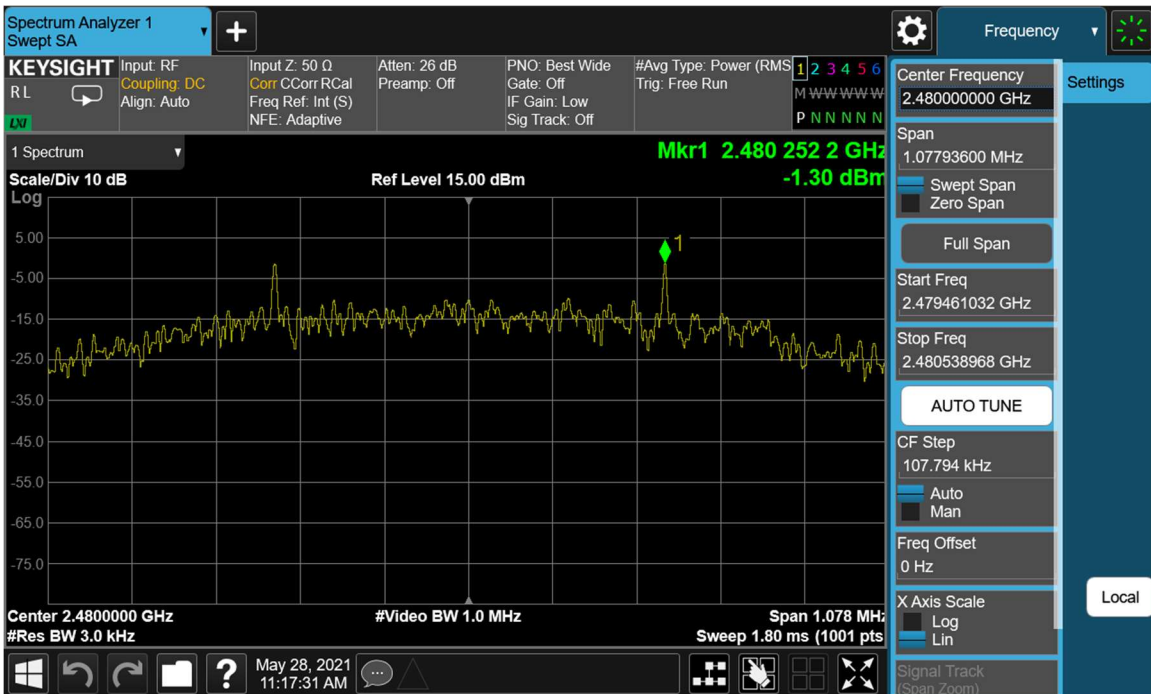


Plot 7-30. Power Spectral Density Plot (Bluetooth (LE), 500kbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 32 of 56

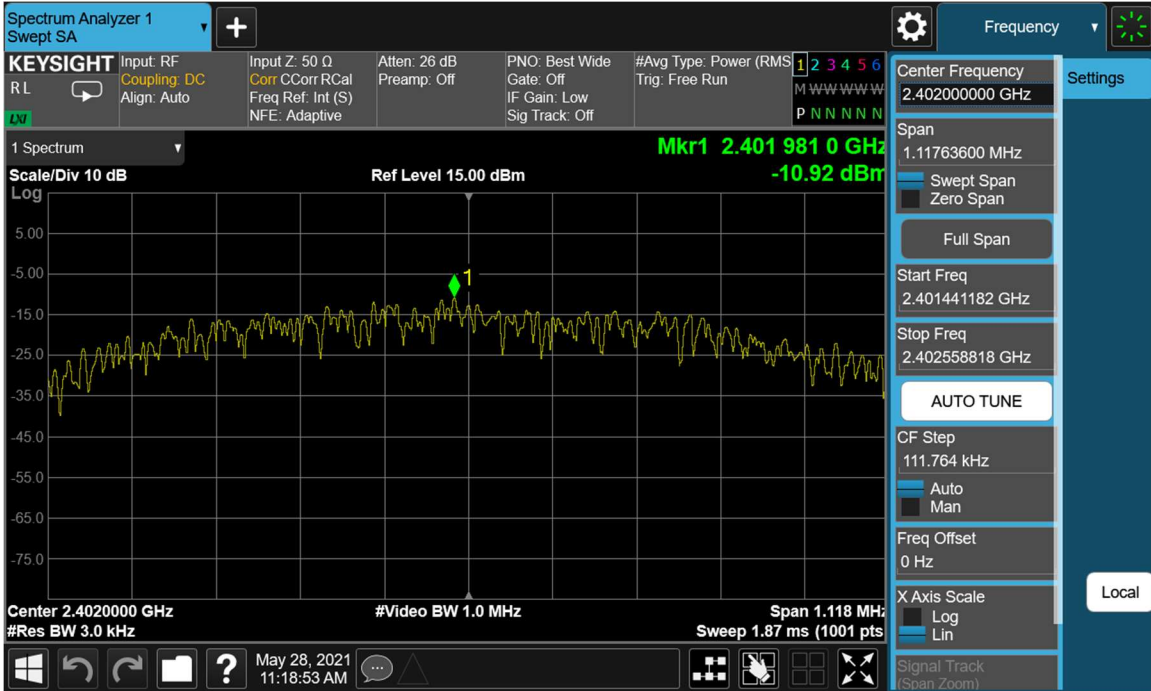


Plot 7-31. Power Spectral Density Plot (Bluetooth (LE), 1Mbps – Ch. 0)

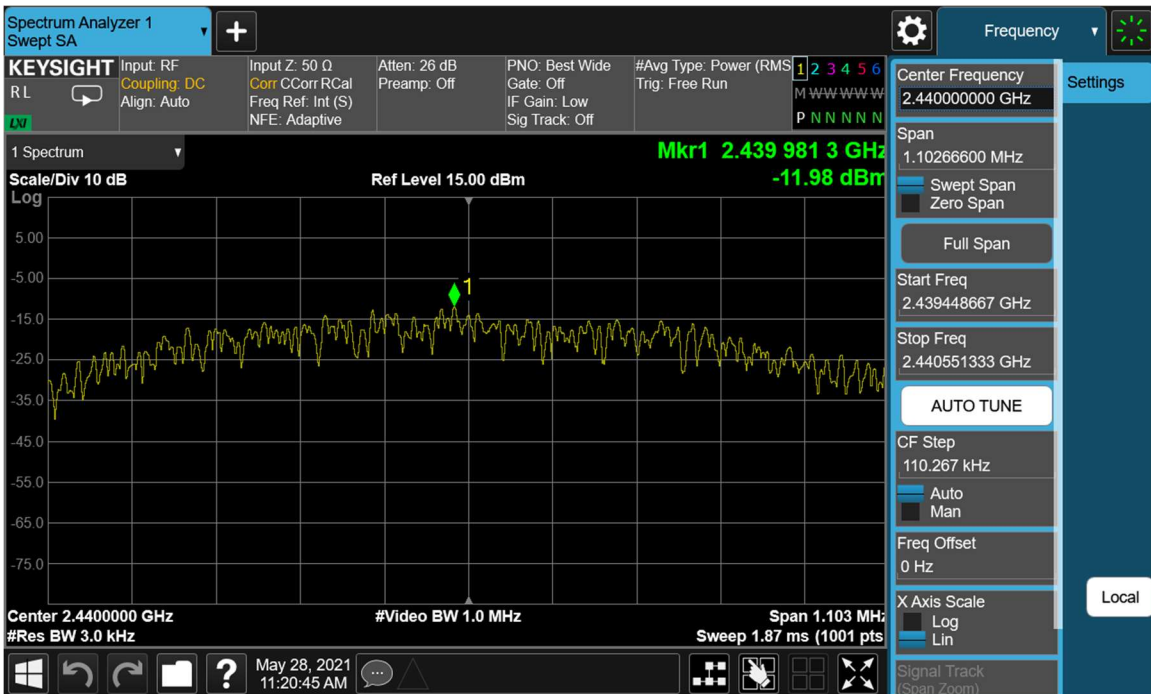


Plot 7-32. Power Spectral Density Plot (Bluetooth (LE), 1Mbps – Ch. 19)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 33 of 56

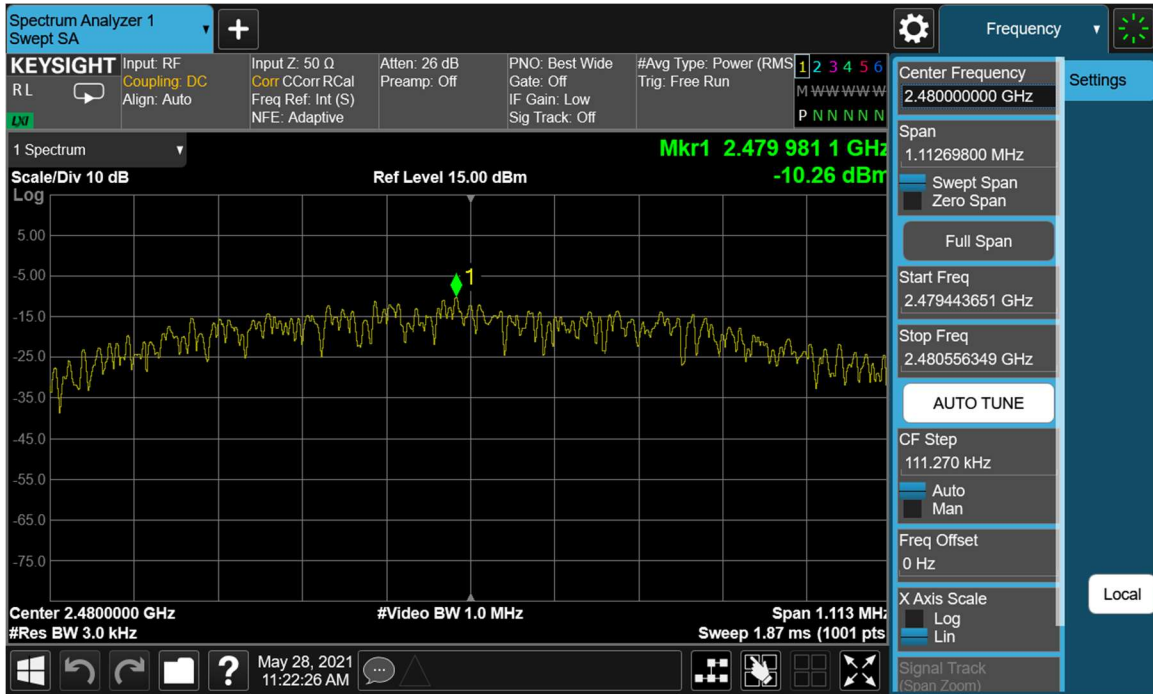


Plot 7-33. Power Spectral Density Plot (Bluetooth (LE), 1Mbps – Ch. 39)

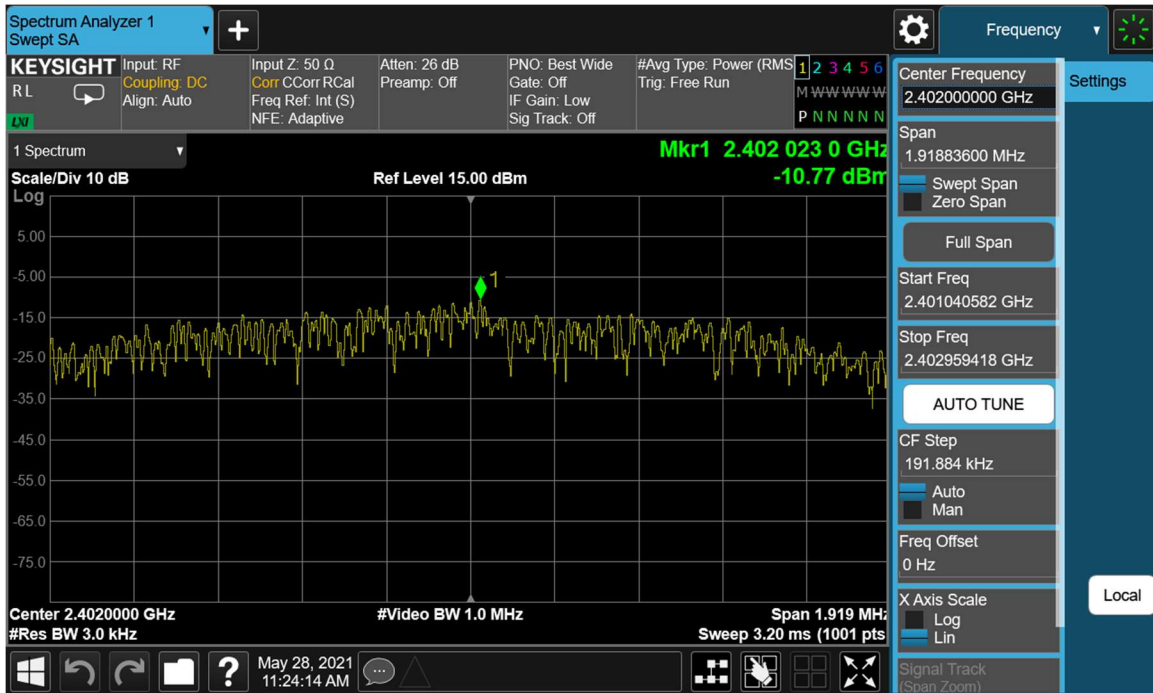


Plot 7-34. Power Spectral Density Plot (Bluetooth (LE), 2Mbps – Ch. 0)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 34 of 56

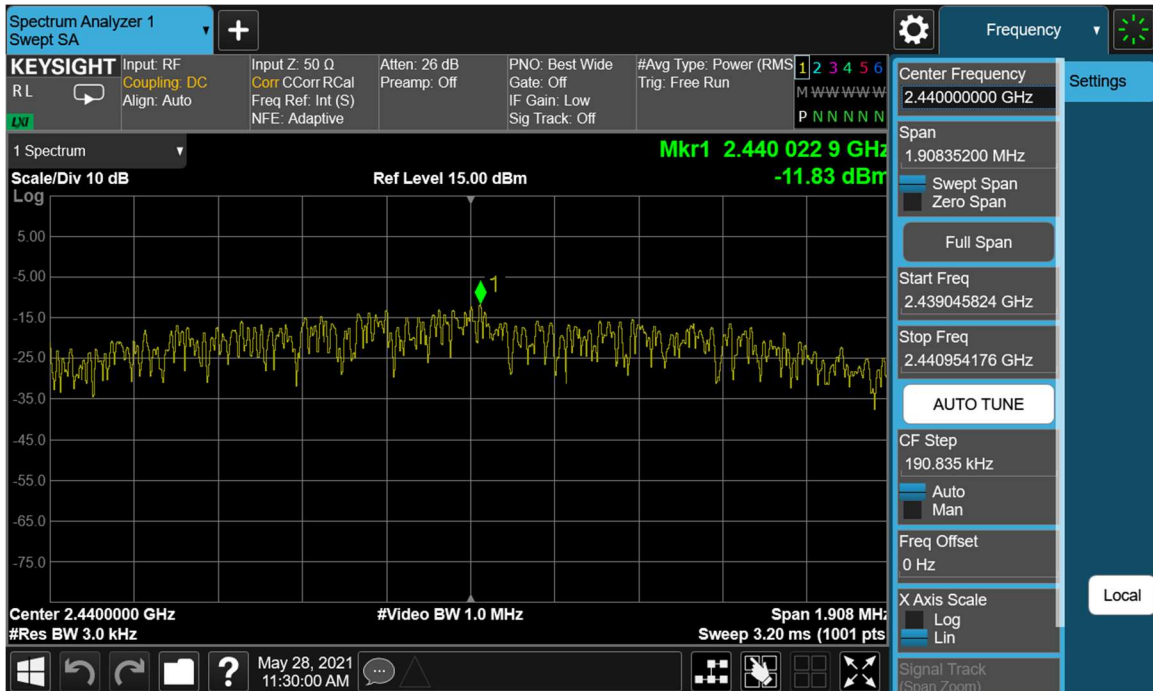

Plot 7-35. Power Spectral Density Plot (Bluetooth (LE), 2Mbps – Ch. 19)

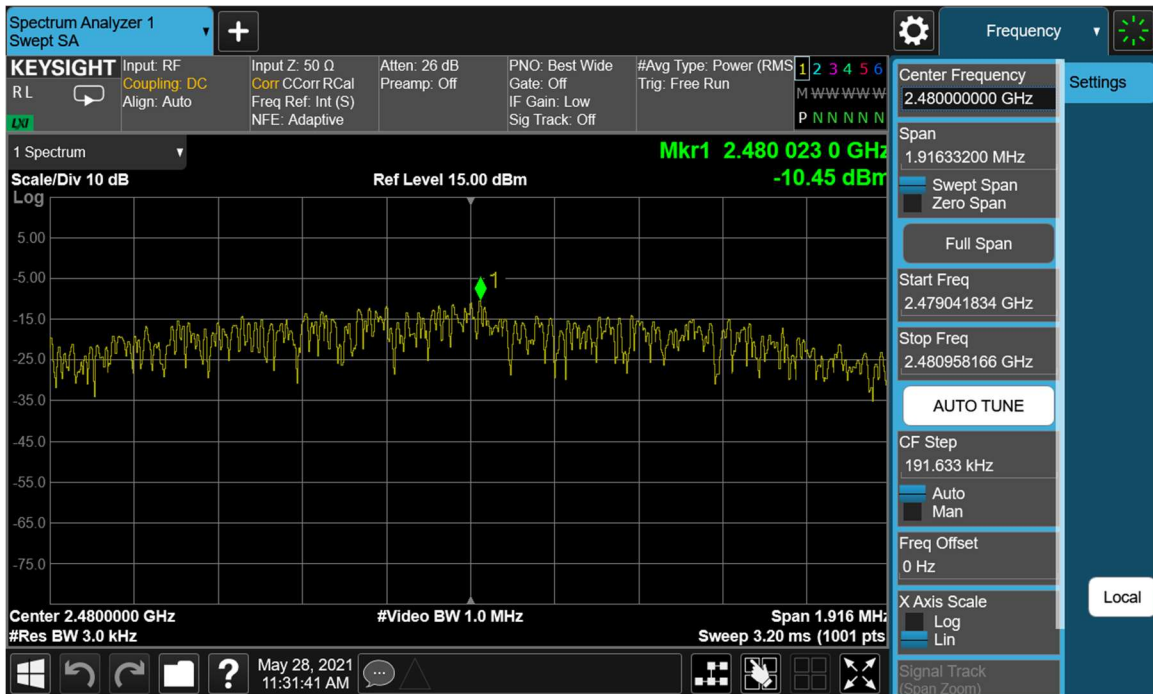

Plot 7-36. Power Spectral Density Plot (Bluetooth (LE), 2Mbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 35 of 56

7.5 Conducted Emissions at the Band Edge §15.247(d); RSS-247 [5.5]

Test Overview and Limit

For the following out of band conducted spurious emissions plots at the band edge, the EUT was set to transmit at maximum power with the largest packet size available. These settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

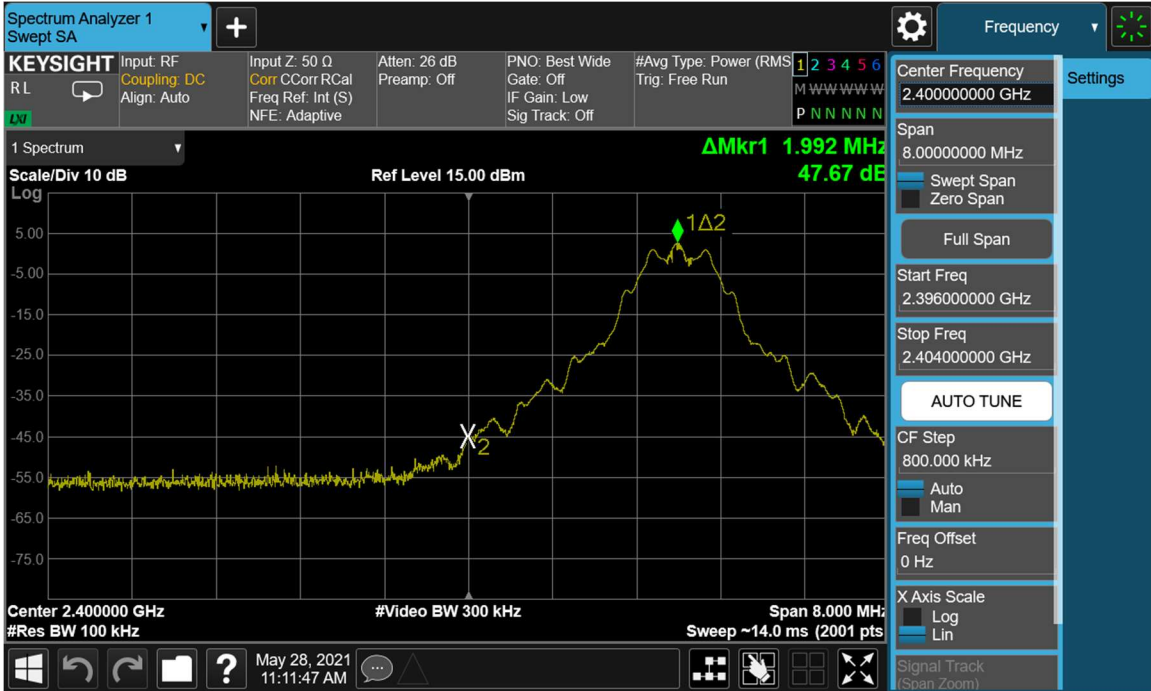


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 36 of 56




Plot 7-37. Band Edge Plot (Bluetooth (LE), 125kbps – Ch. 0)

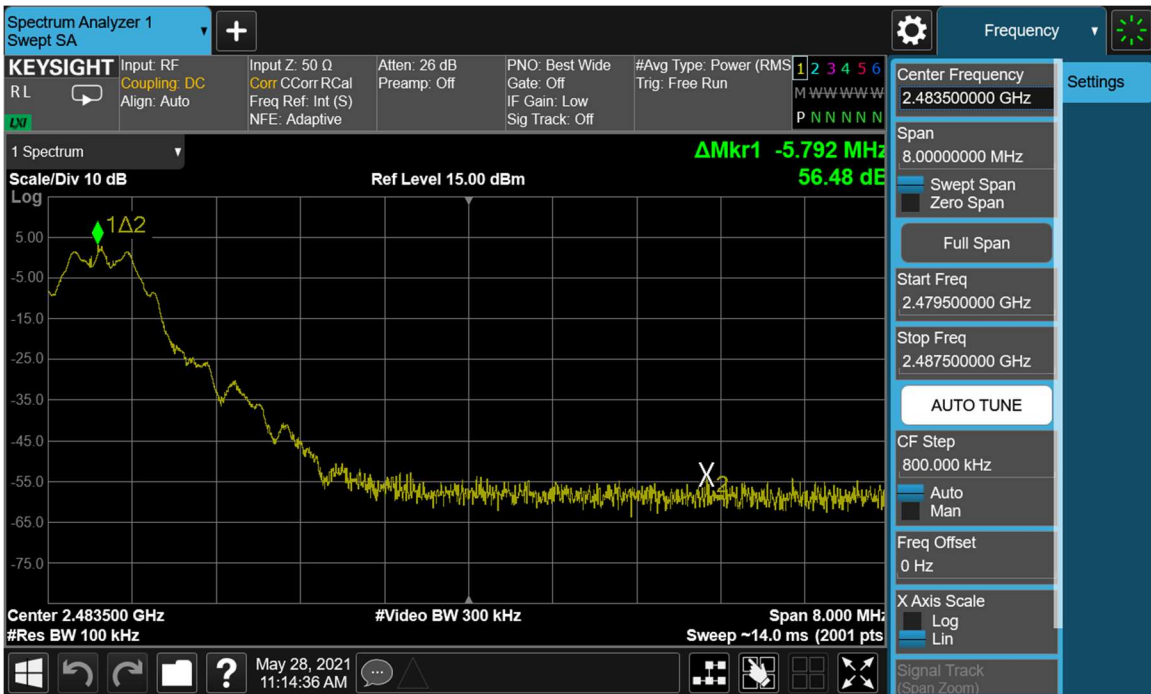


Plot 7-38. Band Edge Plot (Bluetooth (LE), 125kbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 37 of 56

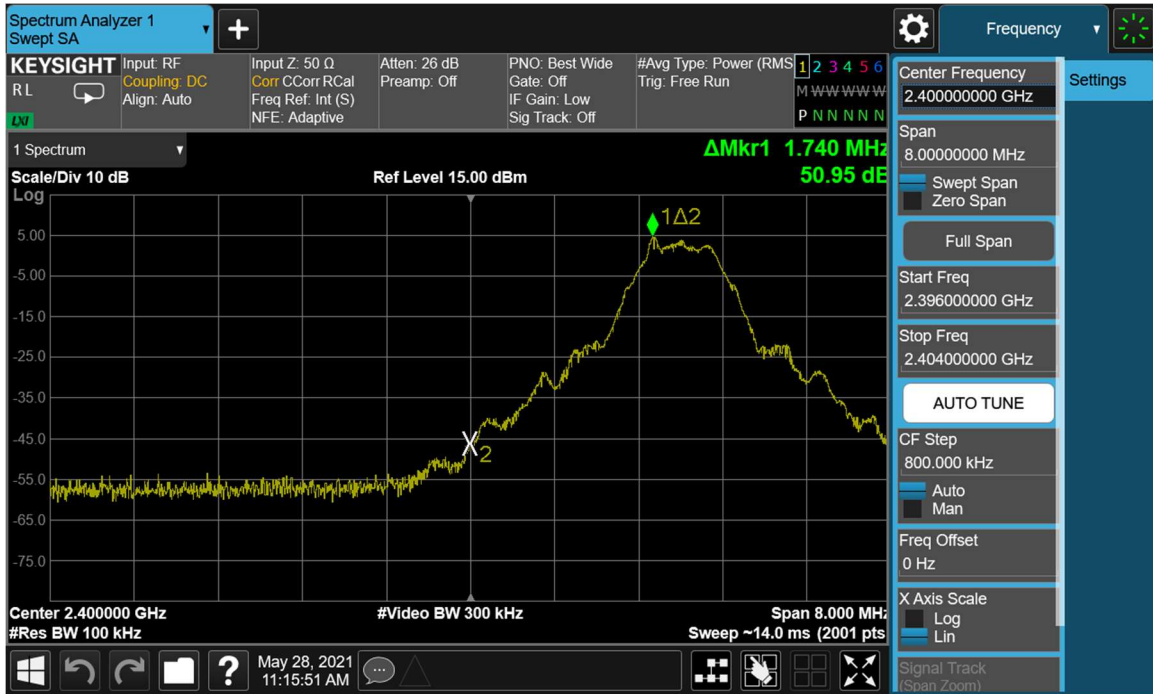


Plot 7-39. Band Edge Plot (Bluetooth (LE), 500kbps – Ch. 0)

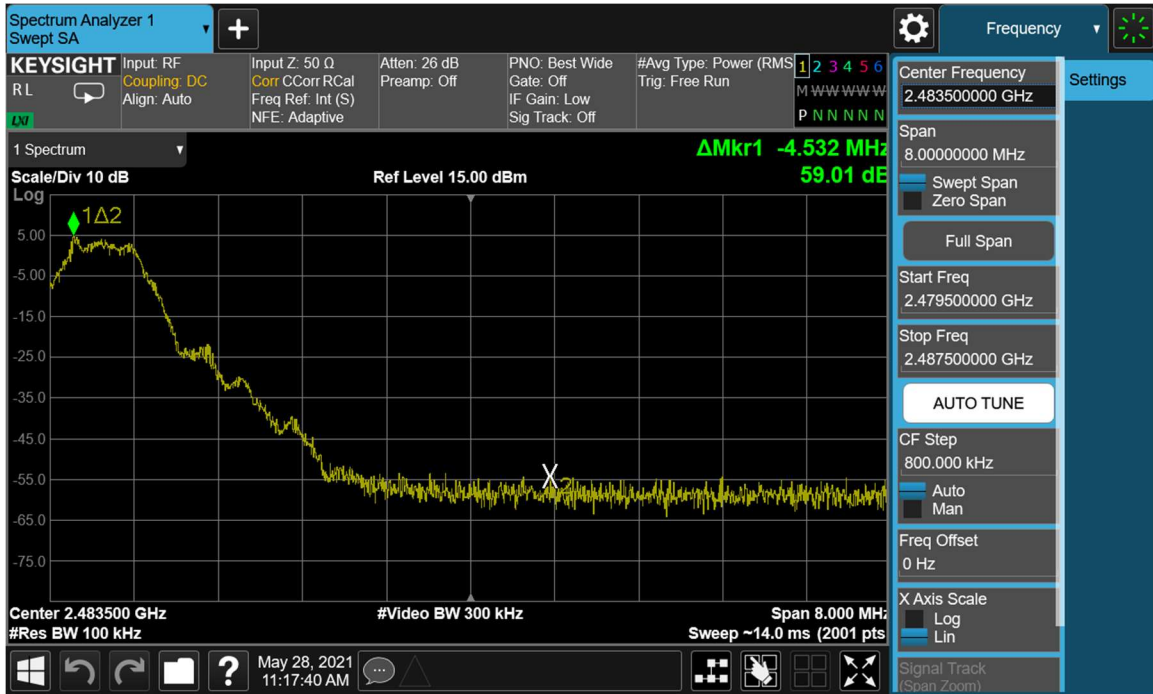


Plot 7-40. Band Edge Plot (Bluetooth (LE), 500kbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 38 of 56

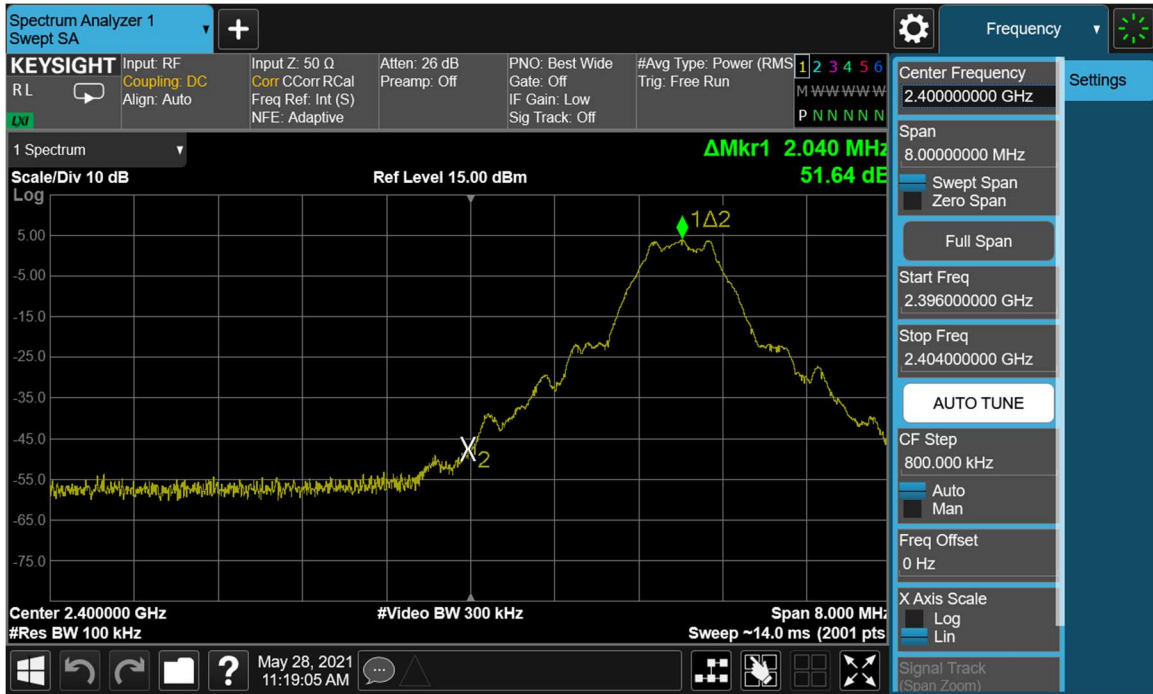

Plot 7-41. Band Edge Plot (Bluetooth (LE), 1Mbps – Ch. 0)

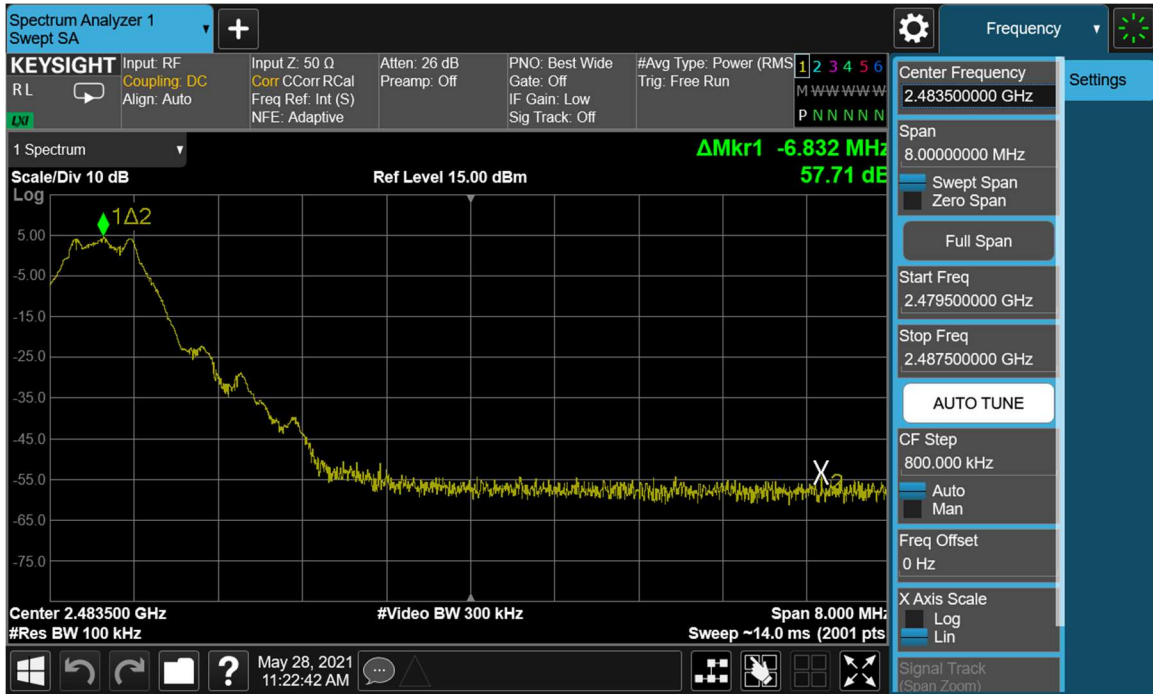

Plot 7-42. Band Edge Plot (Bluetooth (LE), 1Mbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 39 of 56



Plot 7-43. Band Edge Plot (Bluetooth (LE), 2Mbps – Ch. 0)



Plot 7-44. Band Edge Plot (Bluetooth (LE), 2Mbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 40 of 56

7.6 Conducted Spurious Emissions §15.247(d); RSS-247 [5.5]

Test Overview and Limit

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 8.5 of KDB 558074 D01 v05r02 and Section 11.11.3 of ANSI C63.10-2013.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. Test Instrument & Measurement Setup

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 41 of 56


Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

FCC ID: A3LSMA127M		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset	Page 42 of 56

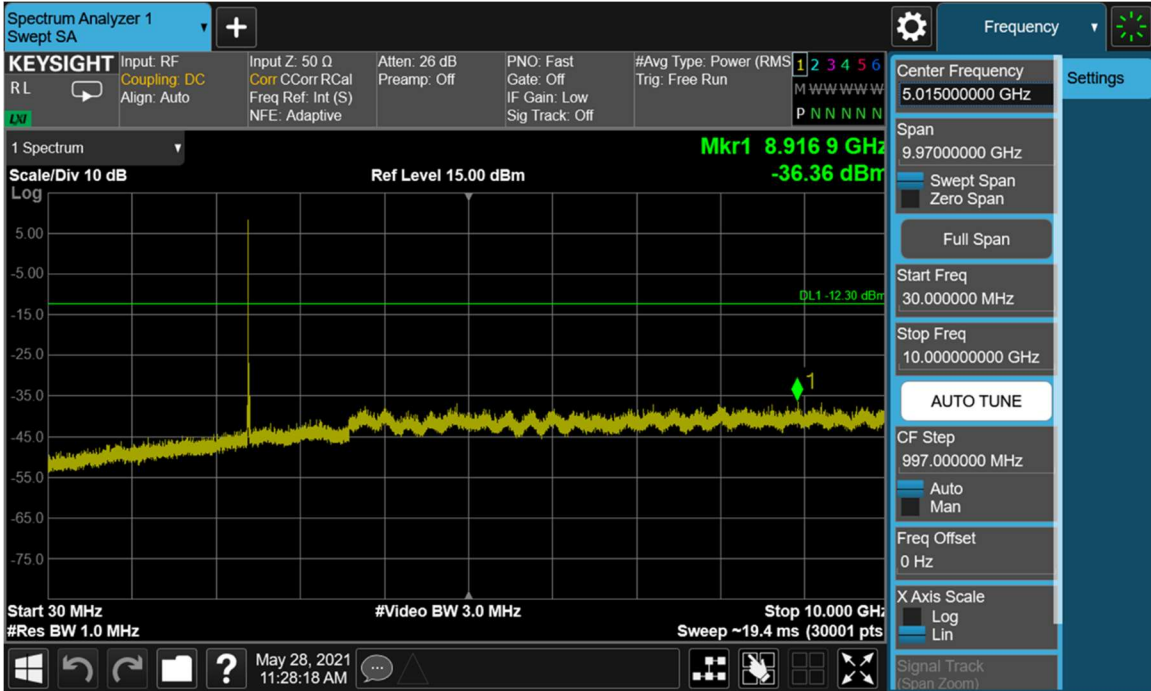


Plot 7-45. Conducted Spurious Plot (Bluetooth (LE), 2Mbps – Ch. 0)

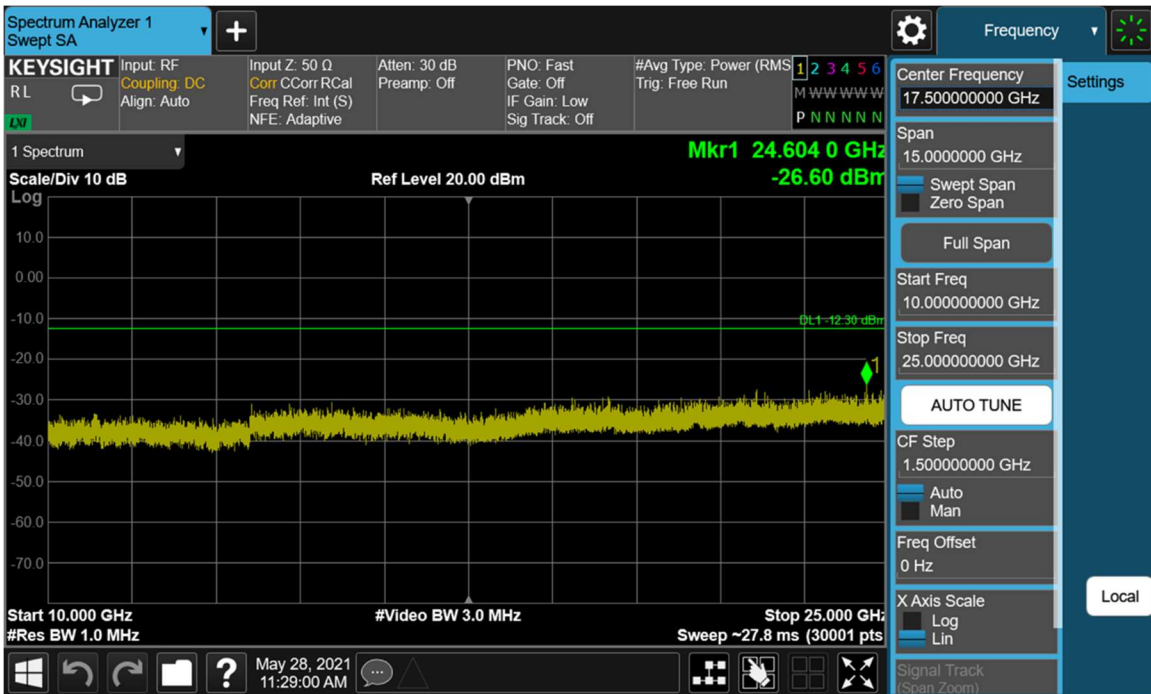


Plot 7-46. Conducted Spurious Plot (Bluetooth (LE), 2Mbps – Ch. 0)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 43 of 56

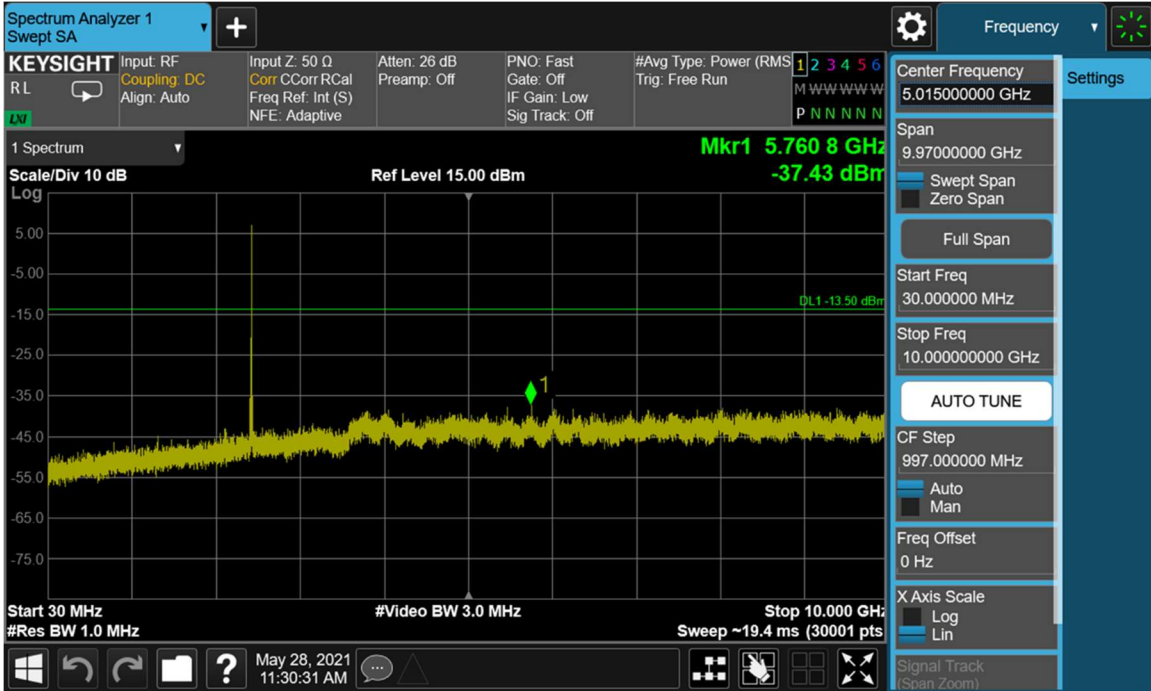


Plot 7-47. Conducted Spurious Plot (Bluetooth (LE), 2Mbps – Ch. 19)

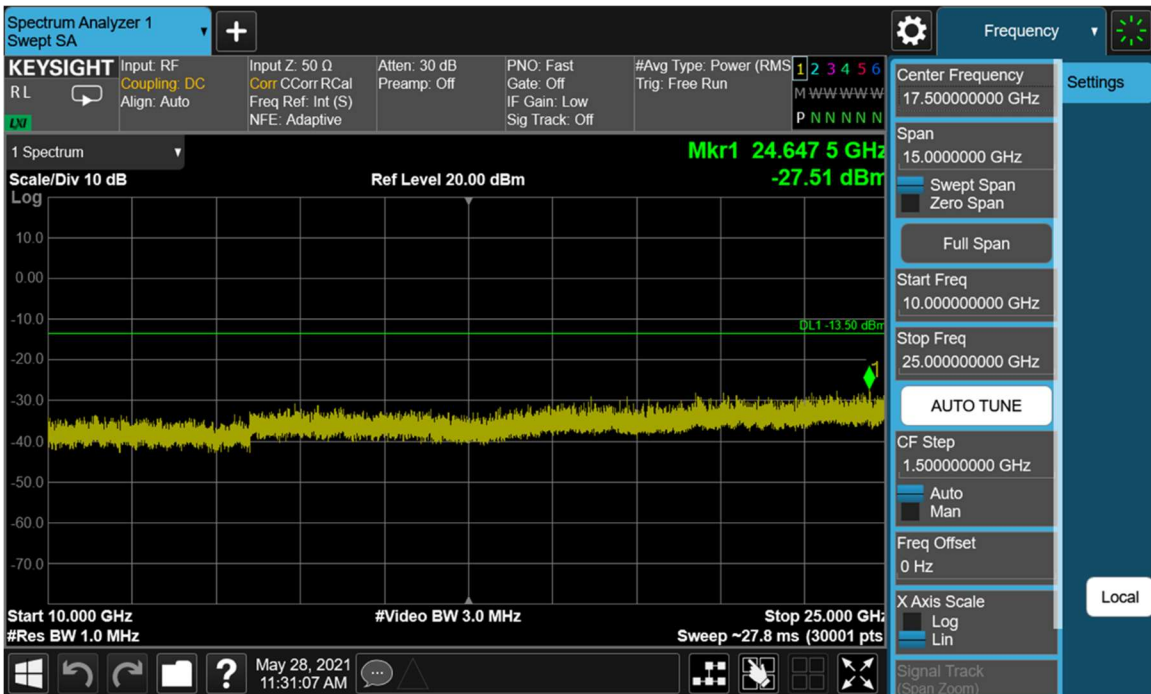


Plot 7-48. Conducted Spurious Plot (Bluetooth (LE), 2Mbps – Ch. 19)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 44 of 56

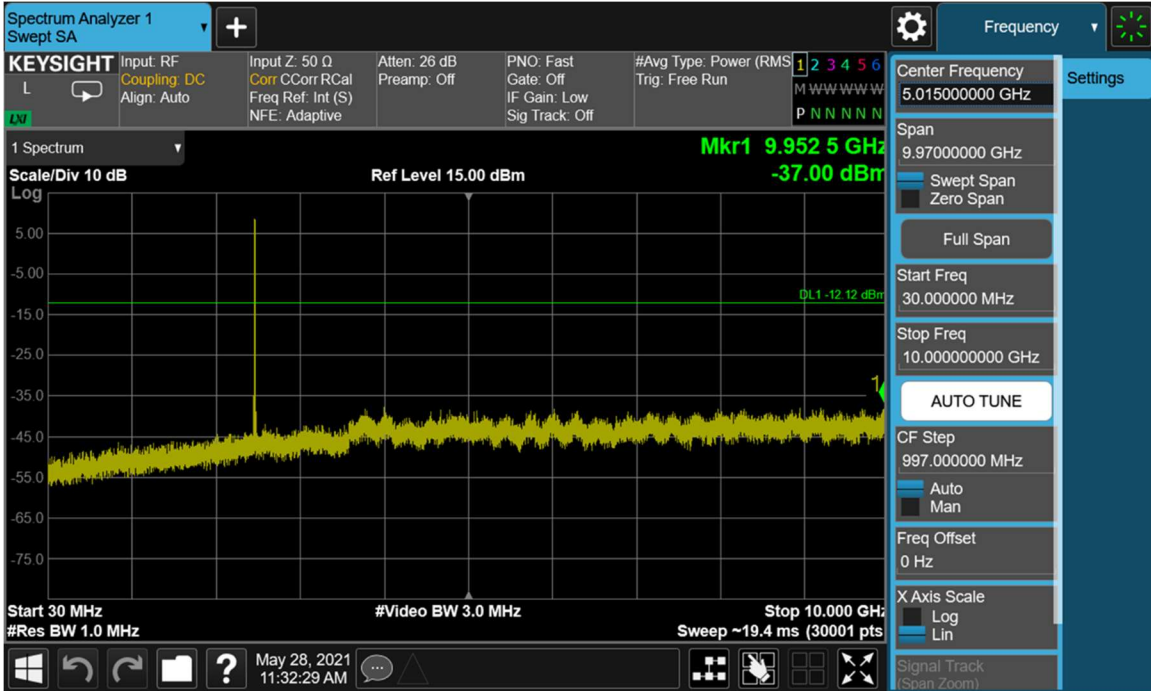

Plot 7-49. Conducted Spurious Plot (Bluetooth (LE), 2Mbps – Ch. 39)

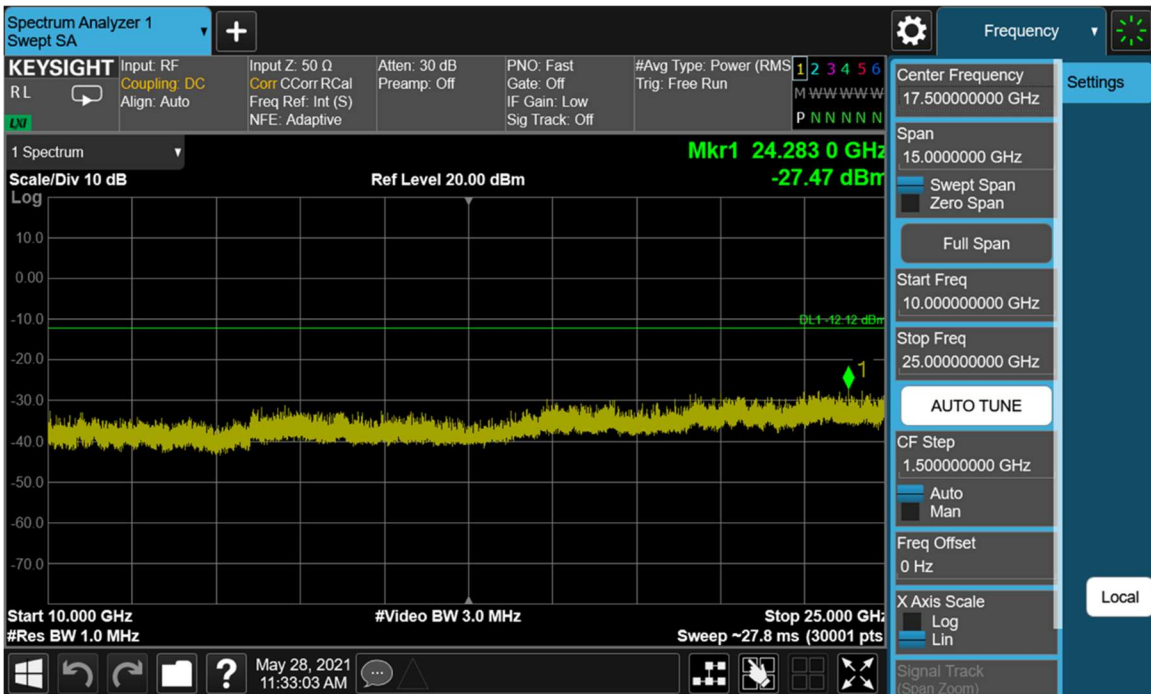

Plot 7-50. Conducted Spurious Plot (Bluetooth (LE), 2Mbps – Ch. 39)

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 45 of 56

7.7 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-5 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-5. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r02 – Section 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3kHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

FCC ID: A3LSMA127M	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset		Page 46 of 56

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-6 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-6. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

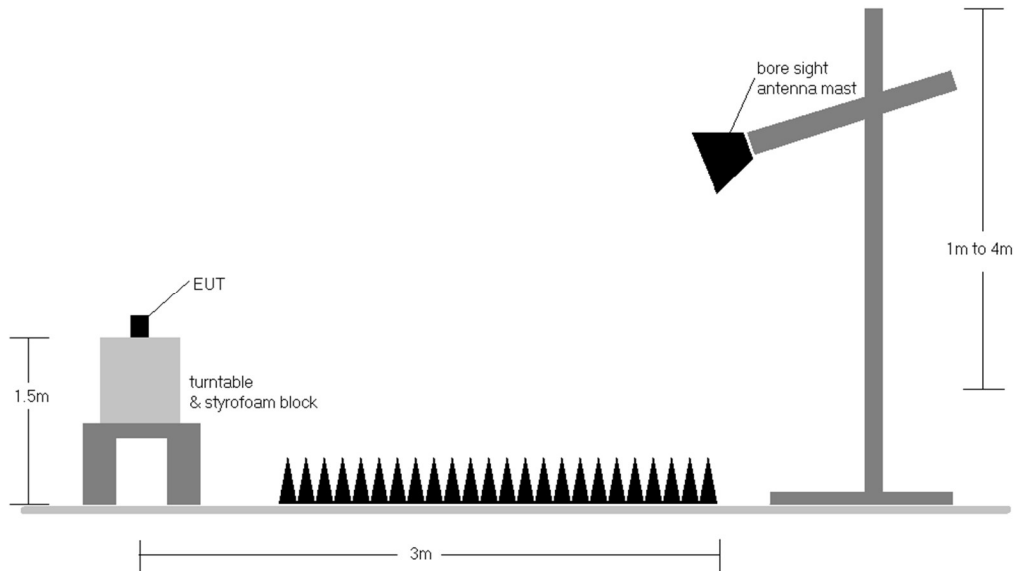


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: A3LSMA127M	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1K2103030020-02.A3L	Test Dates: 05/13/2021 – 06/01/2021	EUT Type: Portable Handset	Page 47 of 56