

## PART 22 MEASUREMENT REPORT

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
01/03/2022 - 01/26/2022  
**Test Report Issue Date:**  
02/04/2022  
**Test Site/Location:**  
PCTEST Lab. Yongin-Si, Gyeonggi-do, South Korea  
**Test Report Serial No.:**  
1M2112270166-02.A3L

**FCC ID:** **A3LSMA135U**  
**Applicant Name:** **Samsung Electronics Co., Ltd.**

**Application Type:** Certification  
**Model:** SM-A135U  
**Additional Model(s):** SM-A135U1, SM-A135U1/DS  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** 22  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by






Reviewed by

<b>FCC ID:</b> A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset
		Page 1 of 63


# T A B L E O F C O N T E N T S

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	11
7.1	Summary .....	11
7.2	Occupied Bandwidth .....	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	20
7.4	Band Edge Emissions at Antenna Terminal .....	36
7.5	Radiated Power (ERP) .....	44
7.6	Radiated Spurious Emissions Measurements .....	47
7.7	Frequency Stability / Temperature Variation .....	59
8.0	CONCLUSION.....	63

<b>FCC ID:</b> A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 2 of 63




## PART 22 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	824.2 - 848.8	0.592	27.72	0.971	29.87	236KGXW
EDGE	N/A	8-PSK	824.2 - 848.8	0.134	21.26	0.219	23.41	231KG7W
WCDMA	N/A	Spread Spectrum	826.4 - 846.6	0.066	18.18	0.108	20.33	4M15F9W
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.080	19.03	0.131	21.18	13M4G7D
		16QAM	831.5 - 841.5	0.061	17.88	0.101	20.03	13M5W7D
	10 MHz	QPSK	829.0 - 844.0	0.080	19.02	0.131	21.17	8M99G7D
		16QAM	829.0 - 844.0	0.062	17.96	0.102	20.11	9M02W7D
	5 MHz	QPSK	826.5 - 846.5	0.077	18.86	0.126	21.01	4M55G7D
		16QAM	826.5 - 846.5	0.064	18.07	0.105	20.22	4M54W7D
	3 MHz	QPSK	825.5 - 847.5	0.076	18.80	0.124	20.95	2M72G7D
		16QAM	825.5 - 847.5	0.062	17.94	0.102	20.09	2M72W7D
1.4 MHz	QPSK	824.7 - 848.3	0.076	18.82	0.125	20.97	1M10G7D	
	16QAM	824.7 - 848.3	0.063	17.97	0.103	20.12	1M10W7D	

### EUT Overview

<b>FCC ID:</b> A3LSMA135U		<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset		Page 3 of 63

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- PCTEST is an ISO 17025-2017 accredited test facility under the National Voluntary Laboratory Accreditation Program (NVLAP) with Certificate number 600143-0 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (26168) test laboratory with the site description on file with ISED.

<b>FCC ID:</b> A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 4 of 63

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA135U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

**Test Device Serial No.:** 0336M, 0436M, 0444M, 0736M, 0764M, 0767M, 0874M, 4500M

### 2.2 Device Capabilities

This device contains the following capabilities:



850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII (5GHz), Bluetooth (1x, EDR, LE), NFC

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 5 of 63

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset
Page 6 of 63		

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.20
Radiated Disturbance (<1GHz)	3.01
Radiated Disturbance (>1GHz)	5.56
Radiated Disturbance (>18GHz)	3.16

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset
		Page 7 of 63

## 5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E5515C	WIRELESS COMMUNICATION TEST SET	2021-02-19	Annual	2022-02-18	MY50262130
Agilent	N9030A	PXA Signal Analyzer	2021-07-06	Annual	2022-07-05	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	2021-07-07	Annual	2022-07-06	6201300731
Anritsu	MA24106A	USB Power Sensor	2021-07-07	Annual	2022-07-06	1244512
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	2020-10-29	Biennial	2022-10-28	10160045
Com-Power	PAM-118A	Preamplifier	2021-07-07	Annual	2022-07-06	551042
Espec	SH-242	Environmental Chamber	2021-09-15	Annual	2022-09-14	93011064
Fairview Microwave	FM2CP1122-10	Coupler	2021-07-07	Annual	2022-07-06	1946
Keysight Technologies	N9030B	MXA Signal Analyzer	2021-05-11	Annual	2022-05-10	MY57142018
Mini Circuits	ZUDC10-83-S+	Coupler	2021-09-15	Annual	2022-09-14	2111
Mini-Circuits	BW-N10W5+	Attenuator	2021-07-06	Annual	2022-07-05	1607
Mini-Circuits	BW-N10W5+	Attenuator	2021-07-06	Annual	2022-07-05	1607
Rohde & Schwarz	SMBV100B	Signal Generator	2021-11-04	Annual	2022-11-03	101568
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2021-07-06	Annual	2022-07-05	116851
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2021-02-19	Annual	2022-02-18	131453
Rohde & Schwarz	ESW	EMI Test Receiver	2021-07-06	Annual	2022-07-05	101761
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2021-02-19	Annual	2022-02-18	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2021-07-13	Biennial	2023-07-12	9162-217
Schwarzbeck	UHA9105	Dipole Antenna	2020-07-09	Biennial	2022-07-08	91052522
Sunol	DRH-118	Horn Antenna	2021-07-14	Biennial	2023-07-13	A102416-1
Sunol	DRH-118	Horn Antenna	2021-01-12	Biennial	2023-01-11	A060215

**Table 5-1. Test Equipment**

### Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 8 of 63



## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

#### **Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

#### **Emission Designator = 250KG7W**

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### WCDMA Emission Designator

#### **Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### QPSK Modulation

#### **Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### QAM Modulation



#### **Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info



D = Data transmission, telemetry, telecommand

FCC ID: A3LSMA135U	 PCTEST® Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 9 of 63

## Spurious Radiated Emission

### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 10 of 63

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMA135U  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

FCC ID: A3LSMA135U	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 11 of 63

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7.

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

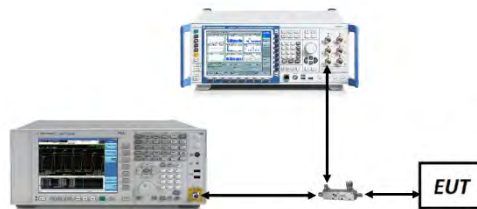


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: A3LSMA135U	<b>PCTEST</b> <small>Proud to be part of element</small>	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 12 of 63

**LTE Band 26/5**

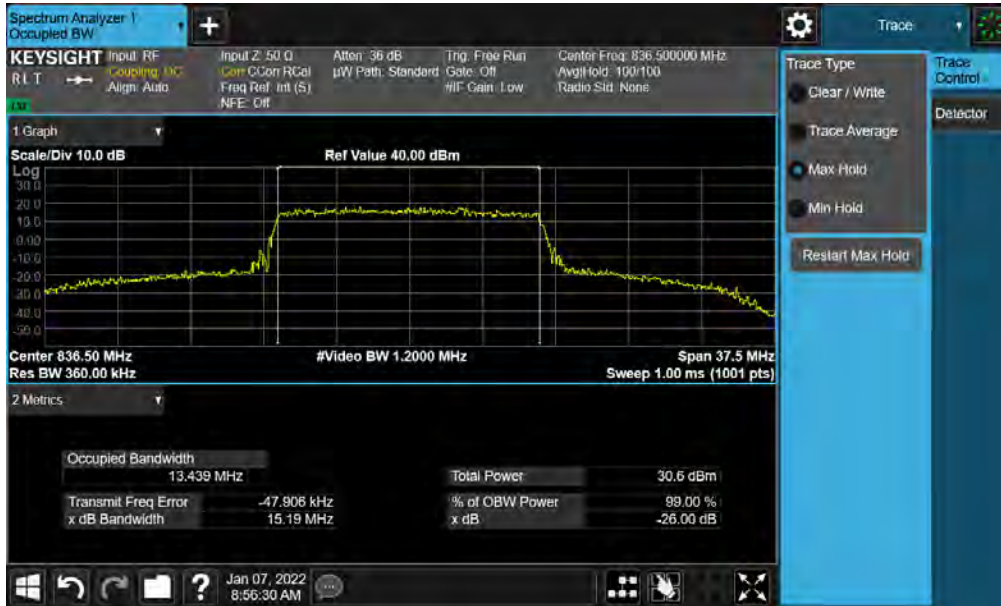


**Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB)**

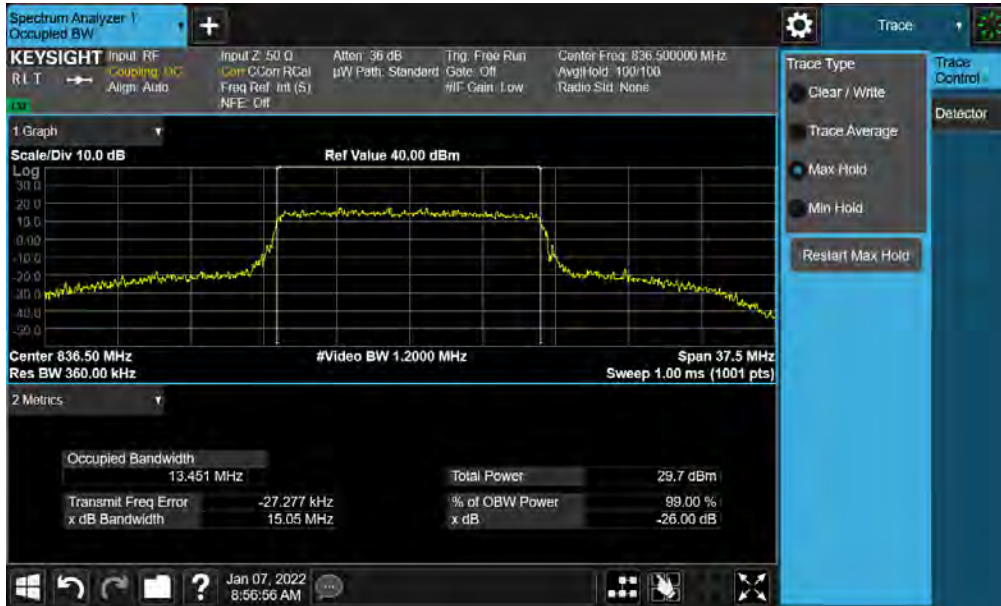

**Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 13 of 63

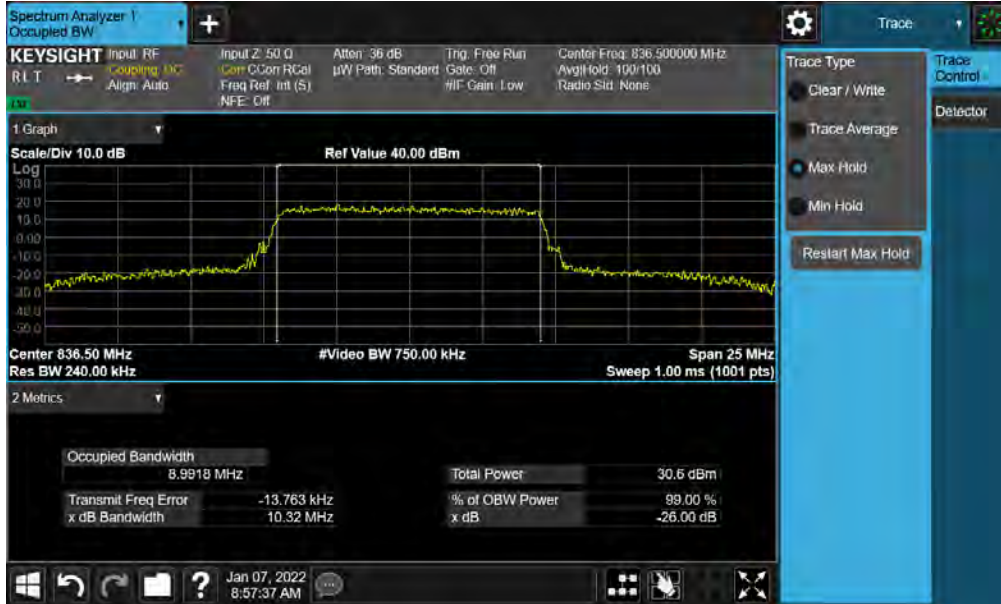


**Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB)**



**Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 14 of 63

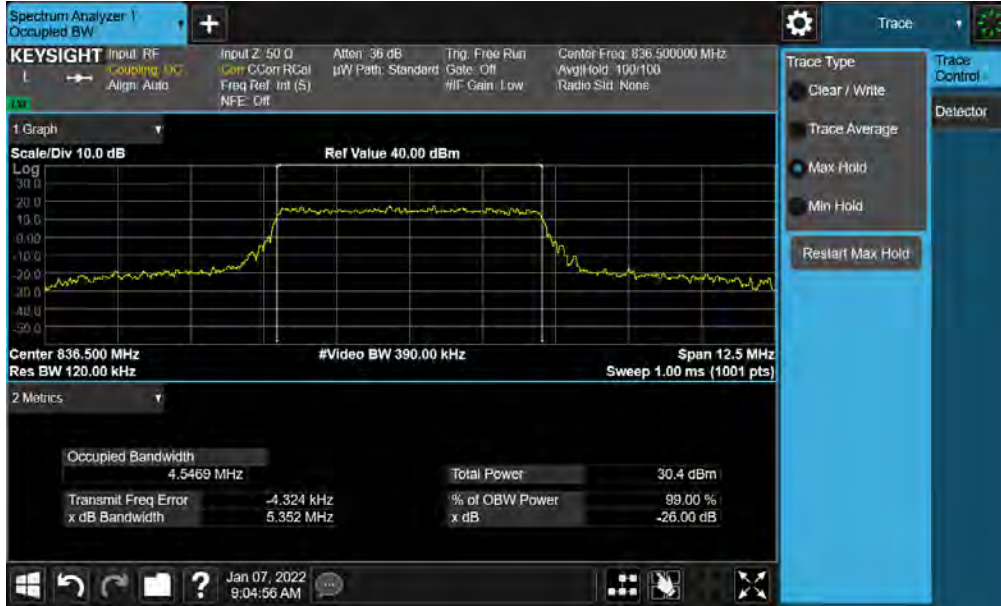

**Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB)**




**Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 15 of 63



Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB)

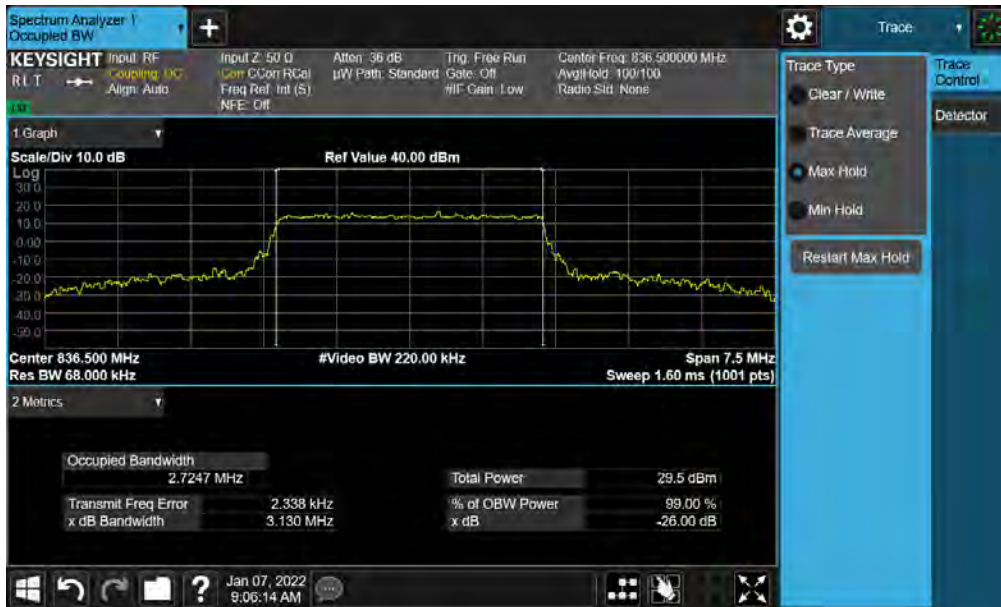

Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 16 of 63





**Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB)**



**Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 17 of 63

## GPRS Cell



Plot 7-11. Occupied Bandwidth Plot (GPRS, Ch. 190)



Plot 7-12. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 18 of 63

## WCDMA Cell



**Plot 7-13. Occupied Bandwidth Plot (WCDMA, Ch. 4183)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 19 of 63

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

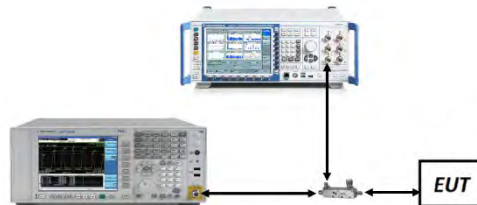

**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 20 of 63

# LTE Band 26/5



Plot 7-14. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

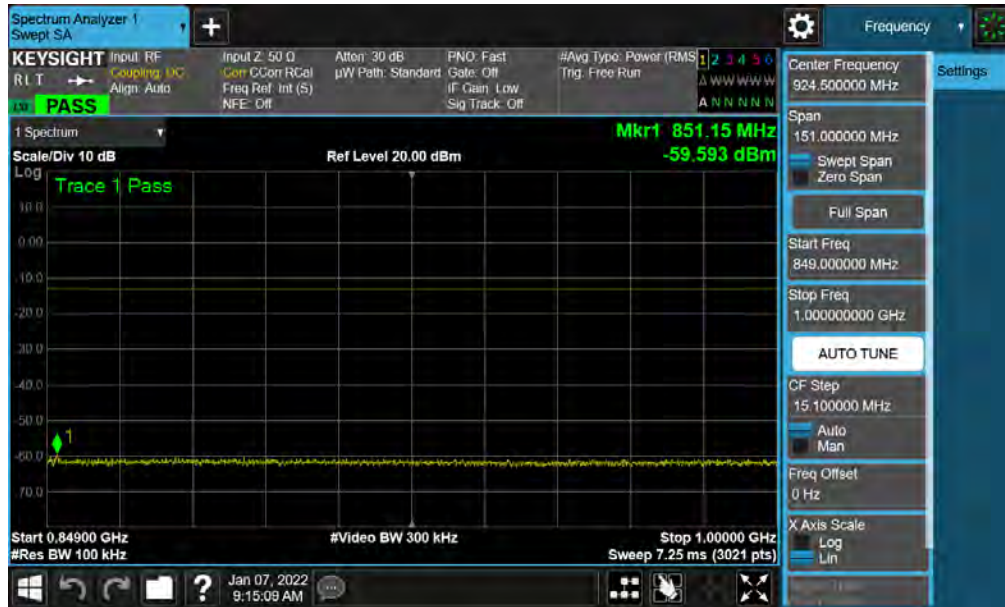


Plot 7-15. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 21 of 63




Plot 7-16. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

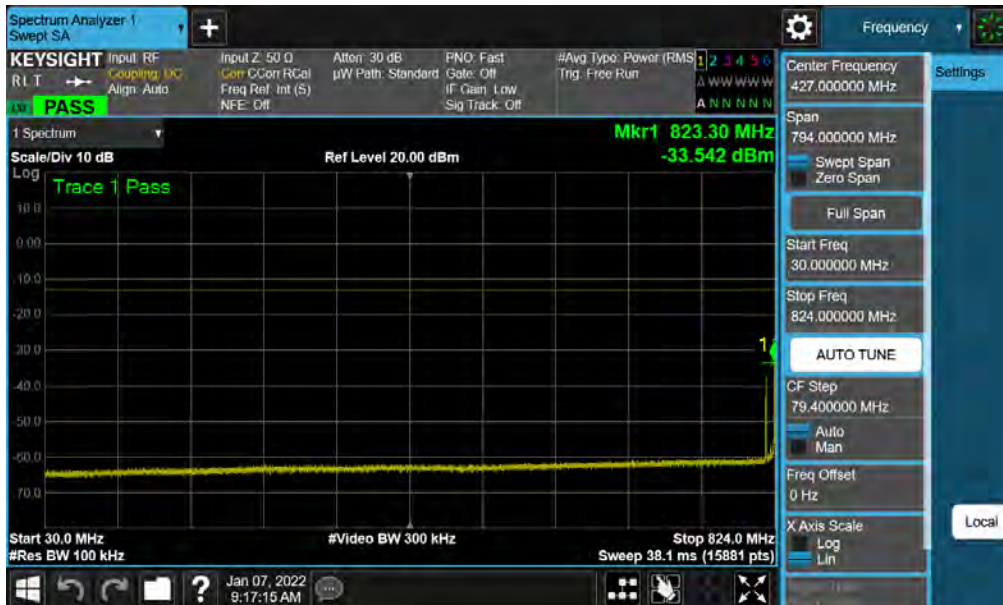

Plot 7-17. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 22 of 63

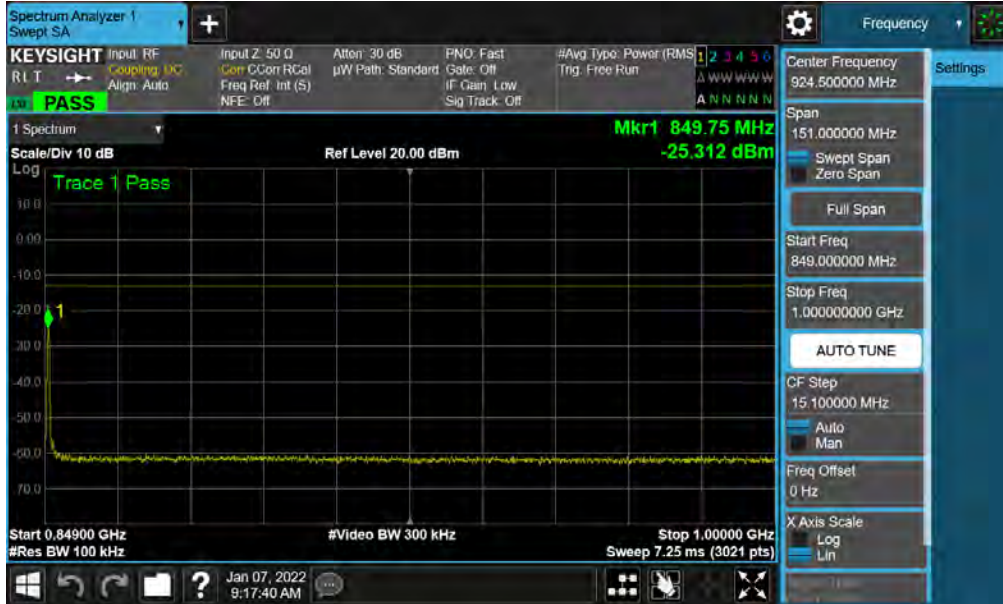

Plot 7-18. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)




Plot 7-19. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 23 of 63



Plot 7-20. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

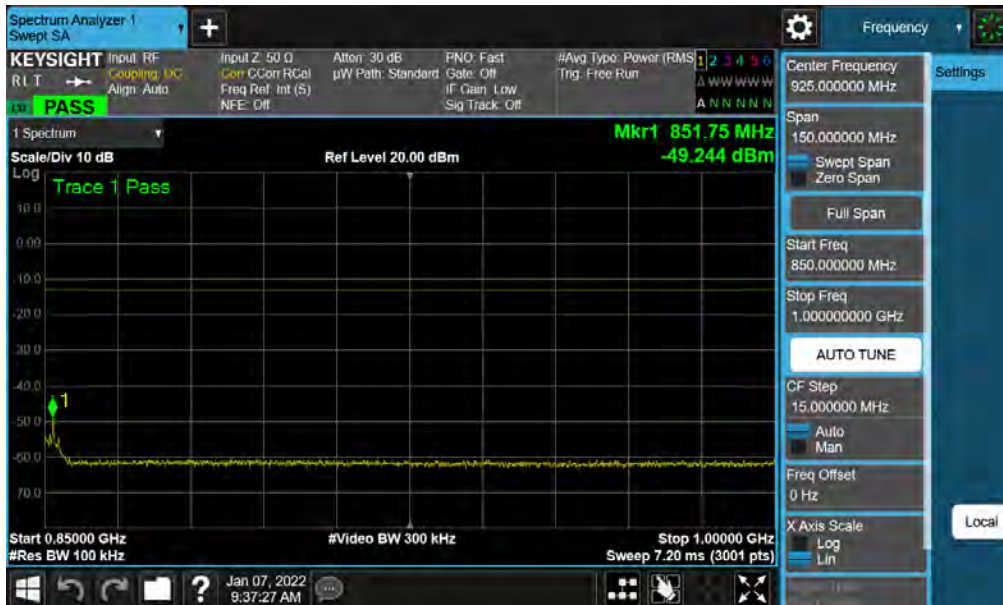

Plot 7-21. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 24 of 63






Plot 7-22. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

<p>FCC ID: A3LSMA135U</p>		<p align="center"><b>PART 22 MEASUREMENT REPORT</b></p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2112270166-02.A3L</p>	<p>Test Dates: 01/03/2022 - 01/26/2022</p>	<p>EUT Type: Portable Handset</p>	<p>Page 25 of 63</p>


**GSM/GPRS Cell**

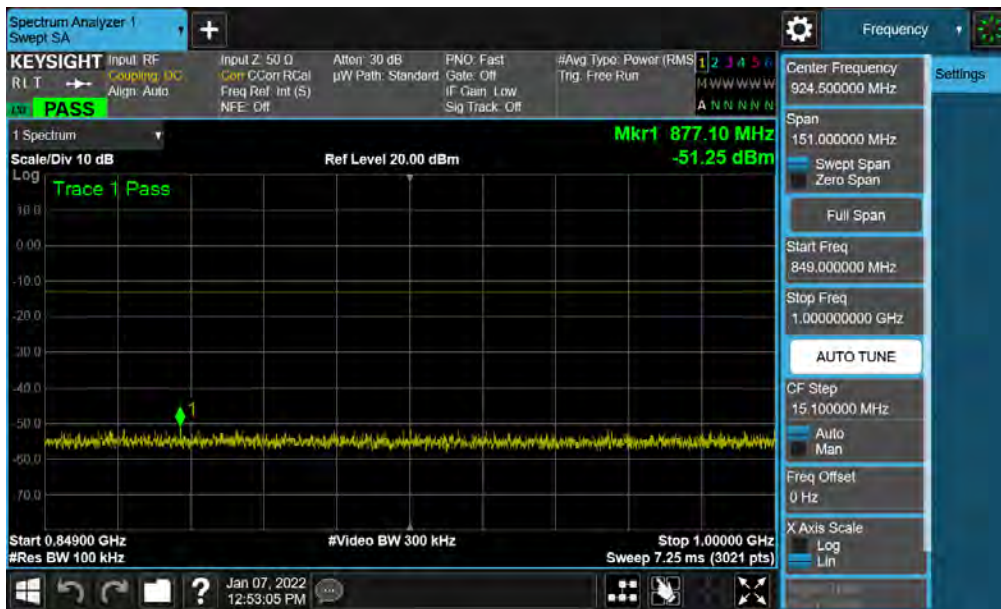

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 26 of 63



Plot 7-25. Conducted Spurious Plot (GPRS Ch. 128)

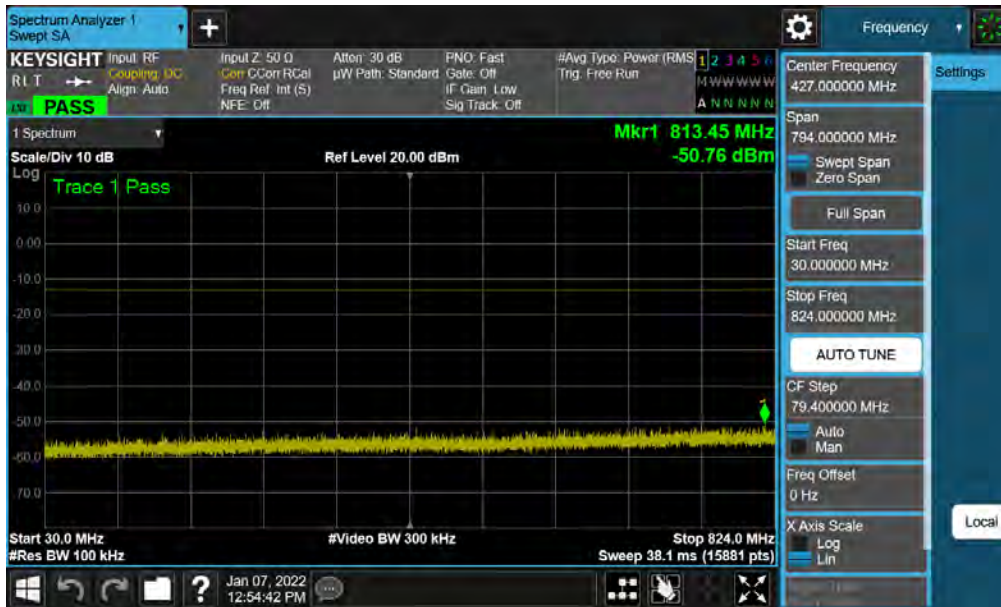

Plot 7-26. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 27 of 63





Plot 7-27. Conducted Spurious Plot (GPRS Ch. 190)




Plot 7-28. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 28 of 63

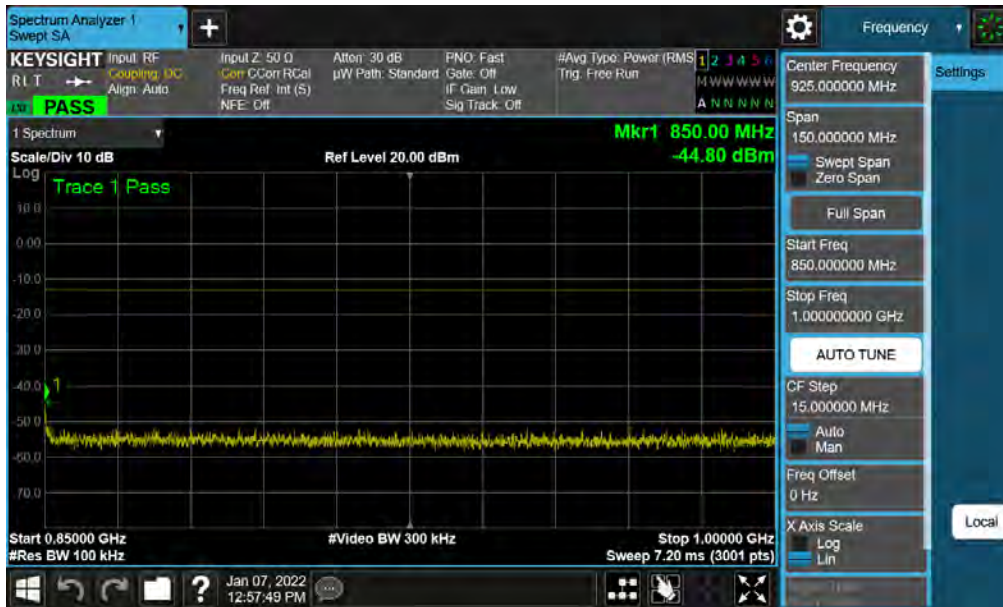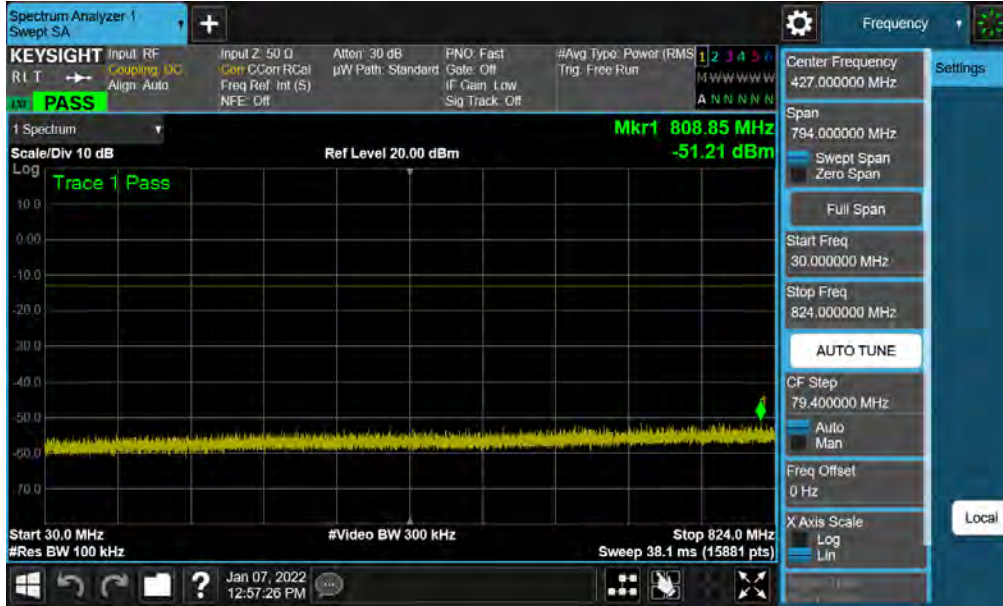

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 29 of 63

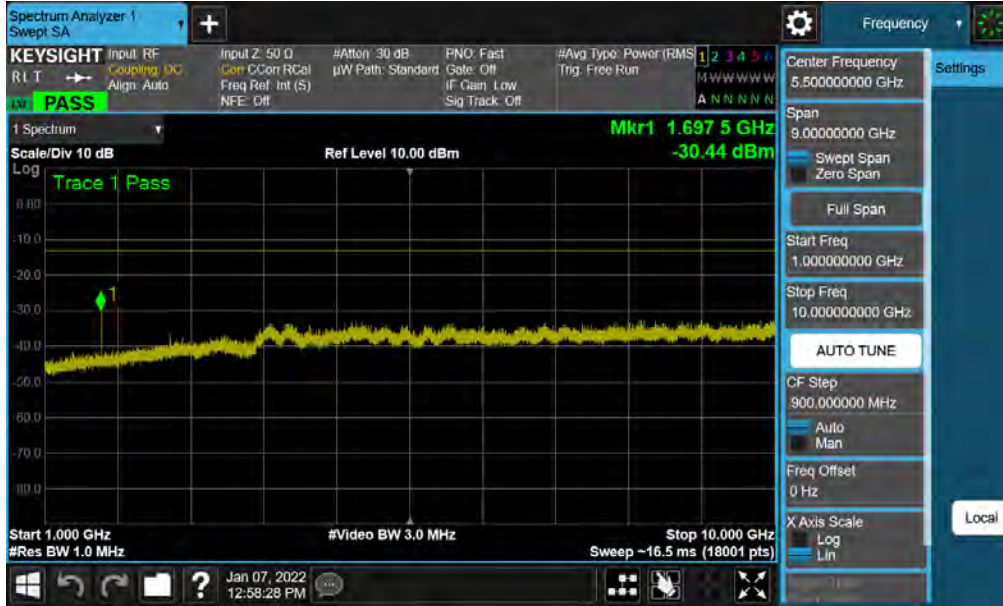


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 251)

<p>FCC ID: A3LSMA135U</p>		<p align="center"><b>PART 22 MEASUREMENT REPORT</b></p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2112270166-02.A3L</p>	<p>Test Dates: 01/03/2022 - 01/26/2022</p>	<p>EUT Type: Portable Handset</p>	<p>Page 30 of 63</p>

# WCDMA Cell



Plot 7-32. Conducted Spurious Plot (WCDMA Ch. 4132)

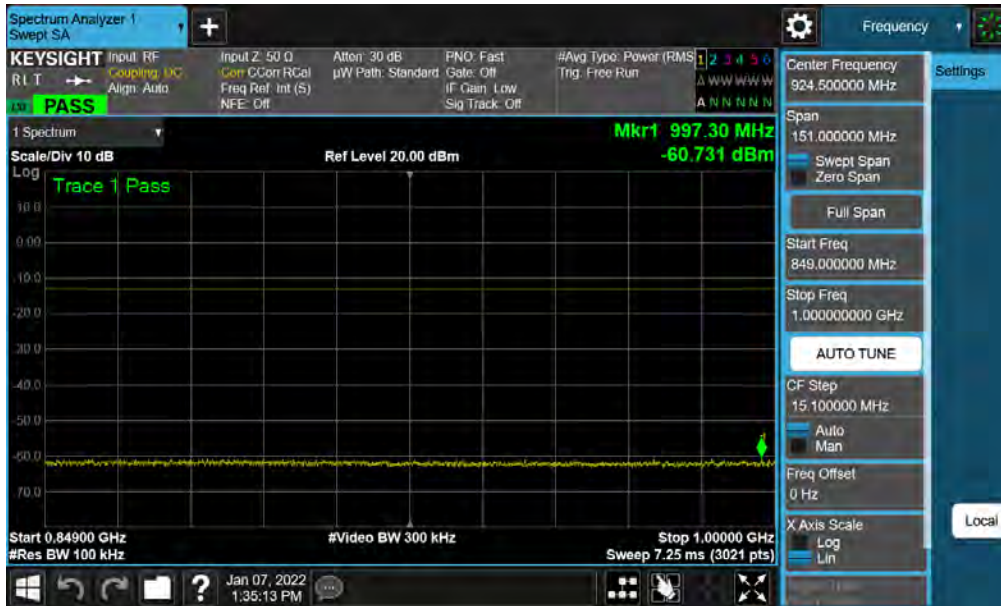

Plot 7-33. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 31 of 63




Plot 7-34. Conducted Spurious Plot (WCDMA Ch. 4132)



Plot 7-35. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 32 of 63



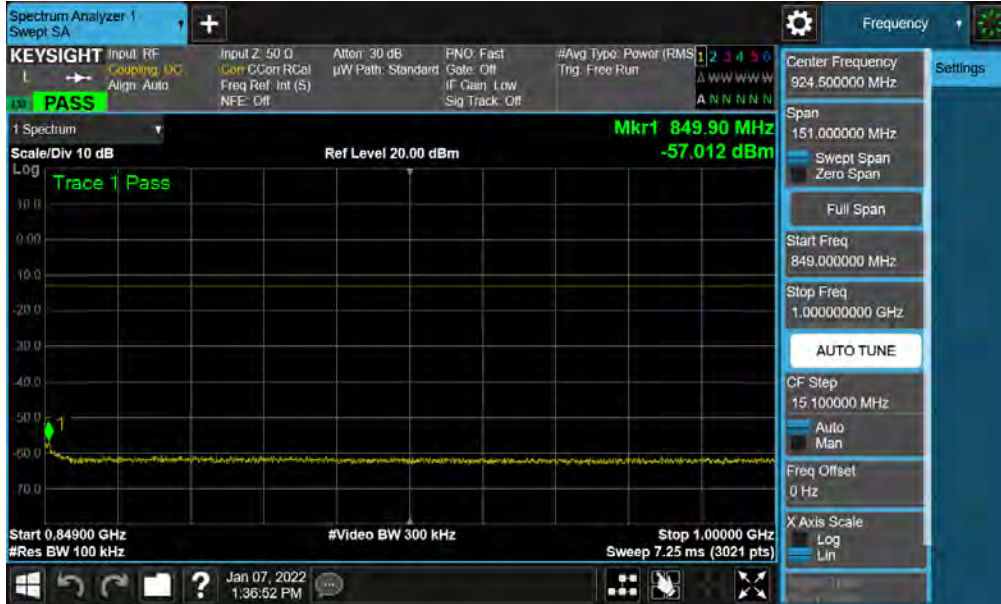

Plot 7-36. Conducted Spurious Plot (WCDMA Ch. 4183)




Plot 7-37. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 33 of 63



Plot 7-38. Conducted Spurious Plot (WCDMA Ch. 4233)

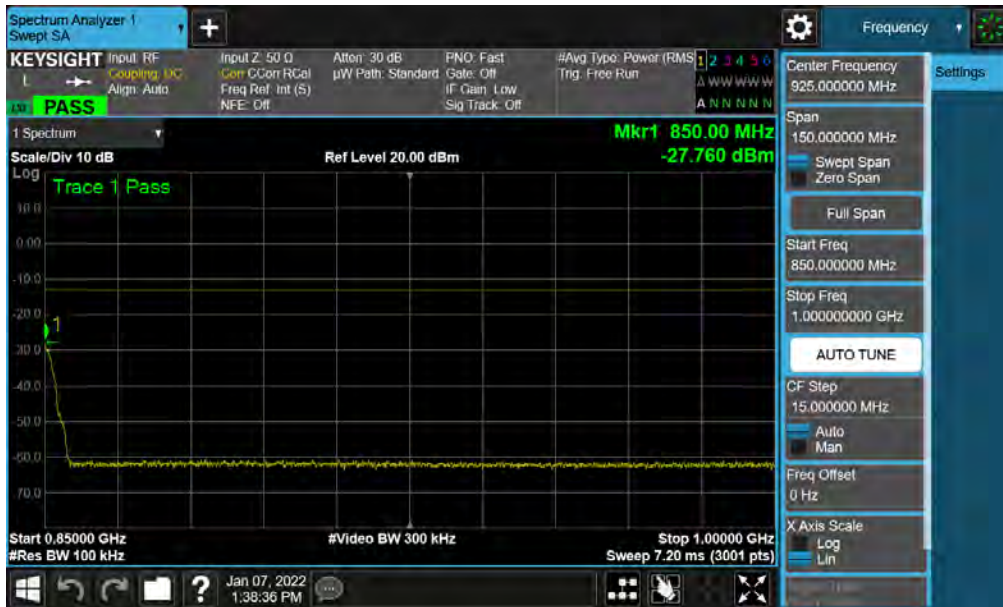

Plot 7-39. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 34 of 63



Plot 7-40. Conducted Spurious Plot (WCDMA Ch. 4233)

<p>FCC ID: A3LSMA135U</p>	<p><b>PCTEST</b> Proud to be part of element</p>	<p><b>PART 22 MEASUREMENT REPORT</b></p>	<p><b>Approved by:</b> Technical Manager</p>
<p><b>Test Report S/N:</b> 1M2112270166-02.A3L</p>	<p><b>Test Dates:</b> 01/03/2022 - 01/26/2022</p>	<p><b>EUT Type:</b> Portable Handset</p>	<p>Page 35 of 63</p>

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3.  $RBW \geq 1\%$  of the emission bandwidth
4.  $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

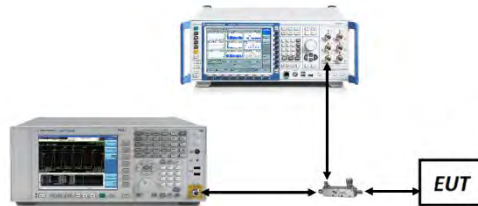

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMA135U	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 36 of 63

**LTE Band 26/5**



FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 37 of 63



Plot 7-43. Lower Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB)



Plot 7-44. Upper Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 38 of 63



Plot 7-45. Lower Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB)



Plot 7-46. Upper Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 39 of 63



Plot 7-47. Lower Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB)



Plot 7-48. Upper Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 40 of 63






Plot 7-49. Lower Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)



Plot 7-50. Upper Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)

<p>FCC ID: A3LSMA135U</p>		<p align="center"><b>PART 22 MEASUREMENT REPORT</b></p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2112270166-02.A3L</p>	<p>Test Dates: 01/03/2022 - 01/26/2022</p>	<p>EUT Type: Portable Handset</p>	<p>Page 41 of 63</p>

**GSM/GPRS Cell**

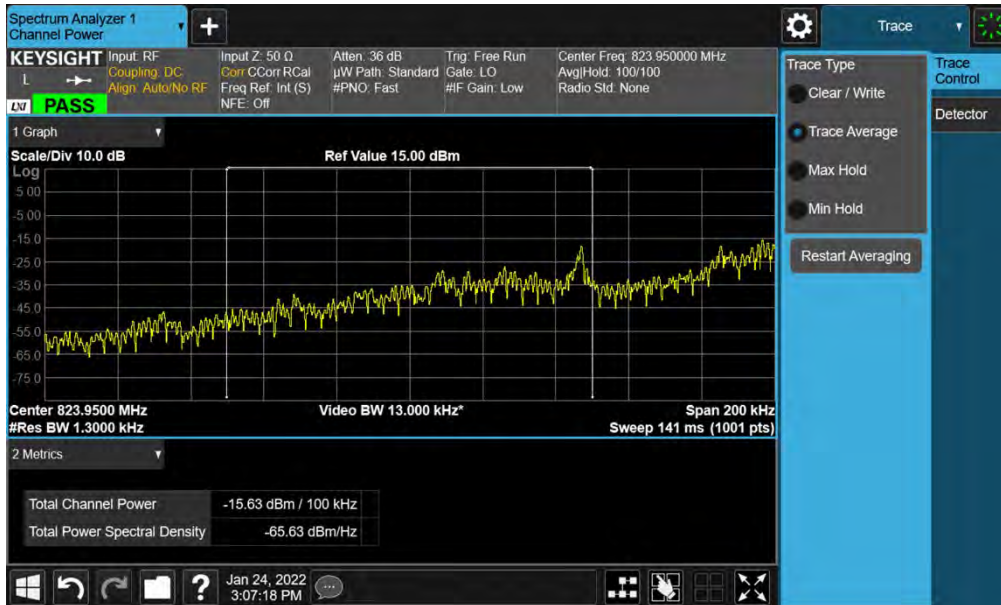

**Plot 7-51. Lower Band Edge Plot (GPRS Cell – Ch. 128)**



**Plot 7-52. Upper Band Edge Plot (GPRS Cell – Ch. 251)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 42 of 63

## WCDMA Cell



Plot 7-53. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)



Plot 7-54. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 43 of 63

## 7.5 Radiated Power (ERP)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 44 of 63

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

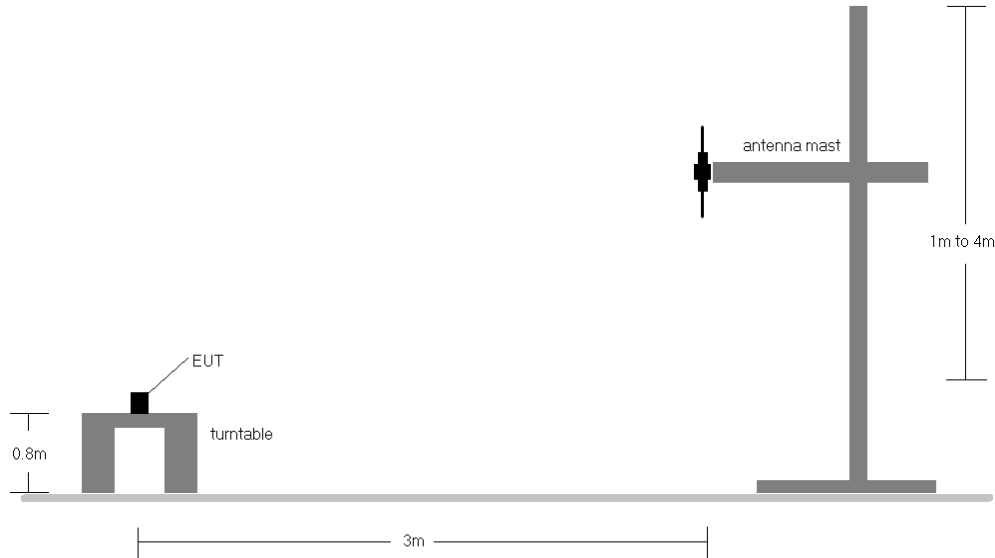

**Figure 7-4. Radiated Test Setup <1GHz**

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.

FCC ID: A3LSMA135U	<b>PART 22 MEASUREMENT REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset
		Page 45 of 63

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
15MHz (Band 26 only)	QPSK	831.5	V	139	192	1.29	1 / 0	19.89	19.03	0.080	38.45	-19.42	21.18	0.131	40.61	-19.43
	QPSK	836.5	V	140	221	1.31	1 / 0	19.66	18.82	0.076	38.45	-19.63	20.97	0.125	40.61	-19.64
	QPSK	841.5	V	138	216	1.33	1 / 0	18.96	18.14	0.065	38.45	-20.31	20.29	0.107	40.61	-20.31
	16-QAM	831.5	V	139	192	1.29	1 / 0	18.74	17.88	0.061	38.45	-20.57	20.03	0.101	40.61	-20.58
10 MHz	QPSK	829.0	V	139	192	1.27	1 / 0	19.89	19.02	0.080	38.45	-19.43	21.17	0.131	40.61	-19.44
	QPSK	836.5	V	140	221	1.31	1 / 0	19.45	18.61	0.073	38.45	-19.84	20.76	0.119	40.61	-19.85
	QPSK	844.0	V	138	216	1.35	1 / 0	18.15	17.34	0.054	38.45	-21.11	19.49	0.089	40.61	-21.11
	16-QAM	829.0	V	139	192	1.27	1 / 49	18.83	17.96	0.062	38.45	-20.49	20.11	0.102	40.61	-20.50
5 MHz	QPSK	826.5	V	139	192	1.26	1 / 12	19.74	18.86	0.077	38.45	-19.59	21.01	0.126	40.61	-19.60
	QPSK	836.5	V	140	221	1.31	1 / 0	19.58	18.74	0.075	38.45	-19.71	20.89	0.123	40.61	-19.72
	QPSK	846.5	V	138	216	1.36	1 / 0	18.79	17.99	0.063	38.45	-20.46	20.14	0.103	40.61	-20.46
	16-QAM	826.5	V	139	192	1.26	1 / 12	18.95	18.07	0.064	38.45	-20.38	20.22	0.105	40.61	-20.39
3 MHz	QPSK	825.5	V	139	192	1.26	1 / 7	19.69	18.80	0.076	38.45	-19.65	20.95	0.124	40.61	-19.66
	QPSK	836.5	V	140	221	1.31	1 / 0	19.31	18.47	0.070	38.45	-19.98	20.62	0.115	40.61	-19.99
	QPSK	847.5	V	138	216	1.36	1 / 0	18.76	17.97	0.063	38.45	-20.48	20.12	0.103	40.61	-20.48
	16-QAM	825.5	V	139	192	1.26	1 / 7	18.83	17.94	0.062	38.45	-20.51	20.09	0.102	40.61	-20.52
1.4 MHz	QPSK	824.7	V	139	192	1.25	1 / 3	19.71	18.82	0.076	38.45	-19.63	20.97	0.125	40.61	-19.64
	QPSK	836.5	V	140	221	1.31	1 / 0	19.40	18.56	0.072	38.45	-19.89	20.71	0.118	40.61	-19.90
	QPSK	848.3	V	138	216	1.37	1 / 3	18.83	18.04	0.064	38.45	-20.41	20.19	0.105	40.61	-20.41
	16-QAM	824.7	V	139	192	1.25	1 / 3	18.86	17.97	0.063	38.45	-20.48	20.12	0.103	40.61	-20.49
15MHz	QPSK (Opposite Pol.)	831.5	H	372	296	1.29	1 / 37	17.61	16.75	0.047	38.45	-21.70	18.90	0.078	40.61	-21.71



Table 7-2. ERP Data (LTE Band 26/5)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	135	221	28.62	1.25	27.72	0.592	38.45	-10.73	29.87	0.971	40.61	-10.74
836.60	GPRS850	V	143	198	28.95	1.31	26.11	0.408	38.45	-12.34	28.26	0.670	40.61	-12.35
848.80	GPRS850	V	135	195	25.01	1.37	24.23	0.265	38.45	-14.22	26.38	0.434	40.61	-14.23
824.20	GPRS850	H	352	168	25.97	1.25	25.07	0.321	38.45	-13.38	27.22	0.527	40.61	-13.39
824.20	EDGE850	V	135	221	22.16	1.25	21.26	0.134	38.45	-17.19	23.41	0.219	40.61	-17.20

Table 7-3. ERP Data (GPRS Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	370	299	19.05	1.13	18.03	0.064	38.45	-20.42	20.18	0.104	40.61	-20.42
836.60	WCDMA850	H	377	291	19.15	1.18	18.18	0.066	38.45	-20.27	20.33	0.108	40.61	-20.27
846.60	WCDMA850	H	376	294	18.89	1.23	17.97	0.063	38.45	-20.48	20.12	0.103	40.61	-20.48
836.60	WCDMA850	V	132	227	17.79	1.18	16.82	0.048	38.45	-21.63	18.97	0.079	40.61	-21.63

Table 7-4. ERP Data (WCDMA Cell)

FCC ID: A3LSMA135U	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 46 of 63

## 7.6 Radiated Spurious Emissions Measurements

### Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 47 of 63

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

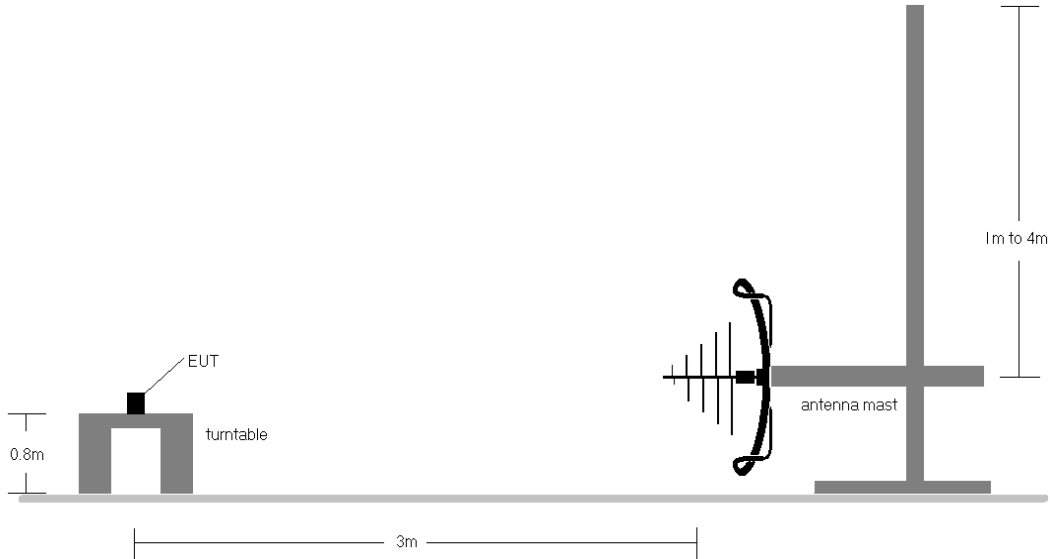

**Figure 7-5. Test Instrument & Measurement Setup < 1GHz**

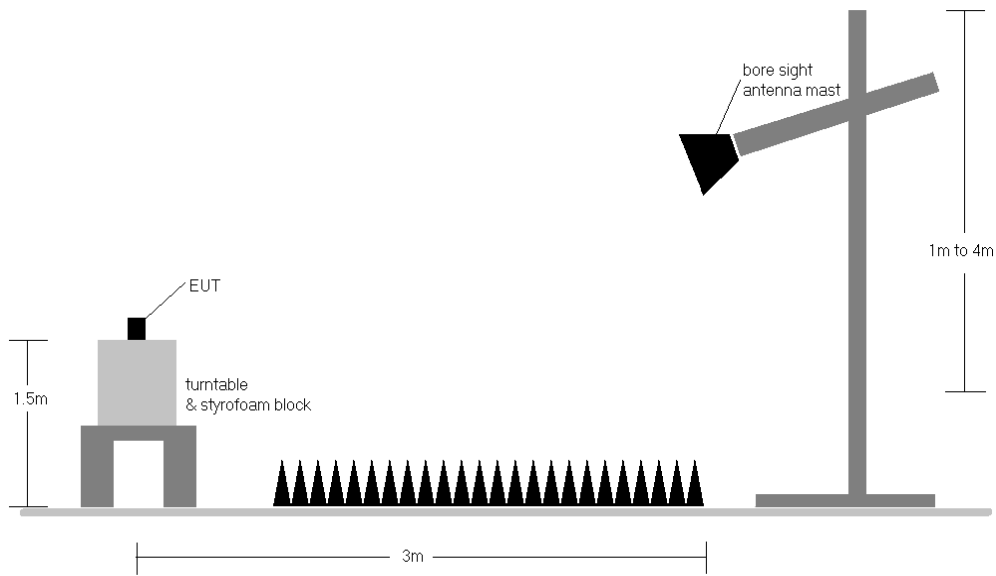



**Figure 7-6. Test Instrument & Measurement Setup >1 GHz**

<p>FCC ID: A3LSMA135U</p>		<p>PART 22 MEASUREMENT REPORT</p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2112270166-02.A3L</p>	<p>Test Dates: 01/03/2022 - 01/26/2022</p>	<p>EUT Type: Portable Handset</p>	<p>Page 48 of 63</p>




## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 49 of 63

## LTE Band 26

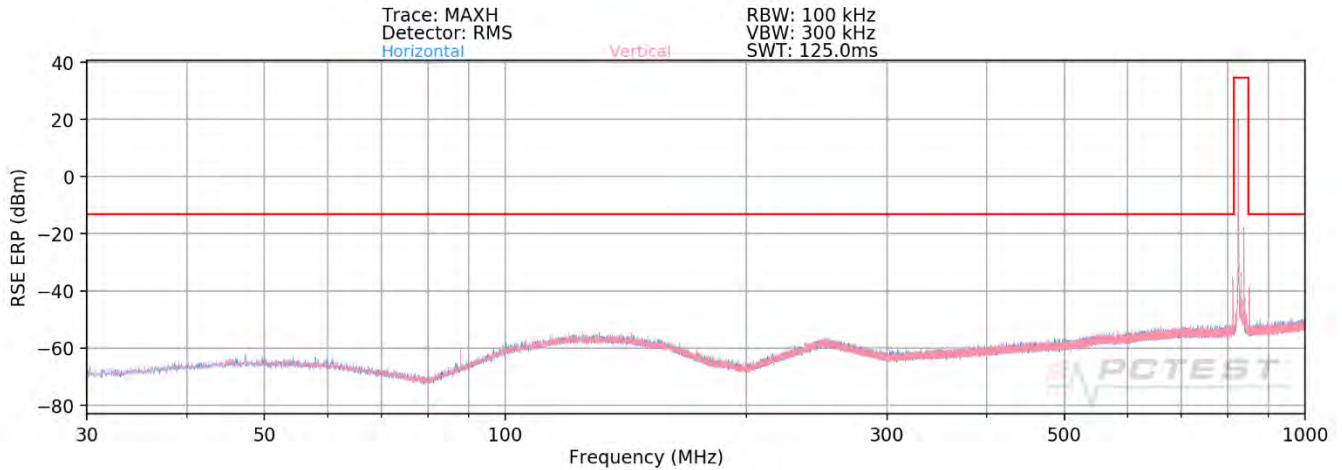

**Plot 7-55. Radiated Spurious Plot Below 1GHz (LTE Band 26)**

Bandwidth (MHz):	15
Frequency (MHz):	831.5
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
851.46	H	183	308	-74.93	24.64	56.71	-38.55	-13.00	-25.55

**Table 7-5. Radiated Spurious Data (LTE Band 26 – Low Channel)**

Bandwidth (MHz):	15
Frequency (MHz):	836.5
RB / Offset:	1 / 0



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
849.83	H	168	307	-90.06	24.58	41.52	-53.74	-13.00	-40.74


**Table 7-6. Radiated Spurious Data (LTE Band 26 – Mid Channel)**

Bandwidth (MHz):	15
Frequency (MHz):	841.5
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
850.18	H	175	300	-83.83	24.59	47.76	-47.50	-13.00	-34.50

**Table 7-7. Radiated Spurious Data (LTE Band 26 – High Channel)**

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset	Page 50 of 63

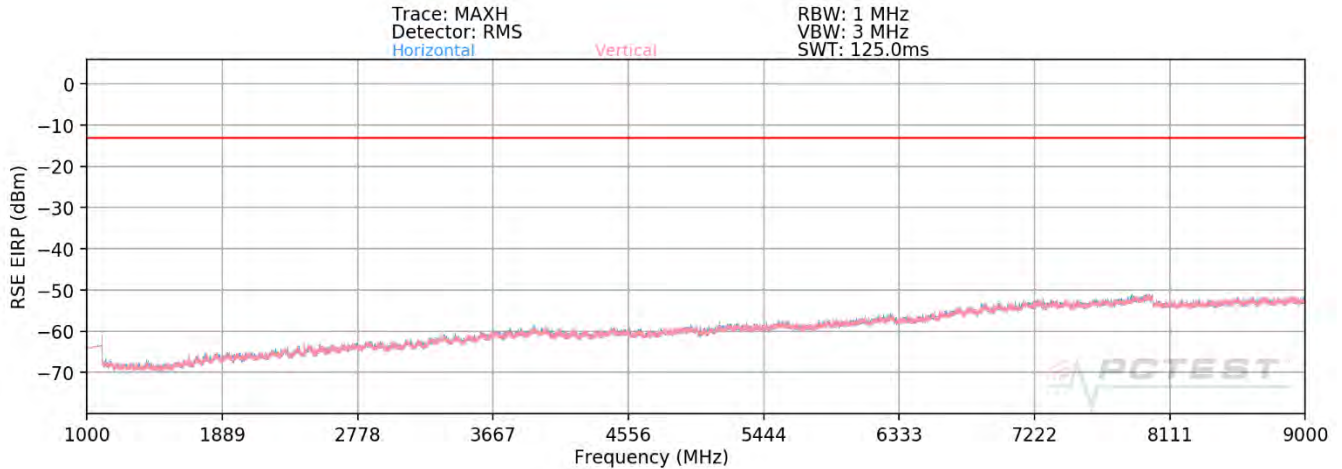

Plot 7-56. Radiated Spurious Plot Above 1GHz (LTE Band 26)

Bandwidth (MHz):	15
Frequency (MHz):	831.5
RB / Offset:	1 / 0



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1663.00	H	121	25	-71.51	-7.73	27.76	-67.50	-13.00	-54.50
2494.50	H	139	0	-75.58	-4.43	26.99	-68.27	-13.00	-55.27
3326.00	H	135	14	-76.52	-0.57	29.91	-65.34	-13.00	-52.34
4157.50	H	-	-	-77.26	0.95	30.69	-64.57	-13.00	-51.57
4989.00	H	-	-	-77.36	1.28	30.92	-64.34	-13.00	-51.34
5820.50	H	-	-	-78.92	4.36	32.44	-62.81	-13.00	-49.81

Table 7-8. Radiated Spurious Data (LTE Band 26 – Low Channel)

Bandwidth (MHz):	15
Frequency (MHz):	836.5
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	H	151	18	-71.69	-7.66	27.65	-67.61	-13.00	-54.61
2509.50	H	121	46	-76.32	-4.58	26.10	-69.15	-13.00	-56.15
3346.00	H	-	-	-76.62	-0.85	29.53	-65.73	-13.00	-52.73
4182.50	H	-	-	-77.17	0.73	30.56	-64.69	-13.00	-51.69
5019.00	H	-	-	-77.30	1.68	31.38	-63.88	-13.00	-50.88



Table 7-9. Radiated Spurious Data (LTE Band 26 – Mid Channel)

FCC ID: A3LSMA135U	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 51 of 63


<b>Bandwidth (MHz):</b>	15
<b>Frequency (MHz):</b>	841.5
<b>RB / Offset:</b>	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1683.00	H	143	36	-72.73	-7.60	26.67	-68.59	-13.00	-55.59
2524.50	H	141	46	-75.86	-4.47	26.67	-68.59	-13.00	-55.59
3366.00	H	-	-	-76.75	-0.90	29.35	-65.91	-13.00	-52.91
4207.50	H	-	-	-77.27	0.68	30.41	-64.84	-13.00	-51.84
5049.00	H	-	-	-77.99	2.08	31.09	-64.17	-13.00	-51.17

**Table 7-10. Radiated Spurious Data (LTE Band 26 – High Channel)**

<b>FCC ID:</b> A3LSMA135U	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset		Page 52 of 63

**GSM/GPRS Cell**

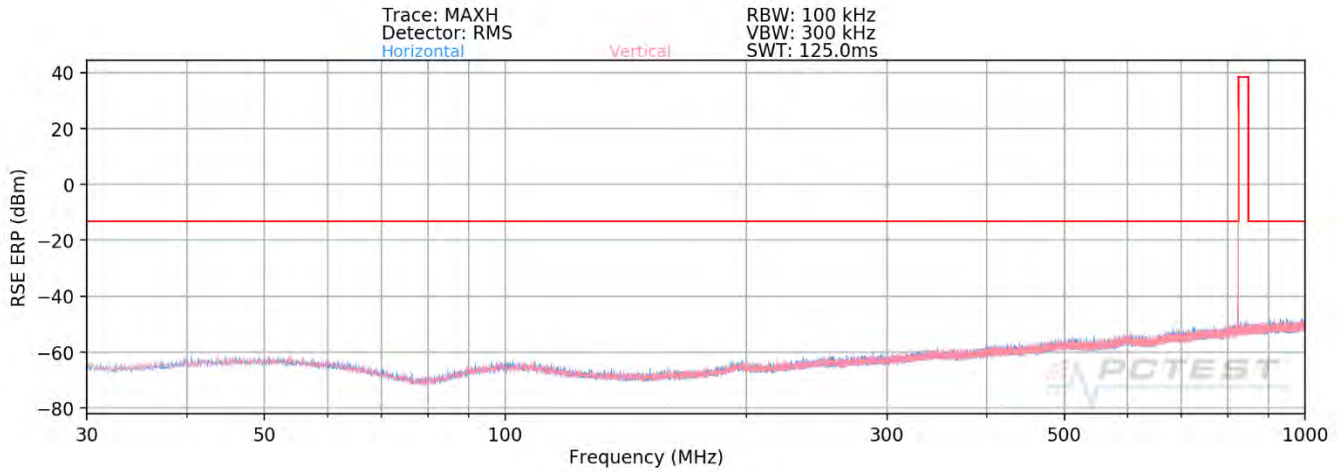


**Plot 7-57. Radiated Spurious Plot Below 1GHz (GPRS Cell)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	128
<b>Frequency (MHz):</b>	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
822.90	V	120	298	-77.74	24.21	53.47	-41.78	-13.00	-28.78

**Table 7-11. Radiated Spurious Data (GPRS Cell)**

<b>FCC ID:</b> A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 53 of 63

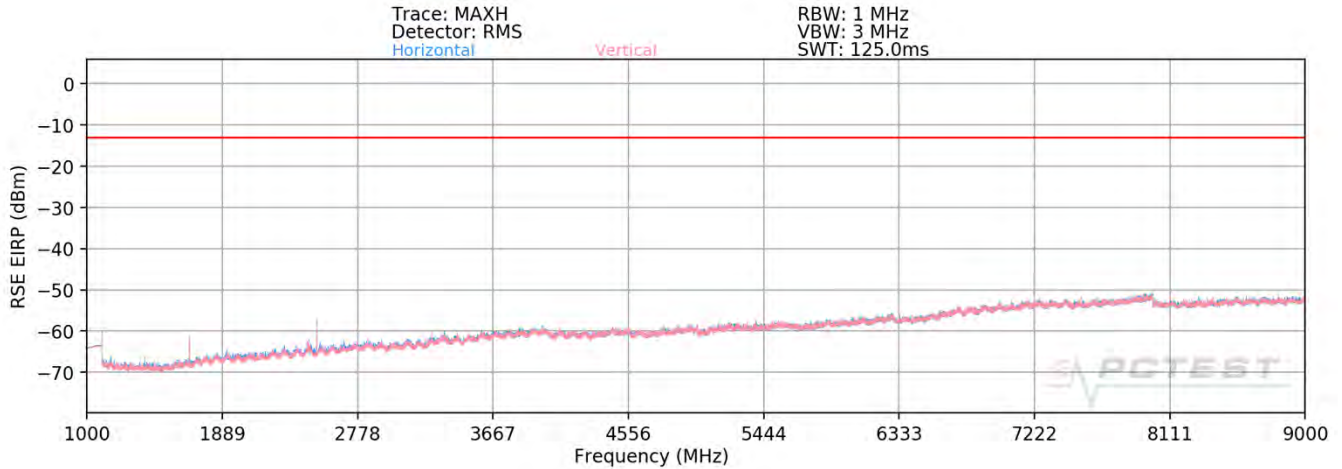

**Plot 7-58. Radiated Spurious Plot Above 1GHz (GPRS Cell)**

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.40	V	117	334	-63.90	-7.81	35.29	-59.97	-13.00	-46.97
2472.60	V	124	360	-59.74	-4.11	43.15	-52.10	-13.00	-39.10
3296.80	V	148	355	-69.04	-0.79	37.17	-58.09	-13.00	-45.09
4121.00	V	-	-	-68.79	1.19	39.40	-55.86	-13.00	-42.86
4945.20	V	-	-	-69.57	1.79	39.22	-56.04	-13.00	-43.04
5769.40	V	-	-	-70.51	3.78	40.27	-54.99	-13.00	-41.99

**Table 7-12. Radiated Spurious Data (GPRS Cell – Low Channel)**

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	V	126	369	-61.48	-7.66	37.86	-57.40	-13.00	-44.40
2509.80	V	139	356	-62.15	-4.58	40.27	-54.99	-13.00	-41.99
3346.40	V	157	357	-67.13	-0.86	39.01	-56.24	-13.00	-43.24
4183.00	V	-	-	-68.70	0.73	39.03	-56.22	-13.00	-43.22
5019.60	V	-	-	-68.40	1.68	40.28	-54.98	-13.00	-41.98
5856.20	V	-	-	-70.46	4.84	41.38	-53.87	-13.00	-40.87



**Table 7-13. Radiated Spurious Data (GPRS Cell – Mid Channel)**

FCC ID: A3LSMA135U	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset
		Page 54 of 63


<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	251
<b>Frequency (MHz):</b>	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.60	V	121	10	-62.51	-7.51	36.98	-58.28	-13.00	-45.28
2546.40	V	151	7	-62.93	-4.31	39.76	-55.49	-13.00	-42.49
3395.20	V	143	352	-69.28	-0.83	36.89	-58.36	-13.00	-45.36
4244.00	V	-	-	-68.96	0.51	38.55	-56.71	-13.00	-43.71
5092.80	V	-	-	-69.50	2.85	40.35	-54.91	-13.00	-41.91
5941.60	V	-	-	-69.05	4.60	42.55	-52.71	-13.00	-39.71

**Table 7-14. Radiated Spurious Data (GPRS Cell – High Channel)**

<b>FCC ID:</b> A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 55 of 63

## WCDMA Cell

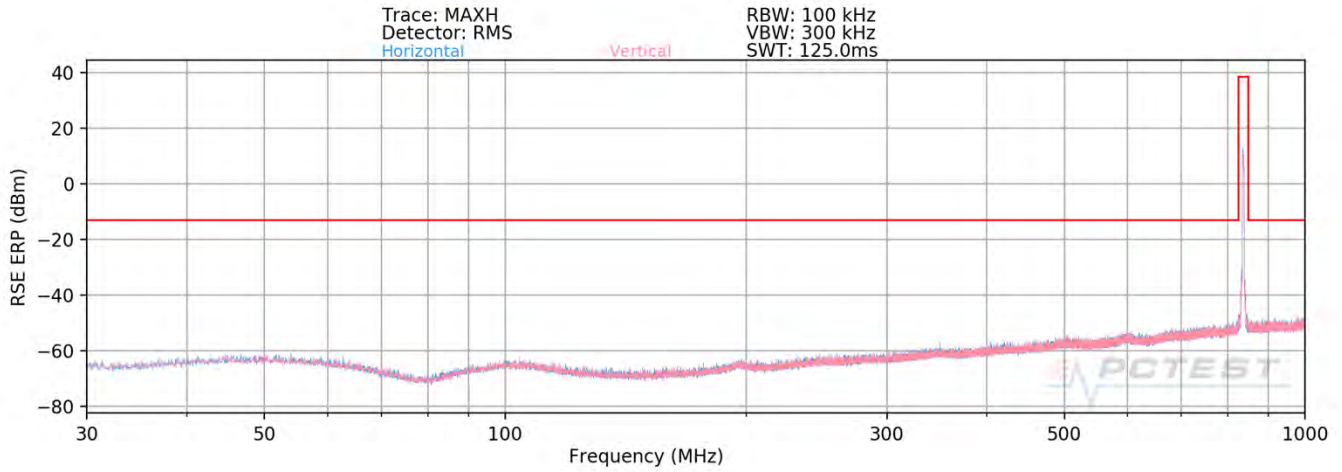

**Plot 7-59. Radiated Spurious Plot Below 1GHz (WCDMA Cell)**


Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
822.94	H	178	303	-71.23	24.21	59.98	-35.27	-13.00	-22.27

**Table 7-15. Radiated Spurious Data (WCDMA Cell)**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 56 of 63



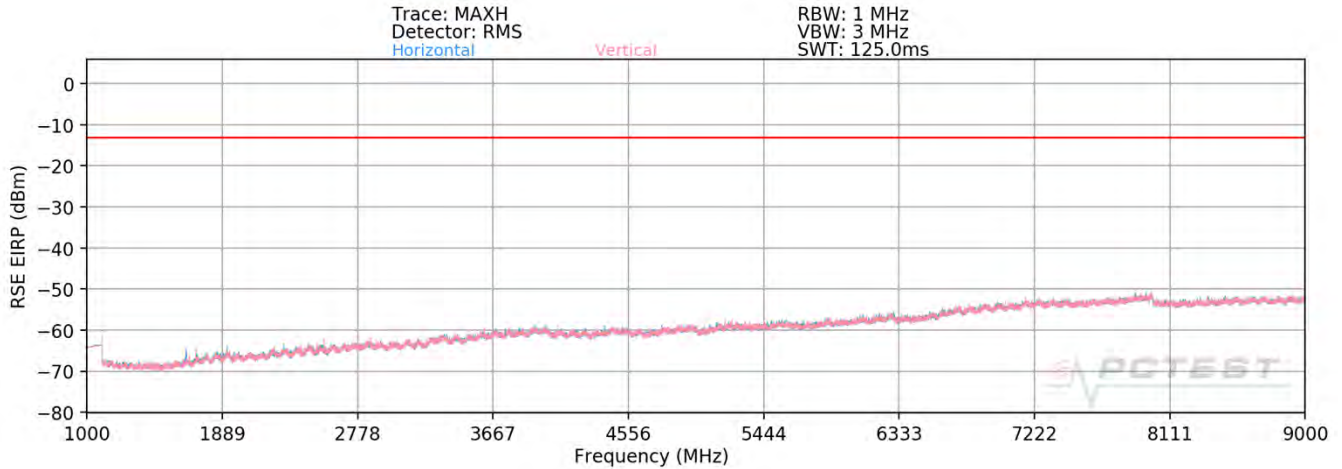

**Plot 7-60. Radiated Spurious Plot Above 1GHz (WCDMA Cell)**

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.80	H	146	348	-73.98	-7.80	25.22	-70.03	-13.00	-57.03
2479.20	H	-	-	-76.63	-4.19	26.18	-69.08	-13.00	-56.08
3305.60	H	-	-	-78.16	-0.62	28.22	-67.03	-13.00	-54.03
4132.00	H	-	-	-77.99	1.21	30.22	-65.04	-13.00	-52.04
4958.40	H	-	-	-78.25	1.71	30.46	-64.80	-13.00	-51.80

**Table 7-16. Radiated Spurious Data (WCDMA Cell – Low Channel)**

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	166	346	-72.72	-7.66	26.62	-68.64	-13.00	-55.64
2509.80	H	-	-	-76.84	-4.58	25.58	-69.68	-13.00	-56.68
3346.40	H	-	-	-77.02	-0.86	29.12	-66.13	-13.00	-53.13
4183.00	H	-	-	-77.44	0.73	30.29	-64.96	-13.00	-51.96
5019.60	H	-	-	-78.23	1.68	30.45	-64.81	-13.00	-51.81



**Table 7-17. Radiated Spurious Data (WCDMA Cell – Mid Channel)**

FCC ID: A3LSMA135U	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 57 of 63

<b>Mode:</b>	WCDMA RMC
<b>Channel:</b>	4233
<b>Frequency (MHz):</b>	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.20	H	180	349	-72.73	-7.54	26.73	-68.52	-13.00	-55.52
2539.80	H	155	331	-75.19	-4.35	27.46	-67.80	-13.00	-54.80
3386.40	H	-	-	-78.35	-0.82	27.83	-67.43	-13.00	-54.43
4233.00	H	-	-	-78.08	0.54	29.46	-65.79	-13.00	-52.79
5079.60	H	-	-	-78.43	2.18	30.75	-64.51	-13.00	-51.51

**Table 7-18. Radiated Spurious Data (WCDMA Cell – High Channel)**

<b>FCC ID:</b> A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset
		Page 58 of 63

## 7.7 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.***

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes


None

FCC ID: A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 	Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset
		Page 59 of 63

**LTE Band 26/5**

<b>LTE Band 26/5</b>					
Operating Frequency (Hz):		836,500,000			
Ref. Voltage (VDC):		4.31			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,500,125	1,340	0.0001602
		- 20	836,500,525	1,740	0.0002080
		- 10	836,499,925	1,140	0.0001363
		0	836,498,125	-660	-0.0000789
		+ 10	836,499,875	1,090	0.0001303
		+ 20 (Ref)	836,498,785	0	0.0000000
		+ 30	836,499,985	1,200	0.0001435
		+ 40	836,500,375	1,590	0.0001901
Battery Endpoint	3.58	+ 20	836,499,925	1,140	0.0001363

**Table 7-19. LTE Band 26/5 Frequency Stability Data**

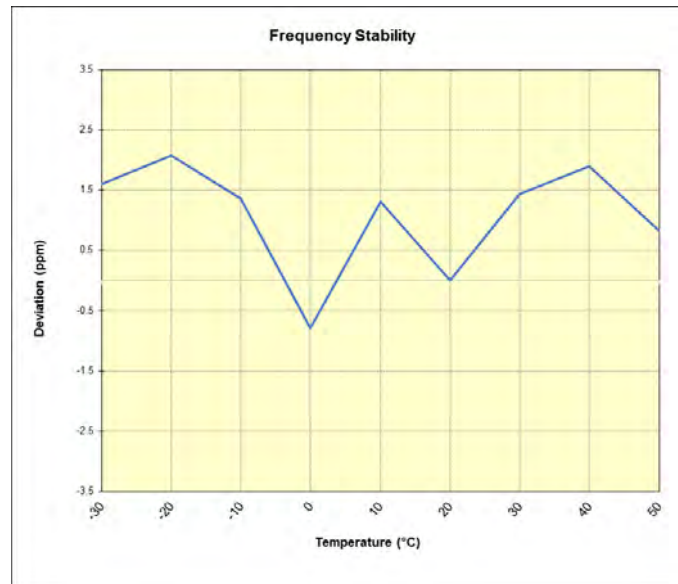


**Plot 7-61. LTE Band 26/5 Frequency Stability Chart**

<b>FCC ID:</b> A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 60 of 63

**GSM/GPRS Cell**

<b>GSM/GPRS Cellular</b>					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.31			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,601,725	1,113	0.0001330
		- 20	836,599,544	-1,068	-0.0001277
		- 10	836,599,140	-1,472	-0.0001760
		0	836,602,310	1,698	0.0002030
		+ 10	836,602,364	1,752	0.0002094
		+ 20 (Ref)	836,600,612	0	0.0000000
		+ 30	836,600,915	303	0.0000362
		+ 40	836,601,621	1,009	0.0001206
Battery Endpoint	3.58	+ 20	836,601,161	549	0.0000656

**Table 7-20. GSM/GPRS Cell Frequency Stability Data**

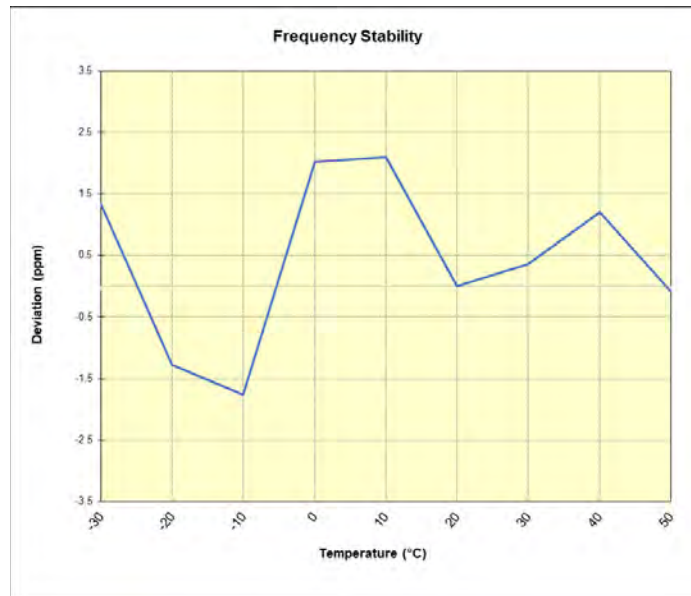


**Plot 7-62. GSM/GPRS Cell Frequency Stability Chart**

FCC ID: A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112270166-02.A3L	Test Dates: 01/03/2022 - 01/26/2022	EUT Type: Portable Handset		Page 61 of 63

**WCDMA Cell**

<b>WCDMA Cellular</b>					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.31			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,589,960	-1,680	-0.0002008
		- 20	836,590,160	-1,480	-0.0001769
		- 10	836,589,840	-1,800	-0.0002152
		0	836,592,880	1,240	0.0001482
		+ 10	836,592,840	1,200	0.0001434
		+ 20 (Ref)	836,591,640	0	0.0000000
		+ 30	836,589,880	-1,760	-0.0002104
		+ 40	836,592,280	640	0.0000765
Battery Endpoint	3.58	+ 20	836,590,100	-1,540	-0.0001841

**Table 7-21. WCDMA Cell Frequency Stability Data**

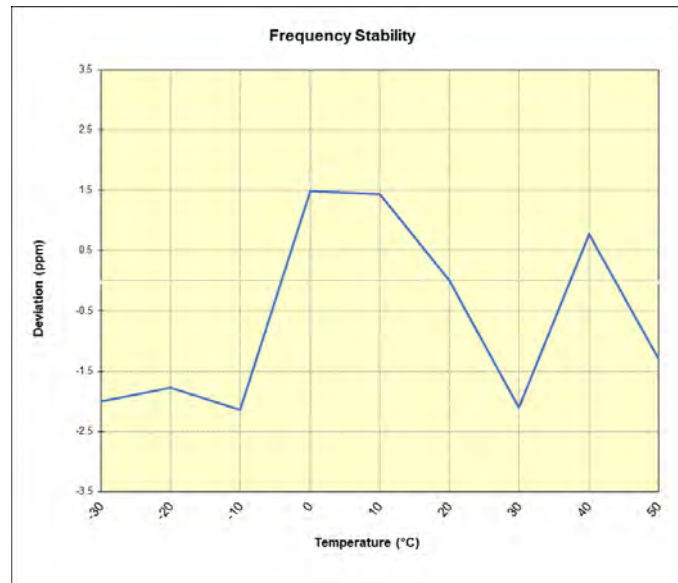



**Plot 7-63. WCDMA Cell Frequency Stability Chart**

<b>FCC ID:</b> A3LSMA135U	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 62 of 63

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMA135U** complies with all the requirements of Part 22 of the FCC rules.

<b>FCC ID:</b> A3LSMA135U	 <b>PART 22 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112270166-02.A3L	<b>Test Dates:</b> 01/03/2022 - 01/26/2022	<b>EUT Type:</b> Portable Handset	Page 63 of 63