



**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone

MODEL NUMBER: SM-A145FB/DS

FCC ID: A3LSMA145F

REPORT NUMBER: 4790716492-S1V5

ISSUE DATE: 2/27/2023

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Testing Laboratory

TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	2/15/2023	Initial Issue	--
V2	2/21/2023	Added FCC ID in Cover and Sec.1 Revised UNII a mode ch.36 target power in Sec.6.3. Revised SAR 5 Room frequency in Sec.8.1. Removed those not used equipment list in Sec.8.2 and Sec 4.3 Revised frequency in Sec.10.5	Hakchul Lee
V3	2/23/2023	Revised SAR 5 Room the permittivity and conductivity levels in Sec.8.1.	Hakchul Lee
V4	2/24/2023	Revised Equipment list in Sec.4.3.	Hakchul Lee
V5	2/27/2023	Added Simultaneous TX highest reported SAR in Sec1.	Hakchul Lee

Table of Contents

1.	Attestation of Test Results	5
1.1.	<i>The Highest Reported SAR for RF exposure conditions for each bands</i>	<i>6</i>
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	7
4.	SAR Measurement System & Test Equipment	8
4.1.	<i>SAR Measurement System.....</i>	<i>8</i>
4.2.	<i>SAR Scan Procedures</i>	<i>10</i>
4.3.	<i>Test Equipment.....</i>	<i>12</i>
5.	Measurement Uncertainty.....	14
5.1.	<i>DECISION RULE.....</i>	<i>14</i>
6.	Device Under Test (DUT) Information	14
6.1.	<i>DUT Description</i>	<i>14</i>
6.2.	<i>Wireless Technologies.....</i>	<i>15</i>
6.3.	<i>Nominal and Maximum Output Power.....</i>	<i>16</i>
6.4.	<i>Power Back-off Operation.....</i>	<i>18</i>
6.5.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>19</i>
6.6.	<i>LTE (TDD) Considerations.....</i>	<i>20</i>
7.	RF Exposure Conditions (Test Configurations)	21
8.	Dielectric Property Measurements & System Check	23
8.1.	<i>Dielectric Property Measurements</i>	<i>23</i>
8.2.	<i>System Check.....</i>	<i>26</i>
9.	Conducted Output Power Measurements.....	29
9.1.	<i>GSM</i>	<i>29</i>
9.2.	<i>W-CDMA</i>	<i>31</i>
9.3.	<i>LTE.....</i>	<i>35</i>
9.4.	<i>Wi-Fi 2.4 GHz (DTS Band).....</i>	<i>40</i>
9.5.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	<i>42</i>
	<i>Bluetooth.....</i>	<i>44</i>
10.	Measured and Reported (Scaled) SAR Results.....	45
10.1.	<i>GSM 850.....</i>	<i>47</i>
10.2.	<i>GSM 1900.....</i>	<i>47</i>
10.3.	<i>WCDMA Band V</i>	<i>47</i>
10.4.	<i>LTE Band 5 (10MHz Bandwidth)</i>	<i>48</i>

10.5. *LTE Band 41 (20MHz Bandwidth)* 48

10.6. *Wi-Fi (DTS Band)*..... 49

10.7. *Wi-Fi (U-NII Bands)*..... 49

10.8. *Bluetooth*..... 51

11. SAR Measurement Variability..... **51**

12. Simultaneous Transmission SAR Analysis..... **52**

 12.1. *Sum of the SAR for WWAN & Wi-Fi & BT*..... 53

Appendixes **54**

 4790716492-S1 FCC Report SAR_App A_Photos & Ant. Locations 54

 4790716492-S1 FCC Report SAR_App B_Highest SAR Test Plots 54

 4790716492-S1 FCC Report SAR_App C_System Check Plots 54

 4790716492-S1 FCC Report SAR_App D_SAR Tissue Ingredients..... 54

 4790716492-S1 FCC Report SAR_App E_Probe Cal. Certificates..... 54

 4790716492-S1 FCC Report SAR_App F_Dipole Cal. Certificates 54



 4790716492-S1 FCC Report SAR_App G_Proximity Sensor feature..... 54

1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMA145F			
Model Number		SM-A145FB/DS			
Applicable Standards		FCC 47 CFR § 2.1093 IEEE Std 1528-2013 Published RF exposure KDB procedures			
Exposure Category		SAR Limits (W/Kg)			
		Peak spatial-average (1g of tissue)		Product Specific 10g (10g of tissue)	
General population / Uncontrolled exposure		1.6		4.0	
RF Exposure Conditions		Equipment Class - The Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
Head		0.48	0.22	0.46	<0.10
Body-worn		0.52	0.19	0.49	<0.10
Hotspot		1.00	0.41	0.46	<0.10
Product Specific 10g		N/A	N/A	1.46	N/A
Simultaneous TX	Head	0.99	0.70	0.99	0.99
	Body-worn	1.05	0.71	1.05	1.05
	Hotspot	1.55	1.41	1.55	1.55
Date Tested		12/20/2022 to 2/15/2023			
Test Results		Pass			

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released By:		Prepared By:	
			
Justin Park Operations Leader UL Korea, Ltd. Suwon Laboratory		Hakchul Lee Laboratory Technician UL Korea, Ltd. Suwon Laboratory	

1.1. The Highest Reported SAR for RF exposure conditions for each bands

Equipment Class	Band	Antenna	The Highest Reported SAR (W/kg)			
			1g of tissue			10g of tissue
			Head Exposure condition	Body-worn Exposure condition	Hotspot Exposure condition	Product Specific Exposure condition
PCE	GSM 850	Main. 1	0.481	0.516	1.004	N/A
	GSM 1900	Main. 2	0.321	0.458	0.436	N/A
	WCDMA Band V	Main. 1	0.377	0.363	0.777	N/A
	LTE Band 5	Main. 1	0.369	0.365	0.763	N/A
	LTE Band 41	Main. 2	0.347	0.241	0.461	N/A
DTS	2.4GHz WLAN	WiFi/BT Ant	0.217	0.190	0.407	N/A
UNII	5GHz WLAN	WiFi	0.455	0.494	0.459	1.459
DSS	Bluetooth	WiFi/BT Ant	0.053	0.038	0.085	N/A

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D04 Interim General RF Exposure Guidance v01
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02
- 971168 D01 Power Meas License Digital System v03r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October, 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB workshop](#) May, 2017; RF Exposure Procedures (LTE Test Conditions)
- [TCB workshop](#) April, 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon	
SAR 4 Room	SAR 5 Room
SAR 6 Room	

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.


The full scope of accreditation can be viewed at;

<https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. SAR Measurement System & Test Equipment


4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

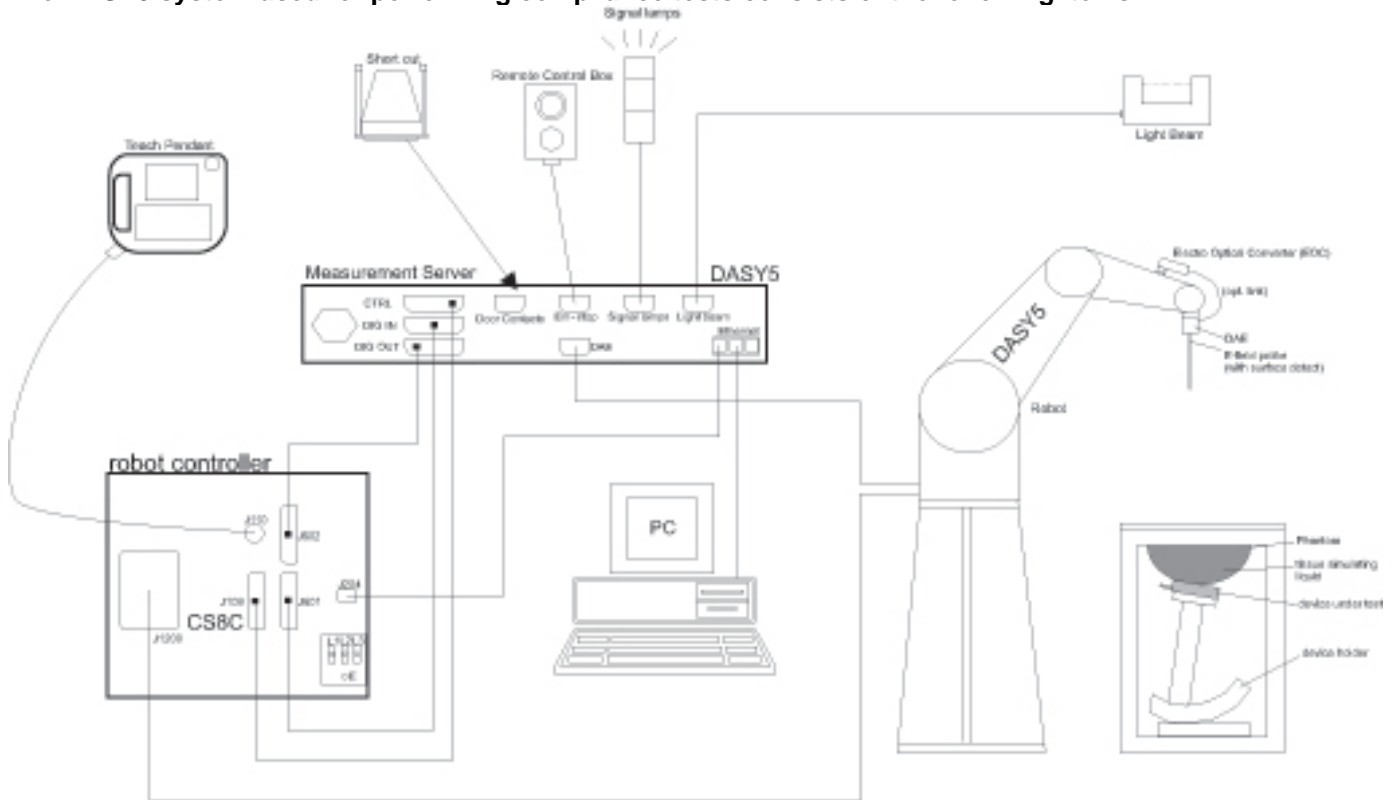

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

The DASY6 & 8 system used for performing compliance tests consists of the following items:

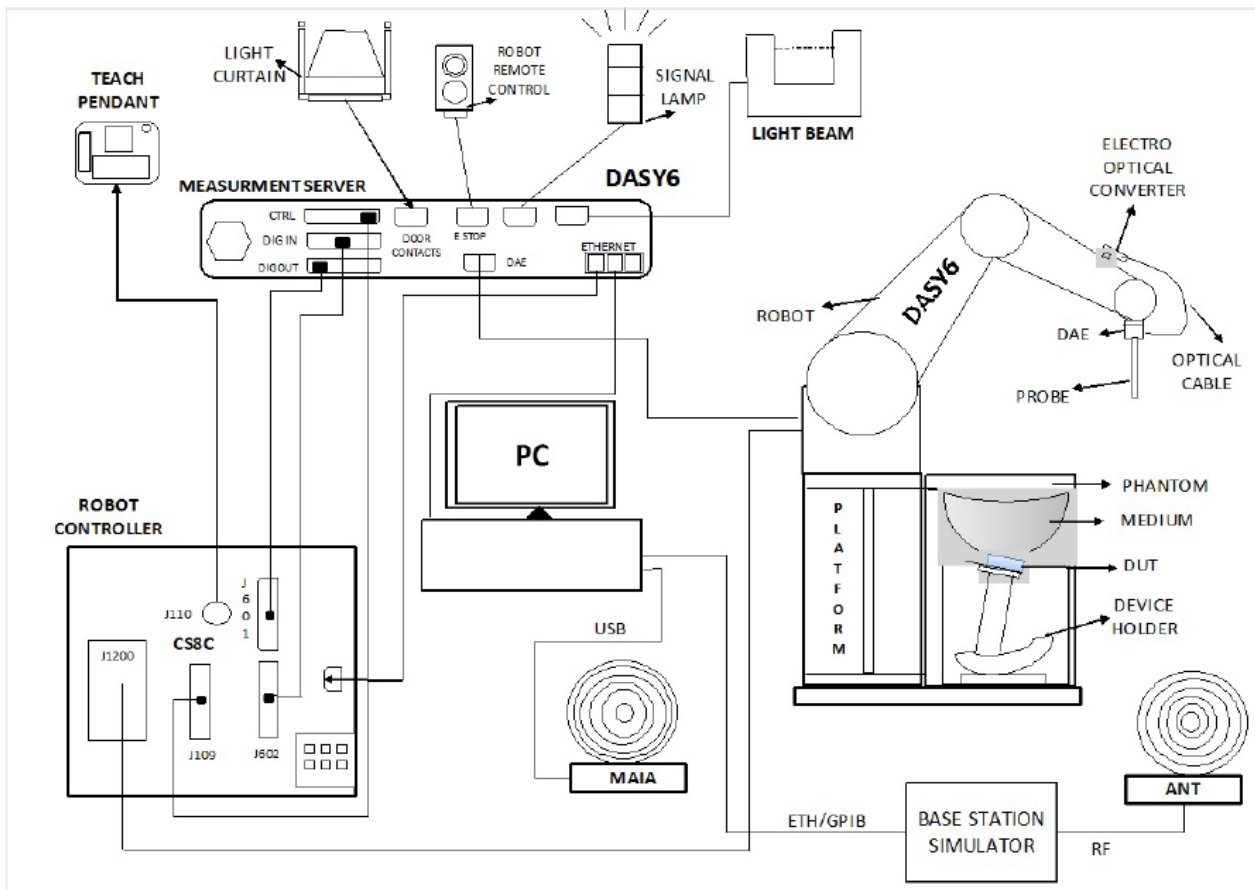

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY6 or 8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-5-2023
Network Analyzer	ROHDE & SCHWARZ	ZNB 20	102256	8-5-2023
Dielectric Assessment Kit	SPEAG	DAK-12	1158	11-17-2023
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	7-25-2023
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3851	8-3-2023
Thermometer	LKM	DTM3000	3862	8-3-2023

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-4-2023
MXG Analog Signal Generator	Keysight	N5181B	MY59100587	8-4-2023
MXG Analog Signal Generator	Keysight	N5173B	MY59101083	8-4-2023
Power Sensor	KEYSIGHT	U2000A	MY60180020	8-3-2023
Power Sensor	KEYSIGHT	U2000A	MY60490008	8-3-2023
Power Sensor	KEYSIGHT	U2000A	MY60160004	8-3-2023
Power Sensor	KEYSIGHT	U2000A	MY61010010	8-3-2023
Power Amplifier	EXODUS	AMP2027	1410025-AMP2027-10003	11-2-2023
Power Amplifier	MINI-CIRCUITS	TVA-R5-13A+	2111006	2-15-2023
				1-6-2024
Power Amplifier	EXODUS	AMP2027ADB	10002	3-30-2023
				1-6-2024
Directional Coupler	Agilent	772D	MY52180193	8-3-2023
Directional Coupler	H.P	778D	16133	8-3-2023
Directional Coupler	NARDA	4216-10	2836	8-3-2023
Directional Coupler	MINI-CIRCUITS	ZMDC-30-1+	SF569102123	8-3-2023
Low Pass Filter	FILTRON	L140012FL	1410003S	8-3-2023
Low Pass Filter	MICROLAB	LA-60N	3942	8-3-2023
Low Pass Filter	MINI-CIRCUITS	VLF-6000+	S0142	8-2-2023
Low Pass Filter	MINI-CIRCUITS	VLF-3000+	S0143	8-2-2023
Low Pass Filter	MINI-CIRCUITS	NLP-1200	VUU19301915	8-2-2023
				1-5-2024
Attenuator	KEYSIGHT	8491B/003	MY39272276	8-3-2023
Attenuator	KEYSIGHT	8491B/010	MY39271981	8-3-2023
Attenuator	KEYSIGHT	8491B/010	MY39272011	8-2-2023
Attenuator	KEYSIGHT	8491B/020	MY39272301	8-3-2023
Attenuator	KEYSIGHT	8491B/020	MY39272302	8-2-2023
Attenuator	KEYSIGHT	8491B/003	MY39272275	8-2-2023
E-Field Probe	SPEAG	EX3DV4	7651	5-30-2023
E-Field Probe	SPEAG	EX3DV4	7645	11-15-2023
E-Field Probe	SPEAG	EX3DV4	7314	5-31-2023
E-Field Probe	SPEAG	EX3DV4	7646	3-29-2023
Data Acquisition Electronics	SPEAG	DAE4	1447	3-25-2023
Data Acquisition Electronics	SPEAG	DAE4	1468	8-18-2023
Data Acquisition Electronics	SPEAG	DAE4	1494	7-18-2023
System Validation Dipole	SPEAG	D835V2	4d174	9-21-2023
System Validation Dipole	SPEAG	D1900V2	5d199	3-25-2023
System Validation Dipole	SPEAG	D2450V2	960	5-22-2023
System Validation Dipole	SPEAG	D2600V2	1097	9-29-2023

Test Equipment (Continued)

System Validation Dipole	SPEAG	D2600V2	1178	4-23-2023
System Validation Dipole	SPEAG	D5GHzV2	1184	11-23-2023
Thermometer	Lutron	MHB-382SD	AH.50213	8-4-2023
				1-11-2024
Thermometer	Lutron	MHB-382SD	AH.50215	8-9-2023
				1-9-2024
Thermometer	Lutron	MHB-382SD	AK.12123	8-9-2023
				1-9-2024
Thermometer	Lutron	MHB-382SD	AK.12103	8-9-2023
Thermometer	Lutron	MHB-382SD	AK.18789	8-9-2023
Thermometer	Lutron	MHB-382SD	AH.45903	8-9-2023
				1-9-2024
Thermometer	Lutron	MHB-382SD	AK.91463	8-4-2023
				1-11-2024

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-2-2023
Base Station Simulator	R & S	CMW500	169801	1-5-2024
Base Station Simulator	R & S	CMW500	150314	8-2-2023
Base Station Simulator	R & S	CMW500	162790	8-2-2023
Base Station Simulator	R & S	CMW500	169803	5-27-2023
				1-5-2024
Base Station Simulator	R & S	CMW500	169799	8-2-2023
Base Station Simulator	R & S	CMW500	169800	8-2-2023
Base Station Simulator	R & S	CMW500	169798	8-2-2023

Note(s):

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations. (for blue box items)
3. All equipments were used until Cal.Due data.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5.1. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedures 1, Clause 4.4.2 in IEC Guide 115:2007.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Refer to Appendix A.		
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.		
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.8 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5.2 GHz_UNII-1, Wi-Fi 5.8 GHz_UNII-3)		
Test Sample Information	No.	S/N	Notes
	1	R38TB002JMJ	MAIN Conducted
	2	R38TB002LDK	MAIN Conducted
	3	R38T90084FX	MAIN Conducted
	4	R38T90084VD	MAIN Conducted
	5	R38T90084BB	Wi-Fi & BT Conducted
	6	R38TB002D9Z	SAR
	7	R38TB002JFV	SAR
	8	R38T90084WY	SAR
	9	R38T90075LR	SAR
	10	R38T900844Z	SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Category 24) HSUPA (Category 6) DC-HSDPA (Category 24) HSPA+ (DL only)		100%
LTE	FDD Band 5 TDD Band 41	QPSK 16QAM Rel. 10 Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD)
	Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b, 802.11g, 802.11n (HT20)		SISO : 99.65% (802.11a)
	5 GHz	802.11a / 802.11n (HT20/40) 802.11ac (VHT20/40/80)		SISO : 98.14% (802.11a) 98.53% (802.11.n) 98.2% (802.11ac VHT 80)
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 5.3 LE		76.7% (DH5)

Notes:

1. The Bluetooth protocol is considered source-based averaging. Bluetooth was verified to have the highest duty cycle and was considered and used for SAR Testing.
2. Duty cycle plot for Wi-Fi are in Section.9.5 (2.4GHz) & Section.9.6 (5GHz)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Antenna	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power (Hotspot & Proximity sensor & Earjack back-off) (dBm)	
				Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr
GSM850	Main 1 Ant.	Voice	1	34.00	24.97		
		GPRS	1	34.00	24.97		
		GPRS	2	32.00	25.98		
		GPRS	3	30.00	25.74		
		GPRS	4	29.50	26.49		
		EGPRS	1	27.50	18.47		
		EGPRS	2	25.50	19.48		
		EGPRS	3	23.00	18.74		
		EGPRS	4	22.00	18.99		
GSM1900	Main 2 Ant.	Voice	1	32.00	22.97	29.00	19.97
		GPRS	1	32.00	22.97	29.00	19.97
		GPRS	2	29.50	23.48	26.50	20.48
		GPRS	3	27.50	23.24	24.00	19.74
		GPRS	4	26.00	22.99	22.00	18.99
		EGPRS	1	26.00	16.97	24.00	14.97
		EGPRS	2	24.50	18.48	21.50	15.48
		EGPRS	3	23.00	18.74	19.50	15.24
		EGPRS	4	21.00	17.99	18.50	15.49

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)
W-CDMA Band V	Main 1 Ant.	R99	25.50
		HSDPA	23.00
		HSUPA	23.00
		DC-HSDPA	23.00

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)
LTE Band 5	Main 1 Ant.	QPSK	25.50
LTE Band 41	Main 2 Ant.	QPSK	23.50

WLAN/BT output power**Max output power**

RF Air interface	Band	Max. RF Output Power (dBm)				
		802.11 mode				
		a	b	g	n	ac
WiFi 2.4 GHz	DTS		16.5 1ch : 15 12ch : 16 13ch : 16	16.5 1ch : 15.0 11ch : 15.0 12ch : 12 13ch : 5	16.5 1ch : 15.0 11ch : 15.0 12ch : 12 13ch : 5	
WiFi 5 GHz (BW : 20MHz)	UNII-1 & 2A	16.0 36ch : 14.5 100ch : 15.0			16 36ch : 14.5 100ch : 15.0 140ch : 15.0	16 36ch : 14.5 100ch : 15.0 140ch : 15.0
	UNII-2C					
	UNII-3					
WiFi 5 GHz (BW : 40MHz)	UNII-1 & 2A				15.0 38ch : 11.0 62ch : 13.0 102ch : 11.5	15.0 38ch : 11.0 62ch : 13.0 102ch : 11.5
	UNII-2C					
	UNII-3					
WiFi 5 GHz (BW : 80MHz)	UNII-1 & 2A					9.0
	UNII-2C					13.0 106ch : 10.0
	UNII-3					13.0
RF Air interface	Max. RF Output Power (dBm)					
	BDR	EDR	LE			
Bluetooth	9.5	8.0	6.5			

Reduced output power

RF Air interface	Band	Reduced. RF Output Power (dBm)				
		802.11 mode				
		a	b	g	n	ac
WiFi 2.4 GHz	DTS		12.0	12.0	12.0	
WiFi 5 GHz (BW : 20MHz)	UNII Bands	11.0			11.0	11.0
WiFi 5 GHz (BW : 40MHz)	UNII Bands				11.0	11.0
WiFi 5 GHz (BW : 80MHz)	UNII -1 & 2A					9.0
	UNII -2C					11.0 106ch : 10
	UNII -3					11.0

Note(s):

1. This device uses an independent fixed level power reduction mechanism for WLAN & BT mode operations during RCV operation. Detailed descriptions of the power reduction mechanism are included in the operational description.

6.4. Power Back-off Operation

This device supports multiple power back-off modes: WWAN (Hotspot), WWAN (Proximity sensor) and WWAN (ear-jack). Each of the power back-off operates within specific exposure conditions for certain technologies. For full details on how each power back-off mode operates, refer to the Operational Description.

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Product Specific 10-g
WWAN (Hotspot)	GSM 1900	N/A	N/A	✓	N/A
WWAN (Proximity sensor)	GSM 1900	N/A	N/A	N/A	✓
WWAN (Ear-jack)	GSM 1900	N/A	✓	N/A	✓

Note(s):

1. Tune-up Limits for WWAN (Hotspot) and WWAN (Proximity Sensor) are all Reduced Average Powers. Please refer to Sec.9 for all conducted power measurements.
2. WWAN Back-off priority: RCV → Hotspot → Ear-jack → Proximity Sensor
3. Body-worn SAR with ear-jack connected is not required due to Body-worn measured at max power is not over 1.2 W/kg.

Product Specific 10g Adjusted SAR Calculation

Wireless technologies	Max Tune-up Limit (dBm)	Reduced Tune-Up Limit (dBm)	Power Factor	Reported SAR Limit (W/kg)
GSM 1900	23.48	20.48	2.00	0.601

Note(s):

1. Tune-up limit powers for GSM 1900 is frame power(dBm).
2. Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Extremity SAR testing is not required for this band in accordance with KDB 648474 §2.5 b. Refer to §10 for Reported SAR results. If the Reported SAR 1g value in §10 is less than the Reported SAR Limit listed above, then Extremity SAR is not required.
3. LTE 50% RB is scaled up to the Max Tune-Up Limit with MPR included.
4. For Reported SAR limit in above table, it was calculated using Max tune-up Limit & Reduced Tune-up limit & Reported SAR 1.2 W/kg. (Reported SAR Limit = 1.2 W/kg / Power factor, Power factor = $10^{((\text{Max tune-up limit} - \text{Reduced tune-up limit})/10)}$)

6.5. General LTE SAR Test and Reporting Considerations

Item	Description																																																																				
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 - 849 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																																														
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																																														
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																																														
	Band 41	Frequency range: 2496 - 2690 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
		Low	39750 / 2506.0																																																																		
		Low-Mid	40185 / 2549.5																																																																		
		Mid	40620 / 2593.0																																																																		
		Mid-High	41055 / 2636.5																																																																		
		High	41490 / 2680.0																																																																		
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																				
Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})							MPR (dB)																																																												
1.4 MHz		3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
<p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>																																																																					
Power reduction	Yes																																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports Overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE devices.
- LTE Band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

WWAN

Wireless technologies	RF Exposure Conditions	Antenna	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	All Main Antennas	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body	All Main Antennas	15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
				Rear	< 25 mm	Yes	
	Hotspot	Main 1 Ant.	10 mm	Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	< 25 mm	Yes	
				Edge 4 (Left)	< 25 mm	Yes	
	Hotspot	Main 2 Ant.	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	> 25 mm	No	1
				Edge 3 (Bottom)	< 25 mm	Yes	
	Product Specific 10-g	All Main Antennas	0 mm	Rear	Refer to notes 2 & 3		
				Front			
				Edge 1 (Top)			
Edge 2 (Right)							
Edge 3 (Bottom)							
Edge 4 (Left)							

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: When hotspot mode applies, Product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- For Phablet devices: When hotspot mode applies and power reduction applies to hotspot mode, Product specific 10-g SAR is required for each test position that has an adjusted SAR to maximum power that is > 1.2 W/kg.
- For Phablet devices: When hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions

WLAN&BT

Wireless technologies	RF Exposure Conditions	Antenna	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
2.4GHz WLAN/BT & 5GHz WLAN	Head	All Main Antennas	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body	All Main Antennas	15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
	Hotspot	2.4G WLAN Ant. 5G WLAN Ant. BT Ant.	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	< 25 mm	Yes	
				Edge 2 (Right)	> 25 mm	No	1
				Edge 3 (Bottom)	> 25 mm	No	1
	Product Specific 10-g	All Main Antennas	0 mm	Rear	Refer to notes 2 & 4		
				Front			
				Edge 1 (Top)			
				Edge 2 (Right)			
Edge 3 (Bottom)							
Edge 4 (Left)							

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: When hotspot mode applies, Product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- For Phablet devices: When hotspot mode applies and power reduction applies to hotspot mode, Product specific 10-g SAR is required for each test position that has an adjusted SAR to maximum power that is > 1.2 W/kg.
- For Phablet devices: When hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The Tissue Dielectric parameters (100MHz to 6GHz) should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5100	36.1	4.55
5200	36.0	4.66
5300	35.9	4.76
5400	35.8	4.86
5500	35.6	4.96
5600	35.5	5.07
5700	35.4	5.17
5800	35.3	5.27
6000	35.1	5.48

SAR test were performed in All RF exposure conditions using Head tissue according to TCB workshop note of April. 2019.

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:
SAR 4 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2023-01-25	Head 2600	e'	39.0800	Relative Permittivity (ϵ_r):	39.08	39.01	0.18	5
		e"	13.4000	Conductivity (σ):	1.94	1.96	-1.27	5
	Head 2500	e'	39.6400	Relative Permittivity (ϵ_r):	39.64	39.14	1.29	5
		e"	12.9700	Conductivity (σ):	1.80	1.85	-2.76	5
	Head 2700	e'	39.0700	Relative Permittivity (ϵ_r):	39.07	38.88	0.48	5
		e"	13.3100	Conductivity (σ):	2.00	2.07	-3.48	5
2023-01-25	Head 2450	e'	39.6700	Relative Permittivity (ϵ_r):	39.67	39.20	1.20	5
		e"	12.9800	Conductivity (σ):	1.77	1.80	-1.76	5
	Head 2400	e'	39.6600	Relative Permittivity (ϵ_r):	39.66	39.30	0.92	5
		e"	13.0700	Conductivity (σ):	1.74	1.75	-0.43	5
	Head 2480	e'	39.6600	Relative Permittivity (ϵ_r):	39.66	39.16	1.27	5
		e"	12.9500	Conductivity (σ):	1.79	1.83	-2.55	5
2023-01-30	Head 2450	e'	39.8300	Relative Permittivity (ϵ_r):	39.83	39.20	1.61	5
		e"	13.2500	Conductivity (σ):	1.81	1.80	0.28	5
	Head 2400	e'	39.9200	Relative Permittivity (ϵ_r):	39.92	39.30	1.59	5
		e"	13.2400	Conductivity (σ):	1.77	1.75	0.87	5
	Head 2480	e'	39.8000	Relative Permittivity (ϵ_r):	39.80	39.16	1.63	5
		e"	13.2500	Conductivity (σ):	1.83	1.83	-0.29	5
2023-02-10	Head 2450	e'	38.8800	Relative Permittivity (ϵ_r):	38.88	39.20	-0.82	5
		e"	13.0500	Conductivity (σ):	1.78	1.80	-1.23	5
	Head 2400	e'	38.8500	Relative Permittivity (ϵ_r):	38.85	39.30	-1.14	5
		e"	13.0200	Conductivity (σ):	1.74	1.75	-0.81	5
	Head 2480	e'	38.9400	Relative Permittivity (ϵ_r):	38.94	39.16	-0.57	5
		e"	12.9600	Conductivity (σ):	1.79	1.83	-2.47	5

SAR 5 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2023-01-26	Head 5250	e'	35.1500	Relative Permittivity (ϵ_r):	35.15	35.93	-2.18	5
		e"	16.5400	Conductivity (σ):	4.83	4.70	2.68	5
	Head 5260	e'	35.1900	Relative Permittivity (ϵ_r):	35.19	35.92	-2.04	5
		e"	16.5600	Conductivity (σ):	4.84	4.71	2.78	5
	Head 5600	e'	35.9600	Relative Permittivity (ϵ_r):	35.96	35.53	1.20	5
		e"	16.3400	Conductivity (σ):	5.09	5.06	0.55	5
	Head 5800	e'	35.2400	Relative Permittivity (ϵ_r):	35.24	35.30	-0.17	5
		e"	16.1400	Conductivity (σ):	5.21	5.27	-1.23	5
	Head 5825	e'	35.2100	Relative Permittivity (ϵ_r):	35.21	35.30	-0.25	5
		e"	16.1200	Conductivity (σ):	5.22	5.27	-0.93	5
2023-01-30	Head 5250	e'	35.3900	Relative Permittivity (ϵ_r):	35.39	35.93	-1.51	5
		e"	16.0600	Conductivity (σ):	4.69	4.70	-0.30	5
	Head 5260	e'	35.4000	Relative Permittivity (ϵ_r):	35.40	35.92	-1.45	5
		e"	16.0500	Conductivity (σ):	4.69	4.71	-0.39	5
	Head 5600	e'	35.2300	Relative Permittivity (ϵ_r):	35.23	35.53	-0.86	5
		e"	15.9700	Conductivity (σ):	4.97	5.06	-1.73	5
	Head 5800	e'	34.7400	Relative Permittivity (ϵ_r):	34.74	35.30	-1.59	5
		e"	16.0100	Conductivity (σ):	5.16	5.27	-2.03	5
	Head 5825	e'	34.6600	Relative Permittivity (ϵ_r):	34.66	35.30	-1.81	5
		e"	16.0000	Conductivity (σ):	5.18	5.27	-1.67	5

SAR 6 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2022-12-20	Head 835	e'	41.9400	Relative Permittivity (ϵ_r):	41.94	41.50	1.06	5
		e"	20.0600	Conductivity (σ):	0.93	0.90	3.48	5
	Head 820	e'	42.0100	Relative Permittivity (ϵ_r):	42.01	41.60	0.98	5
		e"	20.2800	Conductivity (σ):	0.92	0.90	2.92	5
	Head 850	e'	41.9100	Relative Permittivity (ϵ_r):	41.91	41.50	0.99	5
		e"	19.9100	Conductivity (σ):	0.94	0.92	2.84	5
2022-12-20	Head 1900	e'	40.9300	Relative Permittivity (ϵ_r):	40.93	40.00	2.33	5
		e"	13.4900	Conductivity (σ):	1.43	1.40	1.80	5
	Head 1850	e'	40.9200	Relative Permittivity (ϵ_r):	40.92	40.00	2.30	5
		e"	13.9400	Conductivity (σ):	1.43	1.40	2.42	5
	Head 1910	e'	40.8800	Relative Permittivity (ϵ_r):	40.88	40.00	2.20	5
		e"	13.4800	Conductivity (σ):	1.43	1.40	2.26	5
2022-12-26	Head 2600	e'	40.5500	Relative Permittivity (ϵ_r):	40.55	39.01	3.95	5
		e"	13.0600	Conductivity (σ):	1.89	1.96	-3.78	5
	Head 2500	e'	40.4600	Relative Permittivity (ϵ_r):	40.46	39.14	3.38	5
		e"	12.9700	Conductivity (σ):	1.80	1.85	-2.76	5
	Head 2700	e'	40.3900	Relative Permittivity (ϵ_r):	40.39	38.88	3.87	5
		e"	13.1900	Conductivity (σ):	1.98	2.07	-4.35	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Cal. Due Date	Target SAR Values (W/kg)	
				1g/10g	Head
D835V2	4d174	9-21-2022	9-21-2024	1g	9.63
				10g	6.29
D1900V2	5d199	3-25-2022	3-25-2024	1g	39.40
				10g	20.50
D2450V2	960	3-24-2022	3-24-2023	1g	51.90
				10g	24.00
D2600V2	1178	4-23-2021	4-21-2023	1g	56.60
				10g	25.40
D2600V2	1097	9-29-2021	9-29-2023	1g	57.10
				10g	25.50
D5GHzV2	1184	11-23-2022	11-23-2023	1g	79.00
				10g	22.90
				1g	81.60
				10g	23.10
				1g	79.50
				10g	22.60

Note(s):

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations.
3. All equipments were used until Cal.Due data.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 4 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-25-2023	D2600V2	1097	Head	1g	5.54	55.4	57.10	-2.98	
				10g	2.48	24.8	25.50	-2.75	
1-25-2023	D2450V2	960	Head	1g	5.12	51.2	51.90	-1.35	
				10g	2.36	23.6	24.00	-1.67	
1-30-2023	D2450V2	960	Head	1g	5.03	50.3	51.90	-3.08	
				10g	2.31	23.1	24.00	-3.75	
2-10-2023	D2450V2	960	Head	1g	5.43	54.3	51.90	4.62	1
				10g	2.54	25.4	24.00	5.83	

SAR 5 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-26-2023	D5GHzV2	1184	Head	1g	8.45	84.5	79.00	6.96	2
				10g	2.40	24.0	22.90	4.80	
1-26-2023	D5GHzV2	1184	Head	1g	8.38	83.8	81.60	2.70	
				10g	2.34	23.4	23.10	1.30	
1-26-2023	D5GHzV2 (5800)	1184	Head	1g	7.95	79.5	79.50	0.00	
				10g	2.24	22.4	22.60	-0.88	
1-30-2023	D5GHzV2	1184	Head	1g	8.42	84.2	79.00	6.58	
				10g	2.49	24.9	22.90	8.73	
1-30-2023	D5GHzV2	1184	Head	1g	8.68	86.8	81.60	6.37	
				10g	2.51	25.1	23.10	8.66	
1-30-2023	D5GHzV2 (5800)	1184	Head	1g	7.87	78.7	79.50	-1.01	
				10g	2.28	22.8	22.60	0.88	

SAR 6 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
2022-12-20	D835V2	4d174	Head	1g	0.99	9.9	9.63	3.12	3
				10g	0.65	6.5	6.29	3.66	
2022-12-20	D1900V2	5d199	Head	1g	3.93	39.3	39.40	-0.25	4
				10g	2.03	20.3	20.50	-0.98	
2022-12-26	D2600V2	1178	Head	1g	5.87	58.7	56.60	3.71	5
				10g	2.65	26.5	25.40	4.33	

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	128	824.2	32.29	23.26	34.0	25.0
			190	836.6	32.42	23.39		
			251	848.8	32.36	23.33		
GPRS (GMSK)	CS1	1	128	824.2	32.27	23.24	34.0	25.0
			190	836.6	32.50	23.47		
			251	848.8	32.42	23.39		
		2	128	824.2	30.52	24.50	32.0	26.0
			190	836.6	30.41	24.39		
			251	848.8	30.25	24.23		
		3	128	824.2	29.48	25.22	30.0	25.7
			190	836.6	29.30	25.04		
			251	848.8	29.12	24.86		
		4	128	824.2	28.41	25.40	29.5	26.5
			190	836.6	28.49	25.48		
			251	848.8	28.01	25.00		
EGPRS (8PSK)	MCS5	1	128	824.2	25.87	16.84	27.5	18.5
			190	836.6	25.97	16.94		
			251	848.8	25.79	16.76		
		2	128	824.2	23.93	17.91	25.5	19.5
			190	836.6	24.01	17.99		
			251	848.8	23.72	17.70		
		3	128	824.2	22.71	18.45	23.0	18.7
			190	836.6	22.57	18.31		
			251	848.8	22.37	18.11		
		4	128	824.2	21.62	18.61	22.0	19.0
			190	836.6	21.49	18.48		
			251	848.8	21.29	18.28		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				Reduced Average Power (dBm) Hotspot back-off				Reduced Average Power (dBm) Proximity sensor back-off			
					Measured		Tune-up Limit		Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	512	1850.2	30.92	21.89	32.0	23.0	27.17	18.14	29.0	20.0	27.13	18.10	29.0	20.0
			661	1880.0	30.95	21.92			27.97	18.94			27.91	18.88		
			810	1909.8	31.02	21.99			27.68	18.65			27.59	18.56		
GPRS (GMSK)	CS1	1	512	1850.2	31.08	22.05	32.0	23.0	27.15	18.12	29.0	20.0	27.11	18.08	29.0	20.0
			661	1880.0	30.90	21.87			27.85	18.82			28.02	18.99		
			810	1909.8	30.84	21.81			27.54	18.51			27.73	18.70		
		2	512	1850.2	28.19	22.17	29.5	23.48	24.51	18.49	26.5	20.48	24.54	18.52	26.5	20.48
			661	1880.0	27.92	21.90			25.10	19.08			25.24	19.22		
			810	1909.8	28.09	22.07			25.90	19.88			25.79	19.77		
		3	512	1850.2	25.67	21.41	27.5	23.2	22.88	18.62	24.0	19.7	22.83	18.57	24.0	19.7
			661	1880.0	26.35	22.09			23.55	19.29			23.70	19.44		
			810	1909.8	27.17	22.91			23.95	19.69			23.98	19.72		
		4	512	1850.2	24.58	21.57	26.0	23.0	21.59	18.58	23.0	20.0	21.71	18.70	23.0	20.0
			661	1880.0	25.24	22.23			22.22	19.21			22.35	19.34		
			810	1909.8	25.78	22.77			22.91	19.90			22.86	19.85		
EGPRS (8PSK)	MCS5	1	512	1850.2	25.00	15.97	26.0	17.0	22.56	13.53	24.0	15.0	22.46	13.43	24.0	15.0
			661	1880.0	25.27	16.24			22.97	13.94			22.86	13.83		
			810	1909.8	25.37	16.34			23.02	13.99			22.90	13.87		
		2	512	1850.2	23.24	17.22	24.5	18.5	20.15	14.13	21.5	15.5	20.28	14.26	21.5	15.5
			661	1880.0	23.62	17.60			20.54	14.52			20.68	14.66		
			810	1909.8	23.71	17.69			20.62	14.60			20.76	14.74		
		3	512	1850.2	21.76	17.50	23.0	18.7	18.72	14.46	19.5	15.2	18.86	14.60	19.5	15.2
			661	1880.0	22.19	17.93			19.13	14.87			19.02	14.76		
			810	1909.8	22.33	18.07			19.20	14.94			19.11	14.85		
		4	512	1850.2	20.34	17.33	21.0	18.0	17.29	14.28	18.5	15.5	17.19	14.18	18.5	15.5
			661	1880.0	20.74	17.73			17.72	14.71			17.61	14.60		
			810	1909.8	20.85	17.84			17.79	14.78			17.70	14.69		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots for Max power and Reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2W/kg.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	Subtest	HSDPA	HSDPA	HSDPA	HSDPA
		1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

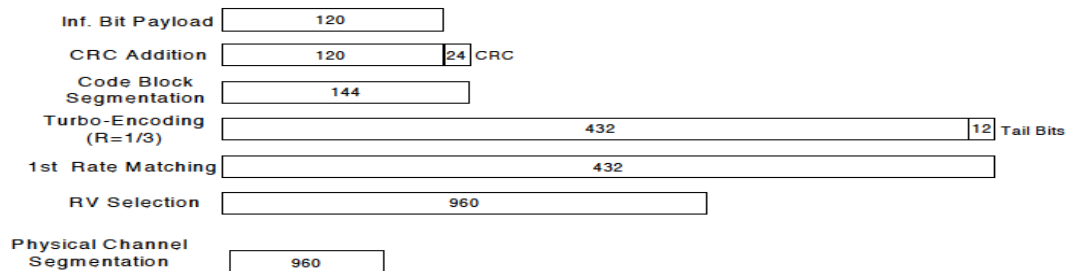


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

Mode	HSDPA	HSDPA	HSDPA	HSDPA	
Subtest	1	2	3	4	
WCDMA General Settings	Loopback Mode				
	Test Mode 1				
	Rel99 RMC				
	12.2kbps RMC				
	HSDPA FRC				
	H-Set 12				
	Power Control Algorithm				
	Algorithm2				
	β_c	2/15	11/15	15/15	15/15
β_d	15/15	15/15	8/15	4/15	
β_d (SF)	64				
β_c/β_d	2/15	11/15	15/8	15/4	
β_{hs}	4/15	24/15	30/15	30/15	
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	DACK				
	8				
	DNAK				
	8				
	DCQI				
	8				
	Ack-Nack Repetition factor				
3					
CQI Feedback					
4ms					
CQI Repetition Factor					
2					
$A_{hs} = \beta_{hs}/\beta_c$					
30/15					

HSPA+

HSPA+ is only supported to down link. Therefore, the RF conducted power is not measured.

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.59	N/A	25.5
		4183	836.6	24.42		
		4233	846.6	24.34		
HSDPA	Subtest 1	4132	826.4	22.46	0	23.0
		4183	836.6	22.31		
		4233	846.6	22.14		
	Subtest 2	4132	826.4	22.42	0	23.0
		4183	836.6	22.31		
		4233	846.6	22.14		
	Subtest 3	4132	826.4	21.48	0.5	22.5
		4183	836.6	21.36		
		4233	846.6	21.21		
	Subtest 4	4132	826.4	21.79	0.5	22.5
		4183	836.6	21.73		
		4233	846.6	21.55		
HSUPA	Subtest 1	4132	826.4	22.05	0	23.0
		4183	836.6	21.95		
		4233	846.6	21.75		
	Subtest 2	4132	826.4	20.09	2	21.0
		4183	836.6	19.97		
		4233	846.6	19.82		
	Subtest 3	4132	826.4	20.98	1	22.0
		4183	836.6	20.86		
		4233	846.6	20.66		
	Subtest 4	4132	826.4	20.11	2	21.0
		4183	836.6	20.00		
		4233	846.6	19.78		
	Subtest 5	4132	826.4	22.02	0	23.0
		4183	836.6	21.85		
		4233	846.6	21.69		
DC-HSDPA	Subtest 1	4132	826.4	22.29	0	23.0
		4183	836.6	22.58		
		4233	846.6	22.41		
	Subtest 2	4132	826.4	22.31	0	23.0
		4183	836.6	22.58		
		4233	846.6	22.43		
	Subtest 3	4132	826.4	20.77	0.5	22.5
		4183	836.6	21.09		
		4233	846.6	20.92		
	Subtest 4	4132	826.4	21.65	0.5	22.5
		4183	836.6	21.93		
		4233	846.6	21.78		

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for Higher order modulations. When the highest maximum output power for Higher order modulations are ≤ 0.5 dB higher than the QPSK or when the reported SAR for QPSK configuration is ≤ 1.45 W/kg.

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20525	836.5 MHz			
10 MHz	QPSK	1	0		24.42		0.0	25.5
		1	25		24.35		0.0	25.5
		1	49		24.29		0.0	25.5
		25	0		23.38		1.0	24.5
		25	12		23.32		1.0	24.5
		25	25		23.31		1.0	24.5
		50	0		23.35		1.0	24.5
	16QAM	1	0		23.35		1.0	24.5
		1	25		23.24		1.0	24.5
		1	49		23.20		1.0	24.5
		25	0		22.42		2.0	23.5
		25	12		22.37		2.0	23.5
		25	25		22.33		2.0	23.5
		50	0		22.34		2.0	23.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20425	20525	20625		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	24.25	24.26	24.33	0.0	25.5
		1	12	24.24	24.21	24.30	0.0	25.5
		1	24	24.16	24.19	24.30	0.0	25.5
		12	0	23.32	23.32	23.37	1.0	24.5
		12	7	23.33	23.31	23.34	1.0	24.5
		12	13	23.31	23.33	23.36	1.0	24.5
		25	0	23.32	23.28	23.37	1.0	24.5
	16QAM	1	0	23.29	23.32	23.34	1.0	24.5
		1	12	23.25	23.27	23.34	1.0	24.5
		1	24	23.23	23.27	23.31	1.0	24.5
		12	0	22.42	22.39	22.40	2.0	23.5
		12	7	22.41	22.33	22.40	2.0	23.5
		12	13	22.39	22.35	22.37	2.0	23.5
		25	0	22.31	22.33	22.43	2.0	23.5

LTE Band 5 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	24.35	24.30	24.44	0.0	25.5
		1	8	24.36	24.30	24.43	0.0	25.5
		1	14	24.32	24.30	24.41	0.0	25.5
		8	0	23.30	23.31	23.33	1.0	24.5
		8	4	23.30	23.29	23.32	1.0	24.5
		8	7	23.28	23.30	23.33	1.0	24.5
		15	0	23.30	23.34	23.33	1.0	24.5
	16QAM	1	0	23.19	23.16	23.32	1.0	24.5
		1	8	23.16	23.10	23.29	1.0	24.5
		1	14	23.11	23.13	23.29	1.0	24.5
		8	0	22.29	22.41	22.42	2.0	23.5
		8	4	22.32	22.41	22.37	2.0	23.5
		8	7	22.32	22.40	22.39	2.0	23.5
		15	0	22.35	22.35	22.30	2.0	23.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	24.33	24.26	24.35	0.0	25.5
		1	3	24.32	24.26	24.34	0.0	25.5
		1	5	24.33	24.27	24.36	0.0	25.5
		3	0	24.27	24.30	24.26	0.0	25.5
		3	1	24.26	24.30	24.28	0.0	25.5
		3	3	24.25	24.30	24.29	0.0	25.5
		6	0	23.32	23.31	23.24	1.0	24.5
	16QAM	1	0	23.08	23.24	23.04	1.0	24.5
		1	3	23.05	23.22	23.03	1.0	24.5
		1	5	23.06	23.25	23.07	1.0	24.5
		3	0	23.27	23.32	23.29	1.0	24.5
		3	1	23.27	23.30	23.30	1.0	24.5
		3	3	23.30	23.29	23.30	1.0	24.5
		6	0	22.41	22.20	22.33	2.0	23.5

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							MPR	Tune-up Limit
				Measured Pwr (dBm)					MPR	Tune-up Limit		
				39750	40185	40620	41055	41490				
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz				
20 MHz	QPSK	1	0	21.39	21.00	21.57	21.00	21.61	0.0	23.5		
		1	49	21.37	21.03	21.50	21.00	21.60	0.0	23.5		
		1	99	21.45	21.07	21.66	21.00	21.65	0.0	23.5		
		50	0	20.74	20.30	20.89	20.19	20.98	1.0	22.5		
		50	24	20.74	20.32	20.93	20.19	20.97	1.0	22.5		
		50	50	20.77	20.34	20.99	20.18	20.98	1.0	22.5		
		100	0	20.75	20.31	20.93	20.18	21.03	1.0	22.5		
	16QAM	1	0	20.64	20.38	20.64	20.00	20.73	1.0	22.5		
		1	49	20.82	20.20	20.97	20.24	20.94	1.0	22.5		
		1	99	20.67	20.34	20.94	20.21	20.93	1.0	22.5		
		50	0	19.71	19.31	19.94	19.23	20.05	2.0	21.5		
		50	24	19.71	19.34	19.98	19.23	20.06	2.0	21.5		
		50	50	19.77	19.35	20.01	19.17	20.06	2.0	21.5		
		100	0	19.73	19.35	20.01	19.15	20.04	2.0	21.5		
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit		
				39750	40185	40620	41055	41490				
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz				
15 MHz	QPSK	1	0	21.00	21.00	21.60	21.00	21.06	0.0	23.5		
		1	37	21.00	21.00	21.56	21.00	21.02	0.0	23.5		
		1	74	21.00	21.00	21.58	21.00	21.09	0.0	23.5		
		36	0	20.22	20.31	20.96	20.26	20.49	1.0	22.5		
		36	20	20.24	20.31	20.98	20.22	20.49	1.0	22.5		
		36	39	20.25	20.34	20.98	20.22	20.49	1.0	22.5		
		75	0	20.26	20.32	20.98	20.24	20.48	1.0	22.5		
	16QAM	1	0	20.28	20.00	20.97	20.37	20.30	1.0	22.5		
		1	37	20.20	20.00	20.99	20.28	20.19	1.0	22.5		
		1	74	20.29	20.58	20.91	20.24	20.01	1.0	22.5		
		36	0	19.32	19.32	20.02	19.27	19.51	2.0	21.5		
		36	20	19.34	19.38	20.06	19.25	19.46	2.0	21.5		
		36	39	19.34	19.37	20.06	19.29	19.52	2.0	21.5		
		75	0	19.33	19.28	20.03	19.24	19.50	2.0	21.5		

LTE Band 41 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	21.00	21.00	21.60	21.00	21.04	0.0	23.5
		1	25	21.00	21.00	21.63	21.00	21.08	0.0	23.5
		1	49	21.00	21.00	21.60	21.00	21.06	0.0	23.5
		25	0	20.23	20.27	20.98	20.18	20.40	1.0	22.5
		25	12	20.24	20.31	21.00	20.16	20.42	1.0	22.5
		25	25	20.22	20.31	21.01	20.17	20.41	1.0	22.5
		50	0	20.21	20.30	20.98	20.14	20.42	1.0	22.5
	16QAM	1	0	20.17	20.03	20.91	20.21	20.31	1.0	22.5
		1	25	20.24	20.09	20.93	20.22	20.30	1.0	22.5
		1	49	20.27	20.12	20.92	20.10	20.32	1.0	22.5
		25	0	19.27	19.30	20.02	19.23	19.45	2.0	21.5
		25	12	19.28	19.33	20.03	19.23	19.47	2.0	21.5
		25	25	19.30	19.33	20.06	19.24	19.45	2.0	21.5
		50	0	19.29	19.32	20.03	19.19	19.41	2.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	21.00	21.00	21.65	21.00	21.20	0.0	23.5
		1	12	21.00	21.09	21.65	21.00	21.16	0.0	23.5
		1	24	21.00	21.01	21.62	21.00	21.15	0.0	23.5
		12	0	20.27	20.35	21.04	20.23	20.49	1.0	22.5
		12	7	20.28	20.35	21.01	20.21	20.48	1.0	22.5
		12	13	20.36	20.38	21.00	20.22	20.47	1.0	22.5
		25	0	20.35	20.34	21.00	20.20	20.44	1.0	22.5
	16QAM	1	0	20.09	20.45	20.54	20.00	20.61	1.0	22.5
		1	12	20.00	20.52	20.57	20.02	20.59	1.0	22.5
		1	24	20.05	20.46	20.55	20.00	20.60	1.0	22.5
		12	0	19.29	19.30	19.97	19.16	19.45	2.0	21.5
		12	7	19.29	19.35	19.98	19.16	19.44	2.0	21.5
		12	13	19.28	19.36	19.98	19.18	19.43	2.0	21.5
		25	0	19.36	19.39	20.05	19.28	19.51	2.0	21.5

9.4. Wi-Fi 2.4 GHz (DTS Band)

WLAN output power results

Antenna	Mode	Data Rate	Ch #	Freq. (MHz)	Max.Average Power (dBm)			Reduced.Average Power (dBm)		
					Meas. Avg Pwr	Max. Tune-up Limit	SAR Test (Yes/No)	Meas. Avg Pwr	Max. Tune-up Limit	SAR Test (Yes/No)
WiFi 2.4G	802.11b	1 Mbps	1	2412.0	14.06	15.0	Yes	11.24	12.0	Yes
			6	2437.0	15.82	16.5		11.38		
			11	2462.0	15.21	16.5		11.70		
			12	2467.0	15.07	16.0		11.59		
			13	2472.0	15.02	16.0		11.44		
	802.11g	6 Mbps	1	2412.0	Not Required	15.0	No	Not Required	12.0	No
			2-10	2417-2457	Not Required	16.5	No	Not Required	12.0	No
			11	2462.0	Not Required	15.0	No	Not Required	12.0	No
			12	2467.0	Not Required	12.0	No	Not Required	12.0	No
			13	2472.0	Not Required	5.0	No	Not Required	5.0	No
	802.11n	6.5 Mbps	1	2412.0	Not Required	15.0	No	Not Required	12.0	No
			2-10	2417-2457	Not Required	16.5	No	Not Required	12.0	No
			11	2462.0	Not Required	15.0	No	Not Required	12.0	No
			12	2467.0	Not Required	12.0	No	Not Required	12.0	No
			13	2472.0	Not Required	5.0	No	Not Required	5.0	No

Note(s):


- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11n/g/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

Duty Factor Measured Results for SAR testing

Mode	T on (ms)	Period (ms)	Measured Duty Cycle	Crest Factor (100% / measured duty cycle(%))
802.11b	8.641	8.611	99.7%	1.00

Duty Cycle plots

802.11b

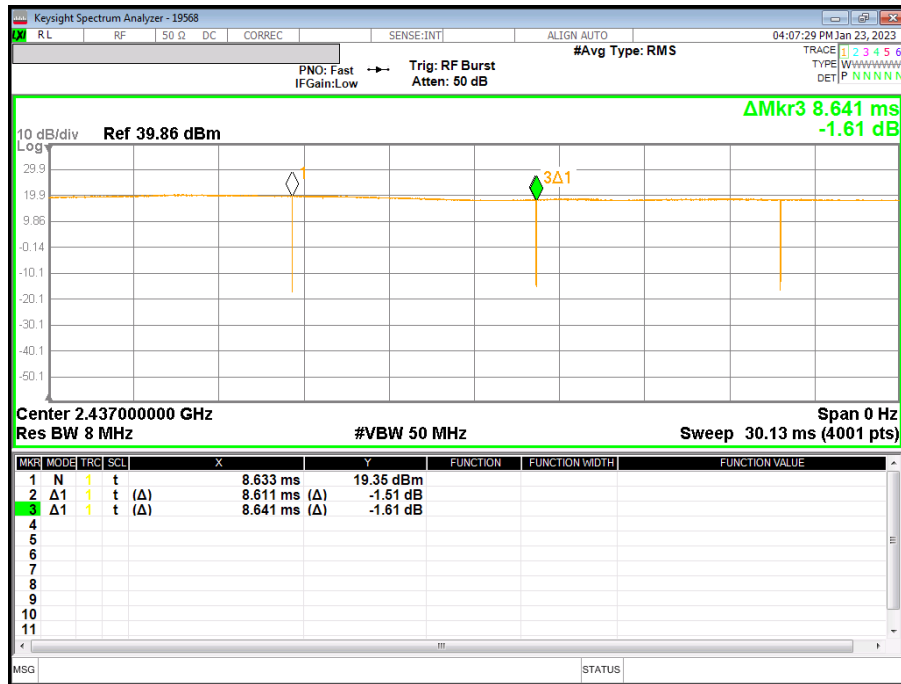

9.5. Wi-Fi 5GHz (U-NII Bands)

WLAN output power Results

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	WLAN mode power						
						Max. Average Power			Reduced Average Power			
						Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	
WiFi 5GHz	5.3 (UNII 2A)	802.11a	6 Mbps	52	5260.0	15.25	16.0	Yes	Not Required	11.0	No	
				56	5280.0	15.34						
				60	5300.0	14.83						
				64	5320.0	14.75						
		802.11n (HT20)	6.5 Mbps	Not Required			16.0	No	Not Required	11.0	No	
		802.11n (HT40)	13.5 Mbps	54.0	5270.0	Not Required	15.0	No	10.6	11.0	Yes	
				62.0	5310.0				10.6			
		802.11ac (VHT20)	6.5 Mbps	Not Required			16.0	No	Not Required	11.0	No	
		802.11ac (VHT40)	13.5 Mbps	Not Required			15.0	No	Not Required	11.0	No	
		802.11ac (VHT80)	29.3 Mbps	Not Required			9.0	No	Not Required	9.0	Yes	
		5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500.0	14.58	16.0	Yes	Not Required	11.0	No
					120	5600.0	14.93					
	124				5620.0	15.14						
	144				5720.0	15.13						
	802.11n (HT20)		6.5 Mbps	Not Required			16.0	No	Not Required	11.0	No	
	802.11n (HT40)		13.5 Mbps	Not Required			15.0	No	Not Required	11.0	No	
	802.11ac (VHT20)		6.5 Mbps	Not Required			16.0	No	Not Required	11.0	No	
	802.11ac (VHT40)		13.5 Mbps	Not Required			15.0	No	Not Required	11.0	No	
	802.11ac (VHT80)		29.3 Mbps	106	5530.0	Not Required	13.0	No	10.43	11.0	Yes	
				122	5610.0	Not Required			10.60			
				138	5690.0	Not Required			10.35			
	5.8 (U-NII 3)		802.11a	6 Mbps	149	5745.0	15.26	16.0	Yes	Not Required	11.0	No
		157			5785.0	15.14						
		165			5825.0	15.16						
802.11n (HT20)		6.5 Mbps	Not Required			16.0	No	Not Required	11.0	No		
802.11n (HT40)		13.5 Mbps	Not Required			15.0	No	Not Required	11.0	No		
802.11ac (VHT20)		6.5 Mbps	Not Required			16.0	No	Not Required	11.0	No		
802.11ac (VHT40)		13.5 Mbps	Not Required			15.0	No	Not Required	11.0	No		
802.11ac (VHT80)	29.3 Mbps	155	5775.0	Not Required	13.0	No	10.53	11.0	Yes			

Note(s):


- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n ac then ax) is selected.
- When the specified maximum output power is the same for both UNII band 1 and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band 1
 - > 1.2 W/kg, both bands should be tested independently for SAR.

Duty Factor Measured Results for SAR testing


Mode	T on (ms)	Period (ms)	Measured Duty Cycle	Crest Factor (100% / measured duty cycle(%))
802.11a	1.453	1.425	98.1%	1.02
802.11n HT40	2.521	2.484	98.5%	1.01
802.11ac-VHT80	2.003	1.967	98.2%	1.02

Duty Cycle plots


802.11a

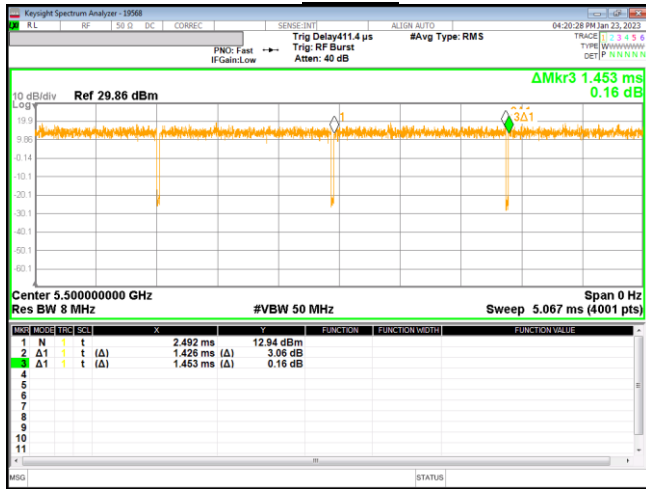

802.11n-HT40

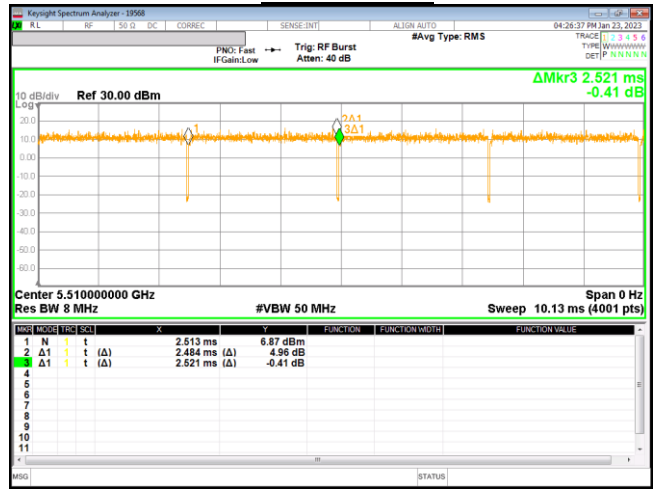

802.11ac-VHT80

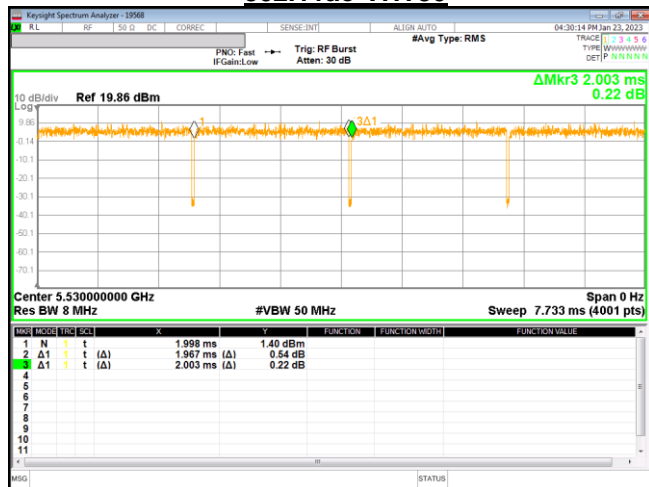

Bluetooth

Bluetooth output power Results

Band (GHz)	Antenna	Mode	Ch #	Freq. (MHz)	Max. Average Power (dBm)	
					Meas Pwr	Tune-up Limit
2.4	BT Ant.	GFSK (BDR)	0	2402	8.73	9.5
			39	2441	8.43	
			78	2480	8.64	
		EDR	0	2402	7.53	8.0
			39	2441	7.00	
			78	2480	7.23	
		LE	0	2402	4.73	6.5
			19	2440	5.23	
			39	2480	5.25	

Duty Factor Measured Results


Mode	Type	T on (ms)	Period (ms)	Measured Duty Cycle	Crest Factor (100% / measured duty cycle(%))
GFSK / BDR	DH5	2.871	3.744	76.68%	1.30

Note(s):

Maximum Duty Cycle is mentioned in Operational description. Detail of BT Duty Cycle refer to Operational description.

Duty Cycle plots

GFSK /BDR

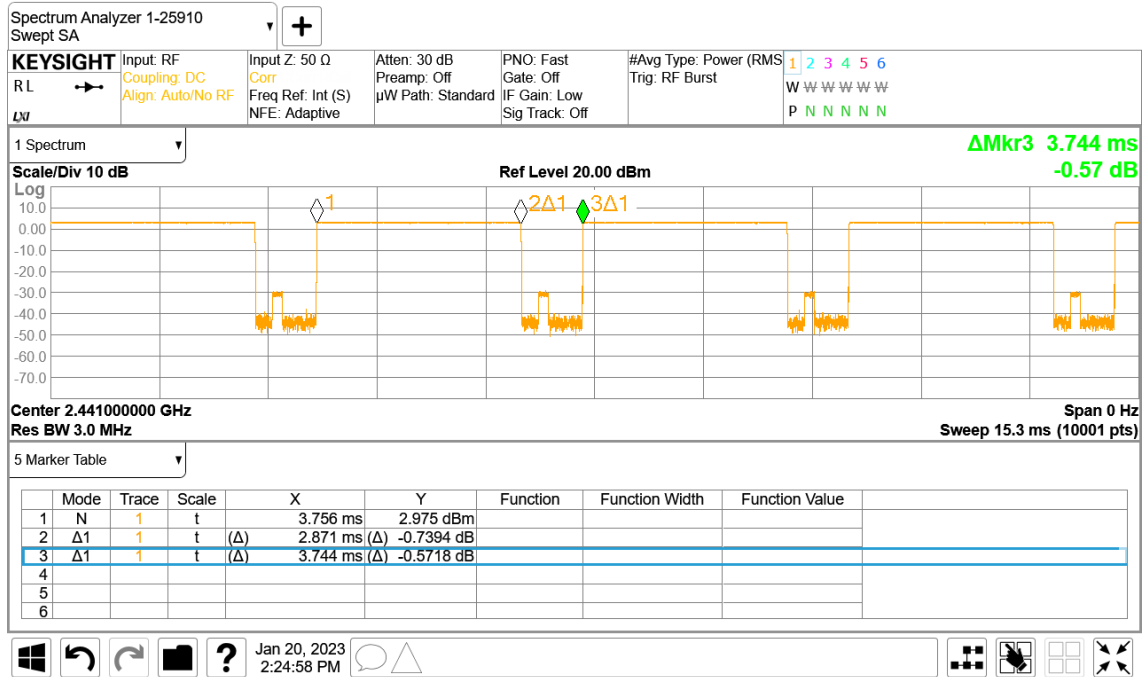

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.

When hotspot mode does not apply, 10-g extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; However, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM 850

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	GPRS 4 Slots	N/A	0	Left Touch	190	836.6	29.50	28.49	0.328	0.414	1
					Left Tilt	190	836.6	29.50	28.49	0.210	0.265	
					Right Touch	190	836.6	29.50	28.49	0.381	0.481	
					Right Tilt	190	836.6	29.50	28.49	0.222	0.280	
	Body-worn	GPRS 4 Slots	N/A	15	Rear	190	836.6	29.50	28.49	0.409	0.516	2
					Front	190	836.6	29.50	28.49	0.357	0.450	
	Hotspot	GPRS 4 Slots	N/A	10	Rear	128	824.4	29.50	28.41	0.775	0.996	3
						190	836.6	29.50	28.49	0.796	1.004	
						251	848.8	29.50	28.01	0.685	0.965	
					Front	190	836.6	29.50	28.49	0.346	0.437	
Edge 2					190	836.6	29.50	28.49	0.494	0.623		
Edge 3					190	836.6	29.50	28.49	0.504	0.636		
Edge 4	190	836.6	29.50	28.49	0.286	0.361						

10.2. GSM 1900

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	GPRS 2 Slots	Off	0	Left Touch	661	1880.0	29.50	27.92	0.223	0.321	4
					Left Tilt	661	1880.0	29.50	27.92	0.154	0.222	
					Right Touch	661	1880.0	29.50	27.92	0.149	0.214	
					Right Tilt	661	1880.0	29.50	27.92	0.091	0.131	
	Body-worn	GPRS 2 Slots	Off	15	Rear	661	1880.0	29.50	27.92	0.318	0.458	5
					Front	661	1880.0	29.50	27.92	0.225	0.324	
	Hotspot	GPRS 2 Slots	On	10	Rear	810	1909.8	26.50	25.90	0.380	0.436	6
					Front	810	1909.8	26.50	25.90	0.258	0.296	
Edge 3					810	1909.8	26.50	25.90	0.237	0.272		
Edge 4					810	1909.8	26.50	25.90	0.219	0.251		

10.3. WCDMA Band V

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	Rel 99 RMC	N/A	0	Left Touch	4183	836.6	25.50	24.42	0.238	0.305	7
					Left Tilt	4183	836.6	25.50	24.42	0.131	0.168	
					Right Touch	4183	836.6	25.50	24.42	0.294	0.377	
					Right Tilt	4183	836.6	25.50	24.42	0.145	0.186	
	Body-worn	Rel 99 RMC	N/A	15	Rear	4183	836.6	25.50	24.42	0.283	0.363	8
					Front	4183	836.6	25.50	24.42	0.251	0.322	
	Hotspot	Rel 99 RMC	N/A	10	Rear	4183	836.6	25.50	24.42	0.606	0.777	9
					Front	4183	836.6	25.50	24.42	0.268	0.344	
					Edge 2	4183	836.6	25.50	24.42	0.283	0.363	
					Edge 3	4183	836.6	25.50	24.42	0.392	0.503	
Edge 4	4183	836.6	25.50	24.42	0.145	0.186						

10.4. LTE Band 5 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Meas.	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	20525	836.5	1	0	25.50	24.42	0.235	0.301	
								25	0	24.50	23.38	0.184	0.238	
					Left Tilt	20525	836.5	1	0	25.50	24.42	0.141	0.181	
								25	0	24.50	23.38	0.111	0.144	
					Right Touch	20525	836.5	1	0	25.50	24.42	0.288	0.369	10
								25	0	24.50	23.38	0.234	0.303	
					Right Tilt	20525	836.5	1	0	25.50	24.42	0.157	0.201	
								25	0	24.50	23.38	0.124	0.160	
	Body-worn	QPSK	N/A	15	Rear	20525	836.5	1	0	25.50	24.42	0.285	0.365	11
								25	0	24.50	23.38	0.213	0.276	
					Front	20525	836.5	1	0	25.50	24.42	0.241	0.309	
								25	0	24.50	23.38	0.194	0.251	
	Hotspot	QPSK	N/A	10	Rear	20525	836.5	1	0	25.50	24.42	0.595	0.763	12
								25	0	24.50	23.38	0.480	0.621	
					Front	20525	836.5	1	0	25.50	24.42	0.256	0.328	
								25	0	24.50	23.38	0.203	0.263	
					Edge 2	20525	836.5	1	0	25.50	24.42	0.270	0.346	
								25	0	24.50	23.38	0.212	0.274	
					Edge 3	20525	836.5	1	0	25.50	24.42	0.367	0.471	
								25	0	24.50	23.38	0.302	0.391	
Edge 4					20525	836.5	1	0	25.50	24.42	0.132	0.169		
							25	0	24.50	23.38	0.105	0.136		

10.5. LTE Band 41 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Meas.	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	QPSK	N/A	0	Left Touch	40620	2593.00	1	0	23.50	21.66	0.227	0.347	13
								50	0	22.50	20.99	0.188	0.266	
					Left Tilt	40620	2593.00	1	0	23.50	21.66	0.066	0.101	
								50	0	22.50	20.99	0.055	0.078	
					Right Touch	40620	2593.00	1	0	23.50	21.66	0.139	0.212	
								50	0	22.50	20.99	0.110	0.156	
					Right Tilt	40620	2593.00	1	0	23.50	21.66	0.119	0.182	
								50	0	22.50	20.99	0.096	0.136	
	Body-worn	QPSK	N/A	15	Rear	40620	2593.00	1	0	23.50	21.66	0.158	0.241	14
								50	0	22.50	20.99	0.128	0.181	
					Front	40620	2593.00	1	0	23.50	21.66	0.125	0.191	
								50	0	22.50	20.99	0.103	0.146	
	Hotspot	QPSK	N/A	10	Rear	40620	2593.00	1	0	23.50	21.66	0.267	0.408	
								50	0	22.50	20.99	0.219	0.310	
					Front	40620	2593.00	1	0	23.50	21.66	0.239	0.365	
								50	0	22.50	20.99	0.194	0.275	
					Edge 3	40620	2593.00	1	0	23.50	21.66	0.107	0.163	
								50	0	22.50	20.99	0.089	0.126	
					Edge 4	40620	2593.00	1	0	23.50	21.66	0.302	0.461	15
								50	0	22.50	20.99	0.247	0.350	

10.6. Wi-Fi (DTS Band)

DTS SAR results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	On	0	Left Touch	11	2462.0	0.102	99.7%	12.00	11.70				
					Left Tilt	11	2462.0	0.068	99.7%	12.00	11.70				
					Right Touch	11	2462.0	0.299	99.7%	12.00	11.70	0.202	0.217	1	16
					Right Tilt	11	2462.0	0.142	99.7%	12.00	11.70				
		Body-worn	Off	15	Rear	6	2437.0	0.236	99.7%	16.50	15.82	0.162	0.190	1	17
					Front	6	2437.0	0.053	99.7%	16.50	15.82				
		Hotspot	Off	10	Rear	6	2437.0	0.546	99.7%	16.50	15.82	0.347	0.407		18
					Front	6	2437.0	0.104	99.7%	16.50	15.82				
					Edge 1	6	2437.0	0.041	99.7%	16.50	15.82				
					Edge 4	6	2437.0	0.229	99.7%	16.50	15.82	0.151	0.177	2	

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
5. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.7. Wi-Fi (U-NII Bands)

U-NII 2A SAR Results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.3 GHz U-NII 2A	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	54	5270.0	0.482	98.5%	11.00	10.61						
					Left Tilt	54	5270.0	0.551	98.5%	11.00	10.61						
					Right Touch	54	5270.0	0.698	98.5%	11.00	10.61	0.265	0.294			2	
					Right Tilt	54	5270.0	0.800	98.5%	11.00	10.61	0.410	0.455				19
	802.11a 6 Mbps	Body-worn	Off	15	Rear	56	5280.0	0.605	98.1%	16.00	15.34	0.322	0.382			1	20
					Front	56	5280.0	0.165	98.1%	16.00	15.34						
		Product Specific 10-g	Off	0	Rear	56	5280.0	9.082	98.1%	16.00	15.34			1.230	1.459		21
					Front	56	5280.0	2.434	98.1%	16.00	15.34						
					Edge 1	56	5280.0	15.604	98.1%	16.00	15.34			0.897	1.064	2	
					Edge 4	56	5280.0	2.760	98.1%	16.00	15.34						

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

U-NII 2C SAR Results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.5 GHz U-NII 2C	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	122	5610.0	0.478	98.2%	11.00	10.60						
					Left Tilt	122	5610.0	0.549	98.2%	11.00	10.60	0.232	0.259			1	22
					Right Touch	122	5610.0	0.445	98.2%	11.00	10.60						
					Right Tilt	122	5610.0	0.473	98.2%	11.00	10.60						
	802.11a 6 Mbps	Body-worn	Off	15	Rear	124	5620.0	0.722	98.1%	16.00	15.14	0.398	0.494				23
					Front	124	5620.0	0.176	98.1%	16.00	15.14	0.066	0.082			2	
		Product Specific 10-g	Off	0	Rear	124	5620.0	5.346	98.1%	16.00	15.14			0.835	1.037	2	
					Front	124	5620.0	1.658	98.1%	16.00	15.14						
					Edge 1	124	5620.0	18.877	98.1%	16.00	15.14			1.040	1.292		24
					Edge 4	124	5620.0	1.232	98.1%	16.00	15.14						

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

U-NII 3 SAR Results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.8 GHz U-NII 3	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	155	5775.0	0.354	98.2%	11.00	10.53						
					Left Tilt	155	5775.0	0.443	98.2%	11.00	10.53	0.186	0.211			1	25
					Right Touch	155	5775.0	0.245	98.2%	11.00	10.53						
					Right Tilt	155	5775.0	0.316	98.2%	11.00	10.53						
	802.11a 6 Mbps	Body-worn	Off	15	Rear	149	5745.0	0.520	98.1%	16.00	15.26	0.259	0.313			1	26
					Front	149	5745.0	0.146	98.1%	16.00	15.26						
		Hotspot	Off	10	Rear	149	5745.0	0.760	98.1%	16.00	15.26	0.380	0.459			2	27
					Front	149	5745.0	0.193	98.1%	16.00	15.26						
					Edge 1	149	5745.0	0.841	98.1%	16.00	15.26	0.344	0.416				
					Edge 4	149	5745.0	0.264	98.1%	16.00	15.26						

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.8. Bluetooth

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	GFSK	Head	N/A	0	Left Touch	0	2402.0	76.7%	9.50	8.73	0.013	0.020	
					Left Tilt	0	2402.0	76.7%	9.50	8.73	0.012	0.019	
					Right Touch	0	2402.0	76.7%	9.50	8.73	0.034	0.053	28
					Right Tilt	0	2402.0	76.7%	9.50	8.73	0.024	0.038	
		Body-worn	N/A	15	Rear	0	2402.0	76.7%	9.50	8.73	0.025	0.038	29
					Front	0	2402.0	76.7%	9.50	8.73	0.006	0.010	
		Hotspot	N/A	10	Rear	0	2402.0	76.7%	9.50	8.73	0.054	0.085	30
					Front	0	2402.0	76.7%	9.50	8.73	0.012	0.018	
					Edge 1	0	2402.0	76.7%	9.50	8.73	0.006	0.009	
					Edge 4	0	2402.0	76.7%	9.50	8.73	0.015	0.023	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

All measured SAR results are below 0.8 W/kg. So Repeated SAR test is not required.

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Simultaneous transmission scenarios			
Head & Body-worn & Hotspot & Phablet-10g	1	WWAN (2G/3G/LTE/NR)	+	DTS	
	2	WWAN (2G/3G/LTE/NR)	+	UNII	
	3	WWAN (2G/3G/LTE/NR)	+	BT	
	4	WWAN (2G/3G/LTE/NR)	+	BT	+

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. U-NII supports Wi-Fi Direct, Hotspot and VoIP.
3. GPRS, W-CDMA, LTE supports Hotspot and VoIP
4. U-NII Radio can transmit simultaneously with Bluetooth Radio.
6. BT tethering is considered about each RF exposure conditions.

Simultaneous transmission SAR test exclusion considerations

KDB 447498 D04 Interim General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All positions	0.481	0.217	0.455	0.053	0.698	0.936	0.534	0.989
Body-Worn (1-g SAR)	All positions	0.516	0.190	0.494	0.038	0.706	1.010	0.554	1.048
Hotspot (1-g SAR)	Rear	1.004	0.407	0.459	0.085	1.411	1.463	1.089	1.548
	Front	0.437	0.407	0.459	0.018	0.844	0.896	0.455	0.914
	Edge 1		0.407	0.416	0.009				0.425
	Edge 2	0.623							
	Edge 3	0.636							
	Edge 4	0.461	0.177	0.459	0.023	0.638	0.920	0.484	0.943
Product Specific (10-g SAR)	Rear			1.459					
	Front			1.459					
	Edge 1			1.292					
	Edge 2								
	Edge 3								
	Edge 4			1.459					

Note(s):

- Green value is estimated SAR value.

Conclusion:

Simultaneous Transmission SAR analysis results is satisfied the FCC Limit requirement according to follow procedures with "Sum of SAR".

Appendixes

Refer to separated files for the following appendixes.

4790716492-S1 FCC Report SAR_App A_Photos & Ant. Locations

4790716492-S1 FCC Report SAR_App B_Highest SAR Test Plots

4790716492-S1 FCC Report SAR_App C_System Check Plots

4790716492-S1 FCC Report SAR_App D_SAR Tissue Ingredients

4790716492-S1 FCC Report SAR_App E_Probe Cal. Certificates

4790716492-S1 FCC Report SAR_App F_Dipole Cal. Certificates

4790716492-S1 FCC Report SAR_App G_Proximity Sensor feature

END OF REPORT