

# FCC DTS REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> November 07, 2023
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Test Site/Location:</b> 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	<b>Report No.:</b> HCT-RF-2311-FC020

<b>FCC ID:</b>	<b>A3LSMA155M</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

<b>Model:</b>	SM-A155M/DSN
<b>Additional Model:</b>	SM-A155M/N
<b>EUT Type:</b>	Mobile Phone
<b>Average. RF Output Power:</b>	802.11b : 19.84 dBm, 802.11g : 17.74 dBm, 802.11n(HT20) : 17.60 dBm
<b>Frequency Range:</b>	2 412 MHz ~ 2 472 MHz
<b>Modulation type:</b>	CCK/DSSS/OFDM
<b>FCC Classification:</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s):</b>	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2311-FC020

---

REVIEWED BY



---

Report prepared by : Kyung Jun Woo  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2311-FC020	November 07, 2023	- First Approval Report

# Table of Contents

REVIEWED BY .....	2
1. EUT DESCRIPTION .....	5
2. TEST METHODOLOGY .....	6
EUT CONFIGURATION .....	6
EUT EXERCISE .....	6
GENERAL TEST PROCEDURES .....	6
DESCRIPTION OF TEST MODES .....	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS .....	7
FACILITIES .....	7
EQUIPMENT .....	7
5. ANTENNA REQUIREMENTS .....	8
6. MEASUREMENT UNCERTAINTY .....	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS .....	24
9. TEST RESULT .....	25
9.1 DUTY CYCLE.....	25
9.2 6 dB BANDWIDTH .....	27
9.3 OUTPUT POWER .....	29
9.4 POWER SPECTRAL DENSITY .....	31
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS.....	33
9.6 RADIATED SPURIOUS EMISSIONS .....	36
9.7 RADIATED RESTRICTED BAND EDGES .....	40
9.8 POWERLINE CONDUCTED EMISSIONS .....	44
10. LIST OF TEST EQUIPMENT .....	46
11. ANNEX A_ TEST SETUP PHOTO .....	49

**1. EUT DESCRIPTION**

<b>Model</b>	SM-A155M/DSN	
<b>Additional Model</b>	SM-A155M/N	
<b>EUT Type</b>	Mobile Phone	
<b>Power Supply</b>	DC 3.88 V	
<b>Frequency Range</b>	2 412 MHz ~ 2 472 MHz	
<b>Max. RF Output Power</b>	<u>Average Power</u>	802.11b : 19.84 dBm 802.11g : 17.74 dBm 802.11n(HT20) : 17.60 dBm
	<u>Peak Power</u> (For information only)	802.11b : 26.18 dBm 802.11g : 26.73 dBm 802.11n(HT20) : 26.25 dBm
<b>Modulation Type</b>	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n	
<b>Number of Channels</b>	13 Channels	
<b>Date(s) of Tests</b>	October 06, 2023 ~ November 07, 2023	
<b>Serial number</b>	Conducted : R38W900BYHD Radiated : R38W900BYPX	

## **2. TEST METHODOLOGY**

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## **GENERAL TEST PROCEDURES**

### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### **3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### **4. FACILITIES AND ACCREDITATIONS**

#### **FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 31, 2022 (CAB identifier: KR0032).

#### **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 ( Confidence level about 95 %, $k=2$ )



## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

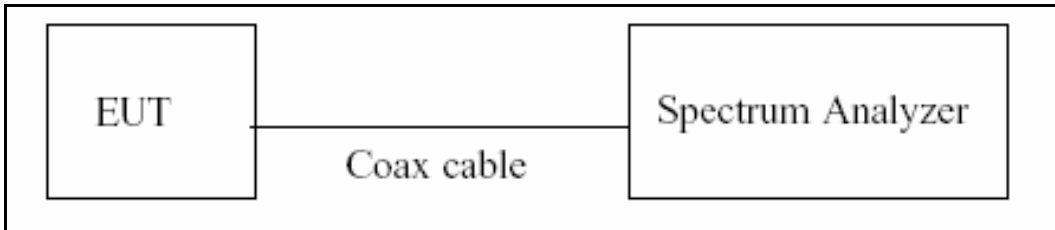

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured  $T$  data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6 dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration

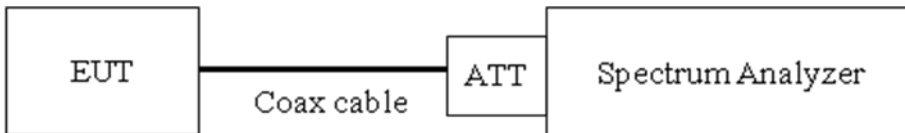

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration

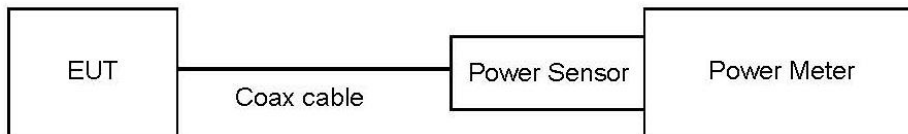

#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

### Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration

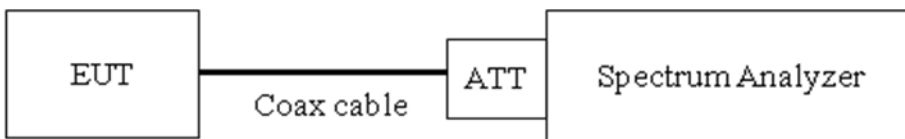

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	10.14
100	10.21
200	10.31
300	10.37
400	10.40
500	10.42
600	10.44
700	10.46
800	10.53
900	10.61
1 000	10.67
2 000	10.76
2 400	<b>10.86</b>
2 500	<b>10.86</b>
3 000	11.18
4 000	11.44
5 000	12.38
5 150	12.38
6 000	12.38
7 000	12.69
8 000	12.88
9 000	12.95
10 000	13.00
11 000	13.14
12 000	13.19
13 000	13.25
14 000	13.42
15 000	13.72
16 000	13.88
17 000	13.91
18 000	13.81
19 000	13.84
20 000	13.73
21 000	13.99
22 000	14.43
23 000	14.25
24 000	14.38
25 000	14.36

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss(1ea)


## 7.6. Radiated Test

### Limit


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Configuration


Below 30 MHz

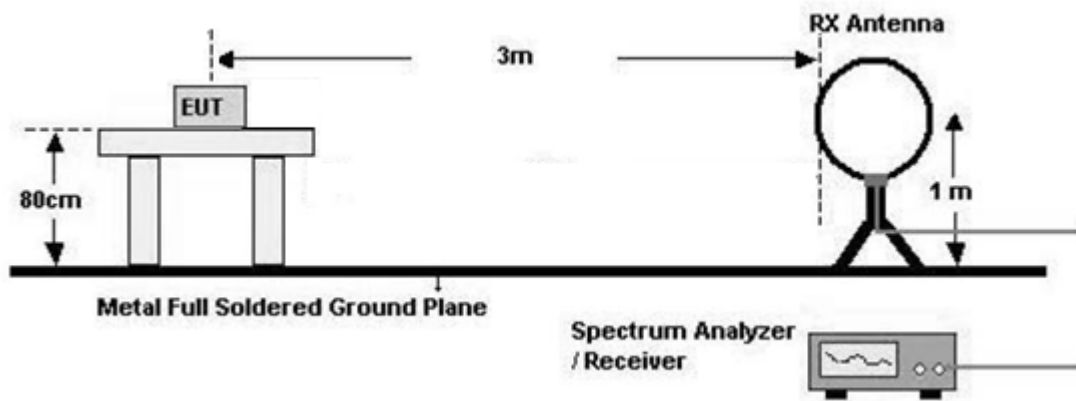

30 MHz - 1 GHz

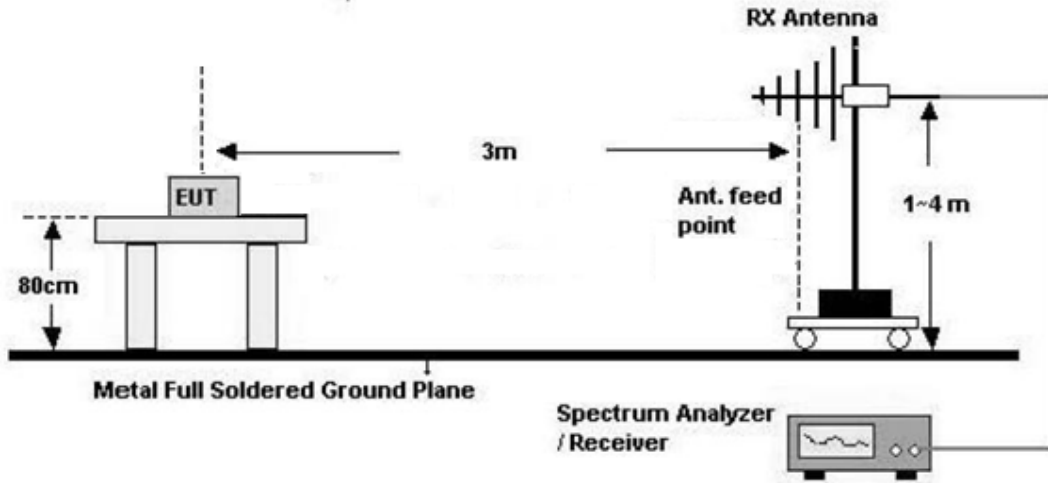

Above 1 GHz

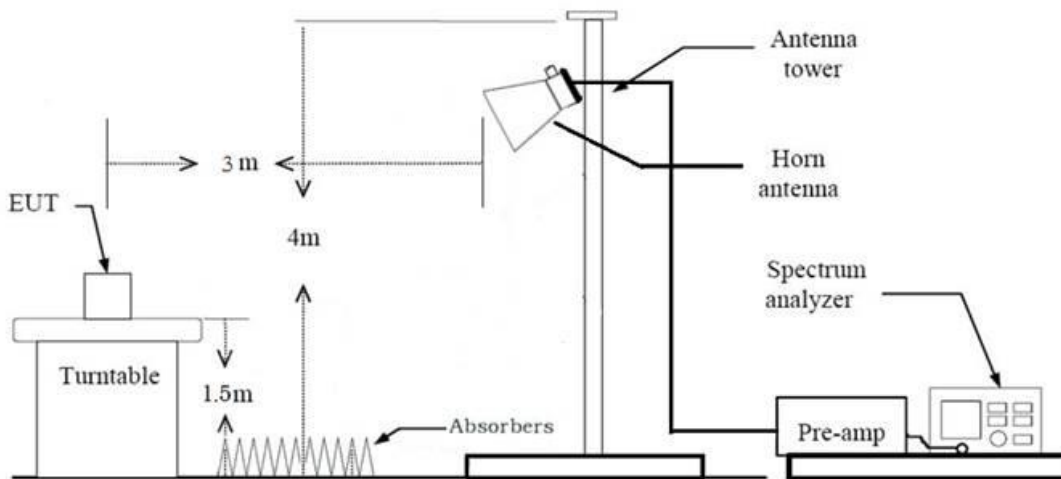



**Test Procedure of Radiated spurious emissions (Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance: 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance: 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions (Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range: 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range: 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
- In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range: 1 GHz – 25 GHz
    - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average): Duty cycle  $\geq 98 \%$

- Measured Frequency Range: 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle  $< 98 \%$ , duty cycle variations are less than  $\pm 2 \%$

- Measured Frequency Range: 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (*ie*: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

= Peak Measured Value

Total(Measurement Type : Average, Duty cycle  $\geq 98 \%$ )

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
- Amp.Gain(A.G.)

Total(Measurement Type : Average, Duty cycle  $< 98 \%$ )

= Average Measured Value Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
- Amp.Gain(A.G.) + Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range: 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq$  98 %,
    - Measured Frequency Range: 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
  - (3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than  $\pm$  2 %
    - Measured Frequency Range: 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Peak Measured Value

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Average Measured Value + Antenna Factor(A.F.) + Cable Loss(C.L) + Distance Factor(D.F.)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Average Measured Value + Antenna Factor(A.F.) + Cable Loss(C.L) + Distance Factor(D.F.)

+ Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

## **7.8. Worst case configuration and mode**

### **Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
4. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
  - 802.11b : 1 Mbps
  - 802.11g : 6 Mbps
  - 802.11n(HT20): MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. Radiated Spurious Emission
  - All mode of operation were investigated and the worst case results are reported.
  - Mode: 802.11b, 802.11g, 802.11n(HT20)
  - Worstcase: 802.11b
7. SM-A155M/DSN, SM-A155M/N were tested and the worst case results are reported.  
(Worst case : SM-A155M/DSN)

### **AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc) + Travel Adapter,  
Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter
2. SM-A155M/DSN, SM-A155M/N were tested and the worst case results are reported.  
(Worst case : SM-A155M/DSN)

### **Conducted test**

1. The EUT was configured with data rate of the highest power.
2. SM-A155M/DSN, SM-A155M/N were tested and the worst case results are reported.  
(Worst case : SM-A155M/DSN)

**8. SUMMARY TEST OF RESULTS**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS




## 9. TEST RESULT

### 9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.377	8.407	0.996	0.016
	2	4.290	4.327	0.991	0.037
	5.5	1.682	1.720	0.978	0.097
	11	0.935	0.975	0.958	0.184
802.11g	6	1.391	1.436	0.969	0.138
	9	0.937	0.983	0.954	0.206
	12	0.709	0.755	0.940	0.271
	18	0.480	0.524	0.916	0.381
	24	0.479	0.524	0.913	0.395
	36	0.251	0.296	0.846	0.726
	48	0.195	0.238	0.819	0.866
	54	0.177	0.231	0.768	1.148
802.11n (HT20)	6.5 (MCS0)	1.300	1.345	0.967	0.148
	13 (MCS1)	0.669	0.714	0.936	0.286
	19.5 (MCS2)	0.459	0.507	0.905	0.434
	26 (MCS3)	0.352	0.398	0.885	0.529
	39 (MCS4)	0.248	0.294	0.845	0.732
	52 (MCS5)	0.195	0.241	0.811	0.912
	58.5 (MCS6)	0.182	0.225	0.809	0.921
	65 (MCS7)	0.167	0.238	0.702	1.536

Test Plots


Duty cycle plot (802.11b(1 Mbps))

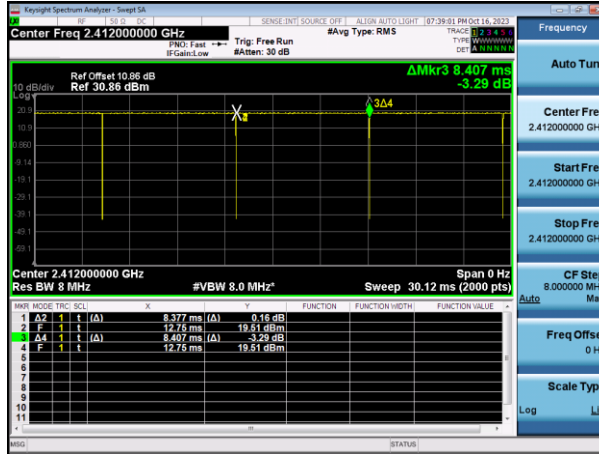

Duty cycle plot (802.11g(6 Mbps))

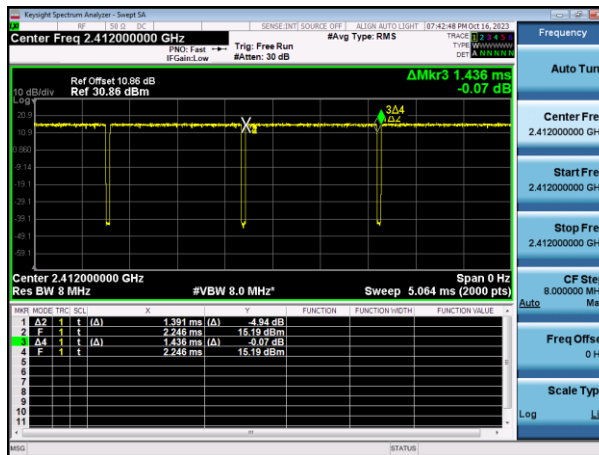

Duty cycle plot (802.11n(MCS0))

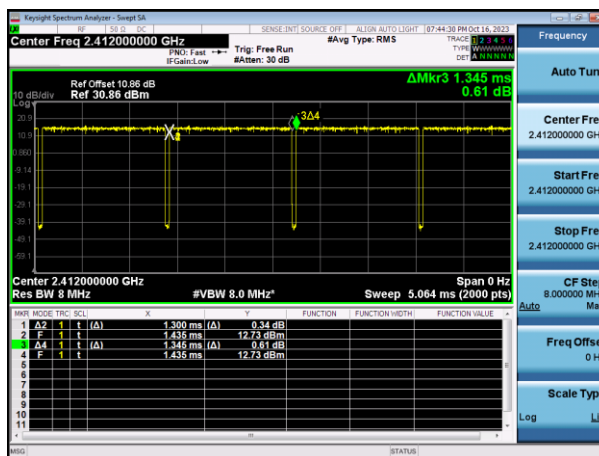

Note:


In order to simplify the report, attached plots were only the lowest data rate.

**9.2 6 dB BANDWIDTH**


<b>Mode</b>	<b>Frequency [MHz]</b>	<b>Channel No.</b>	<b>6dB Bandwidth [MHz]</b>	<b>Limit [MHz]</b>
802.11b	2412	1	8.120	0.50
	2437	6	8.116	0.50
	2462	11	8.115	0.50
	2467	12	8.089	0.50
	2472	13	8.072	0.50
802.11g	2412	1	15.15	0.50
	2437	6	15.17	0.50
	2462	11	15.15	0.50
	2467	12	15.16	0.50
	2472	13	15.37	0.50
802.11n(HT20)	2412	1	15.16	0.50
	2437	6	15.15	0.50
	2462	11	15.17	0.50
	2467	12	15.17	0.50
	2472	13	15.15	0.50

Test Plots


6 dB Bandwidth plot (802.11b-CH 13)

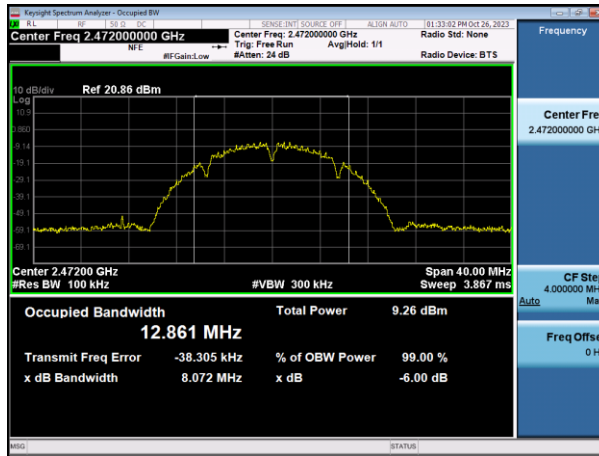

6 dB Bandwidth plot (802.11g-CH 1)

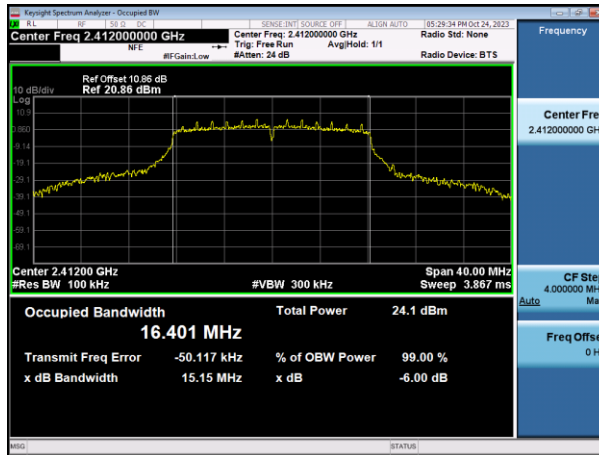

6 dB Bandwidth plot (802.11n\_HT20-CH 13)

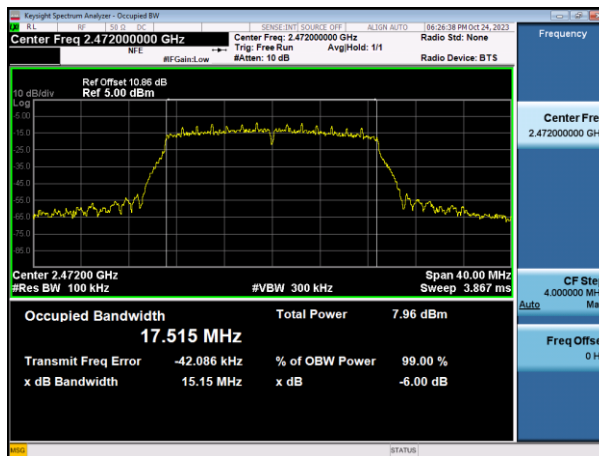

Note:

In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.

### 9.3 OUTPUT POWER

#### Peak Output Power

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]	Limit [dBm]
802.11b	2412	1	11M	25.61	30
	2437	6	11M	25.46	30
	2462	11	11M	26.18	30
	2467	12	11M	12.76	30
	2472	13	11M	9.74	30
802.11g	2412	1	54M	26.37	30
	2437	6	54M	26.01	30
	2462	11	54M	26.73	30
	2467	12	54M	15.42	30
	2472	13	54M	11.29	30
802.11n	2412	1	MCS7	25.86	30
	2437	6	MCS7	26.25	30
	2462	11	MCS7	26.25	30
	2467	12	MCS7	15.26	30
	2472	13	MCS7	11.23	30

**Average Output Power**


Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power			Limit [dBm]
				[dBm]			
				Measured Power	D.C.F	Total Power	
802.11b	2412	1	1M	19.33	0.00	19.33	30
	2437	6	1M	19.45	0.00	19.45	30
	2462	11	1M	19.84	0.00	19.84	30
	2467	12	1M	5.68	0.00	5.68	30
	2472	13	1M	1.14	0.00	1.14	30
802.11g	2412	1	6M	17.14	0.14	17.28	30
	2437	6	6M	16.93	0.14	17.07	30
	2462	11	6M	17.60	0.14	17.74	30
	2467	12	6M	5.65	0.14	5.79	30
	2472	13	6M	1.42	0.14	1.56	30
802.11n	2412	1	MCS0	17.10	0.15	17.25	30
	2437	6	MCS0	17.05	0.15	17.20	30
	2462	11	MCS0	17.45	0.15	17.60	30
	2467	12	MCS0	5.64	0.15	5.79	30
	2472	13	MCS0	1.75	0.15	1.90	30

**9.4 POWER SPECTRAL DENSITY**


Mode	Frequency [MHz]	Channel No.	Data Rate	Power Spectral Density [dBm]			Limit [dBm/kHz]
				Measured PSD	D.C.F	Total PSD	
802.11b	2412	1	1M	-2.484	0.00	-2.484	8
	2437	6	1M	-2.657	0.00	-2.657	
	2462	11	1M	-2.082	0.00	-2.082	
	2467	12	1M	-15.266	0.00	-15.266	
	2472	13	1M	-18.503	0.00	-18.503	
802.11g	2412	1	6M	-6.651	0.14	-6.513	
	2437	6	6M	-6.784	0.14	-6.646	
	2462	11	6M	-6.197	0.14	-6.059	
	2467	12	6M	-17.753	0.14	-17.615	
	2472	13	6M	-22.113	0.14	-21.975	
802.11n	2412	1	MCS0	-7.518	0.15	-7.370	
	2437	6	MCS0	-7.042	0.15	-6.894	
	2462	11	MCS0	-7.200	0.15	-7.052	
	2467	12	MCS0	-17.955	0.15	-17.807	
	2472	13	MCS0	-22.454	0.15	-22.306	

Test Plots


Power Spectral Density (802.11b-CH 11)

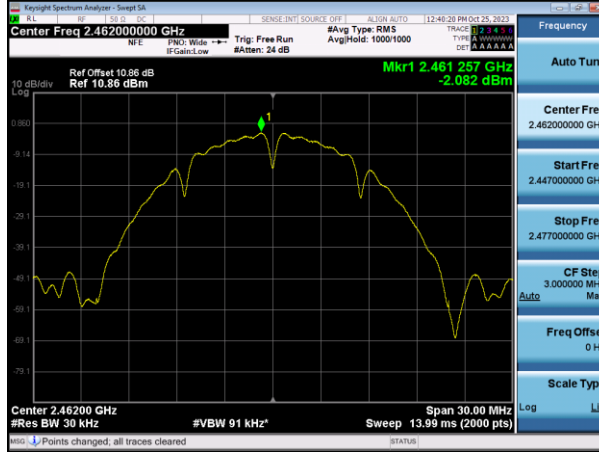

Power Spectral Density (802.11g-CH 11)

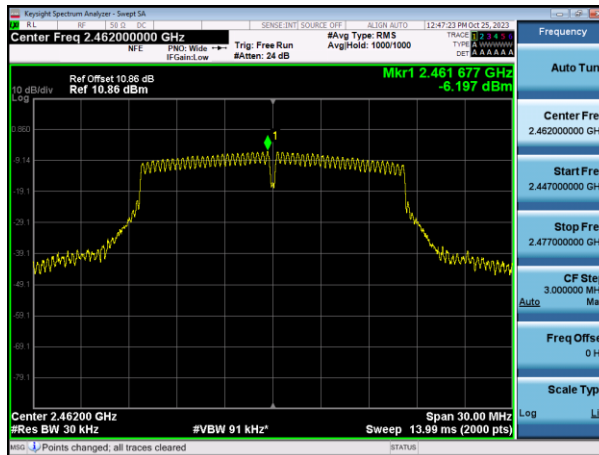

Power Spectral Density (802.11n\_HT20-CH 6)

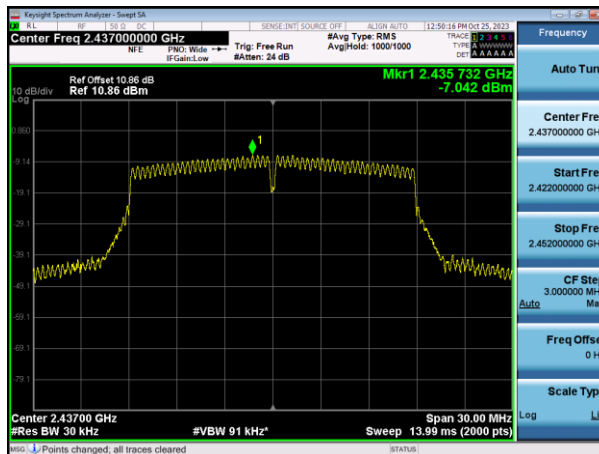

Note :

In order to simplify the report, attached plots were only the worst case PSD channel.




## 9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

Test Plots(Band Edge)

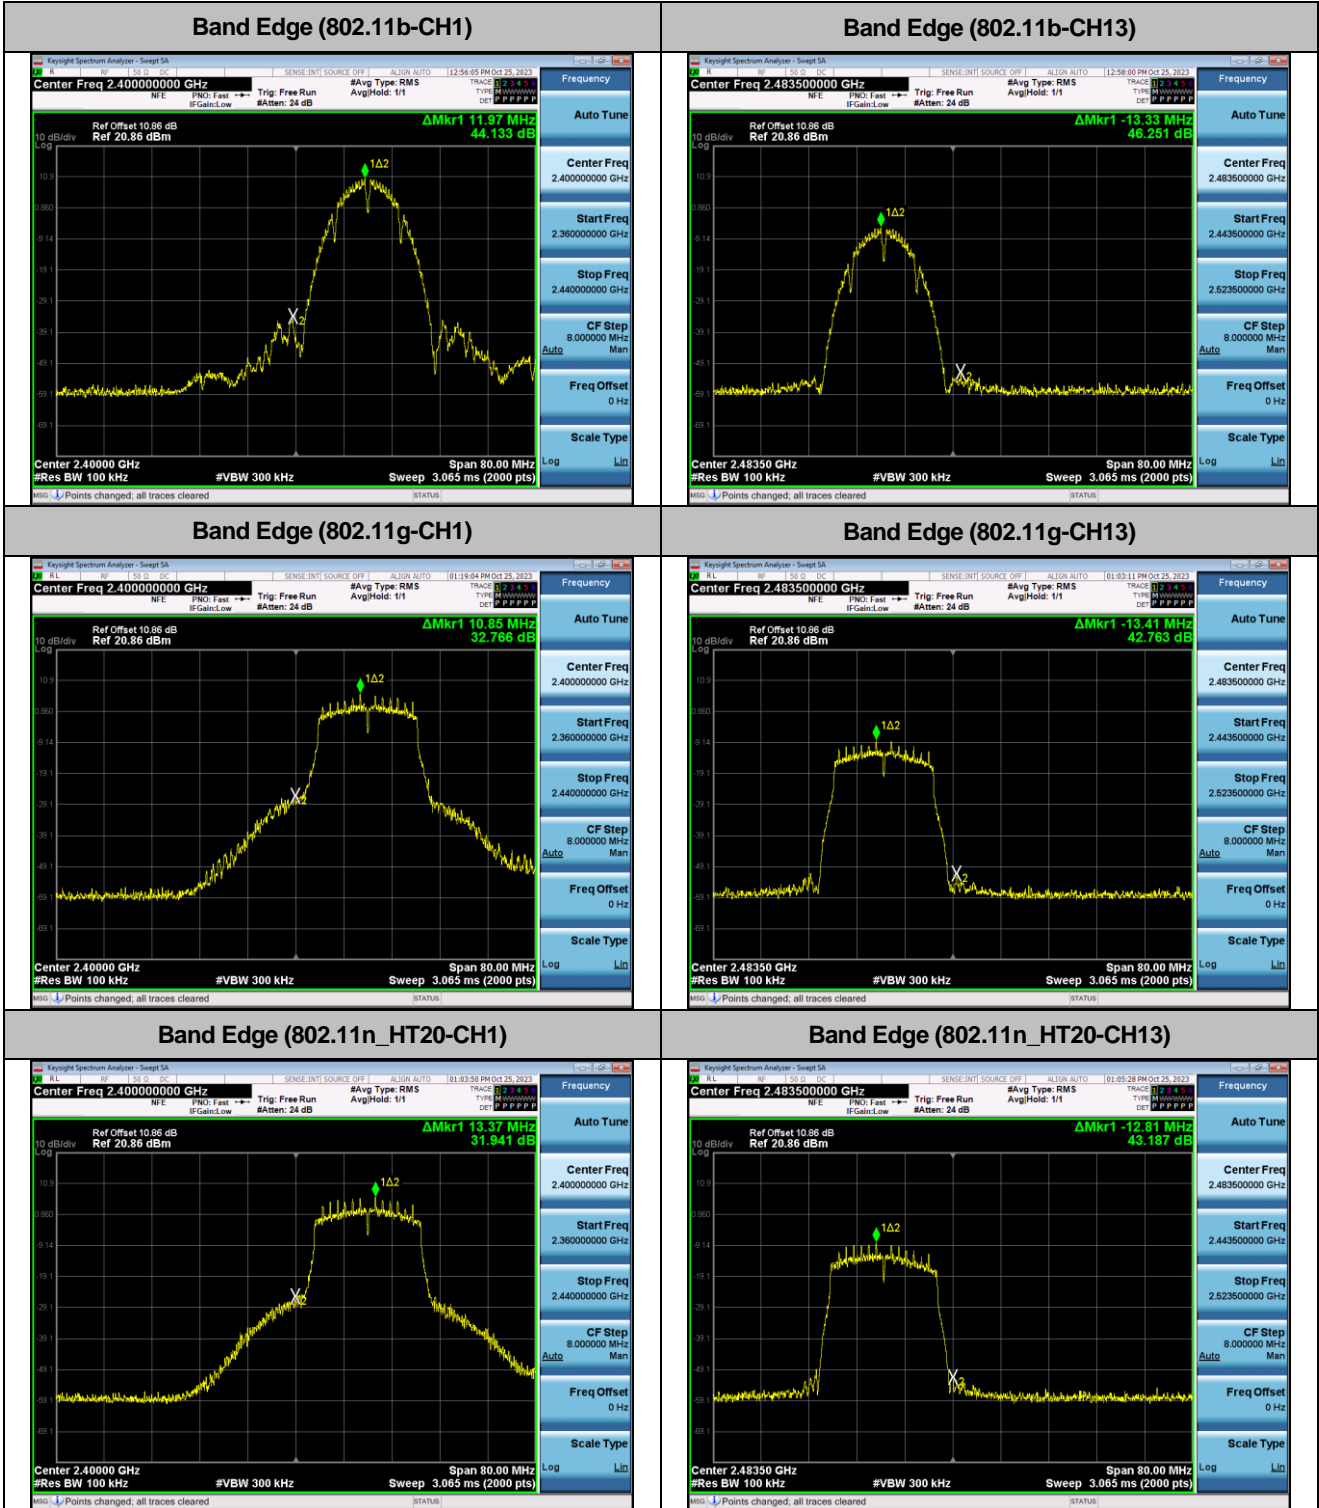


**Test Plots(Conducted Spurious Emission)**

In order to simplify the report, attached plots were only the worst case channel and data rate.

**TEST PLOTS**

(Worst case : 802.11g\_Ch.1\_6 Mbps)

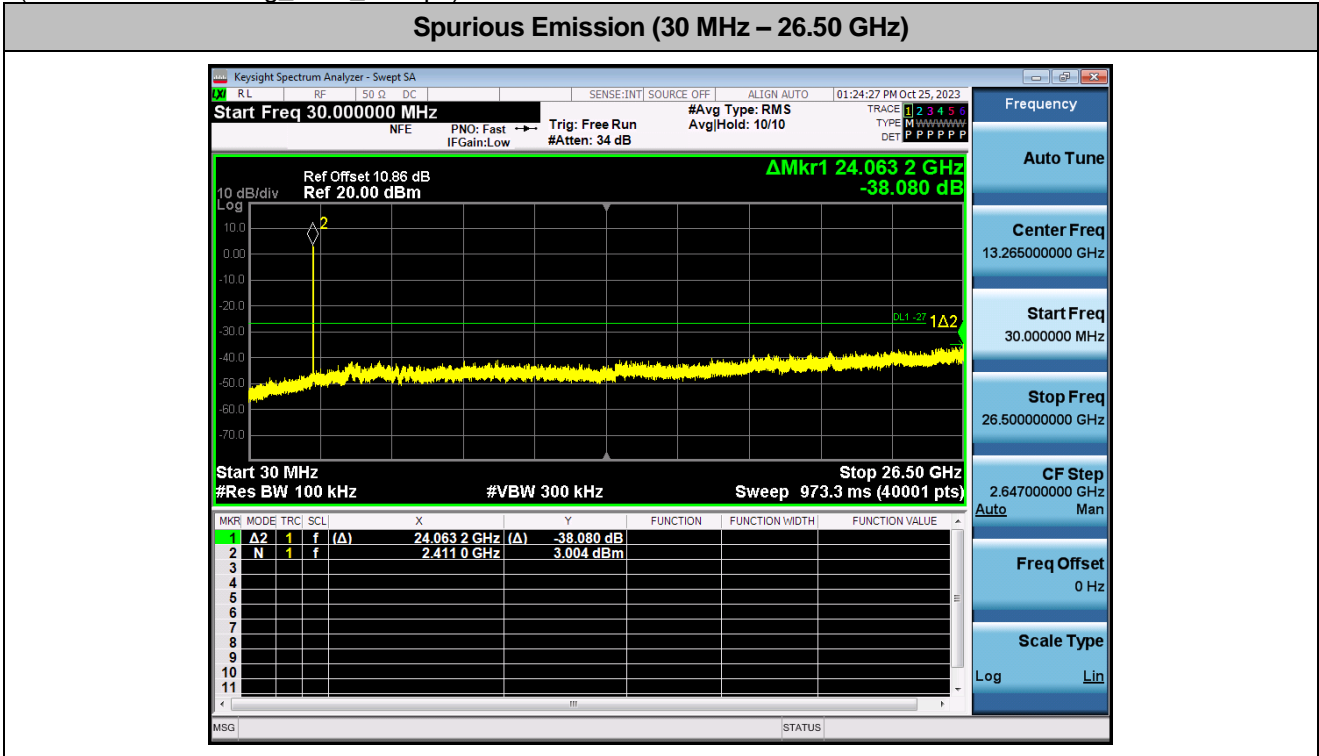

**Note:**

Limit : -26.996 dBm

**9.6 RADIATED SPURIOUS EMISSIONS****Frequency Range : 9 kHz – 30 MHz**

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]
No Critical peaks found						

**Note:**

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

**Frequency Range : Below 1 GHz**

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]
No Critical peaks found						

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

Operation Mode: 802.11b  
Transfer Rate: 1 Mbps  
Operating Frequency: 2412 MHz  
Channel No. 01 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	57.69	-5.96	V	51.73	73.98	22.25	PK
4824	53.42	-5.96	V	47.46	53.98	6.52	AV
7236	49.16	0.53	V	49.69	73.98	24.29	PK
7236	37.88	0.53	V	38.41	53.98	15.57	AV
4824	59.06	-5.96	H	53.10	73.98	20.88	PK
4824	55.15	-5.96	H	49.19	53.98	4.79	AV
7236	50.04	0.53	H	50.57	73.98	23.41	PK
7236	37.96	0.53	H	38.49	53.98	15.49	AV

Operation Mode: 802.11b  
Transfer Rate: 1 Mbps  
Operating Frequency: 2437 MHz  
Channel No. 06 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	56.55	-5.66	V	50.89	73.98	23.09	PK
4874	52.18	-5.66	V	46.52	53.98	7.46	AV
7311	49.92	0.51	V	50.43	73.98	23.55	PK
7311	37.52	0.51	V	38.03	53.98	15.95	AV
4874	56.58	-5.66	H	50.92	73.98	23.06	PK
4874	52.50	-5.66	H	46.84	53.98	7.14	AV
7311	49.98	0.51	H	50.49	73.98	23.49	PK
7311	37.92	0.51	H	38.43	53.98	15.55	AV

Operation Mode: 802.11b  
Transfer Rate: 1 Mbps  
Operating Frequency: 2462 MHz  
Channel No. 11 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
4924	56.14	-5.29	V	50.85	73.98	23.13	PK
4924	52.80	-5.29	V	47.51	53.98	6.47	AV
7386	49.28	0.35	V	49.63	73.98	24.35	PK
7386	37.08	0.35	V	37.43	53.98	16.55	AV
4924	57.22	-5.29	H	51.93	73.98	22.05	PK
4924	53.06	-5.29	H	47.77	53.98	6.21	AV
7386	50.07	0.35	H	50.42	73.98	23.56	PK
7386	37.36	0.35	H	37.71	53.98	16.27	AV


**Note:**

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

### ☑ Test Plots (Worst case : X-H)


**Note:** In order to simplify the report, Plot of worst case are only reported.

Radiated Spurious Emissions plot – Average Result (802.11b\_1 Mbps, Ch.1 2nd Harmonic)

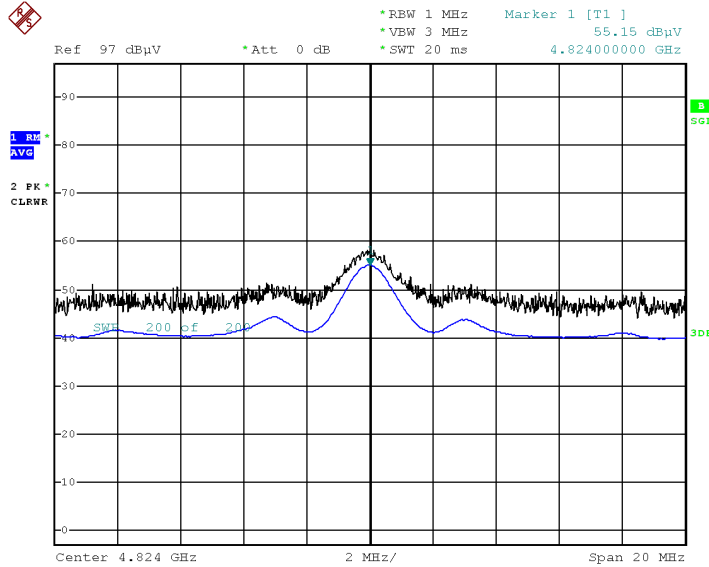

Date: 24.JAN.2003 14:44:42

Radiated Spurious Emissions plot – Peak Result (802.11b\_1 Mbps, Ch.1 2nd Harmonic)

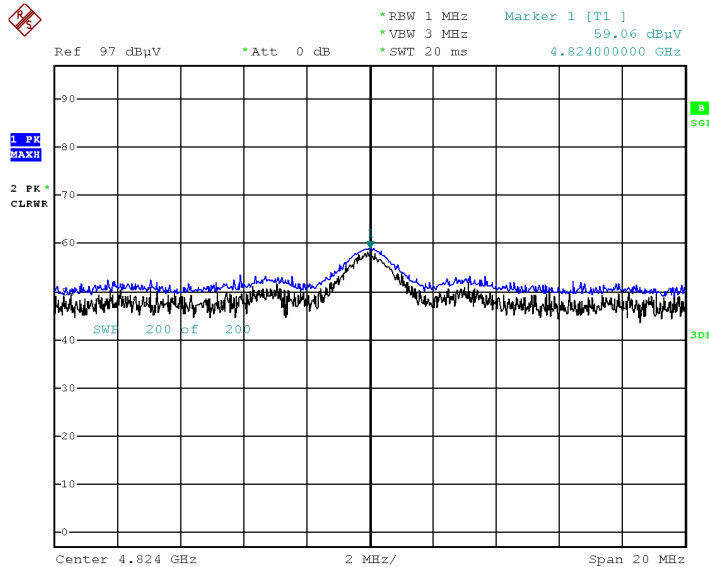

Date: 24.JAN.2003 14:45:28

**9.7 RADIATED RESTRICTED BAND EDGES**

Operation Mode: 802.11b  
Transfer Rate: 1 Mbps  
Operating Frequency: 2412 MHz, 2462 MHz  
Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
2390.0	19.422	34.59	H	54.01	73.98	19.97	PK
2390.0	9.784	34.59	H	44.37	53.98	9.61	AV
2390.0	18.996	34.59	V	53.59	73.98	20.39	PK
2390.0	9.628	34.59	V	44.22	53.98	9.76	AV
2483.5	22.302	35.49	H	57.80	73.98	16.18	PK
2483.5	13.110	35.49	H	48.60	53.98	5.38	AV
2483.5	21.925	35.49	V	57.42	73.98	16.56	PK
2483.5	13.028	35.49	V	48.52	53.98	5.46	AV

Operation Mode: 802.11b  
Transfer Rate: 1 Mbps  
Operating Frequency: 2467 MHz, 2472 MHz  
Channel No. 12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
2483.5	20.53	35.49	H	56.03	73.98	17.95	PK
2483.5	10.24	35.49	H	45.74	53.98	8.24	AV
2483.5	20.19	35.49	V	55.69	73.98	18.29	PK
2483.5	10.22	35.49	V	45.71	53.98	8.27	AV
2483.5	21.12	35.49	H	56.61	73.98	17.37	PK
2483.5	10.58	35.49	H	46.08	53.98	7.90	AV
2483.5	21.33	35.49	V	56.82	73.98	17.16	PK
2483.5	10.61	35.49	V	46.10	53.98	7.88	AV



Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2310~2390	26.669	0.00	34.59	H	61.26	73.98	12.72	PK
#2310~2390	16.920	0.14	34.59	H	51.65	53.98	2.33	AV
#2310~2390	26.275	0.00	34.59	V	60.86	73.98	13.12	PK
#2310~2390	16.584	0.14	34.59	V	51.31	53.98	2.67	AV
#2483.5~2500	25.280	0.00	35.49	H	60.77	73.98	13.21	PK
#2483.5~2500	15.665	0.14	35.49	H	51.30	53.98	2.68	AV
#2483.5~2500	24.180	0.00	35.49	V	59.67	73.98	14.31	PK
#2483.5~2500	15.425	0.14	35.49	V	51.06	53.98	2.92	AV

# Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2467 MHz, 2472 MHz  
 Channel No.: 12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	18.39	0.00	35.49	H	53.89	73.98	20.09	PK
2483.5	10.29	0.14	35.49	H	45.92	53.98	8.06	AV
2483.5	18.10	0.00	35.49	V	53.60	73.98	20.38	PK
2483.5	10.10	0.14	35.49	V	45.74	53.98	8.24	AV
2483.5	21.43	0.00	35.49	H	56.93	73.98	17.05	PK
2483.5	10.29	0.14	35.49	H	45.92	53.98	8.06	AV
2483.5	21.38	0.00	35.49	V	56.87	73.98	17.11	PK
2483.5	10.61	0.14	35.49	V	46.24	53.98	7.74	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2310~2390	26.896	0.00	34.59	H	61.49	73.98	12.49	PK
#2310~2390	16.980	0.15	34.59	H	51.72	53.98	2.26	AV
#2310~2390	28.316	0.00	34.59	V	62.91	73.98	11.07	PK
#2310~2390	16.974	0.15	34.59	V	51.71	53.98	2.27	AV
#2483.5~2500	26.215	0.00	35.49	H	61.71	73.98	12.27	PK
#2483.5~2500	16.106	0.15	35.49	H	51.75	53.98	2.23	AV
#2483.5~2500	25.372	0.00	35.49	V	60.87	73.98	13.11	PK
#2483.5~2500	15.414	0.15	35.49	V	51.06	53.98	2.92	AV

# Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2467 MHz, 2472 MHz  
 Channel No. 12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	20.54	0.00	35.49	H	56.03	73.98	17.95	PK
2483.5	10.24	0.15	35.49	H	45.88	53.98	8.10	AV
2483.5	20.29	0.00	35.49	V	55.78	73.98	18.20	PK
2483.5	10.10	0.15	35.49	V	45.74	53.98	8.24	AV
2483.5	21.19	0.00	35.49	H	56.69	73.98	17.29	PK
2483.5	10.26	0.15	35.49	H	45.91	53.98	8.07	AV
2483.5	21.92	0.00	35.49	V	57.42	73.98	16.56	PK
2483.5	10.58	0.15	35.49	V	46.22	53.98	7.76	AV


# Note : integration method Used (ANSI C63.10 Section11.13.3)

■ Test Plots


**Note:**

In order to simplify the report, Plots of worst case are only reported.

Radiated Restricted Band Edges plot – Average Result (802.11n (HT20), MCS0, Ch.11, X-H)

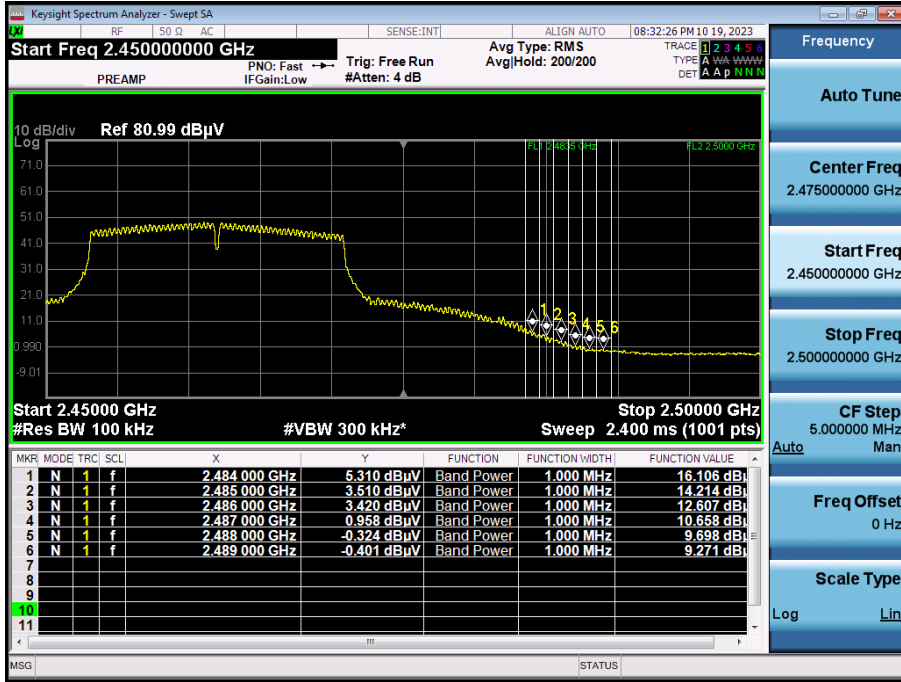

Radiated Restricted Band Edges plot – Peak Result (802.11n (HT20), MCS0, Ch.11, X-H)

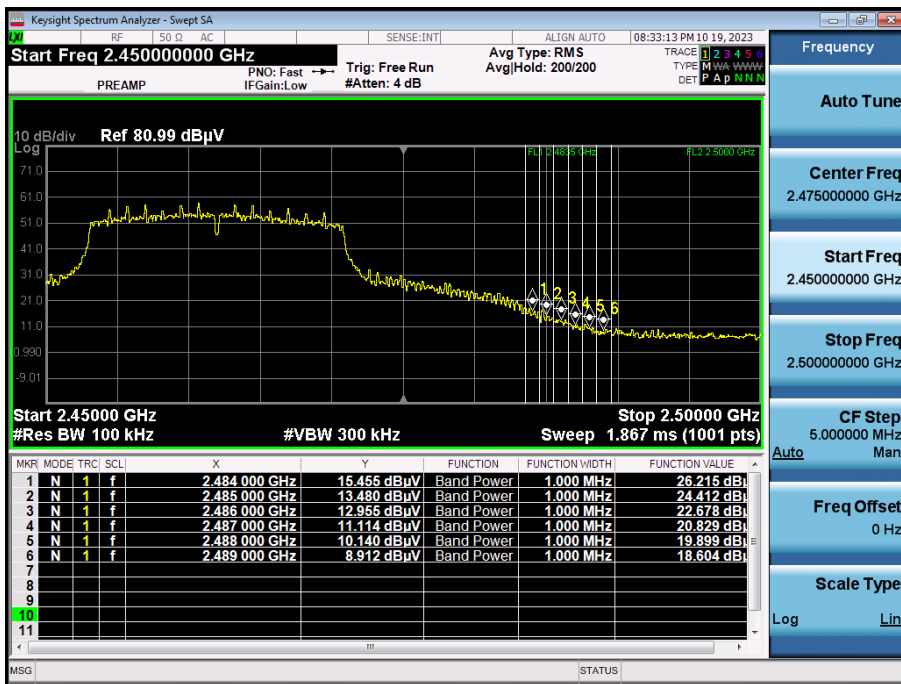



Test

2 / 2

**Final Result CAV**

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1523	23.69	55.88	32.19	9.000	L1	9.6
0.1725	22.96	54.84	31.88	9.000	L1	9.6
0.1973	20.70	53.73	33.02	9.000	L1	9.6
0.3660	26.35	48.59	22.25	9.000	L1	9.6
0.3930	34.68	48.00	13.32	9.000	L1	9.6
0.4088	33.19	47.67	14.48	9.000	L1	9.6
1.0783	23.05	46.00	22.95	9.000	L1	9.7
1.1008	22.89	46.00	23.11	9.000	L1	9.7
1.1255	22.28	46.00	23.72	9.000	L1	9.7
1.4518	22.46	46.00	23.54	9.000	L1	9.7
1.5508	22.57	46.00	23.43	9.000	L1	9.7
1.5755	21.71	46.00	24.29	9.000	L1	9.7
5.1755	16.55	50.00	33.45	9.000	L1	9.8
5.1823	16.53	50.00	33.47	9.000	L1	9.8
5.2250	16.74	50.00	33.26	9.000	L1	9.8
5.2520	16.84	50.00	33.16	9.000	L1	9.8
5.2745	16.90	50.00	33.10	9.000	L1	9.8
5.2790	16.62	50.00	33.38	9.000	L1	9.8

2023-11-02

오전 9:24:13

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/04/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/02/2024	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

### **Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	08/03/2025	Biennial
Switch	S46	KEITHLEY	1088024	N/A	N/A
Controller (Antenna Mast & Turn Table)	CO3000	Innco systems	CO3000/1251/48920320/P	N/A	N/A
Antenna Position Tower	MA4640/800-XP-ET	Innco systems	S4AM	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02296	05/18/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/12/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/12/2024	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/09/2024	Annual
RF Switching System	FBSR-03A (3G HPF+LNA)	T&M SYSTEM	S3L1	12/05/2023	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	12/05/2023	Annual
RF Switching System	FBSR-03A (7G HPF+LNA)	T&M SYSTEM	S3L3	12/05/2023	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	12/05/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
Spectrum Analyzer	FSW	Rohde & Schwarz	101736	05/18/2024	Annual
Spectrum Analyzer	FSP40	Rohde & Schwarz	100843	10/30/2024	Annual
Spectrum Analyzer	FSVA40 (10 Hz ~ 40 GHz)	Rohde & Schwarz	101502	03/17/2024	Annual

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Turn Table	N/A	Ets	N/A	N/A	N/A
Turn Table	DS2000-S	Innco systems	N/A	N/A	N/A
RF Switching System	FBSR-04C (3G HPF+LNA)	TNM system	S4L1	08/18/2024	Annual
RF Switching System	FBSR-04C (10 dB ATT+LNA)	TNM system	S4L2	08/18/2024	Annual
RF Switching System	FBSR-04C (3 dB ATT+LNA)	TNM system	S4L3	08/18/2024	Annual
RF Switching System	FBSR-04C (LNA)	TNM system	S4L4	08/18/2024	Annual
RF Switching System	FBSR-04C (7G HPF+LNA)	TNM system	S4L5	08/18/2024	Annual
RF Switching System	FBSR-04C (Thru)	TNM system	S4L6	08/18/2024	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2311-FC020-P