



## Unlicensed Band Antenna Gain

Model: SM-A155M/DSN

FCC ID: A3LSMA155M

### 1. Antenna Gain

- BT/WLAN antenna type: (FPC)

SUB2 2.4G_ANT, 5G_ANT	1	2	3	1	2	3
Frequency(MHz)	2400	2440	2480	5150	5500	5825
Efficiency(dB)	-7.9	-7.4	-8.4	-9.9	-8.7	-9.4
Efficiency(%)	16.2	18.2	14.5	10.2	13.6	11.5
Peak Gain(dBi)	-6.2	-6.4	-6.0	-7.4	-7.7	-7.0

### 2. Antenna Measurement information

Measurement: KYOCERA AVX Ant Lab

Equipment: KSS Chamber, E5071B Network Analyzer

\*KSS Chamber

The Test Systems is the ideal choice for developers of wireless devices and components as well as operators wanting to verify their suppliers' wireless devices. Over-The-Air (OTA) measurements reflect the true performance of the device and ensure that the tested product performs as intended once released to the market. The patented design creates a rich and isotropic multipath environment inside the chamber allowing for fast, easy and realistic performance measurements on SISO as well as MIMO devices like LTE and WLAN. The RTS is capable of performing passive measurements like antenna efficiency, diversity and MIMO gain as well as active measurements like TRP, TIS and Throughput (TPUT).

#### \* Test Equipment list

Description	Manufacturer	Model	S/N	Cal Due
Network Analyzer	Agilent	E5071B	MY42403625	2023-06-05

Test dates: Sep 20, 2023

Names of test personnel : Ik-Hyun Cho, Signature:

## Return Loss & VSWR Test

The VSWR measurement of antennas assembled into a fully operating SM-A155M/DSN Phone is measured on the Network Analyzer. The Phone is set up with a 50 Ohm coaxial cable connected to the 50 Ohm point. Calibration is done at the end of the 50 Ohm coaxial cable connection. The other end of the 50 Ohm coaxial cable is connected to a network analyzer. The phone is positioned on a non-conductive table for free space measurements.



**Figure 1: Testing with network analyzer**

Antenna Lab has a system that can measure VSWR using KSS chamber and E5071B network analyzer. In order to measure the VSWR of each antenna, the lab connects the coaxial cable to the point in contact with the antenna on the Sub board. The VSWR is measured through the coaxial cable connected in the set. At this time, SM-A155M/DSN is assembled in the same state as the user environment.

## Radiation Pattern Test

Antennas tested for Gain and Efficiency must be assembled into the enclosure and tested in the fully assembled and operating SM-A155M/DSN Phone. The antenna is tested in free space in the anechoic chamber in the H, E1 and, E2 planes. The radiation patterns are measured at the center of transmit and receive bands.

**Photo #1**


**Note: Please refer to photos uploaded in separate antenna test set up photos exhibit.**

**Figure 2 Geometry for SM-A155M/DSN**

## Test Method (Manufacturing)

All measurements are done with SM-A155M/DSN fully assembled. Measure in consideration of the customer's usage environment. Use a fully shielded chamber environment to prevent any noise-induced errors. Typically, the electrical properties of the antenna are measured using a jig that can hold the set.

## Radiation plots for max gain plane (3D)

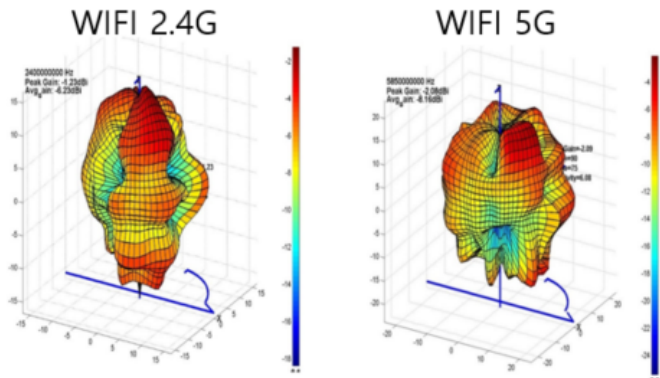

## Detail antenna description

### Photo #2

Note: Please refer to photos uploaded in separate antenna test set up photos exhibit.