

**MEASUREMENT REPORT****FCC PART 15.407 / ISED RSS-247 802.11a/n/ac (OFDM)****Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

09/08-10/30/2023

**Test Report Issue Date:**

10/31/2023

**Test Site/Location:**

Element lab., Columbia, MD, USA

**Test Report Serial No.:**

1M2309070100-12.A3L

**FCC ID:****A3LSMA156U****IC:****649E-SMA156W****APPLICANT:****Samsung Electronics Co., Ltd.****Application Type:**

Certification

**Model:**

SM-A156U

**HVIN:**

SM-A156W

**Additional Model(s):**

SM-A156U1/DS, SM-S156V

**EUT Type:**

Portable Handset

**Frequency Range:**

5180 – 5825MHz

**Modulation Type:**

OFDM

**FCC Equipment Class:**

Unlicensed National Information Infrastructure TX (NII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**ISED Specification:**

RSS-247 Issue 3

**Test Procedure(s):**

ANSI C63.10-2013, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



**RJ Ortanez**  
Executive Vice President



<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 1 of 71

## T A B L E O F C O N T E N T S

1.0	INTRODUCTION .....	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	7
2.4	Test Configuration.....	7
2.5	Software and Firmware .....	7
2.6	EMI Suppression Device(s) / Modifications.....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	AC Line Conducted Emissions .....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS .....	10
5.0	MEASUREMENT UNCERTAINTY .....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS .....	13
7.1	Summary.....	13
7.2	26dB Bandwidth Measurement.....	14
7.3	6dB Bandwidth Measurement .....	22
7.4	UNII Output Power Measurement.....	26
7.5	Maximum Power Spectral Density .....	29
7.6	Radiated Emission Measurements .....	40
7.7	Line-Conducted Test Data.....	65
8.0	CONCLUSION.....	71

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 2 of 71

## MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	Ant1	
			Max. Power [mW]	Max. Power [dBm]
20	1	5180 - 5240	99.31	19.97
	2A	5260 - 5320	97.95	19.91
	2C	5500 - 5720	99.54	19.98
	3	5745 - 5825	99.77	19.99
40	1	5190 - 5230	59.29	17.73
	2A	5270 - 5310	59.02	17.71
	2C	5510 - 5710	62.81	17.98
	3	5755 - 5795	62.95	17.99
80	1	5210	25.06	13.99
	2A	5290	24.77	13.94
	2C	5530 - 5690	24.60	13.91
	3	5775	24.15	13.83

### EUT Overview

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 3 of 71

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 4 of 71

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA156U**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

**Test Device Serial No.:** 0978M, 1381M, 1369M, 0989M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n WLAN, 802.11a/n/ac UNII (5GHz), Bluetooth (1x, EDR, LE), NFC

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825	177	5885

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755	167	5835
:	:	:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795	175	5875
				:	:				
				142	5710				

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775	167	5835
				:	:				
				122	5610				
				:	:				
				138	5690				

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 5 of 71

**Notes:**

- 5GHz NII operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		ANT1
		Duty Cycle [%]
5GHz	a	98.46
	n (HT20)	98.35
	ac (VHT20)	98.36
	n (HT40)	96.68
	ac (VHT40)	96.77
	ac (VHT80)	90.05

**Table 2-4. Measured Duty Cycles**

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO
5GHz	11a	✓
	11n	✓
	11ac	✓

**Table 2-5. Antenna / Technology Configuration**

✓ = Support ; ✗ = NOT Support  
**SISO** = Single Input Single Output

- The device supports the following data rates (shown in Mbps):

802.11s	MCS Index			Spatial Stream	OFDM (802.11n/802.11ac)				OFDM (802.11ac)	
	HT	VHT	HE		20MHz		40MHz		80MHz	
					0.8125 G	0.4125 G	0.8125 G	0.4125 G	0.8125 G	0.4125 G
6	0	0	0	1	6.5	7.2	18.5	15	28.8	32.5
9	1	1	1	1	18	14.4	27	30	58.5	65
12	2	2	2	1	18.5	21.7	40.5	45	87.8	97.5
18	3	3	3	1	26	28.8	54	60	117	130
24	4	4	4	1	38	48.8	81	90	175.5	195
36	5	5	5	1	52	57.8	108	120	284	260
48	6	6	6	1	78.5	85	121.5	135	288.8	292.5
54	7	7	7	1	65	72.2	135	150	282.5	325
		8	8	1	78	86.7	162	180	351	390
		9	9	1	N/A	N/A	180	200	390	489.8
			10	1						
			11	1						
6	8	0	0	2	18	14.4	27	30	58.5	65
9	9	1	1	2	26	28.8	54	60	117	130
12	10	2	2	2	38	48.8	81	90	175.5	195
18	11	3	3	2	52	57.8	108	120	284	260
24	12	4	4	2	78	86.7	162	180	351	390
36	18	5	5	2	104	115.6	216	240	468	520
48	14	6	6	2	117	130	243	270	526.5	585
54	15	7	7	2	130	144.4	270	300	585	690
		8	8	2	156	173.8	324	360	702	780
		9	9	2	N/A	N/A	360	400	780	868.7
			10	2						
			11	2						

**Table 2-6. Supported Data Rates**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 6 of 71



This device supports simultaneous transmission operation, which allows channels to operate in the 2.4GHz and 5GHz bands simultaneously on the antenna. The following tables show the worst-case configurations determined during testing.

**Configuration 1:** ANT transmitting in Bluetooth 2.4GHz mode and 5GHz mode.

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	1
Channel	39	120
Operating Frequency (MHz)	2441	5600
Data Rate (Mbps)	1	6
Mode	Bluetooth	802.11a

**Table 2-7. Config-1 (2.4GHz & 5GHz)**

### 2.3 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna (dBi)
5.20	-3.4
5.30	-2.7
5.50	-1.7
5.80	-1.9

**Table 2-8. Antenna Peak Gain**

### 2.4 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 7.6 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

### 2.5 Software and Firmware

The test was conducted with software/firmware version A156USQU0AWIB installed on the EUT.

### 2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 7 of 71

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

**Deviation from measurement procedure.....None**

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 8 of 71



### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 9 of 71

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 10 of 71

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 11 of 71

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	AP2-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-002
-	ETS-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-001
-	ETS-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-002
-	WL25-1	Conducted Cable Set (25GHz)	1/12/2023	Annual	1/12/2024	WL25-1
-	WL40-1	Conducted Cable Set (40GHz)	1/12/2023	Annual	1/12/2024	WL40-1
Com-Power	AL-130R	9kHz - 30MHz Loop Antenna	1/18/2022	Biennial	1/18/2024	121085
EMCO	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	7/5/2023	Biennial	7/5/2025	9203-2178
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	8/7/2023	Annual	8/8/2024	MY54490576
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	3/15/2023	Annual	3/15/2024	MY52350166
Keysight Technologies	N9038A	MXE EMI Receiver	8/30/2023	Annual	8/30/2024	MY51210133
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/11/2023	Annual	1/11/2024	NMLC-2
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Test Antenna	9/28/2022	Biennial	9/28/2024	101058
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Rohde & Schwarz	ESW44	EMI Test Receiver (2Hz-44GHz)	3/1/2023	Annual	3/1/2024	101716
Rohde & Schwarz	VULB9163	Bi-Log Antenna	2/21/2023	Biennial	2/21/2025	00301
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	8/30/2022	Biennial	8/30/2024	A051107

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 12 of 71

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMA156U  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz and 5850 – 5895MHz)		PASS	Section 7.3
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b)(1), (b)(2), (b)(3), (b)(4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b)(1), (b)(4), (b)(5), (b)(6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.5.0.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 13 of 71

## 7.2 26dB Bandwidth Measurement

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

***The 26dB bandwidth is used to determine the conducted power limits.***

### Test Procedure Used

ANSI C63.10-2013 – Section 12.4

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 14 of 71




## 26dB Bandwidth Measurements


	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]
Band 1	5180	36	a	26.53
	5200	40	a	26.77
	5240	48	a	26.78
	5180	36	n	30.08
	5200	40	n	28.99
	5240	48	n	29.25
	5190	38	n	40.91
	5230	46	n	41.02
Band 2A	5210	42	ac	81.76
	5260	52	a	26.72
	5280	56	a	25.72
	5320	64	a	24.72
	5260	52	n	26.91
	5280	56	n	28.51
	5320	64	n	26.43
	5270	54	n	40.98
Band 2C	5310	62	n	40.98
	5290	58	ac	81.61
	5500	100	a	21.34
	5600	120	a	20.32
	5720	144	a	20.32
	5500	100	n	21.03
	5600	120	n	24.96
	5720	144	n	23.84
	5510	102	n	41.11
	5590	118	n	41.00
	5710	142	n	40.82
	5530	106	ac	81.47
5610	122	ac	81.84	
5690	138	ac	82.05	

Table 7-2. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 15 of 71

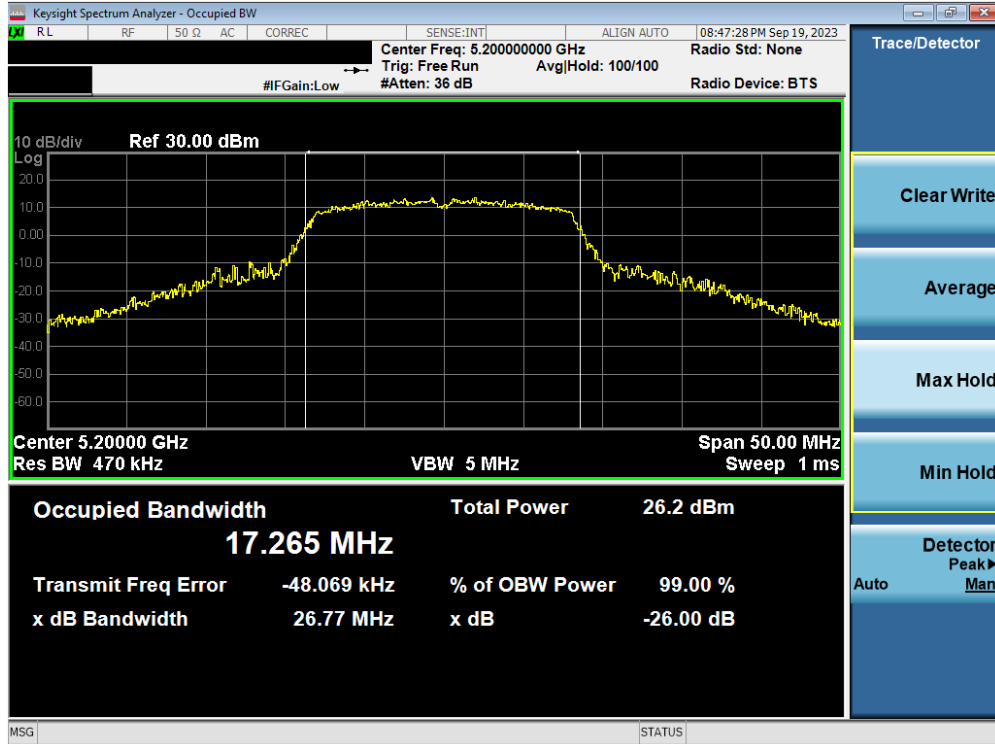


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

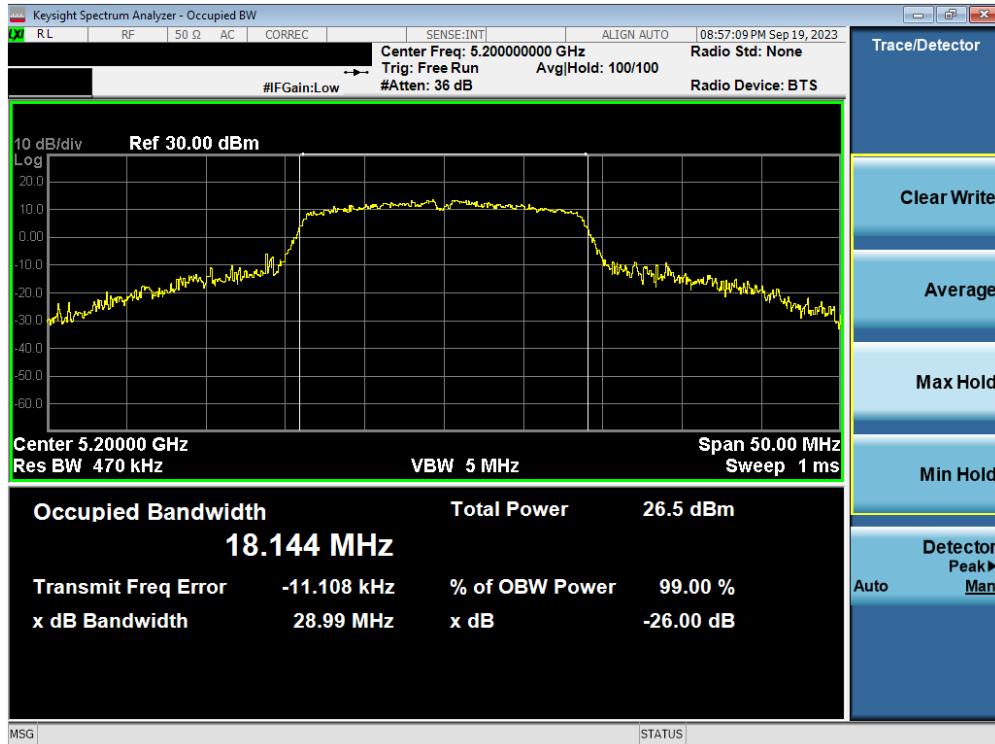


Plot 7-2. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 16 of 71



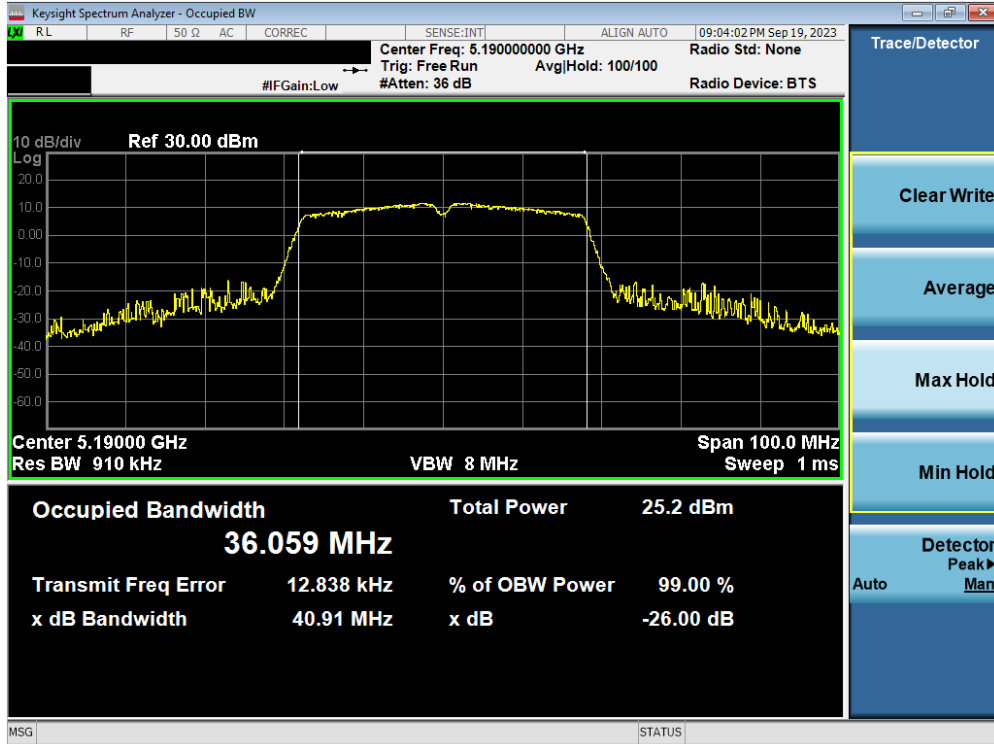


Plot 7-3. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

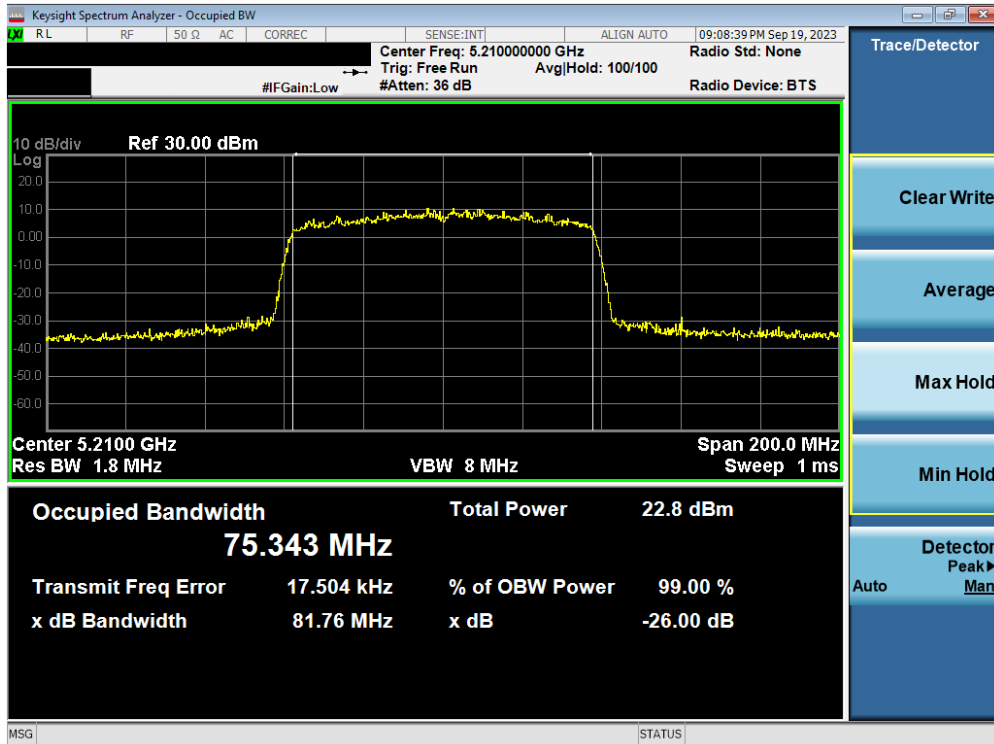


Plot 7-4. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 17 of 71

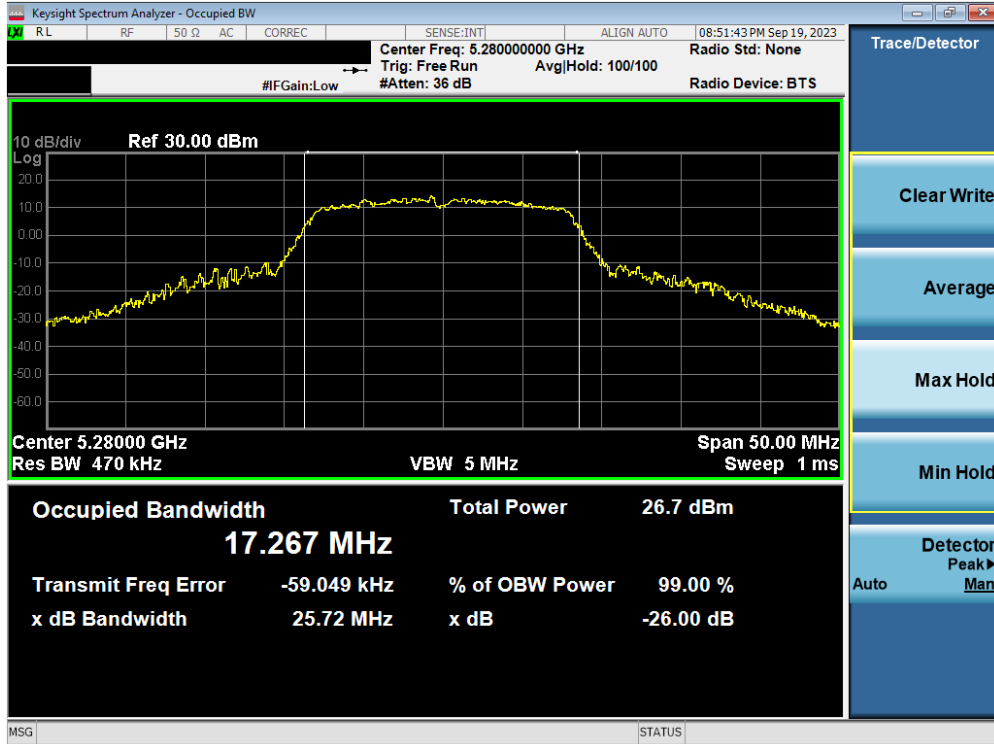


Plot 7-5. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

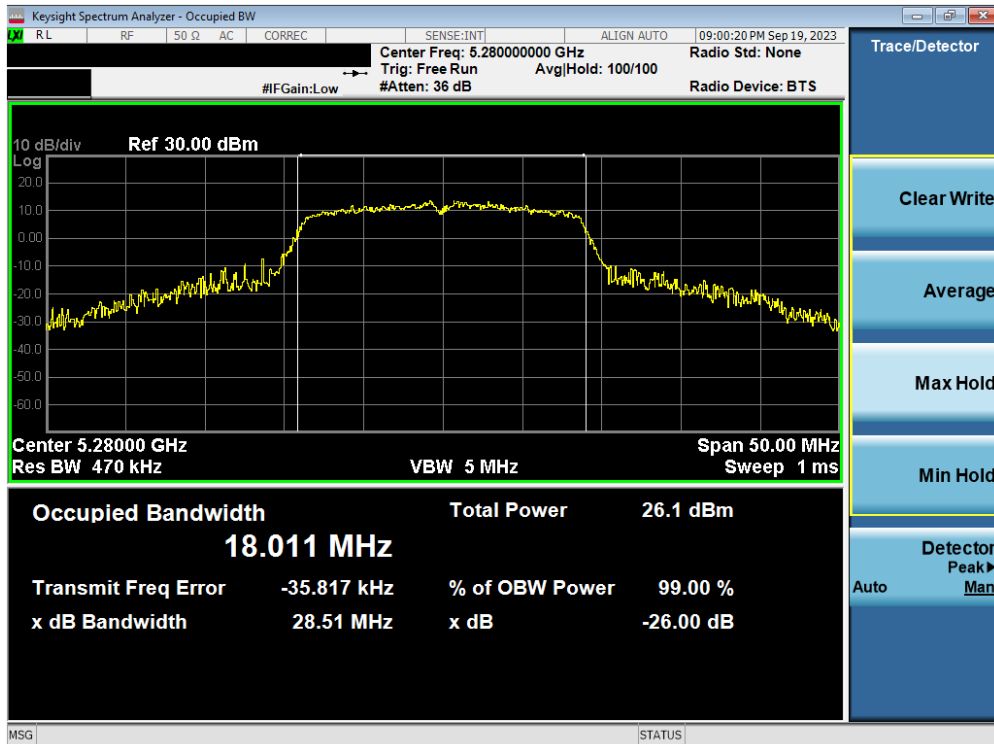


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 18 of 71

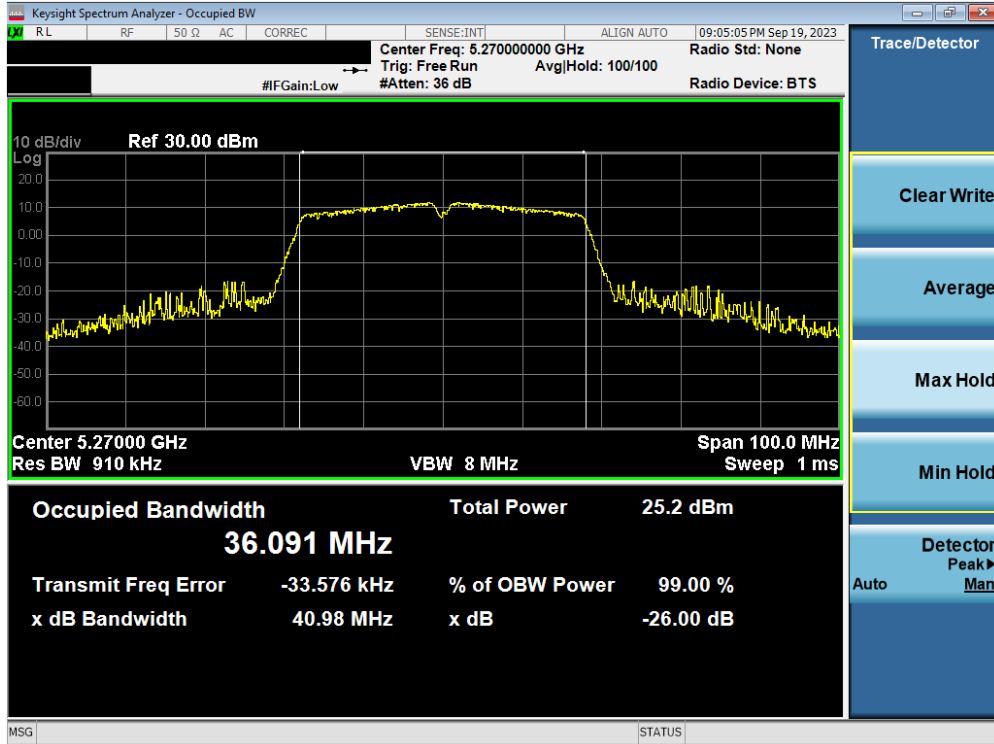


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

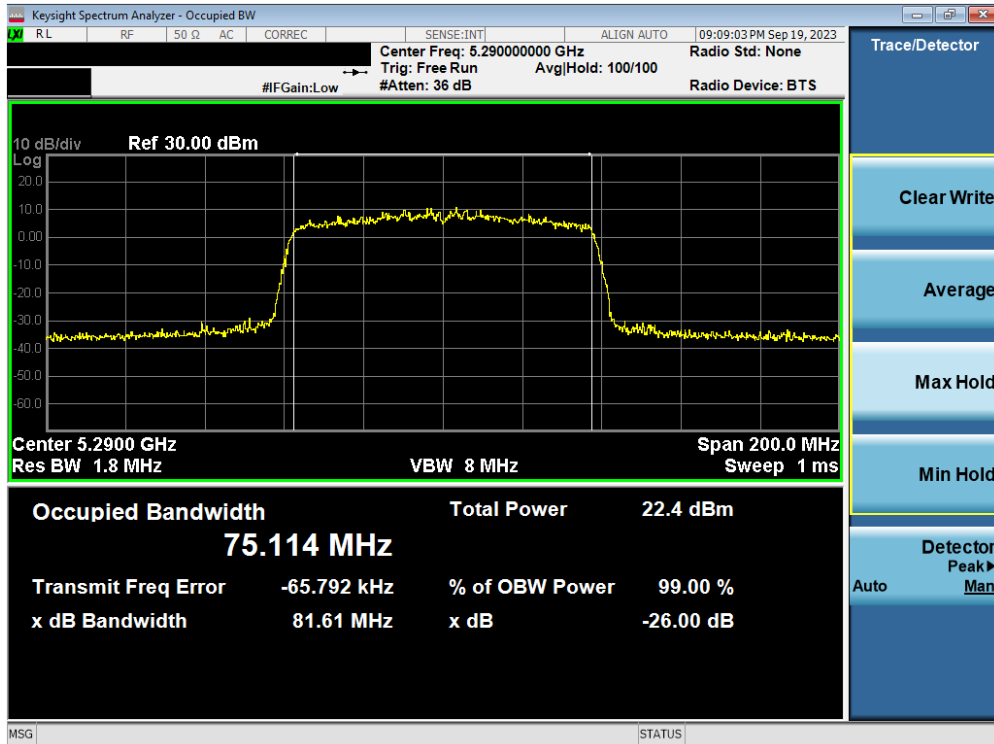


Plot 7-8. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 19 of 71

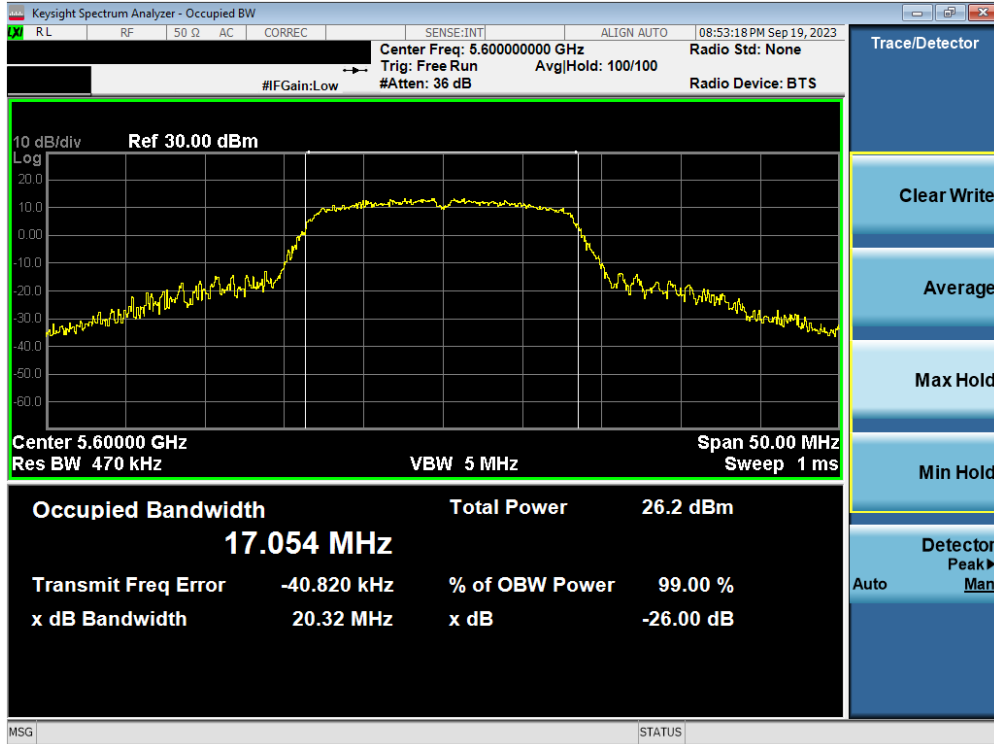


Plot 7-9. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

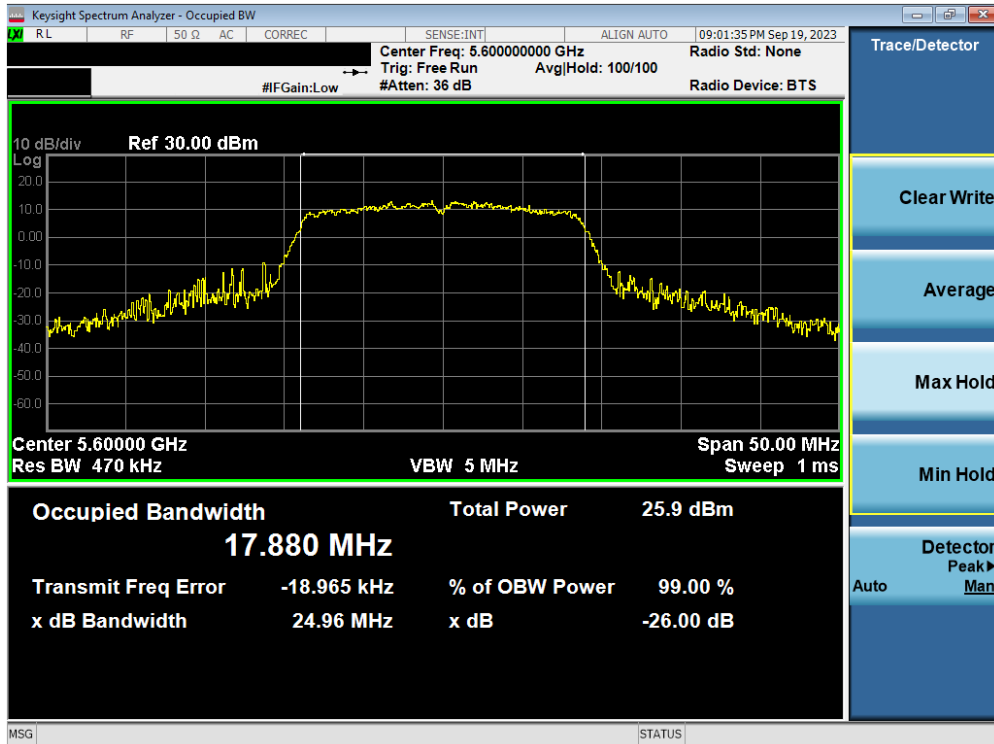


Plot 7-10. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 20 of 71

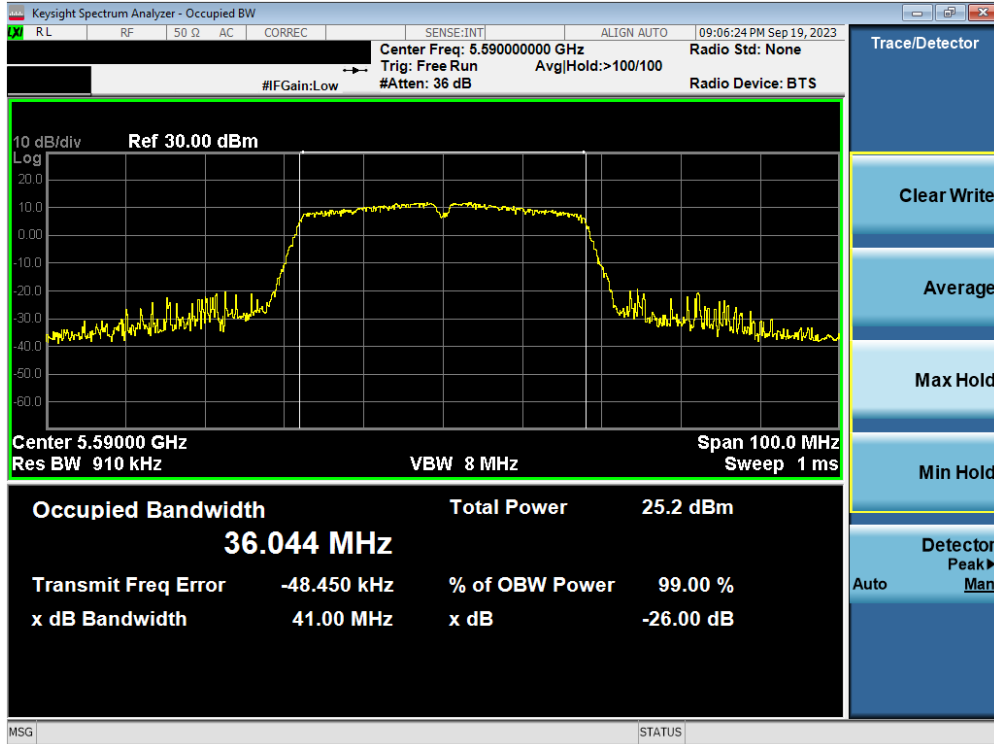

Plot 7-11. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

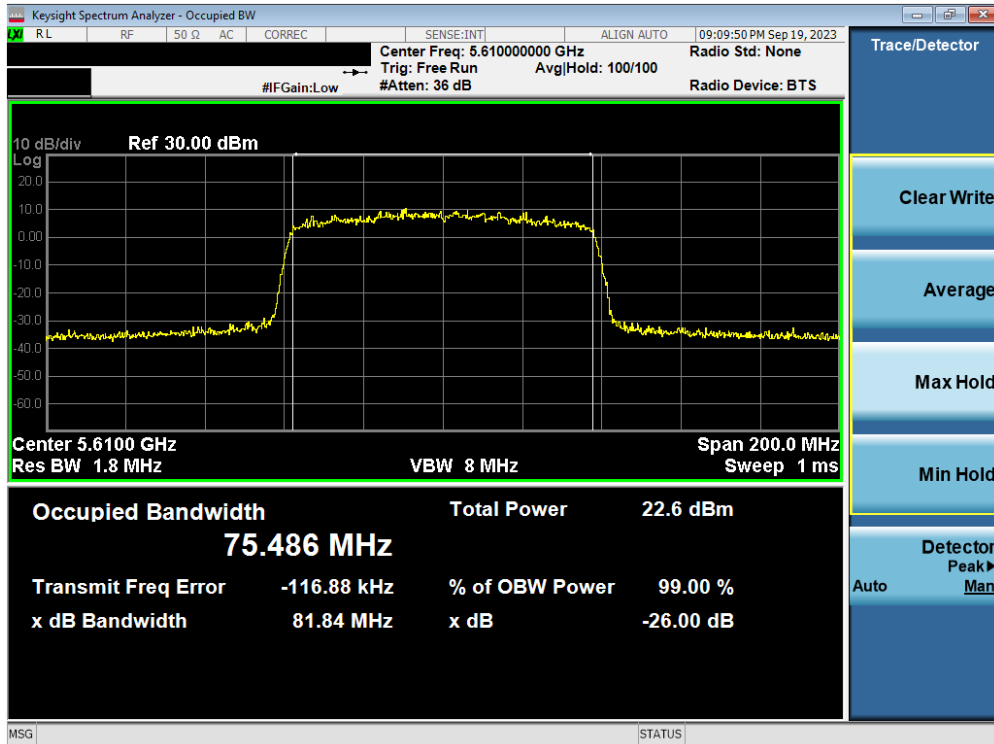

Plot 7-12. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 21 of 71

### 7.3 6dB Bandwidth Measurement

#### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band and 5.850 – 5.895GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.***

#### Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

#### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

None.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 22 of 71

## 6dB Bandwidth Measurements


	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	a	15.12
	5785	157	a	16.36
	5825	165	a	15.46
	5745	149	n	14.54
	5785	157	n	14.75
	5825	165	n	13.22
	5755	151	n	33.88
	5795	159	n	35.11
	5775	155	ac	75.28

**Table 7-3. Band 3 Conducted 6dB Bandwidth Measurements**




**Plot 7-13. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)**

FCC ID: A3LSMA156U IC: 649E-SMA156W		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 23 of 71	

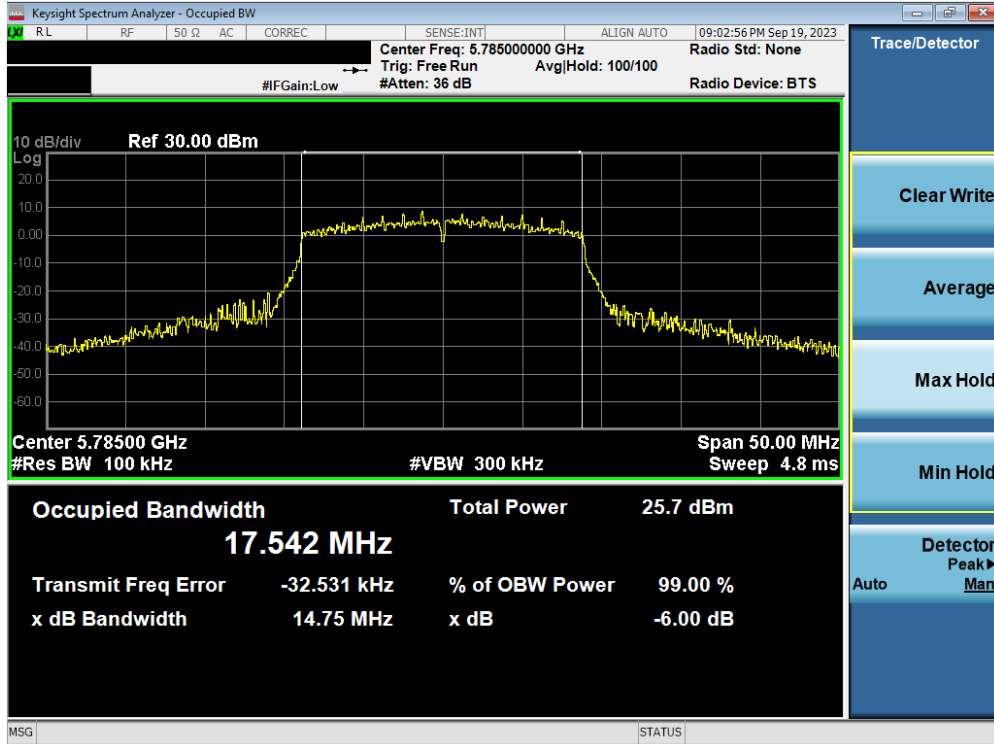


Plot 7-14. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

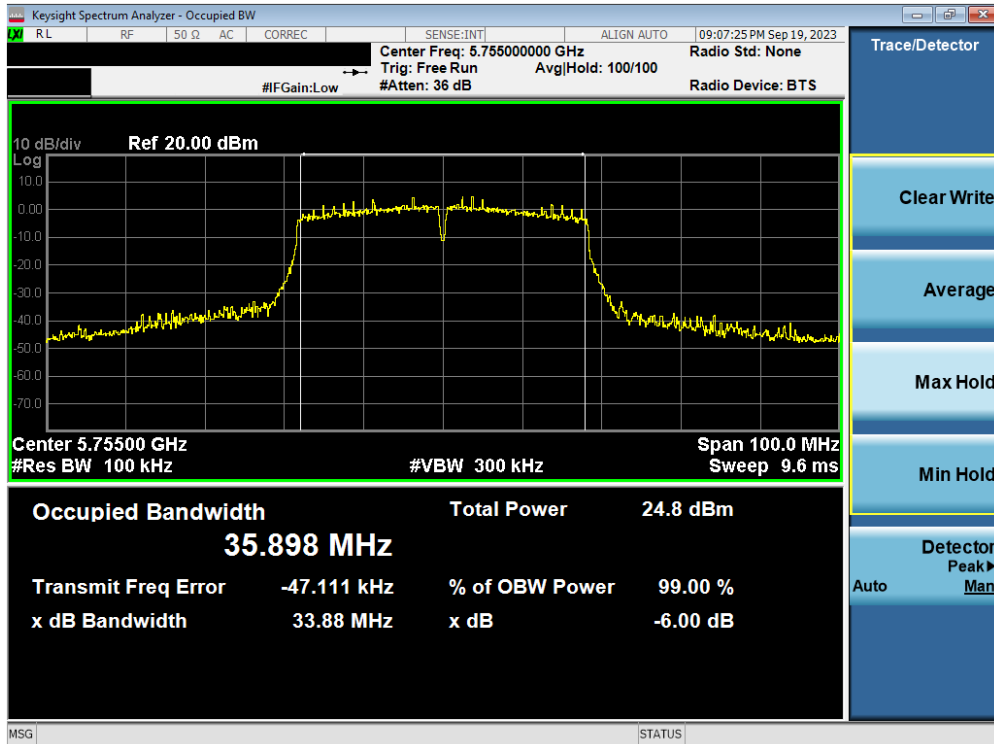

Plot 7-15. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 24 of 71



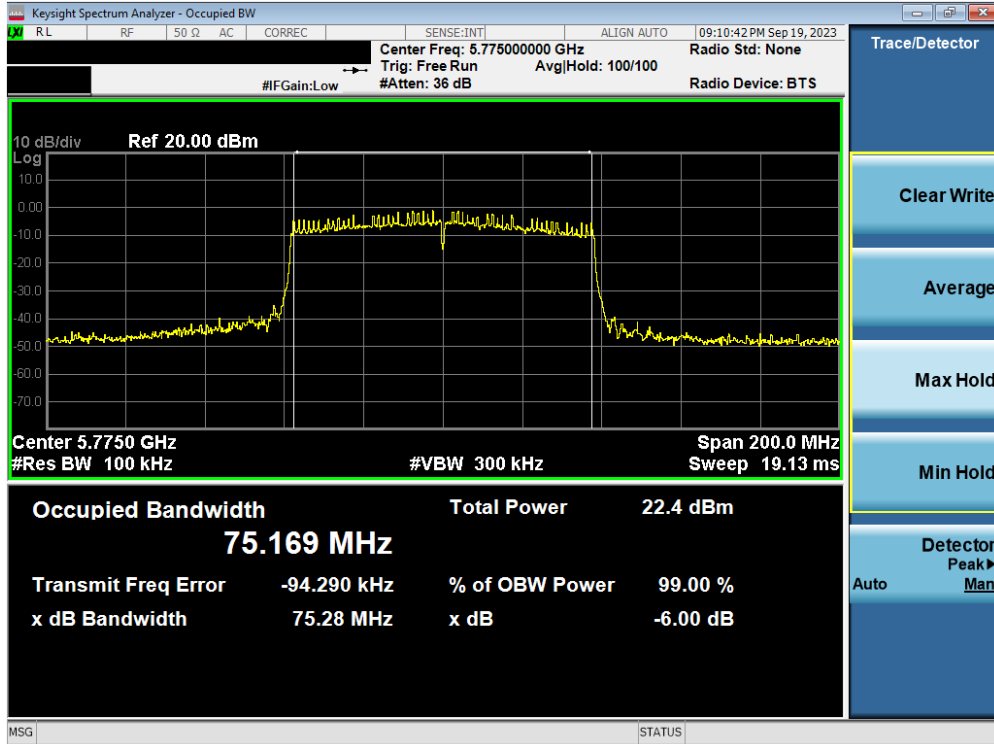

Plot 7-16. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 25 of 71

## 7.4 UNII Output Power Measurement

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

*The output power limits are as specified in the tables below.*

UNII Band	Frequency Range	Maximum Conducted Power Limit		Maximum e.i.r.p	
		FCC	ISED	FCC	ISED
UNII 1	5.15 – 5.25GHz	23.98dBm (250mW)	N/A	N/A	The lesser of 23.01dBm (200mW) <b>or</b> 10dBm + 10log <sub>10</sub> B
UNII 2A	5.25 – 5.35GHz	The lesser of 23.98dBm (250mW) <b>or</b> 11dBm + 10log <sub>10</sub> B		N/A	The lesser of 30dBm (1W) <b>or</b> 17dBm + 10log <sub>10</sub> B
UNII 2C	5.47 – 5.725GHz				
UNII 3	5.725 – 5.850GHz	30dBm (1W)		N/A	N/A

### Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 26 of 71

## Maximum Conducted Output Power Measurements

	5GHz WIFI (20MHz 802.11a SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
IEEE 802.11a	UNII-1	5180	36	19.52	23.98	-4.46	-3.40	16.12	30.00	-13.88
		5200	40	19.73	23.98	-4.25	-3.40	16.33	30.00	-13.67
		5220	44	19.59	23.98	-4.39	-3.40	16.19	30.00	-13.81
		5240	48	19.90	23.98	-4.08	-3.40	16.50	30.00	-13.50
	UNII-2A	5260	52	19.73	23.98	-4.25	-2.70	17.03	30.00	-12.97
		5280	56	19.88	23.98	-4.10	-2.70	17.18	30.00	-12.82
		5300	60	19.91	23.98	-4.07	-2.70	17.21	30.00	-12.79
	UNII-2C	5320	64	19.65	23.98	-4.33	-2.70	16.95	30.00	-13.05
		5500	100	19.86	23.98	-4.12	-1.70	18.16	30.00	-11.84
		5600	120	19.73	23.98	-4.25	-1.70	18.03	30.00	-11.97
	UNII-3	5620	124	19.91	23.98	-4.07	-1.70	18.21	30.00	-11.79
		5720	144	19.78	23.98	-4.20	-1.70	18.08	30.00	-11.92
		5745	149	19.99	30.00	-10.01	-1.90	18.09	36.02	-17.93
	UNII-3	5785	157	19.79	30.00	-10.21	-1.90	17.89	36.02	-18.13
		5825	165	19.85	30.00	-10.15	-1.90	17.95	36.02	-18.07
IEEE 802.11n	5GHz WIFI (20MHz 802.11n SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
	UNII-1	5180	36	19.79	23.98	-4.19	-3.40	16.39	30.00	-13.61
		5200	40	19.97	23.98	-4.01	-3.40	16.57	30.00	-13.43
		5220	44	19.87	23.98	-4.11	-3.40	16.47	30.00	-13.53
		5240	48	19.82	23.98	-4.16	-3.40	16.42	30.00	-13.58
	UNII-2A	5260	52	19.61	23.98	-4.37	-2.70	16.91	30.00	-13.09
		5280	56	19.72	23.98	-4.26	-2.70	17.02	30.00	-12.98
		5300	60	19.73	23.98	-4.25	-2.70	17.03	30.00	-12.97
	UNII-2C	5320	64	19.15	23.98	-4.83	-2.70	16.45	30.00	-13.55
		5500	100	19.68	23.98	-4.30	-1.70	17.98	30.00	-12.02
		5600	120	19.52	23.98	-4.46	-1.70	17.82	30.00	-12.18
	UNII-3	5620	124	19.67	23.98	-4.31	-1.70	17.97	30.00	-12.03
		5720	144	19.98	23.98	-4.00	-1.70	18.28	30.00	-11.72
		5745	149	19.91	30.00	-10.09	-1.90	18.01	36.02	-18.01
UNII-3	5785	157	19.67	30.00	-10.33	-1.90	17.77	36.02	-18.25	
	5825	165	19.67	30.00	-10.33	-1.90	17.77	36.02	-18.25	
IEEE 802.11ac	5GHz WIFI (20MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
	UNII-1	5180	36	17.74	23.98	-6.24	-3.40	14.34	30.00	-15.66
		5200	40	17.88	23.98	-6.10	-3.40	14.48	30.00	-15.52
		5220	44	17.92	23.98	-6.06	-3.40	14.52	30.00	-15.48
		5240	48	17.72	23.98	-6.26	-3.40	14.32	30.00	-15.68
	UNII-2A	5260	52	17.54	23.98	-6.44	-2.70	14.84	30.00	-15.16
		5280	56	17.68	23.98	-6.30	-2.70	14.98	30.00	-15.02
		5300	60	17.72	23.98	-6.26	-2.70	15.02	30.00	-14.98
	UNII-2C	5320	64	17.75	23.98	-6.23	-2.70	15.05	30.00	-14.95
		5500	100	17.51	23.98	-6.47	-1.70	15.81	30.00	-14.19
		5600	120	17.81	23.98	-6.17	-1.70	16.11	30.00	-13.89
	UNII-3	5620	124	17.98	23.98	-6.00	-1.70	16.28	30.00	-13.72
		5720	144	17.84	23.98	-6.14	-1.70	16.14	30.00	-13.86
		5745	149	17.76	30.00	-12.24	-1.90	15.86	36.02	-20.16
UNII-3	5785	157	17.59	30.00	-12.41	-1.90	15.69	36.02	-20.33	
	5825	165	17.55	30.00	-12.45	-1.90	15.65	36.02	-20.37	

Table 7-4. 20MHz BW 802.11a/n/ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 27 of 71

IEEE 802.11n	5GHz WIFI (40MHz 802.11n SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	17.62	23.98	-6.36	-3.40	14.22	30.00	-15.78	
	5230	46	17.73	23.98	-6.25	-3.40	14.33	30.00	-15.67	
UNII-2A	5270	54	17.71	23.98	-6.27	-2.70	15.01	30.00	-14.99	
	5310	62	16.31	23.98	-7.67	-2.70	13.61	30.00	-16.39	
UNII-2C	5510	102	17.97	23.98	-6.01	-1.70	16.27	30.00	-13.73	
	5590	118	17.85	23.98	-6.13	-1.70	16.15	30.00	-13.85	
	5630	126	17.83	23.98	-6.15	-1.70	16.13	30.00	-13.87	
UNII-3	5710	142	17.98	23.98	-6.00	-1.70	16.28	30.00	-13.72	
	5755	151	17.99	30.00	-12.01	-1.90	16.09	30.00	-13.91	
	5795	159	17.49	30.00	-12.51	-1.90	15.59	30.00	-14.41	

IEEE 802.11ac	5GHz WIFI (40MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	17.51	23.98	-6.47	-3.40	14.11	30.00	-15.89	
	5230	46	17.69	23.98	-6.29	-3.40	14.29	30.00	-15.71	
UNII-2A	5270	54	17.69	23.98	-6.29	-2.70	14.99	30.00	-15.01	
	5310	62	16.14	23.98	-7.84	-2.70	13.44	30.00	-16.56	
UNII-2C	5510	102	17.54	23.98	-6.44	-1.70	15.84	30.00	-14.16	
	5590	118	17.44	23.98	-6.54	-1.70	15.74	30.00	-14.26	
	5630	126	17.73	23.98	-6.25	-1.70	16.03	30.00	-13.97	
UNII-3	5710	142	17.89	23.98	-6.09	-1.70	16.19	30.00	-13.81	
	5755	151	17.75	30.00	-12.25	-1.90	15.85	30.00	-14.15	
	5795	159	17.54	30.00	-12.46	-1.90	15.64	30.00	-14.36	

Table 7-5. 40MHz BW 802.11n/ac (UNII) Maximum Conducted Output Power

IEEE 802.11ac	5GHz WIFI (80MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	13.99	23.98	-9.99	-3.40	10.59	30.00	-19.41	
UNII-2A	5290	58	13.94	23.98	-10.04	-2.70	11.24	30.00	-18.76	
	5530	106	13.87	23.98	-10.11	-1.70	12.17	30.00	-17.83	
UNII-2C	5610	122	13.91	23.98	-10.07	-1.70	12.21	30.00	-17.79	
	5690	138	13.76	23.98	-10.22	-1.70	12.06	30.00	-17.94	
UNII-3	5775	155	13.83	30.00	-16.17	-1.90	11.93	30.00	-18.07	

Table 7-6. 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

**Sample e.i.r.p Calculation:**

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted power was calculated to be 19.79dBm with directional gain of -3.40 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$19.79 \text{ dBm} + -3.40 \text{ dBi} = 16.39 \text{ dBm}$$

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 28 of 71

## 7.5 Maximum Power Spectral Density

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density.

*The output power density limits are as specified in the tables below.*

UNII Band	Frequency Range	Maximum Power Spectral Density	
		FCC	ISED
UNII 1	5.15 – 5.25GHz	11dBm/MHz	10dBm/MHz e.i.r.p
UNII 2A	5.25 – 5.35GHz	11dBm/MHz	
UNII 2C	5.47 – 5.725GHz		
UNII 3	5.725 – 5.850GHz	30dBm/500kHz	

### Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.3 (Method SA-2)

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

FCC ID: A3LSMA156U IC: 649E-SMA156W		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset		Page 29 of 71



## Power Spectral Density Measurements


	Frequency [MHz]	Channel	802.11 MODE	Antenna 1 PSD [dBm]	DCCF [dB]	Max PSD [dBm]	Max PSD [dBm]	Margin [dB]
Band 1	5180	36	a	9.31	-	9.31	11.00	-1.70
	5200	40	a	9.64	-	9.64	11.00	-1.36
	5240	48	a	9.80	-	9.80	11.00	-1.20
	5180	36	n	9.44	-	9.44	11.00	-1.56
	5200	40	n	9.79	-	9.79	11.00	-1.22
	5240	48	n	9.85	-	9.85	11.00	-1.15
	5190	38	n	4.25	0.15	4.40	11.00	-6.60
	5230	46	n	4.75	0.15	4.90	11.00	-6.10
Band 2A	5210	42	ac	-2.90	0.46	-2.44	11.00	-13.44
	5260	52	a	9.63	-	9.63	11.00	-1.37
	5280	56	a	9.85	-	9.85	11.00	-1.15
	5320	64	a	9.24	-	9.24	11.00	-1.76
	5260	52	n	9.33	-	9.33	11.00	-1.67
	5280	56	n	9.33	-	9.33	11.00	-1.67
	5320	64	n	9.31	-	9.31	11.00	-1.69
	5270	54	n	4.33	0.15	4.48	11.00	-6.52
Band 2C	5310	62	n	4.69	0.15	4.84	11.00	-6.16
	5290	58	ac	-2.74	0.46	-2.28	11.00	-13.28
	5500	100	a	9.83	-	9.83	11.00	-1.17
	5600	120	a	9.44	-	9.44	11.00	-1.56
	5720	144	a	9.72	-	9.72	11.00	-1.28
	5500	100	n	9.35	-	9.35	11.00	-1.65
	5600	120	n	9.27	-	9.27	11.00	-1.73
	5720	144	n	9.60	-	9.60	11.00	-1.40
	5510	102	n	5.03	0.15	5.18	11.00	-5.82
	5590	118	n	4.48	0.15	4.63	11.00	-6.37
	5710	142	n	4.39	-	4.39	11.00	-6.61
Band 3	5530	106	ac	-2.63	0.46	-2.17	11.00	-13.17
	5610	122	ac	-3.04	0.46	-2.58	11.00	-13.58
	5690	138	ac	-2.65	0.46	-2.19	11.00	-13.19
	5745	149	a	7.12	-	7.12	30.00	-22.88
	5785	157	a	7.02	-	7.02	30.00	-22.98
	5825	165	a	6.99	-	6.99	30.00	-23.01
	5745	149	n	6.88	-	6.88	30.00	-23.12
	5785	157	n	6.55	-	6.55	30.00	-23.45
	5825	165	n	6.94	-	6.94	30.00	-23.06
5755	151	n	2.07	0.15	2.22	30.00	-27.78	
5795	159	n	1.55	0.15	1.70	30.00	-28.30	
5775	155	ac	-4.91	0.46	-4.45	30.00	-34.45	

**Table 7-7. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 30 of 71


	Frequency [MHz]	Channel	802.11 MODE	Antenna 1 PSD [dBm]	DCCF [dB]	Antenna Gain [dBi]	EIRP PSD [dBm]	Max PSD [dBm]	Margin [dB]
Band 1	5180	36	a	9.31	-	-3.4	5.91	10.00	-4.10
	5200	40	a	9.64	-	-3.4	6.24	10.00	-3.76
	5240	48	a	9.80	-	-3.4	6.40	10.00	-3.60
	5180	36	n	9.44	-	-3.4	6.04	10.00	-3.96
	5200	40	n	9.79	-	-3.4	6.39	10.00	-3.62
	5240	48	n	9.85	-	-3.4	6.45	10.00	-3.55
	5190	38	n	4.25	0.15	-3.4	1.00	10.00	-9.00
	5230	46	n	4.75	0.15	-3.4	1.50	10.00	-8.50
	5210	42	ac	-2.90	0.46	-3.4	-5.84	10.00	-15.84

Table 7-8. Bands 1 e.i.r.p Power Spectral Density Measurements

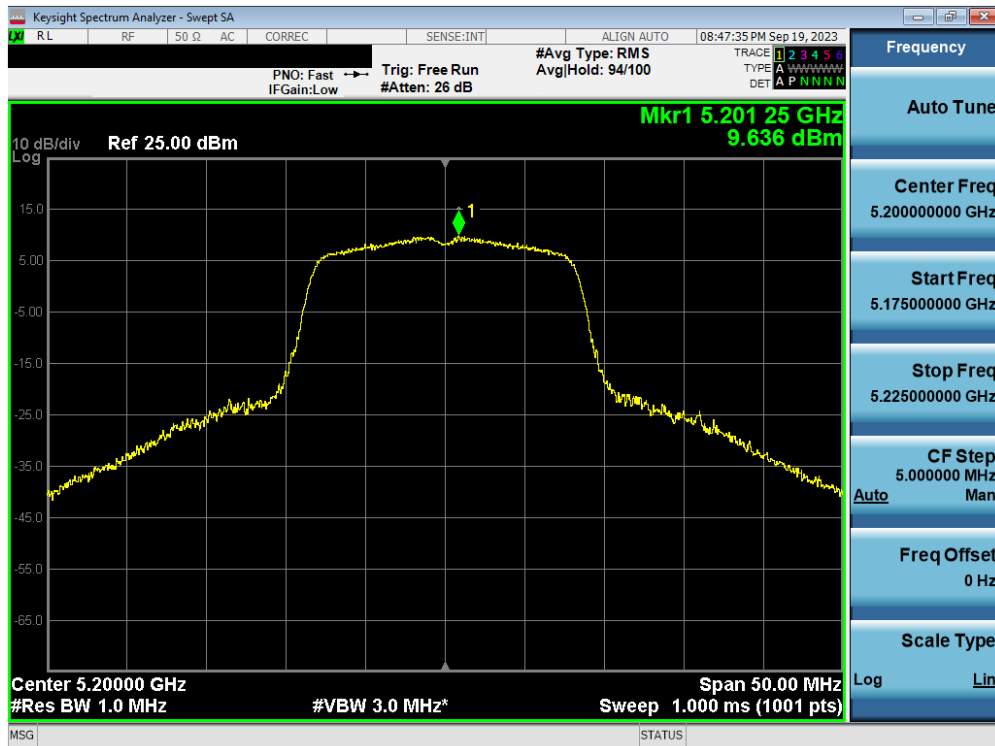


Plot 7-17. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 31 of 71

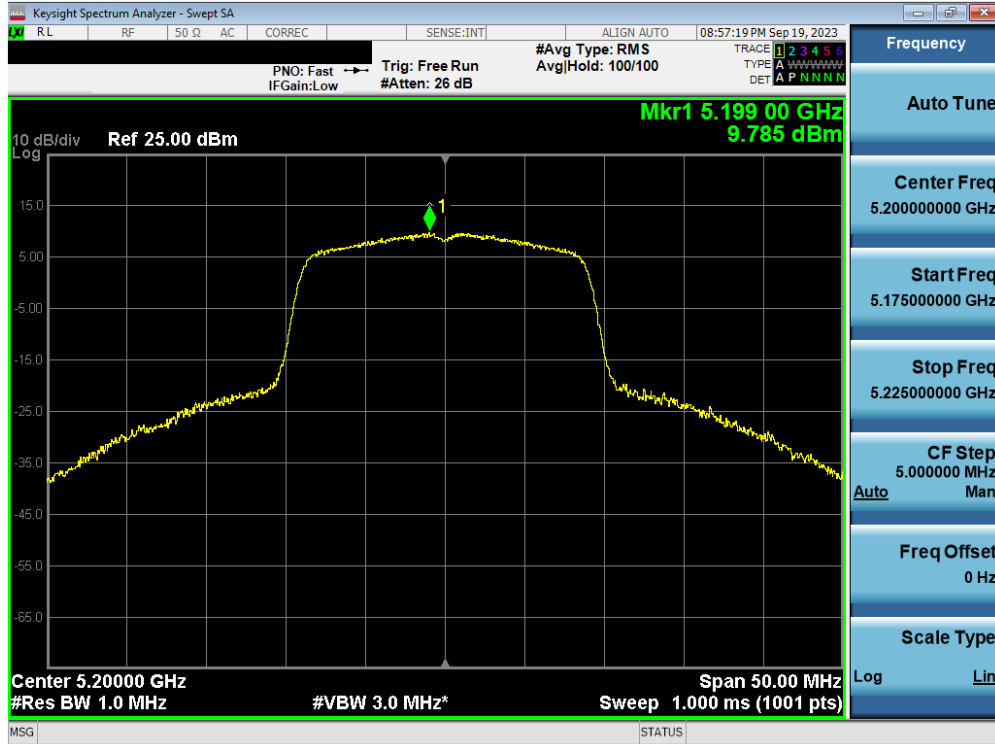

Plot 7-18. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

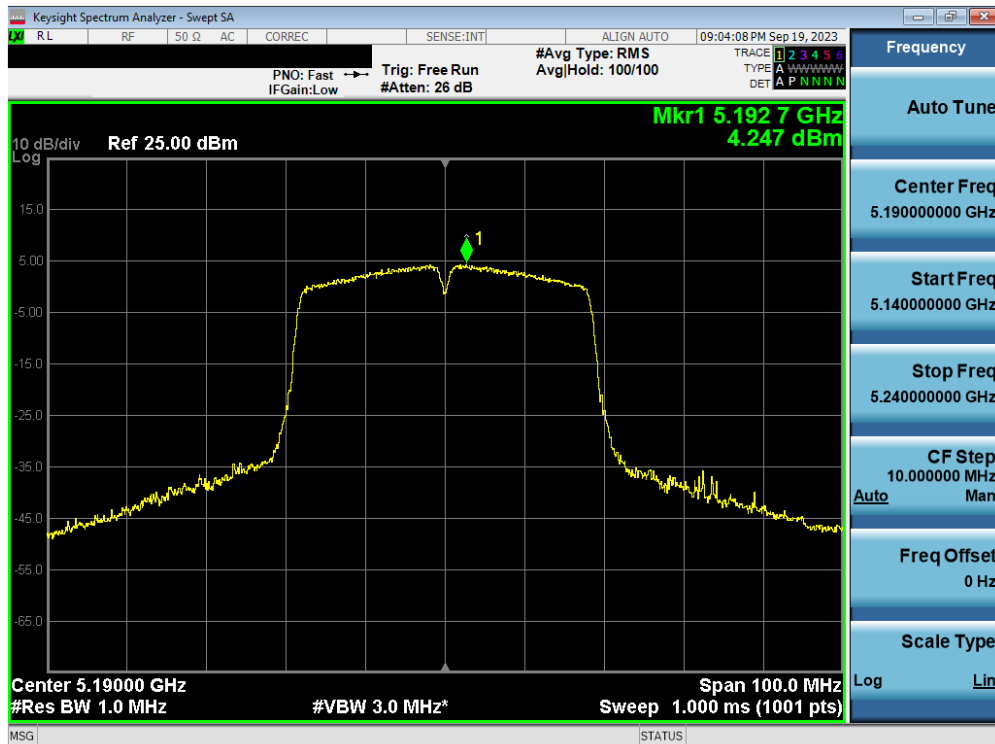


Plot 7-19. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 32 of 71






Plot 7-20. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

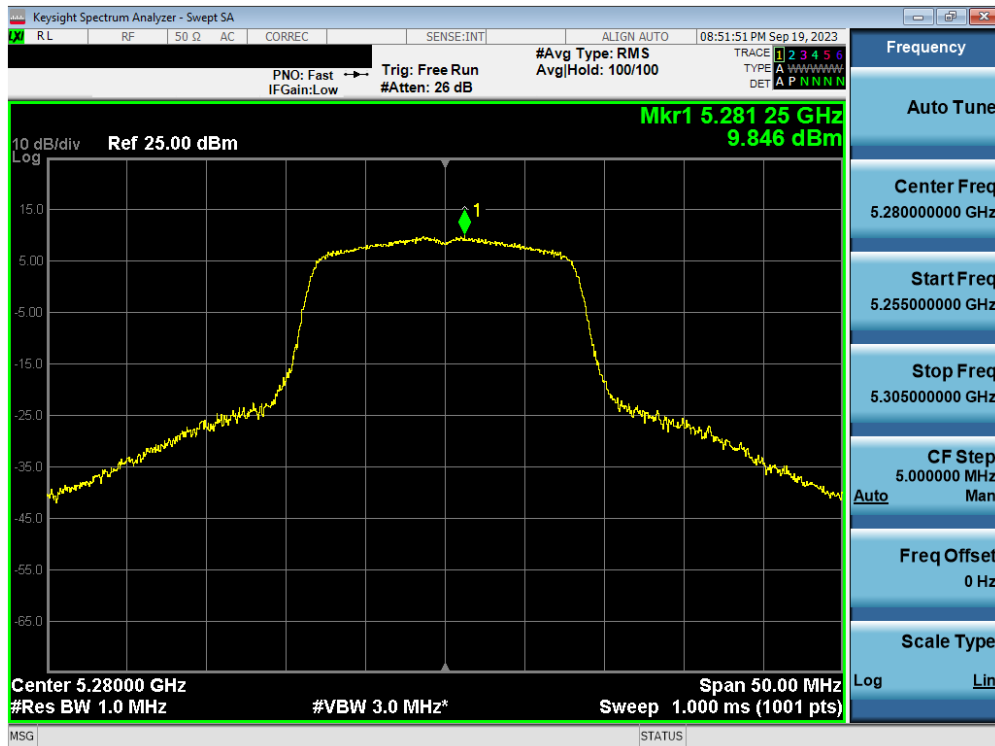


Plot 7-21. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 33 of 71

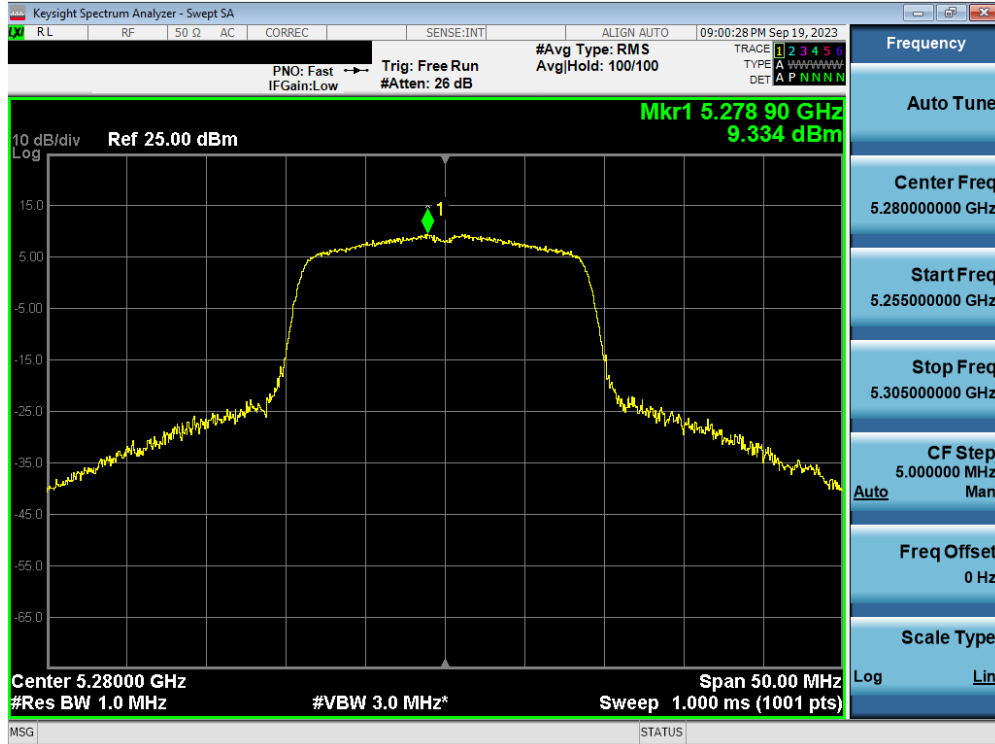

Plot 7-22. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

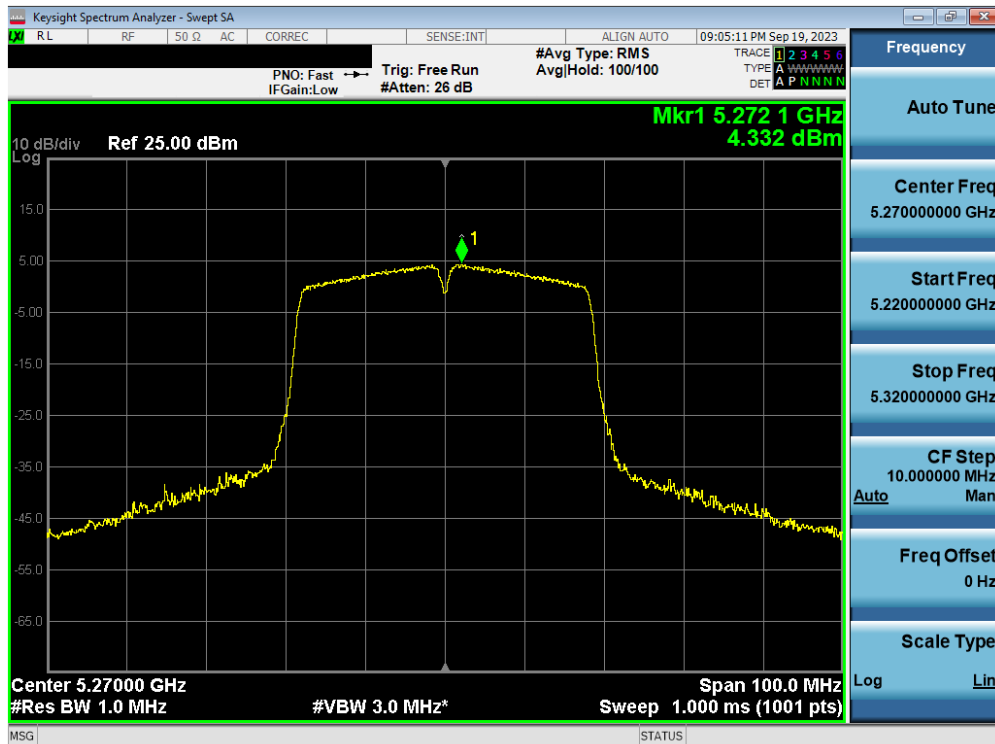


Plot 7-23. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMA156U IC: 649E-SMA156W		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 34 of 71	




Plot 7-24. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

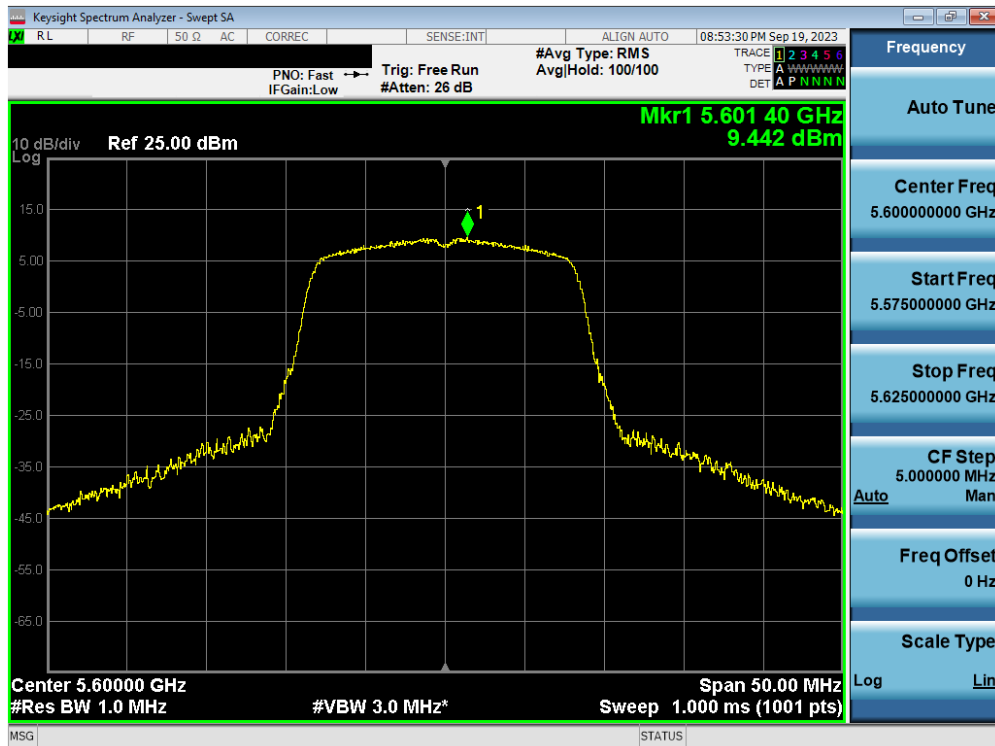


Plot 7-25. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 35 of 71

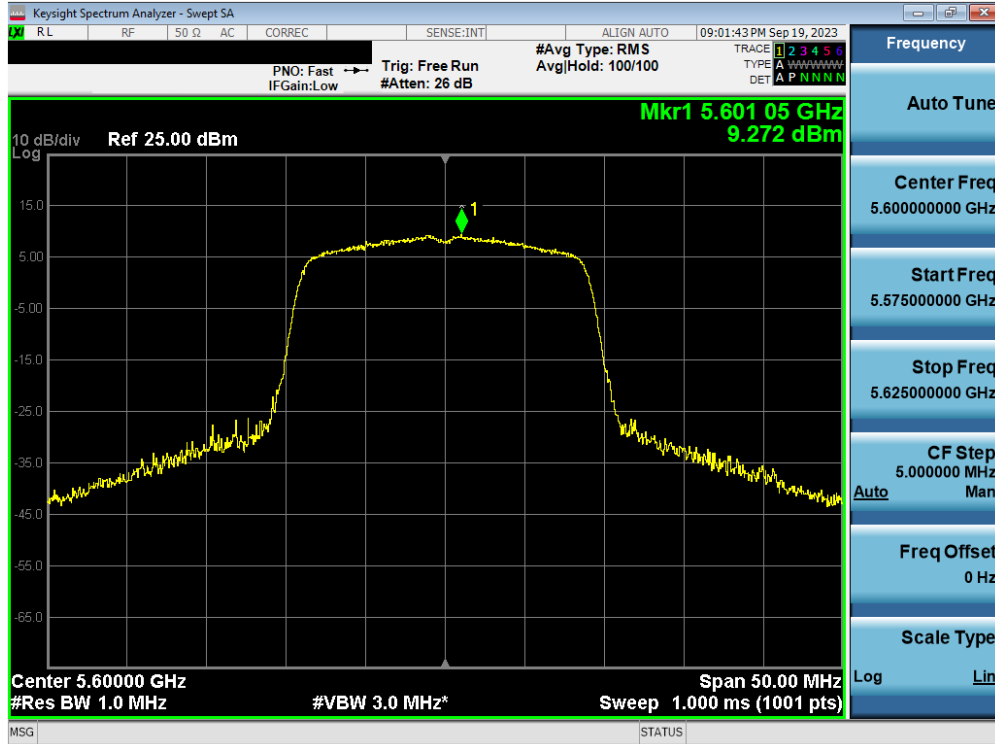

Plot 7-26. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

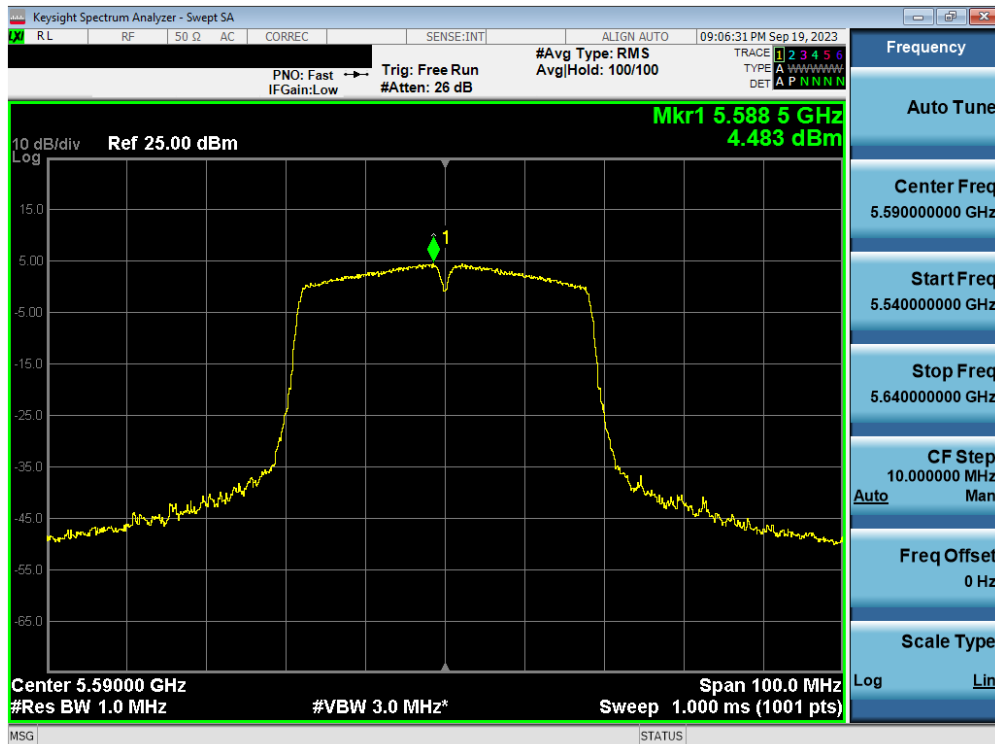


Plot 7-27. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 36 of 71




Plot 7-28. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

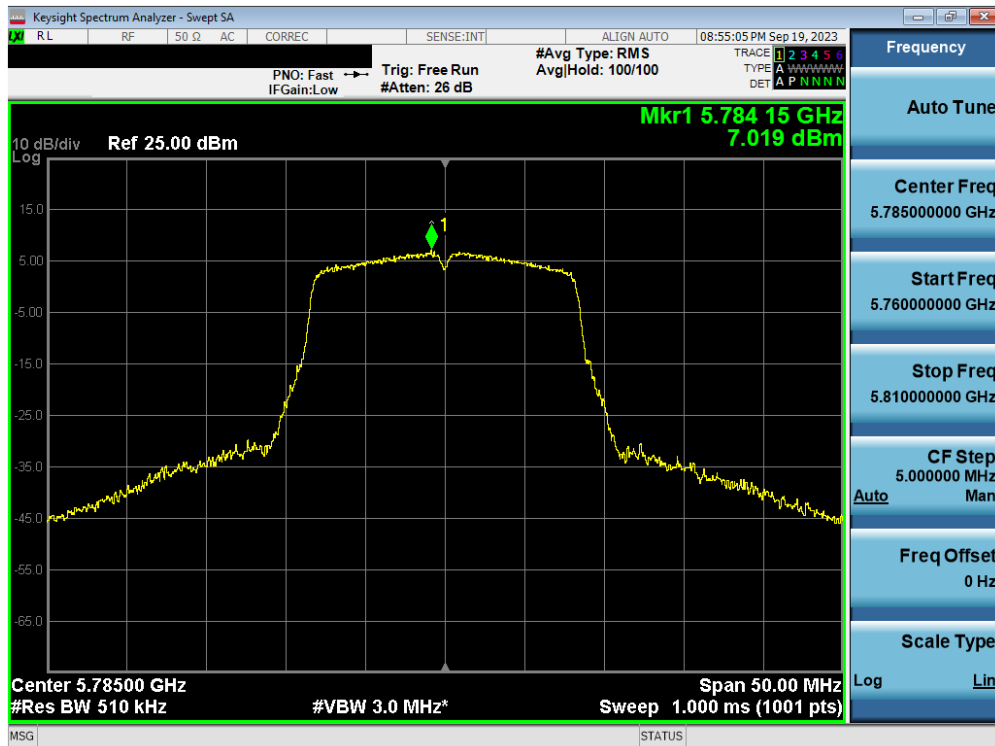


Plot 7-29. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 37 of 71

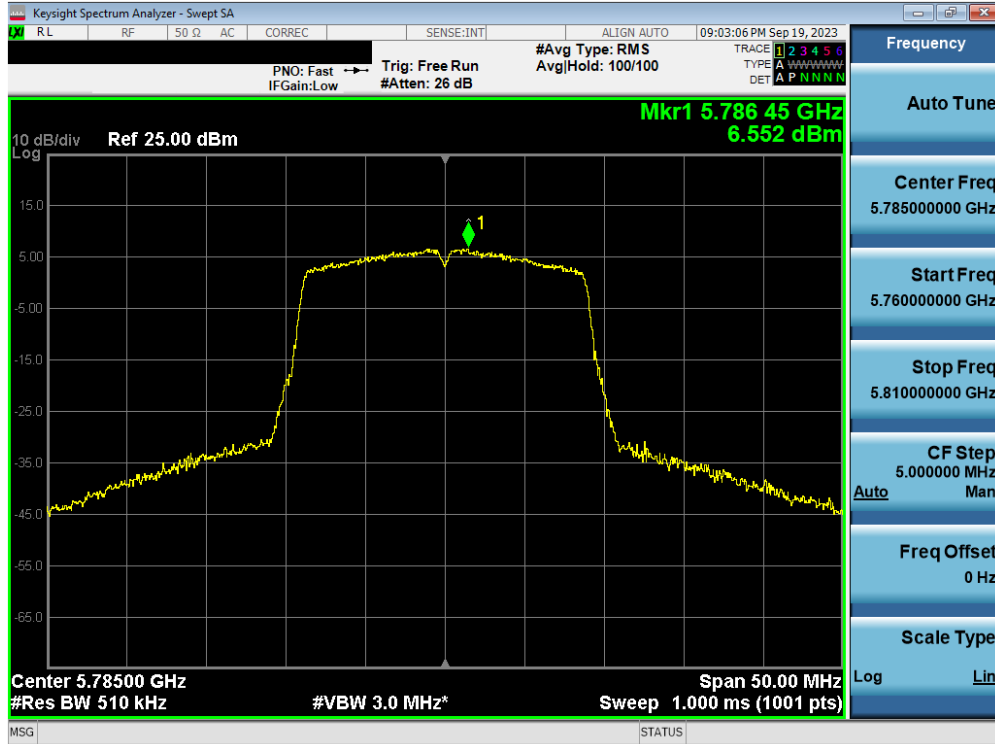


Plot 7-30. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

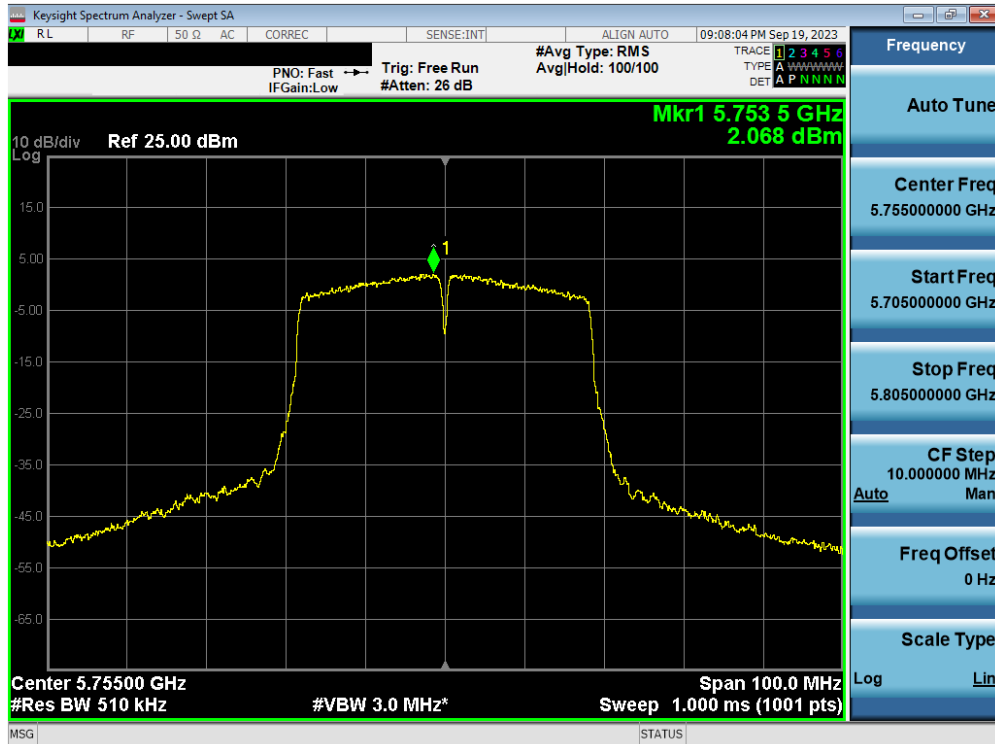

Plot 7-31. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 38 of 71

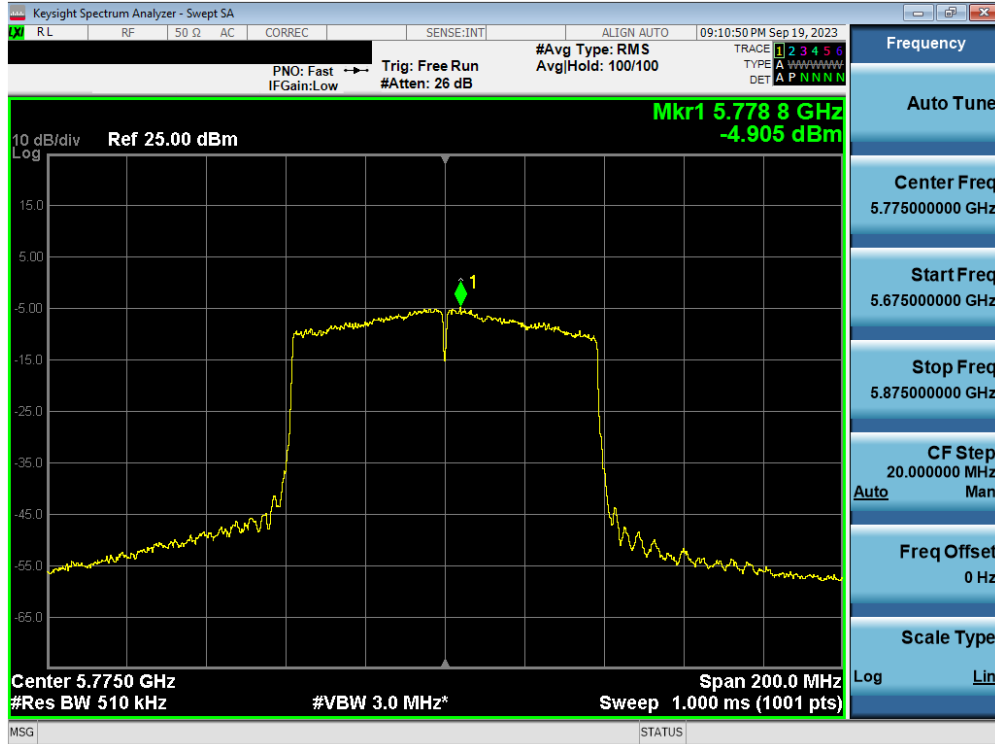

Plot 7-32. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

**Sample e.i.r.p Power Spectral Density Calculation:**

At 5180MHz in 802.11n (20MHz BW) mode, the average power density was calculated to be 9.44 dBm with directional gain of -3.40 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$9.44 \text{ dBm} + -3.40 \text{ dBi} = 6.04 \text{ dBm}$$

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 39 of 71

## 7.6 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

**For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.**

**For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.**

**For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.**

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400\sqrt{F} (kHz)	300
0.490 – 1.705 MHz	24000\sqrt{F} (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-9. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10-2013 – Section 12.7.4.4 (Band Edge Measurements)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 40 of 71





**Test Settings – Above 1GHz**

**Average Field Strength Measurements (Method AD – Average Detection)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

**Test Settings – Below 1GHz**


**Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.


**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 41 of 71

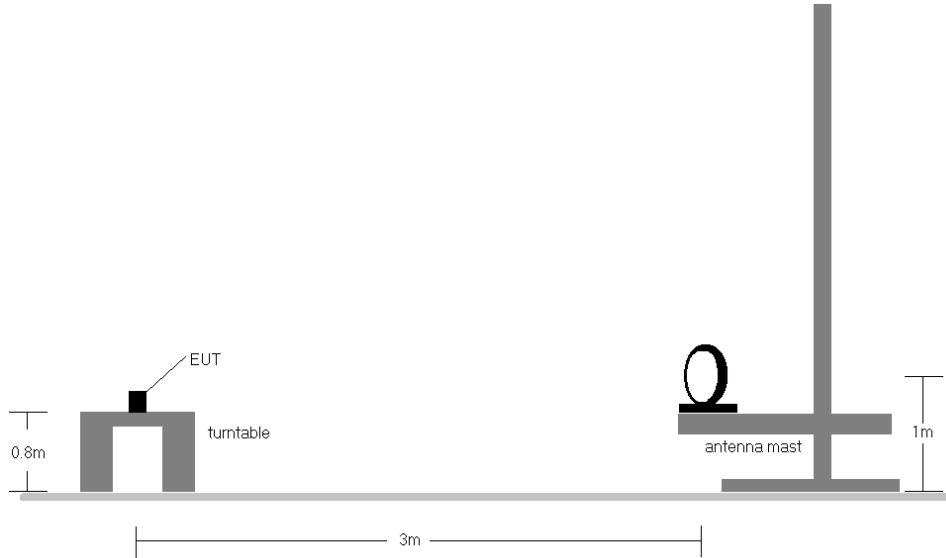


**Figure 7-5. Radiated Test Setup < 30MHz**

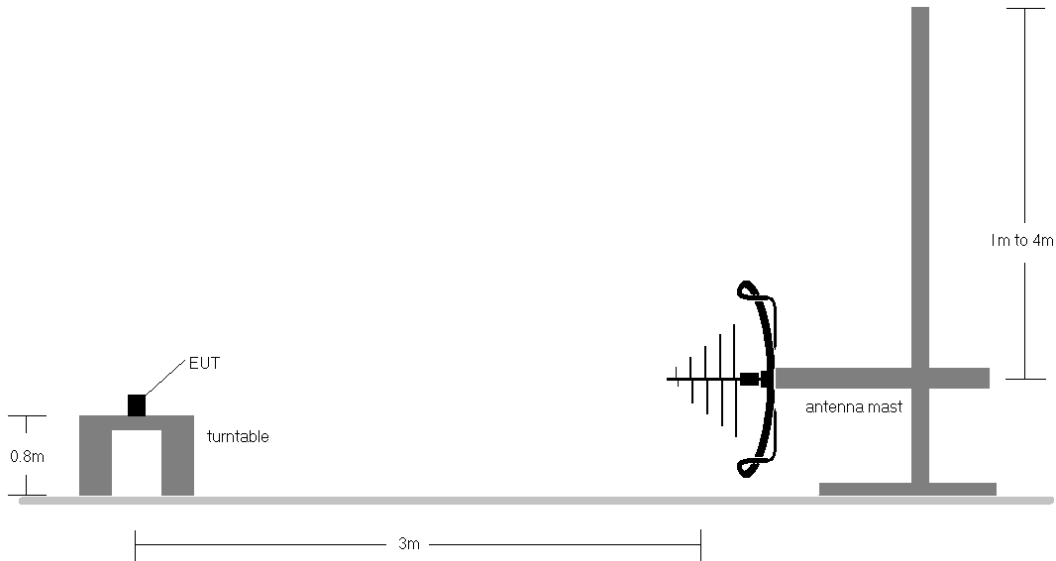

**Figure 7-6. Radiated Test Setup < 1GHz**

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 42 of 71

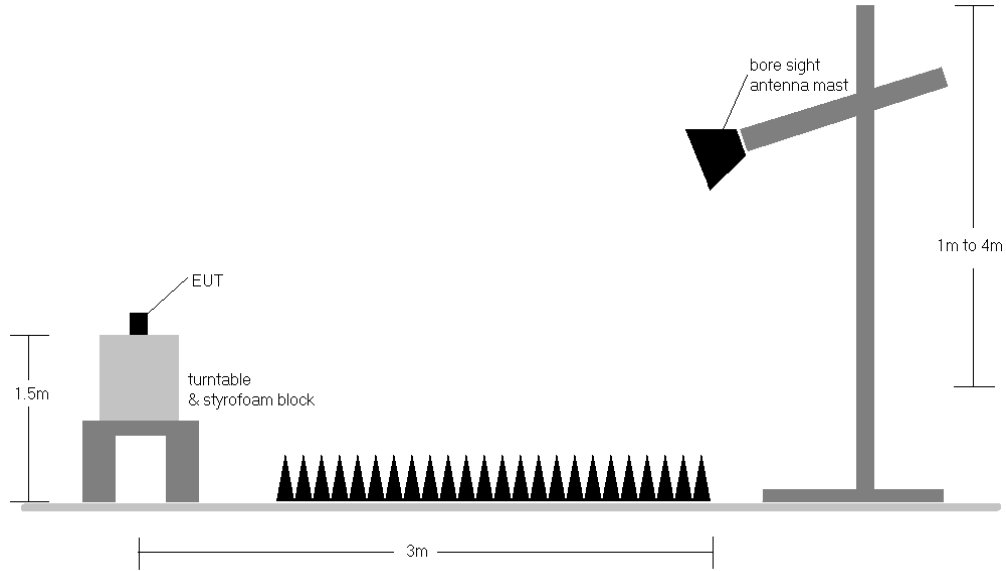

**Figure 7-7. Radiated Test Setup > 1GHz**

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 43 of 71

**Test Notes**

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limits shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB $\mu$ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
10. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.

**Sample Calculations**

**Determining Spurious Emissions Levels**


- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

**Radiated Band Edge Measurement Offset**


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 44 of 71


## Radiated Spurious Emission Measurements

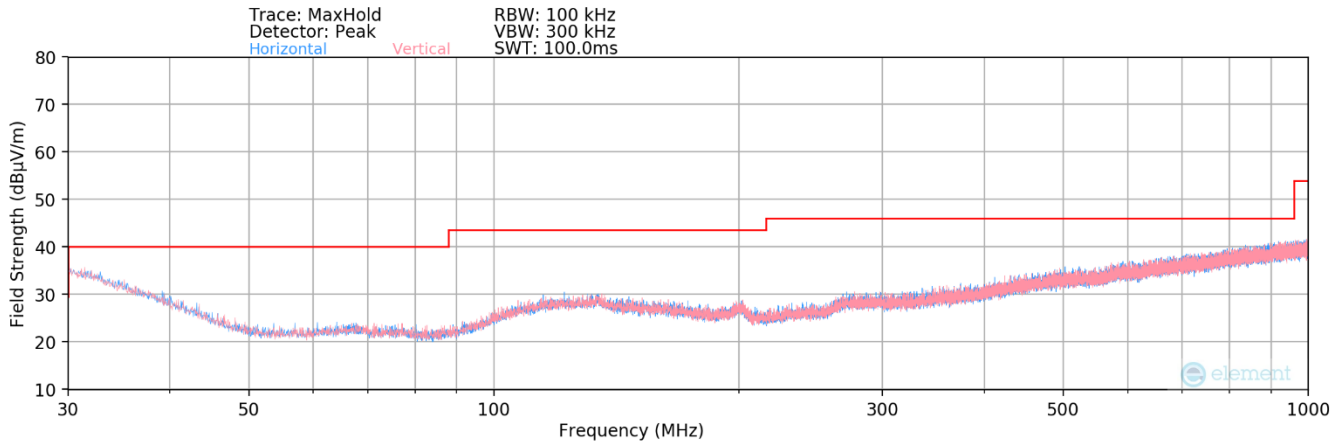

**Plot 7-33. Radiated Spurious Plot below 1GHz (802.11a)**

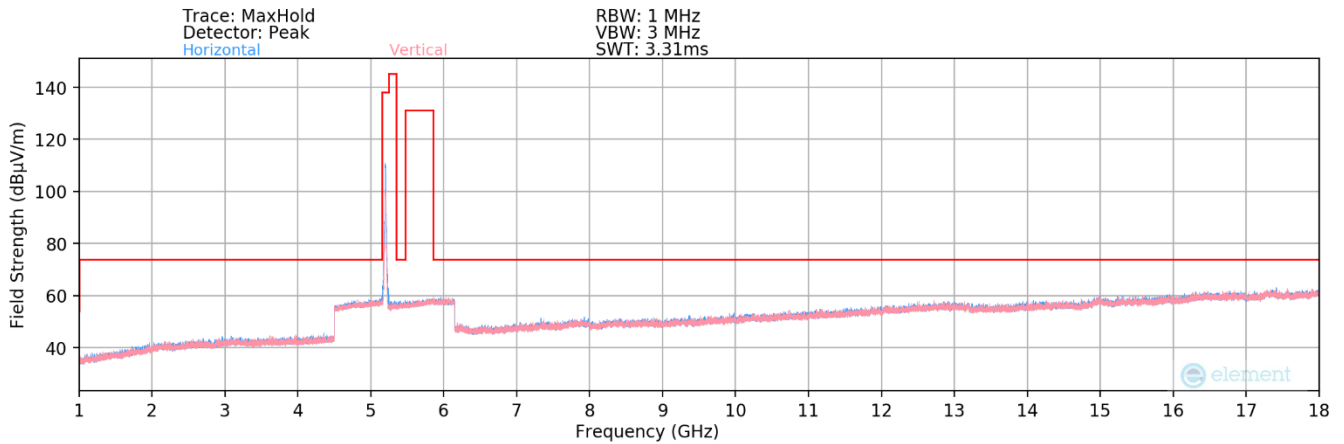


**Plot 7-34. Radiated Spurious Plot above 1GHz (802.11a – UNII Band 1 Ch. 40)**

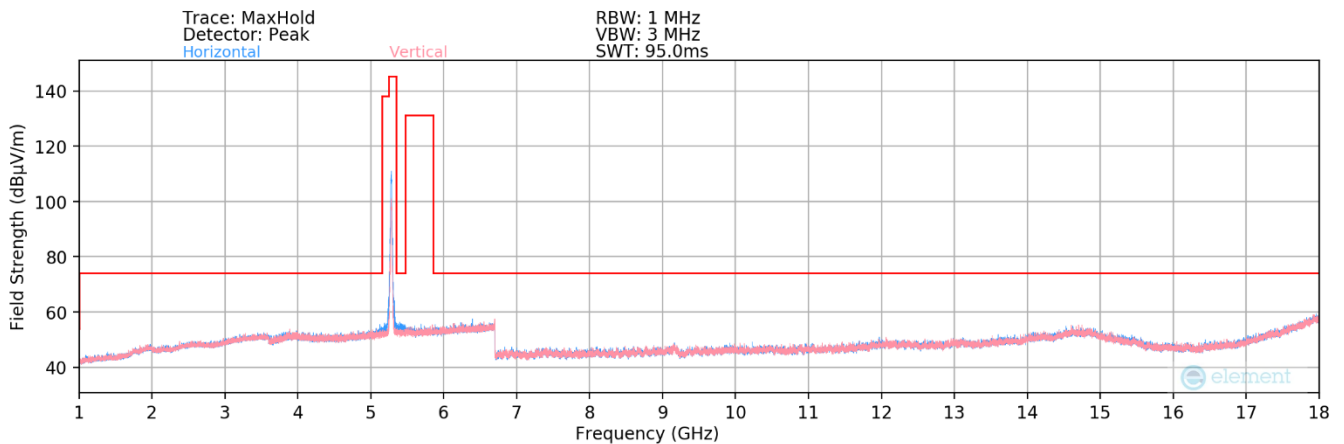


**Plot 7-35. Radiated Spurious Plot above 1GHz (802.11a – UNII Band 2A Ch. 56)**


FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 45 of 71

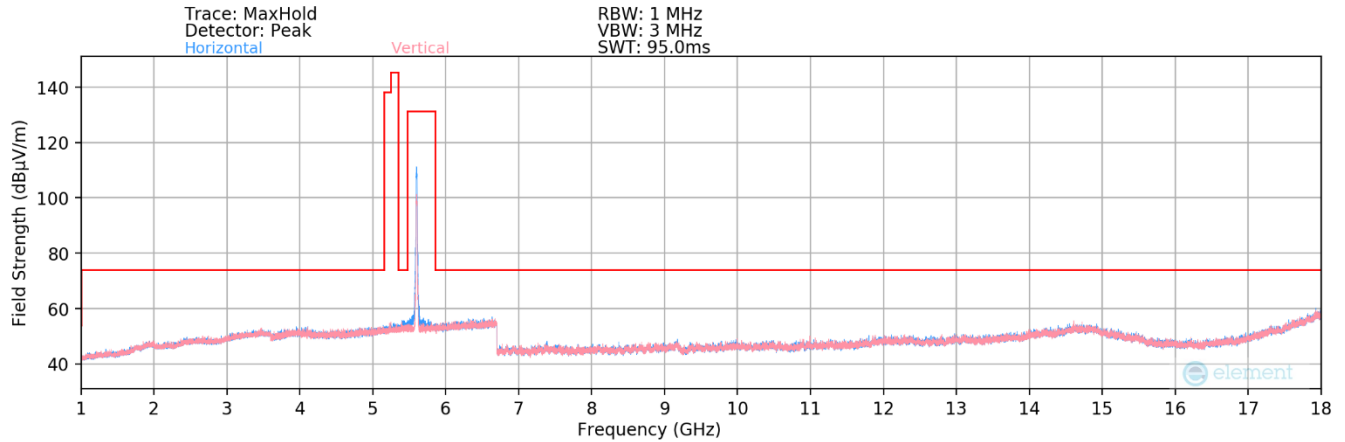

**Plot 7-36. Radiated Spurious Plot above 1GHz (802.11a – UNII Band 2C Ch. 120)**

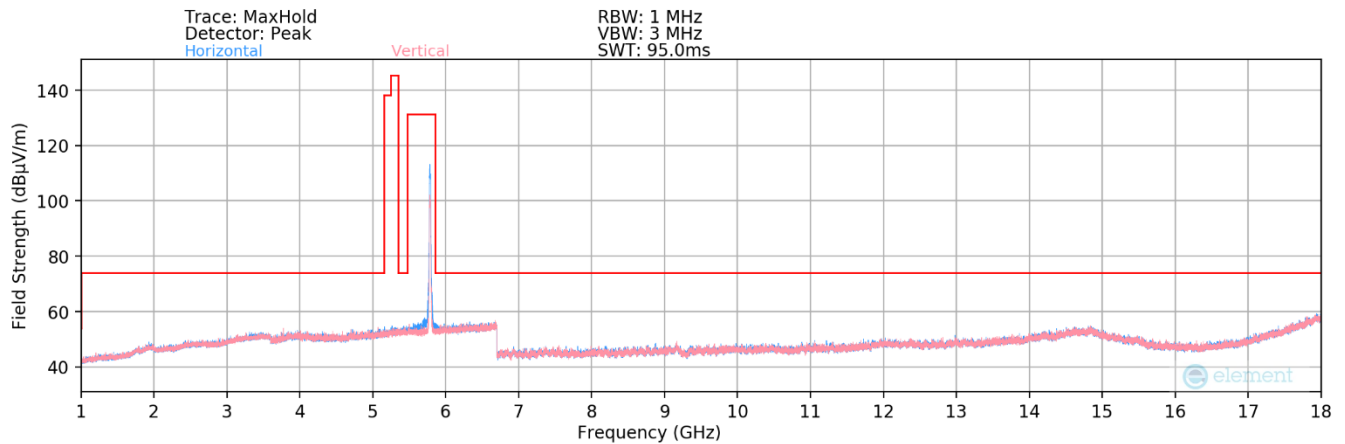


**Plot 7-37. Radiated Spurious Plot above 1GHz (802.11a – UNII Band 3 Ch. 157)**

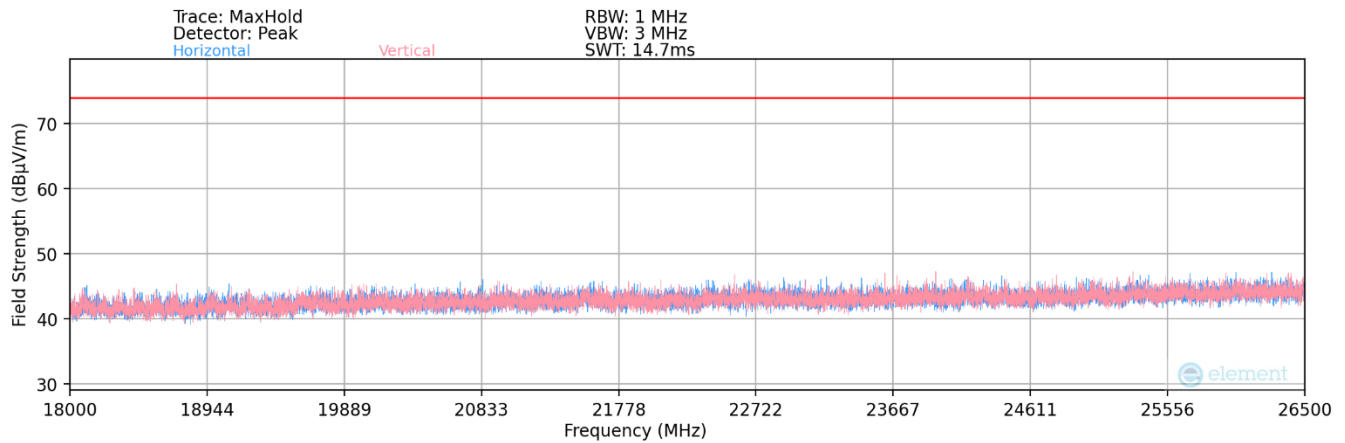

**Plot 7-38. Radiated Spurious Plot 18GHz – 26.5GHz (802.11a)**

FCC ID: A3LSMA156U IC: 649E-SMA156W		<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset		Page 46 of 71

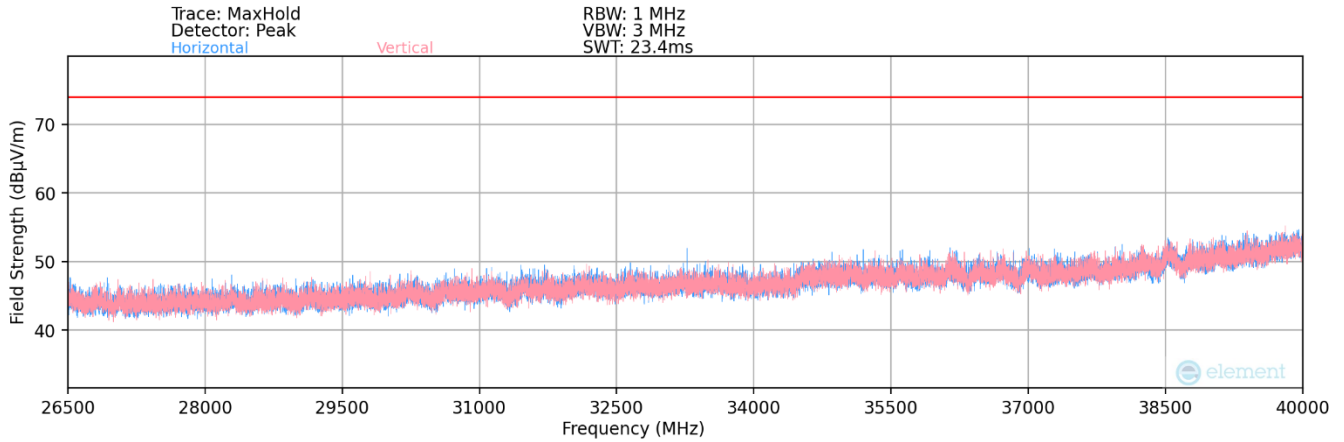

**Plot 7-39. Radiated Spurious Plot 26.5GHz – 40GHz (802.11a)**

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 47 of 71



## Radiated Spurious Emission Measurements – UNII Band 1

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	-	-	-67.04	8.35	0.00	48.31	68.20	-19.89
* 15540.00	Average	V	-	-	-78.71	10.01	0.00	38.30	53.98	-15.68
* 15540.00	Peak	V	-	-	-65.52	10.01	0.00	51.49	73.98	-22.49
* 20720.00	Average	V	-	-	-66.65	3.50	-9.54	34.31	53.98	-19.67
* 20720.00	Peak	V	-	-	-56.92	3.50	-9.54	44.05	73.98	-29.93
25900.00	Peak	V	-	-	-56.63	4.57	-9.54	45.40	68.20	-22.80

**Table 7-10. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	-	-	-66.77	8.75	0.00	48.98	68.20	-19.22
* 15600.00	Average	V	-	-	-78.69	8.91	0.00	37.22	53.98	-16.76
* 15600.00	Peak	V	-	-	-65.56	8.91	0.00	50.35	73.98	-23.63
* 20800.00	Average	V	-	-	-65.34	3.60	-9.54	35.71	53.98	-18.27
* 20800.00	Peak	V	-	-	-54.67	3.60	-9.54	46.39	73.98	-27.59
26000.00	Peak	V	-	-	-55.51	4.60	-9.54	46.55	68.20	-21.65

**Table 7-11. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 48 of 71





Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	-	-	-66.14	8.11	0.00	48.97	68.20	-19.23
* 15720.00	Average	V	-	-	-79.37	9.29	0.00	36.92	53.98	-17.06
* 15720.00	Peak	V	-	-	-66.34	9.29	0.00	49.95	73.98	-24.03
* 20960.00	Average	V	-	-	-65.87	3.61	-9.54	35.19	53.98	-18.79
* 20960.00	Peak	V	-	-	-55.94	3.61	-9.54	45.13	73.98	-28.85
26200.00	Peak	V	-	-	-54.16	4.72	-9.54	48.02	68.20	-20.18

**Table 7-12. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 49 of 71



## Radiated Spurious Emission Measurements – UNII Band 2A

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10520.00	Peak	V	-	-	-66.38	7.51	0.00	48.13	68.20	-20.07
* 15780.00	Average	V	-	-	-79.04	9.15	0.00	37.11	53.98	-16.87
* 15780.00	Peak	V	-	-	-64.93	9.15	0.00	51.22	73.98	-22.76
* 21040.00	Average	V	-	-	-65.51	3.71	-9.54	35.66	53.98	-18.32
* 21040.00	Peak	V	-	-	-55.95	3.71	-9.54	45.22	73.98	-28.76
26300.00	Peak	V	-	-	-55.66	4.64	-9.54	46.44	68.20	-21.76

**Table 7-13. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10560.00	Peak	V	-	-	-66.29	8.01	0.00	48.72	68.20	-19.48
* 15840.00	Average	V	-	-	-79.11	9.33	0.00	37.22	53.98	-16.76
* 15840.00	Peak	V	-	-	-65.75	9.33	0.00	50.58	73.98	-23.40
* 21120.00	Average	V	-	-	-65.56	3.83	-9.54	35.72	53.98	-18.25
* 21120.00	Peak	V	-	-	-55.80	3.83	-9.54	45.49	73.98	-28.49
26400.00	Peak	V	-	-	-55.68	4.68	-9.54	46.46	68.20	-21.74

**Table 7-14. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 50 of 71



Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-79.19	7.89	0.00	35.70	53.98	-18.28
* 10640.00	Peak	V	-	-	-65.75	7.89	0.00	49.14	73.98	-24.84
* 15960.00	Average	V	-	-	-79.82	8.28	0.00	35.46	53.98	-18.52
* 15960.00	Peak	V	-	-	-66.55	8.28	0.00	48.73	73.98	-25.25
* 21280.00	Average	V	-	-	-65.40	3.95	-9.54	36.01	53.98	-17.96
* 21280.00	Peak	V	-	-	-56.42	3.95	-9.54	44.99	73.98	-28.99
26600.00	Peak	V	-	-	-54.90	4.51	-9.54	47.07	68.20	-21.13

**Table 7-15. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 51 of 71



## Radiated Spurious Emission Measurements – UNII Band 2C

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-82.70	7.92	0.00	32.22	53.98	-21.75
* 11000.00	Peak	V	-	-	-68.93	7.92	0.00	45.99	73.98	-27.98
16500.00	Peak	V	-	-	-69.63	7.99	0.00	45.36	68.20	-22.84
22000.00	Peak	V	-	-	-55.27	3.86	-9.54	46.04	68.20	-22.16
27500.00	Peak	V	-	-	-55.22	4.54	-9.54	46.78	68.20	-21.42

**Table 7-16. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5600MHz  
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11200.00	Average	V	-	-	-83.28	7.95	0.00	31.67	53.98	-22.31
* 11200.00	Peak	V	-	-	-70.00	7.95	0.00	44.95	73.98	-29.03
16800.00	Peak	V	-	-	-66.21	8.99	0.00	49.78	68.20	-18.42
* 22400.00	Average	V	-	-	-64.77	3.86	-9.54	36.55	53.98	-17.43
* 22400.00	Peak	V	-	-	-55.28	3.86	-9.54	46.03	73.98	-27.95
28000.00	Peak	V	-	-	-55.89	4.90	-9.54	46.47	68.20	-21.73

**Table 7-17. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 52 of 71

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-81.33	8.43	0.00	34.10	53.98	-19.88
* 11440.00	Peak	V	-	-	-68.04	8.43	0.00	47.39	73.98	-26.59
17160.00	Peak	V	-	-	-66.77	11.21	0.00	51.44	68.20	-16.76
* 22880.00	Average	V	-	-	-64.89	4.09	-9.54	36.66	53.98	-17.32
* 22880.00	Peak	V	-	-	-55.22	4.09	-9.54	46.33	73.98	-27.65
28600.00	Peak	V	-	-	-55.35	5.30	-9.54	47.41	68.20	-20.79

**Table 7-18. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 53 of 71



### Radiated Spurious Emission Measurements – UNII Band 3

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-79.99	8.23	0.00	35.24	53.98	-18.74
* 11490.00	Peak	V	-	-	-67.61	8.23	0.00	47.62	73.98	-26.36
17235.00	Peak	V	-	-	-66.61	11.55	0.00	51.94	68.20	-16.26
* 22980.00	Average	V	-	-	-65.27	4.00	-9.54	36.19	53.98	-17.79
* 22980.00	Peak	V	-	-	-55.52	4.00	-9.54	45.94	73.98	-28.04
28725.00	Peak	V	-	-	-55.25	5.36	-9.54	47.57	68.20	-20.63

**Table 7-19. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-79.99	8.41	0.00	35.42	53.98	-18.56
* 11570.00	Peak	V	-	-	-66.20	8.41	0.00	49.21	73.98	-24.77
17355.00	Peak	V	-	-	-67.39	12.41	0.00	52.02	68.20	-16.18
23140.00	Peak	V	-	-	-56.05	3.94	-9.54	45.35	68.20	-22.85
28925.00	Peak	V	-	-	-56.14	5.33	-9.54	46.65	68.20	-21.55

**Table 7-20. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 54 of 71



Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-78.04	8.41	0.00	37.37	53.98	-16.61
* 11650.00	Peak	V	-	-	-66.29	8.41	0.00	49.12	73.98	-24.86
17475.00	Peak	V	-	-	-67.44	13.25	0.00	52.81	68.20	-15.39
23300.00	Peak	V	-	-	-55.87	4.04	-9.54	45.62	68.20	-22.58
29125.00	Peak	V	-	-	-55.80	5.36	-9.54	47.02	68.20	-21.18


**Table 7-21. Radiated Measurements**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 55 of 71


### Simultaneous Tx Radiated Spurious Emissions Measurements

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	1
Channel	39	120
Operating Frequency (MHz)	2441	5600
Data Rate (Mbps)	1	6
Mode	Bluetooth	802.11a

**Table 7-22. Simultaneous Transmission Config**

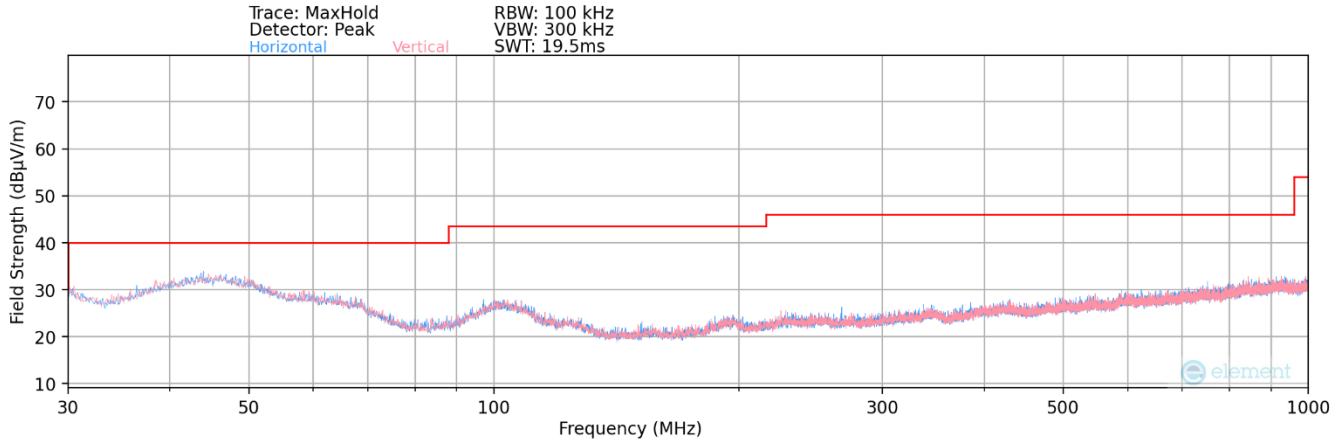


**Plot 7-40. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz)**

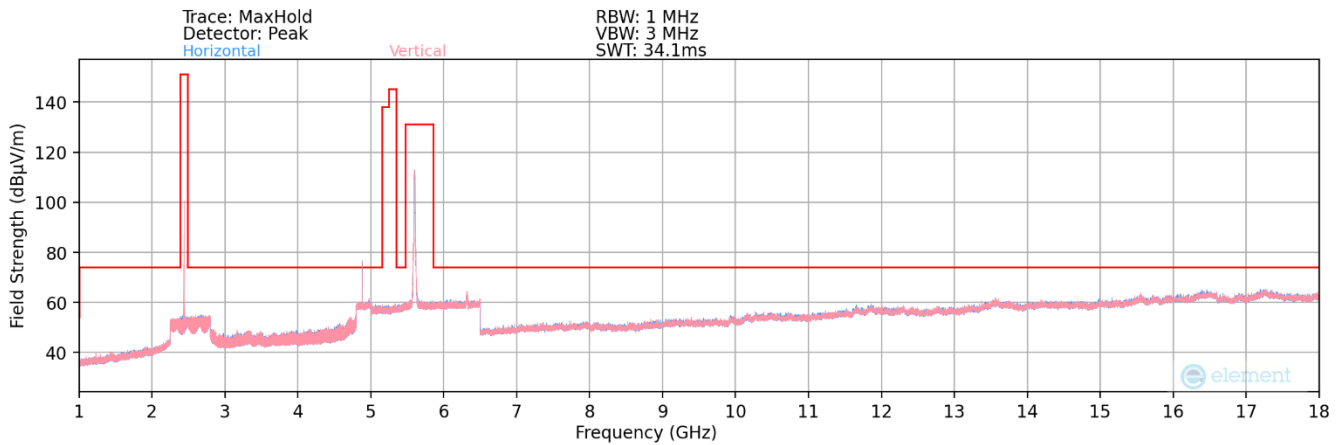


**Plot 7-41. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 56 of 71



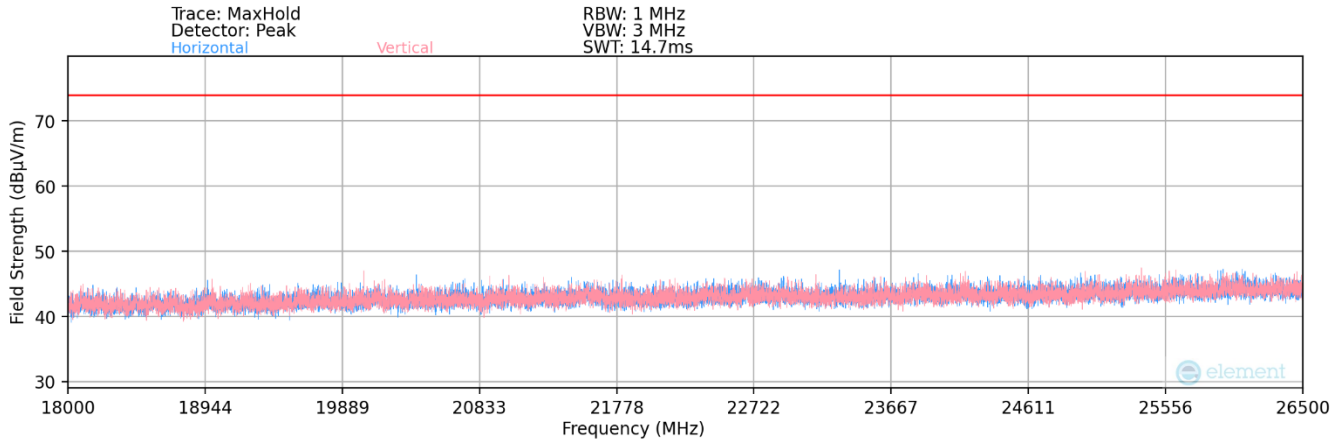

**Plot 7-42. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz)**

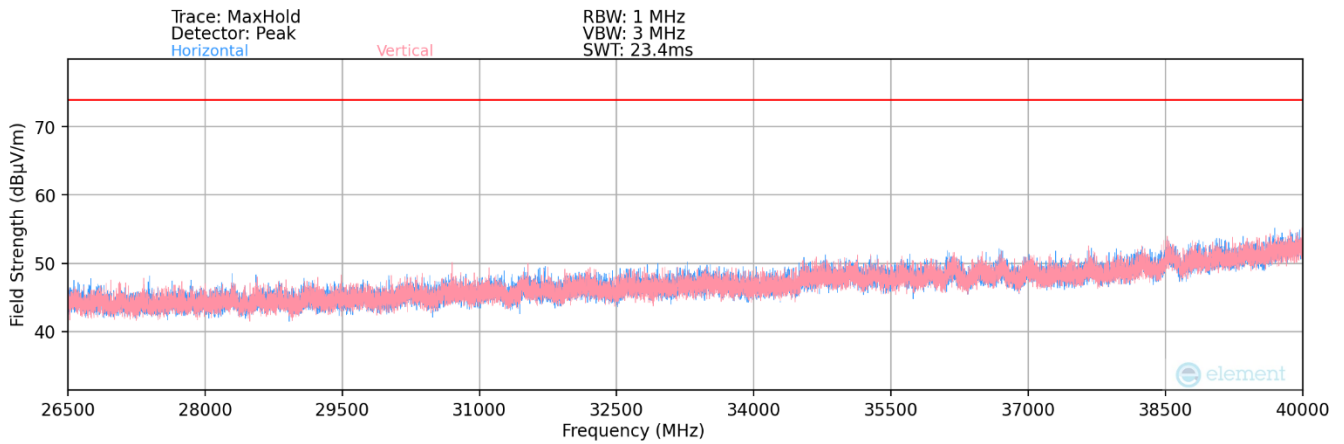

**Plot 7-43. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)**

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 57 of 71


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
718.00	Peak	V	-	-	-76.06	-0.97	0.00	29.97	46.02	-16.06
1723.00	Peak	V	-	-	-67.05	1.24	0.00	41.19	68.20	-27.01
3159.00	Peak	V	-	-	-68.70	7.13	0.00	45.43	68.20	-22.77
6318.00	Peak	V	100	30	-60.95	13.32	0.00	59.37	68.20	-8.83
* 8041.00	Average	V	-	-	-82.42	16.08	0.00	40.66	53.98	-13.32
* 8041.00	Peak	V	-	-	-70.90	16.08	0.00	52.18	73.98	-21.80
8759.00	Peak	V	-	-	-72.04	17.26	0.00	52.22	68.20	-15.98
13641.00	Peak	V	-	-	-72.61	25.14	0.00	59.53	68.20	-8.67
* 19241.00	Average	V	-	-	-66.06	2.37	-9.54	33.77	53.98	-20.21
* 19241.00	Peak	V	-	-	-55.77	2.37	-9.54	44.06	73.98	-29.92

**Table 7-23. Radiated Spurious Emission Measurements (2.4GHz – 5GHz)**


FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 58 of 71

## Radiated Band Edge Measurements (20MHz BW)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

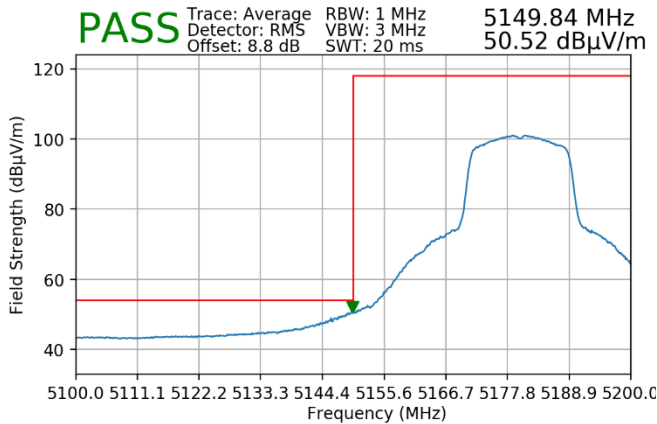


**Plot 7-44. Radiated Lower Band Edge Plot (Average – UNII Band 1)**

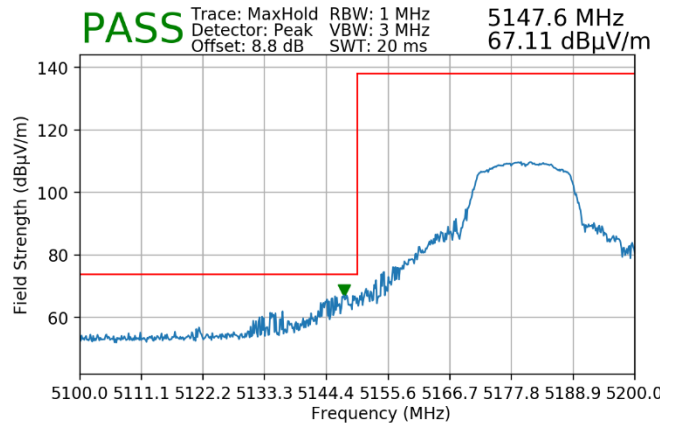


**Plot 7-45. Radiated Lower Band Edge Plot (Peak – UNII Band 1)**

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

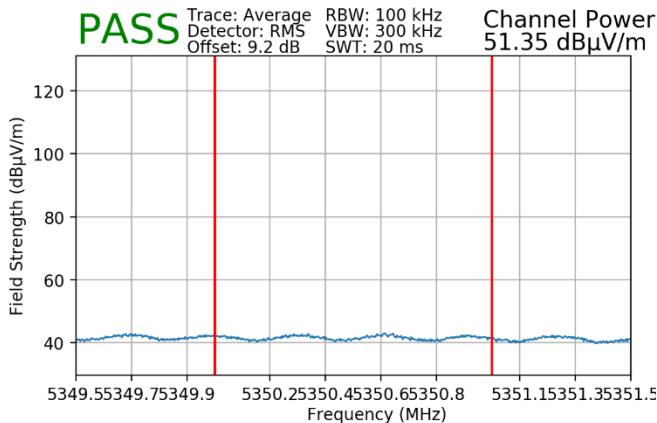


**Plot 7-46. Radiated Upper Band Edge Plot (Average – UNII Band 2A)**

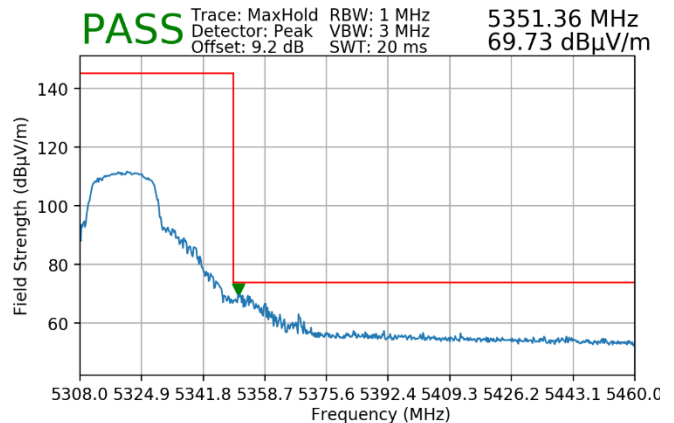


**Plot 7-47. Radiated Upper Band Edge Plot M (Peak – UNII Band 2A)**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 59 of 71

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

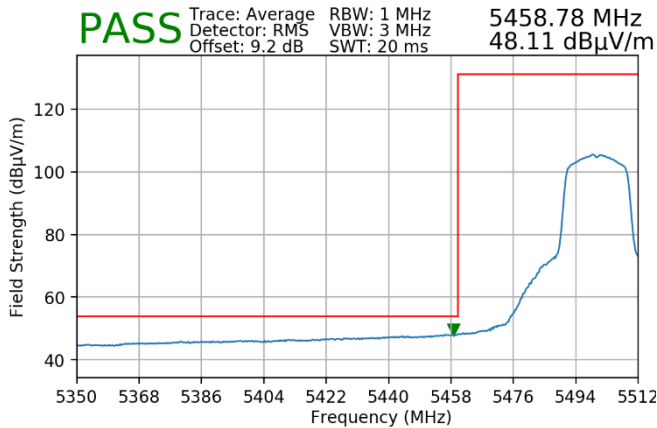


**Plot 7-48. Radiated Lower Band Edge Plot (Average – UNII Band 2C)**

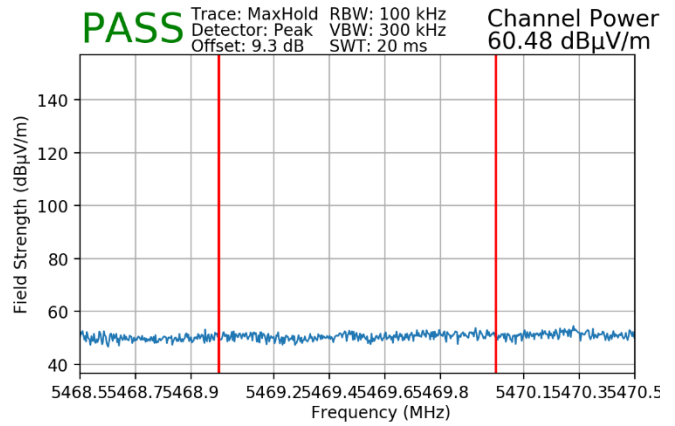

**Plot 7-49. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

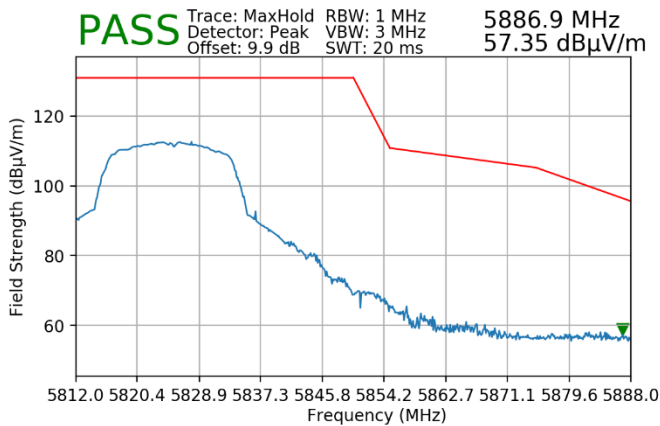


**Plot 7-50. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**


FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 60 of 71

## Radiated Band Edge Measurements (40MHz BW)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

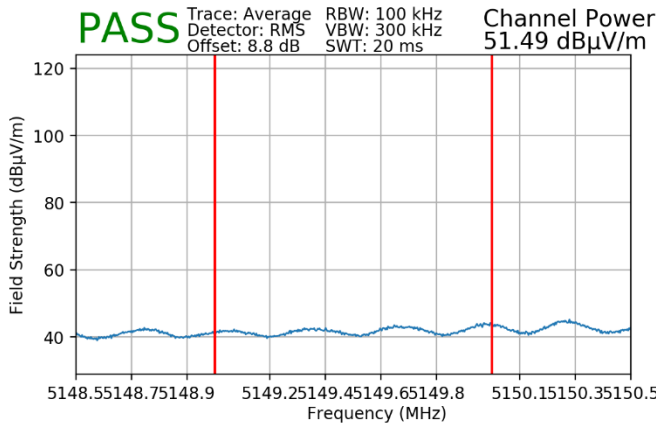


**Plot 7-51. Radiated Lower Band Edge Plot (Average – UNII Band 1)**

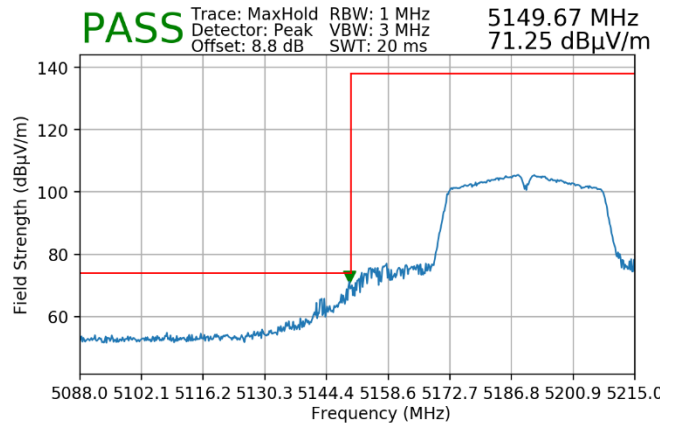


**Plot 7-52. Radiated Lower Band Edge Plot (Peak – UNII Band 1)**

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

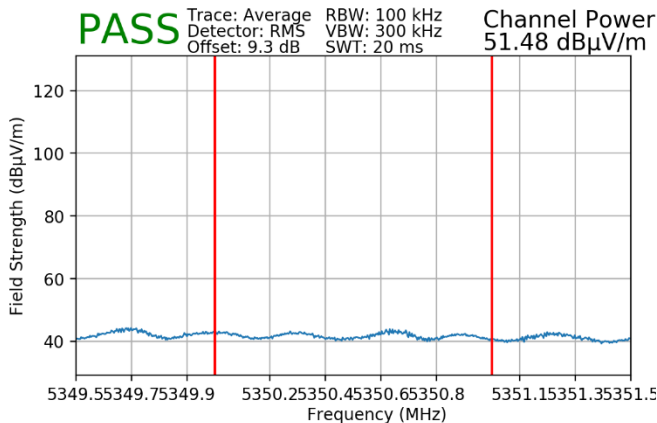


**Plot 7-53. Radiated Upper Band Edge Plot (Average – UNII Band 2A)**

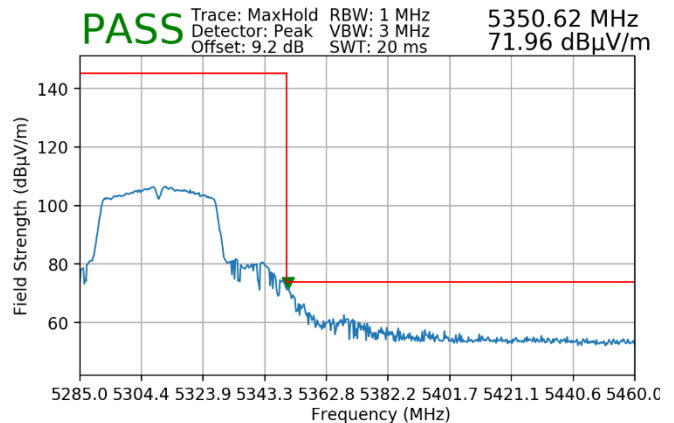


**Plot 7-54. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 61 of 71

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

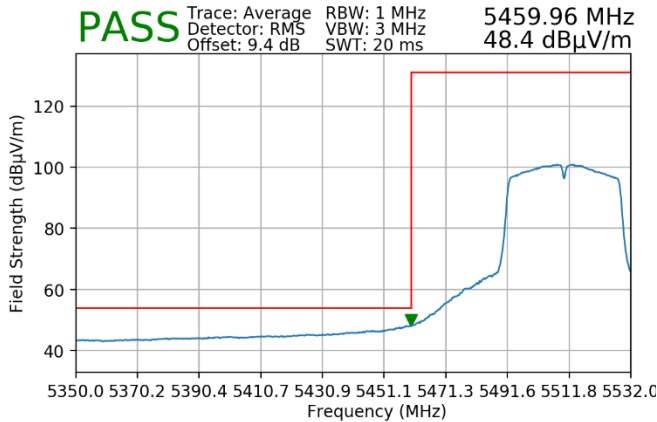


**Plot 7-55. Radiated Lower Band Edge Plot (Average – UNII Band 2C)**

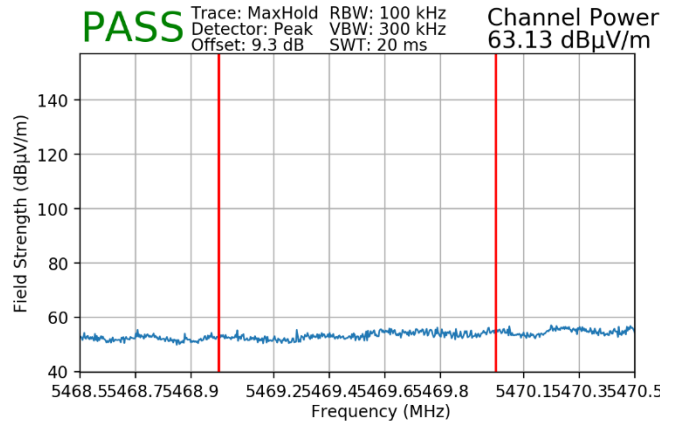

**Plot 7-56. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

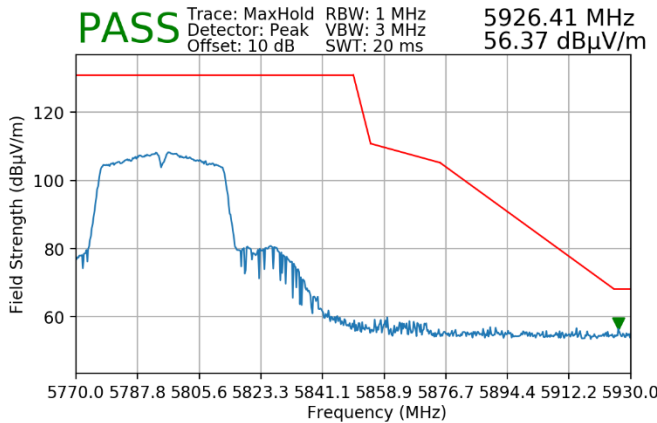


**Plot 7-57. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**


FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 62 of 71

## Radiated Band Edge Measurements (80MHz BW)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

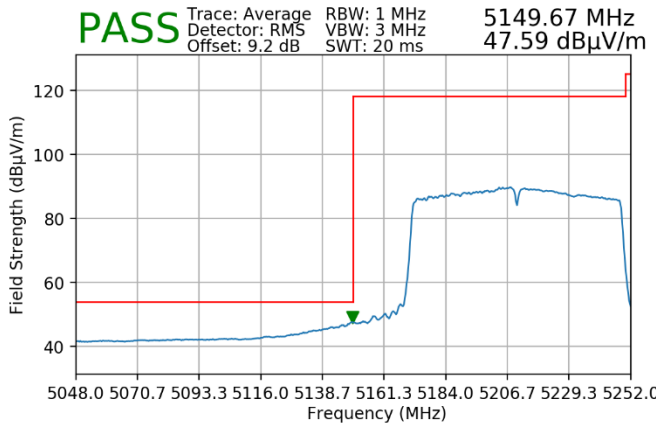


**Plot 7-58. Radiated Lower Band Edge Plot (Average – UNII Band 1)**

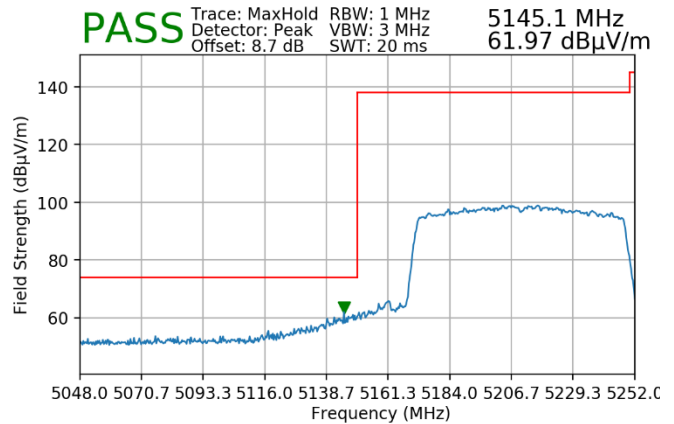


**Plot 7-59. Radiated Lower Band Edge Plot (Peak – UNII Band 1)**

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

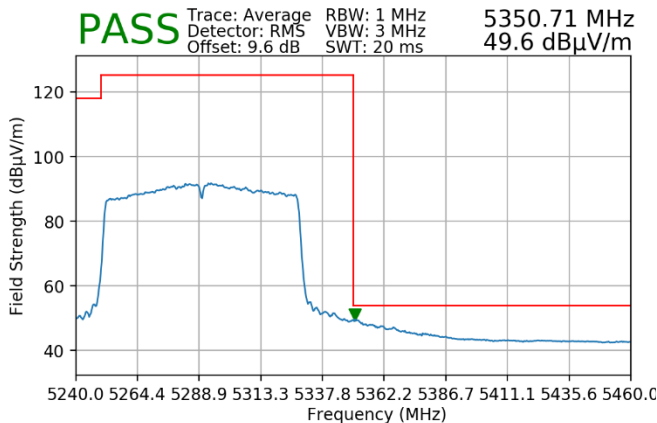

**Plot 7-60. Radiated Upper Band Edge Plot (Average – UNII Band 2A)**

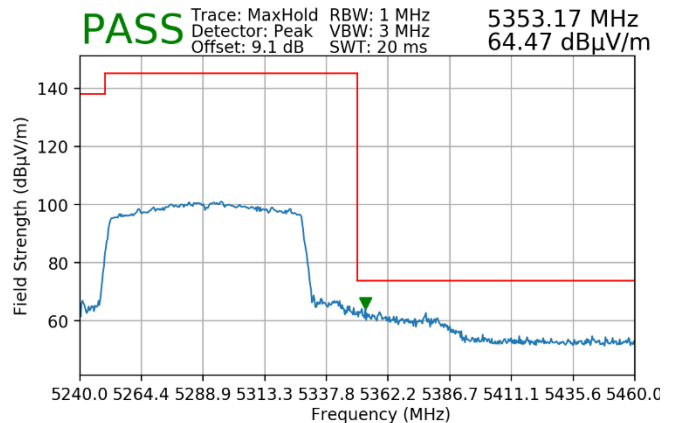


**Plot 7-61. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)**


FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 63 of 71



Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

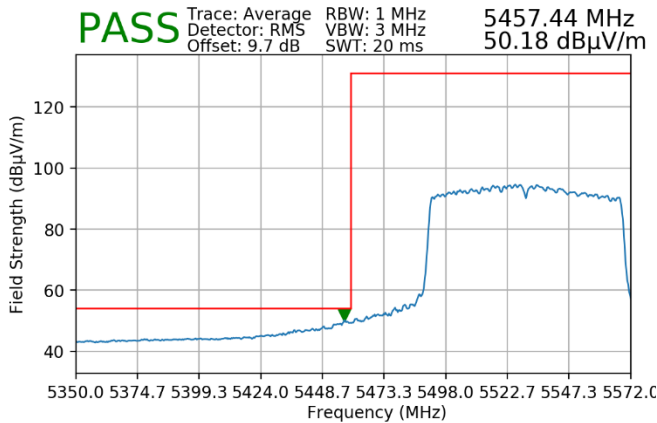


**Plot 7-62. Radiated Lower Band Edge Plot (Average – UNII Band 2C)**

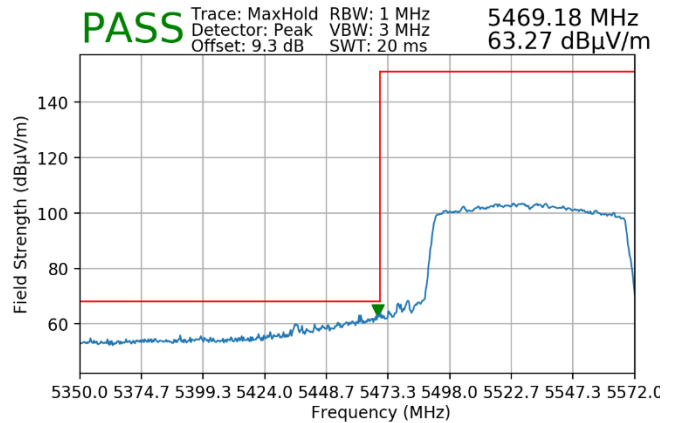

**Plot 7-63. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

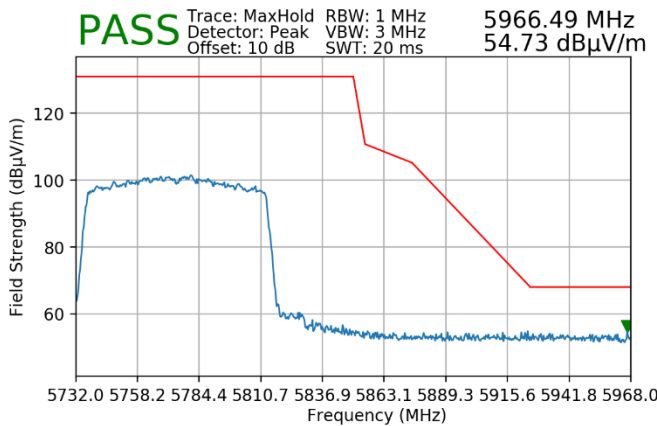

**Plot 7-64. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 64 of 71



## 7.7 Line-Conducted Test Data

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below per FCC §15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-24. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMA156U IC: 649E-SMA156W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 65 of 71

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

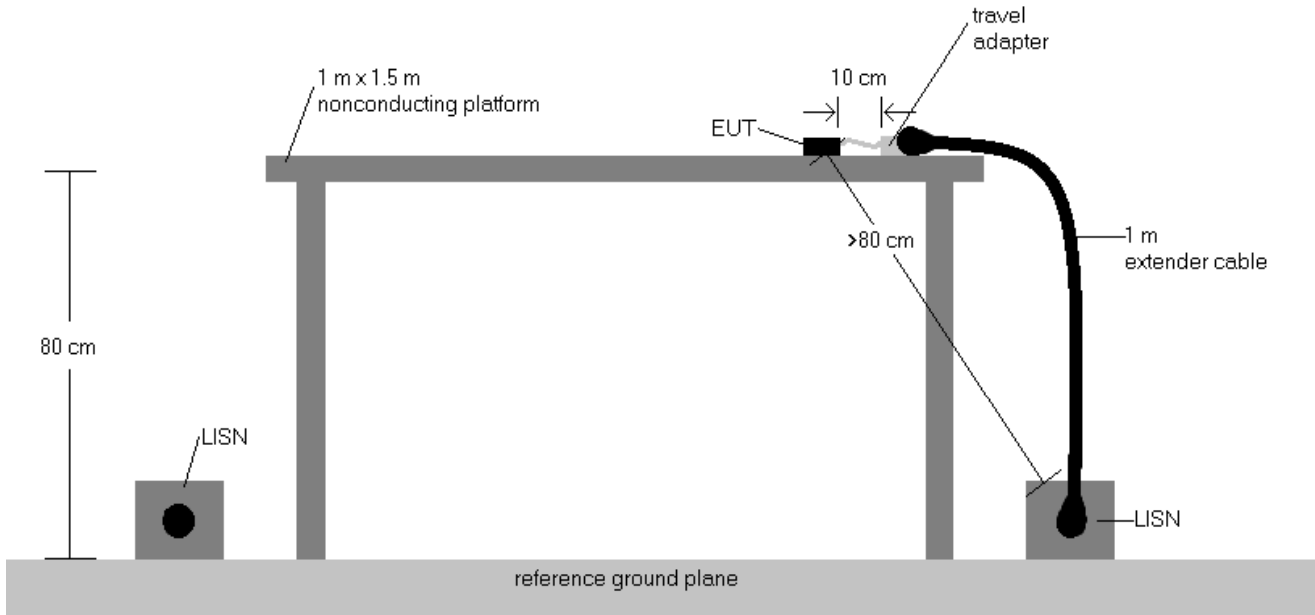


**Figure 7-8. Test Instrument & Measurement Setup**


**Test Notes**

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in §15.207 and RSS-Gen (8.8).
3.  $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
4.  $QP/AV\ Level (dB\mu V) = QP/AV\ Analyzer/Receiver\ Level (dB\mu V) + Corr. (dB)$
5.  $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 66 of 71

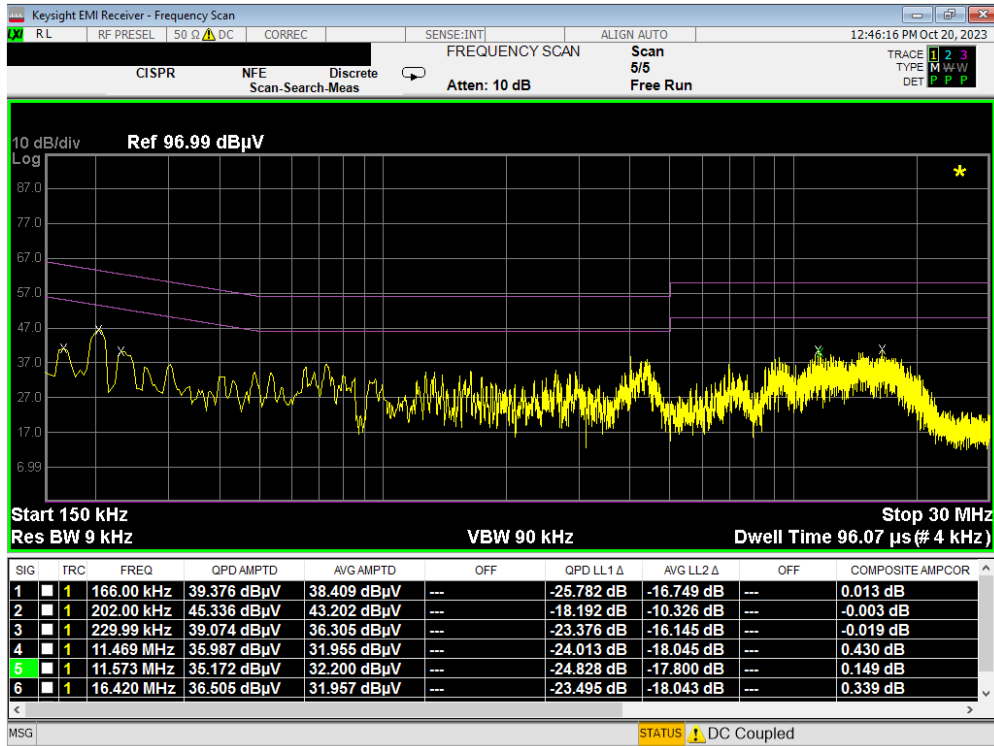


Plot 7-65. Line Conducted Plot with 802.11a UNII Band 1 (L1)

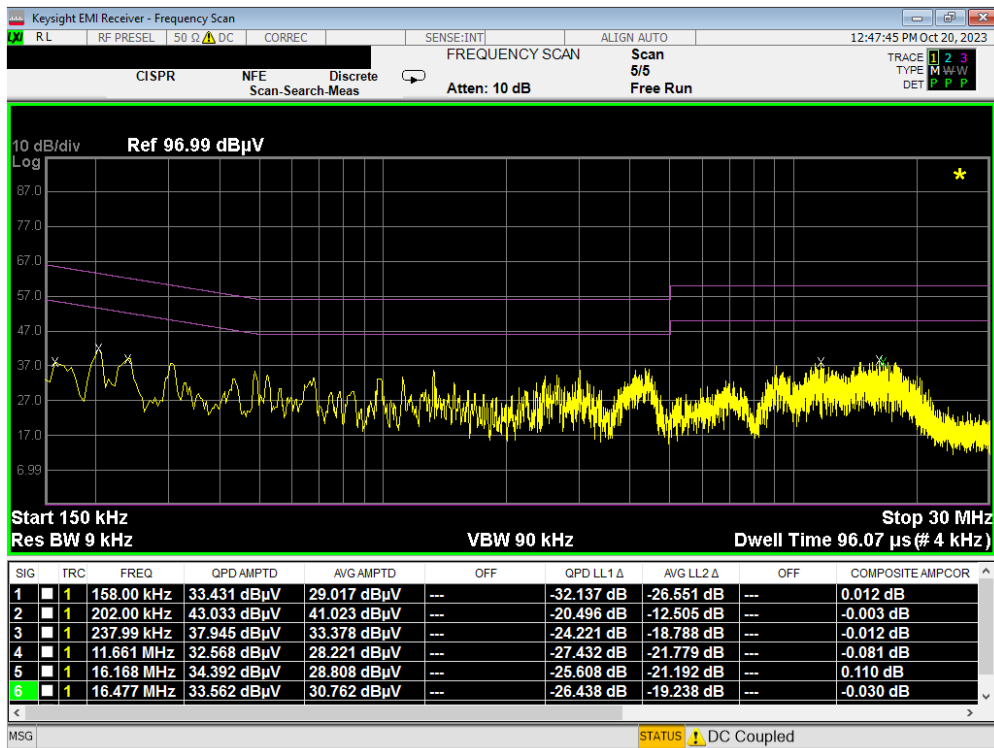


Plot 7-66. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 67 of 71

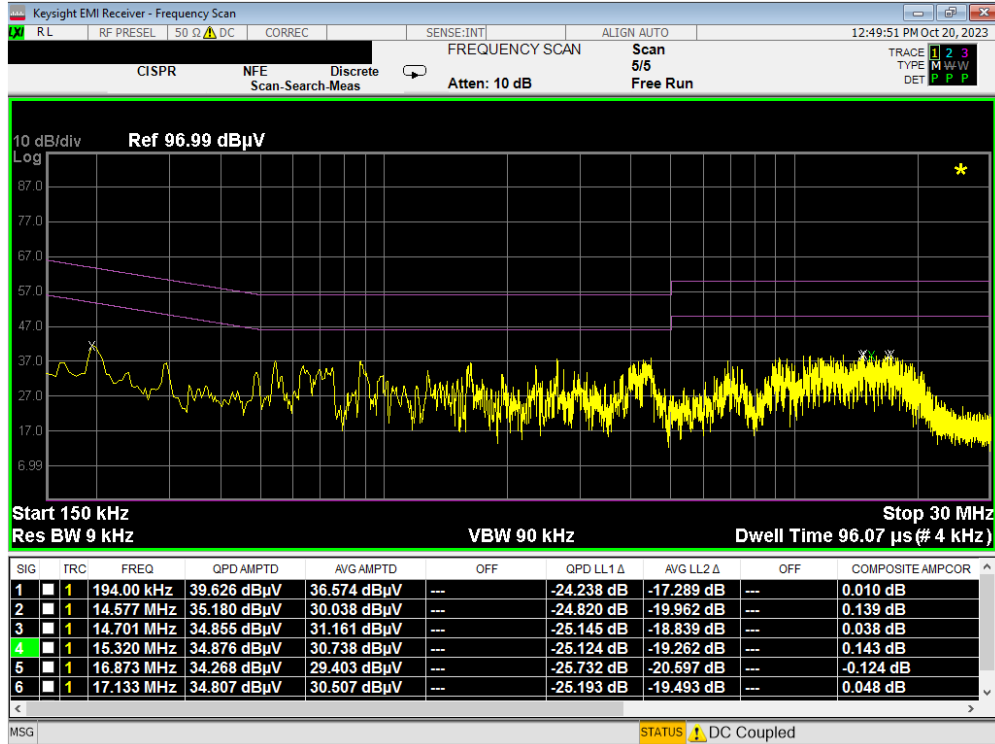


Plot 7-67. Line Conducted Plot with 802.11a UNII Band 2A (L1)

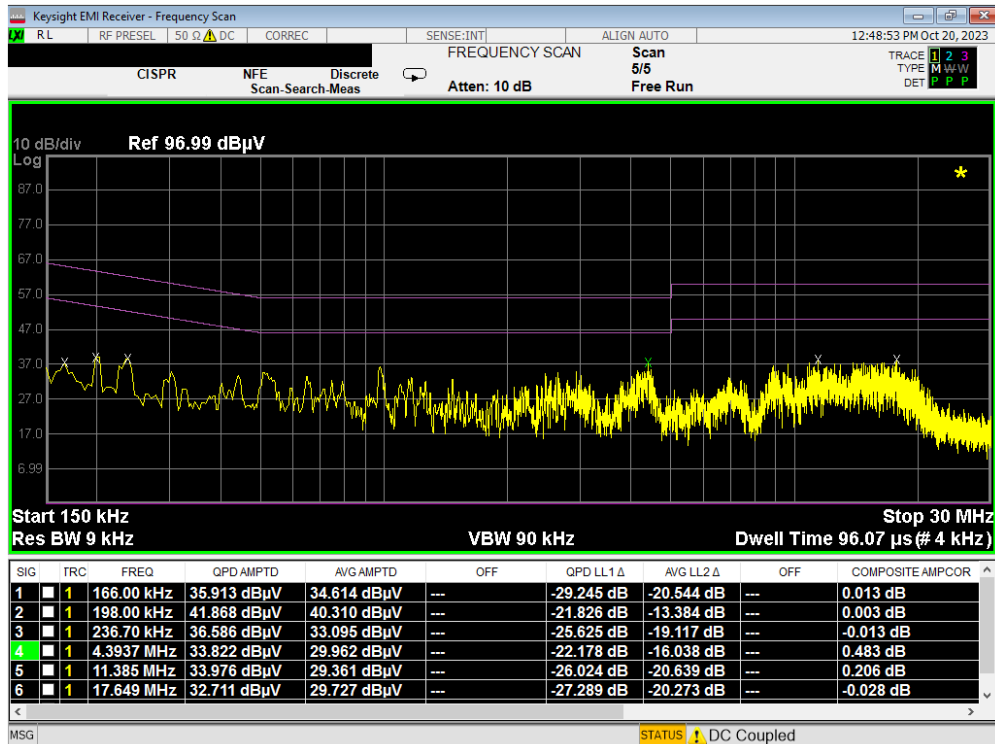


Plot 7-68. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 68 of 71

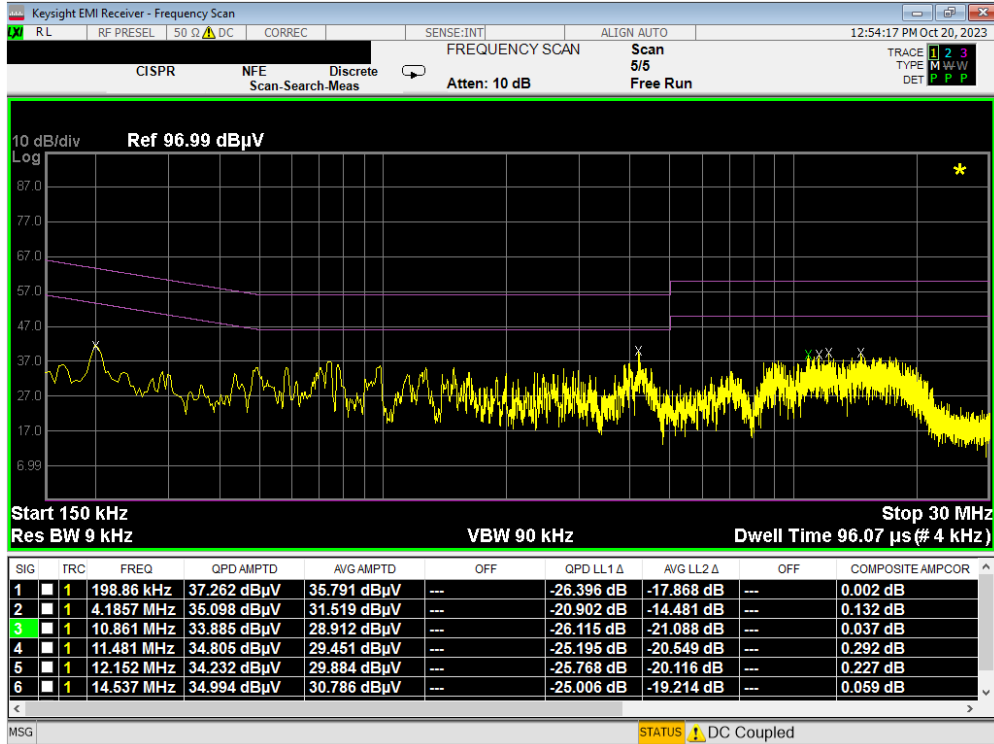


Plot 7-69. Line Conducted Plot with 802.11a UNII Band 2C (L1)

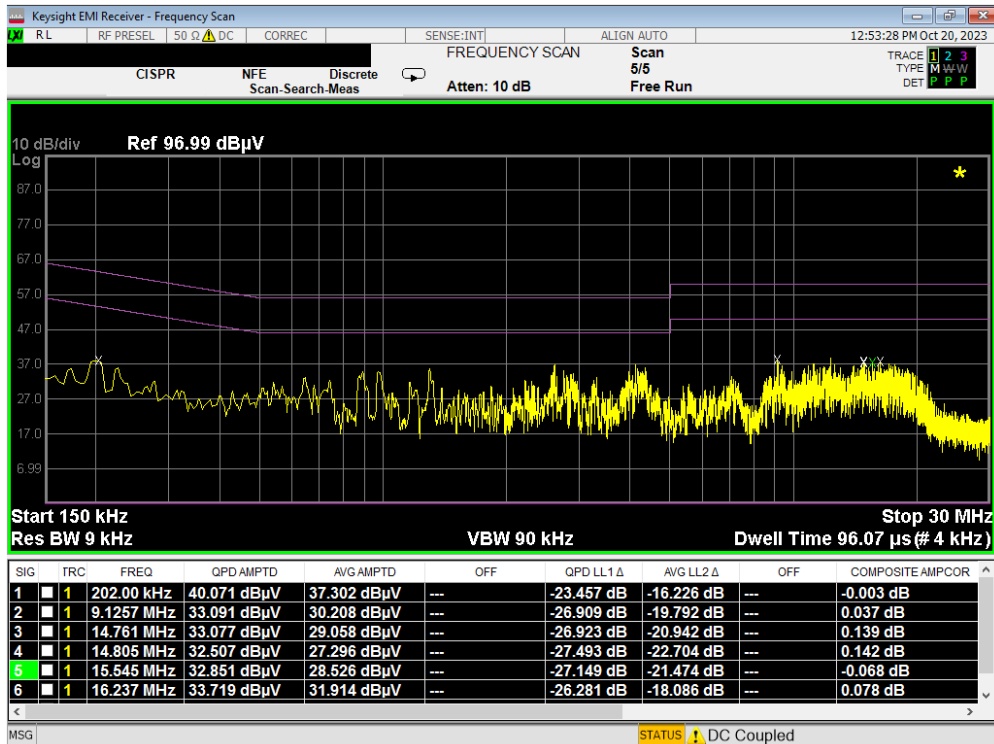


Plot 7-70. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 69 of 71

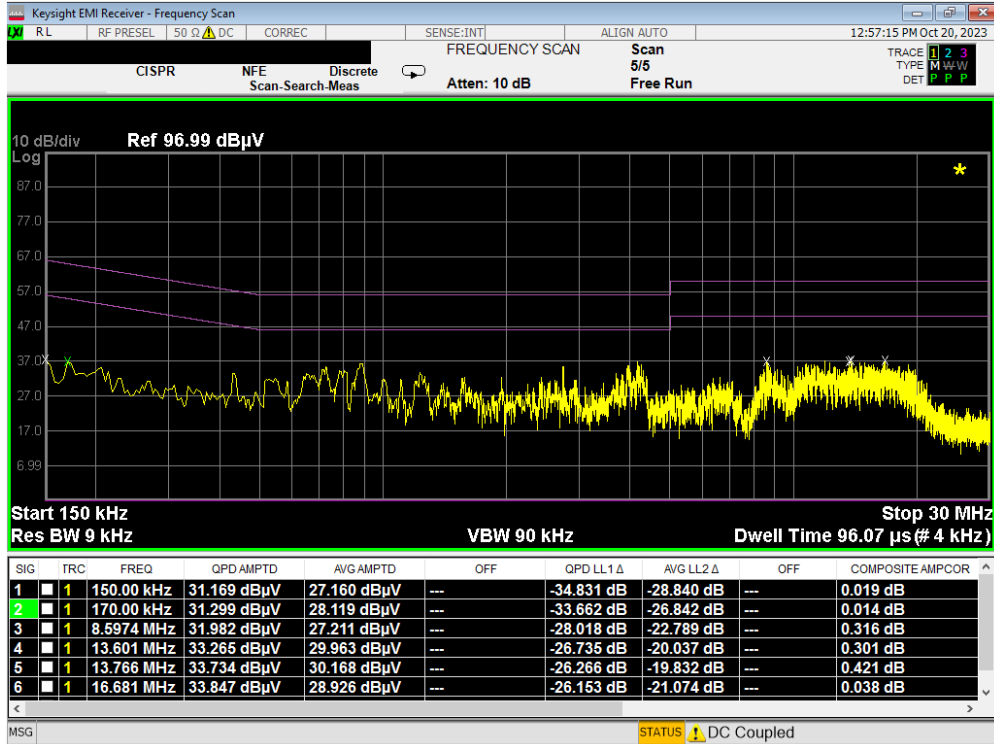

Plot 7-71. Line Conducted Plot with 802.11a UNII Band 3 (L1)

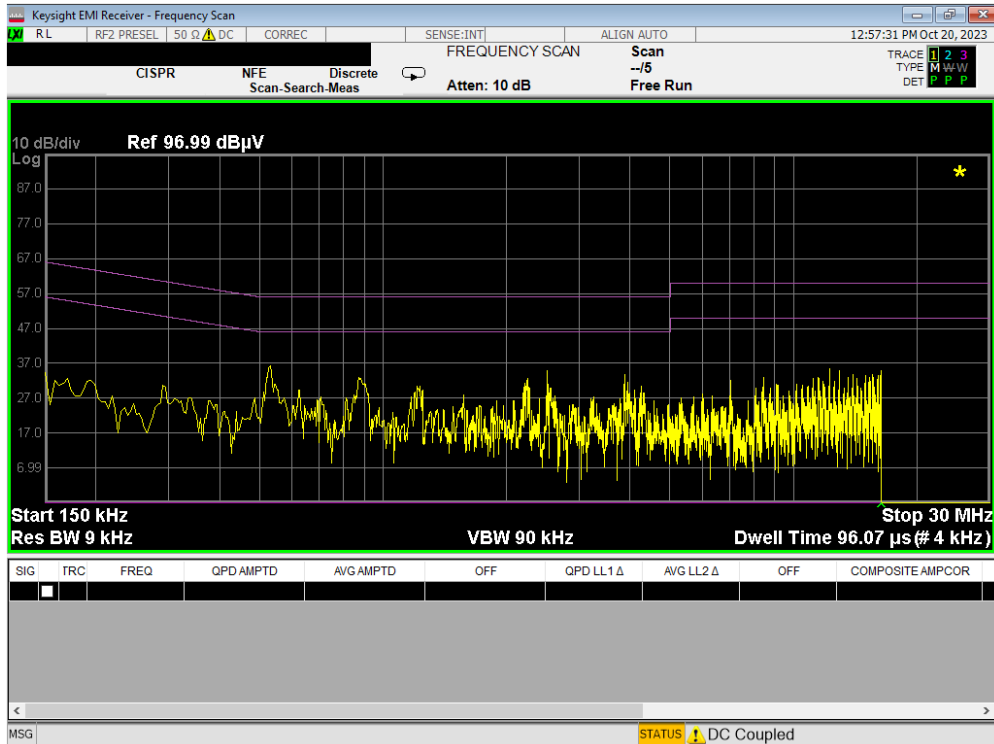

Plot 7-72. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: A3LSMA156U IC: 649E-SMA156W	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2309070100-12.A3L	Test Dates: 09/08-10/30/2023	EUT Type: Portable Handset	Page 70 of 71

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMA156U, IC: 649E-SMA156W** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the ISED Rules.

<b>FCC ID:</b> A3LSMA156U <b>IC:</b> 649E-SMA156W	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2309070100-12.A3L	<b>Test Dates:</b> 09/08-10/30/2023	<b>EUT Type:</b> Portable Handset	Page 71 of 71