

## HEARING AID COMPATIBILITY

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do 16677, Korea

**Date of Testing:**  
 10/16/2023 – 10/30/2023  
**Test Site/Location:**  
 Element Washington DC LLC,  
 Columbia, MD, USA  
**Test Report Serial No.:**  
 1M2309070100-20-R4.A3L  
**Date of Issue:**  
 11/10/2023

|                   |                                      |
|-------------------|--------------------------------------|
| <b>FCC ID:</b>    | <b>A3LSMA156U</b>                    |
| <b>APPLICANT:</b> | <b>SAMSUNG ELECTRONICS CO., LTD.</b> |

**Scope of Test:** Volume Control Testing  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §20.19(b)  
**HAC Standard/ Guidance:** ANSI C63.19-2019  
 ANSI/TIA-5050-2018  
 285076 D01 HAC Guidance v06  
 285076 D04 Volume Control v02  
 285076 D05 CG Interim Waiver DA 23-914 v01

**DUT Type:** Portable Handset  
**Model:** SM-A156U  
**Additional Model(s):** SM-A156U1/DS, SM-S156V  
**Test Device Serial No.:** Sample [S/N: 2074M]

|                                 |             |
|---------------------------------|-------------|
| <b>C63.19-2019 HAC Verdict:</b> | <b>PASS</b> |
|---------------------------------|-------------|


Note: This revised Test Report (S/N: 1M2309070100-20-R4.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible, specified in ANSI/IEEE Std. C63.19-2019 and ANSI/TIA- 5050-2018 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 RJ Ortanez  
 Executive Vice President




|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 1 of 58                      |

# TABLE OF CONTENTS

---

|     |                                                      |    |
|-----|------------------------------------------------------|----|
| 1.  | INTRODUCTION .....                                   | 3  |
| 2.  | DUT DESCRIPTION.....                                 | 4  |
| 3.  | ANSI C63.19-2019 PERFORMANCE CATEGORIES .....        | 6  |
| 4.  | METHOD OF MEASUREMENT .....                          | 8  |
| 5.  | FCC 2G & 3G MEASUREMENTS.....                        | 18 |
| 6.  | VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION .....  | 19 |
| 7.  | VONR TEST SYSTEM SETUP AND DUT CONFIGURATION.....    | 21 |
| 8.  | VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION ..... | 23 |
| 9.  | INTERIM WAIVER DA 23-914 .....                       | 25 |
| 10. | VOLUME CONTROL TEST SUMMARY .....                    | 26 |
| 11. | MEASUREMENT UNCERTAINTY .....                        | 30 |
| 12. | EQUIPMENT LIST.....                                  | 31 |
| 13. | TEST DATA.....                                       | 32 |
| 14. | CALIBRATION CERTIFICATES.....                        | 47 |
| 15. | CONCLUSION.....                                      | 54 |
| 16. | REFERENCES .....                                     | 55 |
| 17. | TEST SETUP PHOTOGRAPHS .....                         | 57 |

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 2 of 58                      |

# 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658<sup>1</sup> to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

## Compatibility Tests Involved:


The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index
- T-coil mode, acoustic-signal conversational gain in the audio band
- T-coil mode, acoustic-signal frequency response through the audio band
- T-coil mode, acoustic-signal distortion through audio band
- Volume Control, receive volume control performance
- Volume Control, receive distortion and noise performance
- Volume Control, receive acoustic frequency response performance

The hearing aid may be measured for:


- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.

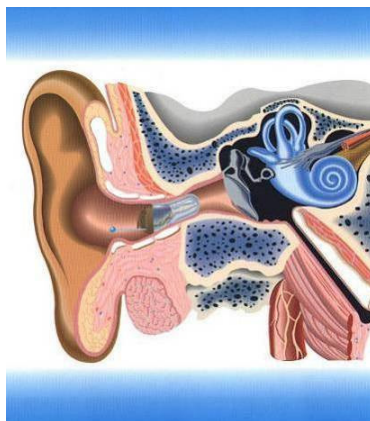

**Figure 1-1 Hearing Aid *in-vitu***

<sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 3 of 58                      |

## 2. DUT DESCRIPTION


FCC ID: A3LSMA156U  
Applicant: Samsung Electronics Co., Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do 16677, Korea  
Model: SM-A156U  
Additional Model(s): SM-A156U1/DS, SM-S156V  
Serial Number: 2074M  
HW Version: REV1.0  
SW Version: A156U.001  
Antenna: Internal Antenna  
DUT Type: Portable Handset

### I. LTE Band Selection

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of one LTE band falls completely within another LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range. However, overlapped LTE bands which are anchor bands for dual connectivity (EN-DC) scenarios between LTE and NR were evaluated as independent LTE bands.


### II. NR Band Selection

This device supports NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an NR band falls completely within an NR band with a larger transmission frequency range, both NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both NR bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range.

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 4 of 58                      |

**Table 2-1  
HAC Air Interfaces**

| Air-Interface                                                                                                                             | Band (MHz)      | Type Transport | HAC Tested                                                                                                                                                                                                                                                                                                                                                    | Simultaneous But Not Tested | Name of Voice Service | Audio Codec Evaluated       |
|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------|-----------------------------|
| GSM                                                                                                                                       | 850             | VO             | Yes <sup>1</sup>                                                                                                                                                                                                                                                                                                                                              | Yes: WIFI or BT             | CMRS Voice            | EFR                         |
|                                                                                                                                           | 1900            |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| UMTS                                                                                                                                      | 850             | VD             | Yes <sup>1</sup>                                                                                                                                                                                                                                                                                                                                              | Yes: WIFI or BT             | CMRS Voice            | NB AMR, WB AMR              |
|                                                                                                                                           | 1700            |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1900            |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| LTE (FDD)                                                                                                                                 | 680 (B71)       | VD             | Yes <sup>1,2</sup>                                                                                                                                                                                                                                                                                                                                            | Yes: NR, WIFI or BT         | VoLTE                 | VoLTE: NB AMR, WB AMR, EVS  |
|                                                                                                                                           | 700 (B12)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 780 (B13)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 790 (B14)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 850 (B5)        |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 850 (B26)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1700 (B4)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1700 (B66)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1900 (B2)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1900 (B25)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 2300 (B30)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| 2500 (B7)                                                                                                                                 |                 |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| LTE (TDD)                                                                                                                                 | 2600 (B41)      | VD             | Yes <sup>1,2</sup>                                                                                                                                                                                                                                                                                                                                            | Yes: NR, WIFI or BT         | VoLTE                 | VoLTE: NB AMR, WB AMR, EVS  |
|                                                                                                                                           | 2600 (B38)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 3600 (B48)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| NR (FDD)                                                                                                                                  | 680 (n71)       | VD             | Yes <sup>1,2</sup>                                                                                                                                                                                                                                                                                                                                            | Yes: LTE, WIFI or BT        | VoNR                  | VoNR: NB AMR, WB AMR, EVS   |
|                                                                                                                                           | 850 (n5)        |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1700 (n70)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1700 (n66)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1900 (n2)       |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 1900 (n25)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| NR (TDD)                                                                                                                                  | 2600 (n41)      | VD             | Yes <sup>1,2</sup>                                                                                                                                                                                                                                                                                                                                            | Yes: LTE, WIFI or BT        | VoNR                  | VoNR: NB AMR, WB AMR, EVS   |
|                                                                                                                                           | 3500 (n77, DoD) |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 3500 (n78, DoD) |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 3600 (n78)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 3600 (n48)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 3750 (n78)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 3800 (n77)      |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| WIFI                                                                                                                                      | 2450            | VD             | Yes <sup>1,2</sup>                                                                                                                                                                                                                                                                                                                                            | Yes: GSM, UMTS, LTE, or NR  | VoWIFI                | VoWIFI: NB AMR, WB AMR, EVS |
|                                                                                                                                           | 5200 (U-NII 1)  |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 5300 (U-NII 2A) |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 5500 (U-NII 2C) |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
|                                                                                                                                           | 5800 (U-NII 3)  |                |                                                                                                                                                                                                                                                                                                                                                               |                             |                       |                             |
| BT                                                                                                                                        | 2450            | DT             | No                                                                                                                                                                                                                                                                                                                                                            | Yes: GSM, UMTS, LTE, or NR  | N/A                   | N/A                         |
| Type Transport<br>VO = Voice Only<br>DT = Digital Data - Not intended for Voice Services<br>VD = CMRS and/or IP Voice over Data Transport |                 |                | Notes:<br>1. According to FCC guidance and waiver DA 23-914, all CMRS codecs supported by the model are tested for Conversational Gain.<br>2. According to FCC guidance and waiver DA 23-914, manufacturer has chosen NB EVS 24.4KBPS and WB EVS 24.4KBPS audio codecs and bitrate supported on this device for Frequency Response and Distortion evaluation. |                             |                       |                             |

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 5 of 58                      |

### 3. ANSI C63.19-2019 PERFORMANCE CATEGORIES

#### I. Acoustic Coupling Requirements

According to ANSI C63.19-2019 §7, devices shall comply with ANSI/TIA-5050-2018 in order to comply with C63.19-2019. No additional requirements are imposed and no special allowances are made regarding testing to and compliance with ANSI/TIA-5050-2018.

#### II. ANSI/TIA-5050-2018 Volume Control

All Volume Control requirements (i.e., Volume Control, Distortion and Noise, and Frequency Response) shall be met for at least one volume control setting for narrowband as well as wideband (as applicable) per §5. All testing shall be performed with both a 2N mounting force and an 8N mounting force. The passing volume control setting may be different between narrowband and wideband tests as well as between 2N and 8N tests, but the setting may not change within a test in order to pass the separate performance criteria.

Note: The test data margins indicate a margin from the limit for compliance.

##### 1. Receive Volume Control Performance


With a mounting force of 8N, the EUT shall have a Conversational Gain of  $\geq 18$ dB per §5.1.1, and with a mounting force of 2N, the EUT shall have a Conversational Gain of  $\geq 6$ dB per ANSI/TIA-5050-2018 §5.1.1.

##### 2. Receive Distortion and Noise Performance

With a mounting force of 8N and 2N, the Pulsed Noise Signal-to-Distortion Ratio (PN-SDNR) of the stimulus signal to the 100Hz to 8kHz total distortion and noise shall be  $\geq 20$ dB when tested over the applicable 1/3 octave band center frequencies per ANSI/TIA-5050-2018 §5.2.1. For narrowband, the applicable 1/3 octave band center frequencies are those from 400Hz to 3.15kHz; for wideband, the applicable 1/3 octave band center frequencies are those from 250Hz to 5kHz.


##### 3. Receive Acoustic Frequency Response Performance

With a mounting force of 8N and 2N, the receive frequency response, as measured at the DRP in 1/12 octave bands and after translation to the diffuse field or free field, shall fall between the applicable upper and lower limits per ANSI/TIA-5050-2018 §5.3.1. See below for narrowband limits (Table 3-1 and Figure 3-1) and wideband limits (Table 3-2 and Figure 3-2).

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 6 of 58                      |

**Table 3-1  
Narrowband Receive Frequency Response Limits**


| Lower Limit Frequency (Hz) | Lower Limit (dB) | Upper Limit Frequency (Hz) | Upper Limit (dB) |
|----------------------------|------------------|----------------------------|------------------|
| 300                        | -6               | 100                        | +6               |
| 3400                       | -6               | 4000                       | +6               |

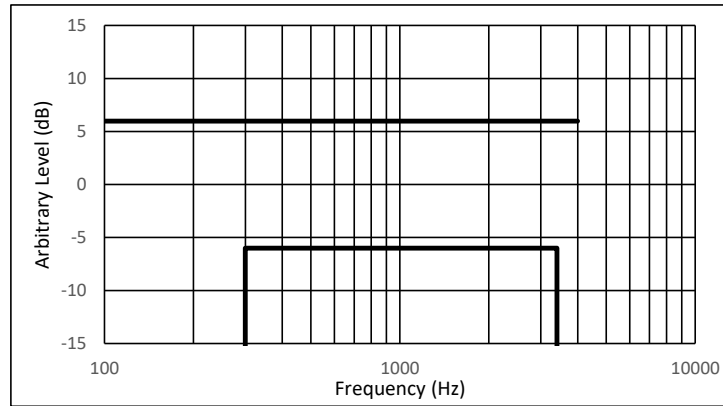

**Figure 3-1  
Narrowband Receive Frequency Response Limits**

**Table 3-2  
Wideband Receive Frequency Response Limits**

| Lower Limit Frequency (Hz) | Lower Limit (dB) | Upper Limit Frequency (Hz) | Upper Limit (dB) |
|----------------------------|------------------|----------------------------|------------------|
| 200                        | -10              | 100                        | +6               |
| 300                        | -6               | 1000                       | +6               |
| 5000                       | -6               | 2000                       | +8               |
| 6000                       | -12              | 8000                       | +8               |

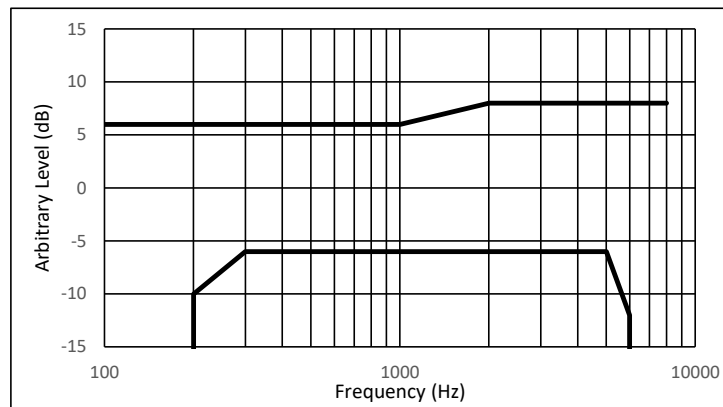


**Figure 3-2  
Wideband Receive Frequency Response Limits**

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 7 of 58                      |


# 4. METHOD OF MEASUREMENT

## I. Test Setup


The equipment was connected as shown in an RF-shielded chamber:

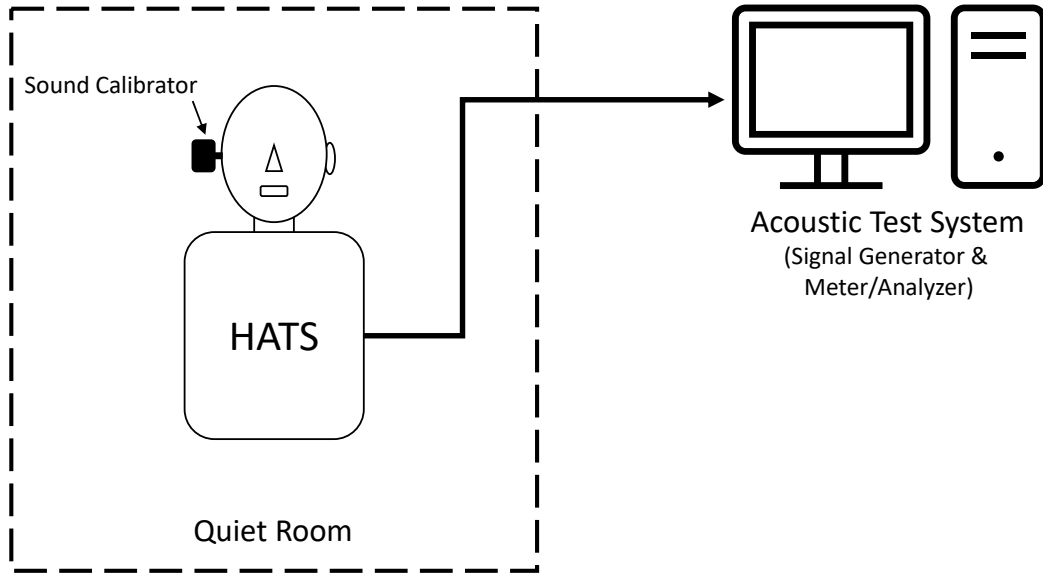

**Figure 4-1**  
**Verification Setup with Sound Calibrator**

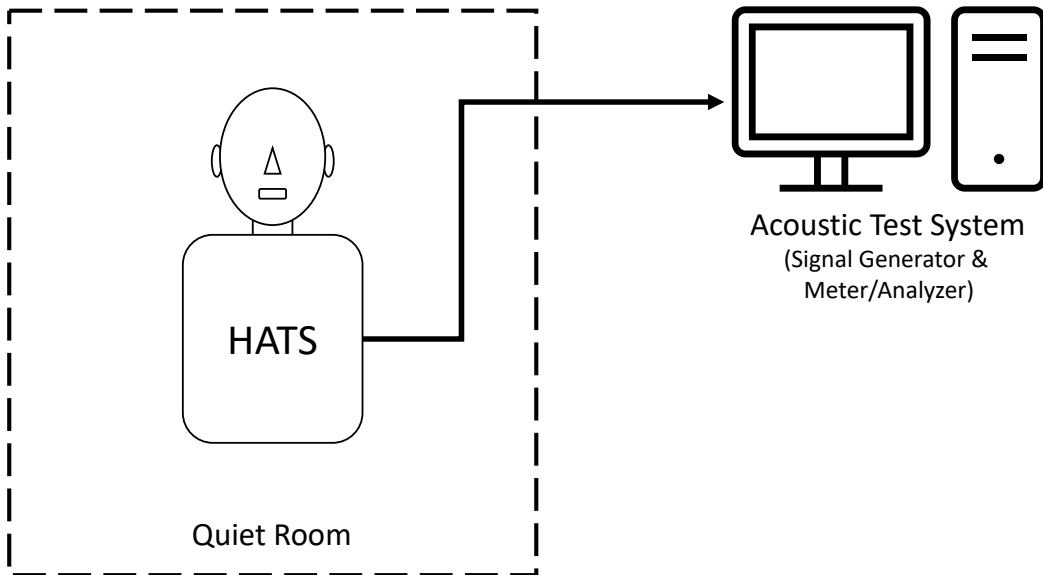

**Figure 4-2**  
**Ambient Noise Verification Setup**

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 8 of 58                      |



## II. Head and Torso Simulator


|                                 |                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Manufacturer:                   | Brüel & Kjær                                                                                                                                                                                                       |
| Model:                          | Type 4128-D                                                                                                                                                                                                        |
| Frequency Response:             | Conforms to ITU-T Rec. P.58<br>up to 16 kHz                                                                                                                                                                        |
| Ear Simulator:                  | ITU-T Rec. P.57 Type 3.3-<br>based calibrated ear simulator<br>complying with ITU-T Rec. P.57                                                                                                                      |
| Ear Simulator Output:           | 7-core, 3 m cable terminated<br>with a Lemo® (1B) plug                                                                                                                                                             |
| Pressure-field<br>Response:     | $\pm 1$ dB from 5 Hz to 7 kHz<br>$\pm 3$ dB from 3.15 Hz to 20 kHz                                                                                                                                                 |
| Typical Noise Level             | 19 dBA at DRP                                                                                                                                                                                                      |
| Pinna Simulator:                | Compliant with ITU-T Rec. P.58                                                                                                                                                                                     |
| Total Head and Torso<br>Height: | 695mm                                                                                                                                                                                                              |
| HATS Dimensions:                | Main dimensions comply with<br>the dimensional requirements of<br>ITU-T Rec. P.58                                                                                                                                  |
| Handset Positioner:             | Brüel & Kjær Type 4606                                                                                                                                                                                             |
| Positioner Angles:              | Variable positions; $\angle A$ adjustable from $+15^\circ$ to $+35^\circ$ , $\angle B$ adjustable from $+30^\circ$ to $-10^\circ$ , $\angle C$ adjustable from $+20^\circ$ to $-20^\circ$ ; $0.5^\circ$ resolution |
| Applied Ear Force:              | Mounting force can be adjusted from 0 to 18 N                                                                                                                                                                      |




**Figure 4-3**  
Heat and Torso Simulator  
(with Handset Positioner)

## III. IEEE Std 269 Uncompressed Real Male Speech

|                         |                                                |
|-------------------------|------------------------------------------------|
| Manufacturer:           | IEEE                                           |
| Active Frequency Range: | 100 Hz – 8 kHz                                 |
| Stimulus Type:          | Multi-talker speech signal, four male speakers |
| Single Sample Duration: | 12 seconds                                     |
| Activity Level:         | 84%                                            |

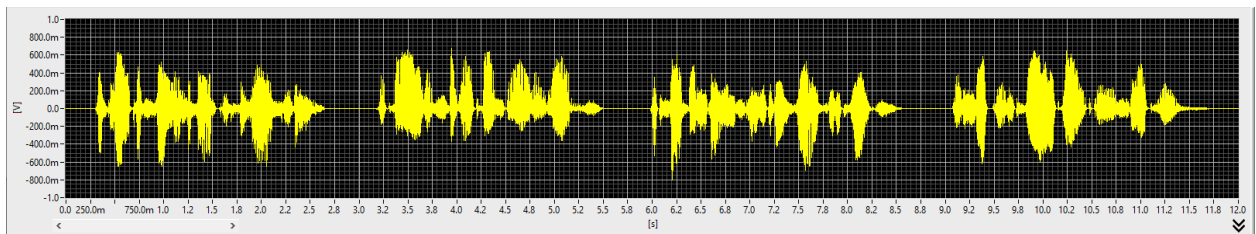

**Figure 4-4**  
Temporal Characteristic of full IEEE 269

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 9 of 58                      |

Volume Control Measurement Block Diagrams:

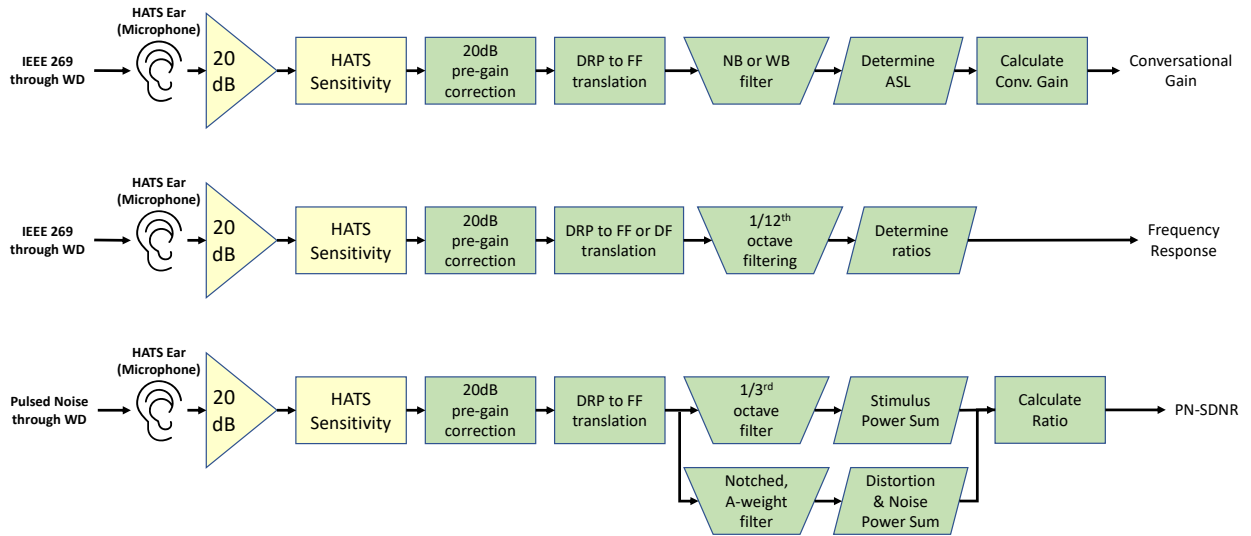


Figure 4-5 Acoustic Measurement Processing Steps

IV. Test Procedure

1. Ambient Noise Check per ANSI/TIA-5050-2018 §3.1 (See Figure 4-2)
  - a. Ambient noise was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/12 octave filtering.
  - b. “A-weighting” was applied to the measurements per the definition of a “quiet room” in ANSI/TIA-5050-2018. Below is the verification of the system processing A-weighting between system input to output within 0.5 dB of the theoretical result:

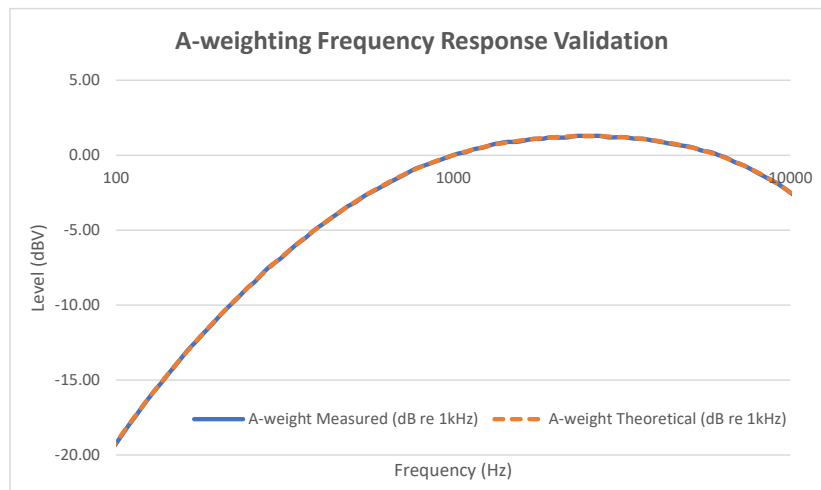



Figure 4-6 A-weighting Frequency Response Validation

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 10 of 58                     |

**Table 4-1  
A-weighting Frequency Response Validation**

| f (Hz) | A-weight Measured (dB re 1kHz) | A-weight Theoretical (dB re 1kHz) | Deviation (dB) | f (Hz) | A-weight Measured (dB re 1kHz) | A-weight Theoretical (dB re 1kHz) | Deviation (dB) |
|--------|--------------------------------|-----------------------------------|----------------|--------|--------------------------------|-----------------------------------|----------------|
| 97.2   | -19.63                         | -19.54                            | -0.09          | 1030   | 0.10                           | 0.09                              | 0.01           |
| 103    | -18.81                         | -18.74                            | -0.07          | 1090   | 0.20                           | 0.25                              | -0.05          |
| 109    | -18.01                         | -17.97                            | -0.04          | 1150   | 0.40                           | 0.38                              | 0.02           |
| 115    | -17.31                         | -17.26                            | -0.05          | 1220   | 0.50                           | 0.52                              | -0.02          |
| 122    | -16.51                         | -16.50                            | -0.01          | 1300   | 0.70                           | 0.66                              | 0.04           |
| 130    | -15.71                         | -15.70                            | -0.01          | 1370   | 0.80                           | 0.76                              | 0.04           |
| 137    | -15.11                         | -15.06                            | -0.05          | 1450   | 0.89                           | 0.85                              | 0.04           |
| 145    | -14.41                         | -14.38                            | -0.03          | 1540   | 0.89                           | 0.94                              | -0.05          |
| 154    | -13.71                         | -13.68                            | -0.03          | 1630   | 0.99                           | 1.02                              | -0.03          |
| 163    | -13.01                         | -13.04                            | 0.03           | 1730   | 1.09                           | 1.08                              | 0.01           |
| 173    | -12.40                         | -12.38                            | -0.02          | 1830   | 1.09                           | 1.14                              | -0.05          |
| 183    | -11.80                         | -11.77                            | -0.03          | 1940   | 1.19                           | 1.18                              | 0.01           |
| 194    | -11.20                         | -11.16                            | -0.04          | 2050   | 1.18                           | 1.22                              | -0.04          |
| 205    | -10.60                         | -10.60                            | 0.00           | 2180   | 1.19                           | 1.24                              | -0.05          |
| 218    | -10.00                         | -9.98                             | -0.02          | 2300   | 1.29                           | 1.26                              | 0.03           |
| 230    | -9.50                          | -9.46                             | -0.04          | 2440   | 1.29                           | 1.27                              | 0.02           |
| 244    | -8.90                          | -8.90                             | 0.00           | 2590   | 1.29                           | 1.27                              | 0.02           |
| 259    | -8.40                          | -8.35                             | -0.05          | 2740   | 1.29                           | 1.26                              | 0.03           |
| 274    | -7.80                          | -7.84                             | 0.04           | 2900   | 1.19                           | 1.24                              | -0.05          |
| 290    | -7.30                          | -7.35                             | 0.05           | 3070   | 1.20                           | 1.22                              | -0.02          |
| 307    | -6.90                          | -6.86                             | -0.04          | 3250   | 1.20                           | 1.18                              | 0.02           |
| 325    | -6.40                          | -6.39                             | -0.01          | 3450   | 1.10                           | 1.13                              | -0.03          |
| 345    | -5.90                          | -5.90                             | 0.00           | 3650   | 1.10                           | 1.08                              | 0.02           |
| 365    | -5.50                          | -5.46                             | -0.04          | 3870   | 1.00                           | 1.01                              | -0.01          |
| 387    | -5.00                          | -5.02                             | 0.02           | 4100   | 0.90                           | 0.93                              | -0.03          |
| 410    | -4.60                          | -4.59                             | -0.01          | 4340   | 0.80                           | 0.84                              | -0.04          |
| 434    | -4.20                          | -4.19                             | -0.01          | 4600   | 0.70                           | 0.73                              | -0.03          |
| 460    | -3.80                          | -3.79                             | -0.01          | 4870   | 0.61                           | 0.61                              | 0.00           |
| 487    | -3.40                          | -3.42                             | 0.02           | 5160   | 0.51                           | 0.48                              | 0.03           |
| 516    | -3.10                          | -3.05                             | -0.05          | 5460   | 0.31                           | 0.33                              | -0.02          |
| 546    | -2.70                          | -2.71                             | 0.01           | 5790   | 0.21                           | 0.16                              | 0.05           |
| 579    | -2.40                          | -2.37                             | -0.03          | 6130   | 0.01                           | -0.02                             | 0.03           |
| 613    | -2.10                          | -2.05                             | -0.05          | 6490   | -0.19                          | -0.22                             | 0.03           |
| 649    | -1.80                          | -1.75                             | -0.05          | 6880   | -0.49                          | -0.45                             | -0.04          |
| 688    | -1.50                          | -1.47                             | -0.03          | 7290   | -0.69                          | -0.70                             | 0.01           |
| 729    | -1.20                          | -1.20                             | 0.00           | 7720   | -0.99                          | -0.97                             | -0.02          |
| 772    | -0.90                          | -0.94                             | 0.04           | 8180   | -1.30                          | -1.26                             | -0.04          |
| 818    | -0.70                          | -0.71                             | 0.01           | 8660   | -1.59                          | -1.58                             | -0.01          |
| 866    | -0.50                          | -0.49                             | -0.01          | 9170   | -1.89                          | -1.92                             | 0.03           |
| 917    | -0.30                          | -0.28                             | -0.02          | 9720   | -2.29                          | -2.30                             | 0.01           |
| 972    | -0.10                          | -0.09                             | -0.01          | 10300  | -2.69                          | -2.70                             | 0.01           |


- c. The ambient room noise is a power sum of the A-weighted spectrum from 100-10,000 Hz. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level. Therefore, the setup in this step was used to verify the power sum post-processing for measurements. See below block diagram:

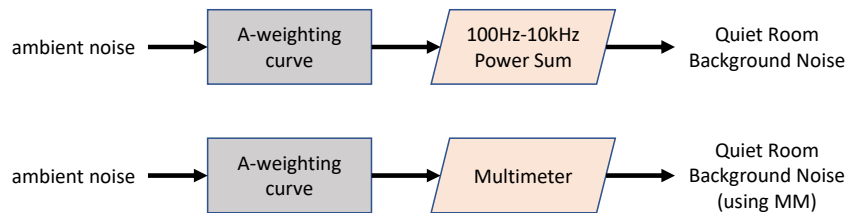

**Figure 4-7  
Power Sum Validation Block Diagram**

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 11 of 58                     |

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

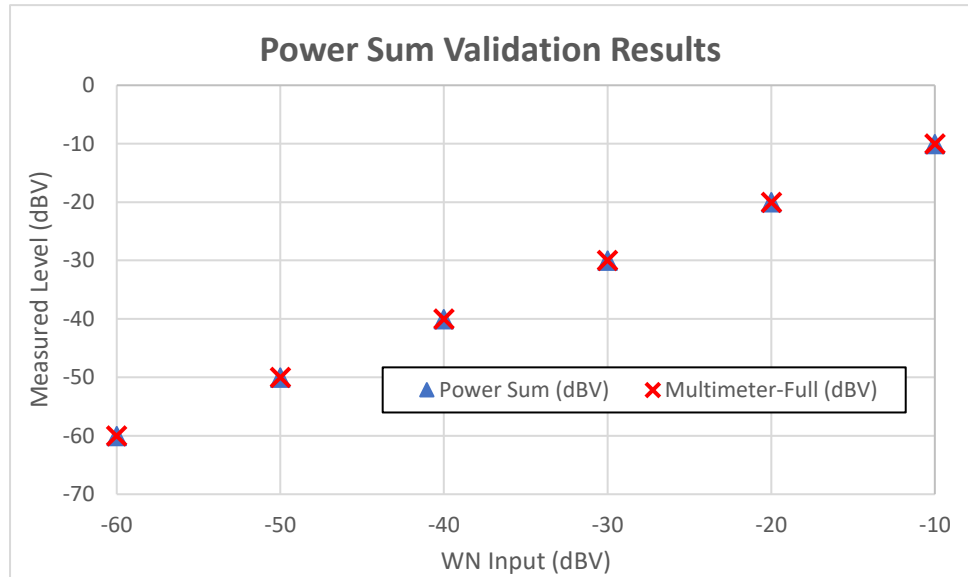


**Figure 4-8**  
**Power Sum Validation Results**

**Table 4-2**  
**Power Sum Validation Results**

| WN Input (dBV) | Power Sum (dBV) | Multimeter-Full (dBV) | Dev (dB) |
|----------------|-----------------|-----------------------|----------|
| -60            | -60.05          | -60.03                | 0.02     |
| -50            | -50.04          | -50.03                | 0.01     |
| -40            | -40.04          | -40.02                | 0.02     |
| -30            | -30.04          | -30.02                | 0.02     |
| -20            | -20.05          | -20.03                | 0.02     |
| -10            | -10.05          | -10.03                | 0.02     |

- d. The maximum room noise inside the quiet room was recorded and verified to be less than or equal to 40dBA.
2. Measurement System Validation (See Figure 4-1)
    - a. The measurement system including the HATS, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
    - b. HATS Sensitivity Verification
 

A pure tone of 1kHz was applied into the HATS ear (microphone) using a calibrated sound calibrator. The sound calibrator generates an expected sound pressure level of 97.1dB SPL at the HATS ear which was used to verify the measured signal from the HATS. This measured value was verified to be within  $\pm 0.2$ dB of the 97.1dB SPL expected value (see Page 29).
  3. Measurement Test Setup
    - a. Positioning DUT in HATS

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 12 of 58                     |

- i. According to ANSI/TIA-5050-2018 §4.2, a HATS which is ITU-T P.58 compliant and an ear simulator which is ITU-T P.57 type 3.3 compliant are used for Volume Control testing.
  - ii. Per ANSI/TIA-5050-2018 §4.3, the DUT is positioned on the HATS in the standard test position according to IEEE Std 269 or, alternatively, a recommended test position specified by the manufacturer. Manufacturer recommended positions must comply with the recommended test position requirements in IEEE Std 269 and, if used, are noted in this report.
  - iii. The DUT is mounted such that a certain force, in Newtons, is applied when the DUT is placed against the artificial pinna. ANSI/TIA-5050-2018 specifies a mounting force of either 2N or 8N, depending on the test. Mounting force is indicated for each test in this report.
- b. Speech Signal Setup and Analysis
- i. For testing in this report, the test signal is the uncompressed real male speech as published with IEEE Std 269 unless otherwise specified.
  - ii. The test signal is used with an Active Speech Level (ASL) of -20dBm0, and analysis is performed with 1/12 octave bands averaged over one complete sequence of the test signal unless otherwise specified.
  - iii. The acoustic listener reference point for testing is the Free Field (FF) for Conversational Gain and PN-SDNR measurements. For Frequency Response (FR) measurements, the acoustic listener reference point is either the Free Field (FF) or the Diffuse Field (DF); the chosen acoustic listener reference point for FR measurements in this report is indicated for each test.
  - iv. Per the Spring 2021 TCB Workshop, all supported audio voice codecs are tested for the DUT. For each codec, narrowband and wideband modes are tested if supported. For narrowband modes, a source coding bit-rate of 12.2 kbps, or the closest available setting, is used. For wideband modes, a source coding bit-rate of 12.65 kbps, or the closest available setting, is used.
- c. DUT Radio Configuration
- i. Each supported codec may be tested with any air interface which supports the codec being tested. Air interfaces used for testing in this report are noted with each test.


#### 4. Measurement Data Analysis

##### a. Conversational Gain


- i. With the DUT at its maximum volume control setting and tone control set such that the DUT meets the FR requirements, the test signal is applied to the DUT, and the resulting acoustic output is measured at the Drum Reference Point (DRP). A lower volume setting may be used if needed to meet the PN-SDNR requirements.
- ii. The appropriate post processing is applied according to the system processing chain shown in Figure 4-5, and the Conversational Gain is determined.
- iii. Conversational Gain is tested with both 8N and 2N mounting force.

##### b. PN-SDNR


- i. The DUT is tested for distortion using PN-SDNR which is the ratio of the signal power to the full, A-weighted distortion and noise power of the DUR output (in dB).
- ii. The pulsed noise stimulus signal is a combination of the real speech test signal followed by a series of pink noise pulses from a 1/3 octave band. A stimulus signal is generated for each 1/3 octave band centered within the applicable frequency range for either narrowband or wideband.
- iii. Each stimulus signal is applied to the DUT, and the resulting acoustic output is measured at the DRP.

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 13 of 58                     |

- iv. The appropriate post processing is applied according to the system processing chain shown in Figure 4-5, and the PN-SDNR is determined by subtracting the full, A-weighted distortion and noise power, from the signal power, in This process is repeated to determine the PN-SDNR for all applicable 1/3 octave band center frequencies.
  - v. PN-SDNR is tested with both 8N and 2N mounting force and may be repeated at volume levels below maximum if needed to get passing results. Note that Conversational Gain must still receive passing results while at the lower volume level if such a lower level is used for PN-SDNR compliance.
- c. Frequency Response
- i. Frequency response is measured with respect to the appropriate curves from either Figure 3-1, for narrowband modes, or Figure 3-2, for wideband modes. The measurement is taken over one full sequence of the test signal, although a delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
  - ii. The appropriate post processing is applied according to the system processing chain shown in Figure 4-5, and the FR is determined. All 1/12 octave band center frequencies were plotted and aligned with respect to the applicable mask in a floating, or best fit, fashion.
  - iii. FR is tested with both 8N and 2N mounting force and may be repeated with tone control settings other than default if needed to get passing results. Note that Conversational Gain must still receive passing results while using the non-default tone control settings if such non-default settings are used for FR compliance.
- d. Speech Signal Setup to Base Station Simulator
- i. See Section 6 and 8 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE) and Voice Over WIFI (VoWIFI) testing.
  - ii. See Section 7 for more information regarding CMX500 audio level settings for Voice Over NR (VoNR).
- e. WD Radio Configuration Selection
- i. The device was chosen to be tested in the default test configuration (See Section 5 for more information regarding worst-case configurations for GSM and UMTS. LTE configuration information can be found in Section 6. NR configuration information can be found in Section 7. WIFI configuration information can be found in Section 8.)

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 14 of 58                     |

## V. Test Setup

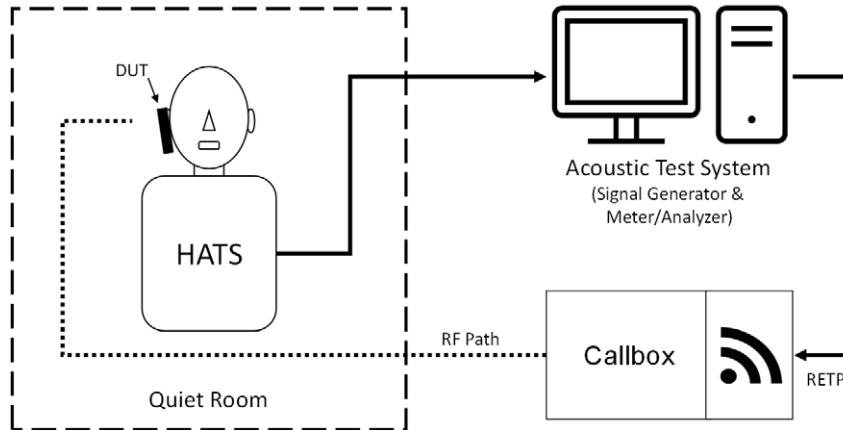

**Figure 4-9**  
**Volume Control Test Setup**


Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

## VI. Deviation from ANSI/TIA-5050-2018 Test Procedure

Deviation from ANSI/TIA-5050-2018 Test Procedure to indicate guidance in FCC HAC waiver was followed.

## VII. Air Interface Technologies Tested

According to ANSI/TIA-5050-2018, any air interface which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications may be chosen for Volume Control testing. According to the Spring 2021 TCB Workshop, all voice codecs supported by the DUT must be tested for Volume Control. The air interfaces used during testing were chosen such that all voice codecs supported by the DUT were able to be tested. See Table 2-1 for more details regarding which modes were tested.

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 15 of 58                     |

## VIII. Wireless Device Channels and Frequencies

### 1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. The middle channel for each supported band was tested to confirm that results between bands are substantially similar. More information on default test configuration chosen for testing can be found in Section 5.

**Table 4-3  
Center Channels and Frequencies**

| Test frequencies & associated channels |                 |
|----------------------------------------|-----------------|
| Channel                                | Frequency (MHz) |
| <b>Cellular 850</b>                    |                 |
| 190 (GSM)                              | 836.60          |
| 4183 (UMTS)                            | 836.60          |
| <b>AWS 1750</b>                        |                 |
| 1412 (UMTS)                            | 1730.40         |
| <b>PCS 1900</b>                        |                 |
| 661 (GSM)                              | 1880            |
| 9400 (UMTS)                            | 1880            |

### 2. 4G (LTE) Modes


The middle channel for every band was tested for conversational gain to confirm that the band configuration for VoLTE over IMS does not substantially affect the results. The default band was additionally tested for Frequency Response and Distortion. More information on default LTE test configuration chosen for testing can be found in Section 6. See Table 10-4 for full volume control evaluation.

### 3. 5G (NR) Modes

The middle channel for every band was tested for conversational gain to confirm that the band configuration for VoNR over IMS does not substantially affect the results. The default band was additionally tested for Frequency Response and Distortion. More information on default NR test configuration chosen for testing can be found in Section 7. See Table 10-5 for full volume control evaluation.

### 4. WIFI


The middle channel for each IEEE 802.11 standard was tested for conversational gain to confirm that the standard and data rate configuration for VoWIFI over IMS does not substantially affect the results. The 2.4GHz IEEE802.11b was additionally tested for Frequency Response and Distortion. More information on default WIFI test configuration chosen for testing can be found in Section 8. See Table 10-6 for full volume control evaluation.

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 16 of 58                     |




## IX. Test Flow

The flow diagram below was followed:

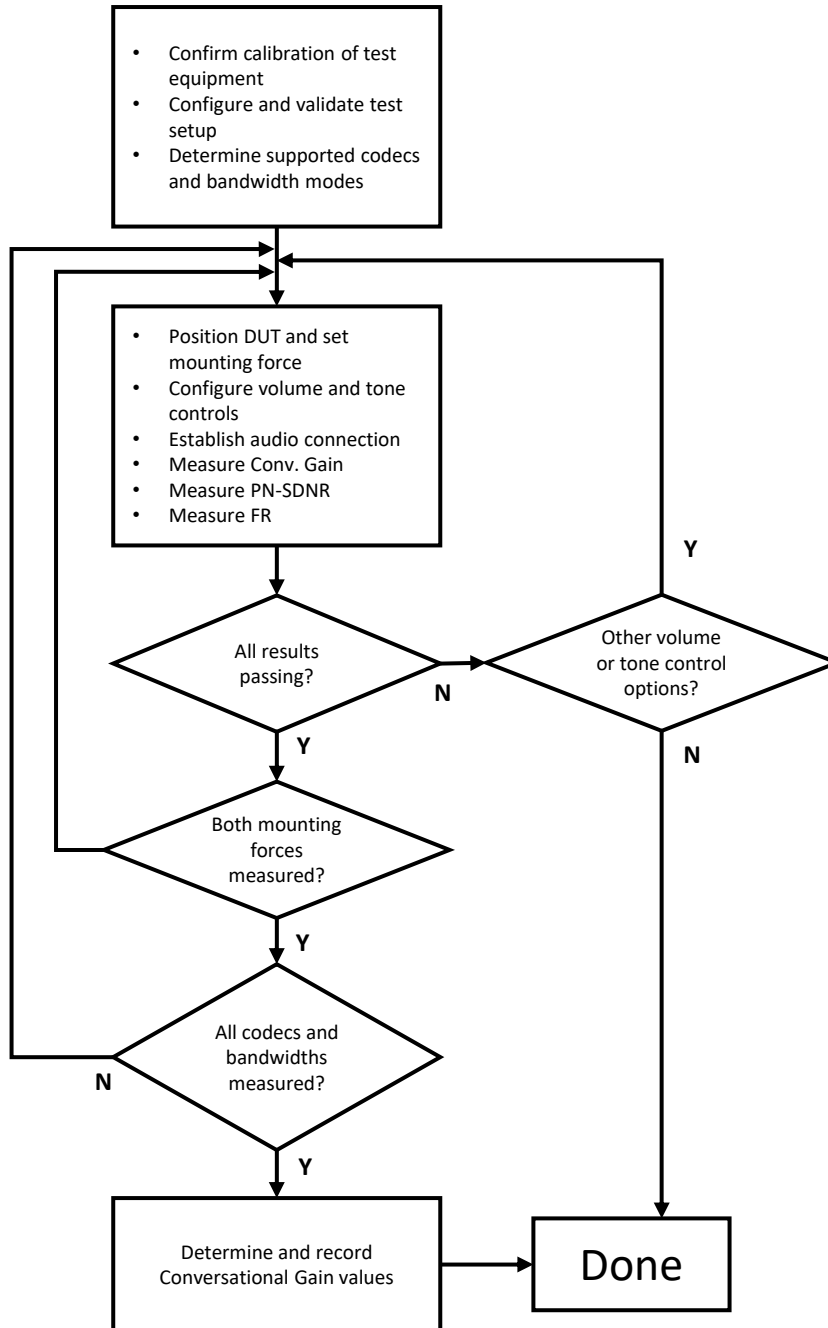

**Figure 4-10**  
**C63.19 Volume Control Test Process**

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 17 of 58                     |

## 5. FCC 2G & 3G MEASUREMENTS

### I. GSM Test Configurations

#### 1. Band Configuration

An investigation was performed to ensure the GSM band used for testing does not substantially affect the measurement results. GSM EFR FR V1 codec was used for this evaluation. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. See below table for comparisons between different bands:

**Table 5-1  
GSM Results by Band**

| Mode    | Channel | HAC Mode | Mounting Force (N) | Traffic Mode | Codec Bandwidth | Volume Level | Ambient Noise (dBA) | Conversational Gain (CG) (dB) | FCC CG Limit (dB) | CG Margin dB | Verdict |
|---------|---------|----------|--------------------|--------------|-----------------|--------------|---------------------|-------------------------------|-------------------|--------------|---------|
| GSM850  | 190     | On       | 2                  | FR V1        | NB              | MAX -1       | 31.23               | 19.63                         | 6.00              | 13.63        | Pass    |
| GSM1900 | 661     | On       | 2                  | FR V1        | NB              | MAX -1       | 31.23               | 19.21                         | 6.00              | 13.21        | Pass    |

- Mute off; Backlight off; Max Volume-1; Max Contrast
- Power Control Bits = GSM850: PCL=0, GSM1900: PCL=0;

### II. UMTS Test Configurations


#### 1. Radio Configuration

An investigation was performed to ensure that UMTS band used for testing does not substantially affect the measurement results. NB AMR 4.75KBPS, 13.6kbps SRB was used for this evaluation. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. See below table for comparisons between different bands:

**Table 5-2  
UMTS Results by Radio Configuration**

| Mode    | Channel | HAC Mode | Mounting Force (N) | Codec Bandwidth | Codec Bitrate (kbps) | Volume Level | Ambient Noise (dBA) | Conversational Gain (CG) (dB) | FCC CG Limit (dB) | CG Margin dB | Verdict |
|---------|---------|----------|--------------------|-----------------|----------------------|--------------|---------------------|-------------------------------|-------------------|--------------|---------|
| UMTS V  | 4183    | On       | 2                  | NB              | 4.75                 | MAX -1       | 31.23               | 18.86                         | 6.00              | 12.86        | Pass    |
| UMTS IV | 1412    | On       | 2                  | NB              | 4.75                 | MAX -1       | 31.23               | 18.80                         | 6.00              | 12.80        | Pass    |
| UMTS II | 9400    | On       | 2                  | NB              | 4.75                 | MAX -1       | 31.23               | 18.99                         | 6.00              | 12.99        | Pass    |

- Mute off; Backlight off; Max Volume-1; Max Contrast
- Power Control Bits = "All Up"


|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 18 of 58                     |

## 6. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

### I. Test System Setup for VoLTE over IMS T-coil Testing

#### 1. Equipment Setup


The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS Volume Control measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

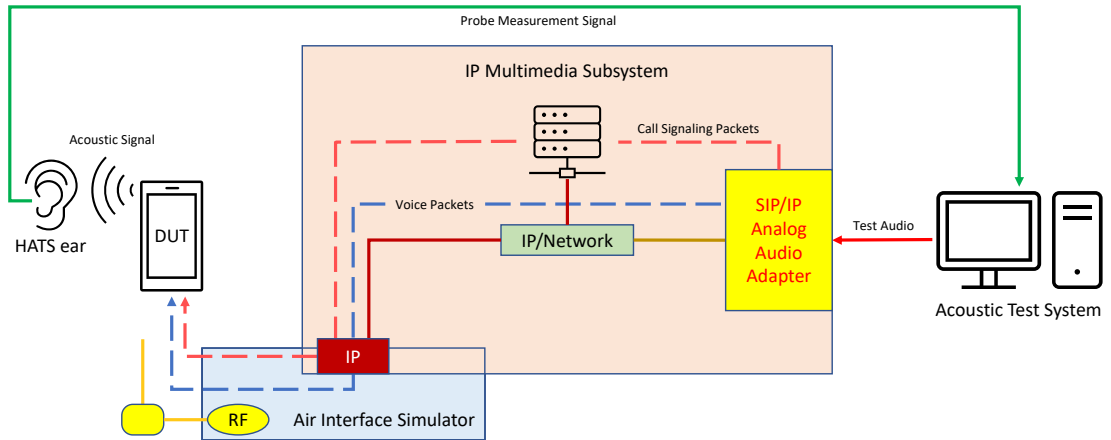

**Figure 6-1**  
**Test Setup for VoLTE over IMS Volume Control Measurements**

#### 2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for VoLTE over IMS Volume Control testing is -20dBm0 (ASL) and shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 (ASL) speech input level to the DUT for the VoLTE over IMS connection.

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 19 of 58                     |

## II. DUT Configuration for VoLTE over IMS Volume Control Testing

### 1. Radio Configuration

An investigation was performed to ensure the modulation and RB configuration used for testing do not substantially affect the measurement results. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 0RB offset was used as the default testing configuration for the handset given the results of this investigation. See below table for comparison between different radio configurations:

**Table 6-1**  
**VoLTE over IMS Results by Radio Configuration**


| Mode        | RF Bandwidth (MHz) | Radio Configuration | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|-------------|--------------------|---------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| LTE Band 66 | 20                 | QPSK/1RB/0RB offset | 132322  | On       | 2                  | EVS        | NB              | 24.4          | MAX -1       | DF              | 31.23               | 25.49                 | 1.90           | 18.59                         | 5.49                   | 6.00              | 12.59          | Pass    |
|             |                    | DF                  |         |          |                    |            |                 |               |              | 31.23           | 25.84               | 1.94                  | 18.60          | 5.84                          | 6.00                   | 12.60             | Pass           |         |
|             |                    | DF                  |         |          |                    |            |                 |               |              | 31.23           | 26.20               | 2.15                  | 18.57          | 6.20                          | 6.00                   | 12.57             | Pass           |         |
|             |                    | DF                  |         |          |                    |            |                 |               |              | 31.23           | 26.18               | 2.07                  | 18.57          | 5.18                          | 6.00                   | 12.57             | Pass           |         |
|             |                    | DF                  |         |          |                    |            |                 |               |              | 31.23           | 27.49               | 2.11                  | 18.62          | 7.49                          | 6.00                   | 12.62             | Pass           |         |
|             |                    | DF                  |         |          |                    |            |                 |               |              | 31.23           | 28.07               | 1.99                  | 18.60          | 8.07                          | 6.00                   | 12.60             | Pass           |         |

### 2. Band Configuration

An investigation was performed to ensure the LTE band used for testing does not substantially affect the measurement results. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. LTE B66 was used as the default test band for VoLTE over IMS Volume Control testing given the results of this investigation. See below table for comparisons between different bands:

**Table 6-2**  
**VoLTE over IMS Results by Band**

| Mode              | Antenna Config | RF Bandwidth (MHz) | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Ambient Noise (dBA) | Conversational Gain (CG) (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|-------------------|----------------|--------------------|---------|----------|--------------------|------------|-----------------|---------------|---------------------|-------------------------------|-------------------|----------------|---------|
| LTE Band 71       | A              | 20                 | 133297  | On       | 2                  | EVS        | NB              | 24.4          | 31.22               | 18.40                         | 6.00              | 12.40          | Pass    |
| LTE Band 12       | A              | 10                 | 23095   |          | 2                  |            |                 |               | 31.22               | 18.38                         | 6.00              | 12.38          | Pass    |
| LTE Band 13       | A              | 10                 | 23230   |          | 2                  |            |                 |               | 31.22               | 18.40                         | 6.00              | 12.40          | Pass    |
| LTE Band 14       | A              | 10                 | 23330   |          | 2                  |            |                 |               | 31.22               | 18.40                         | 6.00              | 12.40          | Pass    |
| LTE Band 26       | A              | 15                 | 26865   |          | 2                  |            |                 |               | 31.22               | 18.44                         | 6.00              | 12.44          | Pass    |
| LTE Band 66       | B              | 20                 | 132322  |          | On                 |            |                 |               | 2                   | EVS                           | NB                | 24.4           | 31.22   |
|                   | C              |                    |         | 2        |                    | 31.22      | 18.40           | 6.00          | 12.40               |                               |                   |                | Pass    |
| LTE Band 25       | B              | 20                 | 26365   | On       | 2                  | EVS        | NB              | 24.4          | 31.22               | 18.39                         | 6.00              | 12.39          | Pass    |
|                   | C              |                    |         |          | 2                  |            |                 |               | 31.22               | 18.51                         | 6.00              | 12.51          | Pass    |
| LTE Band 30       | B              | 10                 | 27710   | On       | 2                  | EVS        | NB              | 24.4          | 31.22               | 18.43                         | 6.00              | 12.43          | Pass    |
| LTE Band 7        | B              | 20                 | 21100   |          | 2                  |            |                 |               | 31.22               | 18.40                         | 6.00              | 12.40          | Pass    |
| LTE Band 41 (PC3) | B              | 20                 | 40620   |          | 2                  |            |                 |               | 31.22               | 18.58                         | 6.00              | 12.58          | Pass    |
| LTE Band 41 (PC2) | B              | 20                 | 40620   |          | 2                  |            |                 |               | 31.22               | 18.65                         | 6.00              | 12.65          | Pass    |
| LTE Band 48       | F              | 20                 | 55990   |          | 2                  |            |                 |               | 31.22               | 18.66                         | 6.00              | 12.66          | Pass    |


|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 20 of 58                     |

## 7. VONR TEST SYSTEM SETUP AND DUT CONFIGURATION

### I. Test System Setup for VoNR over IMS T-coil Testing

#### 1. Equipment Setup

The general test setup used for VoNR over IMS is shown below. The callboxes used when performing VoNR over IMS Volume Control measurements are a CMX500 and CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server. The CMX500 provided the baseband signal to perform NR signaling. An external USB audio interface is used to perform the A/D conversion and ensure proper speech input level to the DUT.

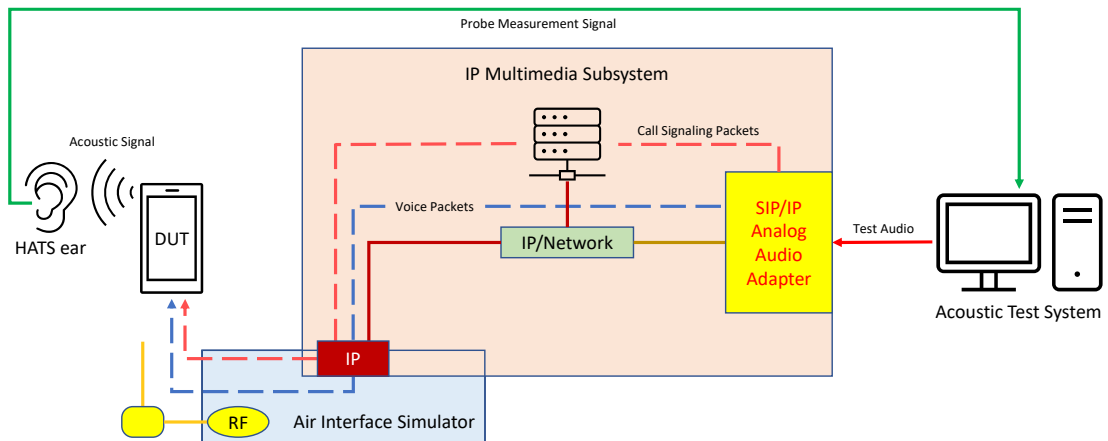

**Figure 7-1**  
**Test Setup for VoNR over IMS Volume Control Measurements**

#### 2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for VoNR over IMS Volume Control testing is -20dBm0 (ASL) and shall be used for the normal speech input level. The acoustic test system was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 (ASL) speech input level to the DUT for the VoNR over IMS connection.

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  | element                                | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 21 of 58                     |

## II. DUT Configuration for VoNR over IMS Volume Control Testing

### 1. Radio Configuration

An investigation was performed to ensure the waveform, modulation, and RB configuration used for testing do not substantially affect the measurement results. The effects of waveform, modulation, and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. DFT-s-OFDM, 16QAM, 1RB, 1RB offset was used as the default testing configuration for the handset given the results of this investigation. See below table for comparison between different radio configurations:

**Table 7-1  
VoNR over IMS Results by Radio Configuration – CP-OFDM**

| Mode   | RF Bandwidth (MHz) | Waveform | Radio Configuration | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|--------|--------------------|----------|---------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| NR n66 | 40                 | CP-OFDM  | QPSK/1RB/1RB offset | 349000  | On       | 2                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.22               | 28.68                 | 2.06           | 18.03                         | 6.68                   | 6.00              | 6.68           | PASS    |
|        |                    |          | DF                  |         |          |                    |            |                 |               |              | 31.22           | 28.62               | 2.37                  | 17.91          | 6.62                          | 6.00                   | 6.62              | PASS           |         |
|        |                    |          | DF                  |         |          |                    |            |                 |               |              | 31.22           | 27.35               | 2.53                  | 17.97          | 7.35                          | 6.00                   | 7.35              | PASS           |         |
|        |                    |          | DF                  |         |          |                    |            |                 |               |              | 31.22           | 26.59               | 2.49                  | 17.96          | 6.59                          | 6.00                   | 6.59              | PASS           |         |
|        |                    |          | DF                  |         |          |                    |            |                 |               |              | 31.22           | 26.88               | 2.50                  | 17.89          | 6.88                          | 6.00                   | 6.88              | PASS           |         |
|        |                    |          | DF                  |         |          |                    |            |                 |               |              | 31.22           | 27.18               | 2.59                  | 17.97          | 7.18                          | 6.00                   | 7.18              | PASS           |         |
|        |                    |          | DF                  |         |          |                    |            |                 |               |              | 31.22           | 26.55               | 2.47                  | 17.83          | 6.55                          | 6.00                   | 6.55              | PASS           |         |

**Table 7-2  
VoNR over IMS Results by Radio Configuration – DFT-s-OFDM**


| Mode   | RF Bandwidth (MHz) | Waveform   | Radio Configuration      | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|--------|--------------------|------------|--------------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| NR n66 | 40                 | DFT-s-OFDM | P1/2 BPSK/1RB/0RB offset | 349000  | On       | 2                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.22               | 26.55                 | 2.47           | 17.83                         | 6.55                   | 6.00              | 6.55           | PASS    |
|        |                    |            | DF                       |         |          |                    |            |                 |               |              | 31.22           | 26.87               | 2.69                  | 17.87          | 6.87                          | 6.00                   | 6.87              | PASS           |         |
|        |                    |            | DF                       |         |          |                    |            |                 |               |              | 31.22           | 27.09               | 2.67                  | 18.11          | 7.69                          | 6.00                   | 7.69              | PASS           |         |
|        |                    |            | DF                       |         |          |                    |            |                 |               |              | 31.22           | 27.35               | 2.88                  | 17.87          | 7.35                          | 6.00                   | 7.35              | PASS           |         |
|        |                    |            | DF                       |         |          |                    |            |                 |               |              | 31.22           | 27.09               | 2.68                  | 17.93          | 7.09                          | 6.00                   | 7.09              | PASS           |         |
|        |                    |            | DF                       |         |          |                    |            |                 |               |              | 31.22           | 26.51               | 2.60                  | 17.86          | 6.51                          | 6.00                   | 6.51              | PASS           |         |
|        |                    |            | DF                       |         |          |                    |            |                 |               |              | 31.22           | 26.85               | 2.59                  | 17.90          | 6.85                          | 6.00                   | 6.85              | PASS           |         |

### 2. Band Configuration

An investigation was performed to ensure the NR band used for testing does not substantially affect the measurement results. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. NR n66 was used as the default test band for VoNR over IMS Volume Control testing given the results of this investigation. See below table for comparisons between different bands:

**Table 7-3  
VoNR over IMS Results by Band**

| Mode             | Antenna Config | RF Bandwidth (MHz) | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Ambient Noise (dBA) | Conversational Gain (CG) (dB) | FCC CG Limit (dB) | FCC Margin from Limit (dB) | Verdict |
|------------------|----------------|--------------------|---------|----------|--------------------|------------|-----------------|---------------|---------------------|-------------------------------|-------------------|----------------------------|---------|
| NR n71           | A              | 20                 | 136100  | On       | 2                  | EVS        | NB              | 24.4          | 31.22               | 18.13                         | 6.00              | 12.13                      | PASS    |
| NR n5            | A              | 20                 | 167300  |          | 2                  |            |                 |               | 31.22               | 18.10                         | 6.00              | 12.10                      | PASS    |
| NR n70           | B              | 15                 | 340500  | On       | 2                  | EVS        | NB              | 24.4          | 31.22               | 18.20                         | 6.00              | 12.20                      | PASS    |
| NR n66           | B              | 40                 | 349000  |          | 2                  |            |                 |               | 31.22               | 18.03                         | 6.00              | 12.03                      | PASS    |
|                  | C              |                    |         |          | 2                  |            |                 |               | 31.22               | 18.09                         | 6.00              | 12.09                      | PASS    |
| NR n25           | B              |                    |         | 40       | 376500             | On         | 2               | EVS           | NB                  | 24.4                          | 31.22             | 18.03                      | 6.00    |
| NR n2            | C              | 40                 | 376000  | 2        | 31.22              |            | 18.15           |               |                     |                               | 6.00              | 12.15                      | PASS    |
| NR n41 (PC2)     | B              | 100                | 518598  | On       | 2                  | EVS        | NB              | 24.4          | 31.22               | 18.19                         | 6.00              | 12.19                      | PASS    |
| NR n77 DoD (PC2) | F              | 100                | 633334  |          | 2                  |            |                 |               | 31.22               | 18.10                         | 6.00              | 12.10                      | PASS    |
| NR n77 C (PC2)   | F              | 100                | 656000  |          | 2                  |            |                 |               | 31.22               | 18.14                         | 6.00              | 12.14                      | PASS    |
| NR n48           | F              | 40                 | 55990   |          | 2                  |            |                 |               | 31.22               | 18.08                         | 6.00              | 12.08                      | PASS    |


|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 22 of 58                     |

## 8. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

### I. Test System Setup for VoWIFI over IMS T-coil Testing

#### 1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoLTE over IMS Volume Control measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

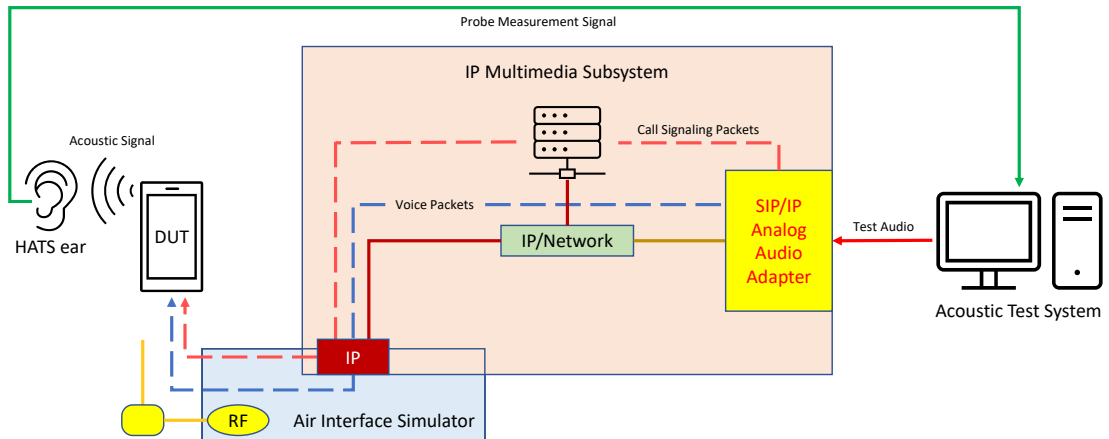

**Figure 8-1**  
Test Setup for VoLTE over IMS Volume Control Measurements

#### 2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for VoWIFI over IMS Volume Control testing is  $-20\text{dBm}_0$  (ASL) and shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the  $-20\text{dBm}_0$  (ASL) speech input level to the DUT for the VoWIFI over IMS connection.

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  | element                                | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 23 of 58                     |

## II. DUT Configuration for VoWiFi over IMS Volume Control Testing

### 1. IEEE Standard Configuration

An investigation was performed to ensure the IEEE standard used for testing does not substantially affect the measurement results. The effects of IEEE standard were found to be independent of WIFI data rate; therefore, only one data rate was used for each IEEE standard in this investigation. IEEE 802.11b was used as the default testing configuration for the handset given the results of this investigation. See below table for comparison between different radio configurations:

**Table 8-1  
VoWiFi over IMS Results by IEEE Standard**


| Mode          | RF Bandwidth (MHz) | U-NII Band | Channel | HAC Mode | Mounting Force (N) | Codec Bandwidth | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | Distortion Margin (dB) | CG Margin (dB) | Verdict |
|---------------|--------------------|------------|---------|----------|--------------------|-----------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|------------------------|----------------|---------|
| IEEE 802.11b  | 20                 | 1          | 6       | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 25.29                 | 1.11           | 18.37                         | 5.29                   | 6.00              | 5.29                   | 12.37          | PASS    |
| IEEE 802.11g  | 20                 | 1          | 6       | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 24.20                 | 1.52           | 18.41                         | 4.20                   | 6.00              | 4.20                   | 12.41          | PASS    |
| IEEE 802.11n  | 20                 | 1          | 6       | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 26.41                 | 1.48           | 18.55                         | 6.41                   | 6.00              | 6.41                   | 12.55          | PASS    |
| IEEE 802.11a  | 20                 | 1          | 40      | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 25.42                 | 1.29           | 18.32                         | 5.42                   | 6.00              | 5.42                   | 12.32          | PASS    |
| IEEE 802.11n  | 20                 | 1          | 40      | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 25.85                 | 1.55           | 18.17                         | 5.85                   | 6.00              | 5.85                   | 12.17          | PASS    |
| IEEE 802.11n  | 40                 | 1          | 38      | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 26.07                 | 1.47           | 18.48                         | 6.07                   | 6.00              | 6.07                   | 12.48          | PASS    |
| IEEE 802.11ac | 20                 | 1          | 40      | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 25.39                 | 1.36           | 18.34                         | 5.39                   | 6.00              | 5.39                   | 12.34          | PASS    |
| IEEE 802.11ac | 40                 | 1          | 38      | On       | 2                  | NB              | MAX-1        | DF              | 31.22               | 26.68                 | 1.26           | 18.30                         | 6.68                   | 6.00              | 6.68                   | 12.30          | PASS    |

### 2. Data Rate Configuration

An investigation was performed to ensure the WIFI data rate used for testing does not substantially affect the measurement results. The effects of data rate configuration were found to be independent of IEEE standard; therefore, only one IEEE standard was used for this investigation. 1Mbps was used as the default WIFI data rate for VoWiFi over IMS Volume Control testing given the results of this investigation. See below table for comparisons between different bands:

**Table 8-2  
VoWiFi over IMS Results by Data Rate**


| Mode         | Band   | Bandwidth | Data Rate (Mbps) | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|--------------|--------|-----------|------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| IEEE 802.11b | 2.4GHz | 20        | 1                | 6       | On       | 2                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.23               | 25.79                 | 1.59           | 18.27                         | 5.79                   | 6.00              | 12.27          | PASS    |
|              |        |           | 31.23            |         |          |                    |            |                 |               |              |                 | 26.29               | 1.61                  | 18.30          | 6.29                          | 6.00                   | 12.30             | PASS           |         |

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 24 of 58                     |



## 9. INTERIM WAIVER DA 23-914

- I. Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the volume control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:
  - a. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of  $\geq 6$  dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing.
  - b. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of  $\geq 6$  dB for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of conversational gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing.
- II. For all other narrowband and wideband codecs not evaluated in I.a. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for conversational gain and documented in the test report at the 2N and 8N levels with a gain of  $\geq 6$  dB for all voice services, bands of operation and air interfaces over which they operate. The handset volume setting used to comply with I.a. shall be used for these other CMRS codec evaluations.
- III. Any other codec for voice services embedded in the handset, not identified in section I and II above are not required to comply or demonstrate in the test reports for conversational gain.
- IV. Under the waiver, the manufacturer has chosen NB EVS 24.4kbps and WB EVS 24.4kbps audio codec bitrates for full evaluation.

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 25 of 58                     |

## 10. VOLUME CONTROL TEST SUMMARY

**Table 10-1  
Consolidated Tabled Results**

|             | Conversational Gain (CG) (dB) |       | FR Margin (dB) | Distortion Value (dB) | C63.19 Verdict   |
|-------------|-------------------------------|-------|----------------|-----------------------|------------------|
|             | 2N                            | 8N    |                |                       |                  |
| <b>GSM</b>  | 19.21                         | 21.91 | -              | -                     | <b>Compliant</b> |
| <b>UMTS</b> | 18.58                         | 21.51 | -              | -                     | <b>Compliant</b> |
| <b>LTE</b>  | 18.05                         | 21.48 | 0.48           | 21.64                 | <b>Compliant</b> |
| <b>NR</b>   | 17.76                         | 20.93 | 0.48           | 24.27                 | <b>Compliant</b> |
| <b>WLAN</b> | 18.12                         | 20.73 | 0.59           | 25.54                 | <b>Compliant</b> |


### I. Raw Handset Data

**Table 10-2  
Raw Data Results for GSM**

| Mode           | Channel | HAC Mode | Mounting Force (N) | Traffic Mode | Codec Bandwidth | Volume Level | Ambient Noise (dBA) | Conversational Gain (CG) (dB) | FCC CG Limit (dB) | CG Margin dB | Verdict |
|----------------|---------|----------|--------------------|--------------|-----------------|--------------|---------------------|-------------------------------|-------------------|--------------|---------|
| <b>GSM1900</b> | 661     | Off      | 2                  | FR V1        | NB              | MAX -1       | 31.23               | 19.21                         | 6.00              | 13.21        | Pass    |
|                | 661     | Off      | 2                  | FR V2        | NB              | MAX -1       | 31.23               | 19.85                         | 6.00              | 13.85        | Pass    |
|                | 661     | Off      | 2                  | HR V1        | NB              | MAX -1       | 31.23               | 20.64                         | 6.00              | 14.64        | Pass    |
|                | 661     | Off      | 8                  | FR V1        | NB              | MAX -1       | 31.23               | 21.91                         | 6.00              | 15.91        | Pass    |
|                | 661     | Off      | 8                  | FR V2        | NB              | MAX -1       | 31.23               | 22.06                         | 6.00              | 16.06        | Pass    |
|                | 661     | Off      | 8                  | HR V1        | NB              | MAX -1       | 31.23               | 22.98                         | 6.00              | 16.98        | Pass    |

**Table 10-3  
Raw Data Results for UMTS**

| Mode           | Channel | HAC Mode | Mounting Force (N) | Codec Bandwidth | Codec Bitrate (kbps) | Volume Level | Ambient Noise (dBA) | Conversational Gain (CG) (dB) | FCC CG Limit (dB) | CG Margin dB | Verdict |
|----------------|---------|----------|--------------------|-----------------|----------------------|--------------|---------------------|-------------------------------|-------------------|--------------|---------|
| <b>UMTS II</b> | 9400    | On       | 2                  | NB              | 4.75                 | MAX -1       | 31.23               | 18.99                         | 6.00              | 12.99        | Pass    |
|                | 9400    | On       | 2                  | NB              | 12.20                | MAX -1       | 31.23               | 19.29                         | 6.00              | 13.29        | Pass    |
|                | 9400    | On       | 2                  | WB              | 6.60                 | MAX -1       | 31.23               | 18.58                         | 6.00              | 12.58        | Pass    |
|                | 9400    | On       | 2                  | WB              | 12.65                | MAX -1       | 31.23               | 18.70                         | 6.00              | 12.70        | Pass    |
|                | 9400    | On       | 2                  | WB              | 23.85                | MAX -1       | 31.23               | 18.78                         | 6.00              | 12.78        | Pass    |
|                | 9400    | On       | 8                  | NB              | 4.75                 | MAX -1       | 31.23               | 21.93                         | 6.00              | 15.93        | Pass    |
|                | 9400    | On       | 8                  | NB              | 12.20                | MAX -1       | 31.23               | 22.20                         | 6.00              | 16.20        | Pass    |
|                | 9400    | On       | 8                  | WB              | 6.60                 | MAX -1       | 31.23               | 21.51                         | 6.00              | 15.51        | Pass    |
|                | 9400    | On       | 8                  | WB              | 12.65                | MAX -1       | 31.23               | 21.65                         | 6.00              | 15.65        | Pass    |
|                | 9400    | On       | 8                  | WB              | 23.85                | MAX -1       | 31.23               | 21.66                         | 6.00              | 15.66        | Pass    |

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 26 of 58                     |

**Table 10-4**  
**Raw Data Results for VoLTE**


| Mode        | RF Bandwidth (MHz) | Radio Configuration   | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|-------------|--------------------|-----------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| LTE Band 66 | 20                 | 16QAM/1RB/0 RB offset | 132322  | On       | 2                  | EVS        | NB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 18.12                         | -                      | 6.00              | 12.12          | PASS    |
|             |                    |                       |         | On       | 2                  | EVS        | NB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 18.05                         | -                      | 6.00              | 12.05          | PASS    |
|             |                    |                       |         | On       | 2                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.23               | 23.01                 | 2.21           | 18.06                         | 3.01                   | 6.00              | 12.06          | PASS    |
|             |                    |                       |         | On       | 8                  | EVS        | NB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 21.59                         | -                      | 6.00              | 15.59          | PASS    |
|             |                    |                       |         | On       | 8                  | EVS        | NB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 21.48                         | -                      | 6.00              | 15.48          | PASS    |
|             |                    |                       |         | On       | 8                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.23               | 21.64                 | 2.27           | 21.52                         | 1.64                   | 6.00              | 15.52          | PASS    |
|             |                    |                       |         | On       | 2                  | EVS        | WB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 18.99                         | -                      | 6.00              | 12.99          | PASS    |
|             |                    |                       |         | On       | 2                  | EVS        | WB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 19.05                         | -                      | 6.00              | 13.05          | PASS    |
|             |                    |                       |         | On       | 2                  | EVS        | WB              | 24.4          | MAX-1        | FF              | 31.23               | 24.66                 | 0.48           | 18.98                         | 4.66                   | 6.00              | 12.98          | PASS    |
|             |                    |                       |         | On       | 8                  | EVS        | WB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 21.72                         | -                      | 6.00              | 15.72          | PASS    |
|             |                    |                       |         | On       | 8                  | EVS        | WB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 21.74                         | -                      | 6.00              | 15.74          | PASS    |
|             |                    |                       |         | On       | 8                  | EVS        | WB              | 24.4          | MAX-1        | FF              | 31.23               | 22.73                 | 0.52           | 21.76                         | 2.73                   | 6.00              | 15.76          | PASS    |
|             |                    |                       |         | On       | 2                  | AMR        | NB              | 4.75          | MAX-1        | NA              | 31.23               | -                     | -              | 19.24                         | -                      | 6.00              | 13.24          | PASS    |
|             |                    |                       |         | On       | 2                  | AMR        | NB              | 12.2          | MAX-1        | NA              | 31.23               | -                     | -              | 19.45                         | -                      | 6.00              | 13.45          | PASS    |
|             |                    |                       |         | On       | 8                  | AMR        | NB              | 4.75          | MAX-1        | NA              | 31.23               | -                     | -              | 21.97                         | -                      | 6.00              | 15.97          | PASS    |
|             |                    |                       |         | On       | 8                  | AMR        | NB              | 12.2          | MAX-1        | NA              | 31.23               | -                     | -              | 22.18                         | -                      | 6.00              | 16.18          | PASS    |
|             |                    |                       |         | On       | 2                  | AMR        | WB              | 6.6           | MAX-1        | NA              | 31.23               | -                     | -              | 18.58                         | -                      | 6.00              | 12.58          | PASS    |
|             |                    |                       |         | On       | 2                  | AMR        | WB              | 12.65         | MAX-1        | NA              | 31.23               | -                     | -              | 18.64                         | -                      | 6.00              | 12.64          | PASS    |
|             |                    |                       |         | On       | 2                  | AMR        | WB              | 23.85         | MAX-1        | NA              | 31.23               | -                     | -              | 18.75                         | -                      | 6.00              | 12.75          | PASS    |
|             |                    |                       |         | On       | 8                  | AMR        | WB              | 6.6           | MAX-1        | NA              | 31.23               | -                     | -              | 21.59                         | -                      | 6.00              | 15.59          | PASS    |
| On          | 8                  | AMR                   | WB      | 12.65    | MAX-1              | NA         | 31.23           | -             | -            | 21.71           | -                   | 6.00                  | 15.71          | PASS                          |                        |                   |                |         |
| On          | 8                  | AMR                   | WB      | 23.85    | MAX-1              | NA         | 31.23           | -             | -            | 21.88           | -                   | 6.00                  | 15.88          | PASS                          |                        |                   |                |         |

**Table 10-5**  
**Raw Data Results for VoNR**

| Mode   | RF Bandwidth (MHz) | Waveform   | Radio Configuration  | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|--------|--------------------|------------|----------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| NR n66 | 40                 | DFT-S-OFDM | 16QAM/1RB/1RB offset | 349000  | On       | 2                  | EVS        | NB              | 5.9           | MAX-1        | NA              | 31.22               | -                     | -              | 17.86                         | -                      | 6.00              | 11.86          | PASS    |
|        |                    |            |                      |         | On       | 2                  | EVS        | NB              | 13.2          | MAX-1        | NA              | 31.22               | -                     | -              | 17.76                         | -                      | 6.00              | 11.76          | PASS    |
|        |                    |            |                      |         | On       | 2                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.22               | 26.05                 | 2.07           | 18.05                         | 6.05                   | 6.00              | 12.05          | PASS    |
|        |                    |            |                      |         | On       | 8                  | EVS        | NB              | 5.9           | MAX-1        | NA              | 31.22               | -                     | -              | 20.99                         | -                      | 6.00              | 14.99          | PASS    |
|        |                    |            |                      |         | On       | 8                  | EVS        | NB              | 13.2          | MAX-1        | NA              | 31.22               | -                     | -              | 20.93                         | -                      | 6.00              | 14.93          | PASS    |
|        |                    |            |                      |         | On       | 8                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.22               | 26.85                 | 2.67           | 21.07                         | 6.85                   | 6.00              | 15.07          | PASS    |
|        |                    |            |                      |         | On       | 2                  | EVS        | WB              | 5.9           | MAX-1        | NA              | 31.22               | -                     | -              | 18.19                         | -                      | 6.00              | 12.19          | PASS    |
|        |                    |            |                      |         | On       | 2                  | EVS        | WB              | 13.2          | MAX-1        | NA              | 31.22               | -                     | -              | 18.17                         | -                      | 6.00              | 12.17          | PASS    |
|        |                    |            |                      |         | On       | 2                  | EVS        | WB              | 24.4          | MAX-1        | FF              | 31.22               | 24.27                 | 0.48           | 18.43                         | 4.27                   | 6.00              | 12.43          | PASS    |
|        |                    |            |                      |         | On       | 8                  | EVS        | WB              | 5.9           | MAX-1        | NA              | 31.22               | -                     | -              | 21.05                         | -                      | 6.00              | 15.05          | PASS    |
|        |                    |            |                      |         | On       | 8                  | EVS        | WB              | 13.2          | MAX-1        | NA              | 31.22               | -                     | -              | 21.03                         | -                      | 6.00              | 15.03          | PASS    |
|        |                    |            |                      |         | On       | 8                  | EVS        | WB              | 24.4          | MAX-1        | FF              | 31.22               | 24.66                 | 1.46           | 21.23                         | 4.66                   | 6.00              | 15.23          | PASS    |
|        |                    |            |                      |         | On       | 2                  | AMR        | NB              | 4.75          | MAX-1        | NA              | 31.22               | -                     | -              | 18.54                         | -                      | 6.00              | 12.54          | PASS    |
|        |                    |            |                      |         | On       | 2                  | AMR        | NB              | 12.2          | MAX-1        | NA              | 31.22               | -                     | -              | 18.81                         | -                      | 6.00              | 12.81          | PASS    |
|        |                    |            |                      |         | On       | 8                  | AMR        | NB              | 4.75          | MAX-1        | NA              | 31.22               | -                     | -              | 21.27                         | -                      | 6.00              | 15.27          | PASS    |
|        |                    |            |                      |         | On       | 8                  | AMR        | NB              | 12.2          | MAX-1        | NA              | 31.22               | -                     | -              | 21.60                         | -                      | 6.00              | 15.60          | PASS    |
|        |                    |            |                      |         | On       | 2                  | AMR        | WB              | 6.6           | MAX-1        | NA              | 31.22               | -                     | -              | 18.17                         | -                      | 6.00              | 12.17          | PASS    |
|        |                    |            |                      |         | On       | 2                  | AMR        | WB              | 12.65         | MAX-1        | NA              | 31.22               | -                     | -              | 18.25                         | -                      | 6.00              | 12.25          | PASS    |
|        |                    |            |                      |         | On       | 2                  | AMR        | WB              | 23.85         | MAX-1        | NA              | 31.22               | -                     | -              | 18.31                         | -                      | 6.00              | 12.31          | PASS    |
|        |                    |            |                      |         | On       | 8                  | AMR        | WB              | 6.6           | MAX-1        | NA              | 31.22               | -                     | -              | 20.98                         | -                      | 6.00              | 14.98          | PASS    |
| On     | 8                  | AMR        | WB                   | 12.65   | MAX-1    | NA                 | 31.22      | -               | -             | 21.04        | -               | 6.00                | 15.04                 | PASS           |                               |                        |                   |                |         |
| On     | 8                  | AMR        | WB                   | 23.85   | MAX-1    | NA                 | 31.22      | -               | -             | 21.06        | -               | 6.00                | 15.06                 | PASS           |                               |                        |                   |                |         |

**Table 10-6**  
**Raw Data Results for VoWiFi**

| Mode         | Band   | Bandwidth | Data Rate (Mbps) | Channel | HAC Mode | Mounting Force (N) | Codec Type | Codec Bandwidth | Codec Bitrate | Volume Level | DRP Translation | Ambient Noise (dBA) | Distortion Value (dB) | FR Margin (dB) | Conversational Gain (CG) (dB) | Distortion Margin (dB) | FCC CG Limit (dB) | CG Margin (dB) | Verdict |
|--------------|--------|-----------|------------------|---------|----------|--------------------|------------|-----------------|---------------|--------------|-----------------|---------------------|-----------------------|----------------|-------------------------------|------------------------|-------------------|----------------|---------|
| IEEE 802.11b | 2.4GHz | 20        | 1                | 6       | On       | 2                  | EVS        | NB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 18.32                         | -                      | 6.00              | 12.32          | PASS    |
|              |        |           |                  |         | On       | 2                  | EVS        | NB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 18.25                         | -                      | 6.00              | 12.25          | PASS    |
|              |        |           |                  |         | On       | 2                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.23               | 26.19                 | 1.52           | 18.12                         | 6.19                   | 6.00              | 12.12          | PASS    |
|              |        |           |                  |         | On       | 8                  | EVS        | NB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 21.77                         | -                      | 6.00              | 15.77          | PASS    |
|              |        |           |                  |         | On       | 8                  | EVS        | NB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 22.00                         | -                      | 6.00              | 16.00          | PASS    |
|              |        |           |                  |         | On       | 8                  | EVS        | NB              | 24.4          | MAX-1        | DF              | 31.23               | 26.07                 | 1.44           | 21.99                         | 6.07                   | 6.00              | 15.99          | PASS    |
|              |        |           |                  |         | On       | 2                  | EVS        | WB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 18.35                         | -                      | 6.00              | 12.35          | PASS    |
|              |        |           |                  |         | On       | 2                  | EVS        | WB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 19.00                         | -                      | 6.00              | 13.00          | PASS    |
|              |        |           |                  |         | On       | 2                  | EVS        | WB              | 24.4          | MAX-1        | FF              | 31.23               | 25.76                 | 0.69           | 18.11                         | 5.76                   | 6.00              | 12.11          | PASS    |
|              |        |           |                  |         | On       | 8                  | EVS        | WB              | 5.9           | MAX-1        | NA              | 31.23               | -                     | -              | 20.73                         | -                      | 6.00              | 14.73          | PASS    |
|              |        |           |                  |         | On       | 8                  | EVS        | WB              | 13.2          | MAX-1        | NA              | 31.23               | -                     | -              | 21.03                         | -                      | 6.00              | 15.03          | PASS    |
|              |        |           |                  |         | On       | 8                  | EVS        | WB              | 24.4          | MAX-1        | FF              | 31.23               | 25.54                 | 0.59           | 21.06                         | 5.54                   | 6.00              | 15.06          | PASS    |
|              |        |           |                  |         | On       | 2                  | AMR        | NB              | 4.75          | MAX-1        | NA              | 31.23               | -                     | -              | 19.26                         | -                      | 6.00              | 13.26          | PASS    |
|              |        |           |                  |         | On       | 2                  | AMR        | NB              | 12.2          | MAX-1        | NA              | 31.23               | -                     | -              | 19.56                         | -                      | 6.00              | 13.56          | PASS    |
|              |        |           |                  |         | On       | 8                  | AMR        | NB              | 4.75          | MAX-1        | NA              | 31.23               | -                     | -              | 21.13                         | -                      | 6.00              | 15.13          | PASS    |
|              |        |           |                  |         | On       | 8                  | AMR        | NB              | 12.2          | MAX-1        | NA              | 31.23               | -                     | -              | 21.37                         | -                      | 6.00              | 15.37          | PASS    |
|              |        |           |                  |         | On       | 2                  | AMR        | WB              | 6.6           | MAX-1        | NA              | 31.23               | -                     | -              | 18.98                         | -                      | 6.00              | 12.98          | PASS    |
|              |        |           |                  |         | On       | 2                  | AMR        | WB              | 12.65         | MAX-1        | NA              | 31.23               | -                     | -              | 18.87                         | -                      | 6.00              | 12.87          | PASS    |
|              |        |           |                  |         | On       | 2                  | AMR        | WB              | 23.85         | MAX-1        | NA              | 31.23               | -                     | -              | 19.32                         | -                      | 6.00              | 13.32          | PASS    |
|              |        |           |                  |         | On       | 8                  | AMR        | WB              | 6.6           | MAX-1        | NA              | 31.23               | -                     | -              | 20.88                         | -                      | 6.00              | 14.88          | PASS    |
| On           | 8      | AMR       | WB               | 12.65   | MAX-1    | NA                 | 31.23      | -               | -             | 20.80        | -               | 6.00                | 14.80                 | PASS           |                               |                        |                   |                |         |
| On           | 8      | AMR       | WB               | 23.85   | MAX-1    | NA                 | 31.23      | -               | -             | 21.07        | -               | 6.00                | 15.07                 | PASS           |                               |                        |                   |                |         |

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 27 of 58                     |

## II. Test Notes

### A. General

1. Phone Condition: Phone Condition: Mute off; Backlight off; Max Volume -1; Max Contrast
2. Test Signal: IEEE Std 269 uncompressed real male speech
3. Hearing Aid Mode was set according to the following menu path: **(Phone→Call Settings→Other call Settings→Hearing aids)** was set to ON for HAC compliance.
4. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
5. WD was evaluated with one volume notch down from MAX volume setting for HAC compliance.
6. The FCC Margin from Limit column indicates a margin from the FCC limit for compliance.

### B. GSM

1. Power Configuration: GSM1900: PCL=0;
2. Vocoder Configuration: EFR (GSM): FR V1, FR V2, HR V1

### C. UMTS

1. Power Configuration: TPC = "All 1's"
2. Vocoder Configuration:
  - a. AMR-NB: 4.75kbps, 12.2kbps
  - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps

### D. Voice over LTE


1. Power Configuration: TPC = "Max Power"
2. Radio Configuration: 16QAM, 1RB, 0RB offset
3. Vocoder Configuration:
  - a. AMR-NB: 4.75kbps, 12.2kbps
  - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps
  - c. EVS-NB: 5.9kbps, 13.2kbps, 24.4kbps
  - d. EVS-WB: 5.9kbps, 13.2kbps, 24.4kbps

### E. Voice over NR

1. Power Configuration: TPC = "Max Power"
2. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 1RB offset
3. Vocoder Configuration:
  - a. AMR-NB: 4.75kbps, 12.2kbps
  - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps
  - c. EVS-NB: 5.9kbps, 13.2kbps, 24.4kbps
  - d. EVS-WB: 5.9kbps, 13.2kbps, 24.4kbps

### F. Voice over WIFI


1. Radio Configuration: IEEE 802.11b: DSSS, 1Mbps
2. Vocoder Configuration:
  - a. AMR-NB: 4.75kbps, 12.2kbps
  - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps
  - c. EVS-NB: 5.9kbps, 13.2kbps, 24.4kbps
  - d. EVS-WB: 5.9kbps, 13.2kbps, 24.4kbps

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 28 of 58                     |

### III. Volume Control Verification Test Results

**Table 10-7  
Verification Results Table**

| Date of Testing | Test Location | Air Interface Equipment | Acoustical Calibrator | HATS Sens. [dB] | Ambient Noise (dBA) |
|-----------------|---------------|-------------------------|-----------------------|-----------------|---------------------|
| 10/16/2023      | Whisper1      | CMW500                  | 2343018               | 97.22           | 31.23               |
| 10/30/2023      | Whisper1      | CMW500                  | 2343018               | 97.11           | 31.22               |

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 29 of 58                     |

## 11. MEASUREMENT UNCERTAINTY


**Table 11-1  
Uncertainty Estimation Table**

| Receive Volume Control Requirement | Expanded uncertainty (k=2), 95% confidence level (dB) |
|------------------------------------|-------------------------------------------------------|
| Conversational Gain                | 0.33                                                  |
| Frequency Response (FF)            | 0.23                                                  |
| Frequency Response (DF)            | 0.19                                                  |
| Distortion                         | 0.81                                                  |

Notes:

1. Test equipment is calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
2. All equipment has traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.


Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. The above uncertainties were estimated experimentally using the techniques contained in NIS 81 and NIS 3003.

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 30 of 58                     |


## 12. EQUIPMENT LIST

**Table 12-1  
Equipment List**

| Manufacturer        | Model        | Description                                           | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|---------------------|--------------|-------------------------------------------------------|------------|--------------|------------|---------------|
| Listen              | SoundConnect | Microphone Power Supply                               | 9/15/2022  | Biennial     | 9/15/2024  | 0899-PS150    |
| RME                 | Fireface UC  | Soundcheck Acoustic Analyzer External Audio Interface | 9/19/2022  | Biennial     | 9/19/2024  | 23792992      |
| Rohde & Schwarz     | CMW500       | Wideband Radio Communication Tester                   | 8/9/2023   | Annual       | 8/9/2024   | 162125        |
| Rohde & Schwarz     | CMW500       | Radio Communication Tester                            | 8/10/2023  | Annual       | 8/10/2024  | 140144        |
| Rohde & Schwarz     | CMX500       | Radio Communication Tester                            | N/A        |              | N/A        | 100298        |
| Seekonk             | NC-100       | Torque Wrench (8" lb)                                 | 11/28/2022 | Biennial     | 11/28/2024 | 80790         |
| YellowTec           | YT4211       | USB Audio Interface                                   | N/A        |              | N/A        | 20000365      |
| Netgear             | XS708E       | Ethernet Switch                                       | N/A        |              | N/A        | 4FU3875C001A8 |
| Bruel & Kjaer (HBK) | 4128         | Head and Torso Simulator                              | 4/5/2022   | Biennial     | 4/5/2024   | 1947220       |
| Bruel & Kjaer (HBK) | 4231         | Acoustical Calibrator Type 4231 with UA1546           | 4/6/2022   | Biennial     | 4/6/2024   | 2343018       |
| Bruel & Kjaer (HBK) | DZ-9769      | Artificial Ear                                        | 9/15/2022  | Triennial    | 9/15/2025  | SBM553623     |

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 31 of 58                     |

## 13. TEST DATA

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 32 of 58                     |





**Element Hearing-Aid Compatibility Facility**

**Whisper Room 1 / HATS**

Type: HATS 4128  
Serial: 1947220

**Measurement Standard:** ANSI C63.19

**Equipment:**

- Head and Torso Simulator Type 4128: SN: 1947220; Calibrated: 4/5/2024
- Acoustical Calibrator Type 4231 W/ UA1546: SN 2343018; Calibrated: 4/6/2023

|                                       |          |   |
|---------------------------------------|----------|---|
| Ambient Noise Level Check (Analysis)  | 31.23 dB | ✓ |
| Ambient Noise Level Check (RTA)       | 32.25 dB | ✓ |
| Ambient Noise Level Check (Voltmeter) | 31.1 dB  | ✓ |
| CMW500 0dBm0 Level Check              | 969m V   | ✓ |
| HATS Sensitivity Check                | 97.22 dB | ✓ |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  | element                                | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 33 of 58                     |



**Element Hearing-Aid Compatibility Facility**

**Whisper Room 1 / HATS**

Type: HATS 4128  
Serial: 1947220

**Measurement Standard:** ANSI C63.19

**Equipment:**

- Head and Torso Simulator Type 4128: SN: 1947220; Calibrated: 4/5/2024
- Acoustical Calibrator Type 4231 W/ UA1546: SN 2343018; Calibrated: 4/6/2023

|                                       |          |   |
|---------------------------------------|----------|---|
| Ambient Noise Level Check (Analysis)  | 31.22 dB | ✓ |
| Ambient Noise Level Check (RTA)       | 32.69 dB | ✓ |
| Ambient Noise Level Check (Voltmeter) | 31.2 dB  | ✓ |
| CMW500 0dBm0 Level Check              | 1 V      | ✓ |
| HATS Sensitivity Check                | 97.11 dB | ✓ |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  | element                                | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 34 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: LTE Band 66
- Bandwidth: 20MHz
- Channel: 132322
- Codec Bandwidth: Narrowband
- Mounting Force: 2N

Frequency Response DF

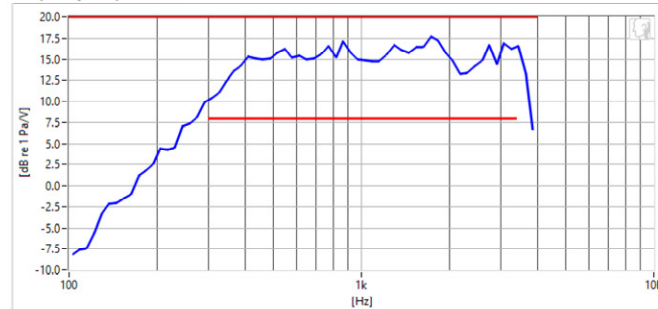

Distortion

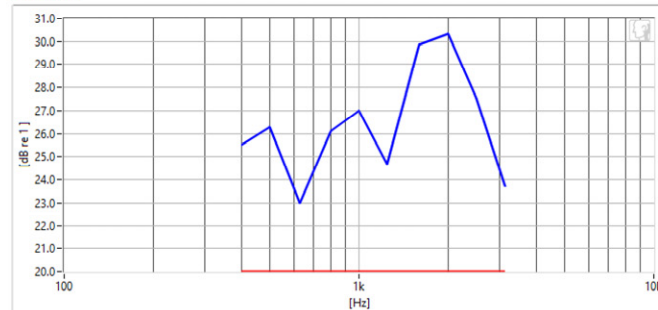

Results DF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (2N) | 18.06 dB | ✓ | Minimum          | 6.0             |
| Distortion Value (NB)    | 23.01 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (NB)   | 3.01 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (DF, NB)       | 2.21 dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 35 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018

**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022

**Test Configuration:**

- Mode: LTE Band 66
- Bandwidth: 20MHz
- Channel: 132322
- Codec Bandwidth: Narrowband
- Mounting Force: 8N



|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 36 of 58                     |



### Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M



Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018

**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022

**Test Configuration:**

- Mode: LTE Band 66
- Bandwidth: 20MHz
- Channel: 132322
- Codec Bandwidth: Wideband
- Mounting Force: 2N

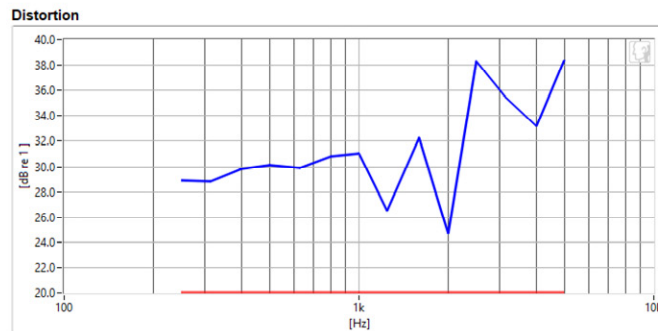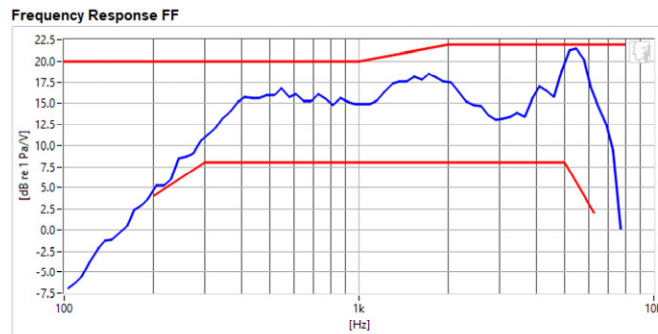

**Results FF**

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (2N) | 18.98 dB | ✓ | Minimum          | 6.0             |
| Distortion Value (WB)    | 24.66 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (WB)   | 4.66 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (FF, WB)       | 480m dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 37 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: LTE Band 66
- Bandwidth: 20MHz
- Channel: 132322
- Codec Bandwidth: Wideband
- Mounting Force: 8N

Frequency Response FF

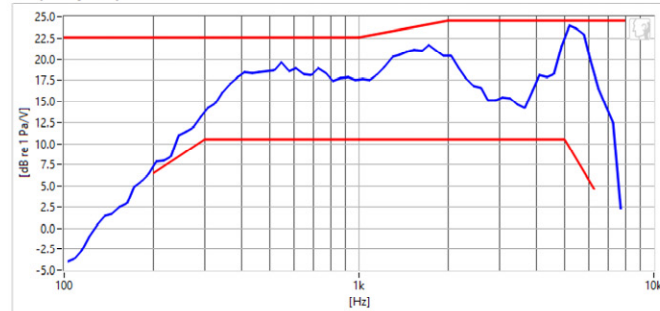

Distortion

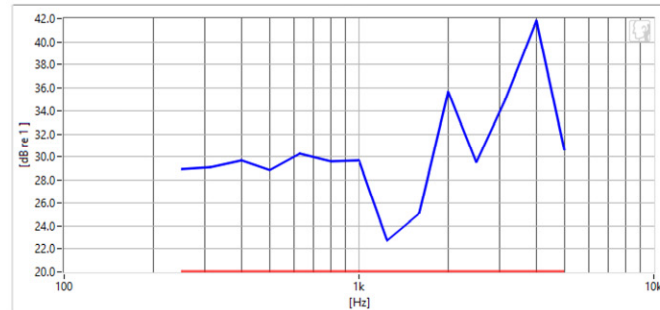

Results FF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (8N) | 21.76 dB | ✓ | Minimum          | 18              |
| Distortion Value (WB)    | 22.73 dB | ✓ | Minimum          | 20              |
| Distortion Margin (WB)   | 2.73 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (FF, WB)       | 520m dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 38 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: NR n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Narrowband
- Mounting Force: 2N

Frequency Response DF

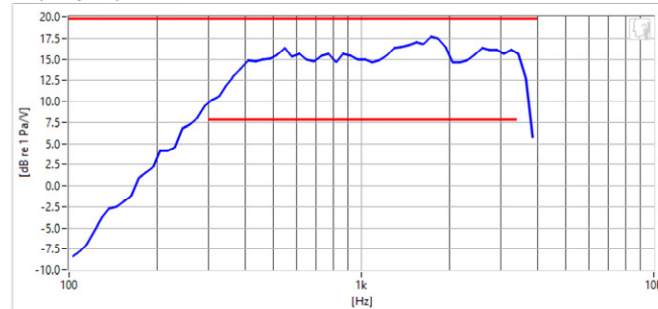

Distortion

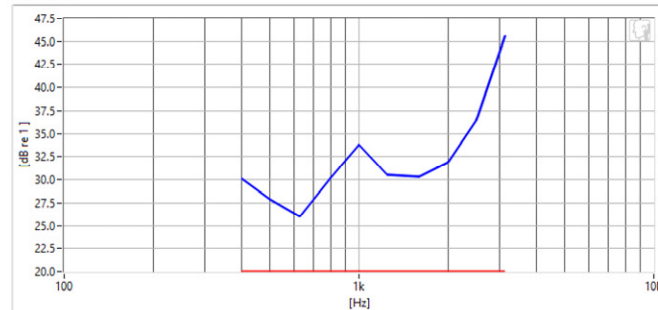

Results DF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (2N) | 18.05 dB | ✓ | Minimum          | 6.0             |
| Distortion Value (NB)    | 26.05 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (NB)   | 6.05 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (DF, NB)       | 2.07 dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 39 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: NR n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Narrowband
- Mounting Force: 8N

Frequency Response DF

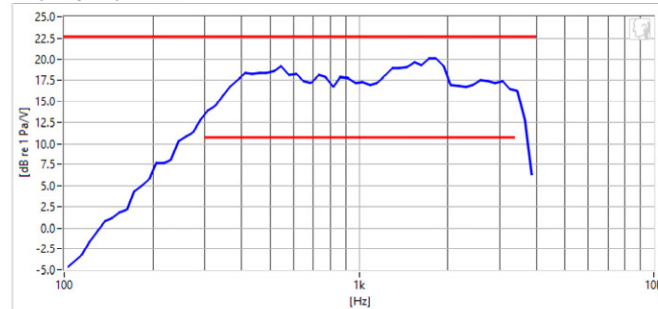

Distortion

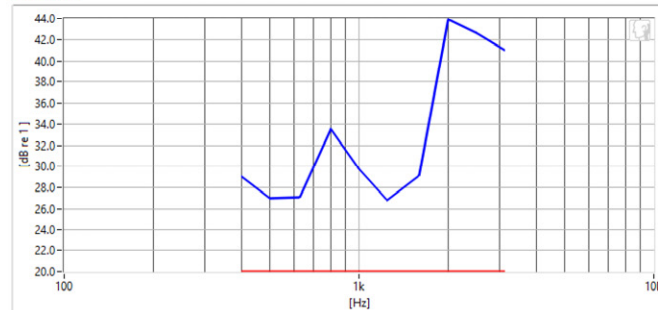

Results DF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (8N) | 21.07 dB | ✓ | Minimum          | 6.0             |
| Distortion Value (NB)    | 26.85 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (NB)   | 6.85 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (DF, NB)       | 2.67 dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 40 of 58                     |





### Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: NR n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Wideband
- Mounting Force: 2N

Frequency Response FF

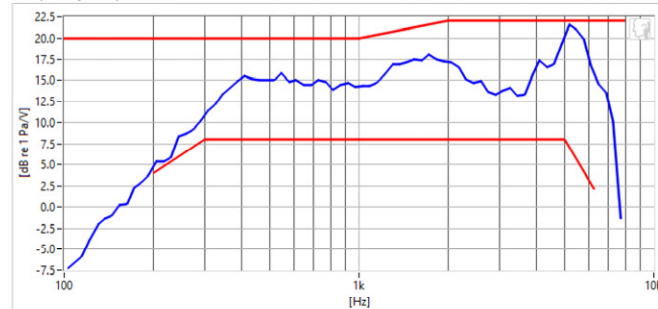

Distortion

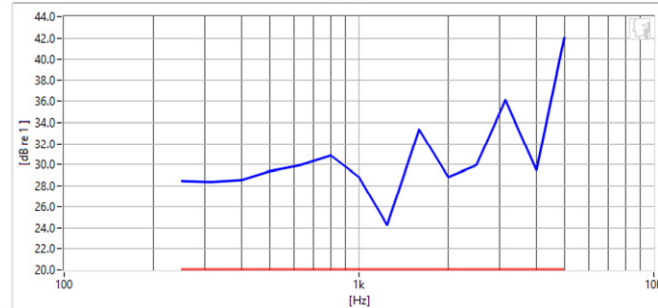

Results FF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (2N) | 18.43 dB | ✓ | Minimum          | 6.0             |
| Distortion Value (WB)    | 24.27 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (WB)   | 4.27 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (FF, WB)       | 480m dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 41 of 58                     |



### Element Hearing-Aid Compatibility Facility

## DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: NR n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Wideband
- Mounting Force: 8N

Frequency Response FF

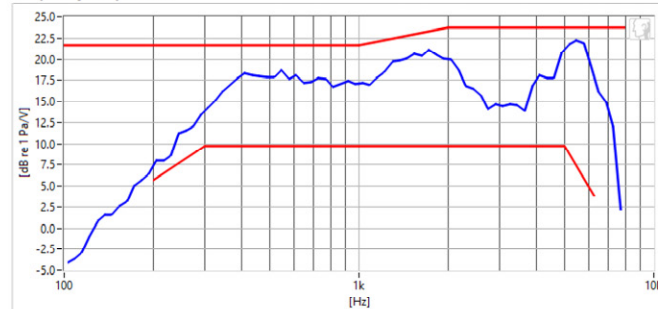

Distortion

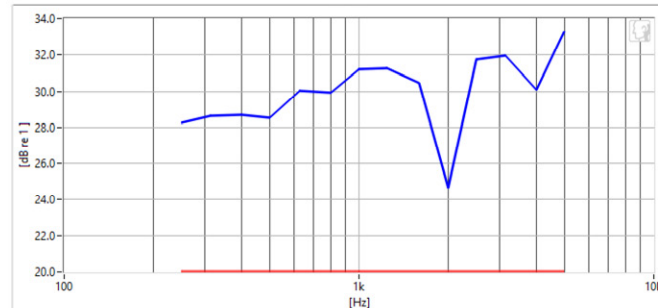

Results FF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (8N) | 21.23 dB | ✓ | Minimum          | 6.0             |
| Distortion Value (WB)    | 24.66 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (WB)   | 4.66 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (FF, WB)       | 1.46 dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 42 of 58                     |



### Element Hearing-Aid Compatibility Facility

## DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 6
- Codec Bandwidth: Narrowband
- Mounting Force: 2N

Frequency Response DF

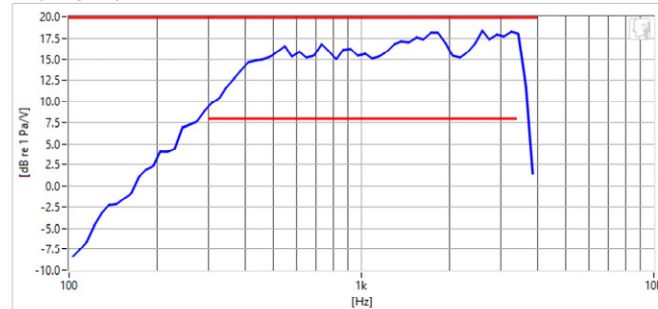

Distortion

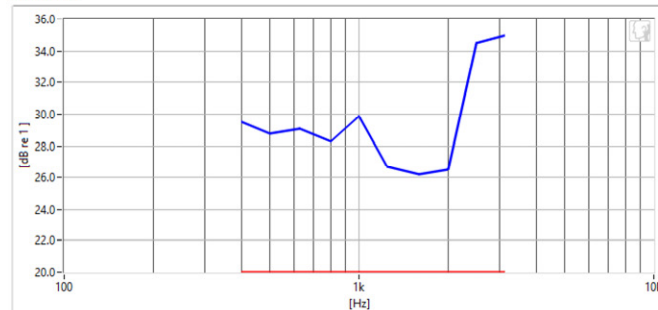

Results DF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (2N) | 18.12 dB | ✓ | Minimum          | 6               |
| Distortion Value (NB)    | 26.19 dB | ✓ | Minimum          | 20              |
| Distortion Margin (NB)   | 6.19 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (DF, NB)       | 1.52 dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 43 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 6
- Codec Bandwidth: Narrowband
- Mounting Force: 8N

Frequency Response DF

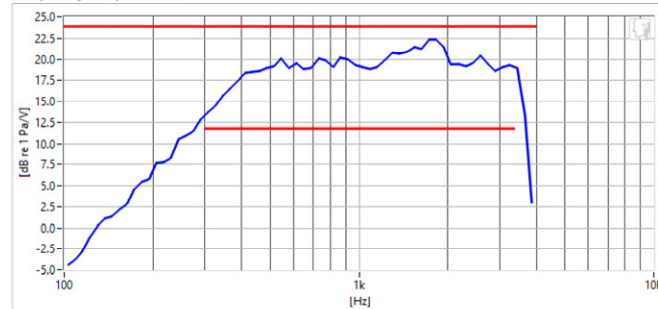

Distortion

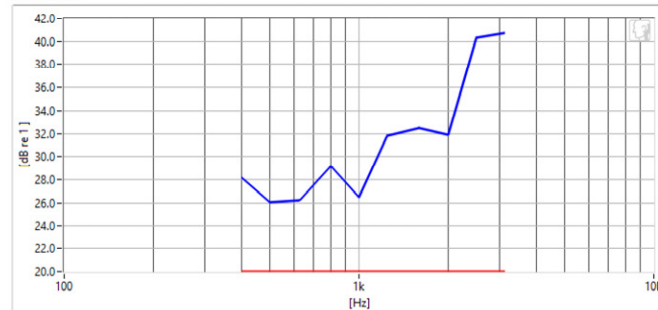

Results DF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (8N) | 21.99 dB | ✓ | Minimum          | 18.0            |
| Distortion Value (NB)    | 26.07 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (NB)   | 6.07 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (DF, NB)       | 1.44 dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 44 of 58                     |



## Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022


**Test Configuration:**

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 6
- Codec Bandwidth: Wideband
- Mounting Force: 2N

Frequency Response FF

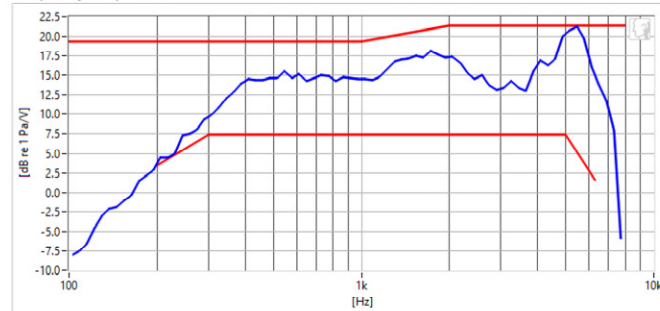

Distortion

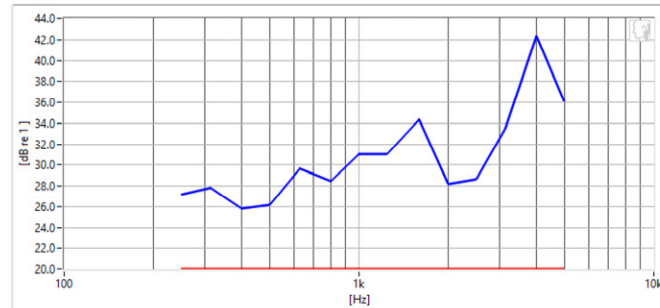

Results FF

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (2N) | 18.11 dB | ✓ | Minimum          | 6               |
| Distortion Value (WB)    | 25.76 dB | ✓ | Minimum          | 20              |
| Distortion Margin (WB)   | 5.76 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (FF, WB)       | 90m dB   | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 45 of 58                     |



### Element Hearing-Aid Compatibility Facility

### DUT: A3LSMA156U

Type: Portable Handset  
Serial: 2074M



Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018

**Equipment:**

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 4/5/2022
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/6/2022

**Test Configuration:**

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 6
- Codec Bandwidth: Wideband
- Mounting Force: 8N

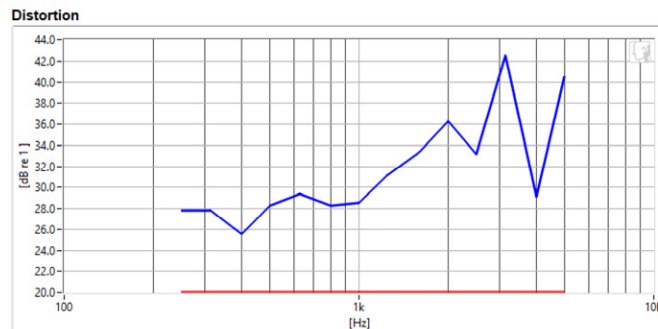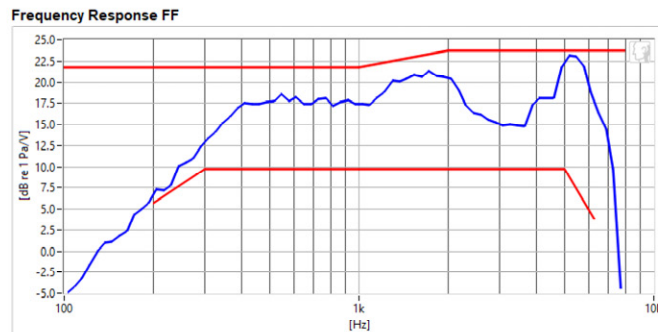


**Results FF**

|                          |          |   |                  |                 |
|--------------------------|----------|---|------------------|-----------------|
| Conversational Gain (8N) | 21.06 dB | ✓ | Minimum          | 18.0            |
| Distortion Value (WB)    | 25.54 dB | ✓ | Minimum          | 20.0            |
| Distortion Margin (WB)   | 5.54 dB  | ✓ | Tolerance curves | Absolute Limits |
| FR Margin (FF, WB)       | 590m dB  | ✓ | Tolerance curves | Floating Limits |

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 46 of 58                     |

## 14. CALIBRATION CERTIFICATES

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 47 of 58                     |

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [CT.INFO@ELEMENT.COM](mailto:CT.INFO@ELEMENT.COM).

The Hottinger Brüel & Kjær Inc. Calibration Laboratory  
 3079 Premiere Parkway  
 Duluth, GA 30097  
 Telephone: 770-209-6907  
 Fax: 770-447-4033  
 Web site address: <http://www.hbkworld.com>

The Hottinger Brüel and Kjær Inc.  
 Service Center is Certified to ISO 9001:2015

**CERTIFICATE OF CALIBRATION**  
 No.: CAS-565027-G1J7F1-101

**Calibration Of:**

Model Number : 4128-C-001      Serial Number: 1947220

**Customer:**

PCTEST Engineering Laboratory Inc  
 7185 Oakland Mills Road  
 Columbia, MD 21046

*✓ TK  
5/6/2022*

**CALIBRATION CONDITIONS:**

Environment conditions      Air temperature : 23 °C  
                                          Air pressure: 97.3 kPa  
                                          Relative Humidity: 32 % RH

**SPECIFICATIONS:**

This document certifies that the instrument as listed under "Model Number" has been calibrated and unless otherwise indicated under "Final Data", meets acceptance criteria as prescribed by the referenced Procedure. Statements of compliance, where applicable, are based on calibration results falling within specified criteria with no reduction by the uncertainty of the measurements. The calibration of the listed instrumentation was accomplished using a test system which conforms with the requirements of ISO/IEC 17025, ANSI/NC SL Z540-1, and guidelines of ISO 10012-1. For "as received" and "final" data, see the attached page(s). This Certificate and attached data pages shall not be reproduced, except in full, without written approval of the Hottinger Brüel and Kjær Inc. Calibration Laboratory-Duluth, GA. Results relate only to the items tested. The Instrumentation has been calibrated using Measurement Standards with values traceable to the National Institute of Standards and Technology, National Measurement Institutes or derived from natural physical constants.

**PROCEDURE:**

The calibration was performed according to procedure number: 4128 DP Rev. 7.21

**RESULTS:**

"As Received" Physical Condition: Acceptable for Calibration

"As Received" Data: "As Received" = "Final Data"


"Final Data": Within Acceptance Criteria

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor  $k=2$  providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from standards, calibration method, effect of environmental conditions and any short term contribution from the device under calibration.

Date of Calibration: 05-Apr-2022


Certificate issued: 05-Apr-2022

John Avitabile



Calibration Technician

Meshawn Hobbs  
 Quality Representative

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 48 of 58                     |



**CERTIFICATE OF CALIBRATION**

No.: CAS-565027-G1J7F1-101 Page 2 of 2

Hottinger Brüel & Kjær Inc. Calibration  
Laboratory

**RESULTS:**


Rev 7.21

I. Bruel & Kjaer Torso Model 4128, Serial Number: 1947220.

| As Received Data                                                      | Final Data | As Received = Final Data                     | X             |
|-----------------------------------------------------------------------|------------|----------------------------------------------|---------------|
|                                                                       |            | <b>Acceptance Criteria</b>                   | <b>Actual</b> |
| A. Speaker and Speaker Assembly Mechanical Check.                     |            | Pass/Fail                                    | Pass          |
|                                                                       |            | <b>Acceptance Criteria</b>                   | <b>Actual</b> |
| B. Protection Circuit                                                 |            |                                              |               |
| 1. 6.4 VRMS 750 Hertz Input                                           |            | Signal remains for more than 30 Seconds      | Pass          |
| 2. 7.5 VRMS 750 Hertz Input                                           |            | Signal disappears in 12 Seconds<br>Pass/Fail | Pass          |
|                                                                       |            |                                              |               |
| C. Ear Simulator                                                      |            |                                              |               |
| 1. See enclosed Calibration Results for 4158, serial number: 1886222. |            | Calibration Results Included<br>Yes/No/NA    | Yes           |
| 2. See enclosed Calibration Results for 4159, serial number:          |            | Calibration Results Included<br>Yes/No/NA    | N/A           |

**Reference Standards:**

| Model    | Serial Number | Trace Number | Cal Due | Interval (mo) |
|----------|---------------|--------------|---------|---------------|
| HP 3458A | 2823A03931    | 472263       | 30Sep22 | 12            |
| HP 5315A | 2536A15836    | 468431       | 30Jun22 | 12            |

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 49 of 58                     |

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



**CERTIFICATE OF CALIBRATION**

No.: CAS-565027-G1J7F1-401

Page 1 of 2

**CALIBRATION OF:**

Microphone: Brüel & Kjær Type 4158/2669/UA1345 Serial No. 1886222/2025786

**CUSTOMER:**

PCTEST Engineering Laboratory Inc  
 7185 Oakland Mills Road  
 Columbia, MD 21046

✓ TK  
 5/6/2022

**CALIBRATION CONDITIONS:**

Environment conditions: Air temperature: 23.2 °C  
 Air pressure: 98.229 kPa  
 Relative Humidity: 30 %RH  
 Applied polarization voltage: 200 Vdc

**SPECIFICATIONS:**

This document certifies that the instrument as listed under "Type" has been calibrated and unless otherwise indicated under "Final Data", meets acceptance criteria as prescribed by the referenced Procedure. Statements of compliance, where applicable, are based on calibration results falling within specified criteria with no reduction by the uncertainty of the measurements. The calibration of the listed transducer was accomplished using a test system which conforms to the requirements of ISO/IEC 17025, ANSI/NCCL Z540-1, and guidelines of ISO 10012-1. For "as received" and "final" data, see the attached page(s). Items marked with one asterisk (\*) are not covered by the scope of the current A2LA accreditation. This Certificate and attached data pages shall not be reproduced, except in full, without written approval of the Hottinger Brüel & Kjær Inc. Calibration Laboratory-Duluth, GA. Results relate only to the items tested. The transducer has been calibrated using Measurement Standards with values traceable to the National Institute of Standards and Technology, National Measurement Institutes or derived from natural physical constants.

**PROCEDURE:**

The measurements have been performed with the assistance of the Hottinger Brüel & Kjær Inc. Microphone Calibration System B&K 9721 with application software WT9649 and WT9650 version 5.3.0.10 using calibration procedure: 4158-2669-UA1345-S251

**RESULTS:**

- "As Received" Data: Within Acceptance Criteria       "As Received" Data: Outside Acceptance Criteria  
 "Final" Data : Within Acceptance Criteria       "Final" Data : Outside Acceptance Criteria


The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor  $k=2$  providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from standards, calibration method, effect of environmental conditions and any short term contribution from the device under calibration.

Date of Calibration: April 11, 2022

Certificate issued: April 11, 2022

Meshaun Hobbs  
 Calibration Technician

  
 Kyle Chancey  
 Quality Representative

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 50 of 58                     |

# CERTIFICATE OF CALIBRATION

No.: CAS-565027-G1J7F1-401

Type: 4158/2669/UA1345  
1886222/2025786

Serial No.:

Page 2 of 2

## Sensitivity

Nominal sensitivity: -38 dB re. 1V/Pa +/- 2 dB  
Sensitivity at calibration conditions: -38.26 dB re. 1V/Pa or 12.22 mV/Pa  
Sensitivity at reference conditions: -38.28 dB re. 1V/Pa or 12.19 mV/Pa  
Uncertainty: +/- 0.08 dB  
Correction factor K at reference conditions: 12.28 dB  
Calibration Frequency: 251.19 Hz

## Reference Conditions:

Pressure: 101.3 kPa  
Temperature: 23 °C  
Relative Humidity: 50%

## Traceable references

| Type | Serial no | Cal. date  | Due date   | Calibrated by | Trace number   |
|------|-----------|------------|------------|---------------|----------------|
| 4180 | 2602426   | 2020-06-09 | 2022-06-30 | DPLA          | M2.10-1392-2.1 |

## Condition "As Received":

Good


## Comments:

This Preamplifier predates the availability of TEDS

## Acoustic Pressure Response Results \*

The results in this table are not covered by the current A2LA Scope of Accreditation \*

| Frequency in Hertz | Sound Pressure Level in dB | IEC 711 Tolerance in dB | Actual Result in dB |
|--------------------|----------------------------|-------------------------|---------------------|
| 100                | -0.3                       | ± 0.5                   | -0.59               |
| 125                | -0.2                       | ± 0.5                   | -0.36               |
| 160                | -0.2                       | ± 0.5                   | -0.47               |
| 200                | -0.1                       | ± 0.4                   | -0.41               |
| 250                | -0.1                       | ± 0.4                   | 0.09                |
| 315                | -0.1                       | ± 0.4                   | -0.36               |
| 400                | 0                          | ± 0.4                   | -0.34               |
| 500                | Ref                        | Ref                     | 0.00                |
| 630                | 0.1                        | ± 0.4                   | -0.25               |
| 800                | 0.2                        | ± 0.4                   | 0.16                |
| 1,000              | 1.6                        | ± 0.5                   | 1.61                |
| 1,250              | 3.3                        | ± 0.5                   | 3.06                |
| 1,600              | 4.5                        | ± 0.5                   | 4.89                |
| 2,000              | 5.2                        | ± 0.6                   | 4.99                |
| 2,500              | 6                          | ± 0.6                   | 5.49                |
| 3,150              | 6.9                        | ± 0.7                   | 6.59                |
| 4,000              | 8                          | ± 0.8                   | 8.08                |
| 5,000              | 9.3                        | ± 1.0                   | 9.27                |
| 6,300              | 11.4                       | ± 1.0                   | 10.57               |
| 8,000              | 13.7                       | ± 1.5                   | 12.95               |
| 10,000             | 18                         | ± 2.0                   | 17.57               |

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 51 of 58                     |



**HOTTINGER  
BRÜEL & KJÆR**  
The Hottinger Brüel & Kjær Inc. Calibration Laboratory  
3079 Premiere Parkway Suite 120  
Duluth, GA 30097  
Telephone: 770-209-6907  
Fax: 770-447-4033  
Web site address: <http://www.hbkworld.com>



Calibration  
Certificate  
# 1568.01

**CERTIFICATE OF CALIBRATION**

No.: CAS-565027-G1J7F1-501

Page 1 of 2

**CALIBRATION OF:**

Calibrator: Brüel & Kjær      Type 4231      Serial No.: 2343018  
Identification:      IEC Class: 1

**CUSTOMER:**

PCTEST Engineering Laboratory Inc  
7185 Oakland Mills Road  
Columbia, MD 21046

✓ TK  
5/6/2022

**CALIBRATION CONDITIONS:**

Environment conditions:      Air temperature: 23 °C  
                                         Air pressure: 96.93 kPa  
                                         Relative Humidity: 40 %RH

**SPECIFICATIONS:**

This document certifies that the acoustic calibrator as listed under "Type" has been calibrated and unless otherwise indicated under "Final Data", meets acceptance criteria as prescribed by the referenced Procedure. Statements of compliance, where applicable, are based on calibration results falling within specified criteria with no reduction by the uncertainty of the measurements. The calibration of the listed transducer was accomplished using a test system which conforms to the requirements of ISO/IEC 17025, ANSI/NCSL Z540-1, and guidelines of ISO 10012-1. For "as received" and "final" data, see the attached page(s). Items marked with one asterisk (\*) are not covered by the scope of the current A2LA accreditation. This Certificate and attached data pages shall not be reproduced, except in full, without written approval of the Hottinger Brüel & Kjær Inc. Calibration Laboratory-Duluth, GA. Results relate only to the items tested. The transducer has been calibrated using Measurement Standards with values traceable to the National Institute of Standards and Technology, National Measurement Institutes or derived from natural physical constants. The acoustic calibrator has been calibrated in accordance with the requirements as specified in IEC60942.

**PROCEDURE:**

The measurements have been performed with the assistance of Hottinger Brüel & Kjær Inc. acoustic calibrator calibration application  
Software version 2.3.4 Type 7794 using calibration procedure 4231 Complete

**RESULTS:**

- "As Received" Data: Within Acceptance Criteria       "As Received" Data: Outside Acceptance Criteria  
 "Final" Data : Within Acceptance Criteria       "Final" Data : Outside Acceptance Criteria

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the calibrator under calibration.

Date of Calibration: 06 April 2022

Certificate issued: 06 April 2022

Jimmy Smith  
Calibration Technician

Meshau Hobbs  
Quality Representative

|                                     |                                        |                                  |                                   |
|-------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |                                        | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023 | DUT Type:<br>Portable Handset    | Page 52 of 58                     |

## CERTIFICATE OF CALIBRATION

No.: CAS-565027-G1J7F1-501

Type: 4231

Serial No.: 2343018

Page 2 of 2

### Sound Pressure Levels

All stated values are valid at environmental reference conditions

| Nominal Level [dB] | Accept Limit Lower [dB] | Accept Limit Upper [dB] | Measured Level [dB] | Measurement Uncertainty [dB] |
|--------------------|-------------------------|-------------------------|---------------------|------------------------------|
| 94                 | 93.80                   | 94.20                   | 93.99               | 0.12                         |
| 114                | 113.80                  | 114.20                  | 114.03              | 0.12                         |

### Frequency

| Nominal Frequency [Hz] | Accept Limit Lower [Hz] | Accept Limit Upper [Hz] | Measured Frequency [Hz] | Measurement Uncertainty [Hz] |
|------------------------|-------------------------|-------------------------|-------------------------|------------------------------|
| 1000                   | 999.00                  | 1001.00                 | 999.98                  | 0.10                         |

### Total Distortion\*

Distortion mode:  TD\*  THD\*

| Calibration Level [dB]* | Accept Limit [%]* | Measured Distortion [%]* | Measurement Uncertainty [%]* |
|-------------------------|-------------------|--------------------------|------------------------------|
| 94                      | 1.00              | 0.53                     | 0.13                         |
| 114                     | 1.00              | 0.17                     | 0.13                         |

### Environmental Reference Conditions:

Pressure: 101.3 kPa, Temperature: 23 °C, Relative Humidity: 50%

### Instrument List

| Type | Description            | Serial no | Cal. date  | Due date   | Calibrated by | Trace number          |
|------|------------------------|-----------|------------|------------|---------------|-----------------------|
| 3560 | PULSE Analyzer         | 2723320   | 2021-10-18 | 2022-10-18 | JCA           | CAS-541708-J2Z8Q8-301 |
| 9545 | Transfer Microphone    | 3         | 2021-10-28 | 2022-10-31 | MH            | CAS-541708-J2Z8Q8-403 |
| 4228 | Reference Sound Source | 1618502   | 2021-04-30 | 2023-04-30 | M. Hobbs      | CAS-512601-TOX4B1-402 |

During the calibration the calibrator has been loaded by the load volume of the Transfer Microphone. The load volumes for a number of different types of Transfer Microphones are listed in the table below.


For Brüel & Kjær Pistonphones types 4220 and 4228 the result of the SPL calibration has been corrected to be valid for a load volume of 1333 mm<sup>3</sup>. For all other types the result is valid with the actual load volume.

| Transfer Microphone Type | Fulfils standard IEC 61094-1 LS | Fulfils standard IEC 61094-4 WS | Load Volume 1" (1/2" mic including DP-0776) | Load Volume 1/2"    |
|--------------------------|---------------------------------|---------------------------------|---------------------------------------------|---------------------|
| 4180                     | yes                             | yes                             | 1126 mm <sup>3</sup>                        | 43 mm <sup>3</sup>  |
| 4192                     | -                               | yes                             | 1273 mm <sup>3</sup>                        | 190 mm <sup>3</sup> |
| 9545                     | -                               | -                               | 1333 mm <sup>3</sup>                        | -                   |

### Condition "As Received":

Good


### Comments

|                                     |                                                                                     |                                  |                                   |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                              | DUT Type:<br>Portable Handset    | Page 53 of 58                     |

## 15. CONCLUSION


The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.


|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 54 of 58                     |

## 16. REFERENCES

1. ANSI C63.19-2019, "American National Standard Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids," IEEE, New York, NY, August 2019
2. ANSI/TIA-5050-2018, "Communications Products – Receive Volume Control Requirements for Wireless (Mobile) Devices," Telecommunications Industry Association, Arlington, VA, January 2018
3. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v06r04," September 29, 2023
4. FCC Office of Engineering and Technology KDB, "285076 D04 Volume Control v02," September 29, 2023
5. FCC Office of Engineering and Technology KDB, "285076 D05 CG Interim Waiver DA 23-914 v01," September 29, 2023
6. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
7. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
8. ANSI/IEEE Std 269-2010, "IEEE Standard Methods for Measuring Transmission Performance of Analog and Digital Telephone Sets, Handsets, and Headsets," IEEE, 2010
9. ANSI/IEEE Std 1652-2016, "IEEE Standard for Translating Head and Torso Simulator Measurements from Eardrum to Other Acoustic Reference Points," IEEE, 2016
10. ITU-T Recommendation P.56, "Objective measurement of active speech level," ITU, December 2011
11. ITU-T Recommendation P.57, "Artificial ears," ITU December 2011
12. ITU-T Recommendation P.58, "Head and torso simulator for telephonometry," ITU, May 2013
13. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
14. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," *Wireless Telephones and Hearing Aids: New Challenges for Audiology*, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
15. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
16. Byrne, D. and Dillon, H., "The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid," *Ear and Hearing* 7:257-265, 1986.
17. EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 55 of 58                     |

18. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
19. EHIMA GSM Project Final Report, "Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity." Technical-Audiological Laboratory and Telecom Denmark, 1995.
20. HAMPIS Report, "Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference," October 1999.
21. "Hearing Aids/GSM," Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
22. IEEE 100, "The Authoritative Dictionary of IEEE Standards Terms," Seventh Edition.
23. Joyner, K. H, et. al., "Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard," National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
24. Joyner, K. H., et. al., "Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM)," NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
25. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
26. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
27. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
28. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
29. McCandless, G. A., and Lyregaard, P. E., "Prescription of Gain/Output (POGO) for Hearing Aids," Hearing Instruments 1:16-21, 1983
30. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones," IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
31. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
32. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
33. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

|                                     |                                                                                             |                                  |                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------|
| FCC ID: A3LSMA156U                  |  element | HAC (VOLUME CONTROL) TEST REPORT | Approved by:<br>Managing Director |
| Filename:<br>1M2309070100-20-R4.A3L | Test Dates:<br>10/16/2023 – 10/30/2023                                                      | DUT Type:<br>Portable Handset    | Page 56 of 58                     |