

CERTIFICATION TEST REPORT

Report Number. : S-4791427005-E9V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-A165M/DS, SM-A165M

FCC ID : A3LSMA165M

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2024-09-13

Prepared by:

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2024-09-13	Initial issue	Myeongjun Kwon

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
4.4. DECISION RULE.....	6
5. EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM E-FIELD STRENGTH	7
5.3. WORST-CASE CONFIGURATION AND MODE.....	7
5.4. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	9
7. 20dB BANDWIDTH	10
8. RADIATED EMISSION TEST RESULTS.....	11
8.1. LIMITS AND PROCEDURE.....	11
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	13
8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz	14
8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	15
8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT without passive TAG mode]	16
8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT without passive TAG mode].....	17
8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode] .	18
9. AC MAINS LINE CONDUCTED EMISSIONS.....	19
10. FREQUENCY STABILITY.....	24

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.
MODEL NUMBER: SM-A165M/DS, SM-A165M
SERIAL NUMBER: R38X7005NNF, R38X7005NPM (CONDUCTED);
R38X7005NXA, R38X7005NWB (RADIATED)
DATE TESTED: 2024-08-12 - 2024-09-13;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Myeongjun Kwon
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2020.
4. KDB 414788 D01 Radiated Test Site v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.
 This test report addresses the DXX (NFC) operational mode.

Representative model	Difference	Derivative model
		SM-A165M
SM-A165M/DS	Hardware	SIM tray is single SIM
	Software	Dual SIM not supported

The model SM-A165M/DS was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 16.45 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

Worst case of antenna axis:

NFC with tag mode	NFC without tag mode
Y	Y

The fundamental level of the EUT was investigated each type and bitrate.
 All test was performed worst case condition.

- ISO/IEC 14443-A(Type A) and bit rate 106 kbps

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37TC7A00JBDKA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02115A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

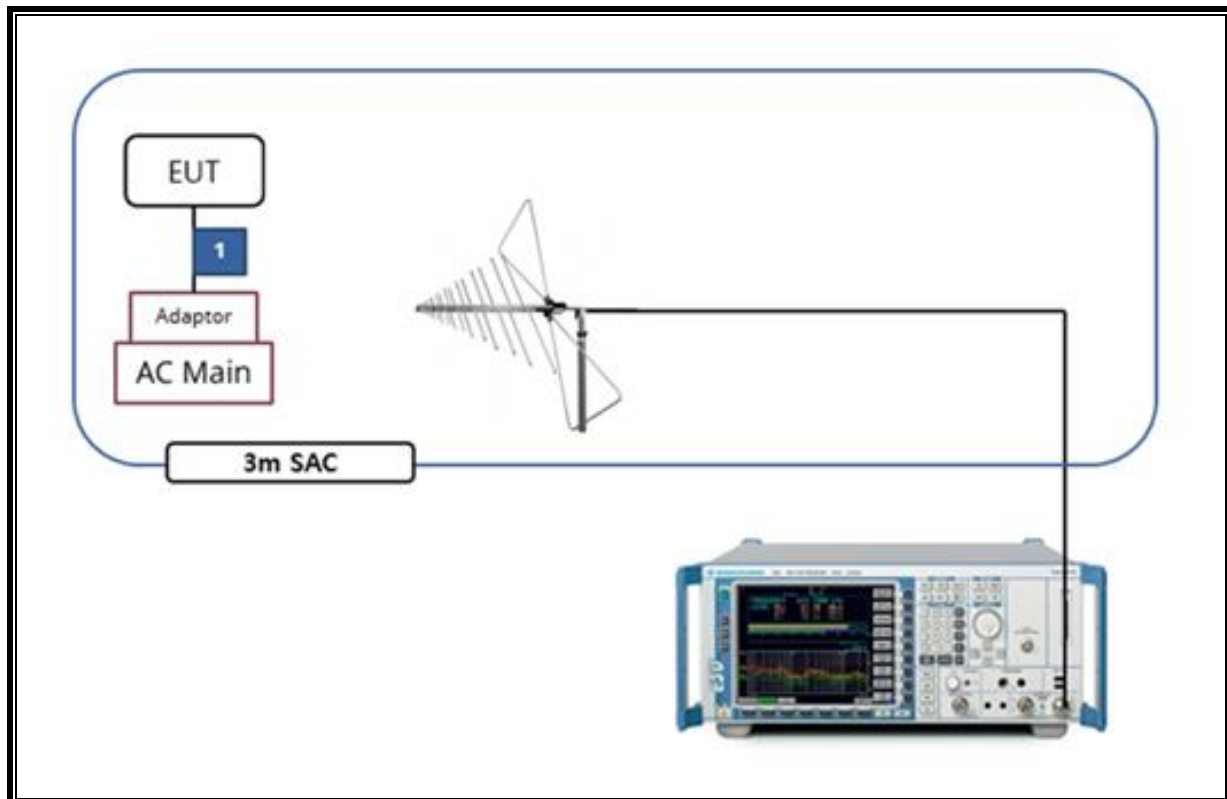

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	845	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	749	2026-08-12
Preamplifier, 1000 MHz	Sonoma	310N	341282	2025-07-22
Preamplifier, 1000 MHz	Sonoma	310N	351741	2025-07-22
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2025-07-23
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030A	MY54170614	2025-07-24
EMI Test Receive, 3 GHz	R&S	ESR 3	101832	2025-07-22
DC Power Supply	Agilent / HP	E3640A	MY54226395	2025-07-24
Temperature Chamber	ESPEC	SH-642	93001109	2025-07-23
LISN	R&S	ENV216	101836	2025-07-22
LISN	R&S	ENV216	101837	2025-07-22
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-07
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz


TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 1-5% of emission BW. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	436

20dB Bandwidth Plot

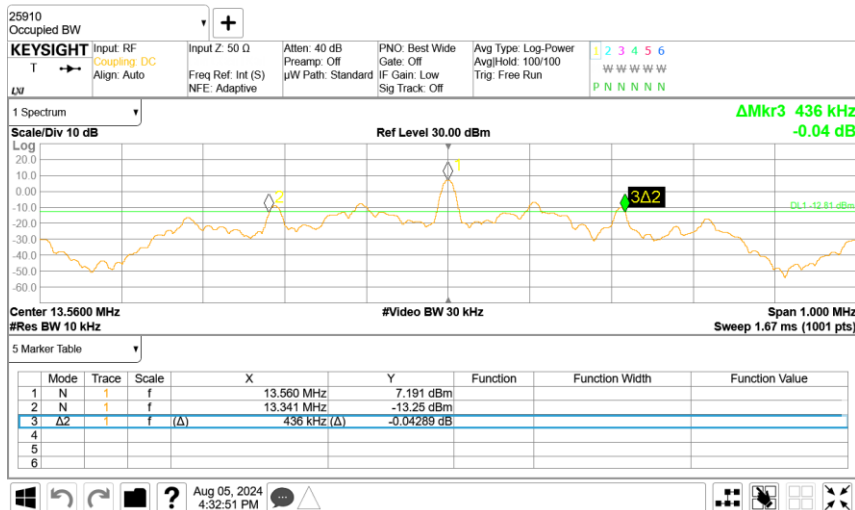

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE


ANSI C63.10-2020

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]

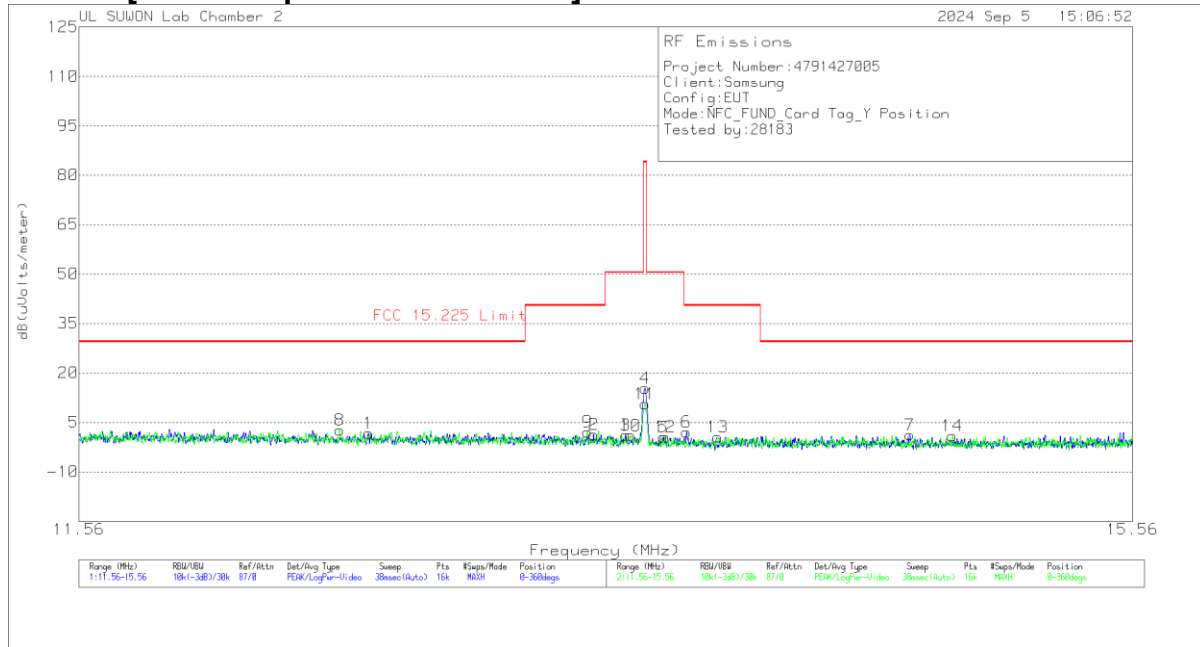

Trace Markers Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	12.54313	21.1	Pk	20.1	-40	.5	1.7	29.54	-27.84	0-360
2	13.36538	20.79	Pk	20.1	-40	.5	1.39	40.51	-39.12	0-360
3	13.48663	20.57	Pk	20.1	-40	.5	1.17	50.5	-49.33	0-360
**4	13.56025	34.75	Pk	20.1	-40	.5	15.35	84	-68.65	0-360
5	13.63188	19.82	Pk	20.1	-40	.6	.52	50.5	-49.98	0-360
6	13.72088	21.48	Pk	20.1	-40	.6	2.18	40.51	-38.33	0-360
7	14.61188	20.55	Pk	20.1	-40	.6	1.25	29.54	-28.29	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	12.44188	21.97	Pk	20.2	-40	.5	2.67	29.54	-26.87	0-360
9	13.34188	21.46	Pk	20.1	-40	.5	2.06	40.51	-38.45	0-360
10	13.50525	20.47	Pk	20.1	-40	.5	1.07	50.5	-49.43	0-360
**11	13.56063	29.99	Pk	20.1	-40	.5	10.59	84	-73.41	0-360
12	13.63788	19.89	Pk	20.1	-40	.6	.59	50.5	-49.91	0-360
13	13.84188	19.85	Pk	20.1	-40	.6	.55	40.51	-39.96	0-360
14	14.78913	20.29	Pk	20.1	-40	.6	.99	29.54	-28.55	0-360

Pk - Peak detector
 **Fundamental


Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz

[EUT with passive TAG mode]

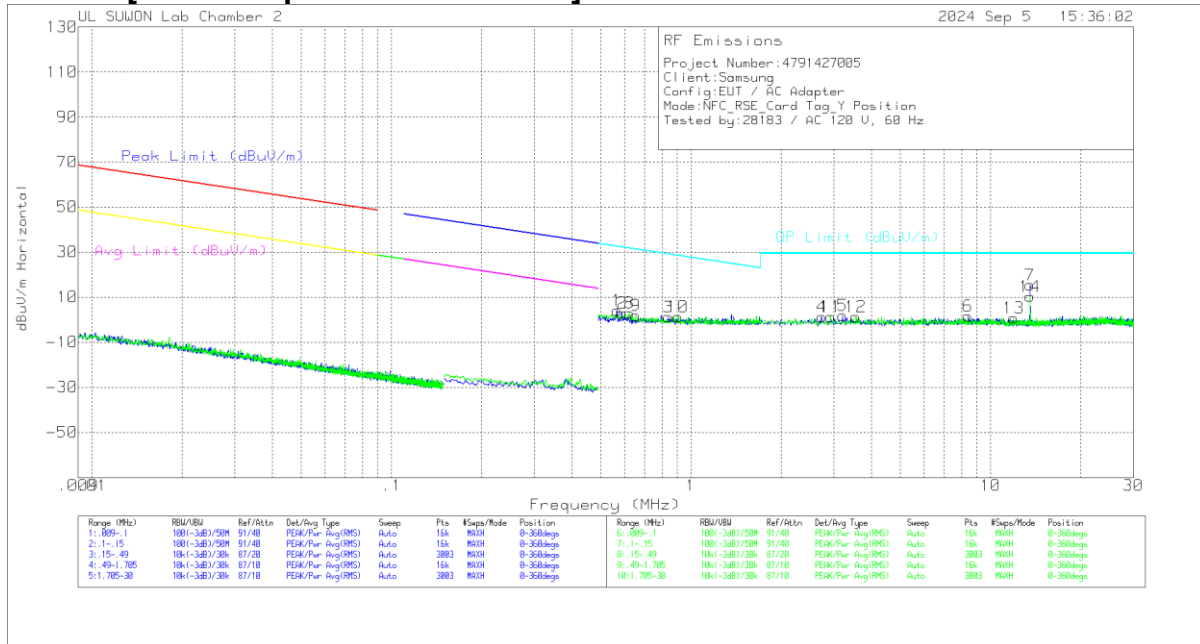

Trace Markers

[Face on]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.56577	24.03	Pk	19.9	.1	-40	4.03	32.55	-28.52	0-360
2	.58755	23.07	Pk	19.9	.1	-40	3.07	32.23	-29.16	0-360
3	.84085	21.14	Pk	19.9	.2	-40	1.24	29.12	-27.88	0-360
4	2.73704	21	Pk	20.1	.3	-40	1.4	29.5	-28.1	0-360
5	3.20829	21.59	Pk	20.1	.3	-40	1.99	29.5	-27.51	0-360
6	8.4156	21.14	Pk	20	.4	-40	1.54	29.5	-27.96	0-360
7	13.56165	34.9	Pk	20	.5	-40	15.4	29.5	-14.1	0-360

[Face off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.62281	23	Pk	19.9	.1	-40	3	31.72	-28.72	0-360
9	.65443	21.91	Pk	19.9	.1	-40	1.91	31.29	-29.38	0-360
10	.9053	21.22	Pk	19.9	.2	-40	1.32	28.48	-27.16	0-360
11	2.92083	20.92	Pk	20.1	.3	-40	1.32	29.5	-28.18	0-360
12	3.5523	20.85	Pk	20.1	.3	-40	1.25	29.5	-28.25	0-360
13	11.96883	20.23	Pk	20	.5	-40	.73	29.5	-28.77	0-360
14	13.56165	29.88	Pk	20	.5	-40	10.38	29.5	-19.12	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.1 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]

HORIZONTAL

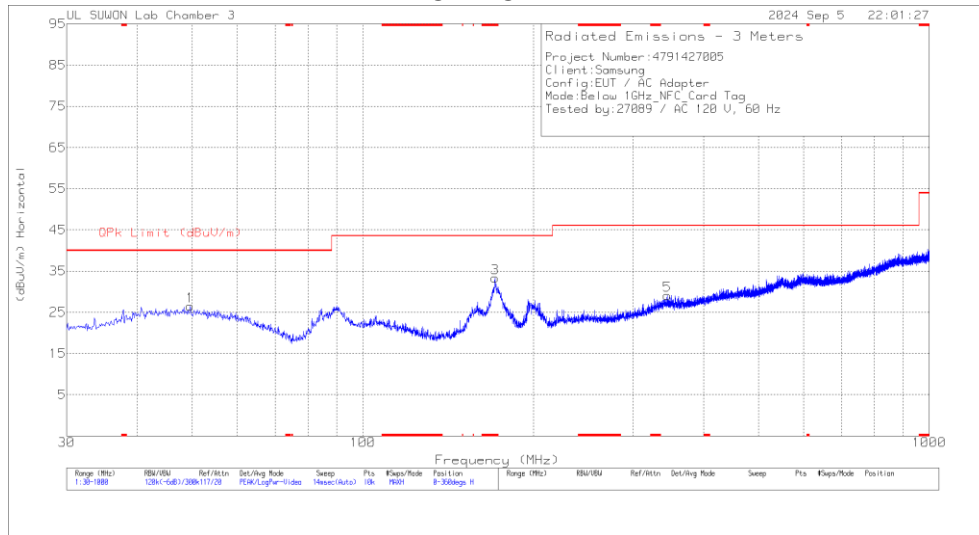

VERTICAL

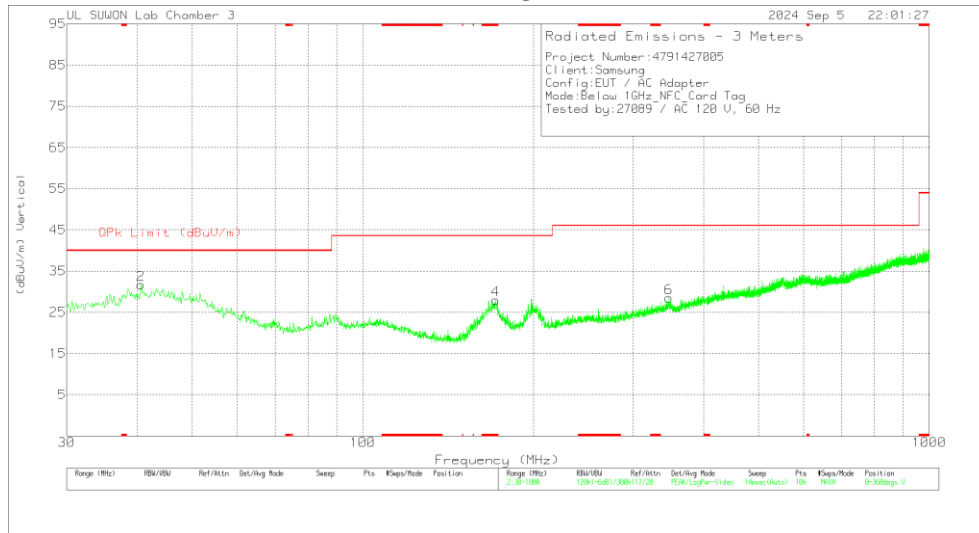


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor (dB/m)	Below_1G_Path Loss (dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	49.596	38.6	Pk	19.8	-31.9	26.5	40	-13.5	0-360	300	H
3	* 171.0525	49.86	Pk	14.5	-31	33.36	43.52	-10.16	0-360	100	H
5	344.5064	38.93	Pk	20.4	-30.2	29.13	46.02	-16.89	0-360	100	H
2	40.5741	44.79	Pk	18.8	-31.9	31.69	40	-8.31	0-360	100	V
4	* 171.4406	44.44	Pk	14.5	-31	27.94	43.52	-15.58	0-360	100	V
6	347.1257	38.23	Pk	20.4	-30.2	28.43	46.02	-17.59	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT without passive TAG mode]

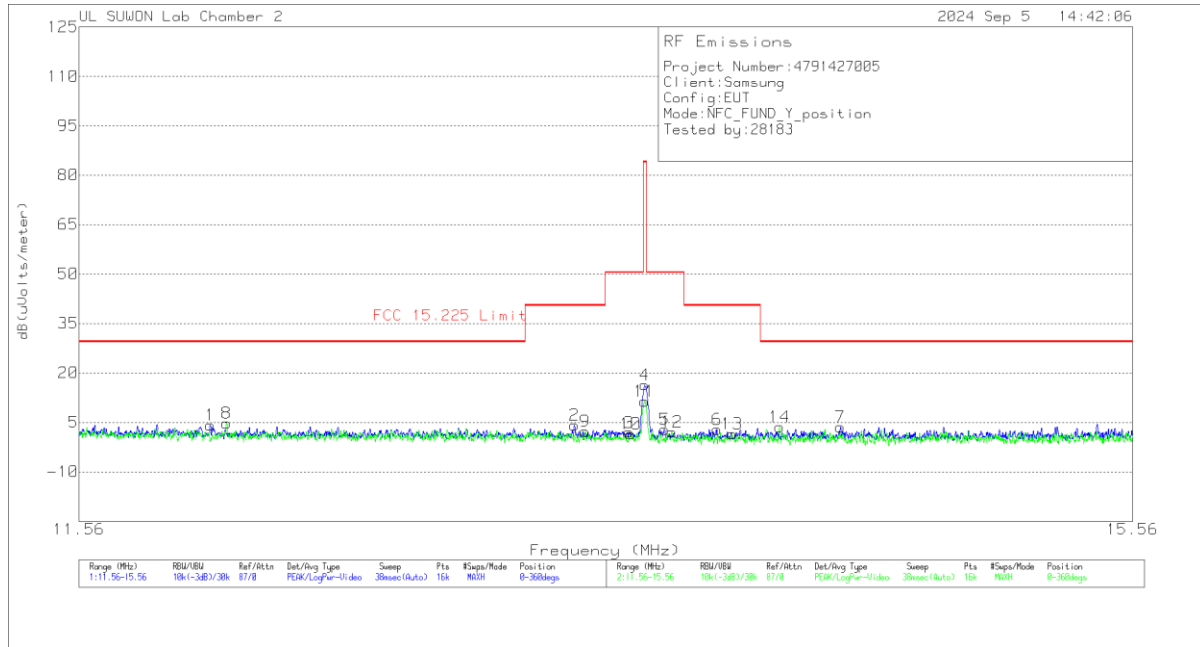

Trace Markers Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	11.99575	23.57	Pk	20.2	-40	.5	4.27	29.54	-25.27	0-360
2	13.29338	23.54	Pk	20.1	-40	.5	4.14	40.51	-36.37	0-360
3	13.499	21.42	Pk	20.1	-40	.5	2.02	50.5	-48.48	0-360
**4	13.56	35.85	Pk	20.1	-40	.5	16.45	84	-67.55	0-360
5	13.63513	22.21	Pk	20.1	-40	.6	2.91	50.5	-47.59	0-360
6	13.83838	22.23	Pk	20.1	-40	.6	2.93	40.51	-37.58	0-360
7	14.32938	22.98	Pk	20.1	-40	.6	3.68	29.54	-25.86	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	12.05113	24.08	Pk	20.2	-40	.5	4.78	29.54	-24.76	0-360
9	13.33438	21.77	Pk	20.1	-40	.5	2.37	40.51	-38.14	0-360
10	13.50688	20.93	Pk	20.1	-40	.5	1.53	50.5	-48.97	0-360
**11	13.55888	30.81	Pk	20.1	-40	.5	11.41	84	-72.59	0-360
12	13.66413	21.49	Pk	20.1	-40	.6	2.19	50.5	-48.31	0-360
13	13.89738	20.9	Pk	20.1	-40	.6	1.6	40.51	-38.91	0-360
14	14.08563	22.93	Pk	20.1	-40	.6	3.63	29.54	-25.91	0-360


Pk - Peak detector
 **Fundamental

Note 1: Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT without passive TAG mode]

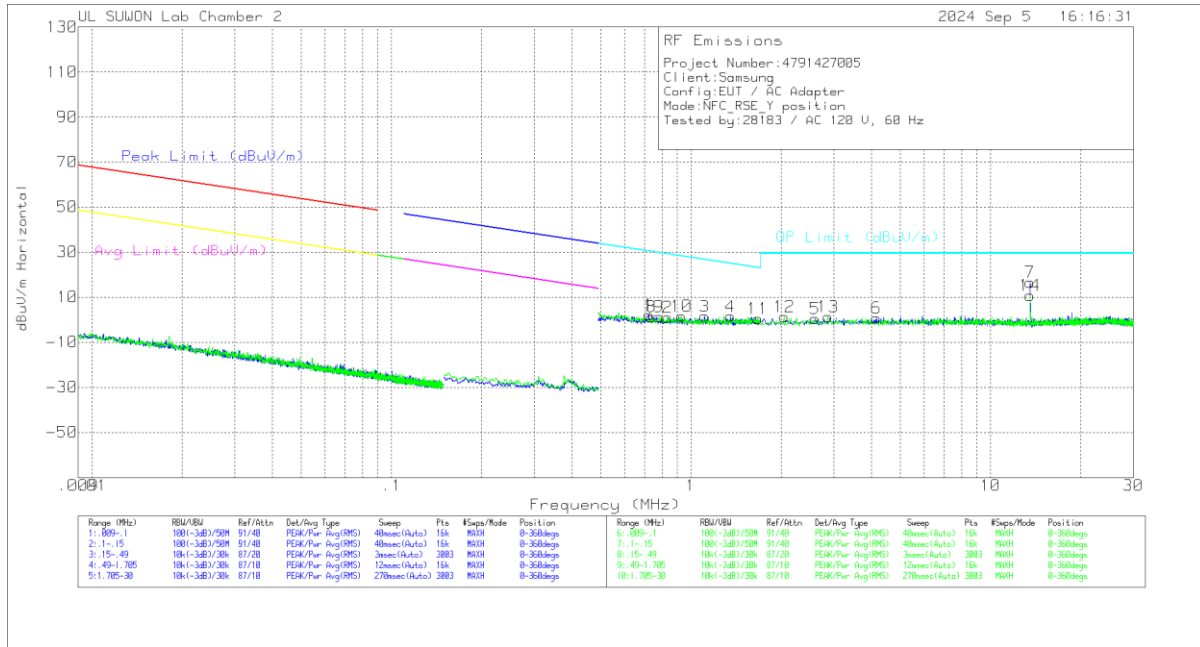

Trace Markers

[Face on]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	.72313	22.25	Pk	19.9	.1	-40	2.25	30.43	-28.18	0-360
2	.83781	20.91	Pk	19.9	.2	-40	1.01	29.15	-28.14	0-360
3	1.11058	21.4	Pk	19.9	.2	-40	1.5	26.71	-25.21	0-360
4	1.35545	21.39	Pk	19.9	.2	-40	1.49	24.99	-23.5	0-360
5	2.59095	20.04	Pk	20.1	.3	-40	.44	29.5	-29.06	0-360
6	4.1555	20.36	Pk	20.1	.3	-40	.76	29.5	-28.74	0-360
**7	13.56165	36.07	Pk	20	.5	-40	16.57	29.5	-12.93	0-360

[Face off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	.73825	21.27	Pk	19.9	.1	-40	1.27	30.25	-28.98	0-360
9	.78214	21.35	Pk	19.9	.2	-40	1.45	29.75	-28.3	0-360
10	.92909	21.65	Pk	19.9	.2	-40	1.75	28.26	-26.51	0-360
11	1.67632	20.26	Pk	20	.2	-40	.46	23.15	-22.69	0-360
12	2.05373	21.18	Pk	20	.2	-40	1.38	29.5	-28.12	0-360
13	2.8737	20.98	Pk	20.1	.3	-40	1.38	29.5	-28.12	0-360
**14	13.56165	30.32	Pk	20	.5	-40	10.82	29.5	-18.68	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.4 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode]

HORIZONTAL

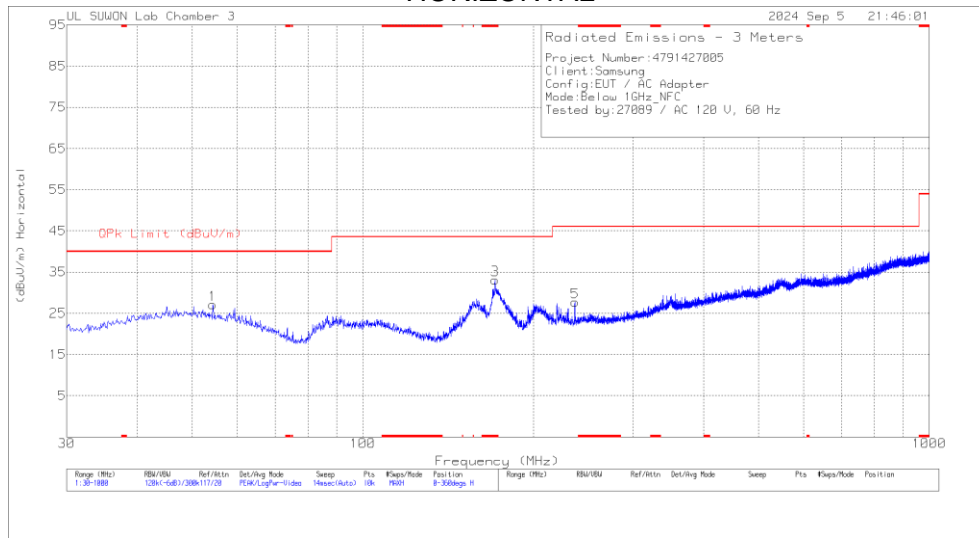

VERTICAL

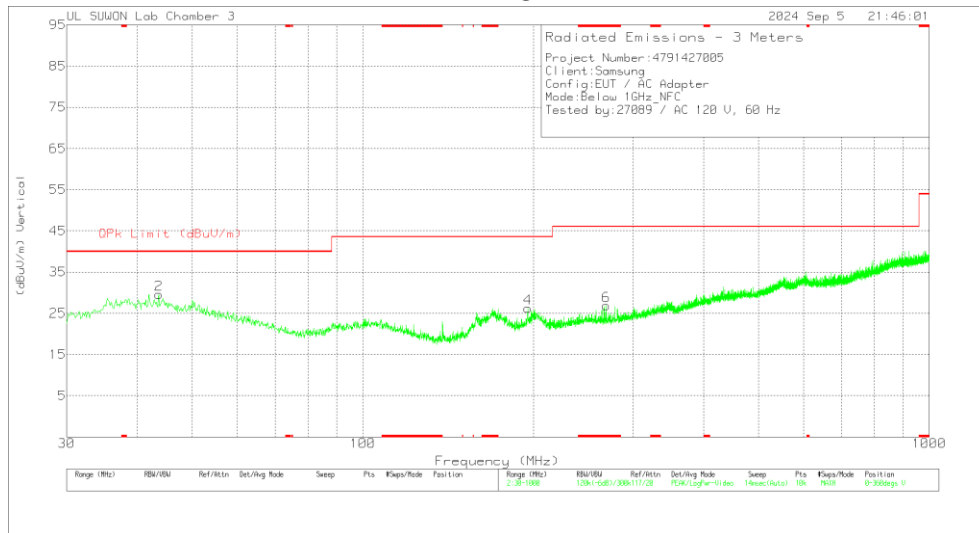

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor (dB/m)	Below_1G_Path Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	54.3495	39.56	Pk	19.4	-31.8	27.16	40	-12.84	0-360	300	H
3	* 171.1496	49.65	Pk	14.5	-31	33.15	43.52	-10.37	0-360	100	H
5	236.7283	40.73	Pk	17.6	-30.6	27.73	46.02	-18.29	0-360	200	H
2	43.6784	42.1	Pk	19.5	-32	29.6	40	-10.4	0-360	100	V
4	195.4991	40.24	Pk	16.8	-30.8	26.24	43.52	-17.28	0-360	100	V
6	* 268.9356	39.26	Pk	18.1	-30.5	26.86	46.02	-19.16	0-360	100	V

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS(non-Terminated)

LINE 1 PLOT

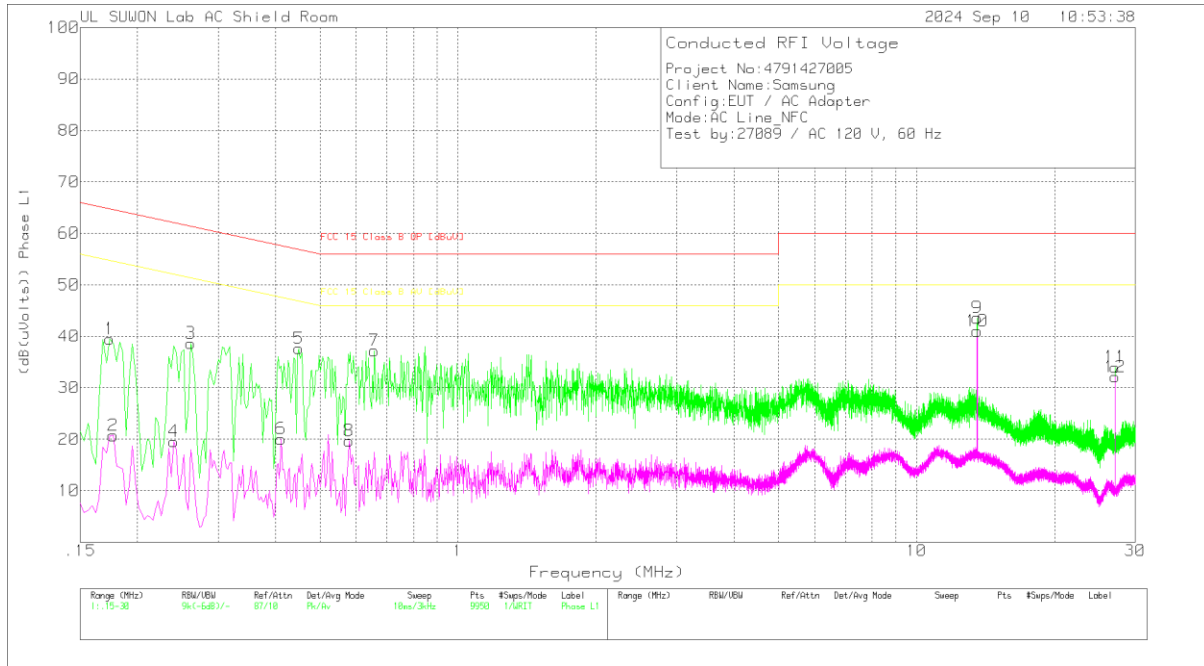

LINE 1 RESULTS

Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.174	29.38	Pk	10	.1	39.48	64.77	-25.29	-	-
2	.177	10.61	Av	10	.1	20.71	-	-	54.63	-33.92
3	.261	28.95	Pk	9.6	.1	38.65	61.4	-22.75	-	-
4	.24	9.75	Av	9.7	.1	19.55	-	-	52.1	-32.55
5	.45	27.72	Pk	9.8	.1	37.62	56.88	-19.26	-	-
6	.411	10.19	Av	9.8	.1	20.09	-	-	47.63	-27.54
7	.657	27.31	Pk	9.8	.1	37.21	56	-18.79	-	-
8	.579	9.78	Av	9.8	.1	19.68	-	-	46	-26.32
9	13.56	33.27	Pk	10	.3	43.57	60	-16.43	-	-
10	13.56	30.71	Av	10	.3	41.01	-	-	50	-8.99
11	27.12	23.2	Pk	10.5	.3	34	60	-26	-	-
12	27.12	21.31	Av	10.5	.3	32.11	-	-	50	-17.89

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

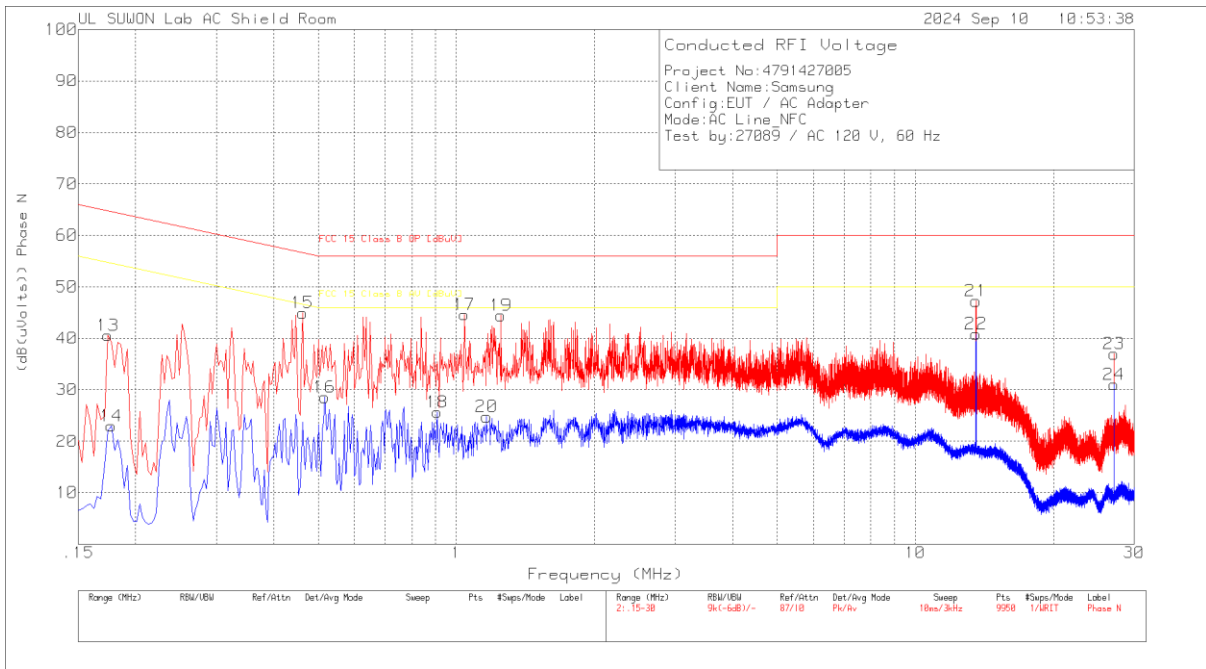

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.174	30.45	Pk	10	.1	40.55	64.77	-24.22	-	-
14	.177	12.85	Av	10	.1	22.95	-	-	54.63	-31.68
15	.462	35.03	Pk	9.8	.1	44.93	56.66	-11.73	-	-
16	.516	18.55	Av	9.9	.1	28.55	-	-	46	-17.45
17	1.041	34.8	Pk	9.7	.1	44.6	56	-11.4	-	-
18	.909	15.75	Av	9.8	.1	25.65	-	-	46	-20.35
19	1.251	34.63	Pk	9.7	.1	44.43	56	-11.57	-	-
20	1.164	14.96	Av	9.7	.1	24.76	-	-	46	-21.24
21	13.56	36.94	Pk	10	.3	47.24	60	-12.76	-	-
22	13.56	30.55	Av	10	.3	40.85	-	-	50	-9.15
23	27.12	26.08	Pk	10.6	.3	36.98	60	-23.02	-	-
24	27.12	20.13	Av	10.6	.3	31.03	-	-	50	-18.97

Pk - Peak detector

Av - Average detection

WORST EMISSIONS(Terminated)

LINE 1 PLOT

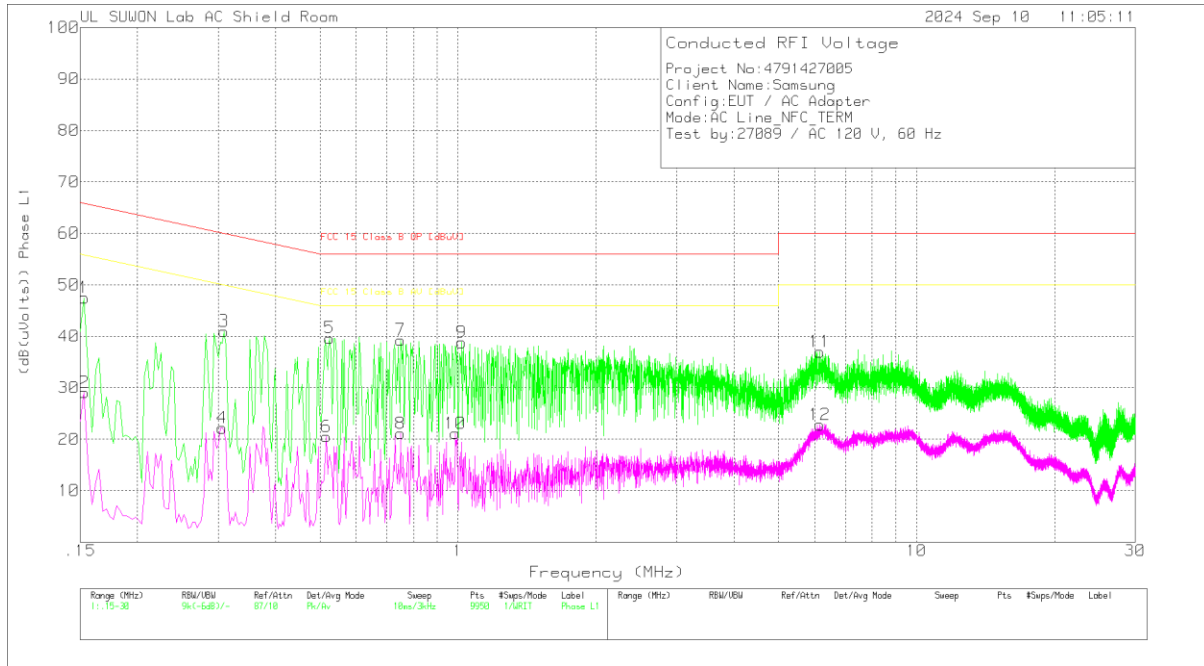

LINE 1 RESULTS

Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.153	37.58	Pk	9.8	.1	47.48	65.84	-18.36	-	-
2	.153	19.17	Av	9.8	.1	29.07	-	-	55.84	-26.77
3	.309	31.17	Pk	9.7	.1	40.97	60	-19.03	-	-
4	.306	12.38	Av	9.7	.1	22.18	-	-	50.08	-27.9
5	.525	29.65	Pk	9.9	.1	39.65	56	-16.35	-	-
6	.516	10.5	Av	9.9	.1	20.5	-	-	46	-25.5
7	.75	29.33	Pk	9.8	.1	39.23	56	-16.77	-	-
8	.75	11.2	Av	9.8	.1	21.1	-	-	46	-24.9
9	1.017	29.01	Pk	9.7	.1	38.81	56	-17.19	-	-
10	.987	11.23	Av	9.8	.1	21.13	-	-	46	-24.87
11	6.15	26.98	Pk	9.8	.2	36.98	60	-23.02	-	-
12	6.153	12.79	Av	9.8	.2	22.79	-	-	50	-27.21

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

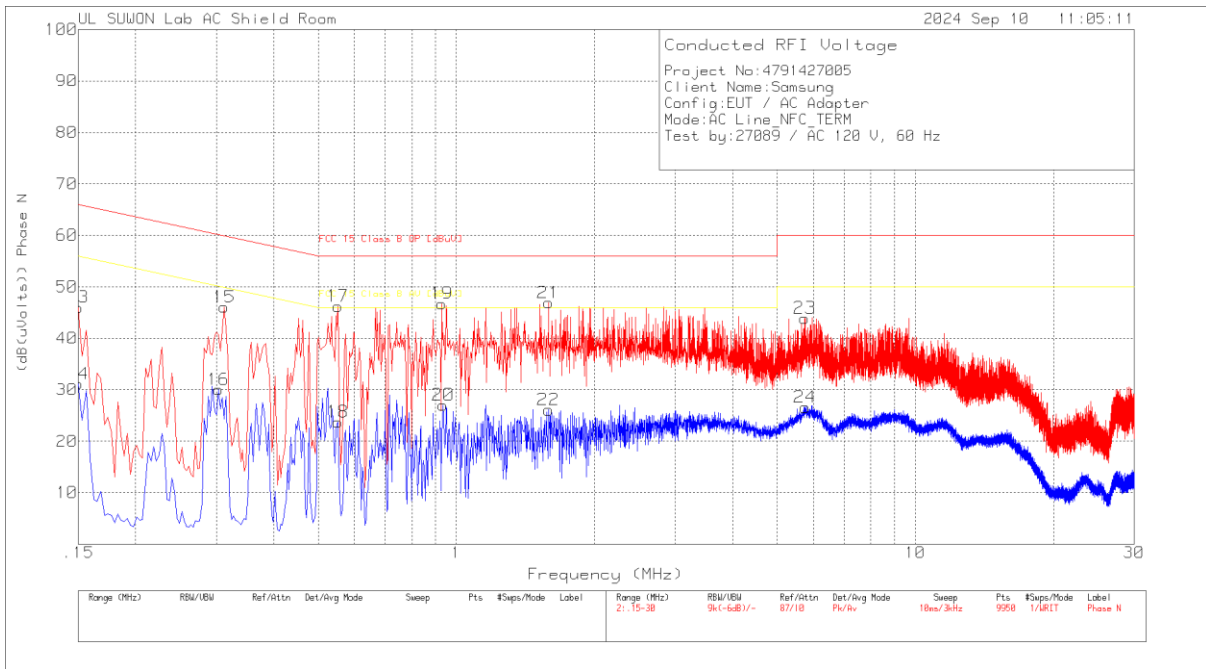

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.15	36.21	Pk	9.7	.1	46.01	66	-19.99	-	-
14	.15	21.34	Av	9.7	.1	31.14	-	-	56	-24.86
15	.312	36.27	Pk	9.7	.1	46.07	59.92	-13.85	-	-
16	.303	20.25	Av	9.7	.1	30.05	-	-	50.16	-20.11
17	.552	36.31	Pk	9.8	.1	46.21	56	-9.79	-	-
18	.552	13.81	Av	9.8	.1	23.71	-	-	46	-22.29
19	.93	36.84	Pk	9.8	.1	46.74	56	-9.26	-	-
20	.936	17.13	Av	9.8	.1	27.03	-	-	46	-18.97
21	1.587	37.12	Pk	9.7	.1	46.92	56	-9.08	-	-
22	1.587	16.29	Av	9.7	.1	26.09	-	-	46	-19.91
23	5.745	33.91	Pk	9.8	.2	43.91	60	-16.09	-	-
24	5.751	16.58	Av	9.8	.2	26.58	-	-	50	-23.42

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
.55275	28.54	Qp	9.8	.1	38.44	56	-17.56	-	-
.93015	28.78	Qp	9.8	.1	38.68	56	-17.32	-	-
1.58775	25.7	Qp	9.7	.1	35.5	56	-20.5	-	-

Qp - Quasi-Peak detector

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Test Date	2024-8-8
Test Engineer	25910

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	50	13.559941400	-3.851	13.559941750	-3.826	13.559942217	13.560	13.559942510	-3.770	100
3.88	40	13.559947219	-3.422	13.559945785	-3.528	13.559944656	-3.611	13.559943891	-3.668	100
3.88	30	13.559972723	-1.541	13.559968416	-1.859	13.559964672	-2.135	13.559961848	-2.343	100
3.88	20	13.559993625	0.000	13.559990632	-0.221	13.559988693	-0.364	13.559987323	-0.465	100
3.88	10	13.560025858	2.377	13.560022624	2.139	13.560019618	1.917	13.560015912	1.644	100
3.88	0	13.560040679	3.470	13.560039809	3.406	13.560039086	3.353	13.560038471	3.307	100
3.88	-10	13.560047880	4.001	13.560048393	4.039	13.560048597	4.054	13.560048558	4.051	100
3.88	-20	13.560039577	3.389	13.560039616	3.392	13.560039625	3.392	13.560039327	3.370	100
3.88	-30	13.560012028	1.357	13.560008210	1.076	13.560006519	0.951	13.560005313	0.862	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.70	20	13.559993432	-0.014	13.559990375	-0.240	13.559988605	-0.356	13.559987290	-0.453	100
3.88	20	13.559993625	0.000	13.559990632	-0.221	13.559988693	-0.349	13.559987323	-0.451	100
4.45	20	13.559993162	-0.034	13.559990259	-0.248	13.559988459	-0.367	13.559987289	-0.453	100

No non-compliance noted.

END OF TEST REPORT