

CERTIFICATION TEST REPORT

Report Number. : S-4791440365-E6V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-A166U, SM-A166U1, SM-S166V

FCC ID : A3LSMA166U

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac
and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2024-10-18

Prepared by:

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2024-10-04	Initial issue	Myeongjun Kwon
V2	2024-10-18	Updated to address TCB's question	Myeongjun Kwon

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
4.4. DECISION RULES.....	7
5. EQUIPMENT UNDER TEST.....	8
5.1. EUT DESCRIPTION	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
6. MEASUREMENT METHOD.....	12
7. TEST AND MEASUREMENT EQUIPMENT	13
8. TEST RESULTS SUMMARY	14
9. ANTENNA PORT TEST RESULTS	15
9.1. ON TIME AND DUTY CYCLE.....	15
9.2. 6 dB BANDWIDTH.....	16
9.2.1. Test data.....	16
9.2.2. 6 dB BANDWIDTH PLOTS	17
9.3. OUTPUT POWER.....	18
9.3.1. SISO MODE TEST DATA	18
9.3.2. PEAK POWER PLOTS	19
9.4. AVERAGE POWER.....	20
9.4.1. SISO MODE TEST DATA.....	20
9.5. POWER SPECTRAL DENSITY	21
9.5.1. Test data.....	21
9.5.2. PSD TEST PLOTS.....	22
9.6. CONDUCTED SPURIOUS EMISSIONS.....	23
9.6.1. Test plot.....	24

10. RADIATED TEST RESULTS26

10.1. *LIMITS AND PROCEDURE.....26*

10.2. *TRANSMITTER ABOVE 1 GHz.....28*

 10.2.1. 500 Kbps ANT128

 10.2.2. 2 Mbps ANT135

10.3. *WORST CASE BELOW 1 GHz42*

11. AC POWER LINE CONDUCTED EMISSIONS43

11.1. *AC Power Line44*

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.

MODEL NUMBER: SM-A166U, SM-A166U1, SM-S166V

SERIAL NUMBER: R3CX807W82F, R3CX807W74Y, R3CX807W7RA (CONDUCTED); R3CX807W3JV, R3CX807W8JT, R3CX807W38R (RADIATED)

DATE TESTED: 2024-08-12 - 2024-10-04;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Myeongjun Kwon
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2020.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

$$\begin{aligned} \text{AC Corrected Reading (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Extension Cord} \\ &\text{Loss (dB)} + \text{Cable Loss (dB)} \\ 44.72 \text{ dBuV} &= 34.72 \text{ dBuV} + 9.9 \text{ dB} + 0.1 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.79 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.07 dB
Radiated Disturbance, 1 GHz to 18 GHz	4.99 dB
Radiated Disturbance, Above 18 GHz	5.96 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.
 This test report addresses the DTS (BLE) operational mode.

Representative model	Difference	Derivative model
		SM-A166U1, SM-S166V
SM-A166U	Hardware	Same
	Software	The UI has changed according to Service Provider

The model SM-A166U was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range[MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	500 kbps (37 pkt)	Peak	12.100	16.218
		Average	11.856	15.331
	2Mbps (37 pkt)	Peak	12.090	16.181
		Average	11.640	14.587

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of: -4.9 dBi

“Antenna D(WiFi)” as indicated in antenna specification are written as ANT1 in this report.

5.4. WORST-CASE CONFIGURATION AND MODE

The fundamentals of the EUT were investigated in three orthogonal orientations X, Y and Z. It was determined that below table’s orientation was the worst-case orientation.

ANT1
Z

Radiated and power line conducted tests were performed with EUT connected to AC power adapter as the worst-case configuration. Radiated harmonics spurious 1~18 GHz Low/Mid/High channels, 18-26GHz were performed with the EUT set at the worst mode. Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

All radiated and power line conducted tests were performed attached with travel adapter for the worst-case condition mode.

Power verification

The Output Power of all data rate are all investigated, the 500 kbps(37 pkt) and 2 Mbps(37 pkt) power is the worst case for symbol rate. All tests were performed in these two modes.

Symbol Rate [Ms/s]	Mode	Freq. [MHz]	Conducted Burst Average Power[dBm]	Symbol Rate [Ms/s]	Mode	Freq. [MHz]	Conducted Burst Average Power[dBm]
1	1 Mbps 37 pkt ANT1	2 402	11.788	2	2 Mbps 37 pkt ANT1	2 402	11.640
		2 440	11.372			2 440	11.101
		2 480	11.345			2 480	11.172
	1 Mbps 255 pkt ANT1	2 402	11.715		2 Mbps 255 pkt ANT1	2 402	11.537
		2 440	11.267			2 440	11.138
		2 480	11.335			2 480	11.201
1 Coded S=8	125 kbps 37 pkt ANT1	2 402	11.701	1 Coded S=2	500 kbps 37 pkt ANT1	2 402	11.856
		2 440	11.259			2 440	11.414
		2 480	11.334			2 480	11.492
	125 kbps 255 pkt ANT1	2 402	11.677		500 kbps 255 pkt ANT1	2 402	11.695
		2 440	11.340			2 440	11.359
		2 480	11.421			2 480	11.437

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37TC7A00JBDKA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02115A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
 Test software in hidden menu exercised the EUT to enable BLE mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

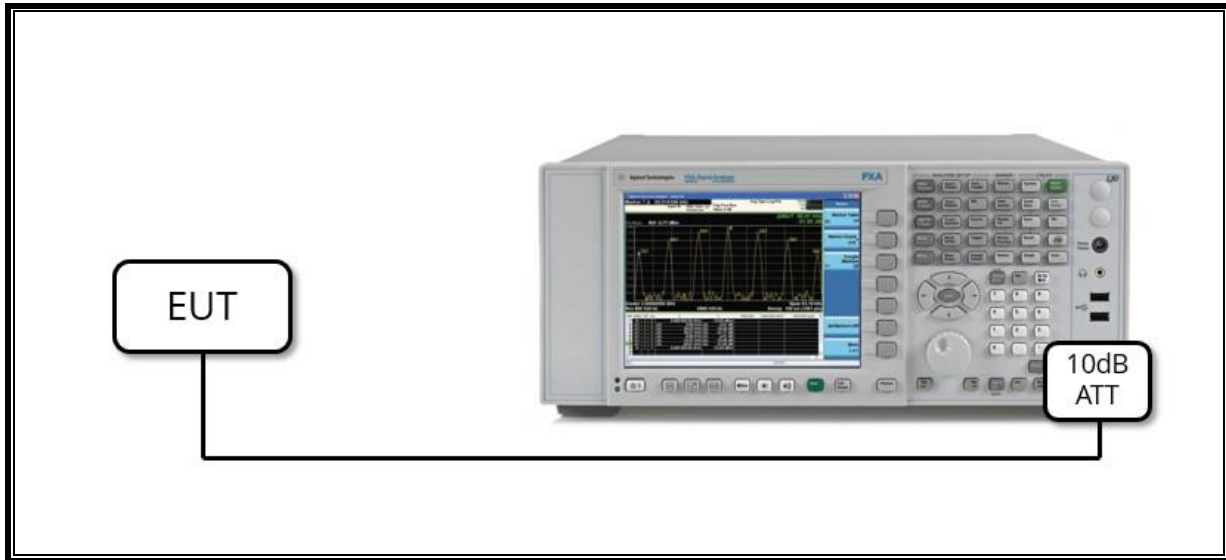

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

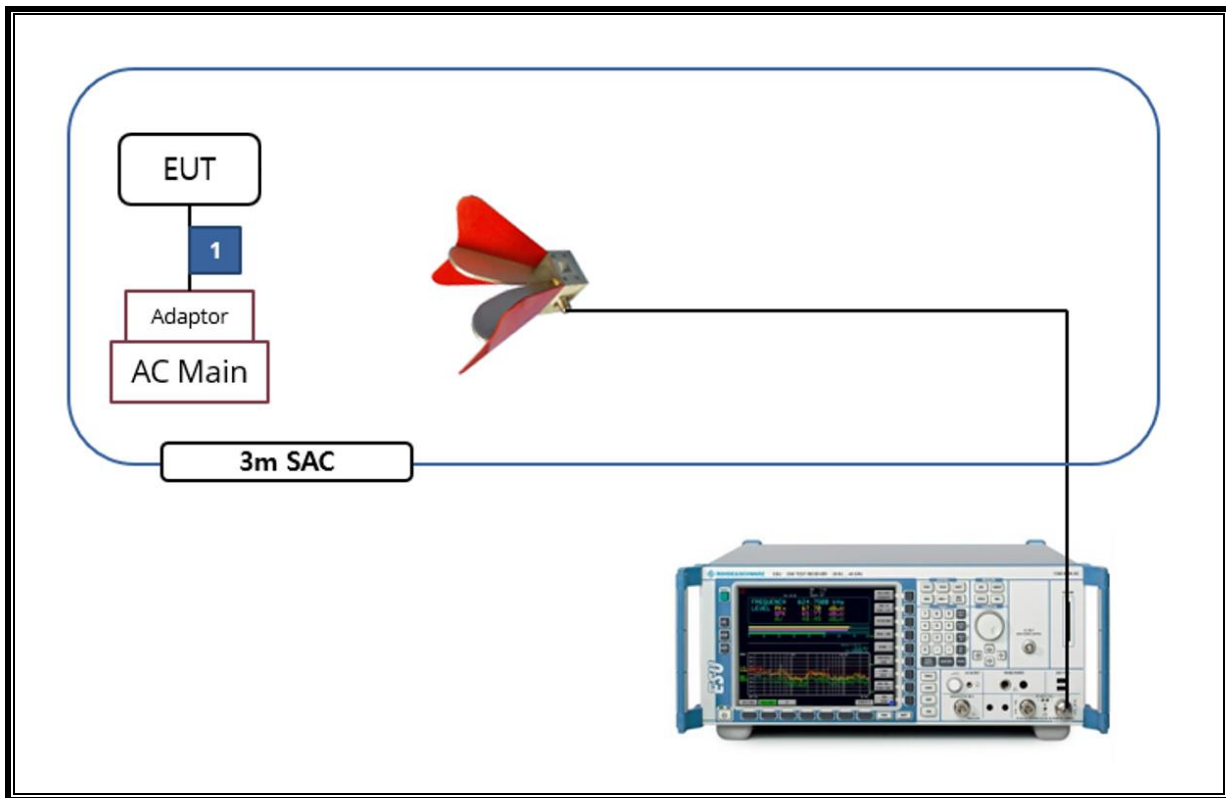

6. MEASUREMENT METHOD

6 dB BW : ANSI C63.10-2020, Section 11.8.2 Option 2

OUTPUT POWER : ANSI C63.10-2020, Section 11.9.1.1 RBW \geq DTS bandwidth

POWER SPECTRAL DENSITY : ANSI C63.10-2020, Section 11.10.2 Method PKPSD (peak PSD)

Out-of-band Emissions (Conducted) : ANSI C63.10-2020, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Non-restricted Bands: ANSI C63.10-2020, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Restricted Bands : ANSI C63.10-2020, Section 11.12 Emissions in restricted frequency bands

AC Power Line Conducted Emission : ANSI C63.10-2020, Section 6.2

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	750	2026-07-30
Antenna, Horn, 18 GHz	ETS	3117	00168717	2026-07-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2026-07-23
Preamplifier	ETS	3116C-PA	00168841	2025-07-25
Preamplifier, 1000 MHz	Sonoma	310N	341282	2025-07-22
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2025-07-23
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2025-07-24
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2025-01-03
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2025-01-03
RF Switching Unit	TA Engineering	TA-018S-16	SW-1	N/A
Average Power Sensor	Agilent / HP	U2000A	MY54270007	2025-07-23
Average Power Sensor	Agilent / HP	U2000A	MY54260010	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A001	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A008	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2025-07-22
EMI Test Receive, 3 GHz	R&S	ESR 3	101832	2025-07-22
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2025-07-22
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2025-07-22
High Pass Filter 6GHz	Micro-Tronics	HPS17542	21	2025-07-23
LISN	R&S	ENV216	101837	2025-07-22
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-07
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

8. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Bandwidth(6dB)	> 500kHz	Conducted	Complies
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc		Complies
15.247 (b)(3)	TX conducted output power	< 30 dBm		Complies
15.247(e)	PSD	< 8 dBm/3kHz		Complies
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Complies

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2 400 ~ 2 483.5 MHz Bands						
500 kbps [37 pkt]	1.063	1.876	0.567	56.663	2.47	0.941
2 Mbps [37 pkt]	0.200	0.626	0.320	31.953	4.95	5.003



9.2. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

9.2.1. Test data

Mode	Antenna	Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
500 kbps (37pkt)	ANT1	0	2 402	667.2	500.0
		19	2 440	665.4	
		39	2 480	663.7	
2 Mbps (37pkt)	ANT1	0	2 402	1160.0	
		19	2 440	1152.0	
		39	2 480	1136.0	
Worst				663.7	500.0

9.2.2. 6 dB BANDWIDTH PLOTS

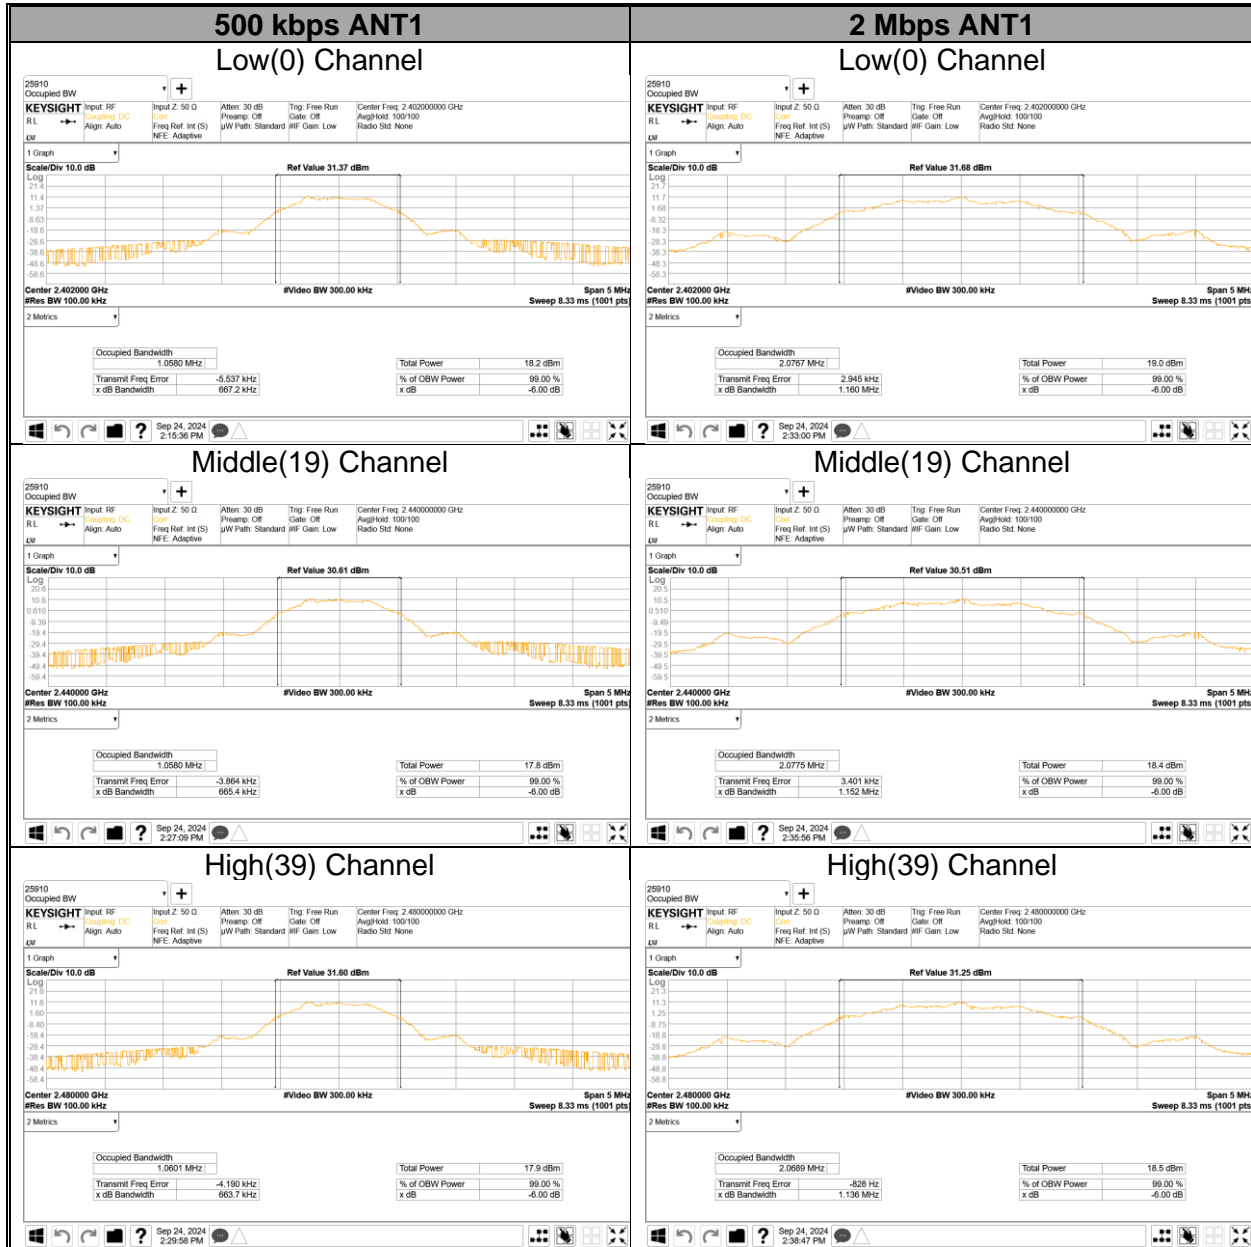

9.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


Peak power is measured using ANSI C63.10(2020) under section 11.9.1.1 utilizing spectrum analyzer(RBW \cong DTS bandwidth).

RESULTS

9.3.1. SISO MODE TEST DATA

Mode	Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
500 kbps (37 pkt)	ANT1	0	2 402	12.100	30.000	-17.90
		19	2 440	11.630		-18.37
		39	2 480	11.720		-18.28
2 Mbps (37 pkt)	ANT1	0	2 402	12.090		-17.91
		19	2 440	11.540		-18.46
		39	2 480	11.630		-18.37
Worst				12.100		-17.90

9.3.2. PEAK POWER PLOTS

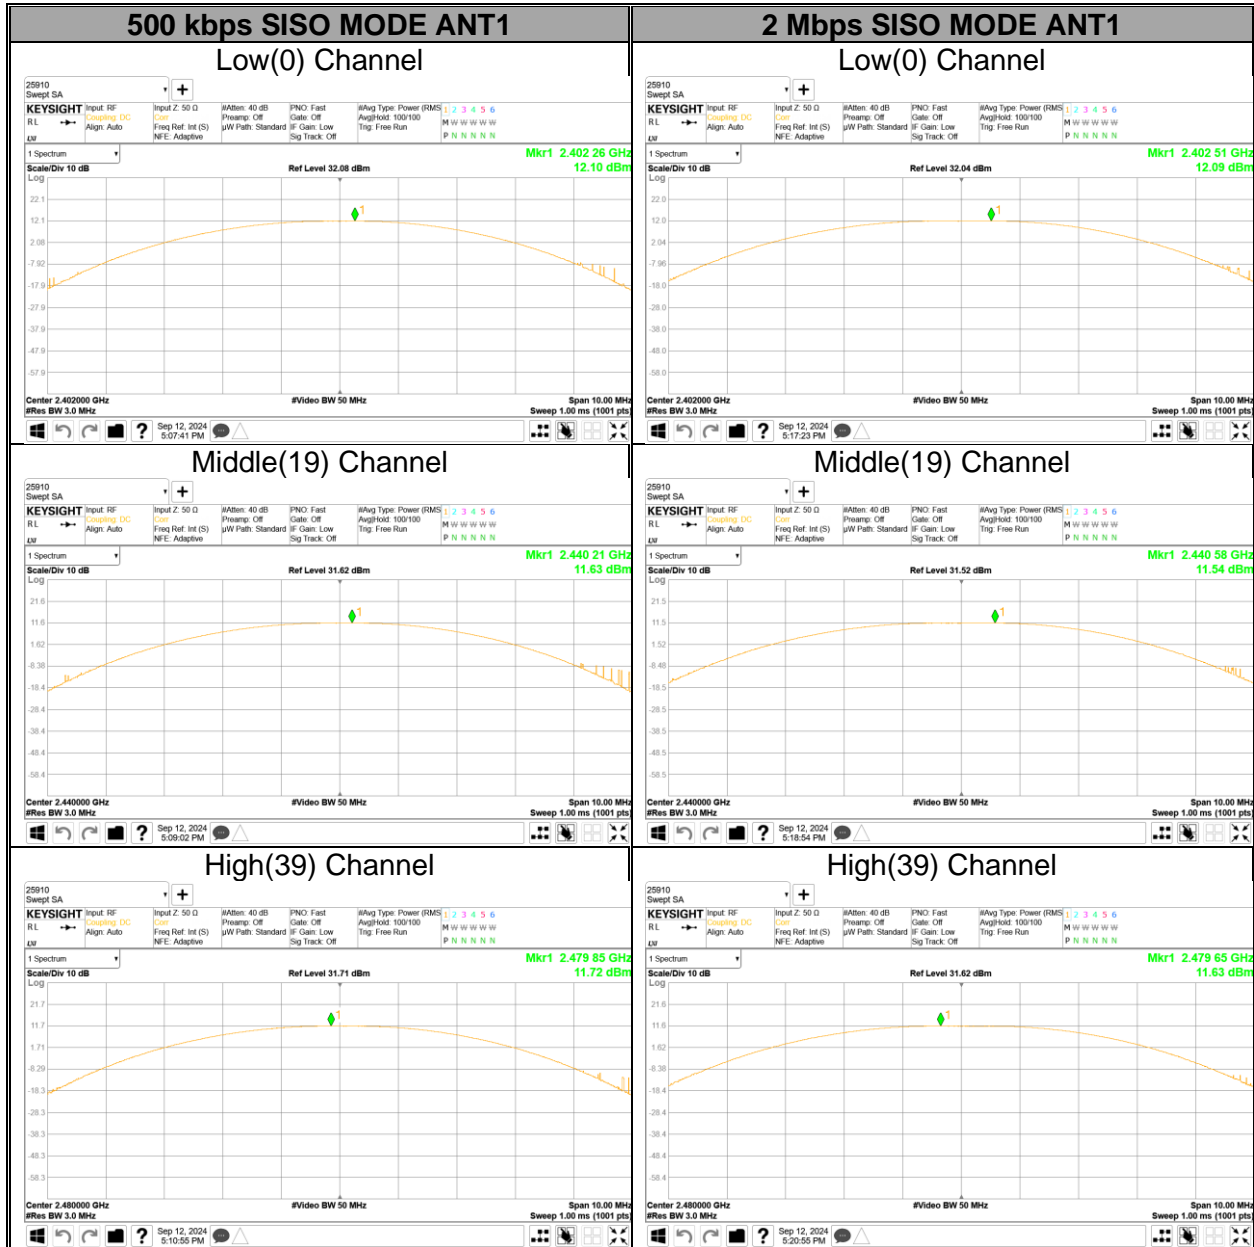

9.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband RF frame average power sensor. The cable assembly insertion loss and duty cycle correction factor were entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.4.1. SISO MODE TEST DATA

Mode	Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
500 kbps (37 pkt)	ANT1	0	2 402	11.856	15.332
		19	2 440	11.414	13.848
		39	2 480	11.492	14.099
2 Mbps (37 pkt)	ANT1	0	2 402	11.640	14.588
		19	2 440	11.101	12.885
		39	2 480	11.172	13.098

9.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE


ANSI C63.10-2020, Section 11.10.2 Method PKPSD (peak PSD)

RESULTS

9.5.1. Test data

Mode	Antenna	Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
500 kbps (37 pkt)	ANT1	0	2 402	5.45	8.00	-2.55
		19	2 440	4.96		-3.04
		39	2 480	5.04		-2.96
2 Mbps (37 pkt)	ANT1	0	2 402	-5.76		-13.76
		19	2 440	-6.97		-14.97
		39	2 480	-6.36		-14.36
Worst				5.45	-2.55	

9.5.2. PSD TEST PLOTS

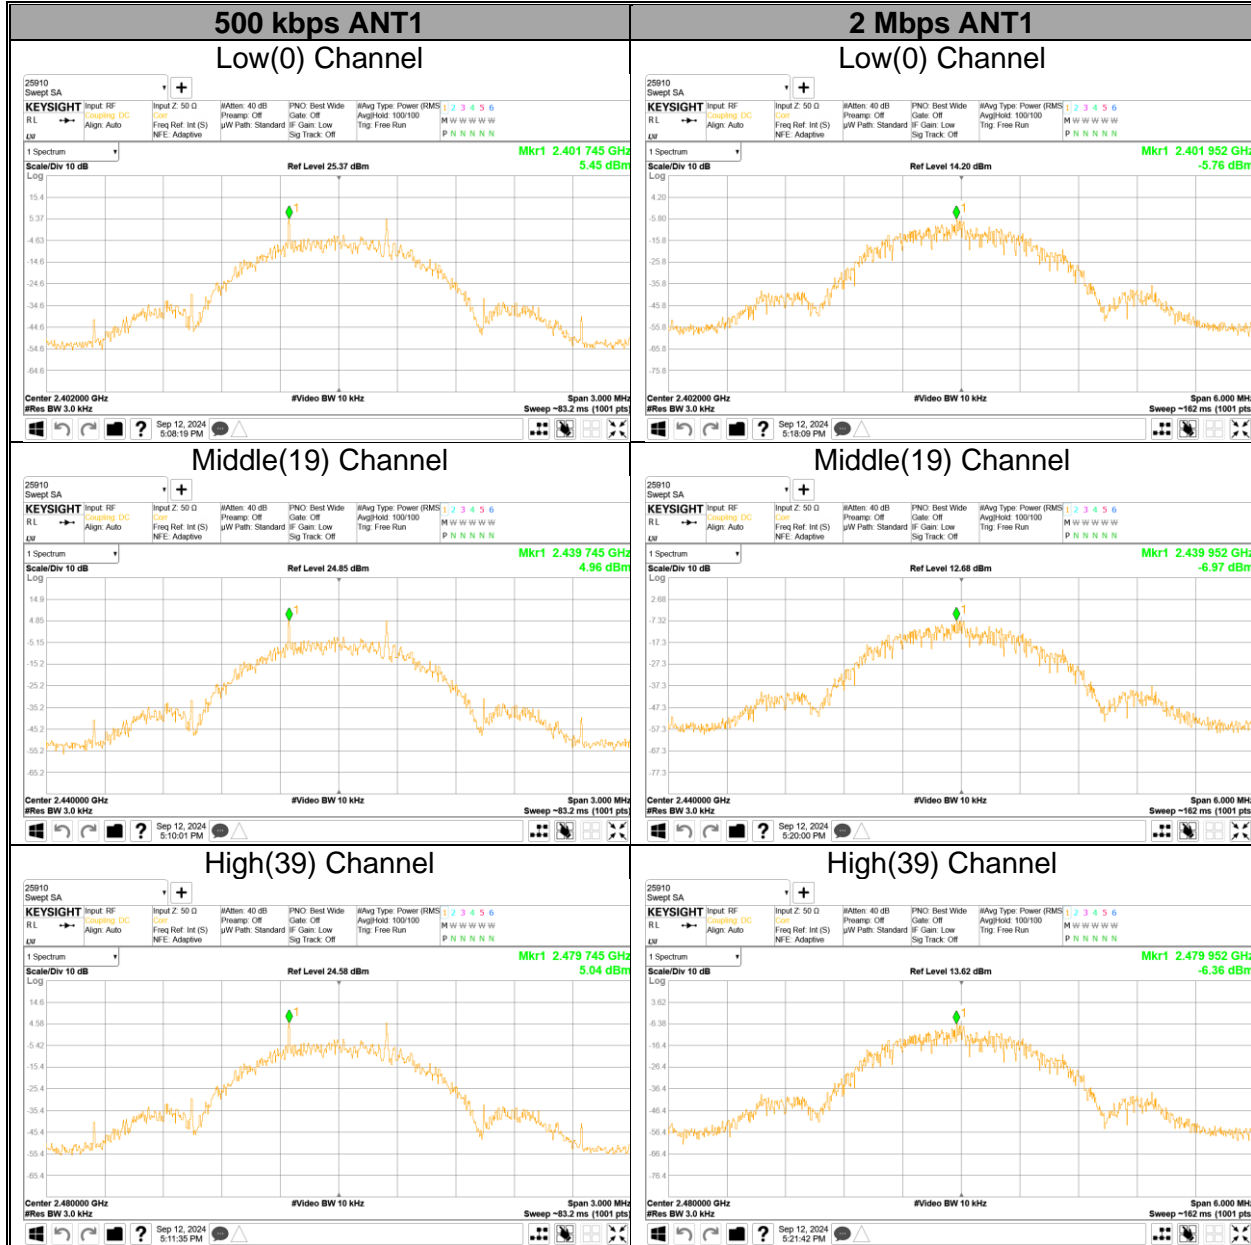

9.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS


FCC §15.247 (d)

Output power was measured based on the use of a peak measurement.
Therefore, spurious emissions are required to be 20 dBc.


RESULTS

9.6.1. Test plot


500 kbps ANT1

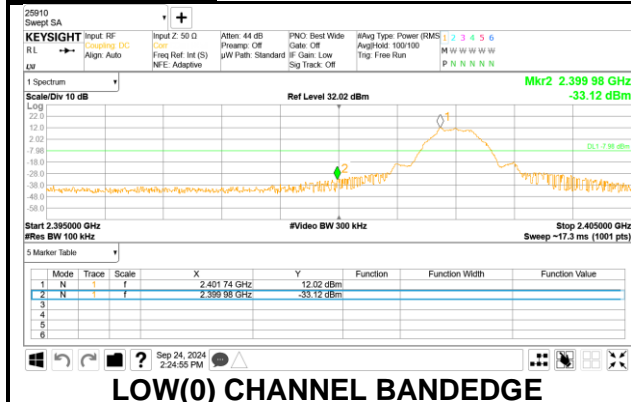


LOW(0) CHANNEL BANDEDGE

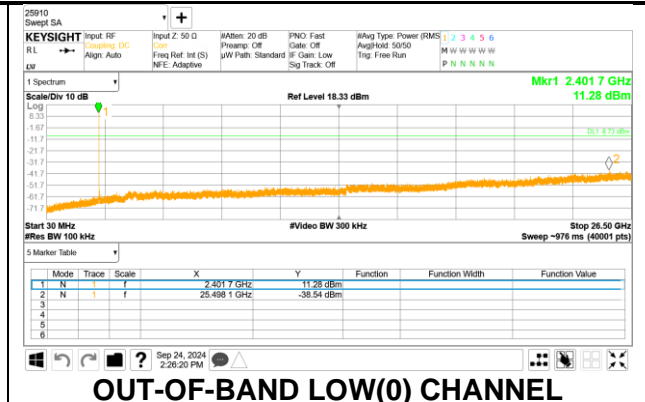


OUT-OF-BAND LOW(0) CHANNEL

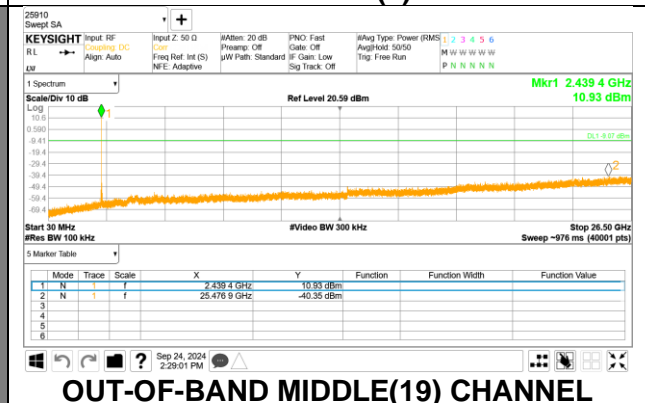

OUT-OF-BAND MIDDLE(19) CHANNEL

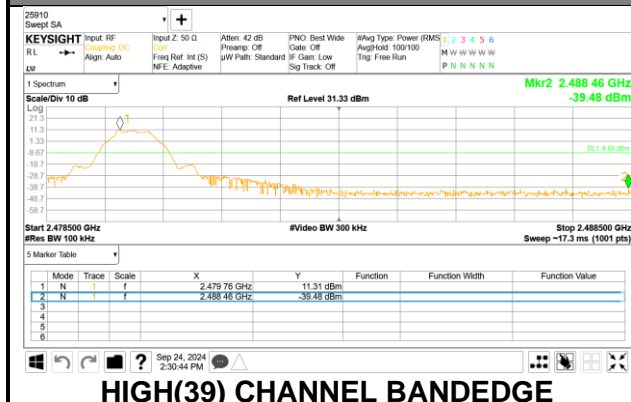


HIGH(39) CHANNEL BANDEDGE

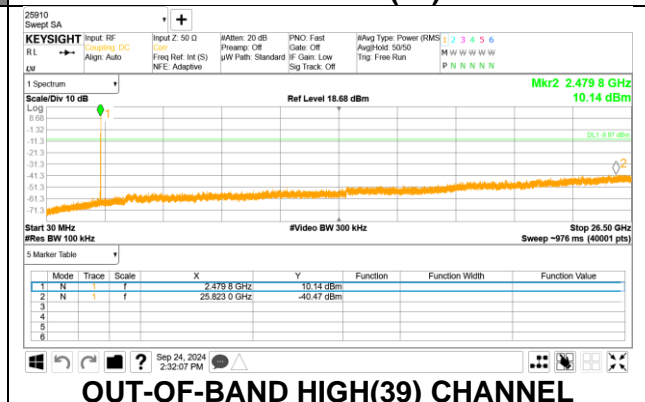


OUT-OF-BAND HIGH(39) CHANNEL


2 Mbps ANT1

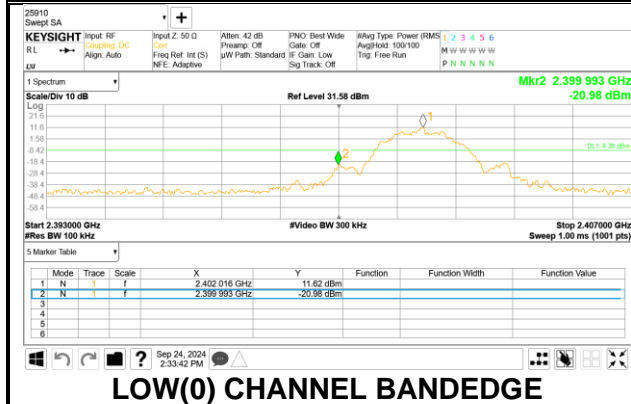


LOW(0) CHANNEL BANDEDGE

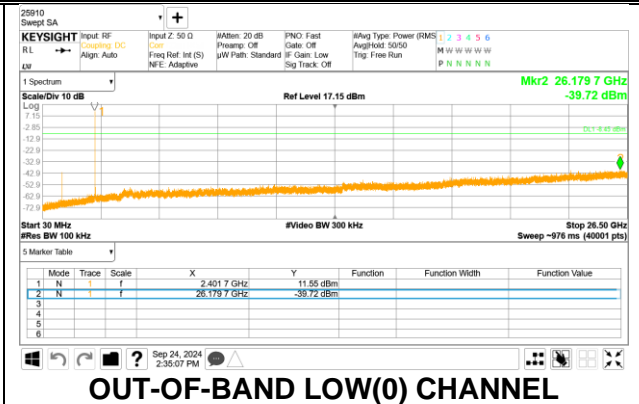


OUT-OF-BAND LOW(0) CHANNEL

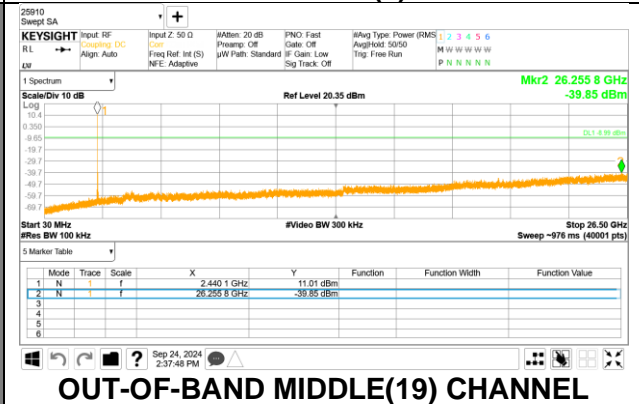

OUT-OF-BAND MIDDLE(19) CHANNEL

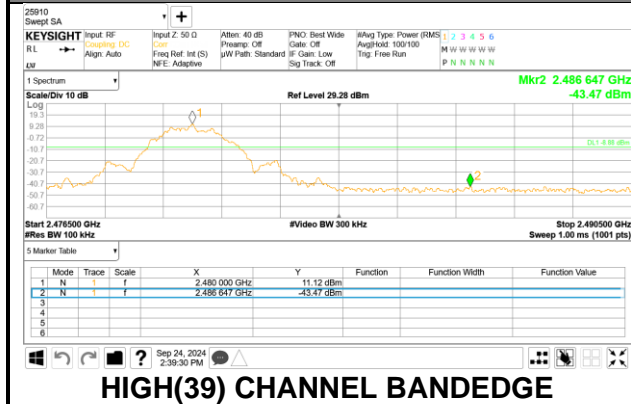

HIGH(39) CHANNEL BANDEDGE

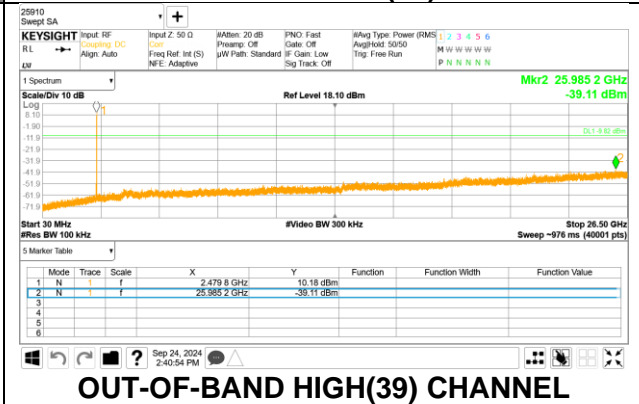

OUT-OF-BAND HIGH(39) CHANNEL

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted band-edge, Final detection of spurious harmonic emissions)
Duty cycle factor = $10 \log(1/x)$. For this sample: For 500 Kbps, DCF = $10 \log(1/0.567) = 2.467$ dB (Spectrum Analyzer round it up to 2.47 dB) and for 2 Mbps, DCF = $10 \log(1/0.316) = 4.954$ dB (Spectrum Analyzer round it up to 4.95 dB).

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).

Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.


Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. 500 Kbps ANT1

BANDEDGE (0 CHANNEL)

HORIZONTAL RESULT

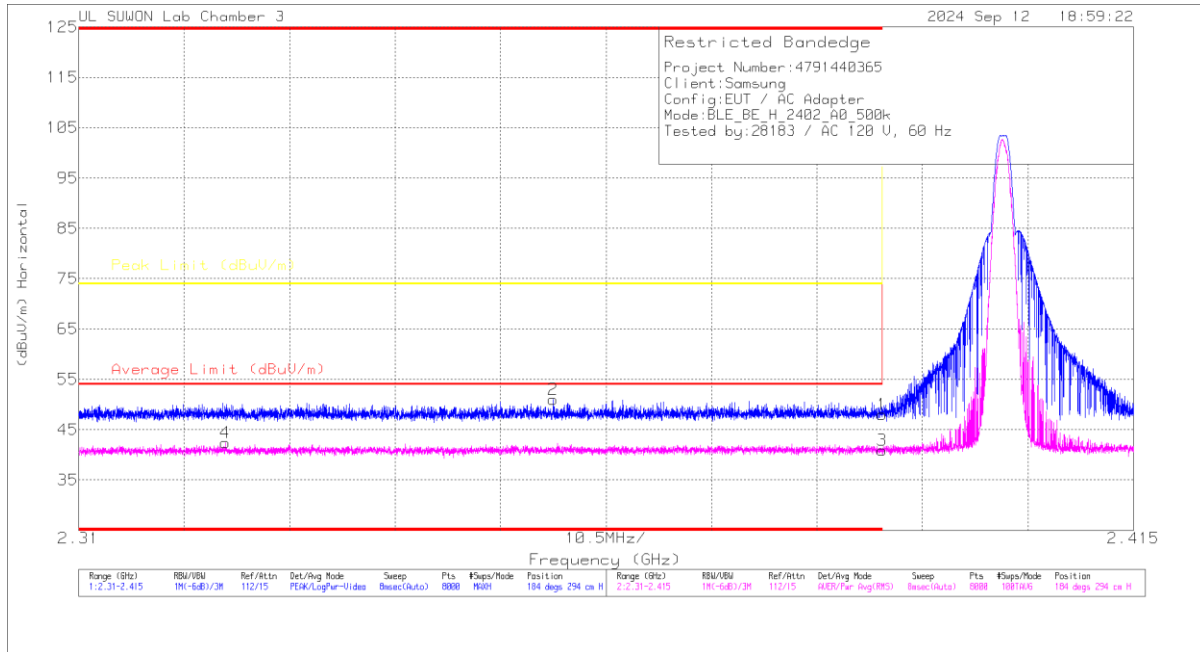


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB (m))	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
1	* 2.39	40.69	PK	32.1	-24.8	0	47.99	-	-	74	-26.01	184	294	H
2	* 2.35724	43.78	PK	32	-24.8	0	50.98	-	-	74	-23.02	184	294	H
3	* 2.39	31.14	RMS	32.1	-24.8	2.47	40.91	54	-13.09	-	-	184	294	H
4	* 2.3246	32.81	RMS	31.9	-24.8	2.47	42.38	54	-11.62	-	-	184	294	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

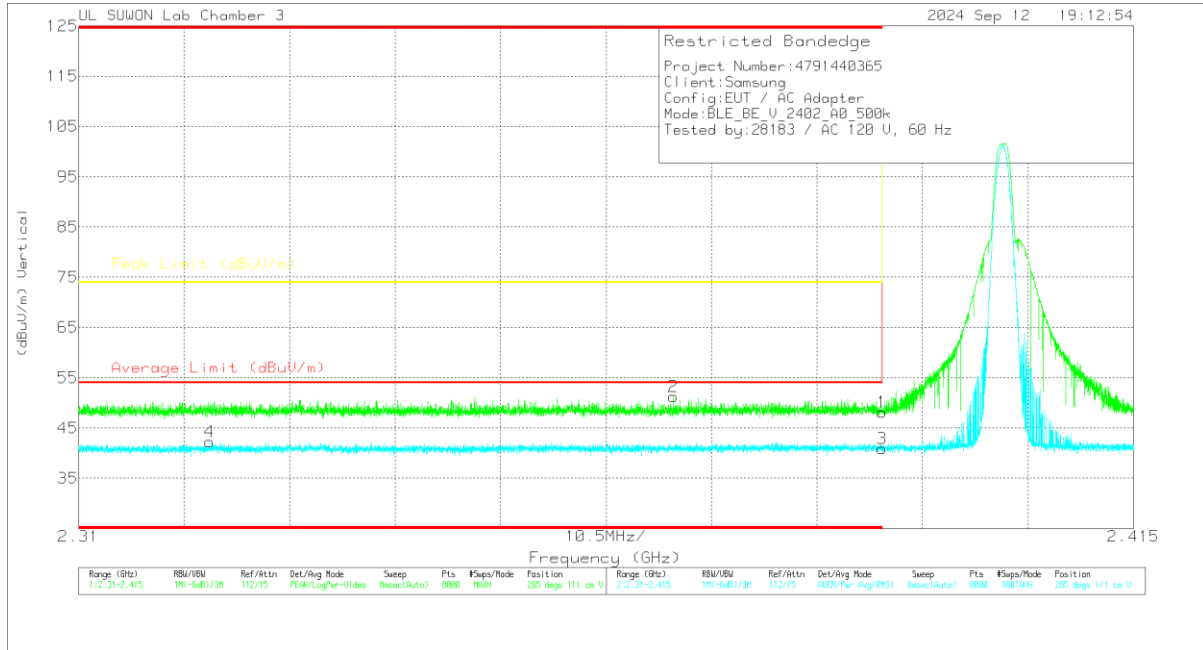


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB (m))	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.84	Pk	32.1	-24.8	0	48.14	-	-	74	-25.86	265	111	V
2	* 2.3692	44.09	Pk	32	-24.8	0	51.29	-	-	74	-22.71	265	111	V
3	* 2.39	31.12	RMS	32.1	-24.8	2.47	40.89	54	-13.11	-	-	265	111	V
4	* 2.32304	32.71	RMS	31.9	-24.8	2.47	42.28	54	-11.72	-	-	265	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (39 CHANNEL)

HORIZONTAL RESULT

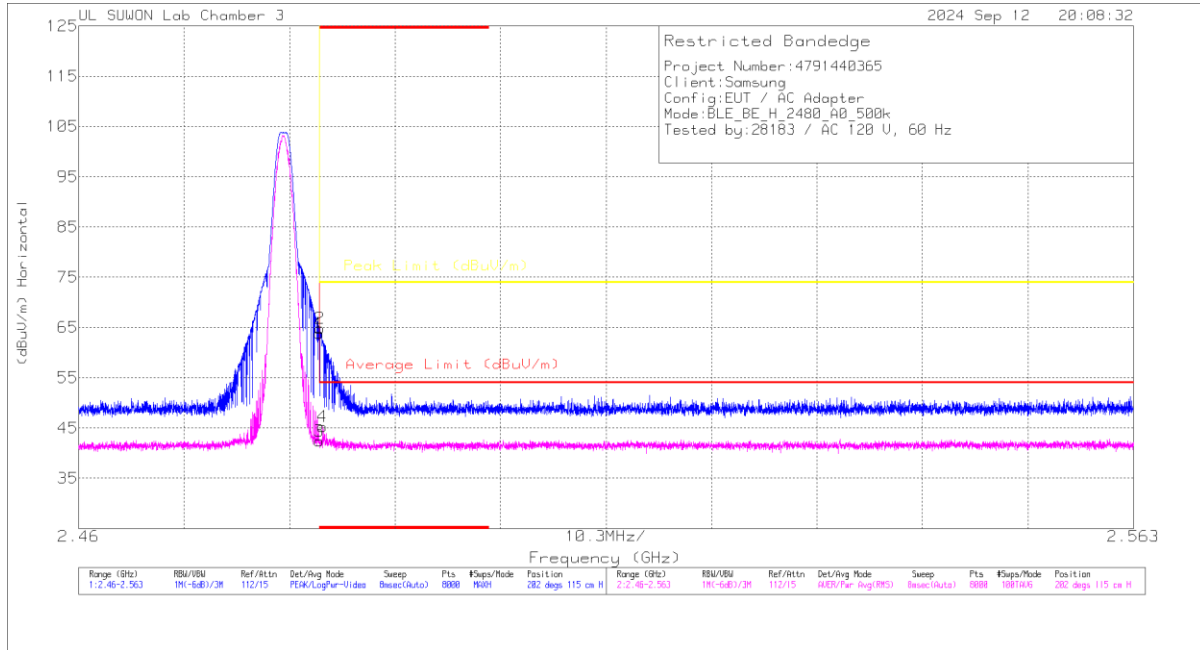


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB (m))	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
1	* 2.4835	56.23	PK	32.4	-24.8	0	63.83	-	-	74	-10.17	202	115	H
2	* 2.48354	57.28	PK	32.4	-24.8	0	64.88	-	-	74	-9.12	202	115	H
3	* 2.4835	32.28	RMS	32.4	-24.8	2.47	42.35	54	-11.65	-	-	202	115	H
4	* 2.48378	35.19	RMS	32.4	-24.8	2.47	45.26	54	-8.74	-	-	202	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

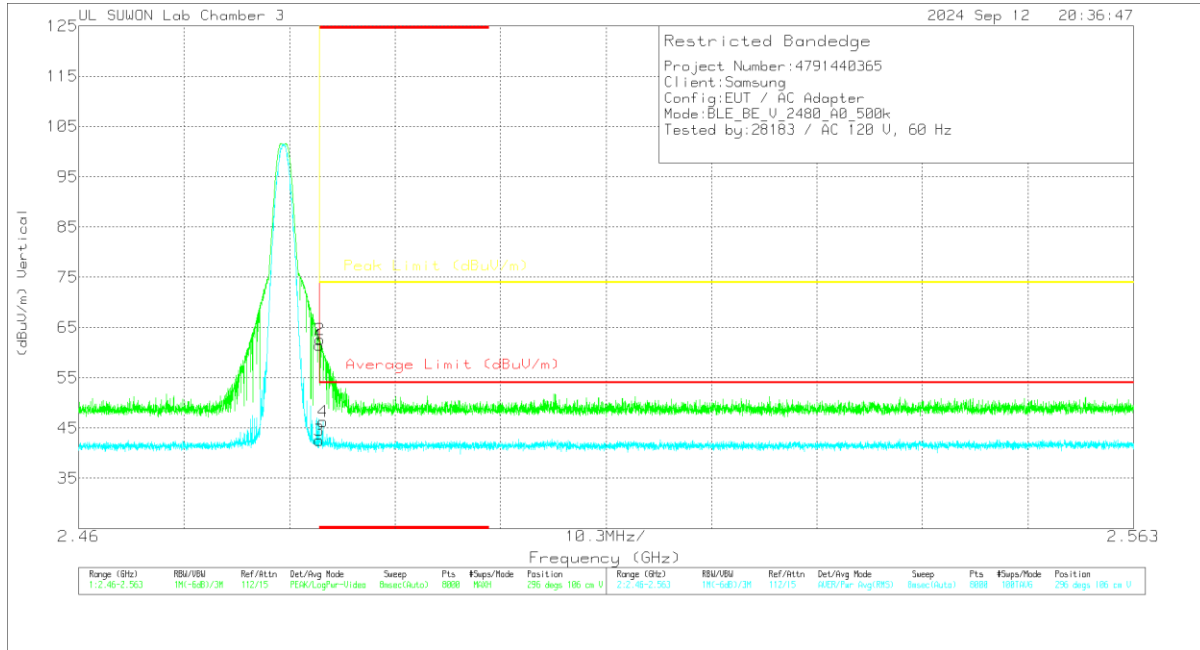


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_567_Factor(dB/m)	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.85	Pk	32.4	-24.8	0	61.45	-	-	74	-12.55	296	106	V
2	* 2.48356	54.94	Pk	32.4	-24.8	0	62.54	-	-	74	-11.46	296	106	V
3	* 2.4835	32.45	RMS	32.4	-24.8	2.47	42.52	54	-11.48	-	-	296	106	V
4	* 2.48384	36.17	RMS	32.4	-24.8	2.47	46.24	54	-7.76	-	-	296	106	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

0 CHANNEL RESULTS

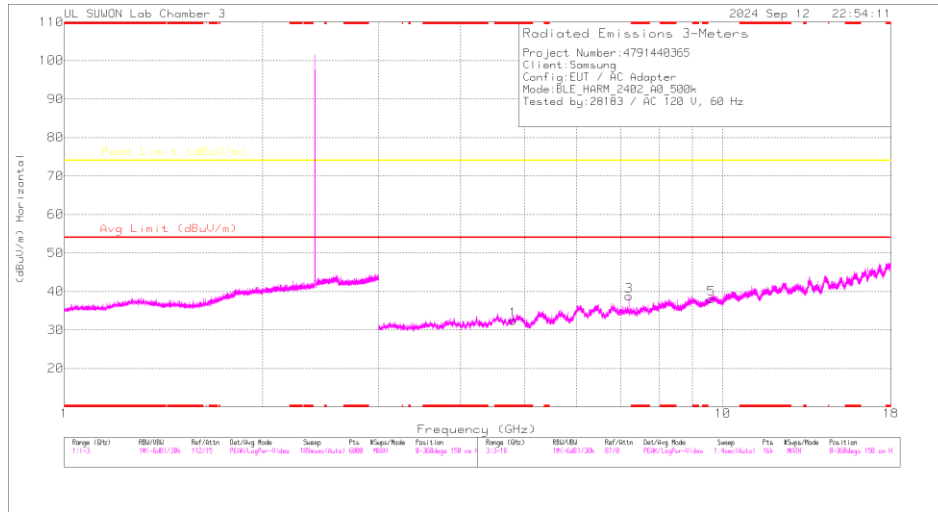

HORIZONTAL

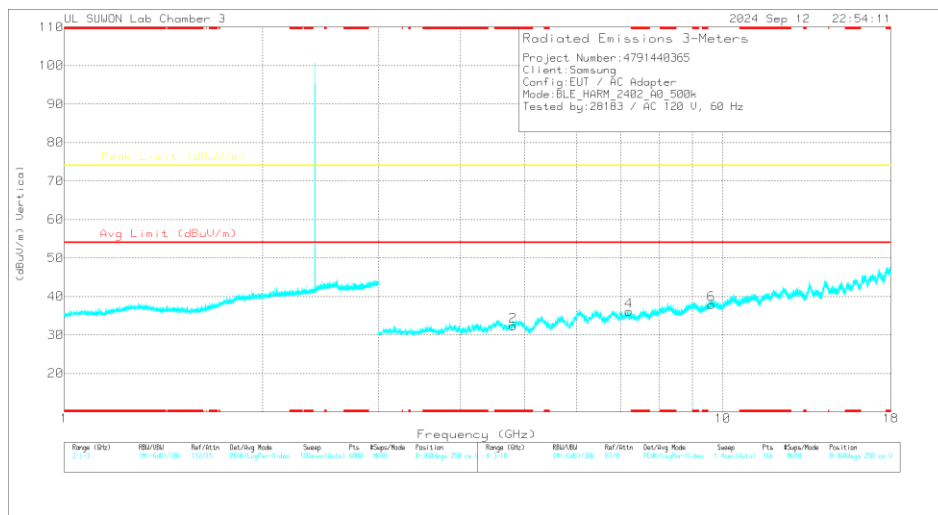

VERTICAL


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_F actor(dB/m)	3GHz_HP_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80159	38.78	PK2	34.3	-30.1	0	42.98	-	-	74	-31.02	0	100	H
7.20665	37.71	PK2	35.8	-25.9	0	47.61	-	-	74	-26.39	189	118	H
9.59889	32.94	PK2	36.7	-21.7	0	47.94	-	-	74	-26.06	0	100	H
* 4.80847	39.05	PK2	34.3	-30.1	0	43.25	-	-	74	-30.75	0	100	V
7.20579	35.6	PK2	35.8	-25.9	0	45.5	-	-	74	-28.5	161	101	V
9.61072	32.97	PK2	36.7	-21.8	0	47.87	-	-	74	-26.13	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

19 CHANNEL RESULTS

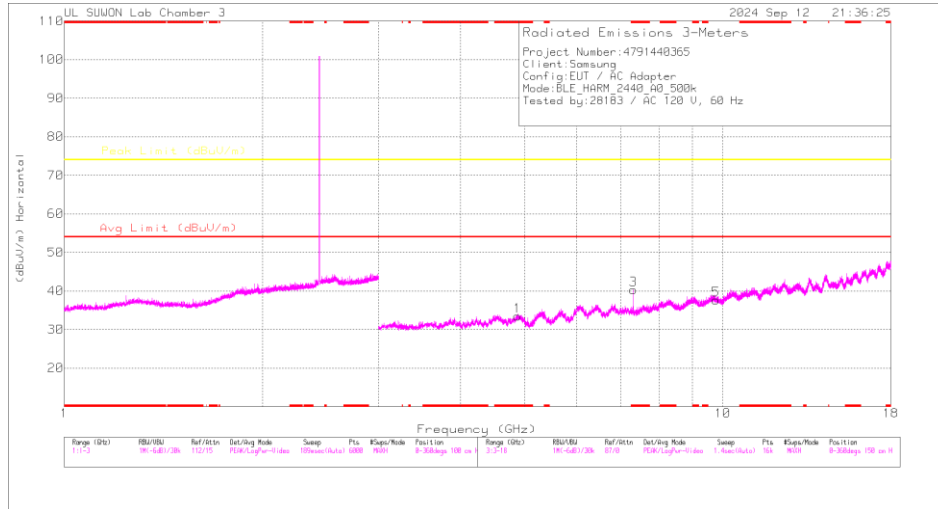

HORIZONTAL

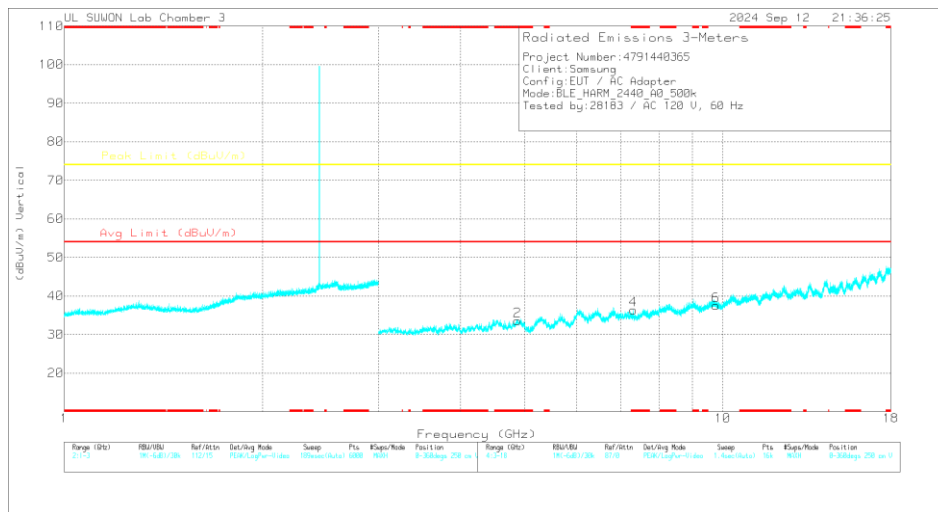

VERTICAL


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dBm)	3GHz_HP_Pat h Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88405	39.28	PK2	34.2	-29.9	0	43.58	-	-	74	-30.42	0	100	H
* 7.31951	38.44	PK2	35.8	-25.5	0	48.74	-	-	74	-25.26	187	129	H
* 7.31955	28.15	MAv1	35.8	-25.5	2.47	40.92	54	-13.08	-	-	187	129	H
9.75877	33	PK2	36.9	-21.5	0	48.4	-	-	74	-25.6	0	100	H
* 4.8836	39.2	PK2	34.2	-29.9	0	43.5	-	-	74	-30.5	0	100	V
* 7.31926	36.53	PK2	35.8	-25.5	0	46.83	-	-	74	-27.17	161	110	V
* 7.31946	25.72	MAv1	35.8	-25.5	2.47	38.49	54	-15.51	-	-	161	110	V
9.76257	32.1	PK2	36.9	-21.5	0	47.5	-	-	74	-26.5	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

39 CHANNEL RESULTS

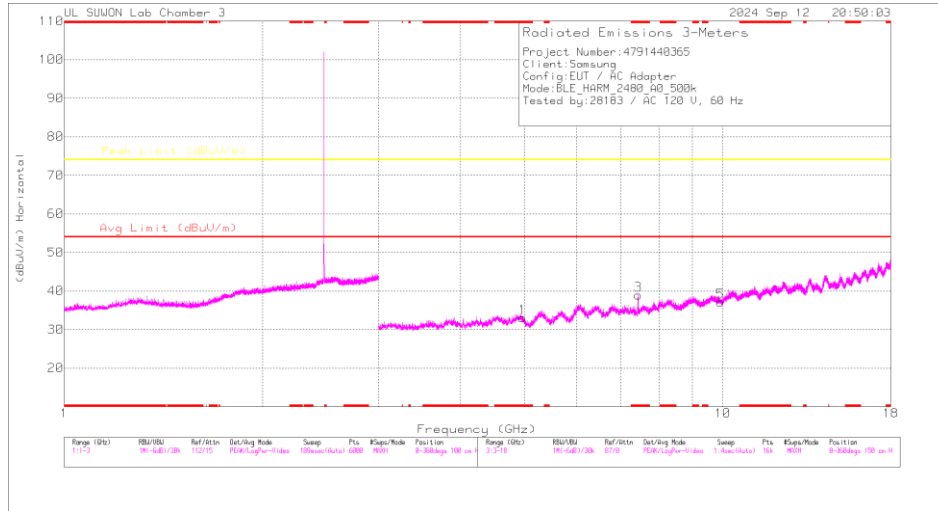

HORIZONTAL

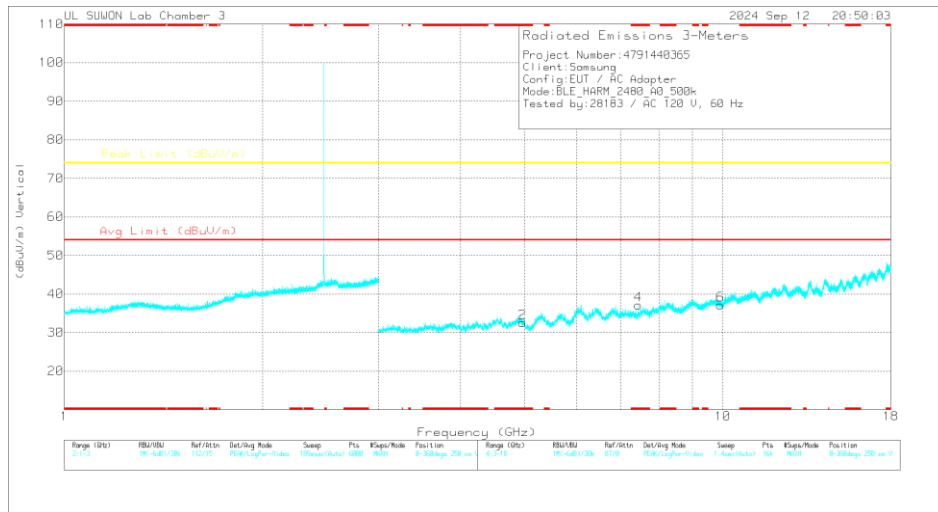

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957 Factor(dBm)	3GHz_HP_Pat h Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95944	30.48	PK2	34.3	-30	0	34.78	-	-	74	-39.22	360	100	H
* 7.43588	14.25	PK2	35.7	-25.2	0	24.75	-	-	74	-49.25	184	100	H
* 7.44061	27.26	MAv1	35.7	-25.2	2.47	40.23	54	-13.77	-	-	184	100	H
9.91924	31.73	PK2	37.1	-21.4	0	47.43	-	-	74	-26.57	0	100	H
* 4.95345	38.89	PK2	34.3	-30	0	43.19	-	-	74	-30.81	0	100	V
* 7.44092	36.56	PK2	35.7	-25.2	0	47.06	-	-	74	-26.94	163	110	V
* 7.43926	26.12	MAv1	35.7	-25.2	2.47	39.09	54	-14.91	-	-	163	110	V
9.91141	31.57	PK2	37.1	-21.4	0	47.27	-	-	74	-26.73	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2.2. 2 Mbps ANT1

BANDEDGE (0 CHANNEL)

HORIZONTAL RESULT

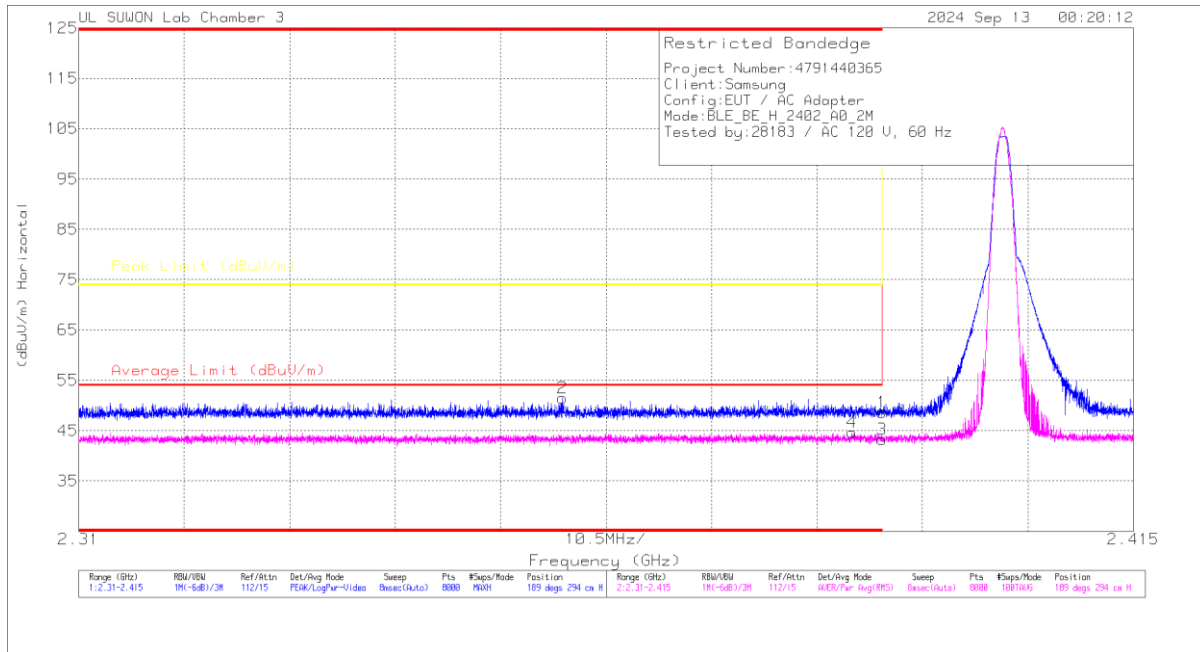


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_S57_Factor(dB (m))	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.34	PK	32.1	-24.8	0	48.64	-	-	74	-25.36	189	294	H
2	* 2.35818	44.32	PK	32	-24.8	0	51.52	-	-	74	-22.48	189	294	H
3	* 2.39	31.02	RMS	32.1	-24.8	4.95	43.27	54	-10.73	-	-	189	294	H
4	* 2.387	32.36	RMS	32.1	-24.8	4.95	44.63	54	-9.57	-	-	189	294	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

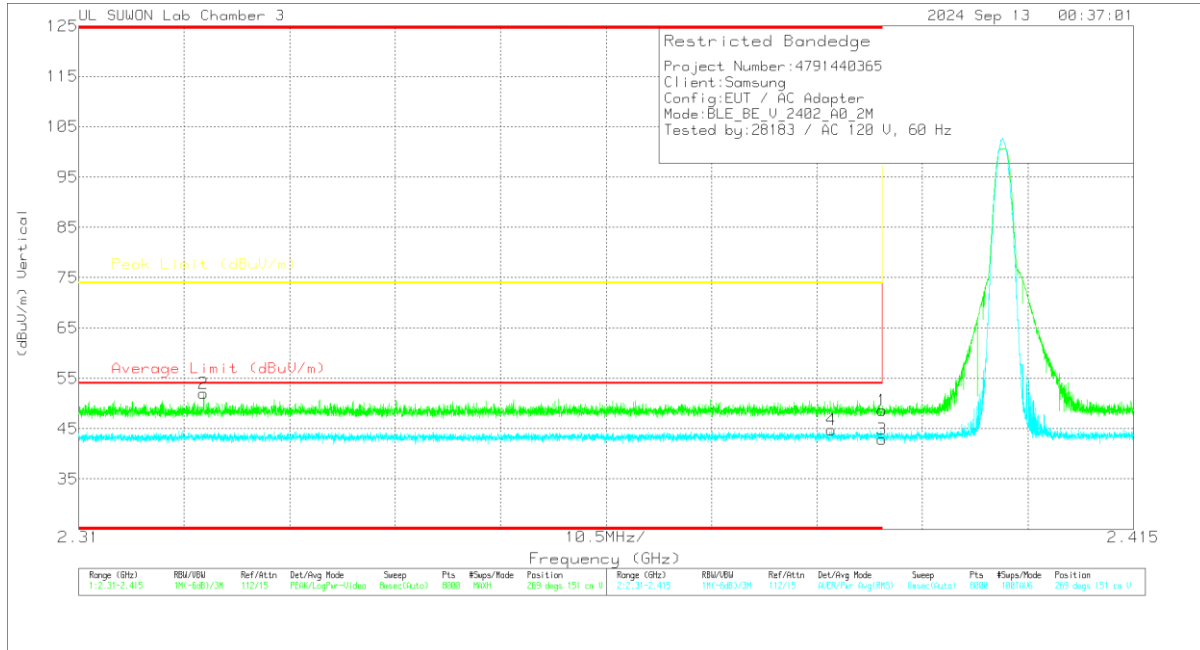


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB (m))	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.34	Pk	32.1	-24.8	0	48.64	-	-	74	-25.36	269	151	V
2	* 2.32243	44.9	Pk	31.9	-24.8	0	52	-	-	74	-22	269	151	V
3	* 2.39	30.64	RMS	32.1	-24.8	4.95	42.89	54	-11.11	-	-	269	151	V
4	* 2.38492	32.58	RMS	32.1	-24.9	4.95	44.73	54	-9.27	-	-	269	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (39 CHANNEL)

HORIZONTAL RESULT

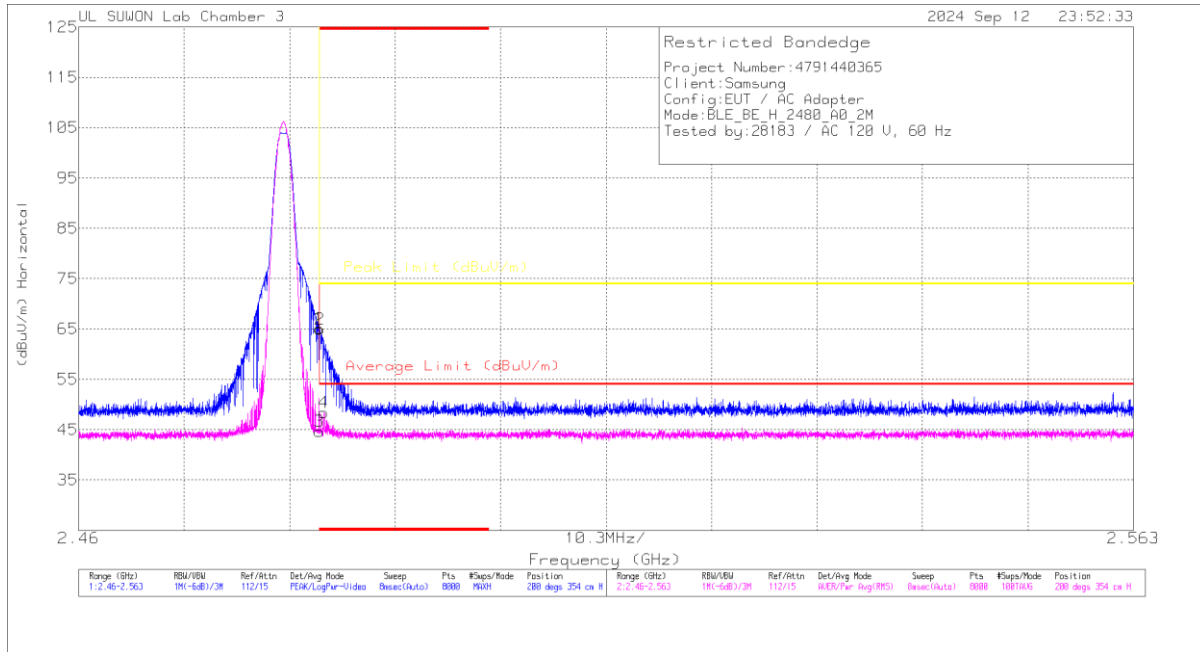


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB)	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	57.53	Pk	32.4	-24.8	0	65.13	-	-	74	-8.87	200	354	H
2	* 2.48356	57.32	Pk	32.4	-24.8	0	64.92	-	-	74	-9.08	200	354	H
3	* 2.4835	32.07	RMS	32.4	-24.8	4.95	44.62	54	-9.38	-	-	200	354	H
4	* 2.48393	35.8	RMS	32.4	-24.8	4.95	48.35	54	-5.65	-	-	200	354	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

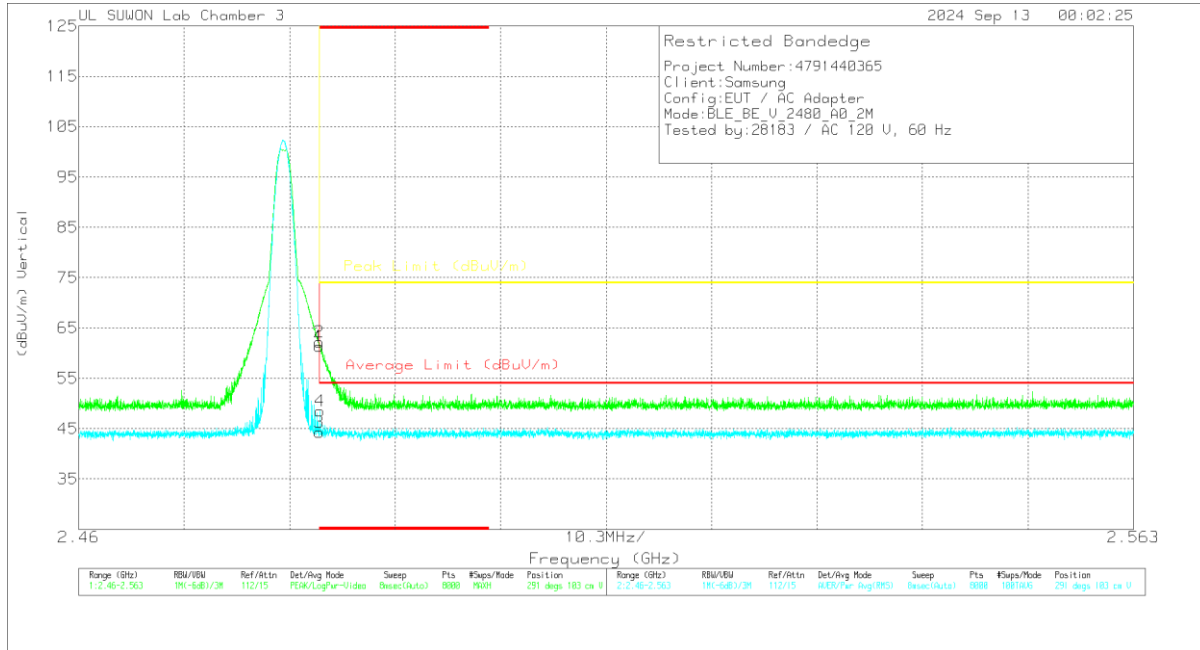


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB (m))	10dB_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.73	Pk	32.4	-24.8	0	61.33	-	-	74	-12.67	291	103	V
2	* 2.48351	54.62	Pk	32.4	-24.8	0	62.22	-	-	74	-11.78	291	103	V
3	* 2.4835	31.7	RMS	32.4	-24.8	4.95	44.25	54	-9.75	-	-	291	103	V
4	* 2.48356	35.91	RMS	32.4	-24.8	4.95	48.46	54	-5.54	-	-	291	103	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

0 CHANNEL RESULTS

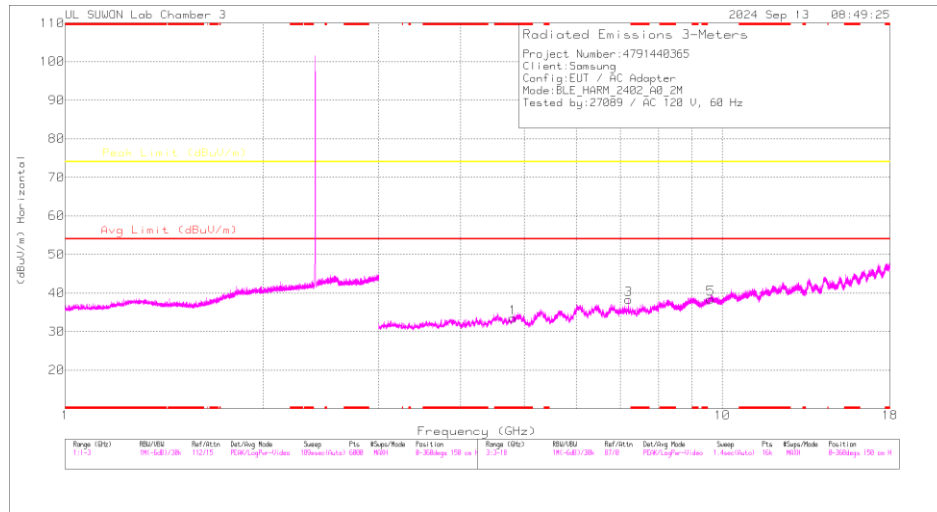

HORIZONTAL

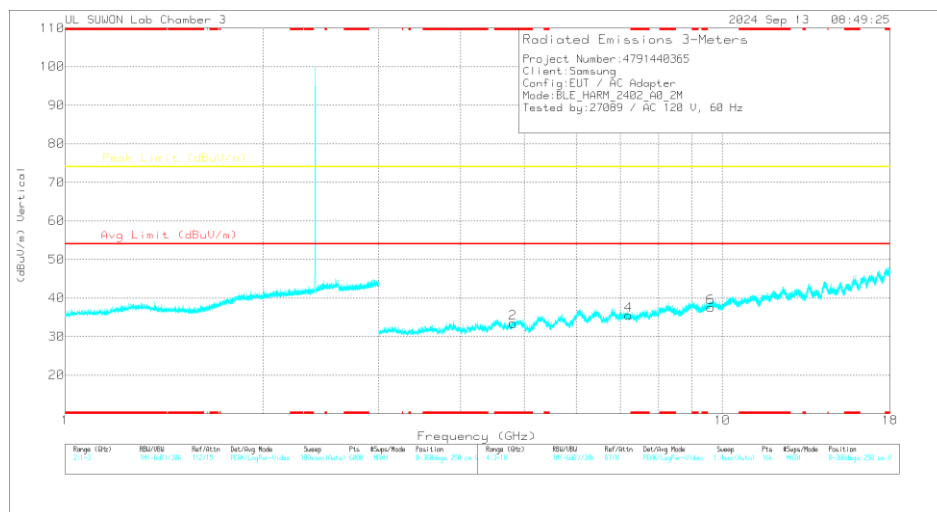

VERTICAL


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_F actor(dB/m)	3GHz_HP_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80905	38.9	PK2	34.3	-30.1	0	43.1	-	-	74	-30.9	0	100	H
* 4.81072	39.13	PK2	34.3	-30.1	0	43.33	-	-	74	-30.67	0	100	V
7.20445	37.99	PK2	35.8	-25.9	0	47.89	-	-	74	-26.11	184	125	H
7.19858	35.15	PK2	35.8	-25.8	0	45.15	-	-	74	-28.85	150	115	V
9.60378	33.04	PK2	36.7	-21.7	0	48.04	-	-	74	-25.96	0	100	H
9.61191	33.21	PK2	36.7	-21.8	0	48.11	-	-	74	-25.89	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

19 CHANNEL RESULTS

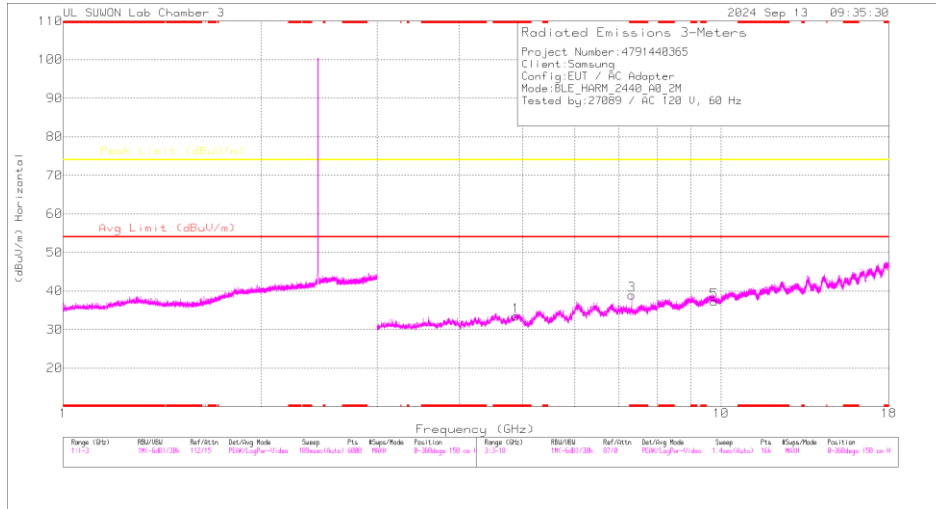

HORIZONTAL

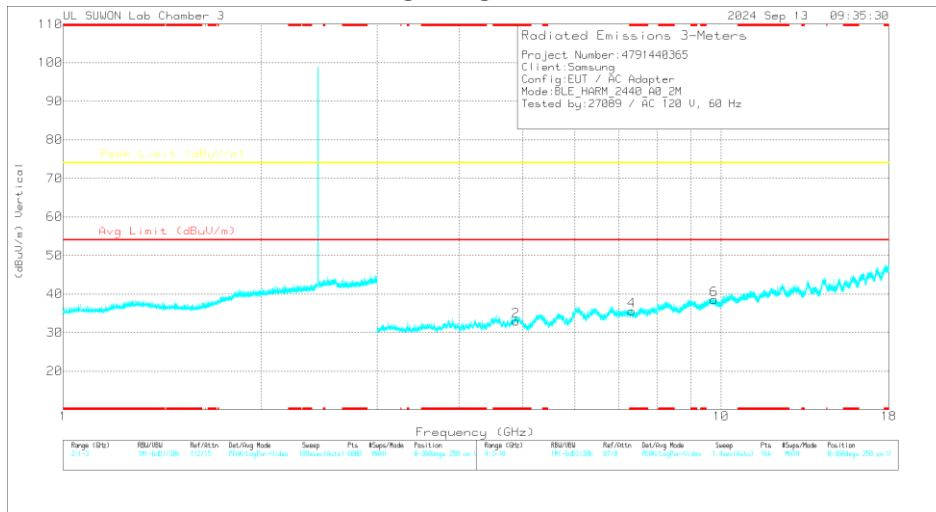

VERTICAL


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957_Factor(dB/m)	3GHz_HP_Pat h Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88549	39.02	PK2	34.2	-29.9	0	43.32	-	-	74	-30.68	0	100	H
* 4.87281	38.96	PK2	34.2	-29.9	0	43.26	-	-	74	-30.74	0	100	V
* 7.31848	38.43	PK2	35.8	-25.4	0	48.83	-	-	74	-25.17	186	104	H
* 7.31858	26.24	MAV1	35.8	-25.4	4.95	41.59	54	-12.41	-	-	186	104	H
* 7.31864	36.08	PK2	35.8	-25.4	0	46.48	-	-	74	-27.52	166	143	V
* 7.32119	24.11	MAV1	35.8	-25.5	4.95	39.36	54	-14.64	-	-	166	143	V
9.76424	31.93	PK2	36.9	-21.5	0	47.33	-	-	74	-26.67	0	100	H
9.75696	32.28	PK2	36.9	-21.6	0	47.58	-	-	74	-26.42	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

39 CHANNEL RESULTS

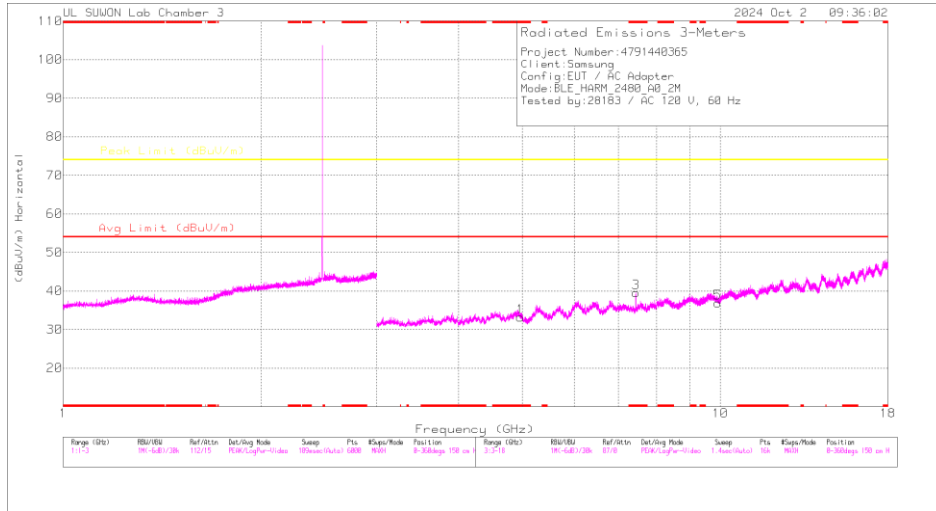

HORIZONTAL

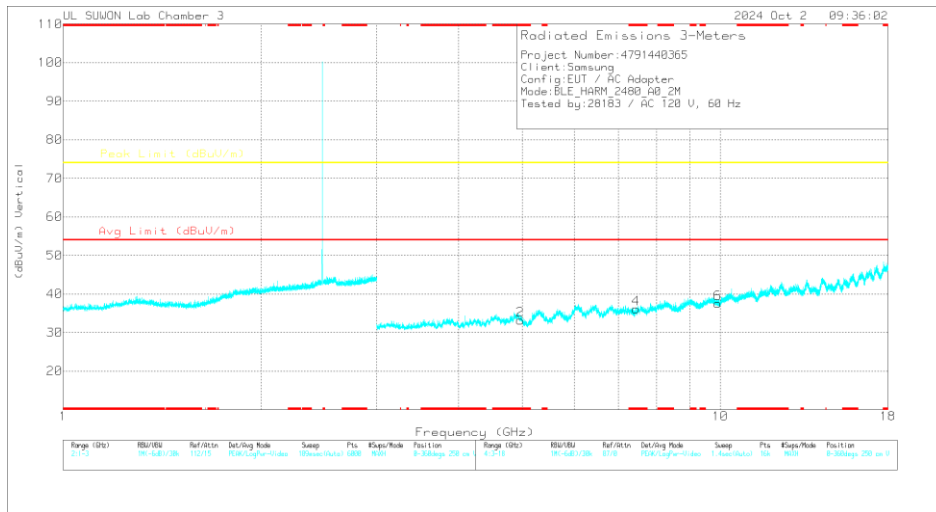

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_957 Factor(dB)	3GHz_HP_Pat h Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95668	39.72	PK2	34.3	-30.1	0	43.92	-	-	74	-30.08	0	100	H
* 7.43934	37.78	PK2	35.7	-25.2	0	48.28	-	-	74	-25.72	246	101	H
* 7.4407	27.38	MAv1	35.7	-25.2	4.95	42.83	54	-11.17	-	-	246	101	H
9.92022	32.08	PK2	37.1	-21.4	0	47.78	-	-	74	-26.22	0	100	H
* 4.95353	39.11	PK2	34.3	-30	0	43.41	-	-	74	-30.59	0	100	V
* 7.44059	36.72	PK2	35.7	-25.2	0	47.22	-	-	74	-26.78	272	100	V
* 7.43951	25.94	MAv1	35.7	-25.2	4.95	41.39	54	-12.61	-	-	272	100	V
9.92415	31.71	PK2	37.1	-21.4	0	47.41	-	-	74	-26.59	0	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

10.3. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

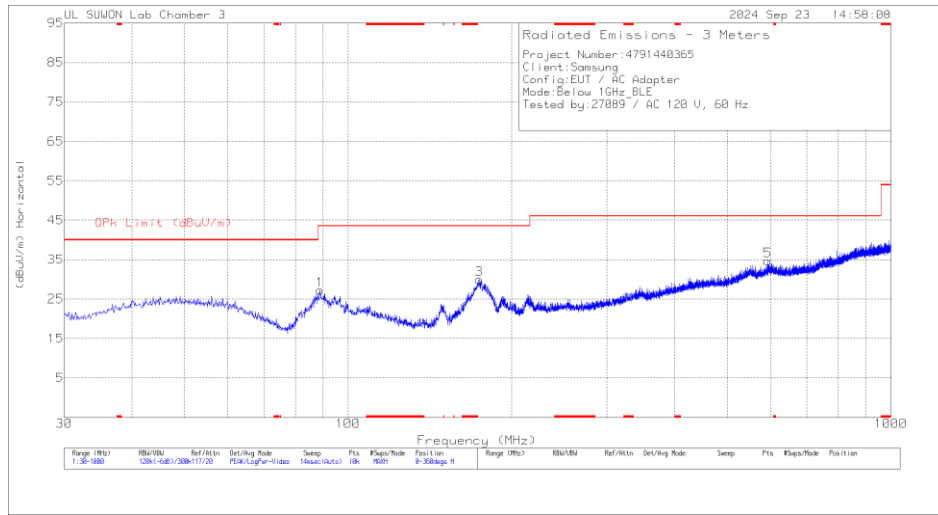

HORIZONTAL

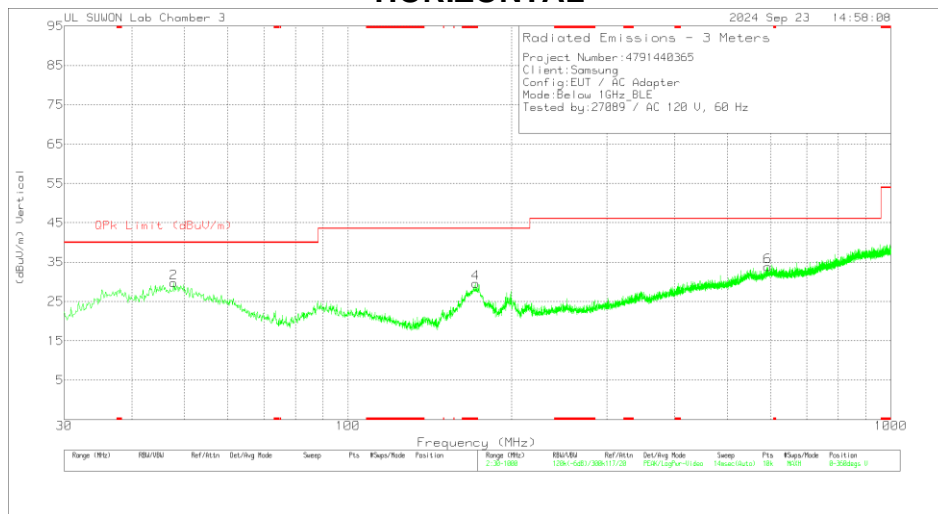

VERTICAL

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna_845_Factor(dB/m)	Below_1G_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	88.7881	43.29	Pk	15.4	-31.5	0	27.19	43.52	-16.33	0-360	300	H
3	174.3509	46.32	Pk	14.6	-30.9	0	30.02	43.52	-13.5	0-360	100	H
5	593.3371	40.17	Pk	24.2	-29.6	0	34.77	46.02	-11.25	0-360	200	H
2	47.7528	41.71	Pk	19.8	-31.8	0	29.71	40	-10.29	0-360	100	V
4	* 171.9256	46.08	Pk	14.5	-31	0	29.58	43.52	-13.94	0-360	100	V
6	593.3371	39.23	Pk	24.2	-29.6	0	33.83	46.02	-12.19	0-360	100	V

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC Power Line

LINE 1 RESULTS

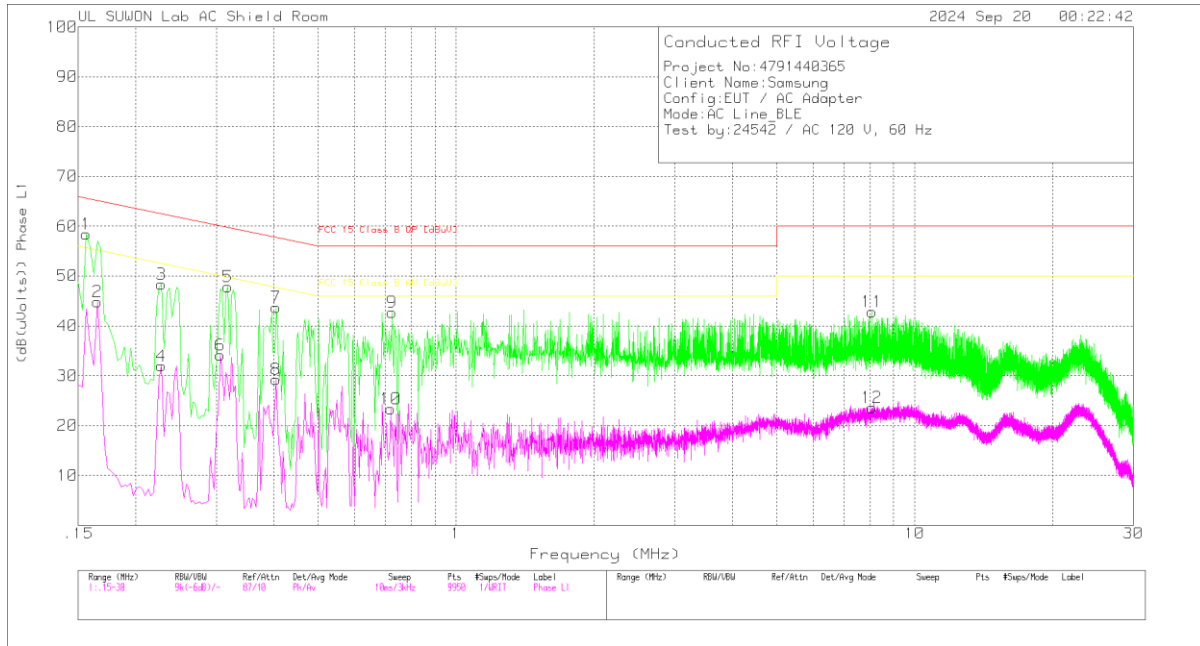

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.156	48.63	Pk	9.7	.1	58.43	65.67	-7.24	-	-
2	.165	34.96	Av	9.8	.1	44.86	-	-	55.21	-10.35
3	.228	38.62	Pk	9.6	.1	48.32	62.52	-14.2	-	-
4	.228	22.26	Av	9.6	.1	31.96	-	-	52.52	-20.56
5	.318	38.13	Pk	9.6	.1	47.83	59.76	-11.93	-	-
6	.306	24.48	Av	9.6	.1	34.18	-	-	50.08	-15.9
7	.405	33.88	Pk	9.7	.1	43.68	57.75	-14.07	-	-
8	.405	19.49	Av	9.7	.1	29.29	-	-	47.75	-18.46
9	.726	32.89	Pk	9.7	.1	42.69	56	-13.31	-	-
10	.72	13.54	Av	9.7	.1	23.34	-	-	46	-22.66
11	8.082	33.08	Pk	9.6	.2	42.88	60	-17.12	-	-
12	8.064	13.86	Av	9.6	.2	23.66	-	-	50	-26.34

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
.15525	41.48	Qp	9.7	.1	51.28	65.71	-14.43	-	-

Qp - Quasi-Peak detector

LINE 2 RESULTS

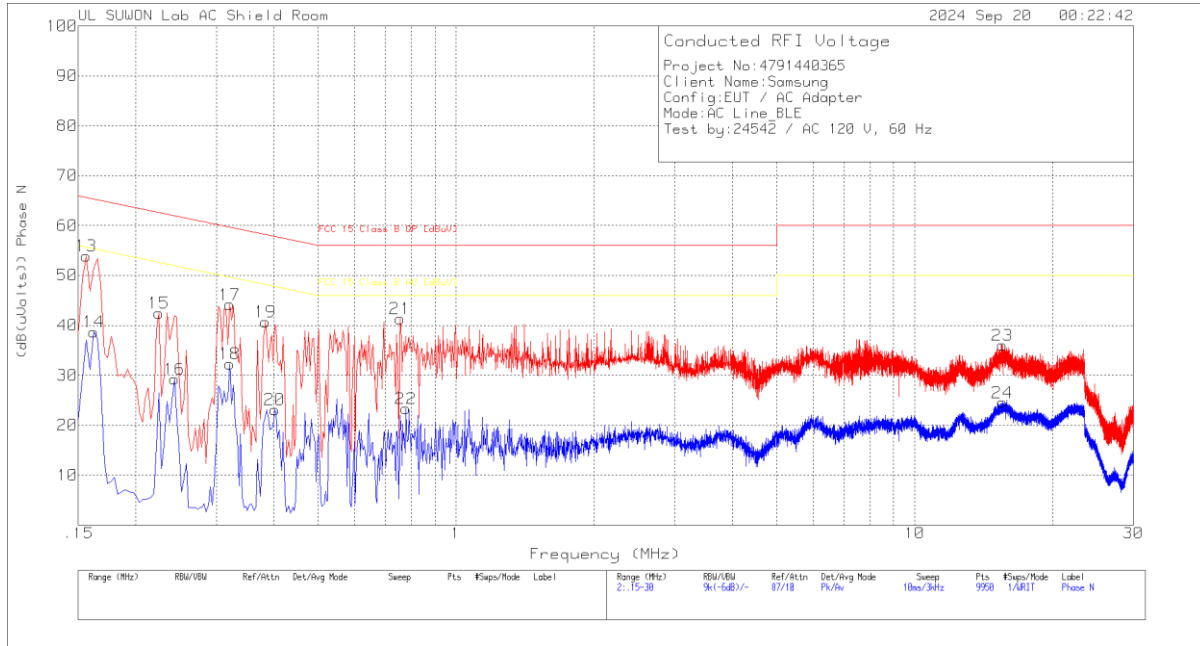

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.156	44.1	Pk	9.7	.1	53.9	65.67	-11.77	-	-
14	.162	28.8	Av	9.8	.1	38.7	-	-	55.36	-16.66
15	.225	32.71	Pk	9.6	.1	42.41	62.63	-20.22	-	-
16	.243	19.51	Av	9.6	.1	29.21	-	-	51.99	-22.78
17	.321	34.45	Pk	9.6	.1	44.15	59.68	-15.53	-	-
18	.321	22.58	Av	9.6	.1	32.28	-	-	49.68	-17.4
19	.384	30.89	Pk	9.7	.1	40.69	58.19	-17.5	-	-
20	.402	13.35	Av	9.7	.1	23.15	-	-	47.81	-24.66
21	.756	31.48	Pk	9.7	.1	41.28	56	-14.72	-	-
22	.777	13.5	Av	9.7	.1	23.3	-	-	46	-22.7
23	15.528	25.99	Pk	9.7	.3	35.99	60	-24.01	-	-
24	15.528	14.55	Av	9.7	.3	24.55	-	-	50	-25.45

Pk - Peak detector

Av - Average detection

END OF TEST REPORT