

# FCC DTS REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> April 29, 2019
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Location:</b> HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	<b>Report No.:</b> HCT-RF-1904-FC038-R1

<b>FCC ID:</b>	<b>A3LSMA202K</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

According to the Evaluation report, all of the data contained herein is reused from the reference  
FCC ID : A3LSMA202F report.

<b>Model:</b>	SM-A202K
<b>EUT Type:</b>	Mobile Phone
<b>Average Output Power:</b>	802.11b : 18.71 dBm 802.11g : 15.57 dBm 802.11n(HT20) : 14.55 dBm
<b>Frequency Range:</b>	2412 MHz - 2472 MHz
<b>Modulation type:</b>	CCK/DSSS/OFDM
<b>FCC Classification:</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s):</b>	Part 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.



**Report prepared by : Jung Ki Lim**  
**Engineer of Telecommunication testing center**



**Approved by : Jong Seok Lee**  
**Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1904-FC038	April 26, 2019	- First Approval Report
HCT-RF-1904-FC038-R1	April 29, 2019	- Revised the KDB version

# Table of Contents

1. EUT DESCRIPTION .....	4
2. TEST METHODOLOGY .....	5
EUT CONFIGURATION .....	5
EUT EXERCISE .....	5
GENERAL TEST PROCEDURES .....	5
DESCRIPTION OF TEST MODES .....	5
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS .....	6
FACILITIES .....	6
EQUIPMENT .....	6
5. ANTENNA REQUIREMENTS .....	6
6. MEASUREMENT UNCERTAINTY .....	7
7. DESCRIPTION OF TESTS .....	8
8. SUMMARY TEST OF RESULTS .....	23
9. TEST RESULT .....	24
9.1 DUTY CYCLE.....	24
9.2 6dB BANDWIDTH.....	27
9.3 OUTPUT POWER .....	30
9.4 POWER SPECTRAL DENSITY .....	36
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	39
9.6 RADIATED SPURIOUS EMISSIONS.....	53
9.7 RADIATED RESTRICTED BAND EDGES .....	61
9.8 POWERLINE CONDUCTED EMISSIONS .....	79
10. LIST OF TEST EQUIPMENT .....	83
11. ANNEX A_ TEST SETUP PHOTO .....	85

## 1. EUT DESCRIPTION

Model	SM-A202K
EUT Type	Mobile Phone
Power Supply	DC 3.85 V
Battery Information	Model: EB-BA202ABU Type: Li-ion battery
Travel Adapter Information	Model : EP-TA200 Manufacture: SOLU M
Frequency Range	2412 MHz - 2472 MHz
Max. RF Output Power	<b><u>Peak Power (For information only)</u></b> 802.11b : 21.09 dBm 802.11g : 22.56 dBm 802.11n(HT20) : 22.36 dBm <b><u>Average Power</u></b> 802.11b : 18.71 dBm 802.11g : 15.57 dBm 802.11n(HT20) : 14.55 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	13 Channels
Antenna Specification	Antenna type: LDS Peak Gain : -1.07 dBi
Date(s) of Tests	March 04, 2019 ~ March 26, 2019 (A3LSMA202F) April 12, 2019 ~ April 22, 2019 (A3LSMA202K)

## **2. TEST METHODOLOGY**

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## **GENERAL TEST PROCEDURES**

### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### **3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### **4. FACILITIES AND ACCREDITATIONS**

#### **FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5. ANTENNA REQUIREMENTS**

#### **According to FCC 47 CFR §15.203:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\* The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

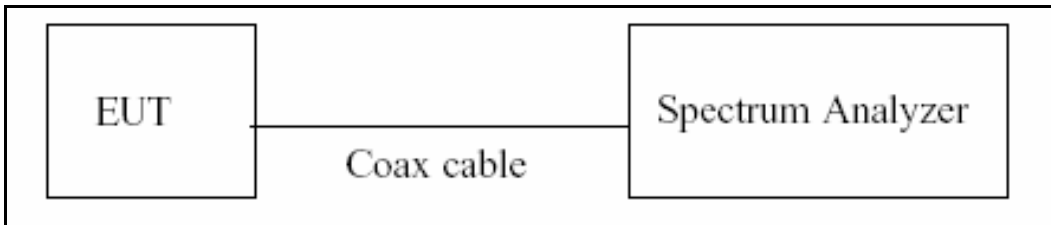

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$




## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration

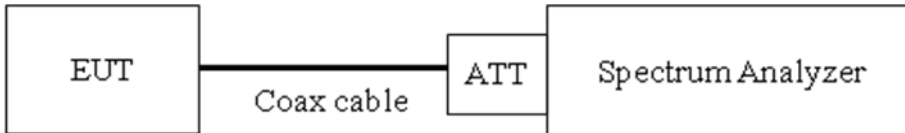

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration

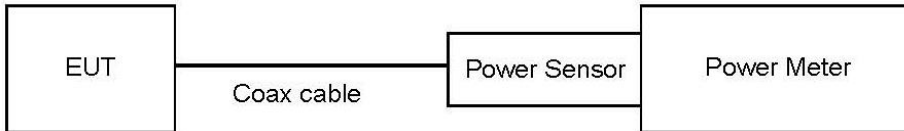

#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration

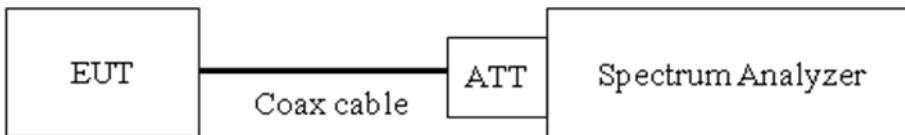

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration

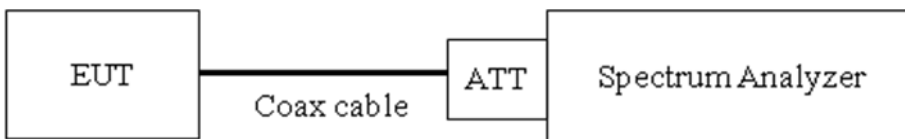

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53
26000	12.02

Note : 1. '\*' is fundamental frequency range.  
 2. Factor = Attenuator loss + Cable loss


**7.6. Radiated Test**

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

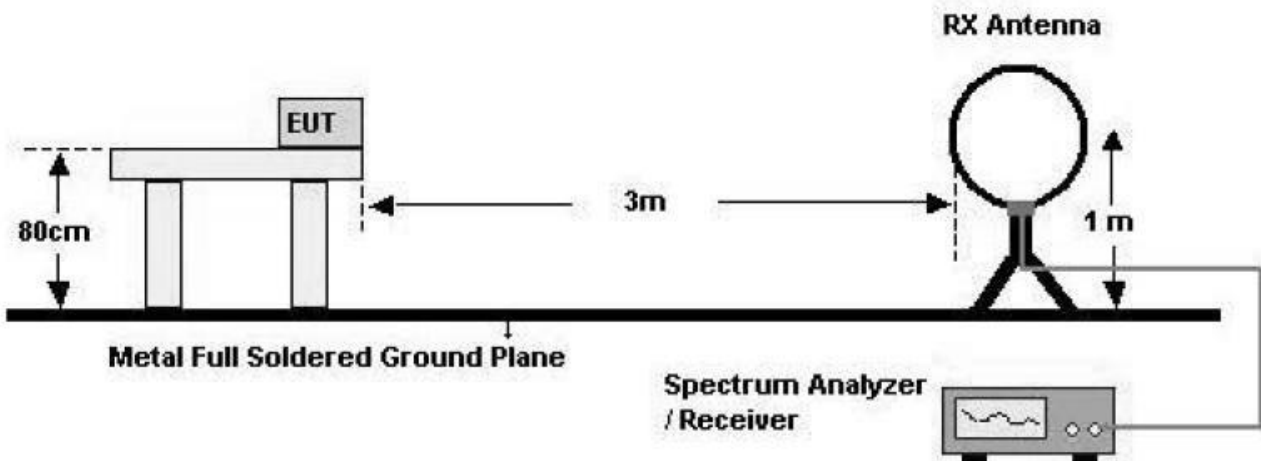

30 MHz - 1 GHz

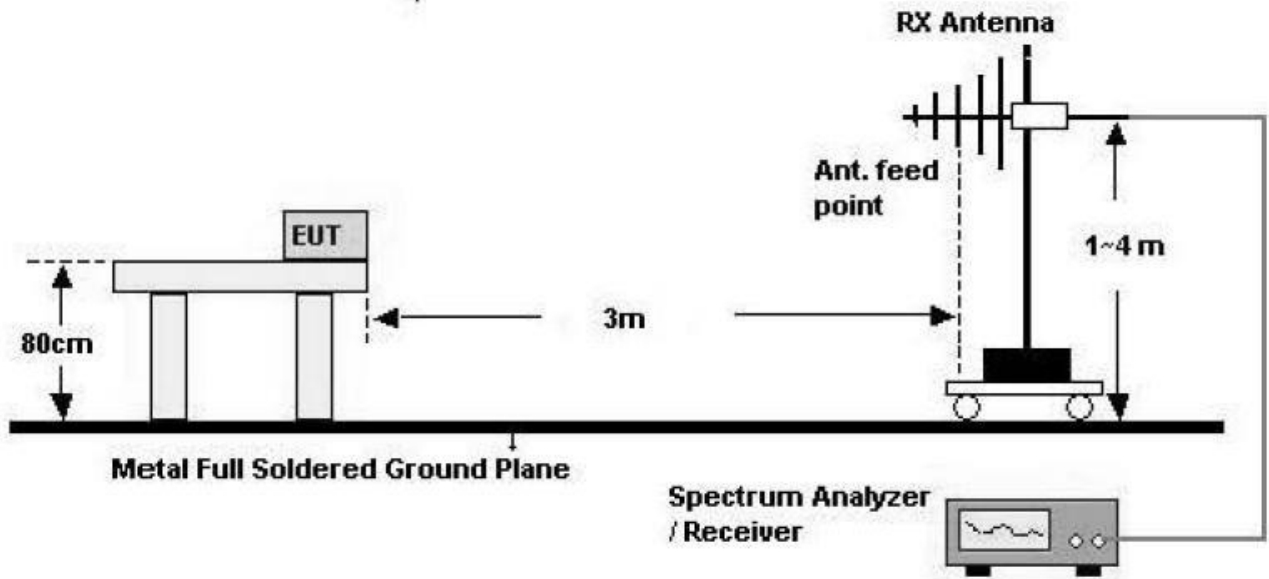

Above 1 GHz

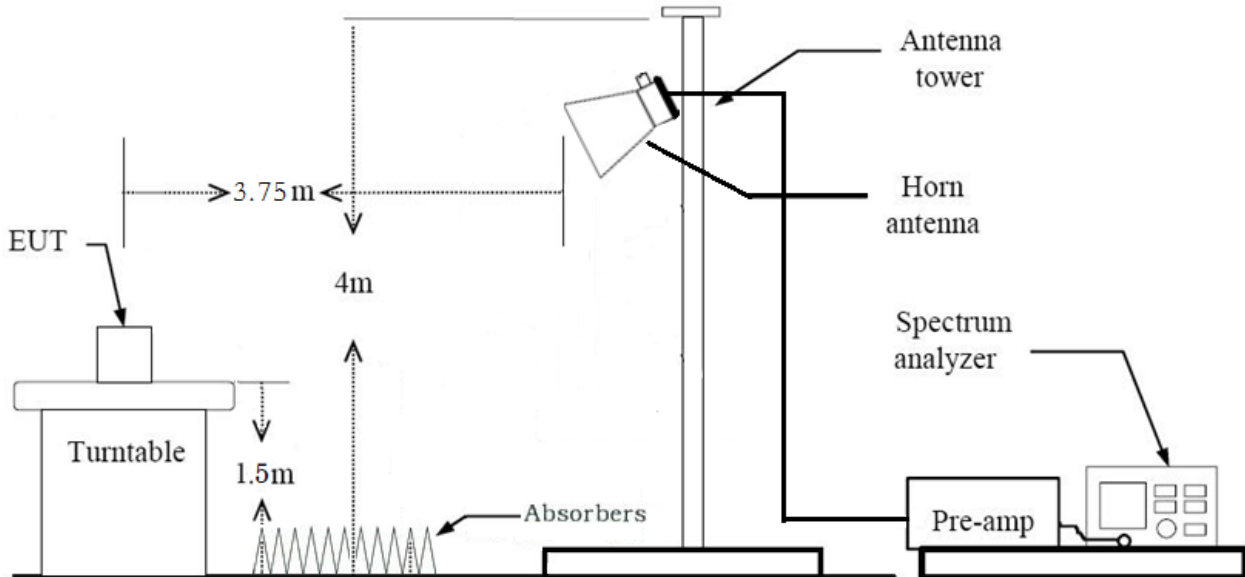

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \cdot$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. The test results for below 30 MHz is correlated to an open site.  
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq 3 \cdot$ RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz

\*In general, (1) is used mainly
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)



**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3\*RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq$  98%
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3\*RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW

(2) Measurement Type(Average): Duty cycle  $\geq$  98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit

in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

**7.7. AC Power line Conducted Emissions**

**Limit**

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

**Test Configuration**

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

**Test Procedure**

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

**Sample Calculation**

Quasi-peak(Final Result) = Reading Value + Correction Factor

## **7.8. Worst case configuration and mode**

### **Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : Y
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
  - 802.11b : 1Mbps
  - 802.11g : 6Mbps
  - 802.11n\_HT20 : MCS0

### **AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,  
Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter

### **Conducted test**

1. The EUT was configured with data rate of highest power.

## 8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

## 9. TEST RESULT


### 9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.610	8.640	0.997	0.015
	2	4.400	4.430	0.993	0.030
	5.5	1.720	1.750	0.983	0.075
	11	0.956	0.986	0.970	0.134
802.11g	6	1.428	1.503	0.950	0.222
	9	0.960	1.056	0.909	0.414
	12	0.726	0.819	0.886	0.523
	18	0.495	0.606	0.817	0.879
	24	0.375	0.489	0.767	1.153
	36	0.258	0.372	0.694	1.589
	48	0.195	0.312	0.625	2.041
	54	0.180	0.295	0.610	2.145
802.11n (HT20)	6.5 (MCS0)	1.335	1.413	0.945	0.247
	13 (MCS1)	0.687	0.804	0.854	0.683
	19.5 (MCS2)	0.471	0.588	0.801	0.964
	26 (MCS3)	0.363	0.480	0.756	1.213
	39 (MCS4)	0.255	0.351	0.726	1.388
	52 (MCS5)	0.201	0.315	0.638	1.951
	58.5 (MCS6)	0.184	0.300	0.613	2.123
	65 (MCS7)	0.168	0.283	0.594	2.265




■ Test Plots


Duty cycle plot (802.11b(1Mbps))

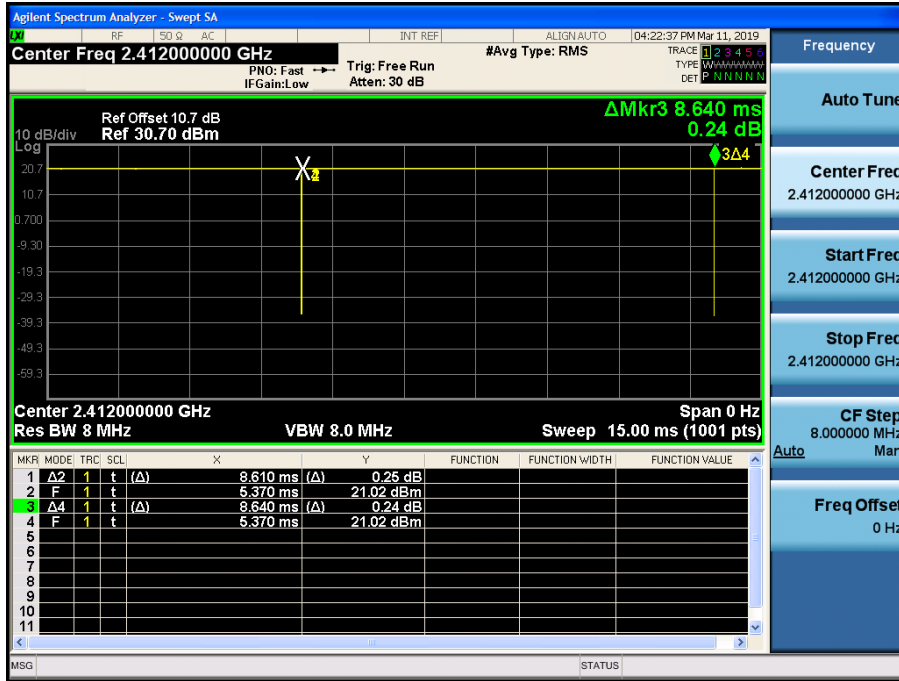

Duty cycle plot (802.11g(6Mbps))

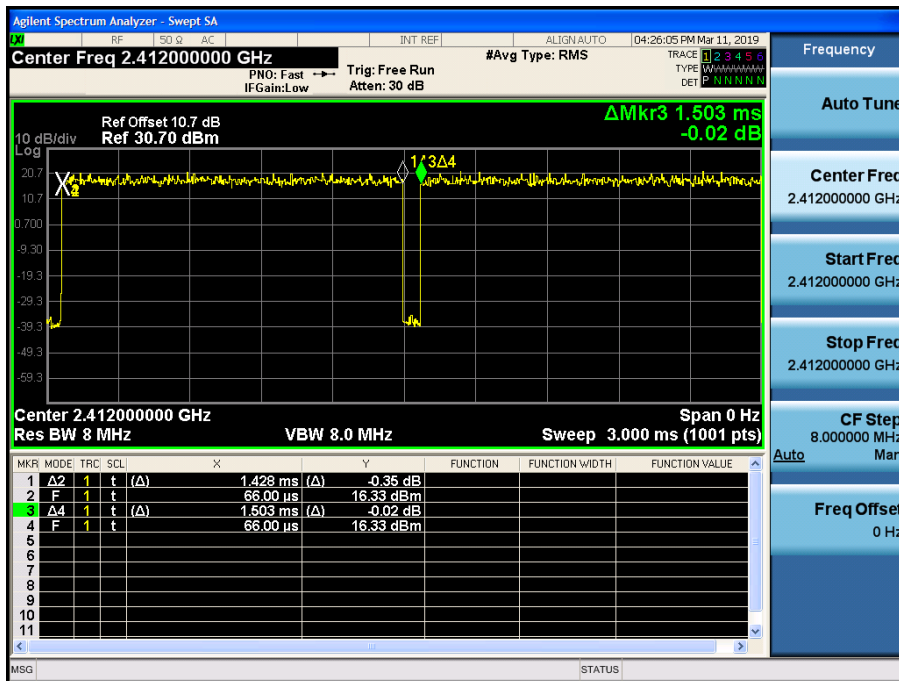

Duty cycle plot (802.11n\_HT20(MCS0))

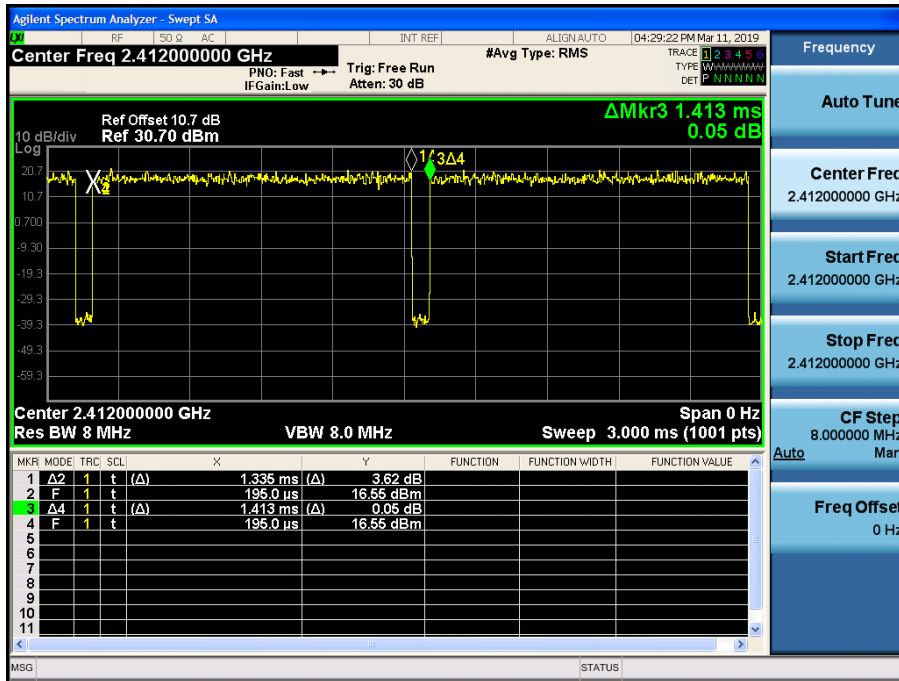

**Note:**

In order to simplify the report, attached plots were only the most lowest datarate.

### 9.2 6dB BANDWIDTH


802.11b Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.105	> 0.5
2437	6	7.887	> 0.5
2462	11	8.112	> 0.5
2467	12	8.097	> 0.5
2472	13	8.101	> 0.5

802.11g Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.660	> 0.5
2437	6	16.390	> 0.5
2462	11	16.010	> 0.5
2467	12	16.020	> 0.5
2472	13	15.820	> 0.5


802.11n Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.040	> 0.5
2437	6	16.390	> 0.5
2462	11	16.030	> 0.5
2467	12	16.720	> 0.5
2472	13	16.630	> 0.5

■ Test Plots


6dB Bandwidth plot (802.11b-CH 6)

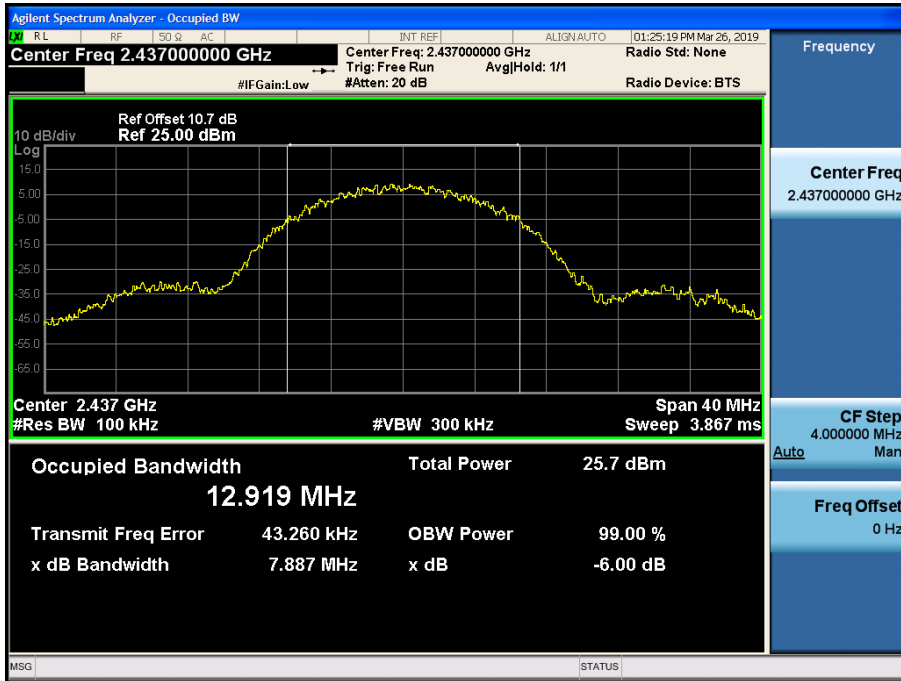

6dB Bandwidth plot (802.11g-CH 1)

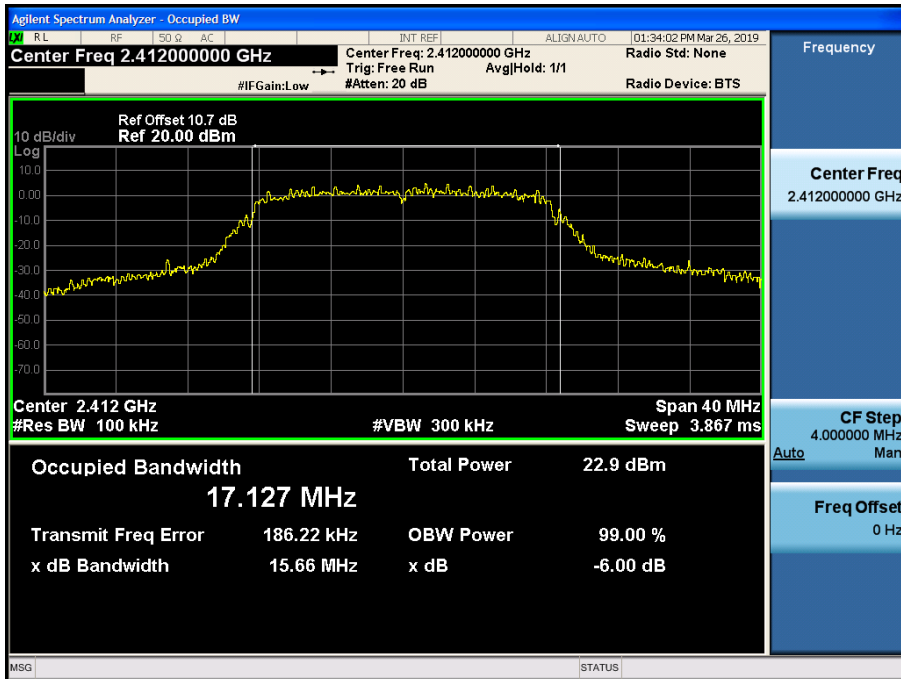

6dB Bandwidth plot (802.11n\_HT20-CH 11)

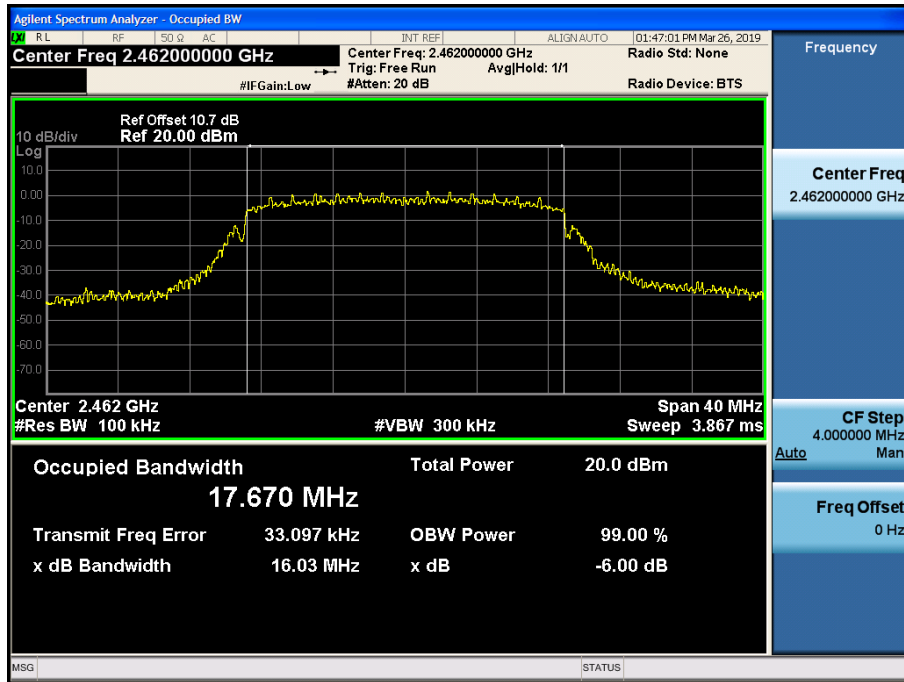

**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

### 9.3 OUTPUT POWER

**Peak Power**

1. Power Meter offset = Attenuator loss + Cable loss
  2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 10.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Data Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	1	20.85	30	17
		2	20.82	30	
		5.5	21.09	30	
		11	21.00	30	
2437	6	1	20.39	30	16
		2	20.57	30	
		5.5	20.58	30	
		11	20.69	30	
2462	11	1	20.93	30	17
		2	21.05	30	
		5.5	20.96	30	
		11	20.90	30	
2467	12	1	13.70	30	10
		2	13.82	30	
		5.5	13.69	30	
		11	13.83	30	
2472	13	1	13.80	30	10
		2	13.67	30	
		5.5	13.93	30	
		11	13.90	30	

802.11g Mode		Data Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	6	22.05	30	15
		9	22.20	30	
		12	22.14	30	
		18	22.15	30	
		24	22.19	30	
		36	22.26	30	
		48	21.39	30	
		54	21.77	30	
2437	6	6	22.30	30	
		9	22.43	30	
		12	22.34	30	
		18	22.45	30	
		24	22.48	30	
		36	22.56	30	
		48	21.63	30	
		54	22.09	30	
2462	11	6	20.78	30	
		9	21.34	30	
		12	21.67	30	
		18	20.61	30	
		24	20.54	30	
		36	20.49	30	
		48	20.38	30	
		54	21.32	30	
2467	12	6	14.74	30	
		9	16.00	30	
		12	15.45	30	
		18	14.86	30	
		24	15.00	30	
		36	14.97	30	
		48	14.52	30	
		54	15.63	30	
2472	13	6	15.45	30	
		9	16.12	30	
		12	14.89	30	
		18	14.97	30	
		24	15.12	30	
		36	14.92	30	
		48	14.88	30	
		54	15.25	30	

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	0	21.90	30	14
		1	21.99	30	
		2	21.83	30	
		3	21.91	30	
		4	22.06	30	
		5	21.60	30	
		6	21.37	30	
		7	21.46	30	
2437	6	0	22.25	30	
		1	22.25	30	
		2	22.32	30	
		3	22.09	30	
		4	22.36	30	
		5	21.81	30	
		6	21.89	30	
		7	21.78	30	
2462	11	0	21.28	30	12
		1	21.14	30	
		2	20.85	30	
		3	20.85	30	
		4	21.04	30	
		5	20.70	30	
		6	21.01	30	
		7	20.62	30	
2467	12	0	13.02	30	4
		1	13.68	30	
		2	12.82	30	
		3	12.92	30	
		4	13.61	30	
		5	13.08	30	
		6	13.07	30	
		7	12.97	30	
2472	13	0	13.17	30	
		1	13.57	30	
		2	13.12	30	
		3	13.39	30	
		4	14.02	30	
		5	13.05	30	
		6	13.08	30	
		7	13.07	30	



**Average Power**

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Data Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	18.32	0.015	18.34	30	17
		2	18.37	0.030	18.40	30	
		5.5	18.30	0.075	18.38	30	
		11	18.20	0.134	18.33	30	
2437	6	1	17.86	0.015	17.88	30	16
		2	17.77	0.030	17.80	30	
		5.5	17.89	0.075	17.97	30	
		11	17.85	0.134	17.98	30	
2462	11	1	18.69	0.015	18.71	30	17
		2	18.40	0.030	18.43	30	
		5.5	18.38	0.075	18.46	30	
		11	18.31	0.134	18.44	30	
2467	12	1	10.76	0.015	10.78	30	10
		2	10.67	0.030	10.70	30	
		5.5	10.51	0.075	10.59	30	
		11	10.40	0.134	10.53	30	
2472	13	1	11.29	0.015	11.31	30	10
		2	11.21	0.030	11.24	30	
		5.5	11.04	0.075	11.12	30	
		11	10.98	0.134	11.11	30	

802.11g Mode		Data Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting	
Frequency [MHz]	Channel No.							
2412	1	6	14.68	0.222	14.90	30	15	
		9	14.57	0.414	14.98	30		
		12	14.42	0.523	14.94	30		
		18	14.18	0.879	15.06	30		
		24	13.88	1.153	15.03	30		
		36	13.48	1.589	15.07	30		
		48	10.90	2.041	12.94	30		
		54	10.80	2.145	12.95	30		
2437	6	6	15.13	0.222	15.35	30		
		9	14.98	0.414	15.39	30		
		12	14.82	0.523	15.34	30		
		18	14.60	0.879	15.48	30		
		24	14.33	1.153	15.48	30		
		36	13.98	1.589	15.57	30		
		48	11.20	2.041	13.24	30		
		54	11.15	2.145	13.30	30		
2462	11	6	11.71	0.222	11.93	30	12	
		9	11.62	0.414	12.03	30		
		12	11.49	0.523	12.01	30		
		18	11.27	0.879	12.15	30		
		24	11.02	1.153	12.17	30		
		36	10.60	1.589	12.19	30		
		48	9.84	2.041	11.88	30		
		54	9.78	2.145	11.93	30		
2467	12	6	5.99	0.222	6.21	30		6
		9	5.84	0.414	6.25	30		
		12	5.72	0.523	6.24	30		
		18	5.53	0.879	6.41	30		
		24	5.22	1.153	6.37	30		
		36	4.86	1.589	6.45	30		
		48	3.75	2.041	5.79	30		
		54	3.67	2.145	5.82	30		
2472	13	6	6.01	0.222	6.23	30		
		9	5.81	0.414	6.22	30		
		12	5.69	0.523	6.21	30		
		18	5.49	0.879	6.37	30		
		24	5.19	1.153	6.34	30		
		36	4.82	1.589	6.41	30		
		48	3.92	2.041	5.96	30		
		54	3.75	2.145	5.90	30		

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting	
Frequency [MHz]	Channel No.							
2412	1	0	13.73	0.247	13.98	30	14	
		1	13.36	0.683	14.04	30		
		2	13.11	0.964	14.07	30		
		3	12.88	1.213	14.09	30		
		4	12.49	1.388	13.88	30		
		5	10.90	1.951	12.85	30		
		6	10.77	2.123	12.89	30		
		7	10.66	2.265	12.92	30		
2437	6	0	13.95	0.247	14.20	30		
		1	13.71	0.683	14.39	30		
		2	13.49	0.964	14.45	30		
		3	13.34	1.213	14.55	30		
		4	12.98	1.388	14.37	30		
		5	11.28	1.951	13.23	30		
		6	11.18	2.123	13.30	30		
		7	11.00	2.265	13.26	30		
2462	11	0	11.62	0.247	11.87	30	12	
		1	11.32	0.683	12.00	30		
		2	11.12	0.964	12.08	30		
		3	10.89	1.213	12.10	30		
		4	10.56	1.388	11.95	30		
		5	9.80	1.951	11.75	30		
		6	9.67	2.123	11.79	30		
		7	9.53	2.265	11.79	30		
2467	12	0	3.45	0.247	3.70	30		4
		1	3.24	0.683	3.92	30		
		2	3.04	0.964	4.00	30		
		3	2.83	1.213	4.04	30		
		4	2.53	1.388	3.92	30		
		5	1.88	1.951	3.83	30		
		6	1.78	2.123	3.90	30		
		7	1.58	2.265	3.84	30		
2472	13	0	3.57	0.247	3.82	30		
		1	3.37	0.683	4.05	30		
		2	3.14	0.964	4.10	30		
		3	3.02	1.213	4.23	30		
		4	2.63	1.388	4.02	30		
		5	1.77	1.951	3.72	30		
		6	1.68	2.123	3.80	30		
		7	1.49	2.265	3.75	30		

## 9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	2.231	0.030	2.261	8
	2437	6	1.443	0.134	1.577	8
	2462	11	2.194	0.015	2.209	8
	2467	12	-5.743	0.015	-5.728	8
	2472	13	-5.304	0.015	-5.289	8
802.11g	2412	1	-5.534	1.589	-3.945	8
	2437	6	-5.463	1.589	-3.874	8
	2462	11	-8.397	1.589	-6.808	8
	2467	12	-14.605	1.589	-13.016	8
	2472	13	-14.121	1.589	-12.532	8
802.11n	2412	1	-5.697	1.213	-4.484	8
	2437	6	-5.968	1.213	-4.755	8
	2462	11	-8.075	1.213	-6.862	8
	2467	12	-16.375	1.213	-15.162	8
	2472	13	-16.109	1.213	-14.896	8

**Note :**


- Spectrum reading values are not plot data.  
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- Spectrum offset = Attenuator loss + Cable loss
- We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.  
So, 10.7 dB is offset for 2.4 GHz Band.

■ Test Plots


Power Spectral Density (802.11b-CH 1)



Power Spectral Density (802.11g-CH 6)

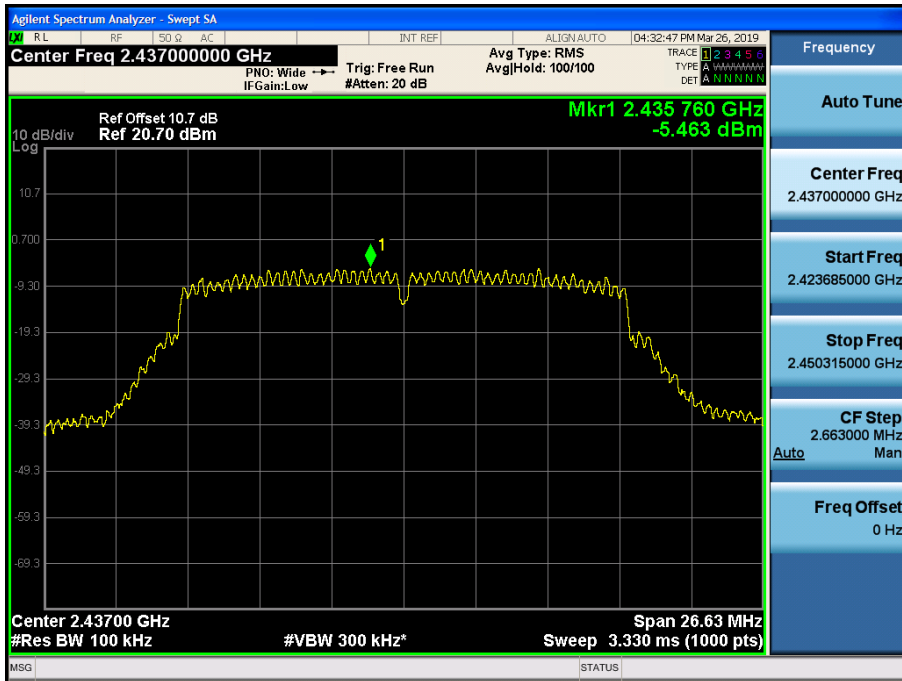

Power Spectral Density (802.11n\_HT20 -CH 1)

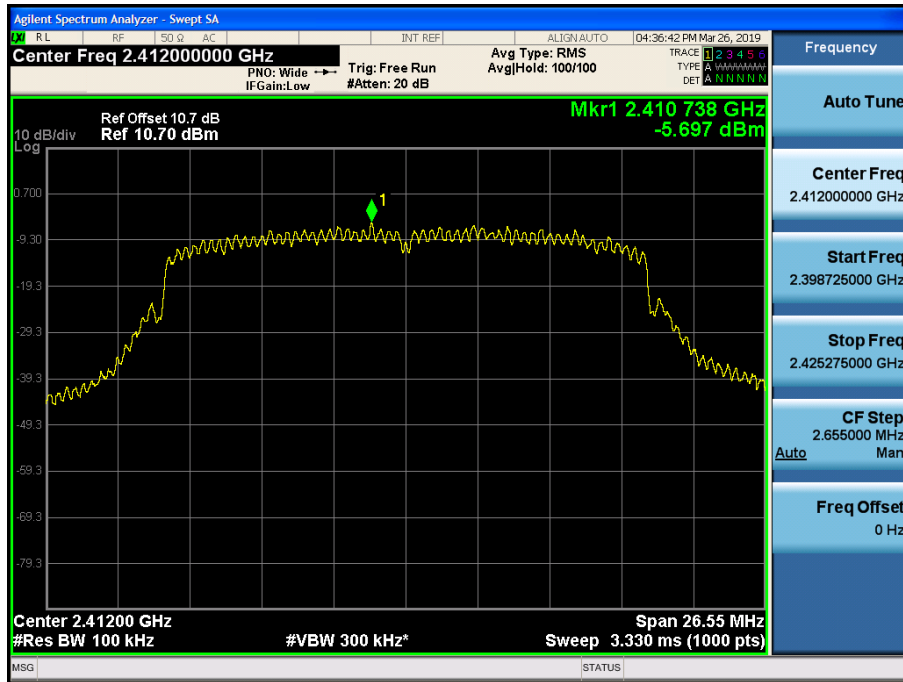

**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.


## **9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

■ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

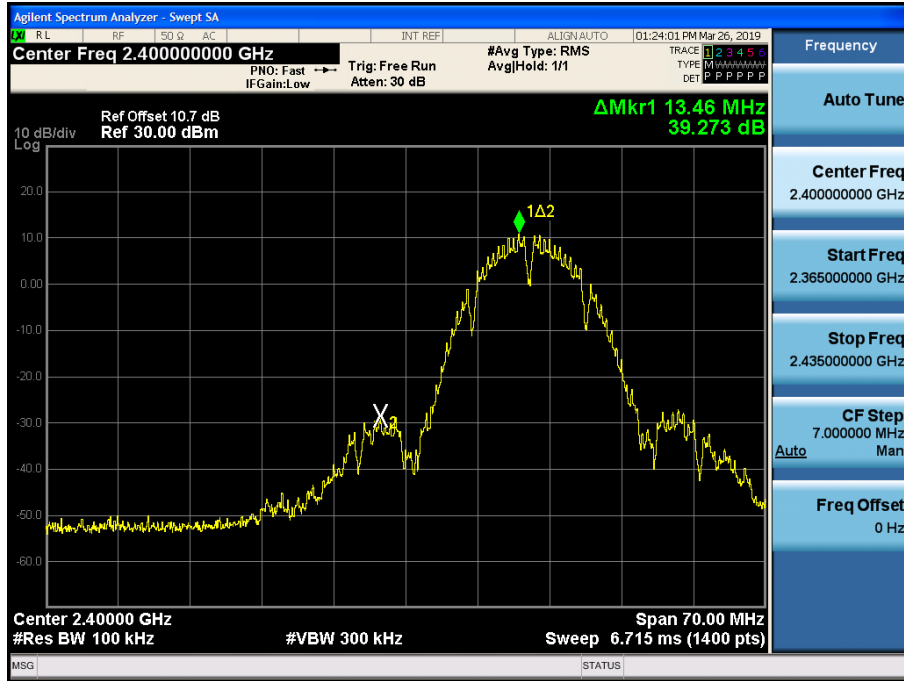


Band Edge (802.11b-CH11)

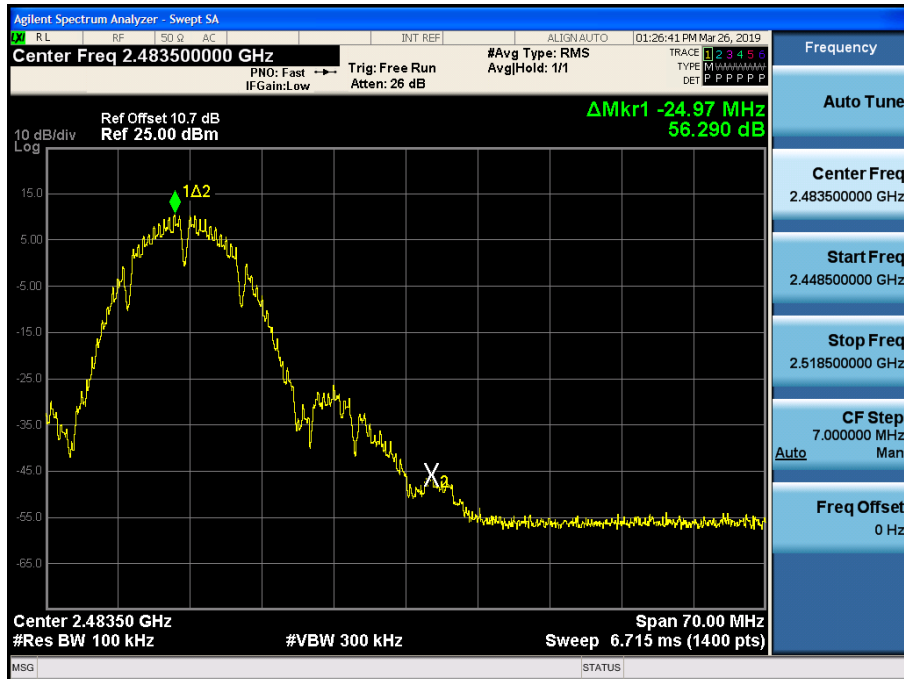





Band Edge (802.11b-CH12)

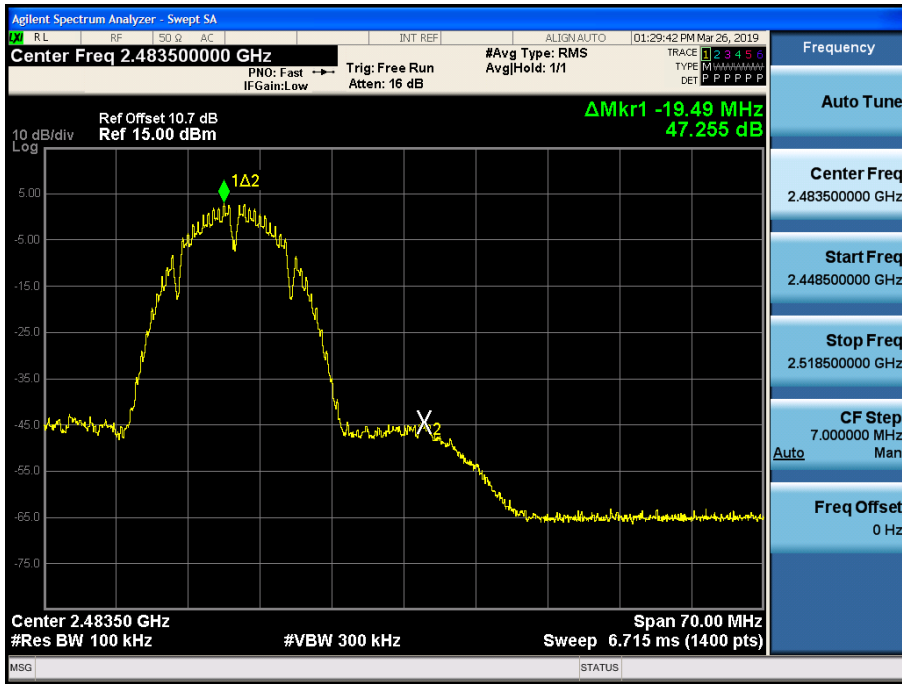


Band Edge (802.11b-CH13)

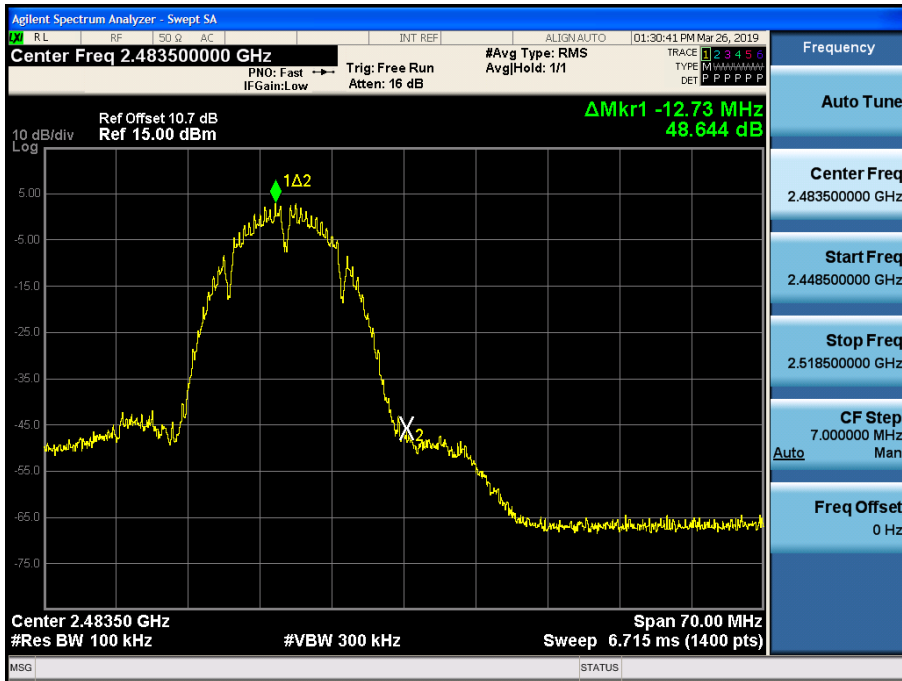


Band Edge (802.11g-CH1)

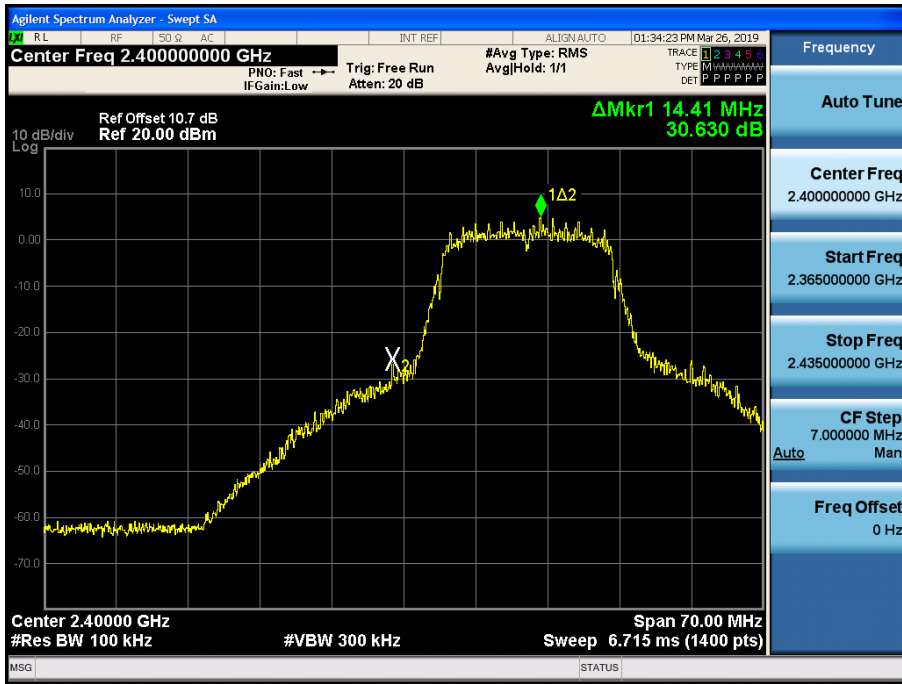


Band Edge (802.11g-CH11)

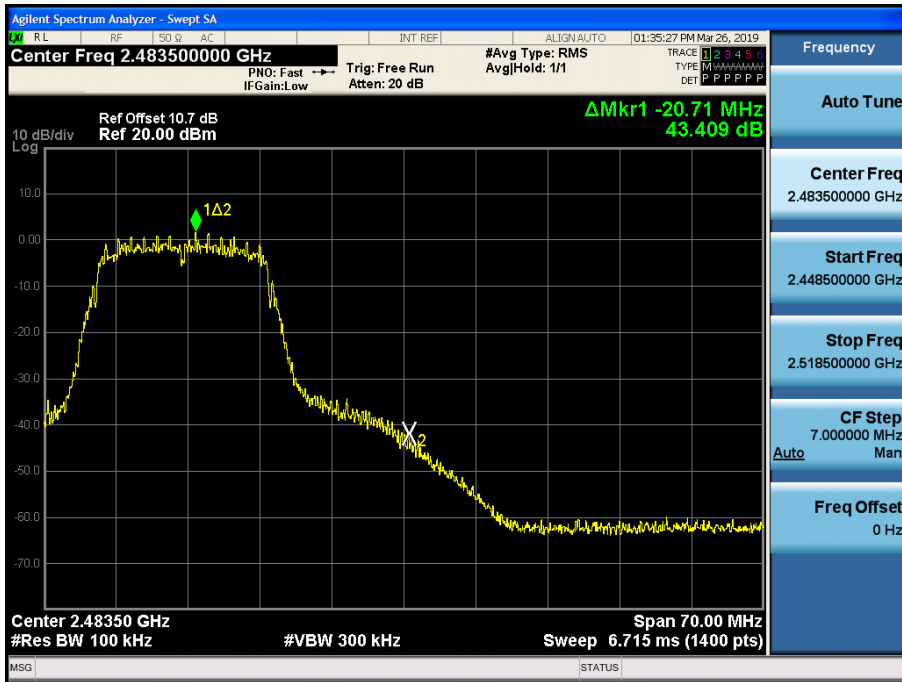


Band Edge (802.11g-CH12)

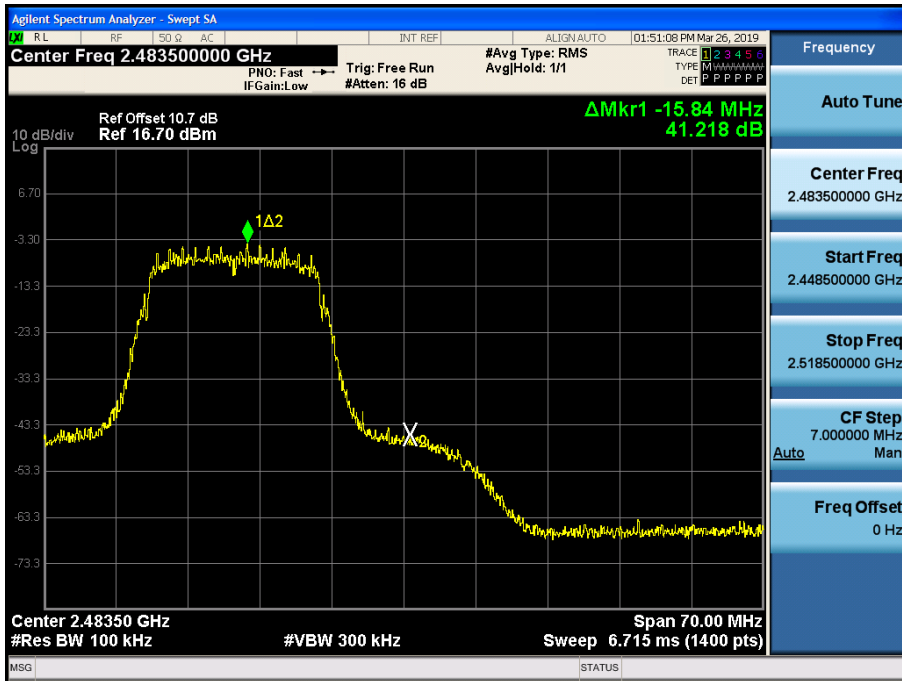


Band Edge (802.11g-CH13)

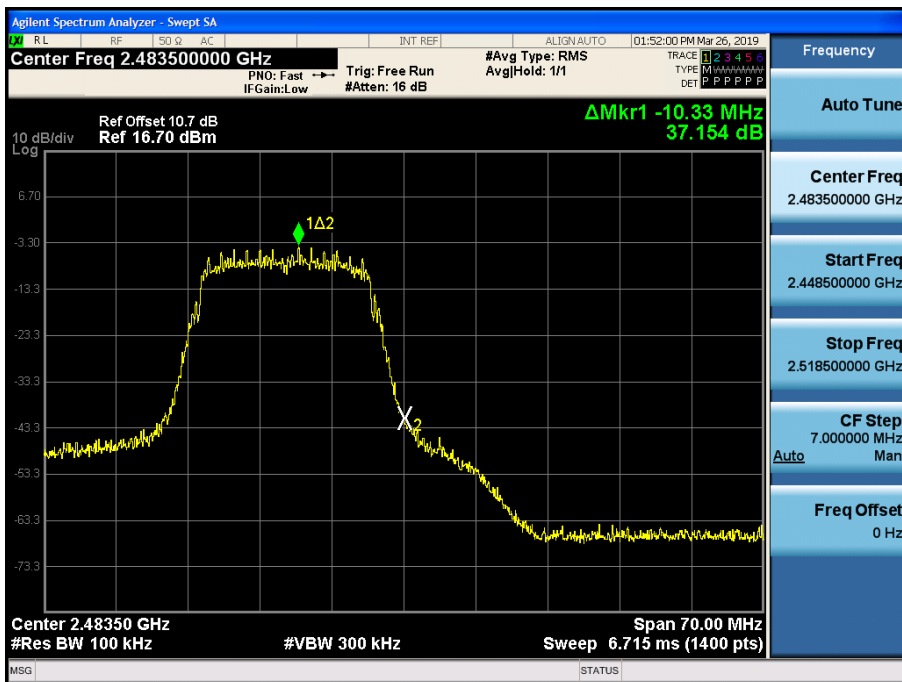


Band Edge (802.11n\_HT20-CH1)

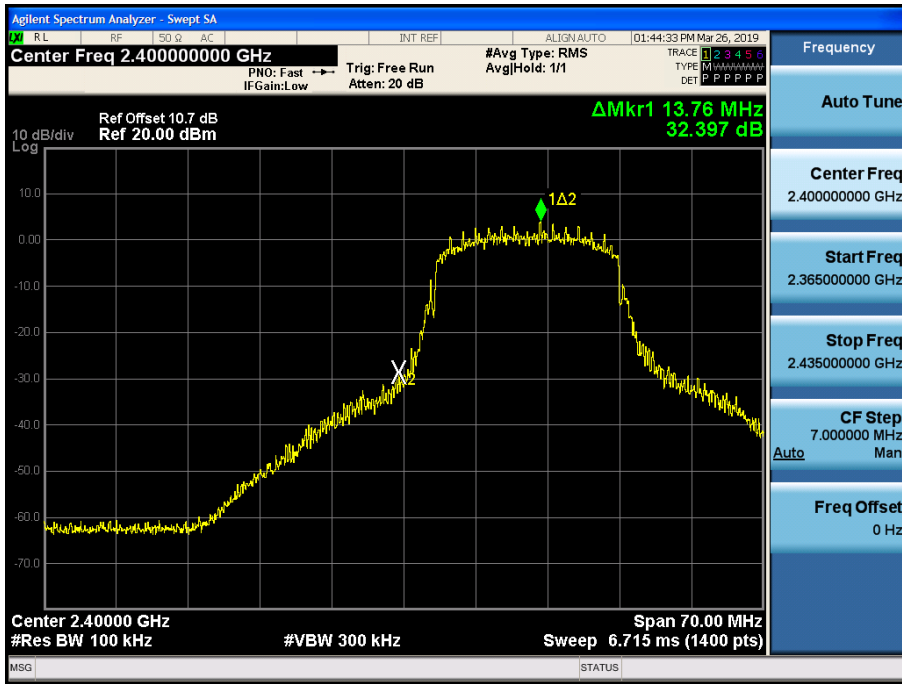


Band Edge (802.11n\_HT20-CH11)

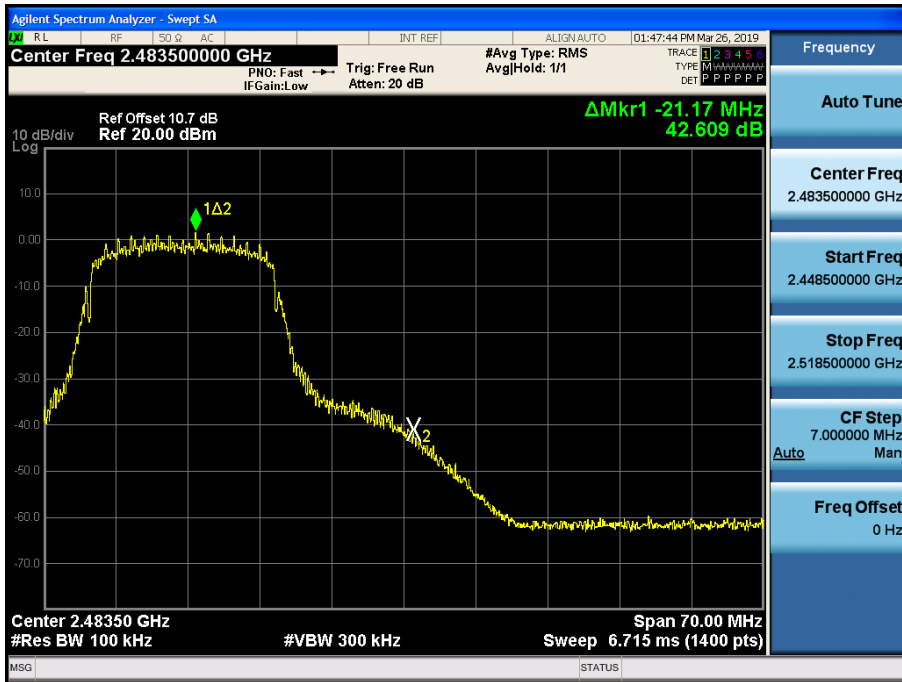

Band Edge (802.11n\_HT20-CH12)

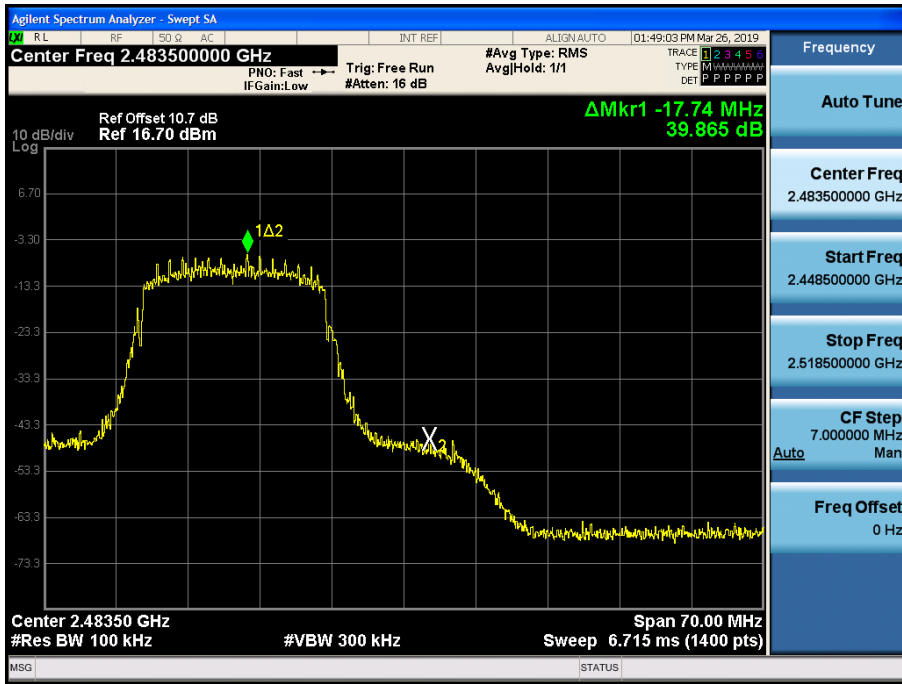


Band Edge (802.11n\_HT20-CH13)

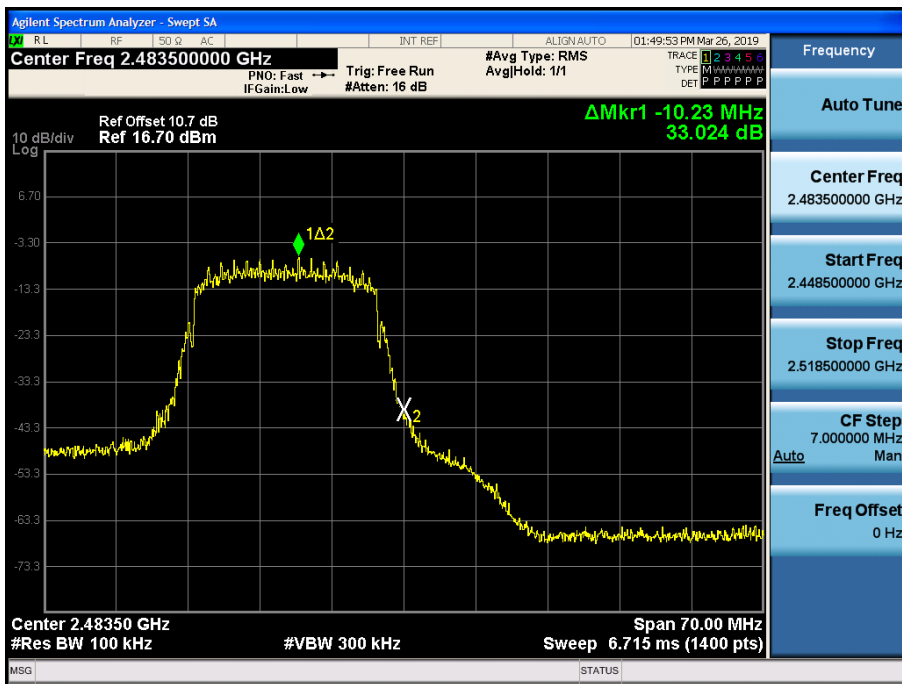

■ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

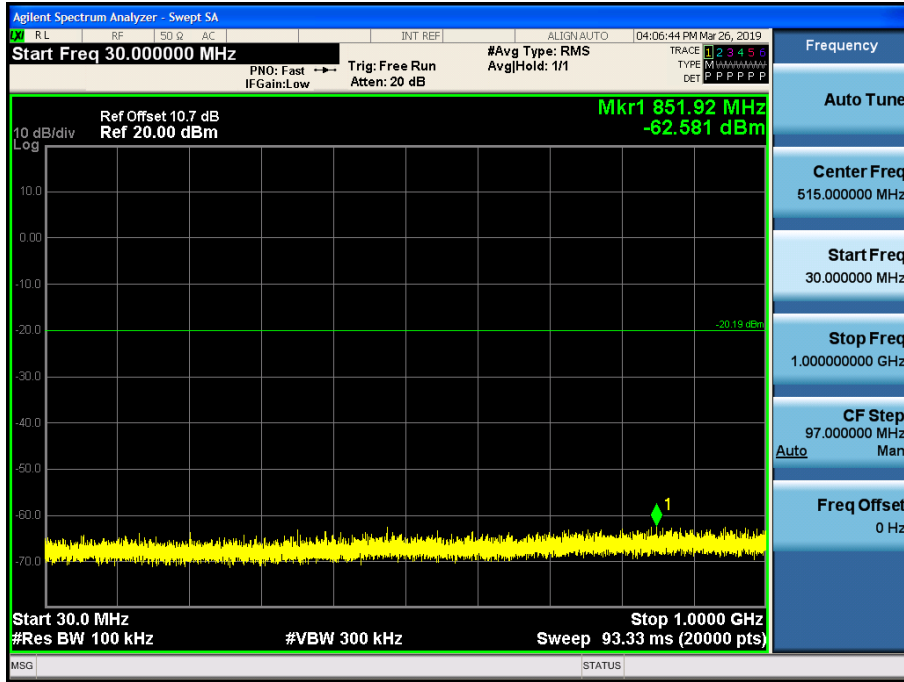


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

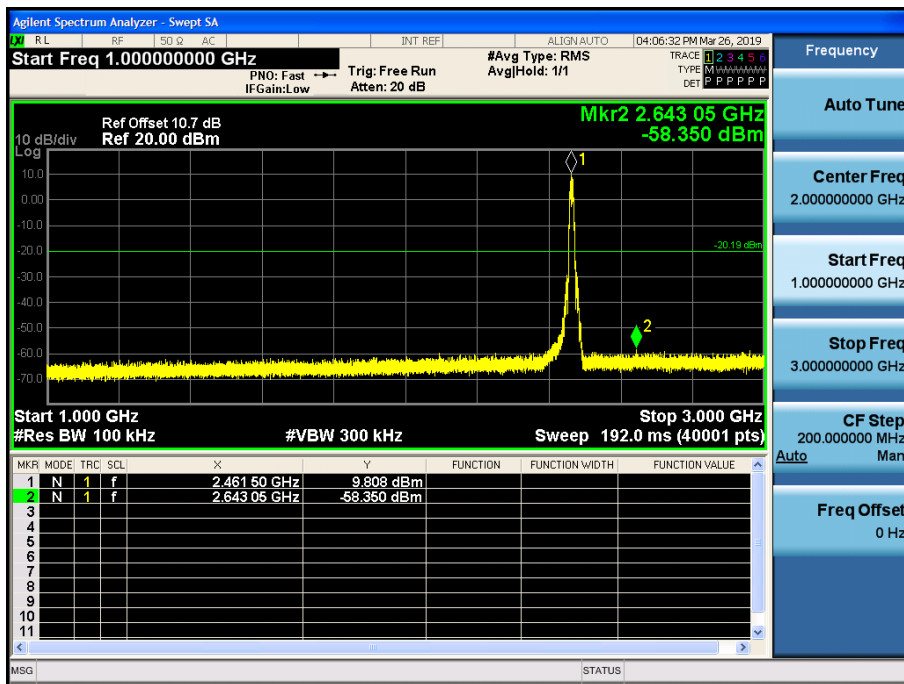


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

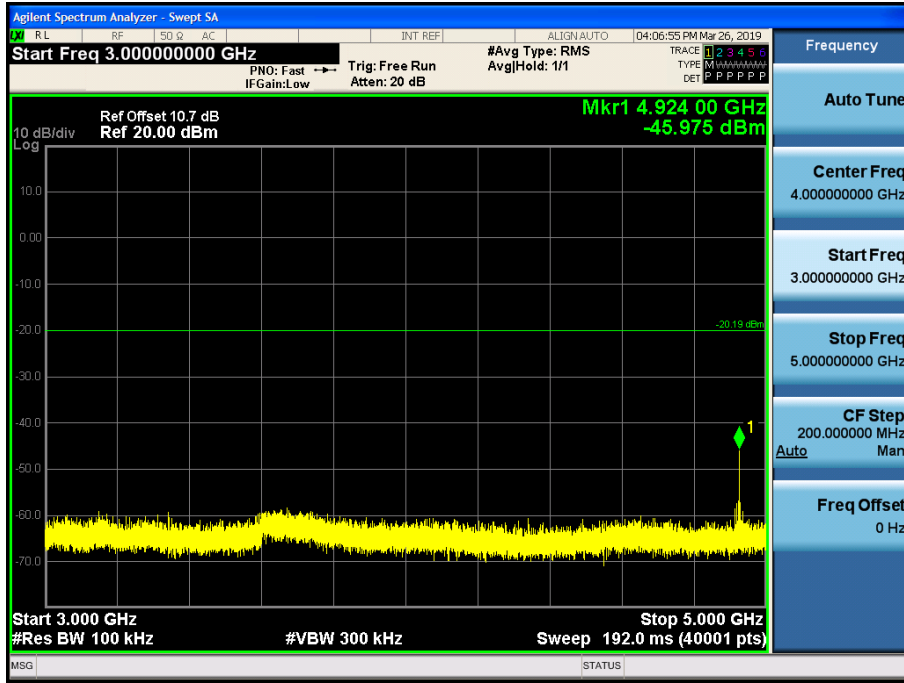


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

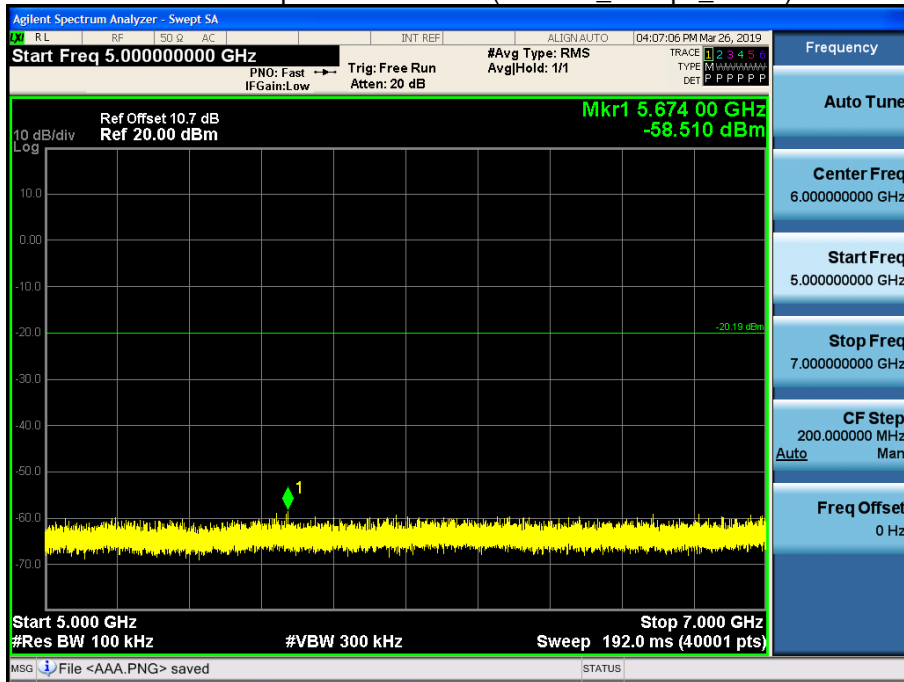


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

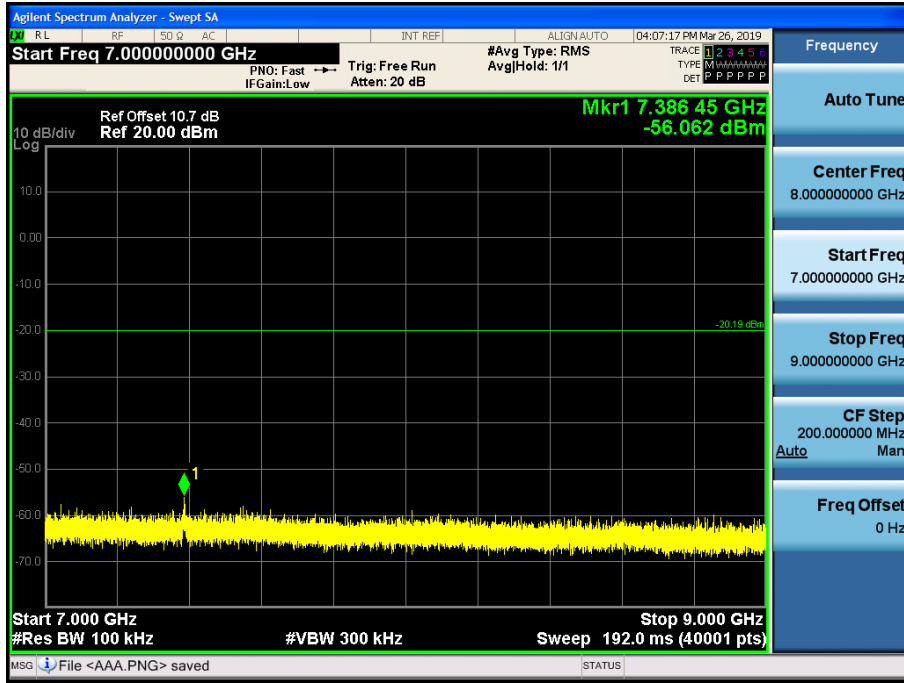

9 GHz ~ 11 GHz


Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

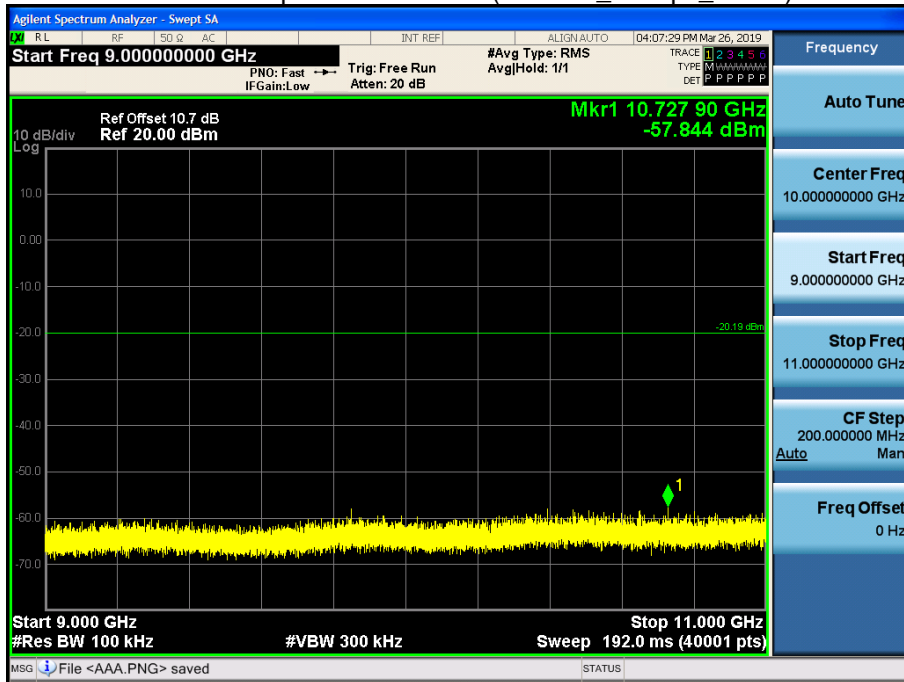




11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

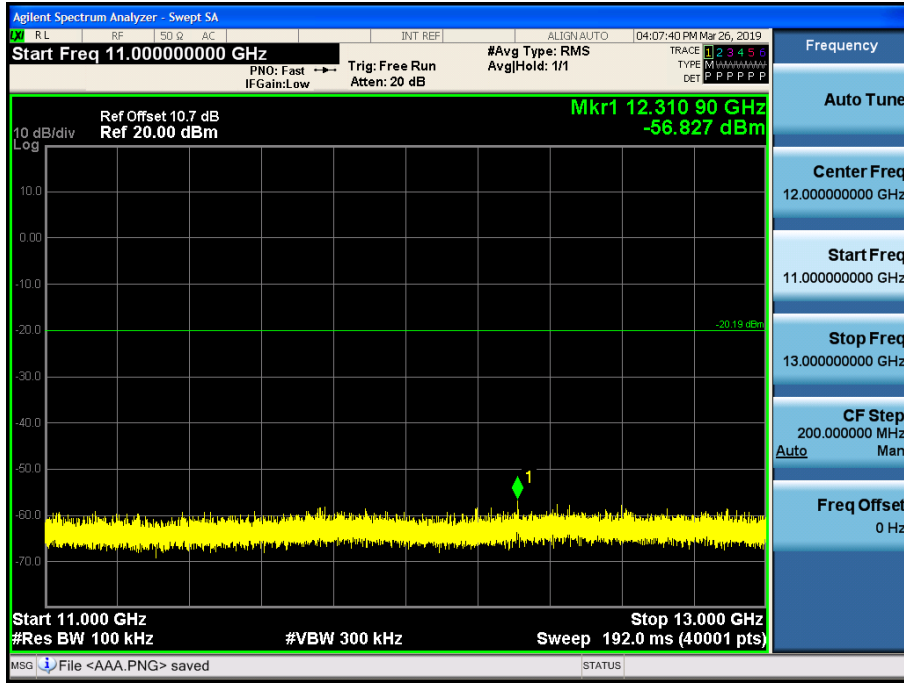


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

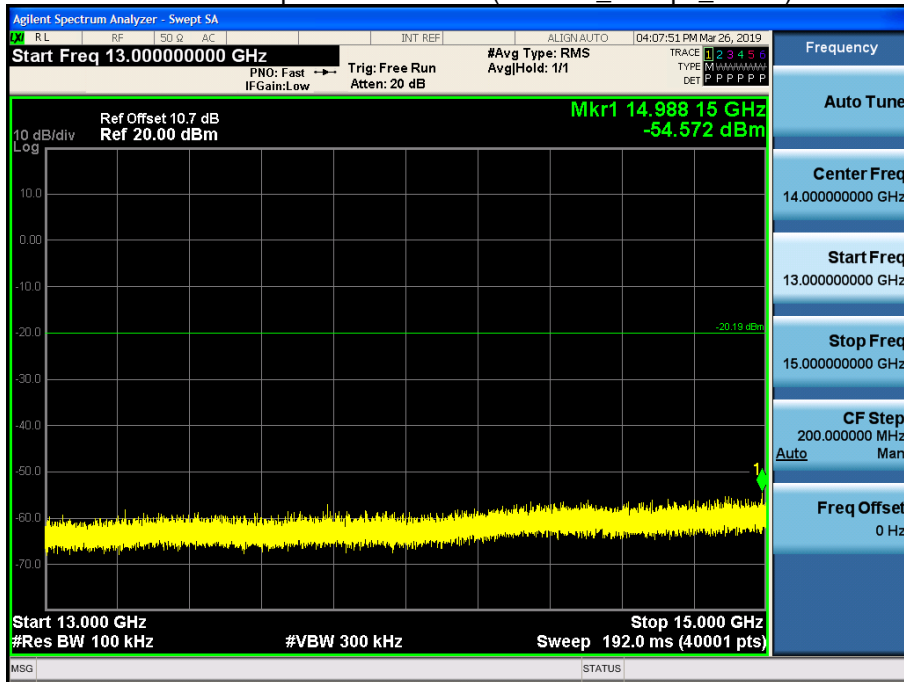


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

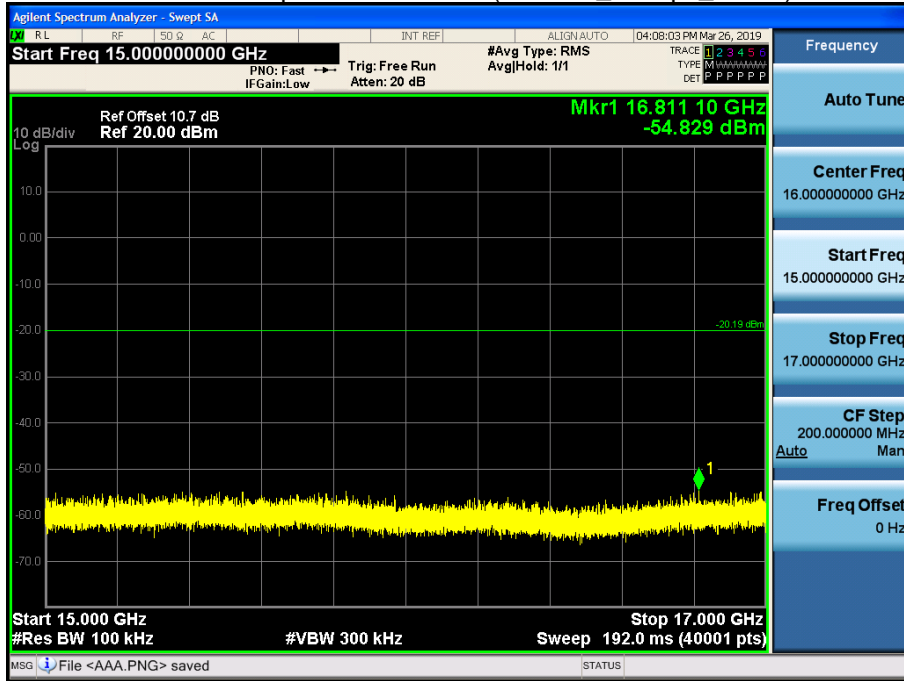


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

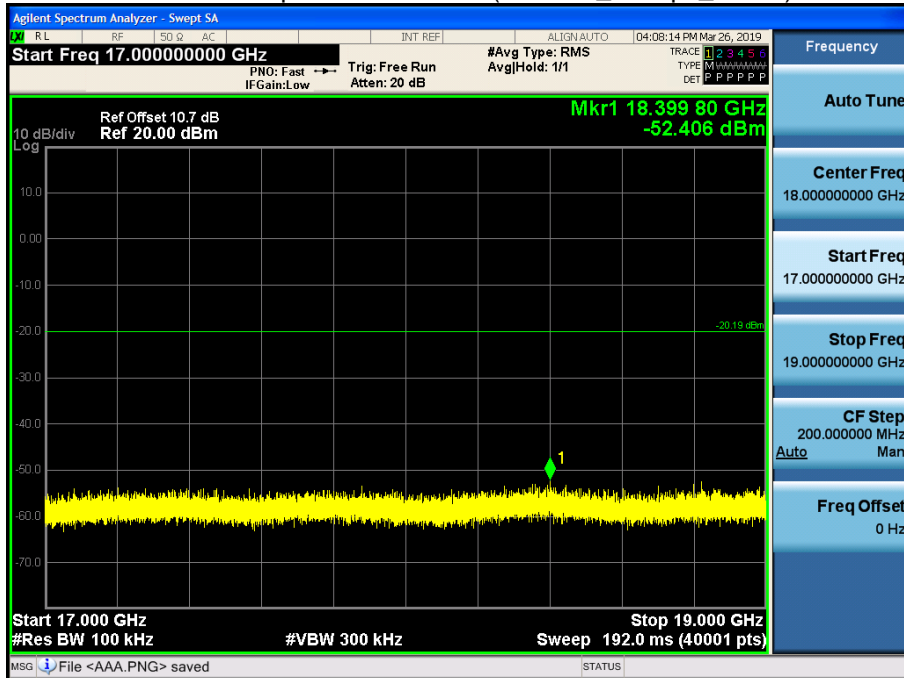


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

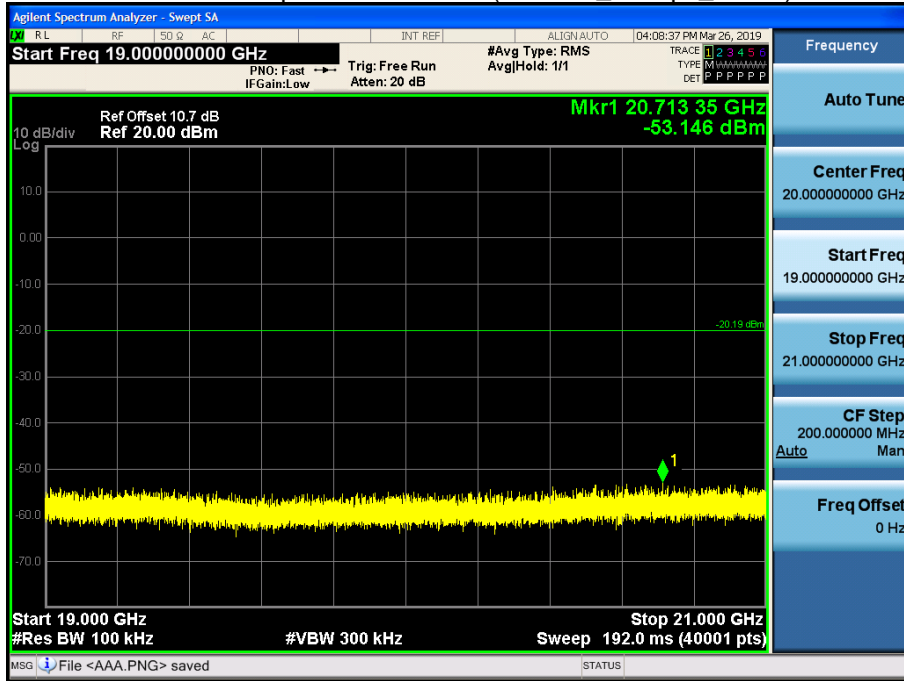


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

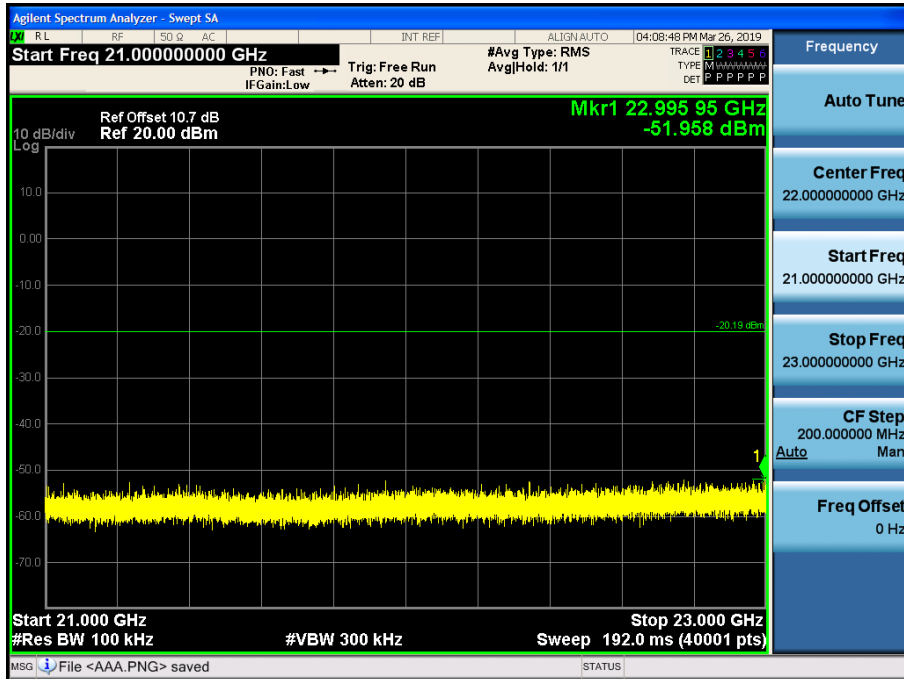

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b\_1 Mbps\_Ch.11)

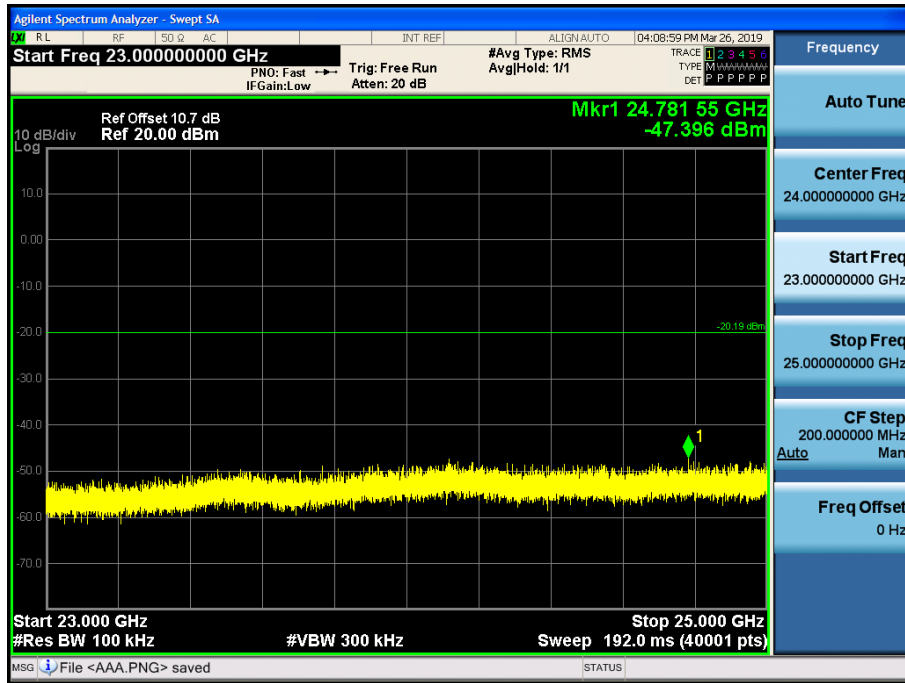

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \cdot \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.  
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2412  
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.57	0.81	V	52.38	73.98	21.61	PK
4824	43.43	0.81	V	44.24	53.98	9.75	AV
7236	49.04	9.47	V	58.51	73.98	15.47	PK
7236	38.99	9.47	V	48.46	53.98	5.52	AV
4824	52.66	0.81	H	53.47	73.98	20.52	PK
4824	44.60	0.81	H	45.41	53.98	8.58	AV
7236	49.71	9.47	H	59.18	73.98	14.80	PK
7236	40.05	9.47	H	49.52	53.98	4.46	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412  
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	48.76	0.00	0.81	V	49.57	73.98	24.42	PK
4824	37.52	0.22	0.81	V	38.55	53.98	15.43	AV
7236	45.88	0.00	9.47	V	55.35	73.98	18.63	PK
7236	33.76	0.22	9.47	V	43.45	53.98	10.53	AV
4824	49.22	0.00	0.81	H	50.03	73.98	23.96	PK
4824	37.73	0.22	0.81	H	38.76	53.98	15.22	AV
7236	46.16	0.00	9.47	H	55.63	73.98	18.35	PK
7236	33.90	0.22	9.47	H	43.59	53.98	10.39	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	48.66	0.00	0.81	V	49.47	73.98	24.52	PK
4824	37.58	0.25	0.81	V	38.63	53.98	15.35	AV
7236	45.44	0.00	9.47	V	54.91	73.98	19.07	PK
7236	33.61	0.25	9.47	V	43.33	53.98	10.65	AV
4824	49.57	0.00	0.81	H	50.38	73.98	23.61	PK
4824	37.67	0.25	0.81	H	38.72	53.98	15.26	AV
7236	45.91	0.00	9.47	H	55.38	73.98	18.60	PK
7236	33.69	0.25	9.47	H	43.41	53.98	10.57	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.85	1.02	V	50.87	73.98	23.12	PK
4874	41.84	1.02	V	42.86	53.98	11.13	AV
7311	49.88	9.16	V	59.04	73.98	14.94	PK
7311	40.12	9.16	V	49.28	53.98	4.70	AV
4874	50.05	1.02	H	51.07	73.98	22.92	PK
4874	42.22	1.02	H	43.24	53.98	10.75	AV
7311	50.08	9.16	H	59.24	73.98	14.74	PK
7311	41.71	9.16	H	50.87	53.98	3.11	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.35	0.00	1.02	V	50.37	73.98	23.62	PK
4874	37.01	0.22	1.02	V	38.25	53.98	15.73	AV
7311	47.01	0.00	9.16	V	56.17	73.98	17.81	PK
7311	34.88	0.22	9.16	V	44.26	53.98	9.72	AV
4874	49.62	0.00	1.02	H	50.64	73.98	23.35	PK
4874	37.14	0.22	1.02	H	38.38	53.98	15.60	AV
7311	47.60	0.00	9.16	H	56.76	73.98	17.22	PK
7311	35.02	0.22	9.16	H	44.40	53.98	9.58	AV



Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.57	0.00	1.02	V	49.59	73.98	24.40	PK
4874	36.99	0.25	1.02	V	38.25	53.98	15.73	AV
7311	46.38	0.00	9.16	V	55.54	73.98	18.44	PK
7311	34.29	0.25	9.16	V	43.70	53.98	10.28	AV
4874	48.87	0.00	1.02	H	49.89	73.98	24.10	PK
4874	37.12	0.25	1.02	H	38.38	53.98	15.60	AV
7311	47.06	0.00	9.16	H	56.22	73.98	17.76	PK
7311	34.51	0.25	9.16	H	43.92	53.98	10.06	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2462  
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.94	0.96	V	49.90	73.98	24.09	PK
4924	41.56	0.96	V	42.52	53.98	11.47	AV
7386	49.05	9.18	V	58.23	73.98	15.75	PK
7386	39.74	9.18	V	48.92	53.98	5.06	AV
4924	50.26	0.96	H	51.22	73.98	22.77	PK
4924	41.85	0.96	H	42.81	53.98	11.18	AV
7386	49.57	9.18	H	58.75	73.98	15.23	PK
7386	40.25	9.18	H	49.43	53.98	4.55	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2462  
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.80	0.00	0.96	V	49.76	73.98	24.23	PK
4924	37.75	0.22	0.96	V	38.93	53.98	15.05	AV
7386	45.87	0.00	9.18	V	55.05	73.98	18.93	PK
7386	33.81	0.22	9.18	V	43.21	53.98	10.77	AV
4924	49.17	0.00	0.96	H	50.13	73.98	23.86	PK
4924	37.94	0.22	0.96	H	39.12	53.98	14.86	AV
7386	46.06	0.00	9.18	H	55.24	73.98	18.74	PK
7386	33.95	0.22	9.18	H	43.35	53.98	10.63	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	6.5 Mbps
Operating Frequency	2462
Channel No.	11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.54	0.00	0.96	V	49.50	73.98	24.49	PK
4924	37.70	0.25	0.96	V	38.90	53.98	15.08	AV
7386	45.75	0.00	9.18	V	54.93	73.98	19.05	PK
7386	33.88	0.25	9.18	V	43.31	53.98	10.67	AV
4924	49.83	0.00	0.96	H	50.79	73.98	23.20	PK
4924	37.77	0.25	0.96	H	38.97	53.98	15.01	AV
7386	46.07	0.00	9.18	H	55.25	73.98	18.73	PK
7386	33.97	0.25	9.18	H	43.40	53.98	10.58	AV

[NOTE]


Channel 12 and 13 are less powerful than channel 11, so the test for high channel was performed at channel 11.

■ Test Plots

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 3rd Harmonic)

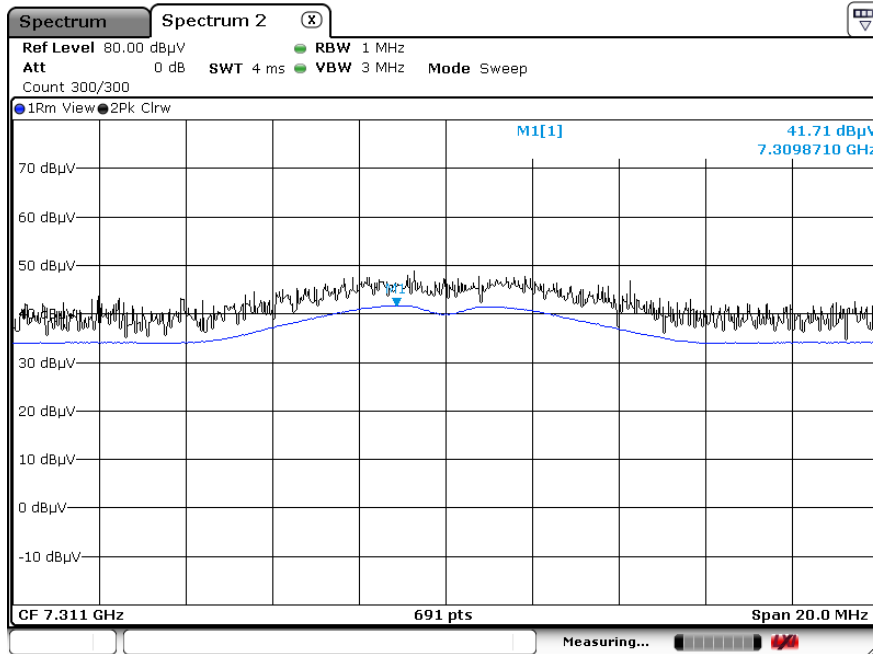

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 3rd Harmonic)

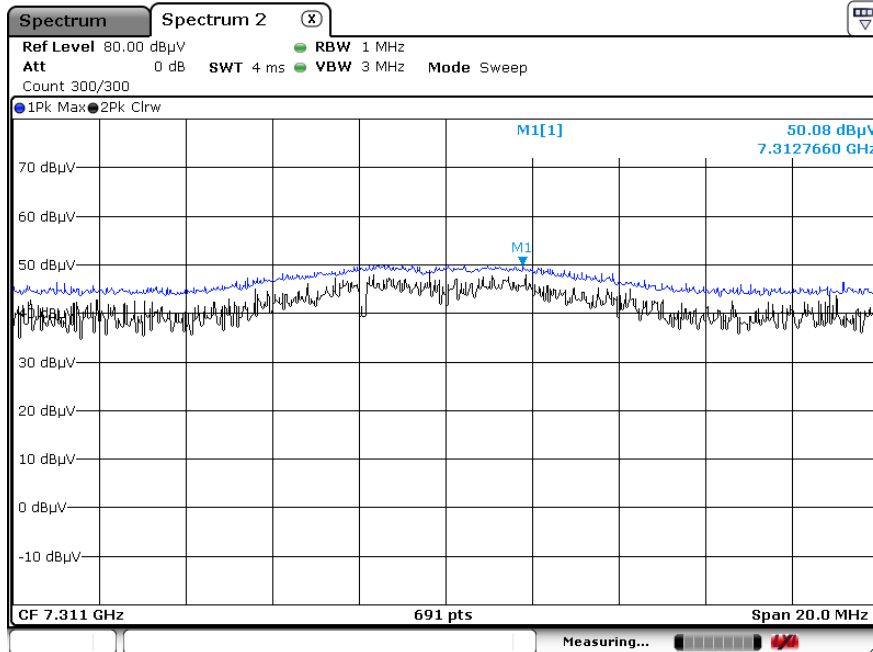

**Note:**

Plot of worst case are only reported.

### 9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	57.25	1.06	H	58.31	73.98	15.67	PK
2390.0	45.20	1.06	H	46.26	53.98	7.72	AV
2390.0	56.91	1.06	V	57.97	73.98	16.01	PK
2390.0	44.86	1.06	V	45.92	53.98	8.06	AV
2483.5	57.81	1.12	H	58.93	73.98	15.06	PK
2483.5	49.49	1.12	H	50.61	53.98	3.37	AV
2483.5	57.11	1.12	V	58.23	73.98	15.76	PK
2483.5	49.12	1.12	V	50.24	53.98	3.75	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2467 MHz, 2472 MHz  
 Channel No.: 12 Ch, 13 Ch

Channel	Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2390.0	59.27	1.06	H	60.33	73.98	13.65	PK
	2390.0	47.22	1.06	H	48.28	53.98	5.70	AV
	2390.0	57.96	1.06	V	59.02	73.98	14.96	PK
	2390.0	47.05	1.06	V	48.11	53.98	5.87	AV
13	2483.5	60.24	1.12	H	61.36	73.98	12.63	PK
	2483.5	50.26	1.12	H	51.38	53.98	2.61	AV
	2483.5	59.87	1.12	V	60.99	73.98	13.00	PK
	2483.5	50.02	1.12	V	51.14	53.98	2.84	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2389~2390	62.27	0.00	1.06	H	63.33	73.98	10.65	PK
*2389~2390	50.08	0.22	1.06	H	51.36	53.98	2.62	AV
2310~2389	66.19	0.00	1.06	H	67.25	73.98	6.73	PK
2310~2389	49.31	0.22	1.06	H	50.59	53.98	3.39	AV
*2389~2390	61.55	0.00	1.06	V	62.61	73.98	11.37	PK
*2389~2390	49.76	0.22	1.06	V	51.04	53.98	2.94	AV
2310~2389	65.33	0.00	1.06	V	66.39	73.98	7.59	PK
2310~2389	48.56	0.22	1.06	V	49.84	53.98	4.14	AV
2483.5	69.54	0.00	1.12	H	70.66	73.98	3.33	PK
2483.5	50.32	0.22	1.12	H	51.66	53.98	2.32	AV
2483.5	69.12	0.00	1.12	V	70.24	73.98	3.75	PK
2483.5	49.94	0.22	1.12	V	51.28	53.98	2.70	AV

**Note:**

\* : Procedure 11.13.3 (Integration method) in ANSI 63.10-2013

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2457 MHz  
 Channel No. 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	67.14	0.00	1.12	H	68.26	73.98	5.73	PK
2483.5	47.10	0.22	1.12	H	48.44	53.98	5.54	AV
2483.5	66.89	0.00	1.12	V	68.01	73.98	5.98	PK
2483.5	46.88	0.22	1.12	V	48.22	53.98	5.76	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Channel	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	60.89	0.00	1.12	H	62.01	73.98	11.98	PK
	2483.5	47.20	0.22	1.12	H	48.54	53.98	5.44	AV
	2483.5	59.92	0.00	1.12	H	61.04	73.98	12.95	PK
	2483.5	46.99	0.22	1.12	H	48.33	53.98	5.65	AV
13	*2483.5~2484.5	62.75	0.00	1.12	V	63.87	73.98	10.12	PK
	*2483.5~2484.5	49.68	0.22	1.12	V	51.02	53.98	2.96	AV
	2484.5 ~ 2500	68.38	0.00	1.12	V	69.50	73.98	4.49	PK
	2484.5 ~ 2500	49.22	0.22	1.12	V	50.56	53.98	3.42	AV
	*2483.5~2484.5	68.38	0.00	1.12	H	69.50	73.98	4.49	PK
	*2483.5~2484.5	49.91	0.22	1.12	H	51.25	53.98	2.73	AV
	2484.5 ~ 2500	69.27	0.00	1.12	H	70.39	73.98	3.60	PK
	2484.5 ~ 2500	49.47	0.22	1.12	H	50.81	53.98	3.17	AV

**Note:**

\* : Procedure 11.13.3 (Integration method) in ANSI 63.10-2013

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	57.10	0.00	1.06	H	58.16	73.98	15.82	PK
2390.0	49.30	0.25	1.06	H	50.61	53.98	3.37	AV
2390.0	56.35	0.00	1.06	V	57.41	73.98	16.57	PK
2390.0	49.03	0.25	1.06	V	50.34	53.98	3.64	AV
*2483.5~2484.5	62.93	0.00	1.12	H	64.05	73.98	9.94	PK
*2483.5~2484.5	49.97	0.25	1.12	H	51.33	53.98	2.65	AV
*2484.5~2485.5	60.36	0.00	1.12	H	61.48	73.98	12.51	PK
*2484.5~2485.5	48.01	0.25	1.12	H	49.37	53.98	4.61	AV
2485.5~2500	67.58	0.00	1.12	H	68.70	73.98	5.29	PK
2485.5~2500	47.31	0.25	1.12	H	48.67	53.98	5.31	AV
*2483.5~2484.5	61.88	0.00	1.12	V	63.00	73.98	10.99	PK
*2483.5~2484.5	49.65	0.25	1.12	V	51.01	53.98	2.97	AV
*2484.5~2485.5	59.63	0.00	1.12	V	60.75	73.98	13.24	PK
*2484.5~2485.5	47.87	0.25	1.12	V	49.23	53.98	4.75	AV
2485.5~2500	66.89	0.00	1.12	V	68.01	73.98	5.98	PK
2485.5~2500	47.21	0.25	1.12	V	48.57	53.98	5.41	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2457 MHz  
 Channel No.: 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	65.82	0.00	0.78	H	66.60	73.98	7.38	PK
2483.5	46.38	0.25	0.78	H	47.41	53.98	6.57	AV
2483.5	64.92	0.00	0.78	V	65.70	73.98	8.28	PK
2483.5	45.95	0.25	0.78	V	46.98	53.98	7.00	AV



Operation Mode: 802.11n(HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2467 MHz, 2472 MHz  
 Channel No.: 12 Ch, 13 Ch


Channel	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	58.99	0.00	1.12	H	60.11	73.98	13.88	PK
	2483.5	46.50	0.25	1.12	H	47.86	53.98	6.12	AV
	2483.5	58.35	0.00	1.12	V	59.47	73.98	14.52	PK
	2483.5	46.28	0.25	1.12	V	47.64	53.98	6.34	AV
13	*2483.5~2484.5	65.79	0.00	1.12	H	66.91	73.98	7.08	PK
	*2483.5~2484.5	50.03	0.25	1.12	H	51.39	53.98	2.59	AV
	2484.5 ~ 2500	69.73	0.00	1.12	H	70.85	73.98	3.14	PK
	2484.5 ~ 2500	49.14	0.25	1.12	H	50.50	53.98	3.48	AV
	*2483.5~2484.5	65.09	0.00	1.12	H	66.21	73.98	7.78	PK
	*2483.5~2484.5	49.76	0.25	1.12	H	51.12	53.98	2.86	AV
	2484.5 ~ 2500	68.73	0.00	1.12	V	69.85	73.98	4.14	PK
	2484.5 ~ 2500	48.92	0.25	1.12	V	50.28	53.98	3.70	AV

**Note:**


\* : Procedure 11.13.3 (Integration method) in ANSI 63.10-2013

■ Test Plots


Radiated Restricted Band Edges plot – Average Reading (802.11b, Ch.11)

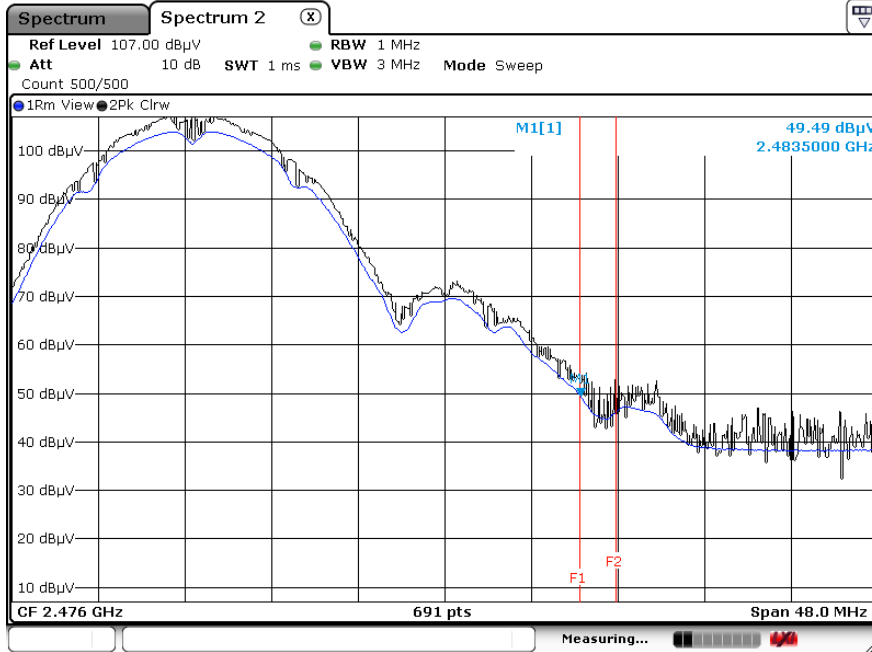


Radiated Restricted Band Edges plot – Peak Reading (802.11b, Ch.11)

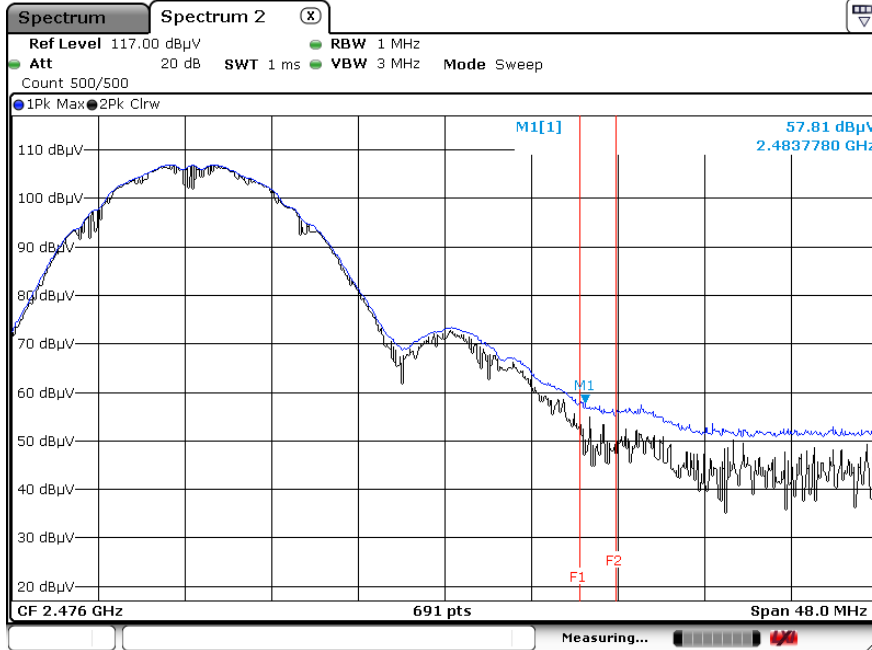


Radiated Restricted Band Edges plot – Average Reading (802.11b, Ch.13)

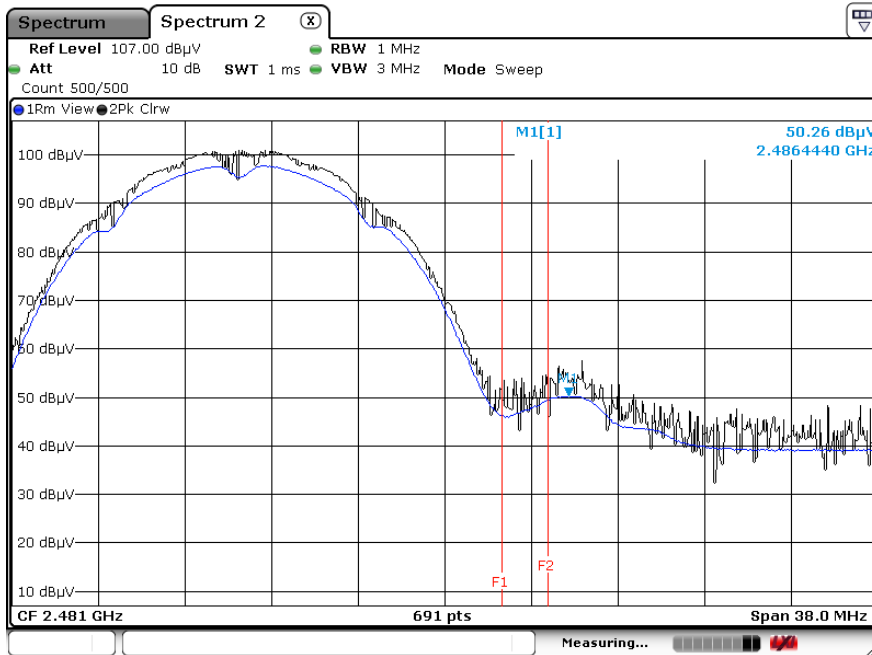


Radiated Restricted Band Edges plot – Peak Reading (802.11b, Ch.13)

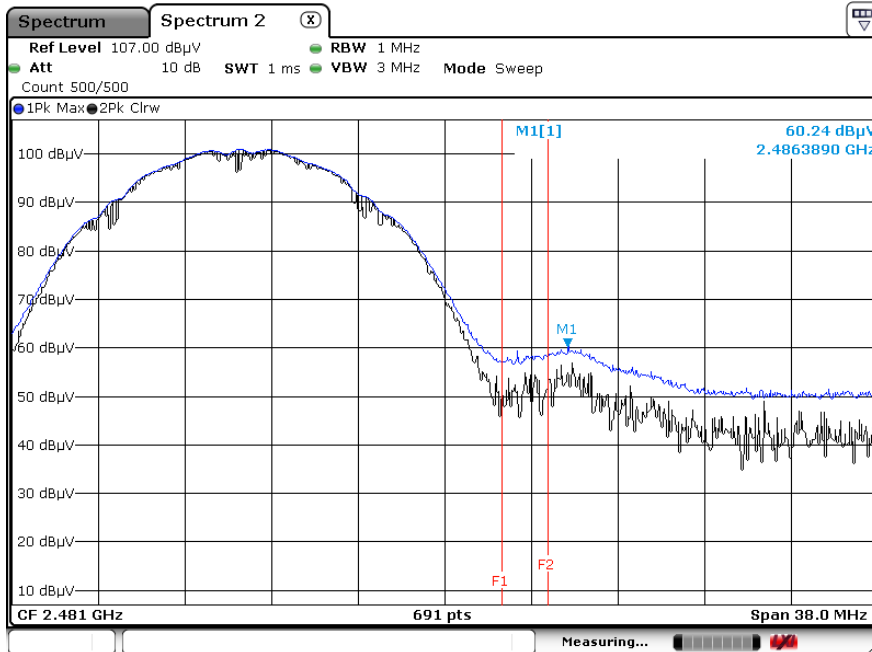


Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

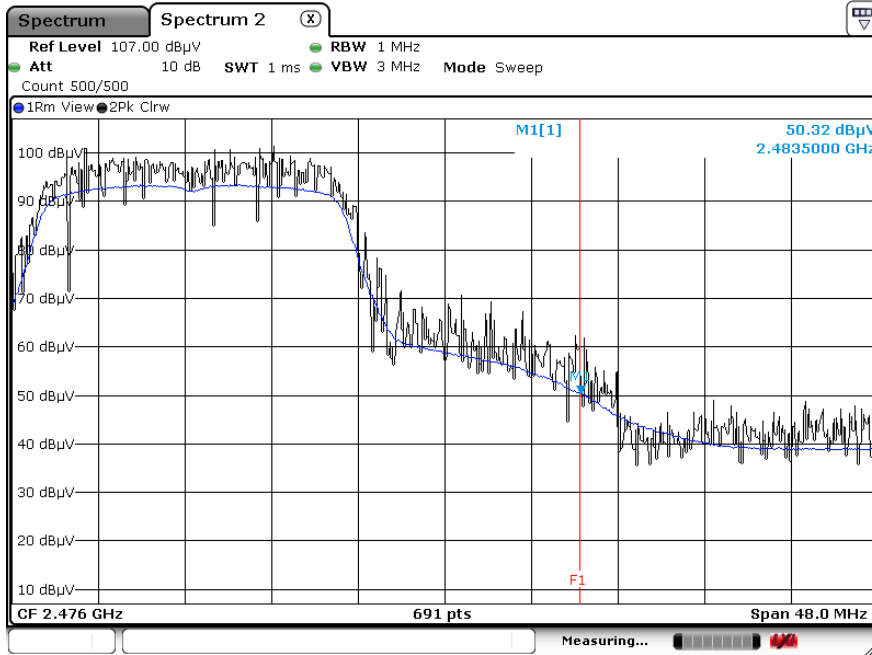


Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

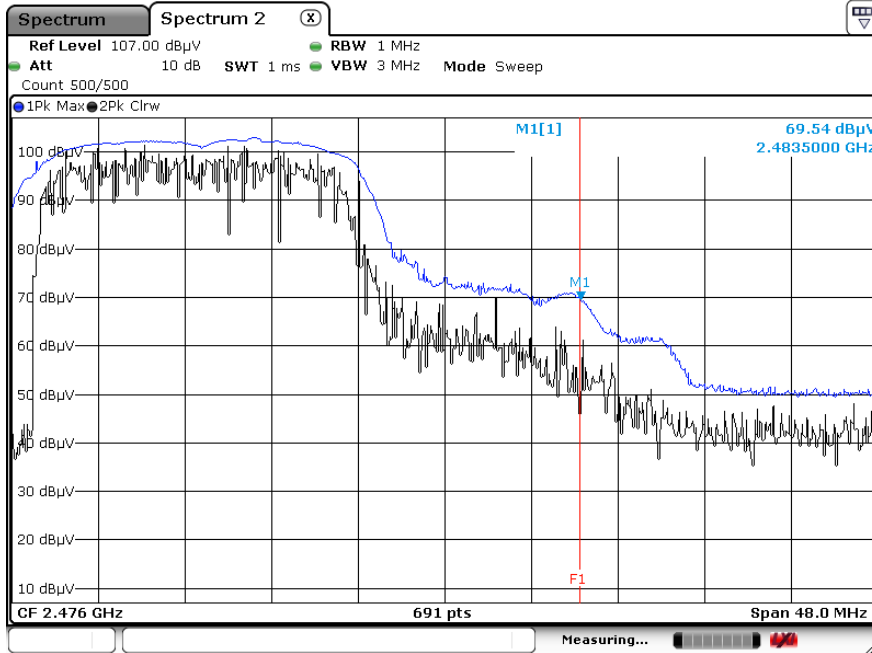


Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.1) 2 389 MHz ~ 2 390 MHz

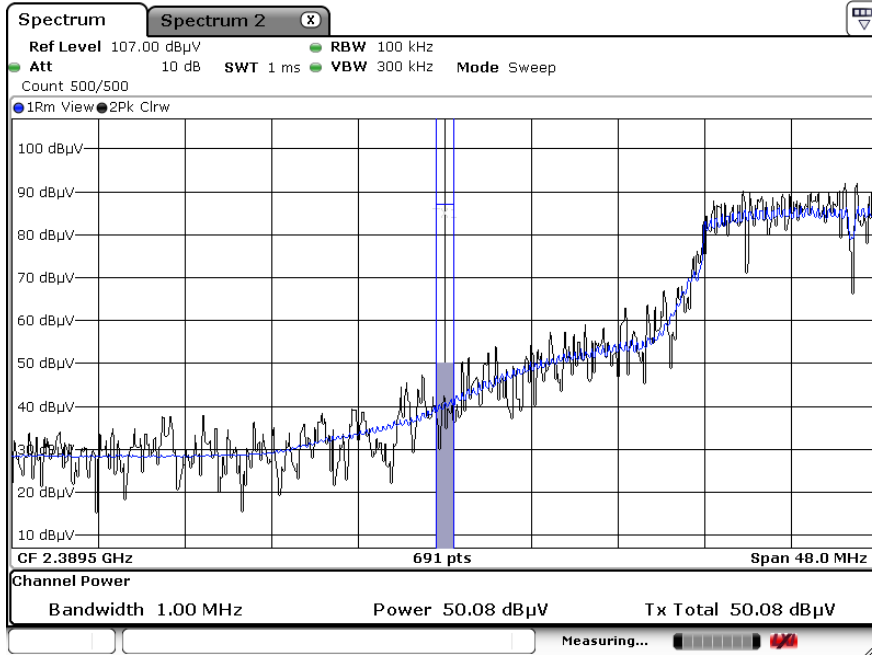


Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.1) 2 389 MHz ~ 2 390 MHz

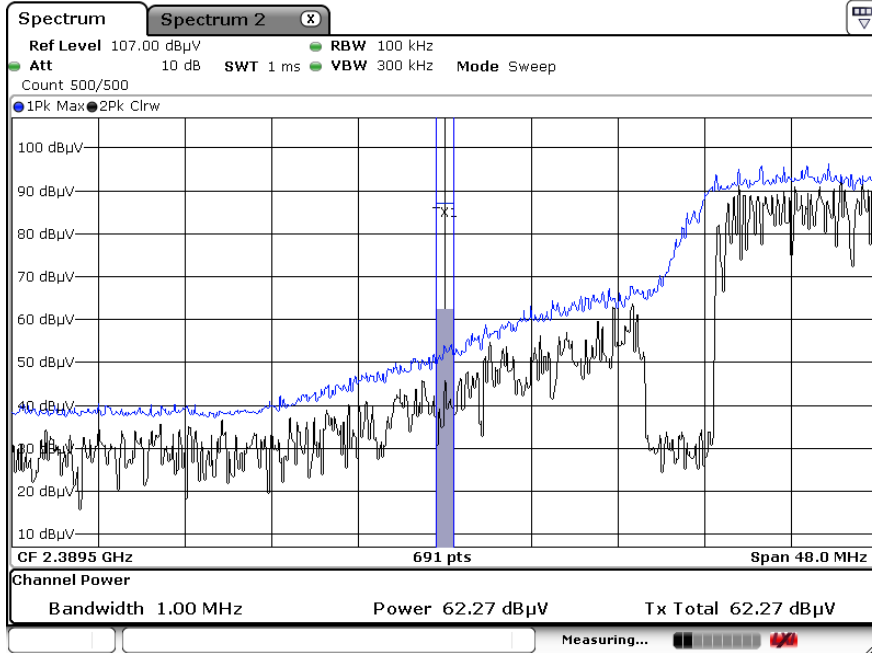


Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.1) 2 310 MHz ~ 2 389 MHz

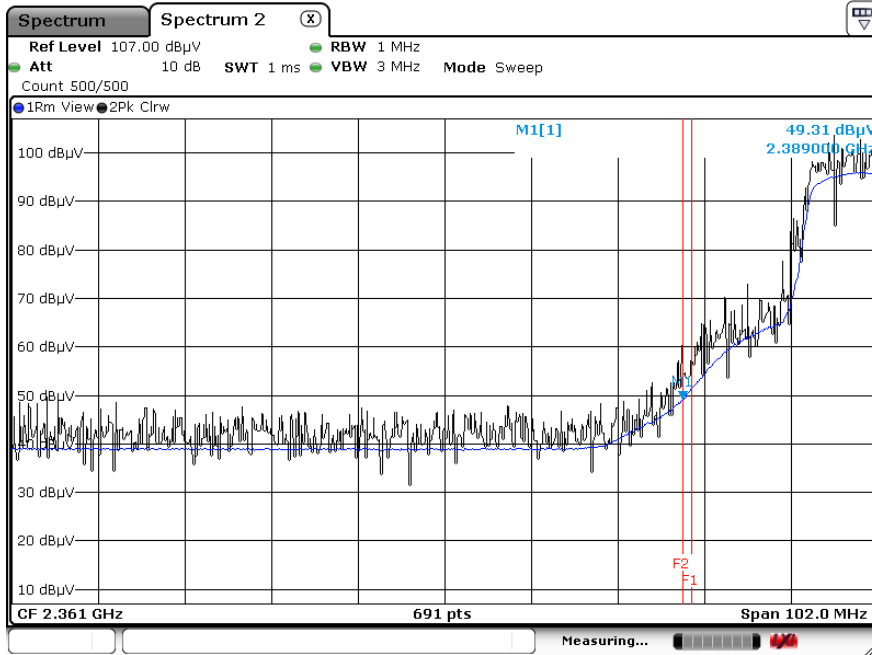


Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.1) 2 310 MHz ~ 2 389 MHz

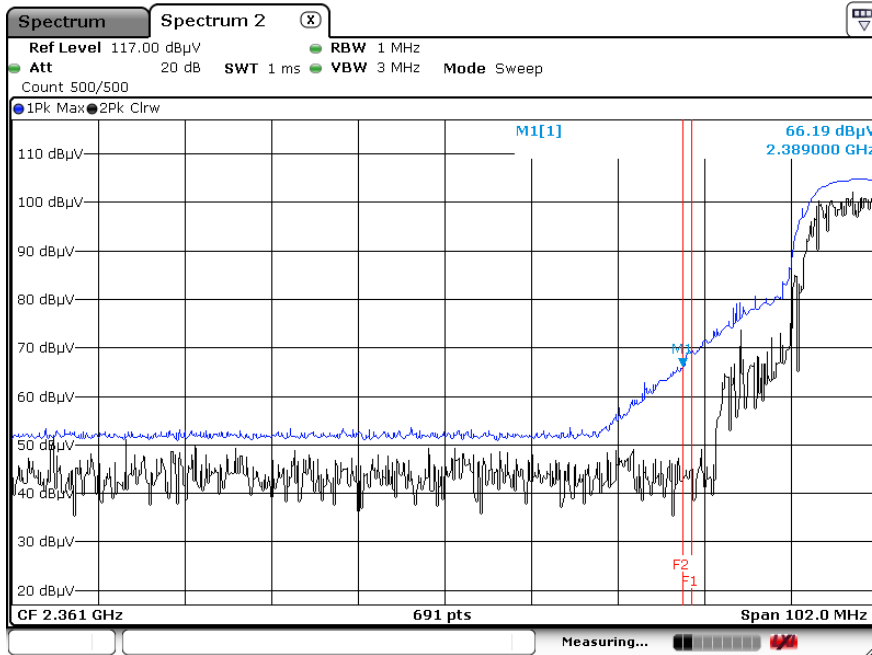


Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.13) 2 483.5 MHz ~ 2 484.5 MHz

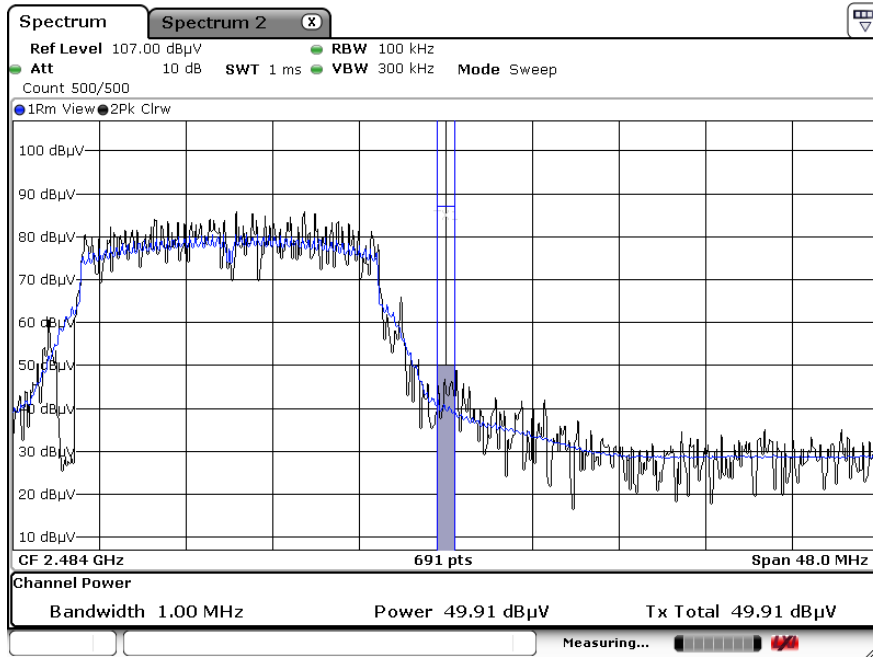


Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.13) 2 483.5 MHz ~ 2 484.5 MHz

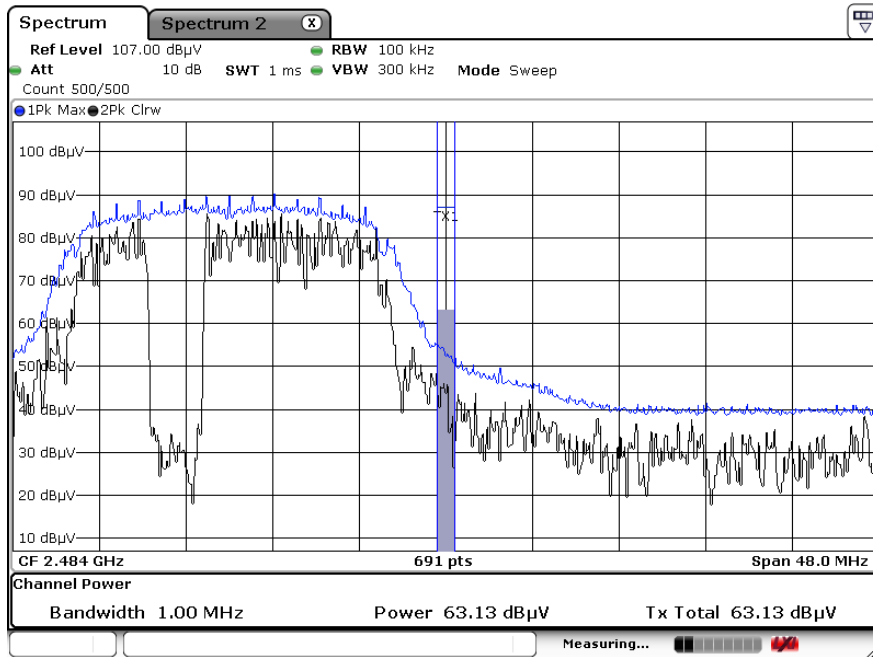

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.13) 2 484.5 MHz ~ 2.5 GHz

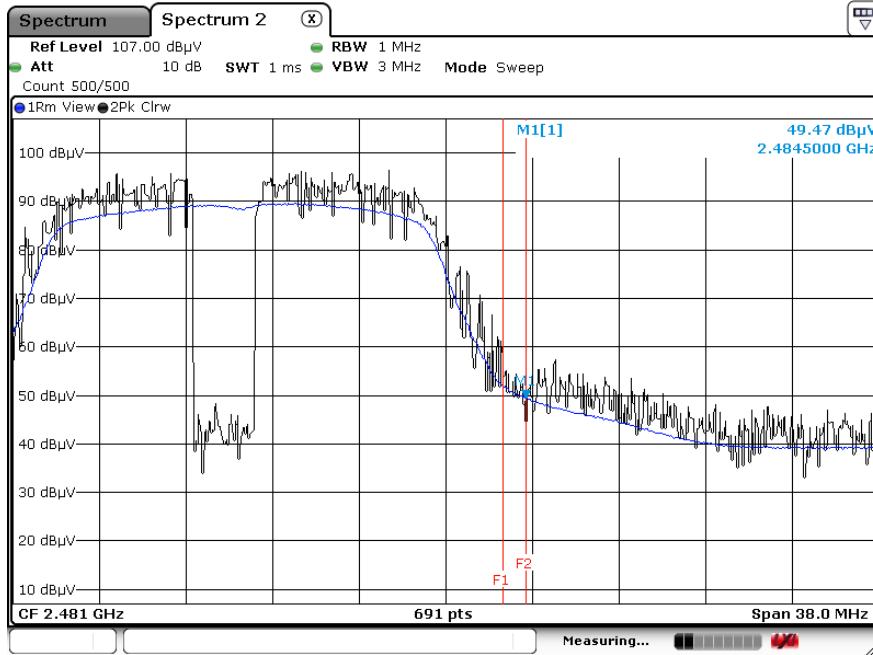


Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.13) 2 484.5 MHz ~ 2.5 GHz

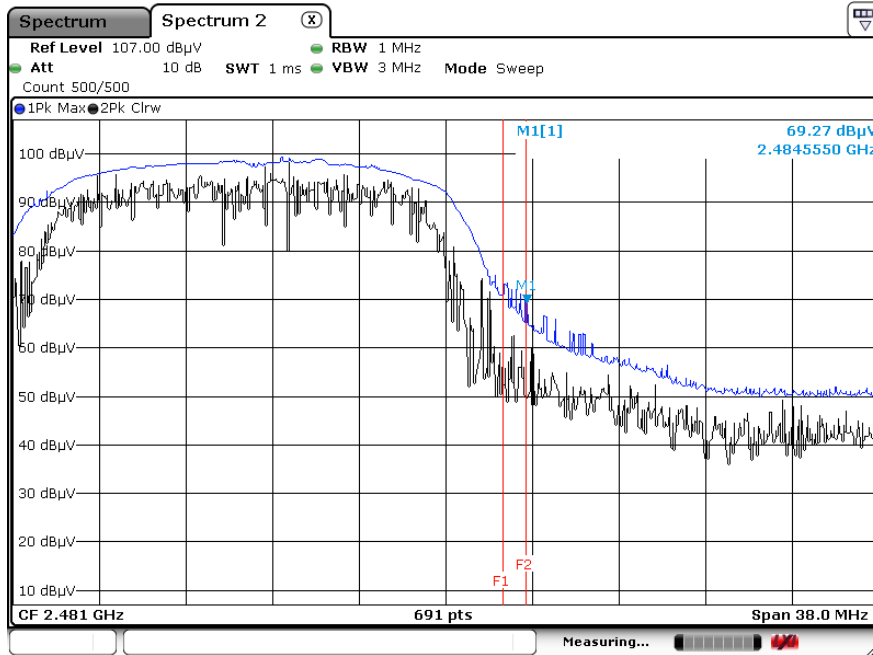





Radiated Restricted Band Edges plot – Average Reading (802.11n\_HT20, Ch.1)

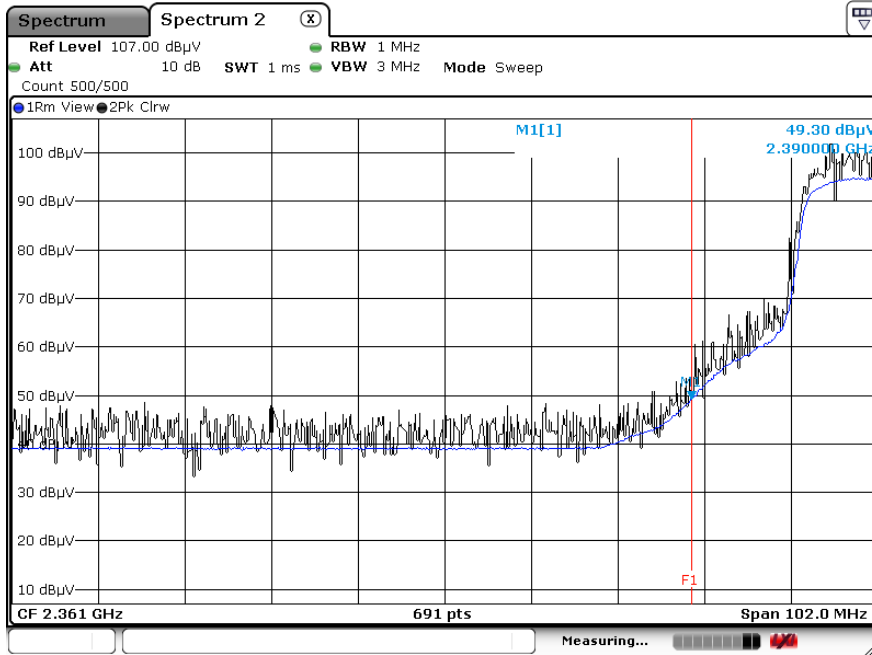


Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.1)

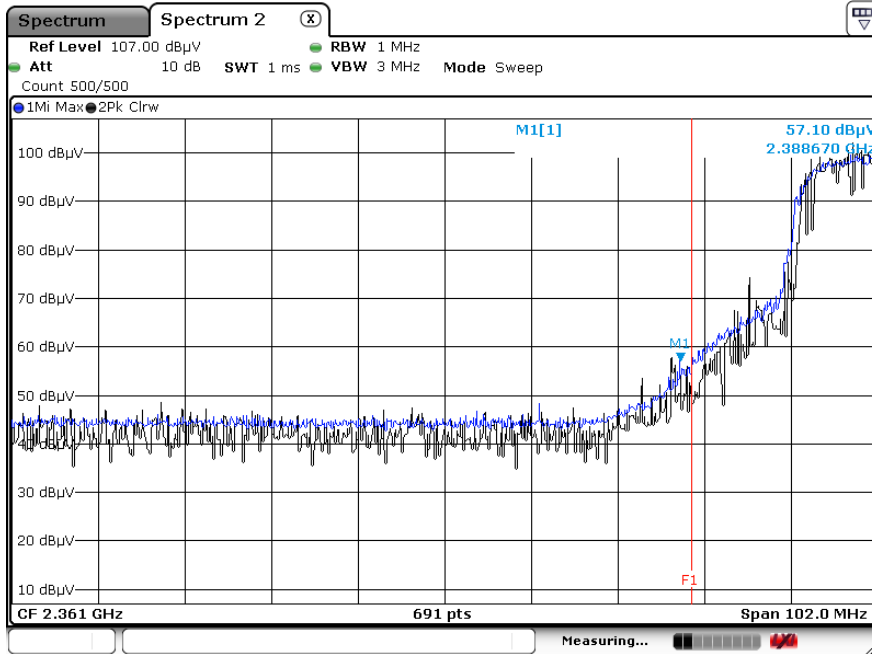


Radiated Restricted Band Edges plot – Average Reading (802.11n\_HT20, Ch.11) 2 483.5 MHz ~ 2 484.5 MHz

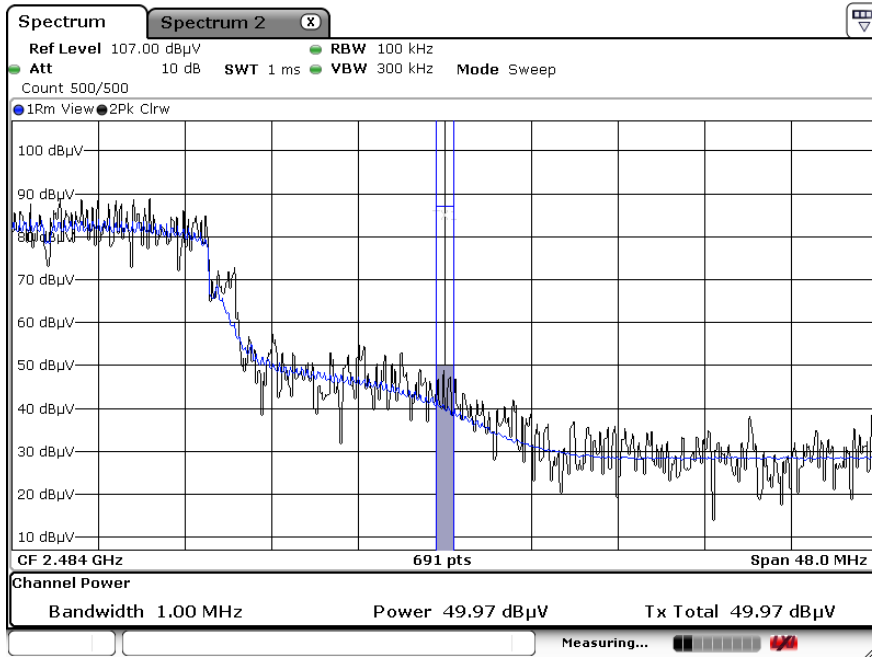


Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.11) 2 483.5 MHz ~ 2 484.5 MHz

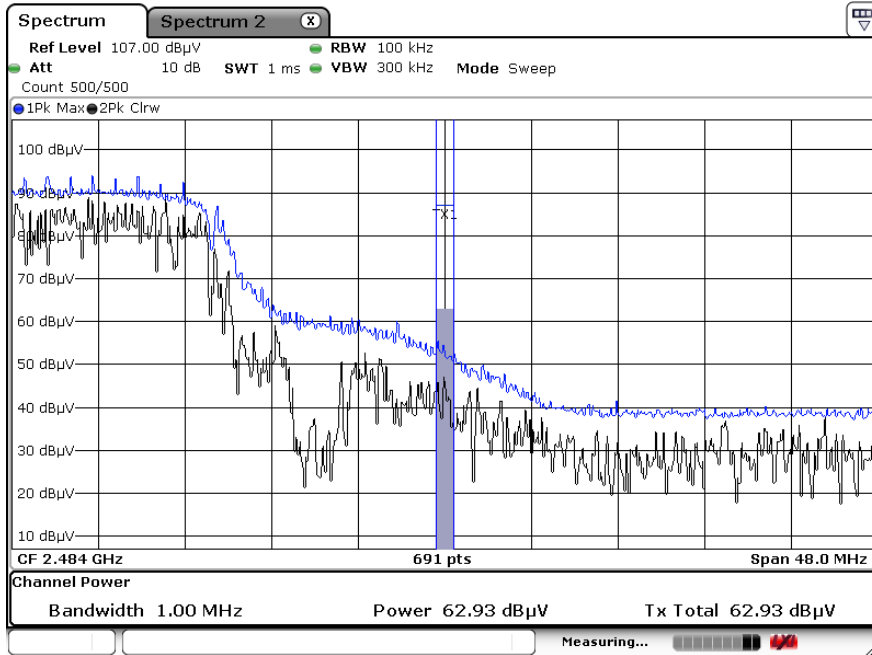


Radiated Restricted Band Edges plot – Average Reading (802.11n\_HT20, Ch.11) 2 484.5 MHz ~ 2 485.5 MHz

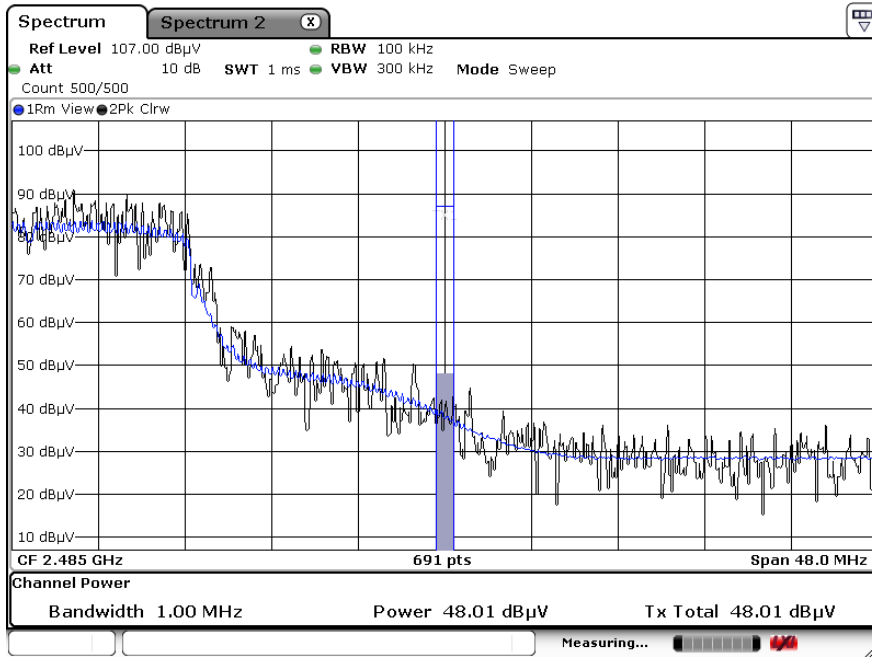


Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.11) 2 484.5 MHz ~ 2 485.5 MHz

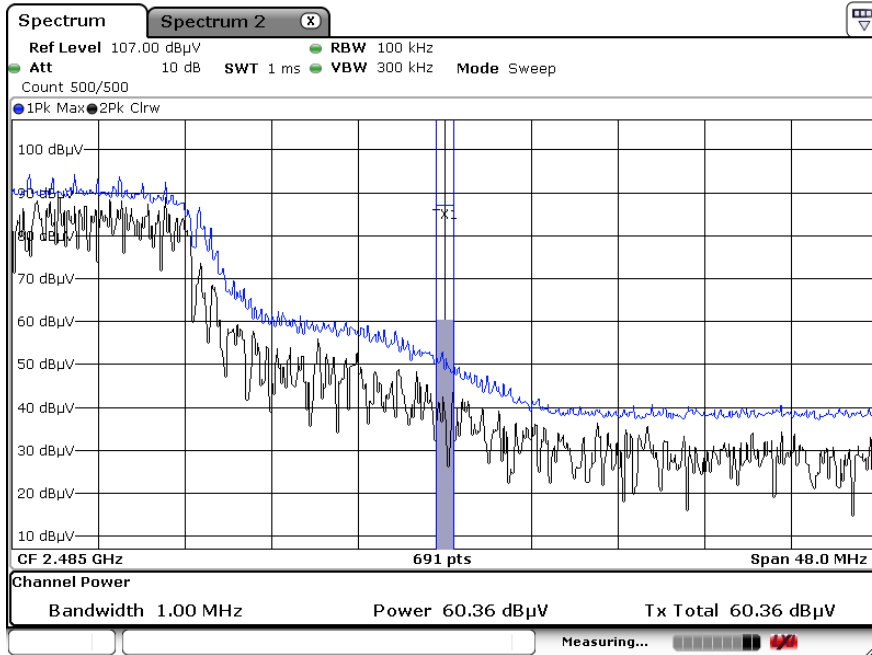


Radiated Restricted Band Edges plot – Average Reading (802.11n\_HT20, Ch.11) 2485.5 MHz ~ 2.5 GHz

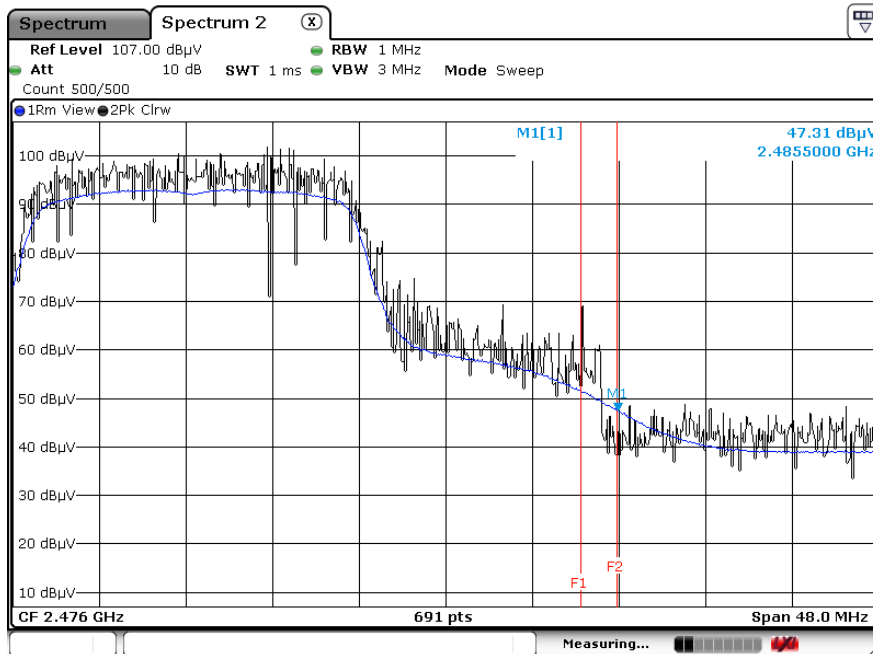


Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.11) 2485.5 MHz ~ 2.5 GHz

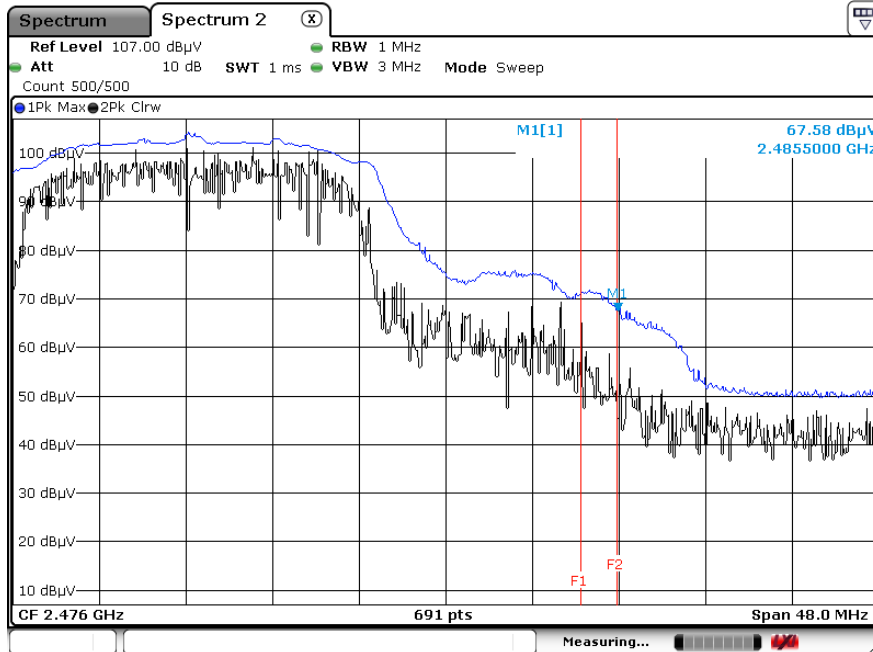


Radiated Restricted Band Edges plot – Average Reading (802.11n\_HT20, Ch.13) 2 483.5 MHz ~ 2 484.5 MHz

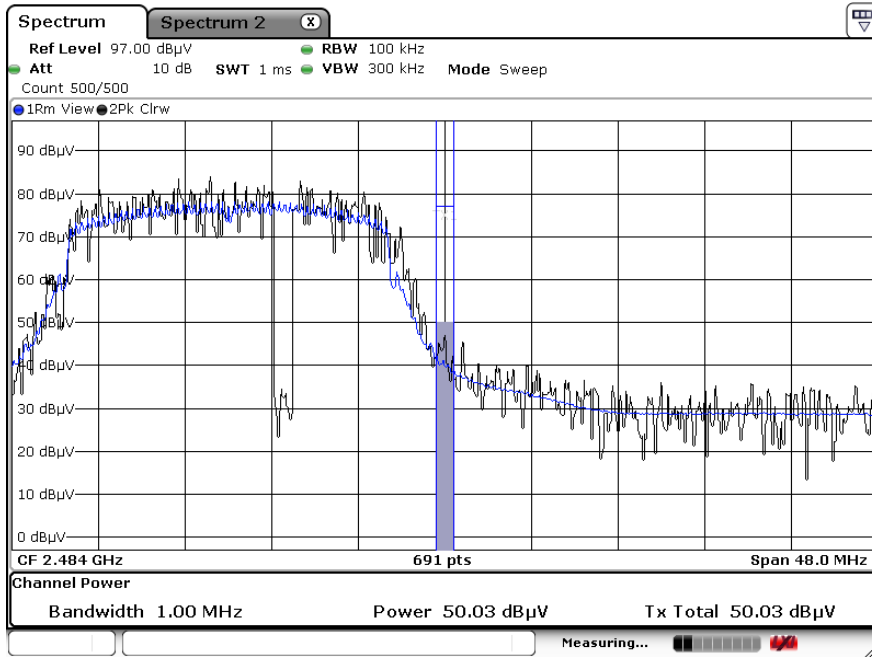


Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.13) 2 483.5 MHz ~ 2 484.5 MHz

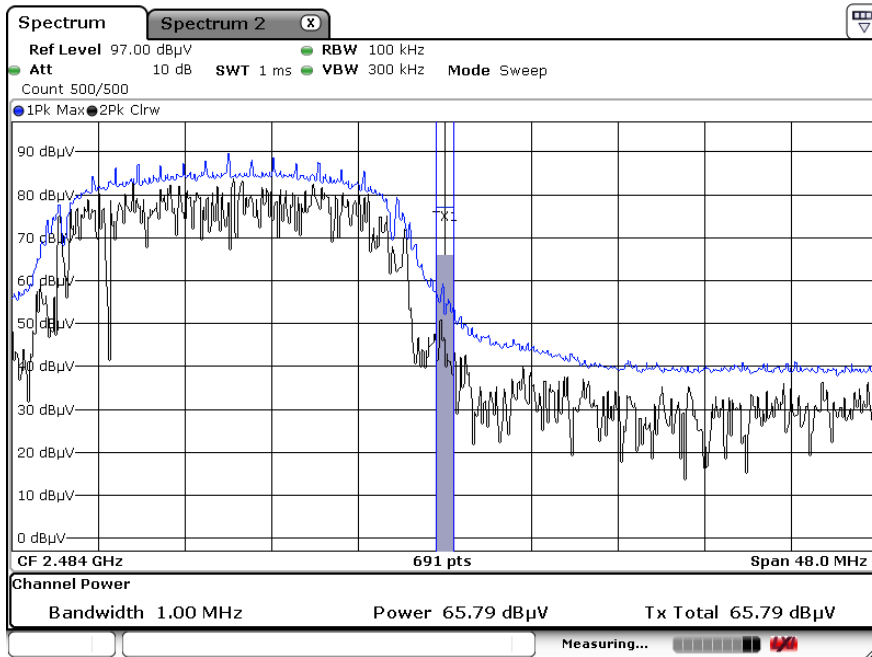

Radiated Restricted Band Edges plot – Average Reading (802.11n\_HT20, Ch.13) 2 484.5 MHz ~ 2.5 GHz

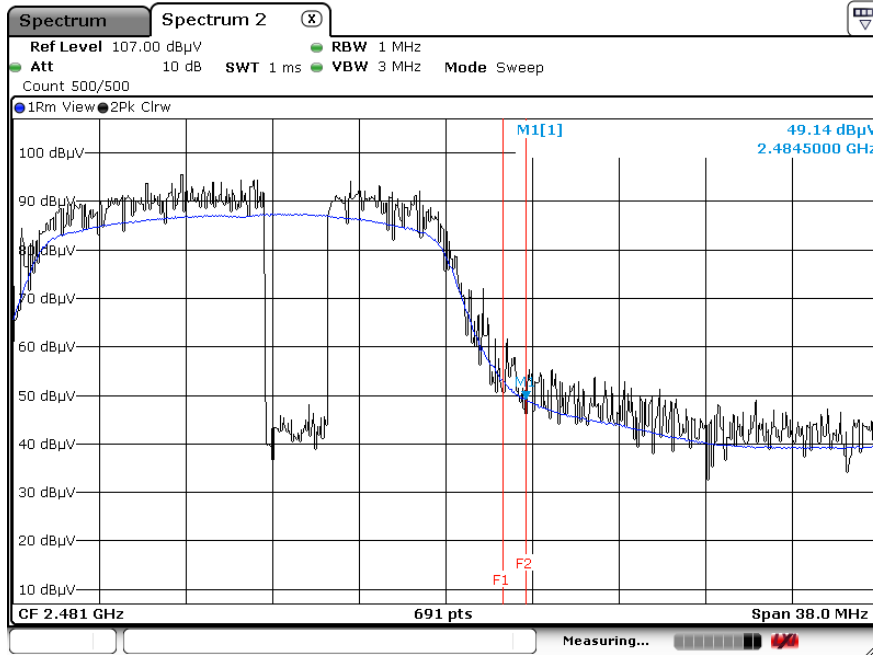

Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.13) 2 484.5 MHz ~ 2.5 GHz

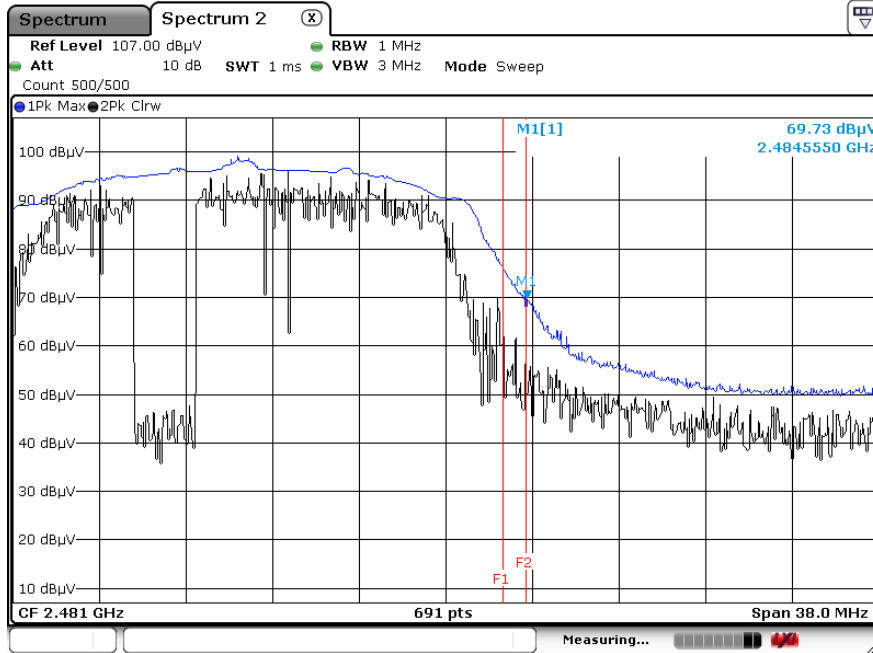

**Note:**

Plot of worst case are only reported

## 9.8 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: SM-A202F/DS  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 2.4G MODE

FCC CLASS B\_Exten Cable

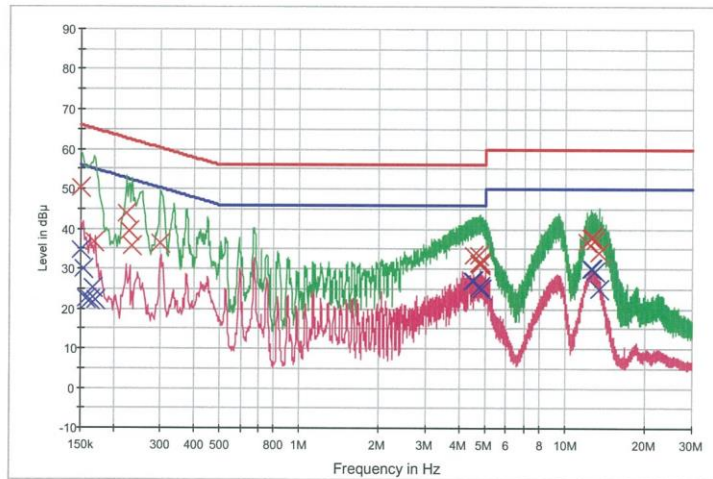

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
— Preview Result 2-AVG      x Final Result 1-QPK      x Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	50.2	9.000	Off	L1	9.7	15.8	66.0
0.168000	36.9	9.000	Off	L1	9.7	28.2	65.1
0.224000	44.0	9.000	Off	L1	9.7	18.7	62.7
0.228000	39.6	9.000	Off	L1	9.7	22.9	62.5
0.234000	35.8	9.000	Off	L1	9.7	26.5	62.3
0.300000	36.5	9.000	Off	L1	9.7	23.7	60.2
4.522000	33.2	9.000	Off	L1	10.0	22.8	56.0
4.740000	33.2	9.000	Off	L1	10.0	22.8	56.0
4.752000	31.4	9.000	Off	L1	10.0	24.6	56.0
4.772000	31.8	9.000	Off	L1	10.0	24.2	56.0
4.776000	31.1	9.000	Off	L1	10.0	24.9	56.0
4.788000	31.4	9.000	Off	L1	10.0	24.6	56.0
12.102000	36.9	9.000	Off	L1	10.3	23.1	60.0
12.438000	37.9	9.000	Off	L1	10.3	22.1	60.0
12.636000	37.8	9.000	Off	L1	10.3	22.2	60.0
12.684000	38.2	9.000	Off	L1	10.3	21.8	60.0
12.900000	37.1	9.000	Off	L1	10.3	22.9	60.0
13.412000	34.2	9.000	Off	L1	10.4	25.8	60.0

2019-03-07

오전 9:46:46

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	34.6	9.000	Off	L1	9.7	21.4	56.0
0.154000	30.0	9.000	Off	L1	9.7	25.8	55.8
0.158000	22.4	9.000	Off	L1	9.7	33.1	55.6
0.162000	22.1	9.000	Off	L1	9.7	33.2	55.4
0.166000	25.4	9.000	Off	L1	9.7	29.8	55.2
0.170000	22.2	9.000	Off	L1	9.7	32.7	55.0
4.444000	27.1	9.000	Off	L1	10.0	18.9	46.0
4.522000	27.0	9.000	Off	L1	10.0	19.0	46.0
4.530000	27.0	9.000	Off	L1	10.0	19.0	46.0
4.740000	25.4	9.000	Off	L1	10.0	20.6	46.0
4.778000	25.4	9.000	Off	L1	10.0	20.6	46.0
4.840000	25.1	9.000	Off	L1	10.0	20.9	46.0
12.438000	29.9	9.000	Off	L1	10.3	20.1	50.0
12.636000	30.1	9.000	Off	L1	10.3	19.9	50.0
12.646000	30.1	9.000	Off	L1	10.3	19.9	50.0
12.888000	29.4	9.000	Off	L1	10.3	20.6	50.0
12.900000	29.4	9.000	Off	L1	10.3	20.6	50.0
13.412000	25.0	9.000	Off	L1	10.4	25.0	50.0

2019-03-07

오전 9:46:46



**Conducted Emissions (Line 2)**

WLAN 2,4G NN


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-A202F/DS  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 2.4G MODE

FCC CLASS B\_Exten Cable

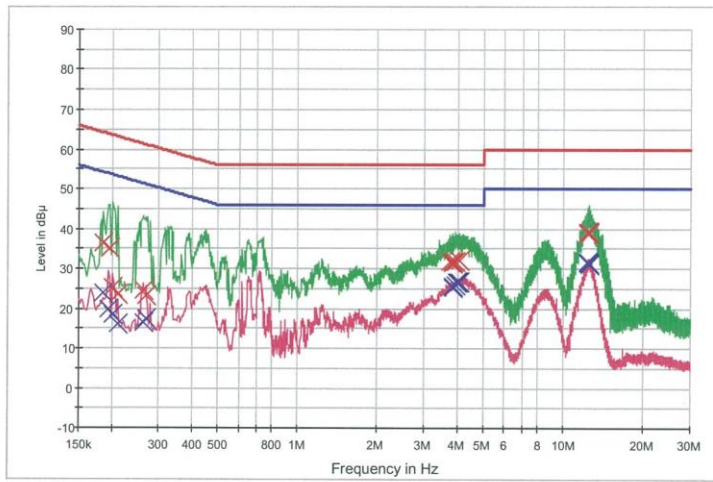

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.186000	36.4	9.000	Off	N	9.8	27.8	64.2
0.196000	34.9	9.000	Off	N	9.8	28.9	63.8
0.202000	25.3	9.000	Off	N	9.9	38.2	63.5
0.210000	23.6	9.000	Off	N	9.9	39.6	63.2
0.262000	24.6	9.000	Off	N	9.9	36.8	61.4
0.268000	23.3	9.000	Off	N	9.9	37.8	61.2
3.756000	31.8	9.000	Off	N	10.2	24.2	56.0
3.808000	31.6	9.000	Off	N	10.2	24.4	56.0
3.822000	31.4	9.000	Off	N	10.2	24.6	56.0
3.844000	31.3	9.000	Off	N	10.2	24.7	56.0
3.918000	31.9	9.000	Off	N	10.2	24.1	56.0
4.062000	32.0	9.000	Off	N	10.2	24.0	56.0
12.294000	39.1	9.000	Off	N	10.6	20.9	60.0
12.398000	39.0	9.000	Off	N	10.6	21.0	60.0
12.436000	38.9	9.000	Off	N	10.6	21.1	60.0
12.472000	38.8	9.000	Off	N	10.6	21.2	60.0
12.526000	38.9	9.000	Off	N	10.6	21.1	60.0
12.536000	39.0	9.000	Off	N	10.6	21.0	60.0

2019-03-07

오전 9:57:38

WLAN 2,4G NN

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.186000	23.9	9.000	Off	N	9.8	30.4	54.2
0.194000	19.9	9.000	Off	N	9.8	34.0	53.9
0.200000	18.5	9.000	Off	N	9.9	35.1	53.6
0.210000	16.0	9.000	Off	N	9.9	37.2	53.2
0.262000	16.4	9.000	Off	N	9.9	35.0	51.4
0.268000	17.3	9.000	Off	N	9.9	33.9	51.2
3.822000	25.7	9.000	Off	N	10.2	20.3	46.0
3.844000	25.3	9.000	Off	N	10.2	20.7	46.0
3.918000	26.0	9.000	Off	N	10.2	20.0	46.0
3.980000	26.6	9.000	Off	N	10.2	19.4	46.0
4.020000	26.5	9.000	Off	N	10.2	19.5	46.0
4.062000	26.6	9.000	Off	N	10.2	19.4	46.0
12.308000	31.6	9.000	Off	N	10.6	18.4	50.0
12.342000	31.5	9.000	Off	N	10.6	18.5	50.0
12.406000	31.4	9.000	Off	N	10.6	18.6	50.0
12.506000	31.3	9.000	Off	N	10.6	18.7	50.0
12.526000	31.1	9.000	Off	N	10.6	18.9	50.0
12.536000	31.0	9.000	Off	N	10.6	19.0	50.0

2019-03-07

오전 9:57:38

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY52090906
Agilent	N9030A / Signal Analyzer	01/10/2019	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/26/2018	Annual	101231
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

### **Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/17/2018	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/10/2018	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/10/2018	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1904-FC038-P