

HAC-RF Emission

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2018-03-15
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole E-Field measurement 835MHz/835 MHz/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 119.8 V/m; Power Drift = -0.08 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 105.8 V/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M4 103.2 V/m	Grid 2 M4 104.9 V/m	Grid 3 M4 101.3 V/m
Grid 4 M4 57.60 V/m	Grid 5 M4 57.94 V/m	Grid 6 M4 56.56 V/m
Grid 7 M4 104.0 V/m	Grid 8 M4 105.8 V/m	Grid 9 M4 102.6 V/m

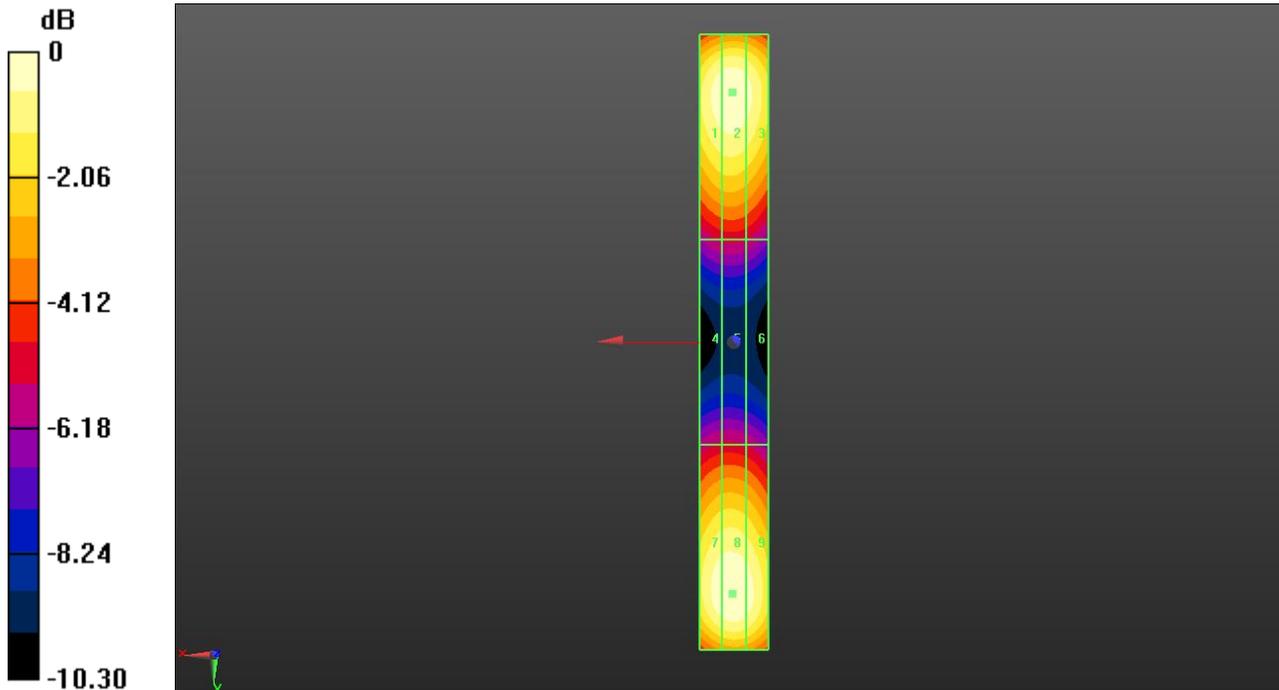

0 dB = 105.8 V/m = 40.49 dBV/m

HAC-RF Emission

Communication System: UID 0, CW (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2018-03-15
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole E-Field measurement 1900MHz/1900 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 159.4 V/m; Power Drift = 0.00 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 95.27 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 92.12 V/m	Grid 2 M3 92.96 V/m	Grid 3 M3 89.65 V/m
Grid 4 M3 66.29 V/m	Grid 5 M3 66.63 V/m	Grid 6 M3 66.10 V/m
Grid 7 M3 92.42 V/m	Grid 8 M3 95.27 V/m	Grid 9 M3 93.38 V/m

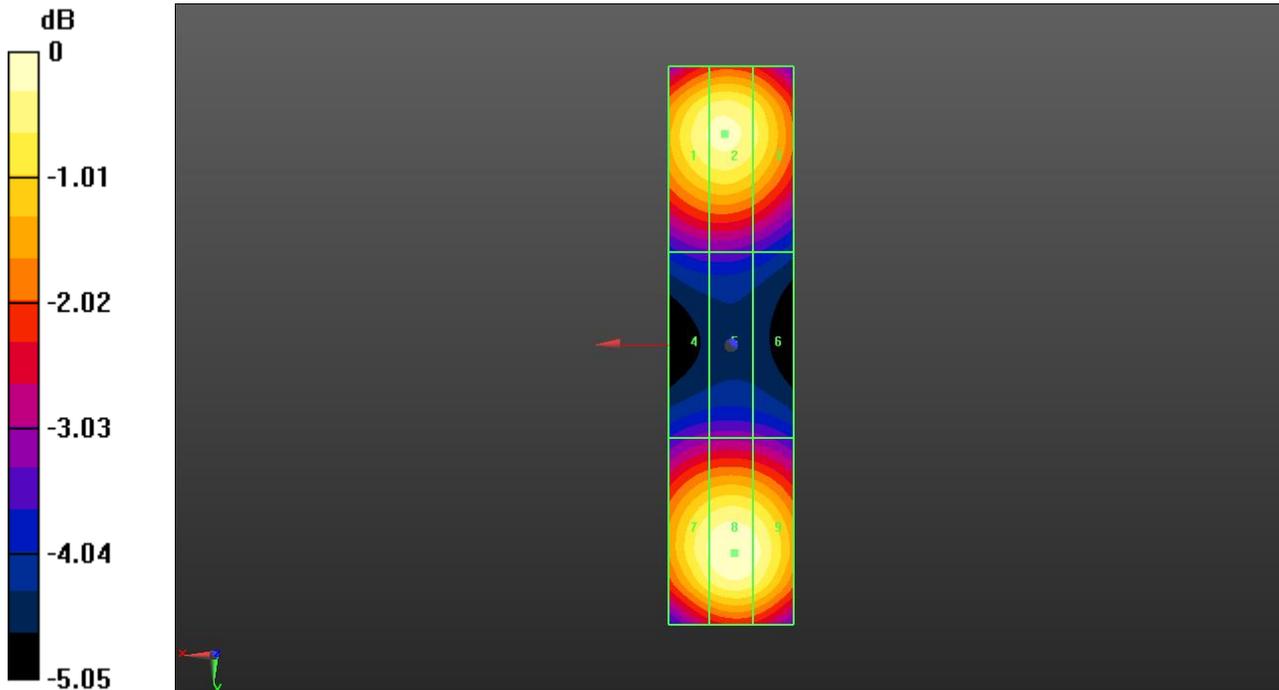

0 dB = 95.27 V/m = 39.58 dBV/m

HAC-RF Emission

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2018-03-15
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole E-Field measurement 2600MHz/2600 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 74.03 V/m; Power Drift = 0.00 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 95.74 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 90.91 V/m	Grid 2 M3 92.81 V/m	Grid 3 M3 90.52 V/m
Grid 4 M3 84.84 V/m	Grid 5 M3 85.42 V/m	Grid 6 M3 83.98 V/m
Grid 7 M3 93.84 V/m	Grid 8 M3 95.74 V/m	Grid 9 M3 93.53 V/m

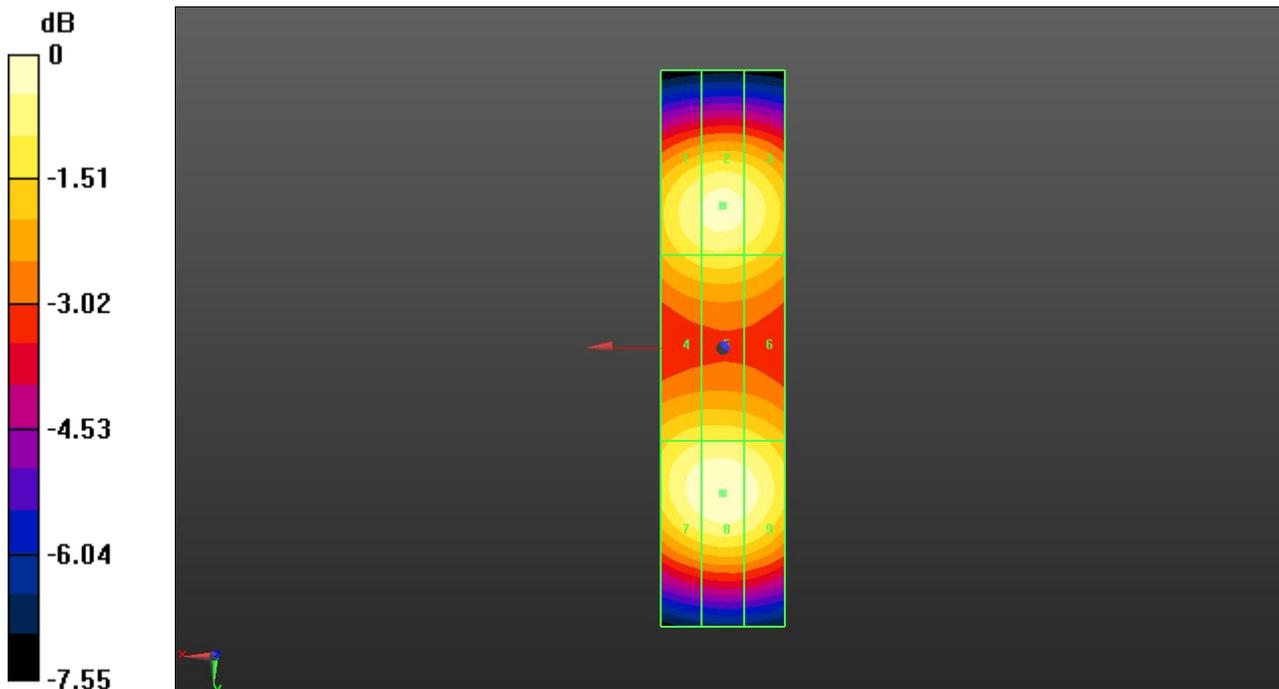

0 dB = 95.74 V/m = 39.62 dBV/m