



**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC

MODEL NUMBER: SM-A205GN/DS, SM-A205GN

FCC ID: A3LSMA205GN

REPORT NUMBER: 4788869685-S1V2

ISSUE DATE: 2/26/2019

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



TL-637

Revision History


Rev.	Date	Revisions	Revised By
V1	2/21/2019	Initial Issue	Sunghoon Kim
V2	2/26/2019	Sec.6.3 -Added "note 3" for earphone back off. Sec.6.6 -Added triggering evaluation results. Sec.10.1, Sec.10.2, Sec.13. Appendix B -Revised body-worn SAR results in GSM bands. -Revised simultaneous transmission SAR Analysis in table. Sec.1, Sec.10.5, Sec.13.1 -Revised WCDMA <u>Reported</u> SAR results. - Revised simultaneous Tx SAR level of body-worn & Hotspot exposure	Sunghoon Kim

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System.....</i>	7
4.2.	<i>SAR Scan Procedures.....</i>	8
4.3.	<i>Test Equipment.....</i>	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	11
6.1.	<i>DUT Description</i>	11
6.2.	<i>Wireless Technologies.....</i>	12
6.3.	<i>Nominal and Maximum Output Power.....</i>	13
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	15
6.5.	<i>LTE (TDD) Considerations.....</i>	17
6.6.	<i>Proximity Sensor feature.....</i>	18
6.6.1.	<i>Proximity Sensor Triggering Distance (KDB 616217 §6.2).....</i>	19
6.6.2.	<i>Proximity Sensor Coverage (KDB 616217 §6.3)</i>	22
6.6.3.	<i>Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4).....</i>	22
6.6.4.	<i>Resulting test positions for SAR measurements</i>	22
7.	RF Exposure Conditions (Test Configurations).....	23
8.	Dielectric Property Measurements & System Check	24
8.1	<i>Dielectric Property Measurements.....</i>	24
8.2	<i>System Check.....</i>	28
9.	Conducted Output Power Measurements.....	31
9.1	<i>GSM</i>	31
9.2	<i>W-CDMA</i>	33
9.3	<i>LTE.....</i>	38
9.4	<i>Wi-Fi 2.4 GHz (DTS Band).....</i>	57
9.5	<i>Bluetooth</i>	58
10.	Measured and Reported (Scaled) SAR Results.....	59
10.1	<i>GSM 850</i>	61
10.2	<i>GSM1900</i>	61
10.3	<i>W-CDMA Band II.....</i>	62

10.4	W-CDMA Band IV.....	62
10.5	W-CDMA Band V.....	62
10.6	LTE Band 2 (20MHz Bandwidth).....	63
10.7	LTE Band 5 (10MHz Bandwidth).....	63
10.8	LTE Band 12 (10MHz Bandwidth).....	64
10.9	LTE Band 13 (10MHz Bandwidth).....	64
10.10	LTE Band 41 (20MHz Bandwidth).....	65
10.11	LTE Band 66 (20MHz Bandwidth).....	65
10.12	Wi-Fi (DTS Band).....	66
10.13	Bluetooth.....	66
11.	SAR Measurement Variability.....	67
12.	DUT Holder Perturbations	68
13.	Simultaneous Transmission SAR Analysis.....	68
13.1	Sum of the SAR for WWAN & Wi-Fi & BT.....	70
Appendixes	71
	4788869685-S1V2 FCC Report SAR_App A_Photos & Ant. Locations.....	71
	4788869685-S1V2 FCC Report SAR_App B_Highest SAR Test Plots.....	71
	4788869685-S1V2 FCC Report SAR_App C_System Check Plots.....	71
	4788869685-S1V2 FCC Report SAR_App D_SAR Tissue Ingredients.....	71
	4788869685-S1V2 FCC Report SAR_App E_Probe Cal. Certificates.....	71
	4788869685-S1V2 FCC Report SAR_App F_Dipole Cal. Certificates.....	71

1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.		
FCC ID		A3LSMA205GN		
Model Number		SM-A205GN/DS, SM-A205GN		
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
SAR Limits (W/Kg)				
Exposure Category		Peak spatial-average(1g of tissue)		Phablet (10g of tissue)
General population / Uncontrolled exposure		1.6		4.0
The Highest Reported SAR (W/kg)				
RF Exposure Conditions		Equipment Class		
		Licensed	DTS	DSS(BT)
Head		0.34	0.13	0.16
Body-worn		0.45	<0.10	N/A
Hotspot		0.83	0.19	
Phablet-10g		N/A	N/A	
Simultaneous TX	Head	0.50	0.47	0.50
	Body-worn	0.52		N/A
	Hotspot	1.02		
	Phablet-10g	N/A	N/A	
Date Tested		1/28/2019 to 2/20/2019		
Test Results		Pass		
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>				
Approved & Released By:		Prepared By:		
				
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory		Sunghoon Kim Test Engineer UL Korea, Ltd. Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October, 2016; Page 18, RF Exposure Procedures (DUT Holder Perturbations)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room
SAR 4 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

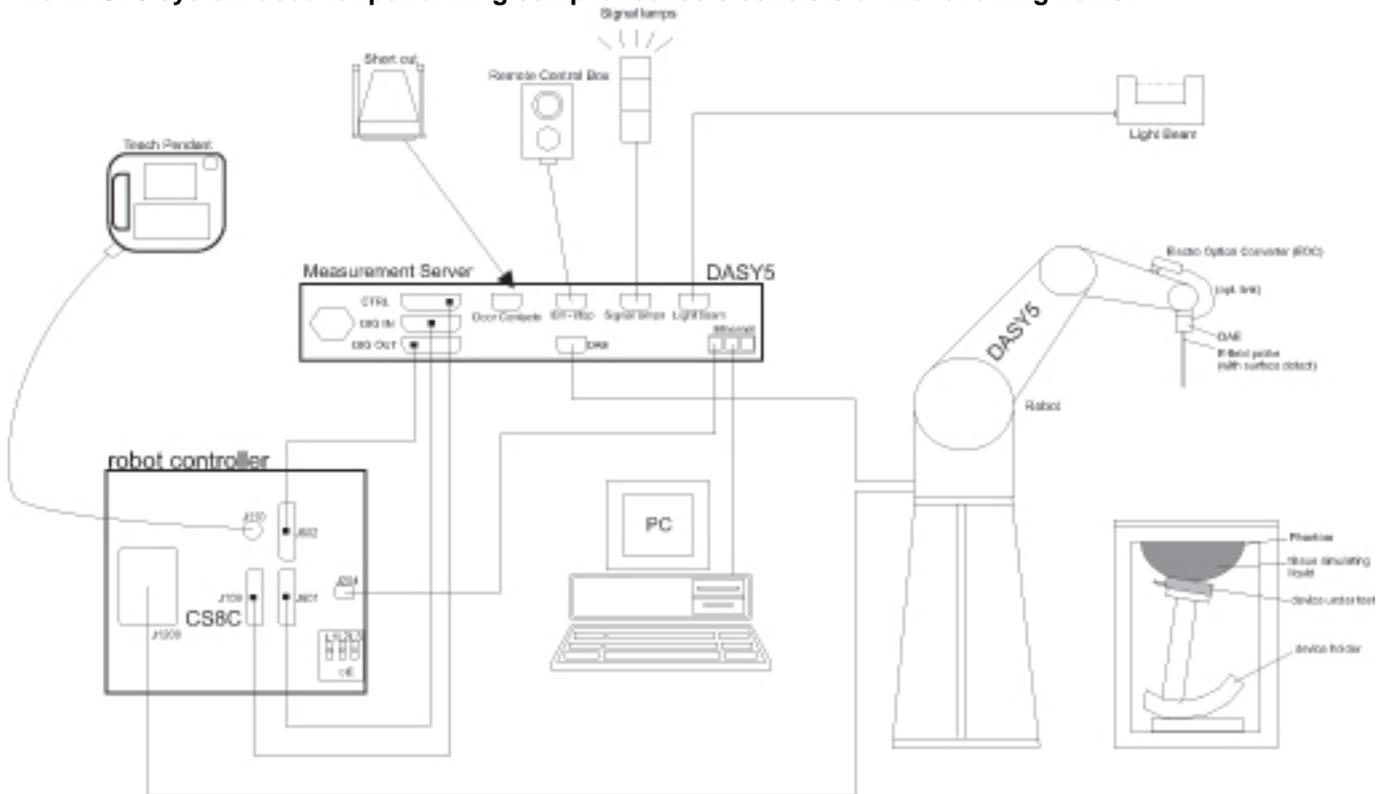

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-7-2019
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	6-26-2019
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-9-2019

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-7-2019
Power Sensor	Agilent	U2000A	MY54260010	8-7-2019
Power Sensor	Agilent	U2000A	MY54260007	8-7-2019
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2019
Directional Coupler	Agilent	772D	MY52180193	8-7-2019
Directional Coupler	Agilent	778D	MY52180432	8-7-2019
Low Pass Filter	MICROLAB	LA-15N	03943	8-7-2019
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2019
Attenuator	Agilent	8491B/003	MY39269292	8-7-2019
Attenuator	Agilent	8491B/010	MY39269315	8-7-2019
Attenuator	Agilent	8491B/020	MY39269298	8-7-2019
E-Field Probe (SAR1)	SPEAG	EX3DV4	7376	9-26-2019
E-Field Probe (SAR2)	SPEAG	EX3DV4	7313	2-20-2019
E-Field Probe (SAR2)	SPEAG	EX3DV4	7330	1-31-2020
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	8-30-2019
E-Field Probe (SAR4)	SPEAG	EX3DV4	3991	5-24-2019
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1494	7-23-2019
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1447	3-15-2019
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1468	8-22-2019
Data Acquisition Electronics (SAR4)	SPEAG	DAE4	1259	7-26-2019
System Validation Dipole	SPEAG	D750V3	1122	2-19-2019
System Validation Dipole	SPEAG	D835V2	4d194	7-24-2019
System Validation Dipole	SPEAG	D1750V2	1125	2-16-2019
System Validation Dipole	SPEAG	D1900V2	5d199	3-15-2019
System Validation Dipole	SPEAG	D2450V2	960	3-20-2019
System Validation Dipole	SPEAG	D2600V2	1097	1-17-2019
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-8-2019
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	8-13-2019
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-14-2019
Thermometer (SAR4)	Lutron	MHB-382SD	AH.91478	8-8-2019

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-9-2019
Base Station Simulator	R & S	CMW500	150314	8-9-2019
Base Station Simulator	R & S	CMW500	162790	8-9-2019
Wireless Connectivity Tester	R & S	CMW270	100982	8-8-2019
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	8-7-2019

Note(s):

Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations (D2600, SN : 1097)

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 158.3 mm x 74.6 mm Overall Diagonal: 169.0 mm Display Diagonal: 162.4 mm		
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.		
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz)		
Test Sample Information	No.	S/N	Notes
	1	5200499a529db5c1	Wi-Fi/BT conduction
	2	5200499653afb50d	Main conduction
	3	52004b804665b5cf	Main conduction
	4	R38K909WK7M	SAR
	5	R38M10DAHEA	SAR
	6	R38M10DAJ7K	SAR
	7	R38M10DAHYY	SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Category 24) HSUPA (Category 6)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 FDD Band 66 TDD Band 41	QPSK 16QAM Rel. 10 Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD) ¹
		Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		99.6% (802.11b) 95.6% (802.11g) 96.2% (802.11n 20MHz BW)
Bluetooth	2.4 GHz	Version 5.0 LE		76.8% (DH5)

Notes:

1. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
2. The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.8% and was considered and used for SAR Testing.
3. Duty cycle for Wi-Fi is referenced from the DTS report.

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Antenna	Mode	Time Slots	Max. RF Output Power (dBm)	
				Tune-up Limit	Frame Power
GSM850	Main 1	Voice/GPRS	1	33.5	24.5
		GPRS	2	31.5	25.5
		GPRS	3	30.0	25.7
		GPRS	4	28.0	25.0
		EGPRS	1	27.0	18.0
		EGPRS	2	25.0	19.0
		EGPRS	3	23.5	19.2
GSM1900	Main 1	Voice/GPRS	1	30.5	21.5
		GPRS	2	28.0	22.0
		GPRS	3	26.5	22.2
		GPRS	4	25.0	22.0
		EGPRS	1	26.5	17.5
		EGPRS	2	24.0	18.0
		EGPRS	3	22.5	18.2
		EGPRS	4	20.5	17.5

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)
W-CDMA Band II	Main 1	R99	24.5	21.5
		HSDPA	24.0	21.0
		HSUPA	24.0	21.0
W-CDMA Band IV	Main 1	R99	25.0	22.0
		HSDPA	24.5	22.0
		HSUPA	24.5	22.0
W-CDMA Band V	Main 1	R99	25.5	
		HSDPA	23.5	
		HSUPA	25.0	

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)
LTE Band 2	Main 1	QPSK	25.0	22.0
LTE Band 4*	Main 1	QPSK	25.0	23.0
LTE Band 5	Main 1	QPSK	25.5	
LTE Band 12	Main 1	QPSK	25.5	
LTE Band 13	Main 1	QPSK	24.0	
LTE Band 17*	Main 1	QPSK	25.5	
LTE Band 66	Main 1	QPSK	25.0	23.0
LTE Band 41	Main 2	QPSK	25.0	

Notes:

1. The device utilizes power reduction under some portable hotspot conditions for SAR compliance. There is power reduction for (WCDMA Band II, IV LTE Band 2, 4, 66). The reduced powers were confirmed via conducted power measurements the RF port. Detailed description of the hotspot power reduction mechanism is included in the operational description.
2. (WCDMA Band II, IV LTE Band 2, 4, 66) has support to proximity sensor back-off function. it is operating during extremity (hand-held) use conditions. And This function is apply to phablet 10-g SAR exposure condition. Other Head and Body exposure conditions are performed SAR test at full power. The proximity sensor details explain in SAR report according to Section 6 in KDB 616217.
3. WWAN bands (LTE Band 2, 4, 66) has support to power reduction when earphone is connected to phone. But Max power's reported SAR result is not over 1.2 W/kg in body-worn exposure condition. so we don't need to evaluation for phone + earphone configuration in body-worn accessory exposure condition according to Sec.2.3 in KDB 648474 D04. Therefore we don't need to consider about power reduction when earphone is connected to phone.
4. All Power reduction mechanisms are not work at the same time.
5. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
6. LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.
7. LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)
WiFi 2.4 GHz (Ch.1 - Ch.10)	802.11b	18.0	12.0
	802.11g	17.0	12.0
	802.11n HT20	17.0	12.0
WiFi 2.4 GHz (Ch.11)	802.11b	18.0	12.0
	802.11g	17.0	12.0
	802.11n HT20	16.0	12.0
WiFi 2.4 GHz (Ch.12)	802.11b	17.0	8.0
	802.11g	12.5	8.0
	802.11n HT20	12.0	6.0
WiFi 2.4 GHz (Ch.13)	802.11b	16.0	8.0
	802.11g	10.0	8.0
	802.11n HT20	7.0	6.0
Bluetooth		10.0	
Bluetooth LE		6.0	

Note(s):

This device uses an independent fixed level power reduction mechanism for WLAN operations during RCV operated Detailed descriptions of the power reduction mechanism are included in the operational description.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700/ 1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23205/ 779.5		
Mid			23230/ 782	23230/ 782			
High				23255/ 784.5			
Band 17	Frequency range: 704 - 716 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low			23780/ 709	23755/ 706.5			
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			

Item	Description																																																																																														
	<table border="1"> <tr> <td rowspan="3">Band 41</td> <td colspan="6">Frequency range: 2496 - 2690 MHz</td> </tr> <tr> <td colspan="6">Channel Bandwidth</td> </tr> <tr> <td>20 MHz</td> <td>15 MHz</td> <td>10 MHz</td> <td>5 MHz</td> <td>3 MHz</td> <td>1.4 MHz</td> </tr> <tr> <td>Low</td> <td colspan="6">39750 / 2506.0</td> </tr> <tr> <td>Low-Mid</td> <td colspan="6">40185 / 2549.5</td> </tr> <tr> <td>Mid</td> <td colspan="6">40620 / 2593.0</td> </tr> <tr> <td>Mid-High</td> <td colspan="6">41055 / 2636.5</td> </tr> <tr> <td>High</td> <td colspan="6">41490 / 2680.0</td> </tr> <tr> <td rowspan="3">Band 66</td> <td colspan="6">Frequency range: 1710 - 1780 MHz</td> </tr> <tr> <td colspan="6">Channel Bandwidth</td> </tr> <tr> <td>20 MHz</td> <td>15 MHz</td> <td>10 MHz</td> <td>5 MHz</td> <td>3 MHz</td> <td>1.4 MHz</td> </tr> <tr> <td>Low</td> <td>132072/ 1720</td> <td>132047/ 1717.5</td> <td>132022/ 1715</td> <td>131997/ 1712.5</td> <td>131987/ 1711.5</td> <td>131979/ 1710.7</td> </tr> <tr> <td>Mid</td> <td>132322/ 1745</td> <td>132322/ 1745</td> <td>132322/ 1745</td> <td>132322/ 1745</td> <td>132322/ 1745</td> <td>132322/ 1745</td> </tr> <tr> <td>High</td> <td>132572/ 1770</td> <td>132597/ 1772.5</td> <td>132622/ 1775</td> <td>132647/ 1777.5</td> <td>132657/ 1778.5</td> <td>132665/ 1779.3</td> </tr> </table>	Band 41	Frequency range: 2496 - 2690 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low	39750 / 2506.0						Low-Mid	40185 / 2549.5						Mid	40620 / 2593.0						Mid-High	41055 / 2636.5						High	41490 / 2680.0						Band 66	Frequency range: 1710 - 1780 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7	Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3
	Band 41		Frequency range: 2496 - 2690 MHz																																																																																												
			Channel Bandwidth																																																																																												
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																																																								
	Low	39750 / 2506.0																																																																																													
	Low-Mid	40185 / 2549.5																																																																																													
	Mid	40620 / 2593.0																																																																																													
	Mid-High	41055 / 2636.5																																																																																													
	High	41490 / 2680.0																																																																																													
	Band 66	Frequency range: 1710 - 1780 MHz																																																																																													
		Channel Bandwidth																																																																																													
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																																																								
	Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7																																																																																								
	Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745																																																																																								
High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3																																																																																									
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																																														
Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5																																
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																																								
256 QAM	≥ 1						≤ 5																																																																																								
Power reduction	Yes																																																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																																														

Note(s):

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$	-	-	-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where


$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7

6.6. Proximity Sensor feature

The DUT has one proximity sensors to reduce the output power. The position of the sensors and antenna are as shown in the graphic.

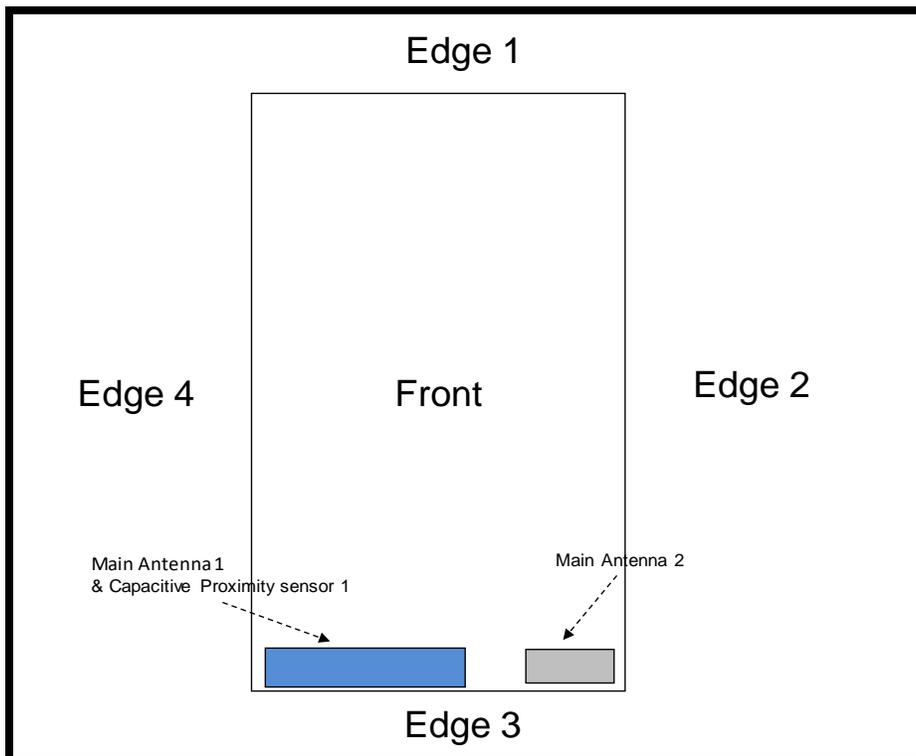


6.6.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Rear and Edge 3 of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

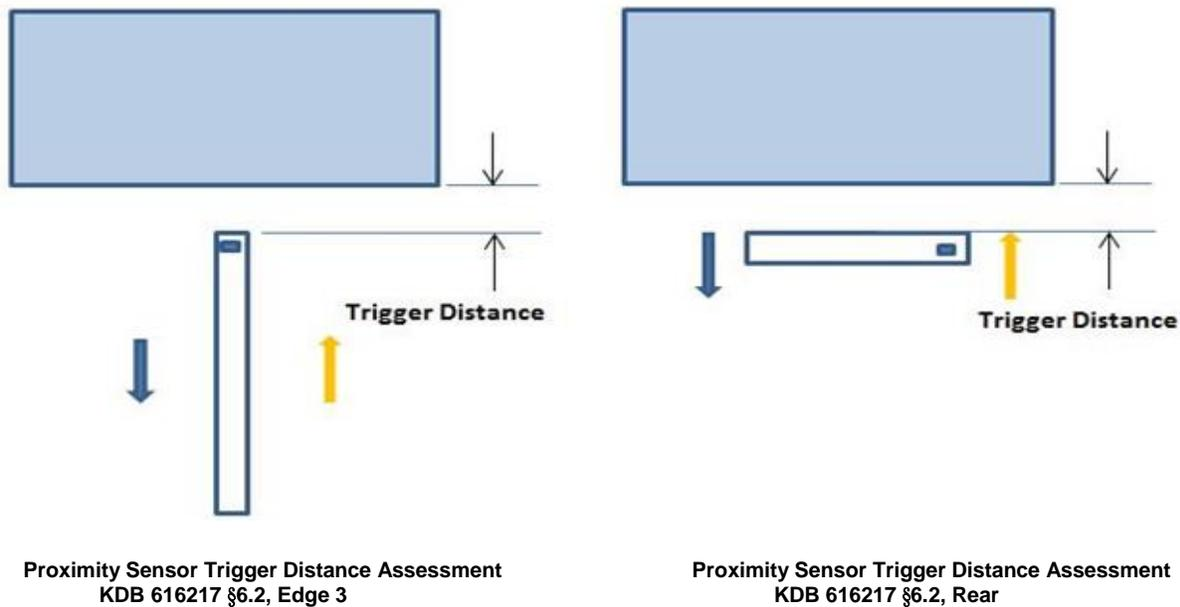

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Summary of Trigger Distances


Tissue simulating liquid	Trigger distance - Rear		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
1750 Body	10 mm	10 mm	6 mm	6 mm
1900 Body	10 mm	10 mm	6 mm	6 mm

Proximity Sensor Triggering Distance Measurement Results

WCDMA Band II/ IV


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	6	7	8	9	10	11	12	13	14	15
WCDMA Band II	20.4	20.5	20.6	20.4	20.5	23.6	23.4	23.4	23.6	23.7
WCDMA Band IV	20.9	21.1	21.1	21.2	21.0	24.2	23.9	23.9	24.1	24.0

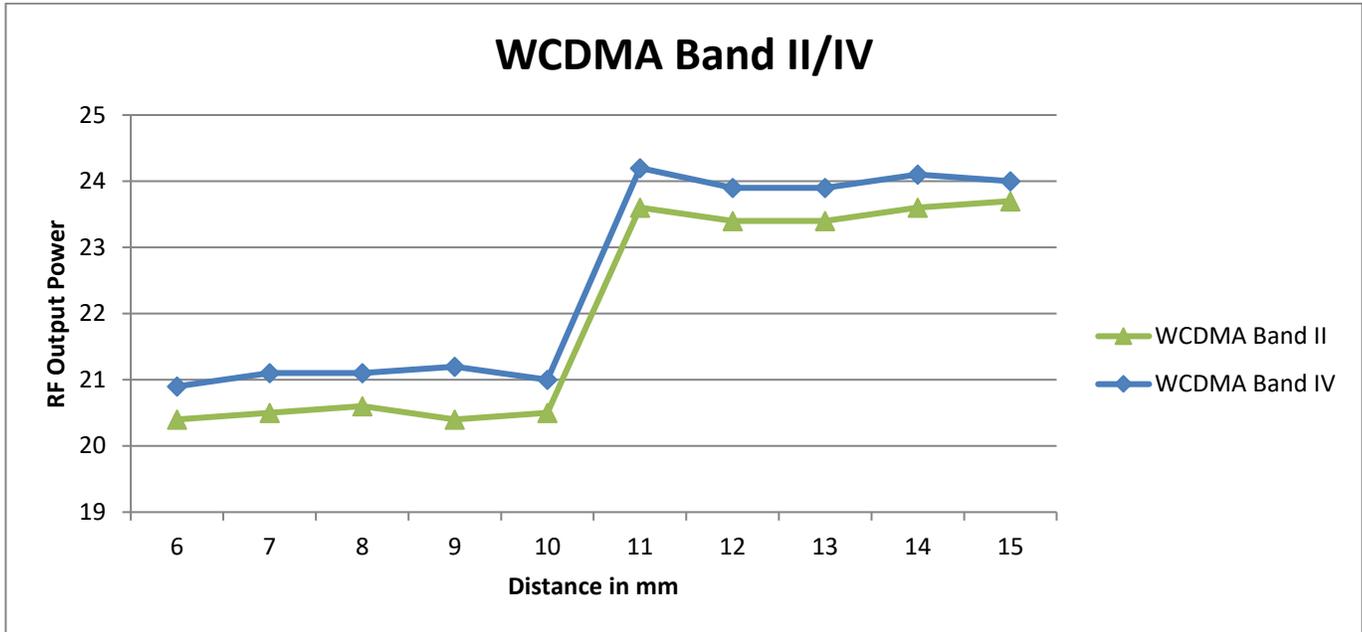

Edge 3, DUT Moving Toward (Trigger) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	2	3	4	5	6	7	8	9	10	11
WCDMA Band II	20.6	20.5	20.5	20.6	20.5	23.6	23.6	23.4	23.4	23.6
WCDMA Band IV	21.1	21.1	21.2	21.1	21.0	24.0	23.9	24.0	24.1	24.1

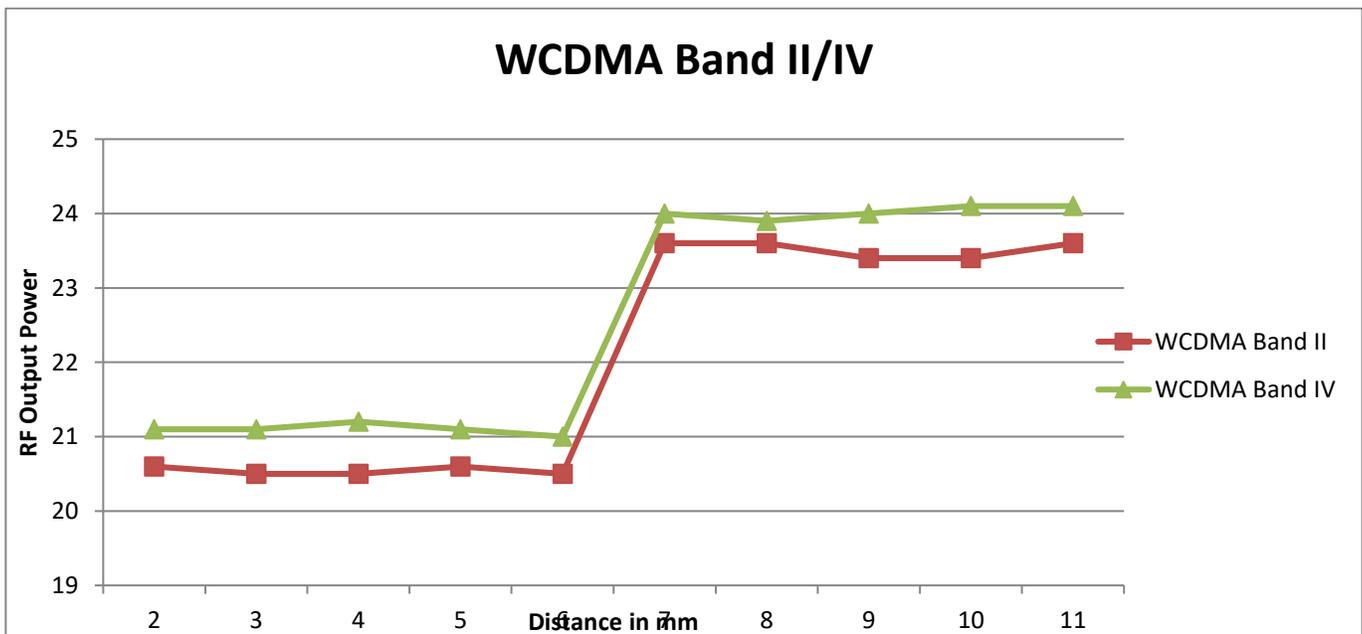

LTE Band 2 / 4 / 66


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	6	7	8	9	10	11	12	13	14	15
LTE Band 2	21.8	21.9	21.0	21.2	21.0	24.0	24.2	24.0	24.1	24.0
LTE Band 4	21.9	21.8	22.1	22.0	22.0	24.0	24.1	24.0	23.8	24.0
LTE Band 66	21.9	21.8	21.8	21.9	22.0	24.0	24.1	24.2	24.1	24.0

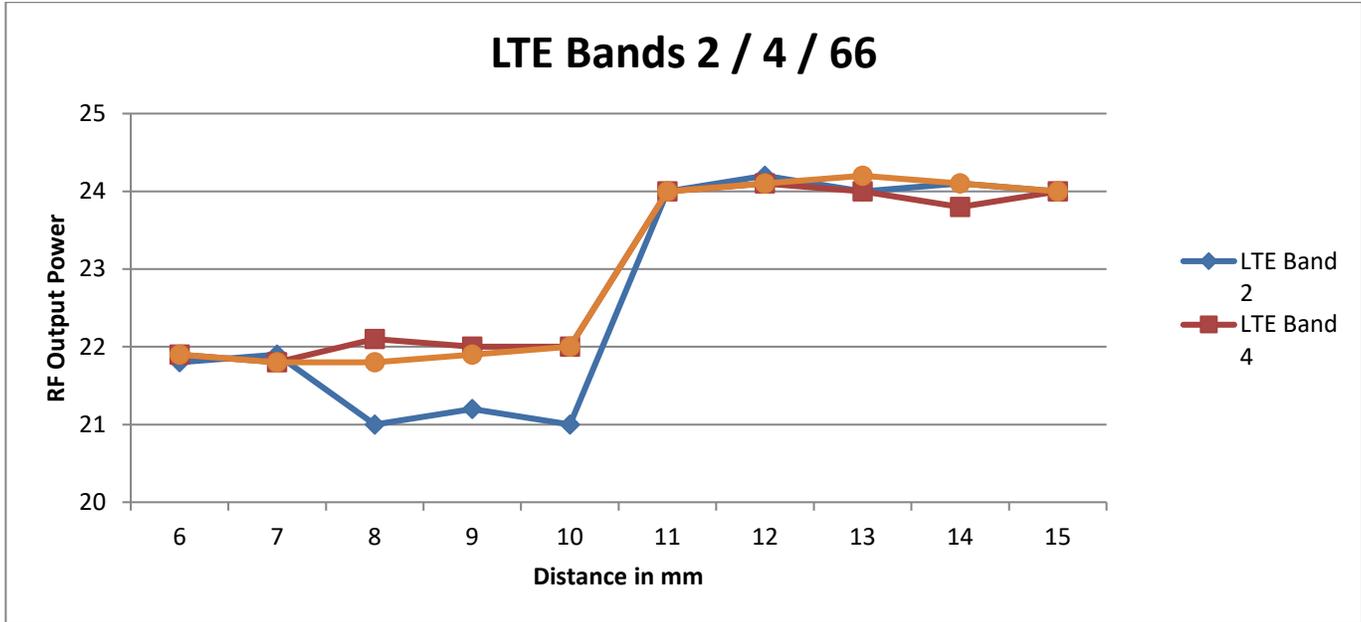

Edge 3, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	2	3	4	5	6	7	8	9	10	11
LTE Band 2	21.1	21.2	21.1	21.0	21.0	23.9	23.8	23.8	23.8	23.9
LTE Band 4	22.2	22.1	22.0	22.1	22.0	24.1	24.0	23.9	23.9	24.1
LTE Band 66	21.8	21.9	21.8	21.9	22.0	23.9	23.9	23.8	23.8	23.9

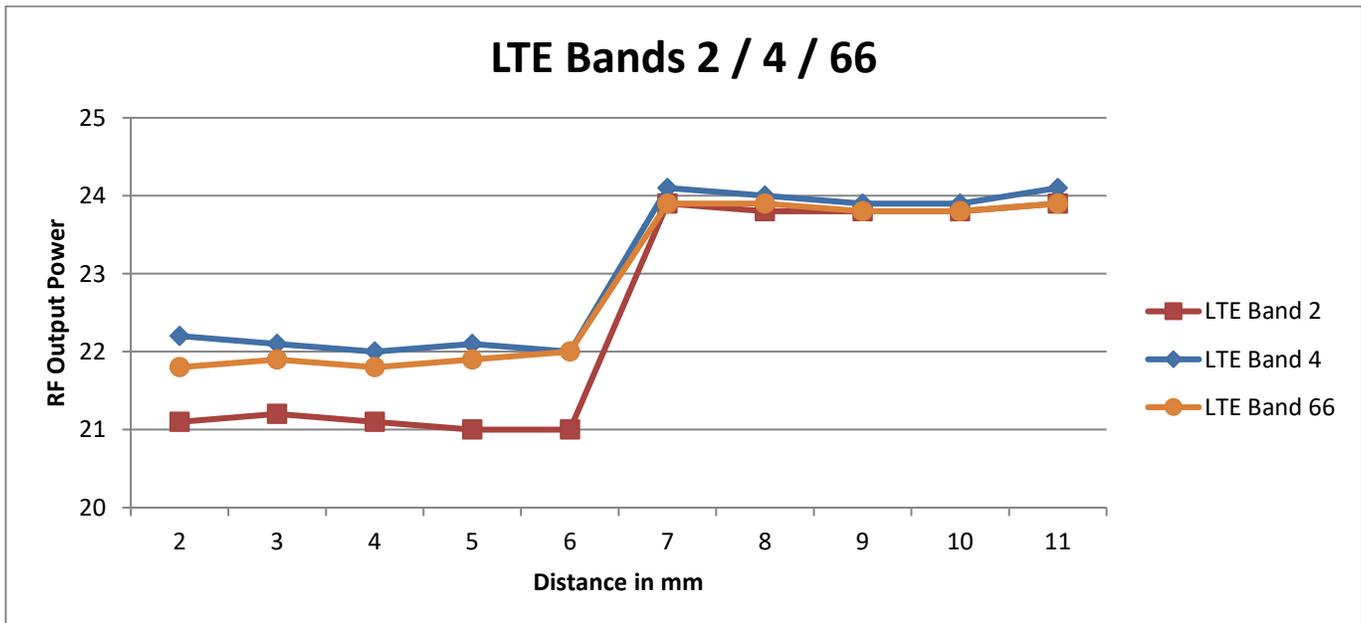


6.6.2. Proximity Sensor Coverage (KDB 616217 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

6.6.3. Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 3 parallel to the base of the flat phantom for each band.

The DUT was rotated about Edge 3 for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

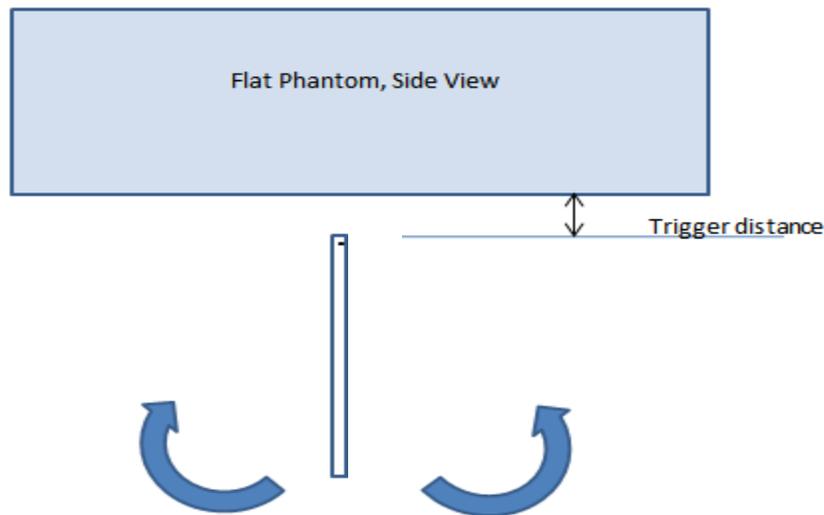

Proximity sensor tilt angle assessment (Edge 3) KDB 616217 §6.4

Summary of DUT Tilt Angle Influence to Proximity Sensor Triggering (Edge 3)

Band (MHz)	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over +/-45°	Power reduction status											
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
1750	6 mm	6 mm	On	On	On	On	On	On	On	On	On	On	On	On
1900	6 mm	6 mm	On	On	On	On	On	On	On	On	On	On	On	On

6.6.4. Resulting test positions for SAR measurements

Wireless technologies	DUT Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
WWAN (Main 1)	Rear	10 mm	N/A	N/A	9 mm
	Edge 3	6 mm	N/A	6 mm	5 mm

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	Antennaa	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	Main Ant. 1 & 2	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body	Main Ant. 1 & 2	15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
	Hotspot	Main Ant.1	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	< 25 mm	Yes	
	Hotspot	Main Ant.2	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	< 25 mm	Yes	
	Phablet-10g	Main Ant.1	0 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	< 25 mm	Yes	
	Phablet-10g	Main Ant.2	0 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
Edge 2 (Right)				< 25 mm	Yes		
Edge 3 (Bottom)				< 25 mm	Yes		
WLAN & BT	Head	WiFi & BT Ant.	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body		15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
	Hotspot		10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	< 25 mm	Yes	
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	> 25 mm	No	1
	Phablet-10g		0 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	< 25 mm	Yes	
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	> 25 mm	No	1
	Phablet-10g		0 mm	Edge 4 (Left)	> 25 mm	No	1

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Phablet SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g Phablet SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Phablet SAR is required for all surfaces and Edges within 25mm of the antenna.

8. Dielectric Property Measurements & System Check

8.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR 1 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-29-2019	Head 2600	e'	38.4300	Relative Permittivity (ϵ_r):	38.43	39.01	-1.49	5
		e"	13.9500	Conductivity (σ):	2.02	1.96	2.78	5
	Head 2500	e'	38.7800	Relative Permittivity (ϵ_r):	38.78	39.14	-0.91	5
		e"	13.7200	Conductivity (σ):	1.91	1.85	2.87	5
	Head 2700	e'	38.0600	Relative Permittivity (ϵ_r):	38.06	38.88	-2.12	5
		e"	14.1900	Conductivity (σ):	2.13	2.07	2.90	5
2-11-2019	Head 2450	e'	40.8200	Relative Permittivity (ϵ_r):	40.82	39.20	4.13	5
		e"	13.3800	Conductivity (σ):	1.82	1.80	1.26	5
	Head 2400	e'	40.9500	Relative Permittivity (ϵ_r):	40.95	39.30	4.21	5
		e"	13.2500	Conductivity (σ):	1.77	1.75	0.94	5
	Head 2480	e'	40.7300	Relative Permittivity (ϵ_r):	40.73	39.16	4.00	5
		e"	13.4300	Conductivity (σ):	1.85	1.83	1.06	5
2-18-2019	Body 2450	e'	51.6200	Relative Permittivity (ϵ_r):	51.62	52.70	-2.05	5
		e"	14.8100	Conductivity (σ):	2.02	1.95	3.46	5
	Body 2400	e'	51.7200	Relative Permittivity (ϵ_r):	51.72	52.77	-1.99	5
		e"	14.6300	Conductivity (σ):	1.95	1.90	2.86	5
	Body 2480	e'	51.5900	Relative Permittivity (ϵ_r):	51.59	52.66	-2.04	5
		e"	14.8800	Conductivity (σ):	2.05	1.99	3.00	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-28-2019	Body 750	e'	57.3400	Relative Permittivity (ϵ_r):	57.34	55.55	3.23	5
		e"	23.3500	Conductivity (σ):	0.97	0.96	1.11	5
	Body 700	e'	57.7100	Relative Permittivity (ϵ_r):	57.71	55.74	3.54	5
		e"	23.8500	Conductivity (σ):	0.93	0.96	-3.23	5
	Body 790	e'	57.0100	Relative Permittivity (ϵ_r):	57.01	55.39	2.92	5
		e"	22.9400	Conductivity (σ):	1.01	0.97	4.30	5
1-29-2019	Body 835	e'	52.9100	Relative Permittivity (ϵ_r):	52.91	55.20	-4.15	5
		e"	21.2700	Conductivity (σ):	0.99	0.97	1.81	5
	Body 820	e'	53.0700	Relative Permittivity (ϵ_r):	53.07	55.28	-3.99	5
		e"	21.3200	Conductivity (σ):	0.97	0.97	0.37	5
	Body 850	e'	52.7500	Relative Permittivity (ϵ_r):	52.75	55.16	-4.36	5
		e"	21.2200	Conductivity (σ):	1.00	0.99	1.60	5
1-30-2019	Head 750	e'	43.3600	Relative Permittivity (ϵ_r):	43.36	41.96	3.33	5
		e"	21.6000	Conductivity (σ):	0.90	0.89	0.86	5
	Head 700	e'	43.9900	Relative Permittivity (ϵ_r):	43.99	42.22	4.20	5
		e"	21.7400	Conductivity (σ):	0.85	0.89	-4.84	5
	Head 790	e'	42.8700	Relative Permittivity (ϵ_r):	42.87	41.76	2.67	5
		e"	21.3100	Conductivity (σ):	0.94	0.90	4.45	5
2-7-2019	Body 835	e'	53.6900	Relative Permittivity (ϵ_r):	53.69	55.20	-2.74	5
		e"	20.9900	Conductivity (σ):	0.97	0.97	0.47	5
	Body 820	e'	53.8400	Relative Permittivity (ϵ_r):	53.84	55.28	-2.60	5
		e"	21.0500	Conductivity (σ):	0.96	0.97	-0.90	5
	Body 850	e'	53.5800	Relative Permittivity (ϵ_r):	53.58	55.16	-2.86	5
		e"	20.9200	Conductivity (σ):	0.99	0.99	0.16	5
2-18-2019	Body 835	e'	55.8400	Relative Permittivity (ϵ_r):	55.84	55.20	1.16	5
		e"	20.5000	Conductivity (σ):	0.95	0.97	-1.88	5
	Body 820	e'	55.9800	Relative Permittivity (ϵ_r):	55.98	55.28	1.27	5
		e"	20.6000	Conductivity (σ):	0.94	0.97	-3.02	5
	Body 850	e'	55.7000	Relative Permittivity (ϵ_r):	55.70	55.16	0.98	5
		e"	20.4300	Conductivity (σ):	0.97	0.99	-2.18	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-30-2019	Head 835	e'	40.9800	Relative Permittivity (ϵ_r):	40.98	41.50	-1.25	5
		e"	19.9700	Conductivity (σ):	0.93	0.90	3.02	5
	Head 820	e'	41.1700	Relative Permittivity (ϵ_r):	41.17	41.60	-1.04	5
		e"	20.0200	Conductivity (σ):	0.91	0.90	1.60	5
	Head 850	e'	40.7900	Relative Permittivity (ϵ_r):	40.79	41.50	-1.71	5
		e"	19.9200	Conductivity (σ):	0.94	0.92	2.89	5
2-11-2019	Body 1750	e'	52.0100	Relative Permittivity (ϵ_r):	52.01	53.44	-2.68	5
		e"	15.4200	Conductivity (σ):	1.50	1.49	0.96	5
	Body 1710	e'	52.1500	Relative Permittivity (ϵ_r):	52.15	53.54	-2.60	5
		e"	15.3700	Conductivity (σ):	1.46	1.46	-0.01	5
	Body 1755	e'	51.9900	Relative Permittivity (ϵ_r):	51.99	53.43	-2.69	5
		e"	15.4300	Conductivity (σ):	1.51	1.49	1.11	5
2-12-2019	Body 750	e'	57.1300	Relative Permittivity (ϵ_r):	57.13	55.55	2.85	5
		e"	23.0600	Conductivity (σ):	0.96	0.96	-0.15	5
	Body 700	e'	57.5700	Relative Permittivity (ϵ_r):	57.57	55.74	3.29	5
		e"	23.5400	Conductivity (σ):	0.92	0.96	-4.48	5
	Body 790	e'	56.7900	Relative Permittivity (ϵ_r):	56.79	55.39	2.52	5
		e"	22.7000	Conductivity (σ):	1.00	0.97	3.21	5
2-16-2019	Head 835	e'	41.2100	Relative Permittivity (ϵ_r):	41.21	41.50	-0.70	5
		e"	19.5300	Conductivity (σ):	0.91	0.90	0.75	5
	Head 820	e'	41.3100	Relative Permittivity (ϵ_r):	41.31	41.60	-0.70	5
		e"	19.5400	Conductivity (σ):	0.89	0.90	-0.84	5
	Head 850	e'	41.0900	Relative Permittivity (ϵ_r):	41.09	41.50	-0.99	5
		e"	19.5300	Conductivity (σ):	0.92	0.92	0.88	5

SAR 4 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-28-2019	Body 2600	e'	52.1100	Relative Permittivity (ε _r):	52.11	52.51	-0.76	5
		e"	15.1100	Conductivity (σ):	2.18	2.16	1.09	5
	Body 2500	e'	52.4000	Relative Permittivity (ε _r):	52.40	52.64	-0.45	5
		e"	14.8500	Conductivity (σ):	2.06	2.02	2.18	5
	Body 2700	e'	51.8000	Relative Permittivity (ε _r):	51.80	52.38	-1.12	5
		e"	15.3000	Conductivity (σ):	2.30	2.30	-0.19	5
1-30-2019	Head 1900	e'	38.8300	Relative Permittivity (ε _r):	38.83	40.00	-2.93	5
		e"	13.4400	Conductivity (σ):	1.42	1.40	1.42	5
	Head 1850	e'	38.9900	Relative Permittivity (ε _r):	38.99	40.00	-2.53	5
		e"	13.2900	Conductivity (σ):	1.37	1.40	-2.35	5
	Head 1910	e'	38.7900	Relative Permittivity (ε _r):	38.79	40.00	-3.03	5
		e"	13.4700	Conductivity (σ):	1.43	1.40	2.18	5
1-31-2019	Body 1900	e'	53.7800	Relative Permittivity (ε _r):	53.78	53.30	0.90	5
		e"	14.1900	Conductivity (σ):	1.50	1.52	-1.37	5
	Body 1850	e'	53.9300	Relative Permittivity (ε _r):	53.93	53.30	1.18	5
		e"	14.1500	Conductivity (σ):	1.46	1.52	-4.24	5
	Body 1910	e'	53.7200	Relative Permittivity (ε _r):	53.72	53.30	0.79	5
		e"	14.1700	Conductivity (σ):	1.50	1.52	-0.99	5
2-12-2019	Head 1750	e'	39.6400	Relative Permittivity (ε _r):	39.64	40.08	-1.11	5
		e"	14.4200	Conductivity (σ):	1.40	1.37	2.50	5
	Head 1710	e'	39.8100	Relative Permittivity (ε _r):	39.81	40.15	-0.84	5
		e"	14.3100	Conductivity (σ):	1.36	1.35	1.05	5
	Head 1755	e'	39.6200	Relative Permittivity (ε _r):	39.62	40.08	-1.14	5
		e"	14.4300	Conductivity (σ):	1.41	1.37	2.65	5
2-13-2019	Body 1900	e'	52.2300	Relative Permittivity (ε _r):	52.23	53.30	-2.01	5
		e"	14.8600	Conductivity (σ):	1.57	1.52	3.28	5
	Body 1850	e'	52.5300	Relative Permittivity (ε _r):	52.53	53.30	-1.44	5
		e"	14.7600	Conductivity (σ):	1.52	1.52	-0.11	5
	Body 1910	e'	52.1400	Relative Permittivity (ε _r):	52.14	53.30	-2.18	5
		e"	14.8400	Conductivity (σ):	1.58	1.52	3.69	5
2-18-2019	Body 1900	e'	52.7500	Relative Permittivity (ε _r):	52.75	53.30	-1.03	5
		e"	14.9100	Conductivity (σ):	1.58	1.52	3.63	5
	Body 1850	e'	52.8600	Relative Permittivity (ε _r):	52.86	53.30	-0.83	5
		e"	15.1000	Conductivity (σ):	1.55	1.52	2.19	5
	Body 1910	e'	52.7500	Relative Permittivity (ε _r):	52.75	53.30	-1.03	5
		e"	14.9100	Conductivity (σ):	1.58	1.52	4.18	5
2-20-2019	Head 1900	e'	40.2200	Relative Permittivity (ε _r):	40.22	40.00	0.55	5
		e"	13.5200	Conductivity (σ):	1.43	1.40	2.02	5
	Head 1850	e'	40.2700	Relative Permittivity (ε _r):	40.27	40.00	0.68	5
		e"	13.5900	Conductivity (σ):	1.40	1.40	-0.15	5
	Head 1910	e'	40.2100	Relative Permittivity (ε _r):	40.21	40.00	0.53	5
		e"	13.5300	Conductivity (σ):	1.44	1.40	2.64	5

8.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1122	2-19-2018	750	1g	8.22	8.63
				10g	5.35	5.72
D835V2	4d194	7-24-2018	835	1g	9.36	9.61
				10g	6.02	6.32
D1750V2	1125	2-16-2018	1750	1g	36.50	36.80
				10g	19.30	19.50
D1900V2	5d199	3-15-2018	1900	1g	40.40	39.60
				10g	21.10	20.80
D2450V2	960	3-20-2018	2450	1g	53.60	49.80
				10g	25.10	23.50
D2600V2	1097	1-17-2018	2600	1g	56.40	54.40
				10g	25.30	24.20

Note(s):

Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations (D2600, SN : 1097)

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-29-2019	D2600V2	1097	Head	1g	6.05	60.50	56.40	7.27	1, 2
				10g	2.64	26.40	25.30	4.35	
2-11-2019	D2450V2	960	Head	1g	5.53	55.30	53.60	3.17	3, 4
				10g	2.49	24.90	25.10	-0.80	
2-18-2019	D2450V2	960	Body	1g	5.09	50.90	49.80	2.21	
				10g	2.29	22.90	23.50	-2.55	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-28-2019	D750V3	1122	Body	1g	0.91	9.08	8.63	5.21	5, 6
				10g	0.60	6.03	5.72	5.42	
1-29-2019	D835V2	4d194	Body	1g	0.99	9.91	9.61	3.12	
				10g	0.65	6.50	6.32	2.85	
1-30-2019	D750V3	1122	Head	1g	0.80	7.99	8.22	-2.80	
				10g	0.53	5.27	5.35	-1.50	
2-7-2019	D835V2	4d194	Body	1g	1.00	10.00	9.61	4.06	
				10g	0.66	6.58	6.32	4.11	
2-18-2019	D835V2	4d194	Body	1g	0.97	9.66	9.61	0.52	
				10g	0.63	6.32	6.32	0.00	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-30-2019	D835V2	4d194	Head	1g	0.98	9.84	9.36	5.13	7, 8
				10g	0.65	6.47	6.02	7.48	
2-11-2019	D1750V2	1125	Body	1g	3.69	36.90	36.80	0.27	
				10g	1.94	19.40	19.50	-0.51	
2-12-2019	D750V3	1122	Body	1g	0.84	8.37	8.63	-3.01	
				10g	0.56	5.60	5.72	-2.10	
2-16-2019	D835V2	4d194	Head	1g	0.97	9.70	9.36	3.63	
				10g	0.64	6.39	6.02	6.15	

SAR 4 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-28-2019	D2600V2	1097	Body	1g	5.38	53.80	54.40	-1.10	
				10g	2.31	23.10	24.20	-4.55	
1-30-2019	D1900V2	5d199	Head	1g	4.03	40.30	40.40	-0.25	
				10g	2.09	20.90	21.10	-0.95	
1-31-2019	D1900V2	5d199	Body	1g	4.29	42.90	39.60	8.33	9, 10
				10g	2.26	22.60	20.80	8.65	
2-12-2019	D1750V2	1125	Head	1g	3.44	34.40	36.50	-5.75	11, 12
				10g	1.80	18.00	19.30	-6.74	
2-13-2019	D1900V2	5d199	Body	1g	4.20	42.00	39.60	6.06	
				10g	2.22	22.20	20.80	6.73	
2-18-2019	D1900V2	5d199	Body	1g	4.21	42.10	39.60	6.31	
				10g	2.21	22.10	20.80	6.25	
2-20-2019	D1900V2	5d199	Head	1g	3.89	38.90	40.40	-3.71	
				10g	2.01	20.10	21.10	-4.74	

9. Conducted Output Power Measurements

9.1 GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pw r	Frame Pw r	Burst Pw r	Frame Pw r
GSM (Voice)	CS1	1	128	824.2	32.5	23.4	33.5	24.5
			190	836.6	32.6	23.5		
			251	848.8	32.7	23.7		
GPRS (GMSK)	CS1	1	128	824.2	32.5	23.4	33.5	24.5
			190	836.6	32.4	23.4		
			251	848.8	32.5	23.5		
		2	128	824.2	31.1	25.1	31.5	25.5
			190	836.6	31.1	25.1		
			251	848.8	31.1	25.1		
		3	128	824.2	29.4	25.1	30.0	25.7
			190	836.6	29.6	25.4		
			251	848.8	29.7	25.5		
		4	128	824.2	27.7	24.7	28.0	25.0
			190	836.6	27.8	24.8		
			251	848.8	27.9	24.9		
EGPRS (8PSK)	MCS5	1	128	824.2	26.3	17.2	27.0	18.0
			190	836.6	26.2	17.2		
			251	848.8	26.3	17.3		
		2	128	824.2	24.5	18.5	25.0	19.0
			190	836.6	24.5	18.5		
			251	848.8	24.6	18.6		
		3	128	824.2	23.0	18.8	23.5	19.2
			190	836.6	22.9	18.6		
			251	848.8	23.1	18.8		
		4	128	824.2	20.9	17.9	21.5	18.5
			190	836.6	21.1	18.1		
			251	848.8	21.2	18.2		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.
- GPRS/EGPRS are not support to VoIP.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pw r	Frame Pw r	Burst Pw r	Frame Pw r
GSM (Voice)	CS1	1	512	1850.2	29.3	20.2	30.5	21.5
			661	1880.0	29.5	20.5		
			810	1909.8	29.4	20.4		
GPRS (GMSK)	CS1	1	512	1850.2	29.3	20.3	30.5	21.5
			661	1880.0	29.3	20.3		
			810	1909.8	29.2	20.2		
		2	512	1850.2	27.6	21.6	28.0	22.0
			661	1880.0	27.4	21.4		
			810	1909.8	27.4	21.4		
		3	512	1850.2	25.9	21.7	26.5	22.2
			661	1880.0	25.8	21.6		
			810	1909.8	25.9	21.6		
		4	512	1850.2	24.0	21.0	25.0	22.0
			661	1880.0	24.0	21.0		
			810	1909.8	24.1	21.1		
EGPRS (8PSK)	MCS5	1	512	1850.2	25.5	16.4	26.5	17.5
			661	1880.0	25.6	16.6		
			810	1909.8	25.6	16.6		
		2	512	1850.2	23.2	17.2	24.0	18.0
			661	1880.0	23.4	17.4		
			810	1909.8	23.5	17.4		
		3	512	1850.2	21.6	17.4	22.5	18.2
			661	1880.0	21.9	17.6		
			810	1909.8	22.0	17.8		
		4	512	1850.2	20.0	16.9	20.5	17.5
			661	1880.0	20.0	17.0		
			810	1909.8	20.2	17.2		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.
- GPRS/EGPRS are not support to VoIP.

9.2 W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

W-CDMA Band II Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Hotspot Reduced Average Power (dBm)			Proximity sensor Reduced Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.5	N/A	24.5	20.6	N/A	21.5	20.5	N/A	21.5
		9400	1880.0	23.9			20.3			20.3		
		9538	1907.6	23.9			20.7			20.7		
HSDPA	Subtest 1	9262	1852.4	23.5	0	24.0	20.6	0	21.0	20.6	0	21.0
		9400	1880.0	23.9			20.3			20.3		
		9538	1907.6	23.8			20.7			20.7		
	Subtest 2	9262	1852.4	23.1	0	24.0	20.6	0	21.0	20.7	0	21.0
		9400	1880.0	23.5			20.4			20.4		
		9538	1907.6	23.4			20.7			20.7		
	Subtest 3	9262	1852.4	22.1	0.5	23.5	20.7	0	21.0	20.7	0	21.0
		9400	1880.0	22.6			20.4			20.4		
		9538	1907.6	22.5			20.8			20.8		
	Subtest 4	9262	1852.4	22.1	0.5	23.5	20.7	0	21.0	20.7	0	21.0
		9400	1880.0	22.6			20.4			20.4		
		9538	1907.6	22.5			20.8			20.8		
HSUPA	Subtest 1	9262	1852.4	22.0	0	24.0	19.6	0	21.0	19.7	0	21.0
		9400	1880.0	22.4			19.2			19.3		
		9538	1907.6	22.3			19.8			19.8		
	Subtest 2	9262	1852.4	19.8	2	22.0	19.7	0	21.0	19.7	0	21.0
		9400	1880.0	20.2			19.4			19.4		
		9538	1907.6	20.1			19.9			19.9		
	Subtest 3	9262	1852.4	22.0	1	23.0	19.8	0	21.0	19.7	0	21.0
		9400	1880.0	22.5			19.3			19.3		
		9538	1907.6	22.4			19.9			19.9		
	Subtest 4	9262	1852.4	19.8	2	22.0	19.7	0	21.0	19.8	0	21.0
		9400	1880.0	20.2			19.3			19.4		
		9538	1907.6	20.1			19.9			19.9		
	Subtest 5	9262	1852.4	23.7	0	24.0	20.7	0	21.0	20.7	0	21.0
		9400	1880.0	24.0			20.4			20.4		
		9538	1907.6	23.9			20.7			20.7		

W-CDMA Band IV Measured Results

Mode	UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Hotspot Reduced Average Power (dBm)			Proximity sensor Reduced Average Power (dBm)			
			Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	23.9	N/A	25.0	21.0	N/A	22.0	21.0	N/A	22.0
		1413	1732.6	24.5			21.6			21.5		
		1513	1752.6	24.3			21.4			21.3		
HSDPA	Subtest 1	1312	1712.4	23.9	0	24.5	21.0	0	22.0	21.0	0	22.0
		1413	1732.6	24.4			21.6			21.6		
		1513	1752.6	24.3			21.3			21.3		
	Subtest 2	1312	1712.4	23.0	0	24.5	21.1	0	22.0	21.1	0	22.0
		1413	1732.6	23.6			21.6			21.6		
		1513	1752.6	23.4			21.4			21.4		
	Subtest 3	1312	1712.4	22.1	0.5	24.0	21.1	0	22.0	21.1	0	22.0
		1413	1732.6	22.7			21.7			21.7		
		1513	1752.6	22.4			21.5			21.5		
	Subtest 4	1312	1712.4	22.1	0.5	24.0	21.1	0	22.0	21.1	0	22.0
		1413	1732.6	22.7			21.7			21.7		
		1513	1752.6	22.5			21.5			21.5		
HSUPA	Subtest 1	1312	1712.4	21.5	1	23.5	20.3	0	22.0	20.1	0	22.0
		1413	1732.6	22.1			20.8			20.8		
		1513	1752.6	21.9			20.6			20.6		
	Subtest 2	1312	1712.4	19.1	3	21.5	19.0	2	20.0	19.0	2	20.0
		1413	1732.6	19.7			19.7			19.6		
		1513	1752.6	19.4			19.4			19.4		
	Subtest 3	1312	1712.4	21.6	1	23.5	20.3	1	21.0	20.3	1	21.0
		1413	1732.6	22.1			20.8			20.9		
		1513	1752.6	22.0			20.7			20.7		
	Subtest 4	1312	1712.4	19.1	3	21.5	19.0	2	20.0	19.1	2	20.0
		1413	1732.6	19.7			19.6			19.6		
		1513	1752.6	19.4			19.4			19.4		
	Subtest 5	1312	1712.4	23.6	0	24.5	21.1	0	22.0	21.1	0	22.0
		1413	1732.6	24.1			21.7			21.7		
		1513	1752.6	23.9			21.4			21.5		

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.9	N/A	25.5
		4183	836.6	24.9		
		4233	846.6	24.7		
HSDPA	Subtest 1	4132	826.4	23.4	0	23.5
		4183	836.6	23.4		
		4233	846.6	23.2		
	Subtest 2	4132	826.4	22.5	0	23.5
		4183	836.6	22.4		
		4233	846.6	22.3		
	Subtest 3	4132	826.4	22.5	0.5	23.0
		4183	836.6	22.5		
		4233	846.6	22.3		
	Subtest 4	4132	826.4	21.4	0.5	23.0
		4183	836.6	21.4		
		4233	846.6	21.2		
HSUPA	Subtest 1	4132	826.4	22.5	1	24.0
		4183	836.6	22.4		
		4233	846.6	22.3		
	Subtest 2	4132	826.4	20.5	3	22.0
		4183	836.6	20.4		
		4233	846.6	20.3		
	Subtest 3	4132	826.4	22.5	1	24.0
		4183	836.6	22.4		
		4233	846.6	22.3		
	Subtest 4	4132	826.4	20.5	3	22.0
		4183	836.6	20.4		
		4233	846.6	20.3		
	Subtest 5	4132	826.4	24.9	0	25.0
		4183	836.6	24.9		
		4233	846.6	24.8		

9.3 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
				10, 15, 20	≥ 50 (NOTE 1)
NS_05	6.6.3.3.1	1	15, 20	Table 6.2.4-18 (NOTE 2)	
			10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
				1.4, 3, 5, 10, 15	Table 6.2.4-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
				3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
				10, 15, 20	≥ 1
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
				6.6.2.2.1 6.6.3.3.15	Table 6.2.4-16
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
				6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	Table 6.2.4-24
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

Max power Results

LTE Band 2 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				18700	18900	19100		
				1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	24.3	24.5	24.5	0.0	25
		1	49	24.3	24.4	24.5	0.0	25
		1	99	24.3	24.4	23.7	0.0	25
		50	0	23.3	23.4	23.6	1.0	24
		50	24	23.3	23.4	23.6	1.0	24
		50	50	23.3	23.4	23.6	1.0	24
		100	0	23.3	23.4	23.6	1.0	24
	16QAM	1	0	23.4	23.5	23.5	1.0	24
		1	49	23.4	23.5	23.5	1.0	24
		1	99	23.3	23.4	23.2	1.0	24
		50	0	22.3	22.5	22.6	2.0	23
		50	24	22.3	22.5	22.6	2.0	23
		50	50	22.3	22.5	22.5	2.0	23
		100	0	22.4	22.5	22.6	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18675	18900	19125		
				1857.5 MHz	1880 MHz	1902.5 MHz		
15 MHz	QPSK	1	0	24.2	24.5	24.5	0.0	25
		1	37	24.2	24.4	24.5	0.0	25
		1	74	24.2	24.4	23.9	0.0	25
		36	0	23.3	23.5	23.6	1.0	24
		36	20	23.3	23.5	23.5	1.0	24
		36	39	23.3	23.5	23.5	1.0	24
		75	0	23.3	23.4	23.5	1.0	24
	16QAM	1	0	23.2	23.4	23.7	1.0	24
		1	37	23.2	23.4	23.6	1.0	24
		1	74	23.2	23.4	23.4	1.0	24
		36	0	22.3	22.5	22.5	2.0	23
		36	20	22.3	22.5	22.5	2.0	23
		36	39	22.3	22.5	22.6	2.0	23
		75	0	22.3	22.5	22.6	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18650	18900	19150		
				1855 MHz	1880 MHz	1905 MHz		
10 MHz	QPSK	1	0	24.2	24.5	24.4	0.0	25
		1	25	24.2	24.5	24.4	0.0	25
		1	49	24.2	24.5	24.2	0.0	25
		25	0	23.2	23.4	23.5	1.0	24
		25	12	23.1	23.4	23.5	1.0	24
		25	25	23.2	23.4	23.4	1.0	24
		50	0	23.1	23.4	23.5	1.0	24
	16QAM	1	0	23.1	23.6	23.3	1.0	24
		1	25	23.0	23.5	23.3	1.0	24
		1	49	23.1	23.6	23.3	1.0	24
		25	0	22.2	22.5	22.5	2.0	23
		25	12	22.2	22.5	22.6	2.0	23
		25	25	22.2	22.5	22.6	2.0	23
		50	0	22.2	22.5	22.5	2.0	23

LTE Band 2 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				18625	18900	19175		
				1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	24.1	24.4	24.5	0.0	25
		1	12	24.1	24.4	24.5	0.0	25
		1	24	24.1	24.4	24.5	0.0	25
		12	0	23.1	23.4	23.5	1.0	24
		12	7	23.1	23.4	23.5	1.0	24
		12	13	23.1	23.4	23.5	1.0	24
		25	0	23.1	23.4	23.5	1.0	24
	16QAM	1	0	22.8	23.3	23.5	1.0	24
		1	12	22.8	23.3	23.5	1.0	24
		1	24	22.8	23.3	23.5	1.0	24
		12	0	22.1	22.5	22.5	2.0	23
		12	7	22.1	22.5	22.5	2.0	23
		12	13	22.1	22.5	22.6	2.0	23
		25	0	22.2	22.5	22.5	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18615	18900	19185		
				1851.5 MHz	1880 MHz	1908.5 MHz		
3 MHz	QPSK	1	0	24.1	24.4	24.5	0.0	25
		1	8	24.1	24.4	24.5	0.0	25
		1	14	24.1	24.4	24.5	0.0	25
		8	0	23.1	23.4	23.5	1.0	24
		8	4	23.1	23.4	23.5	1.0	24
		8	7	23.1	23.4	23.5	1.0	24
		15	0	23.1	23.4	23.5	1.0	24
	16QAM	1	0	22.9	23.6	23.4	1.0	24
		1	8	23.0	23.5	23.4	1.0	24
		1	14	23.2	23.6	23.4	1.0	24
		8	0	22.2	22.5	22.4	2.0	23
		8	4	22.2	22.5	22.5	2.0	23
		8	7	22.3	22.5	22.4	2.0	23
		15	0	22.2	22.5	22.5	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18607	18900	19193		
				1850.7 MHz	1880 MHz	1909.3 MHz		
1.4 MHz	QPSK	1	0	24.2	24.4	24.4	0.0	25
		1	3	24.2	24.4	24.4	0.0	25
		1	5	24.2	24.4	24.5	0.0	25
		3	0	24.1	24.3	24.3	0.0	25
		3	1	24.1	24.3	24.3	0.0	25
		3	3	24.1	24.4	24.4	0.0	25
		6	0	23.2	23.4	23.4	1.0	24
	16QAM	1	0	23.0	23.2	23.0	1.0	24
		1	3	23.1	23.3	23.1	1.0	24
		1	5	23.1	23.2	23.0	1.0	24
		3	0	23.1	23.4	23.5	1.0	24
		3	1	23.1	23.4	23.5	1.0	24
		3	3	23.1	23.4	23.5	1.0	24
		6	0	22.1	22.5	22.5	2.0	23

LTE Band 4 Measured Results

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20450	20525	20600		
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0		24.6		0.0	25.5
		1	25		24.5		0.0	25.5
		1	49		24.5		0.0	25.5
		25	0		23.5		1.0	24.5
		25	12		23.5		1.0	24.5
		25	25		23.5		1.0	24.5
		50	0		23.5		1.0	24.5
	16QAM	1	0		23.5		1.0	24.5
		1	25		23.4		1.0	24.5
		1	49		23.4		1.0	24.5
		25	0		22.5		2.0	23.5
		25	12		22.4		2.0	23.5
		25	25		22.4		2.0	23.5
		50	0		22.4		2.0	23.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20425	20525	20625		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	25.1	24.5	24.2	0.0	25.5
		1	12	25.0	24.5	24.2	0.0	25.5
		1	24	25.0	24.5	24.2	0.0	25.5
		12	0	24.1	23.5	23.3	1.0	24.5
		12	7	24.1	23.5	23.3	1.0	24.5
		12	13	24.0	23.5	23.3	1.0	24.5
		25	0	24.0	23.5	23.3	1.0	24.5
	16QAM	1	0	23.9	23.3	23.1	1.0	24.5
		1	12	23.9	23.3	23.2	1.0	24.5
		1	24	23.8	23.3	23.2	1.0	24.5
		12	0	23.0	22.4	22.2	2.0	23.5
		12	7	23.0	22.4	22.2	2.0	23.5
		12	13	23.0	22.4	22.2	2.0	23.5
		25	0	23.0	22.4	22.1	2.0	23.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	25.0	24.5	24.3	0.0	25.5
		1	8	25.0	24.5	24.3	0.0	25.5
		1	14	24.9	24.5	24.2	0.0	25.5
		8	0	24.1	23.5	23.2	1.0	24.5
		8	4	24.1	23.5	23.2	1.0	24.5
		8	7	24.1	23.5	23.2	1.0	24.5
		15	0	24.1	23.5	23.2	1.0	24.5
	16QAM	1	0	24.1	23.4	23.1	1.0	24.5
		1	8	24.0	23.4	23.0	1.0	24.5
		1	14	24.1	23.4	22.8	1.0	24.5
		8	0	23.1	22.5	22.0	2.0	23.5
		8	4	23.1	22.4	22.0	2.0	23.5
		8	7	23.1	22.4	22.0	2.0	23.5
		15	0	23.0	22.4	22.0	2.0	23.5

LTE Band 5 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	25.0	24.5	24.2	0.0	25.5
		1	3	25.0	24.5	24.1	0.0	25.5
		1	5	25.0	24.4	24.1	0.0	25.5
		3	0	25.0	24.5	24.2	0.0	25.5
		3	1	25.0	24.5	24.1	0.0	25.5
		3	3	25.0	24.5	24.1	0.0	25.5
	16QAM	6	0	24.1	23.5	23.2	1.0	24.5
		1	0	24.0	23.5	23.1	1.0	24.5
		1	3	23.8	23.2	23.0	1.0	24.5
		1	5	24.0	23.1	23.1	1.0	24.5
		3	0	24.1	23.4	23.2	1.0	24.5
		3	1	24.1	23.4	23.1	1.0	24.5
		3	3	24.1	23.4	23.1	1.0	24.5
		6	0	23.0	22.4	22.1	2.0	23.5

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				23060	23095	23130		
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0		24.4		0.0	25.5
		1	25		24.3		0.0	25.5
		1	49		24.3		0.0	25.5
		25	0		23.3		1.0	24.5
		25	12		23.3		1.0	24.5
		25	25		23.2		1.0	24.5
	16QAM	50	0		23.3		1.0	24.5
		1	0		23.2		1.0	24.5
		1	25		23.2		1.0	24.5
		1	49		23.1		1.0	24.5
		25	0		22.4		2.0	23.5
		25	12		22.3		2.0	23.5
		25	25		22.3		2.0	23.5
		50	0		22.3		2.0	23.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23035	23095	23155		
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	24.4	24.3	24.1	0.0	25.5
		1	12	24.4	24.3	24.1	0.0	25.5
		1	24	24.4	24.2	24.1	0.0	25.5
		12	0	23.4	23.3	23.2	1.0	24.5
		12	7	23.4	23.3	23.1	1.0	24.5
		12	13	23.4	23.2	23.1	1.0	24.5
	16QAM	25	0	23.4	23.3	23.1	1.0	24.5
		1	0	23.2	23.0	22.9	1.0	24.5
		1	12	23.2	23.0	22.9	1.0	24.5
		1	24	23.1	23.0	22.9	1.0	24.5
		12	0	22.4	22.3	22.1	2.0	23.5
		12	7	22.4	22.3	22.2	2.0	23.5
		12	13	22.4	22.2	22.1	2.0	23.5
		25	0	22.4	22.3	22.1	2.0	23.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23025	23095	23165		
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	24.3	24.3	24.2	0.0	25.5
		1	8	24.3	24.3	24.2	0.0	25.5
		1	14	24.3	24.3	24.2	0.0	25.5
		8	0	23.3	23.3	23.2	1.0	24.5
		8	4	23.3	23.3	23.1	1.0	24.5
		8	7	23.3	23.3	23.1	1.0	24.5
	16QAM	15	0	23.3	23.2	23.1	1.0	24.5
		1	0	23.1	23.1	22.9	1.0	24.5
		1	8	23.1	23.1	22.9	1.0	24.5
		1	14	23.4	23.1	23.1	1.0	24.5
		8	0	22.4	22.4	22.1	2.0	23.5
		8	4	22.3	22.3	22.1	2.0	23.5
		8	7	22.3	22.3	22.1	2.0	23.5
		15	0	22.3	22.2	22.0	2.0	23.5

LTE Band 12 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				23017	23095	23173		
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.2	24.2	24.1	0.0	25.5
		1	3	24.2	24.2	24.1	0.0	25.5
		1	5	24.2	24.3	24.1	0.0	25.5
		3	0	24.3	24.2	24.1	0.0	25.5
		3	1	24.3	24.2	24.1	0.0	25.5
		3	3	24.3	24.2	24.1	0.0	25.5
	16QAM	6	0	23.3	23.2	23.1	1.0	24.5
		1	0	23.2	23.1	22.9	1.0	24.5
		1	3	23.2	22.9	22.8	1.0	24.5
		1	5	23.2	23.1	23.0	1.0	24.5
		3	0	23.3	23.2	23.0	1.0	24.5
		3	1	23.4	23.2	23.0	1.0	24.5
		3	3	23.3	23.2	23.0	1.0	24.5
		6	0	22.1	22.3	21.8	2.0	23.5

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 13 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				Measured Pwr (dBm)		MPR	Tune-up Limit
				23230	782 MHz		
10 MHz	QPSK	1	0	23.0		0.0	24
		1	25	23.0		0.0	24
		1	49	22.9		0.0	24
		25	0	21.9		1.0	23
		25	12	21.9		1.0	23
		25	25	21.9		1.0	23
		50	0	21.9		1.0	23
	16QAM	1	0	21.9		1.0	23
		1	25	21.9		1.0	23
		1	49	21.8		1.0	23
		25	0	21.1		2.0	22
		25	12	21.0		2.0	22
		25	25	21.0		2.0	22
		50	0	20.9		2.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			
				Measured Pwr (dBm)		MPR	Tune-up Limit
				23230	782 MHz		
5 MHz	QPSK	1	0	23.1		0.0	24
		1	12	23.0		0.0	24
		1	24	23.0		0.0	24
		12	0	22.0		1.0	23
		12	7	21.9		1.0	23
		12	13	21.9		1.0	23
		25	0	21.9		1.0	23
	16QAM	1	0	21.8		1.0	23
		1	12	21.7		1.0	23
		1	24	21.7		1.0	23
		12	0	20.9		2.0	22
		12	7	20.9		2.0	22
		12	13	20.9		2.0	22
		25	0	21.0		2.0	22

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Measured Results

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 66 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				132072	132322	132572		
				1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	24.2	24.4	24.7	0.0	25
		1	49	24.2	24.4	24.5	0.0	25
		1	99	24.2	24.3	24.4	0.0	25
		50	0	23.1	23.3	23.5	1.0	24
		50	24	23.1	23.2	23.5	1.0	24
		50	50	23.1	23.2	23.4	1.0	24
	16QAM	100	0	23.1	23.2	23.5	1.0	24
		1	0	23.2	23.1	23.5	1.0	24
		1	49	23.2	23.1	23.4	1.0	24
		1	99	23.2	23.0	23.3	1.0	24
		50	0	22.2	22.4	22.6	2.0	23
		50	24	22.2	22.3	22.5	2.0	23
		50	50	22.2	22.3	22.5	2.0	23
		100	0	22.2	22.4	22.5	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				132047	132322	132597		
				1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	QPSK	1	0	24.0	24.5	24.6	0.0	25
		1	37	24.0	24.4	24.5	0.0	25
		1	74	24.0	24.4	24.4	0.0	25
		36	0	23.0	23.3	23.6	1.0	24
		36	20	23.0	23.3	23.5	1.0	24
		36	39	23.0	23.3	23.4	1.0	24
	16QAM	75	0	23.0	23.3	23.5	1.0	24
		1	0	23.0	23.2	23.6	1.0	24
		1	37	22.9	23.2	23.5	1.0	24
		1	74	23.0	23.2	23.4	1.0	24
		36	0	22.2	22.3	22.5	2.0	23
		36	20	22.1	22.3	22.5	2.0	23
		36	39	22.1	22.3	22.5	2.0	23
		75	0	22.1	22.4	22.5	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				132022	132322	132622		
				1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	23.9	24.4	24.6	0.0	25
		1	25	23.9	24.4	24.6	0.0	25
		1	49	23.8	24.4	24.5	0.0	25
		25	0	22.9	23.3	23.5	1.0	24
		25	12	22.9	23.3	23.4	1.0	24
		25	25	22.9	23.3	23.4	1.0	24
	16QAM	50	0	22.9	23.3	23.4	1.0	24
		1	0	22.9	23.3	23.3	1.0	24
		1	25	22.8	23.2	23.3	1.0	24
		1	49	22.8	23.2	23.2	1.0	24
		25	0	22.0	22.4	22.6	2.0	23
		25	12	22.0	22.4	22.6	2.0	23
		25	25	22.0	22.4	22.5	2.0	23
		50	0	22.0	22.4	22.5	2.0	23

LTE Band 66 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				131997	132322	132647		
				1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	23.8	24.4	24.4	0.0	25
		1	12	23.8	24.4	24.4	0.0	25
		1	24	23.8	24.4	24.4	0.0	25
		12	0	22.8	23.3	23.4	1.0	24
		12	7	22.8	23.2	23.4	1.0	24
		12	13	22.8	23.3	23.4	1.0	24
		25	0	22.8	23.3	23.4	1.0	24
	16QAM	1	0	22.7	23.1	23.1	1.0	24
		1	12	22.8	23.1	23.1	1.0	24
		1	24	22.7	23.1	23.1	1.0	24
		12	0	21.9	22.4	22.4	2.0	23
		12	7	21.9	22.4	22.4	2.0	23
		12	13	21.9	22.4	22.4	2.0	23
		25	0	21.9	22.4	22.5	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131987	132322	132657		
				1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	23.7	24.3	24.5	0.0	25
		1	8	23.7	24.4	24.5	0.0	25
		1	14	23.8	24.4	24.5	0.0	25
		8	0	22.8	23.3	23.4	1.0	24
		8	4	22.8	23.3	23.4	1.0	24
		8	7	22.8	23.3	23.4	1.0	24
		15	0	22.8	23.2	23.4	1.0	24
	16QAM	1	0	22.7	23.3	23.2	1.0	24
		1	8	22.7	23.3	23.3	1.0	24
		1	14	22.8	23.3	23.3	1.0	24
		8	0	21.9	22.4	22.4	2.0	23
		8	4	21.9	22.4	22.4	2.0	23
		8	7	21.9	22.4	22.4	2.0	23
		15	0	21.8	22.3	22.4	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131979	132322	132665		
				1710.7 MHz	1745 MHz	1779.3 MHz		
1.4 MHz	QPSK	1	0	23.7	24.3	24.5	0.0	25
		1	3	23.7	24.2	24.4	0.0	25
		1	5	23.8	24.3	24.5	0.0	25
		3	0	23.7	24.2	24.4	0.0	25
		3	1	23.7	24.3	24.4	0.0	25
		3	3	23.7	24.3	24.4	0.0	25
		6	0	22.8	23.2	23.4	1.0	24
	16QAM	1	0	22.8	23.1	23.4	1.0	24
		1	3	22.7	23.0	23.3	1.0	24
		1	5	22.9	23.0	23.3	1.0	24
		3	0	22.7	23.2	23.4	1.0	24
		3	1	22.7	23.1	23.4	1.0	24
		3	3	22.7	23.1	23.4	1.0	24
		6	0	21.9	22.2	22.6	2.0	23

Reduced power Results

LTE Band 2 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Hotspot Reduced Average Power (dBm)					Proximity sensor Reduced Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				18700	18900	19100			18700	18900	19100		
				1860 MHz	1880 MHz	1900 MHz			1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	20.6	20.4	20.9	0.0	22	20.6	20.4	20.9	0.0	22
		1	49	20.6	20.4	20.9	0.0	22	20.5	20.4	20.8	0.0	22
		1	99	20.5	20.3	20.2	0.0	22	20.5	20.3	20.5	0.0	22
		50	0	20.7	20.4	20.9	0.0	22	20.6	20.4	20.9	0.0	22
		50	24	20.6	20.4	20.8	0.0	22	20.6	20.4	20.8	0.0	22
		50	50	20.6	20.3	20.8	0.0	22	20.6	20.3	20.8	0.0	22
		100	0	20.6	20.4	20.8	0.0	22	20.6	20.4	20.8	0.0	22
	16QAM	1	0	20.7	20.4	20.9	0.0	22	20.7	20.4	20.8	0.0	22
		1	49	20.7	20.3	20.8	0.0	22	20.6	20.3	20.7	0.0	22
		1	99	20.6	20.2	20.5	0.0	22	20.6	20.2	20.7	0.0	22
		50	0	20.6	20.5	20.9	0.0	22	20.6	20.4	20.9	0.0	22
		50	24	20.6	20.4	20.9	0.0	22	20.6	20.4	20.9	0.0	22
		50	50	20.5	20.4	20.8	0.0	22	20.6	20.4	20.8	0.0	22
		100	0	20.7	20.4	20.9	0.0	22	20.7	20.5	20.9	0.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				18675	18900	19125			18675	18900	19125		
				1857.5 MHz	1880 MHz	1902.5 MHz			1857.5 MHz	1880 MHz	1902.5 MHz		
				15 MHz	QPSK	1	0	20.7	20.4	21.0	0.0	22	20.7
1	37	20.7	20.4			21.0	0.0	22	20.7	20.4	20.9	0.0	22
1	74	20.6	20.3			20.8	0.0	22	20.6	20.3	20.9	0.0	22
36	0	20.7	20.4			21.0	0.0	22	20.7	20.4	21.0	0.0	22
36	20	20.7	20.4			21.0	0.0	22	20.7	20.4	21.0	0.0	22
36	39	20.6	20.3			20.9	0.0	22	20.7	20.4	20.9	0.0	22
75	0	20.7	20.4			21.0	0.0	22	20.7	20.4	21.0	0.0	22
16QAM	1	0	20.9		20.4	20.9	0.0	22	20.6	20.3	20.9	0.0	22
	1	37	20.9		20.3	20.9	0.0	22	20.6	20.2	20.8	0.0	22
	1	74	20.7		20.3	20.8	0.0	22	20.6	20.2	20.8	0.0	22
	36	0	20.7		20.4	21.0	0.0	22	20.7	20.4	21.0	0.0	22
	36	20	20.7		20.4	21.0	0.0	22	20.7	20.4	21.0	0.0	22
	36	39	20.6		20.3	21.0	0.0	22	20.7	20.4	21.0	0.0	22
	75	0	20.7		20.4	20.9	0.0	22	20.7	20.4	21.0	0.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				18650	18900	19150			18650	18900	19150		
				1855 MHz	1880 MHz	1905 MHz			1855 MHz	1880 MHz	1905 MHz		
				10 MHz	QPSK	1	0	20.8	20.4	21.0	0.0	22	20.8
1	25	20.8	20.4			21.0	0.0	22	20.8	20.3	21.0	0.0	22
1	49	20.7	20.3			21.0	0.0	22	20.8	20.3	21.0	0.0	22
25	0	20.8	20.4			21.0	0.0	22	20.8	20.4	21.0	0.0	22
25	12	20.7	20.4			20.9	0.0	22	20.7	20.4	21.0	0.0	22
25	25	20.7	20.3			20.9	0.0	22	20.7	20.3	21.0	0.0	22
50	0	20.7	20.4			21.0	0.0	22	20.7	20.4	21.0	0.0	22
16QAM	1	0	20.6		20.3	21.0	0.0	22	20.7	20.3	21.0	0.0	22
	1	25	20.6		20.3	21.1	0.0	22	20.7	20.3	21.0	0.0	22
	1	49	20.5		20.3	21.0	0.0	22	20.7	20.3	20.9	0.0	22
	25	0	20.8		20.4	21.0	0.0	22	20.8	20.4	21.0	0.0	22
	25	12	20.8		20.4	21.0	0.0	22	20.8	20.4	21.0	0.0	22
	25	25	20.8		20.4	21.0	0.0	22	20.7	20.4	21.0	0.0	22
	50	0	20.8		20.4	20.9	0.0	22	20.8	20.4	20.9	0.0	22

LTE Band 2 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Hotspot Reduced Average Power (dBm)					Proximity sensor Reduced Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				18625	18900	19175			18625	18900	19175		
				1852.5 MHz	1880 MHz	1907.5 MHz			1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	20.8	20.2	21.0	0.0	22	20.8	20.3	21.0	0.0	22
		1	12	20.9	20.2	21.0	0.0	22	20.8	20.3	21.0	0.0	22
		1	24	20.8	20.2	21.0	0.0	22	20.8	20.3	21.1	0.0	22
		12	0	20.8	20.3	21.0	0.0	22	20.8	20.4	21.0	0.0	22
		12	7	20.8	20.3	21.0	0.0	22	20.8	20.4	21.0	0.0	22
		12	13	20.8	20.3	21.0	0.0	22	20.8	20.4	21.0	0.0	22
	16QAM	25	0	20.8	20.4	21.0	0.0	22	20.8	20.4	21.0	0.0	22
		1	0	20.8	20.3	20.8	0.0	22	20.6	20.2	20.9	0.0	22
		1	12	20.8	20.3	20.8	0.0	22	20.6	20.2	20.8	0.0	22
		1	24	20.8	20.2	20.8	0.0	22	20.6	20.2	20.9	0.0	22
		12	0	20.9	20.3	21.0	0.0	22	20.9	20.4	21.0	0.0	22
		12	7	20.9	20.3	21.0	0.0	22	20.8	20.3	21.0	0.0	22
12	13	20.9	20.3	21.0	0.0	22	20.8	20.3	21.0	0.0	22		
25	0	20.9	20.4	21.1	0.0	22	20.8	20.3	21.1	0.0	22		
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					Measured Pwr (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				18615	18900	19185			18615	18900	19185		
				1851.5 MHz	1880 MHz	1908.5 MHz			1851.5 MHz	1880 MHz	1908.5 MHz		
3 MHz	QPSK	1	0	20.8	20.4	21.0	0.0	22	20.8	20.4	21.0	0.0	22
		1	8	20.8	20.4	21.1	0.0	22	20.8	20.4	21.0	0.0	22
		1	14	20.8	20.4	21.0	0.0	22	20.8	20.4	21.1	0.0	22
		8	0	20.8	20.4	21.0	0.0	22	20.8	20.4	21.0	0.0	22
		8	4	20.8	20.4	21.0	0.0	22	20.7	20.3	21.0	0.0	22
		8	7	20.8	20.3	21.0	0.0	22	20.7	20.4	21.0	0.0	22
	16QAM	15	0	20.8	20.3	21.0	0.0	22	20.8	20.4	21.0	0.0	22
		1	0	20.8	20.3	21.3	0.0	22	20.7	20.3	21.0	0.0	22
		1	8	20.8	20.3	21.2	0.0	22	20.7	20.3	21.1	0.0	22
		1	14	20.8	20.1	21.3	0.0	22	20.5	20.3	20.8	0.0	22
		8	0	20.8	20.5	21.1	0.0	22	20.6	20.4	21.1	0.0	22
		8	4	20.8	20.5	21.1	0.0	22	20.7	20.4	21.0	0.0	22
8	7	20.8	20.5	21.1	0.0	22	20.7	20.4	21.0	0.0	22		
15	0	20.8	20.4	21.0	0.0	22	20.7	20.4	21.0	0.0	22		
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					Measured Pwr (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				18607	18900	19193			18607	18900	19193		
				1850.7 MHz	1880 MHz	1909.3 MHz			1850.7 MHz	1880 MHz	1909.3 MHz		
1.4 MHz	QPSK	1	0	20.8	20.3	21.0	0.0	22	20.7	20.4	21.0	0.0	22
		1	3	20.7	20.2	21.0	0.0	22	20.7	20.3	21.1	0.0	22
		1	5	20.7	20.2	20.9	0.0	22	20.8	20.4	21.1	0.0	22
		3	0	20.7	20.3	20.9	0.0	22	20.7	20.4	20.9	0.0	22
		3	1	20.8	20.3	20.9	0.0	22	20.8	20.3	21.0	0.0	22
		3	3	20.8	20.3	20.9	0.0	22	20.8	20.3	21.0	0.0	22
	16QAM	6	0	20.7	20.3	21.0	0.0	22	20.7	20.3	21.0	0.0	22
		1	0	20.8	20.4	20.9	0.0	22	20.4	20.3	20.7	0.0	22
		1	3	20.7	20.0	20.9	0.0	22	20.4	20.3	20.9	0.0	22
		1	5	20.8	20.2	21.0	0.0	22	20.4	20.3	20.7	0.0	22
		3	0	20.7	20.2	20.9	0.0	22	20.6	20.3	20.9	0.0	22
		3	1	20.7	20.2	20.9	0.0	22	20.6	20.2	20.9	0.0	22
3	3	20.7	20.2	20.9	0.0	22	20.6	20.2	20.9	0.0	22		
6	0	20.8	20.3	21.0	0.0	22	20.8	20.3	21.1	0.0	22		

LTE Band 66 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Hotspot Reduced Average Power (dBm)					Proximity sensor Reduced Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				132072	132322	132572			132072	132322	132572		
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	22.4	22.4	22.7	0.0	23	22.4	22.5	22.7	0.0	23
		1	49	22.4	22.4	22.6	0.0	23	22.3	22.4	22.6	0.0	23
		1	99	22.3	22.4	22.4	0.0	23	22.3	22.4	22.5	0.0	23
		50	0	22.3	22.4	22.6	0.0	23	22.3	22.4	22.6	0.0	23
		50	24	22.2	22.3	22.5	0.0	23	22.2	22.4	22.5	0.0	23
		50	50	22.2	22.3	22.4	0.0	23	22.2	22.3	22.5	0.0	23
	16QAM	1	0	22.1	22.3	22.9	0.0	23	22.3	22.3	22.8	0.0	23
		1	49	22.1	22.2	22.8	0.0	23	22.2	22.3	22.7	0.0	23
		1	99	22.2	22.1	22.6	0.0	23	22.2	22.2	22.6	0.0	23
		50	0	22.3	22.4	22.6	0.0	23	22.3	22.4	22.6	0.0	23
		50	24	22.2	22.4	22.5	0.0	23	22.3	22.4	22.6	0.0	23
		50	50	22.2	22.3	22.5	0.0	23	22.2	22.3	22.5	0.0	23
15 MHz	QPSK	1	0	22.1	22.5	22.6	0.0	23	22.2	22.5	22.6	0.0	23
		1	37	22.1	22.5	22.5	0.0	23	22.2	22.4	22.5	0.0	23
		1	74	22.1	22.4	22.4	0.0	23	22.1	22.4	22.4	0.0	23
		36	0	22.1	22.4	22.6	0.0	23	22.1	22.4	22.6	0.0	23
		36	20	22.1	22.4	22.5	0.0	23	22.1	22.4	22.5	0.0	23
		36	39	22.1	22.4	22.5	0.0	23	22.1	22.4	22.5	0.0	23
	16QAM	75	0	22.1	22.4	22.5	0.0	23	22.1	22.4	22.5	0.0	23
		1	0	22.2	22.4	22.7	0.0	23	22.3	22.4	22.7	0.0	23
		1	37	22.1	22.4	22.6	0.0	23	22.2	22.4	22.7	0.0	23
		1	74	22.2	22.3	22.5	0.0	23	22.2	22.3	22.5	0.0	23
		36	0	22.2	22.4	22.6	0.0	23	22.2	22.4	22.6	0.0	23
		36	20	22.2	22.4	22.5	0.0	23	22.2	22.4	22.5	0.0	23
10 MHz	QPSK	36	39	22.2	22.4	22.5	0.0	23	22.2	22.4	22.5	0.0	23
		75	0	22.2	22.4	22.5	0.0	23	22.2	22.4	22.5	0.0	23
		1	0	22.1	22.5	22.6	0.0	23	22.0	22.5	22.6	0.0	23
		1	25	22.0	22.5	22.5	0.0	23	22.0	22.4	22.6	0.0	23
		1	49	22.0	22.4	22.4	0.0	23	22.0	22.4	22.5	0.0	23
		25	0	22.0	22.4	22.5	0.0	23	22.0	22.4	22.5	0.0	23
	16QAM	25	12	22.0	22.3	22.5	0.0	23	22.0	22.4	22.5	0.0	23
		25	25	22.0	22.4	22.5	0.0	23	22.0	22.4	22.5	0.0	23
		50	0	22.0	22.4	22.5	0.0	23	22.0	22.4	22.5	0.0	23
		1	0	22.0	22.2	22.6	0.0	23	22.1	22.4	22.7	0.0	23
		1	25	22.0	22.3	22.6	0.0	23	22.1	22.4	22.5	0.0	23
		1	49	22.0	22.2	22.5	0.0	23	22.1	22.4	22.5	0.0	23
10 MHz	16QAM	25	0	22.1	22.4	22.6	0.0	23	22.1	22.4	22.6	0.0	23
		25	12	22.1	22.4	22.6	0.0	23	22.1	22.4	22.6	0.0	23
		25	25	22.1	22.4	22.5	0.0	23	22.1	22.4	22.6	0.0	23
		25	0	22.1	22.4	22.6	0.0	23	22.1	22.4	22.6	0.0	23
		25	12	22.1	22.4	22.6	0.0	23	22.1	22.4	22.6	0.0	23
		25	25	22.1	22.4	22.5	0.0	23	22.1	22.4	22.6	0.0	23
10 MHz	16QAM	50	0	22.0	22.4	22.6	0.0	23	22.0	22.4	22.5	0.0	23
		50	0	22.0	22.4	22.6	0.0	23	22.0	22.4	22.5	0.0	23

LTE Band 66 Measured Results (continued)


BW (MHz)	Mode	RB Allocation	RB offset	Hotspot Reduced Average Power (dBm)					Proximity sensor Reduced Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit
				131997	132322	132647			131997	132322	132647		
				1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	21.9	22.5	22.6	0.0	23	22.0	22.4	22.6	0.0	23
		1	12	21.8	22.4	22.5	0.0	23	22.0	22.4	22.4	0.0	23
		1	24	21.9	22.4	22.5	0.0	23	22.0	22.4	22.4	0.0	23
		12	0	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
		12	7	21.9	22.3	22.5	0.0	23	21.8	22.3	22.5	0.0	23
		12	13	21.8	22.4	22.5	0.0	23	21.9	22.3	22.5	0.0	23
		25	0	21.9	22.3	22.5	0.0	23	21.9	22.3	22.5	0.0	23
	16QAM	1	0	21.8	22.3	22.4	0.0	23	21.8	22.5	22.4	0.0	23
		1	12	21.8	22.3	22.4	0.0	23	21.8	22.5	22.4	0.0	23
		1	24	21.8	22.3	22.4	0.0	23	21.8	22.5	22.4	0.0	23
		12	0	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
		12	7	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
		12	13	21.9	22.4	22.5	0.0	23	21.8	22.4	22.6	0.0	23
		25	0	21.9	22.5	22.5	0.0	23	22.0	22.4	22.6	0.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					Measured Pwr (dBm)				
				131987			MPR	Tune-up Limit	131987			MPR	Tune-up Limit
				132322	132657	131987			132322	132657			
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	22.0	22.4	22.5	0.0	23	22.0	22.4	22.5	0.0	23
		1	8	22.0	22.4	22.6	0.0	23	22.0	22.4	22.5	0.0	23
		1	14	21.9	22.3	22.5	0.0	23	22.0	22.4	22.5	0.0	23
		8	0	21.9	22.4	22.5	0.0	23	21.8	22.3	22.5	0.0	23
		8	4	21.9	22.4	22.5	0.0	23	21.8	22.4	22.4	0.0	23
		8	7	21.9	22.3	22.4	0.0	23	21.9	22.4	22.4	0.0	23
		15	0	21.9	22.4	22.4	0.0	23	21.9	22.3	22.4	0.0	23
	16QAM	1	0	21.8	22.3	22.8	0.0	23	21.8	22.3	22.4	0.0	23
		1	8	21.9	22.2	22.6	0.0	23	21.9	22.3	22.4	0.0	23
		1	14	21.8	22.3	22.5	0.0	23	21.8	22.5	22.4	0.0	23
		8	0	21.9	22.5	22.4	0.0	23	22.0	22.5	22.4	0.0	23
		8	4	21.9	22.5	22.4	0.0	23	22.0	22.5	22.4	0.0	23
		8	7	21.9	22.5	22.4	0.0	23	22.0	22.5	22.4	0.0	23
		15	0	21.9	22.4	22.4	0.0	23	21.9	22.3	22.4	0.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					Measured Pwr (dBm)				
				131979			MPR	Tune-up Limit	131979			MPR	Tune-up Limit
				132322	132665	131979			132322	132665			
				1710.7 MHz	1745 MHz	1779.3 MHz			1710.7 MHz	1745 MHz	1779.3 MHz		
1.4 MHz	QPSK	1	0	22.0	22.4	22.5	0.0	23	21.9	22.4	22.6	0.0	23
		1	3	21.9	22.4	22.5	0.0	23	21.9	22.4	22.6	0.0	23
		1	5	21.9	22.4	22.5	0.0	23	21.9	22.5	22.5	0.0	23
		3	0	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
		3	1	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
		3	3	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
		6	0	21.9	22.4	22.5	0.0	23	21.9	22.4	22.5	0.0	23
	16QAM	1	0	21.8	22.4	22.4	0.0	23	22.1	22.5	22.4	0.0	23
		1	3	21.9	22.4	22.4	0.0	23	22.1	22.3	22.3	0.0	23
		1	5	21.9	22.2	22.5	0.0	23	22.0	22.5	22.5	0.0	23
		3	0	21.8	22.3	22.4	0.0	23	21.8	22.2	22.4	0.0	23
		3	1	21.8	22.3	22.5	0.0	23	21.8	22.2	22.5	0.0	23
		3	3	21.7	22.3	22.4	0.0	23	21.8	22.2	22.4	0.0	23
		6	0	21.7	22.4	22.5	0.0	23	21.7	22.5	22.6	0.0	23

LTE Band TDD Measured Results


Procedure used to establish SAR test signal for LTE TDD Band

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band 41 and TDD
- Go to “Config...”

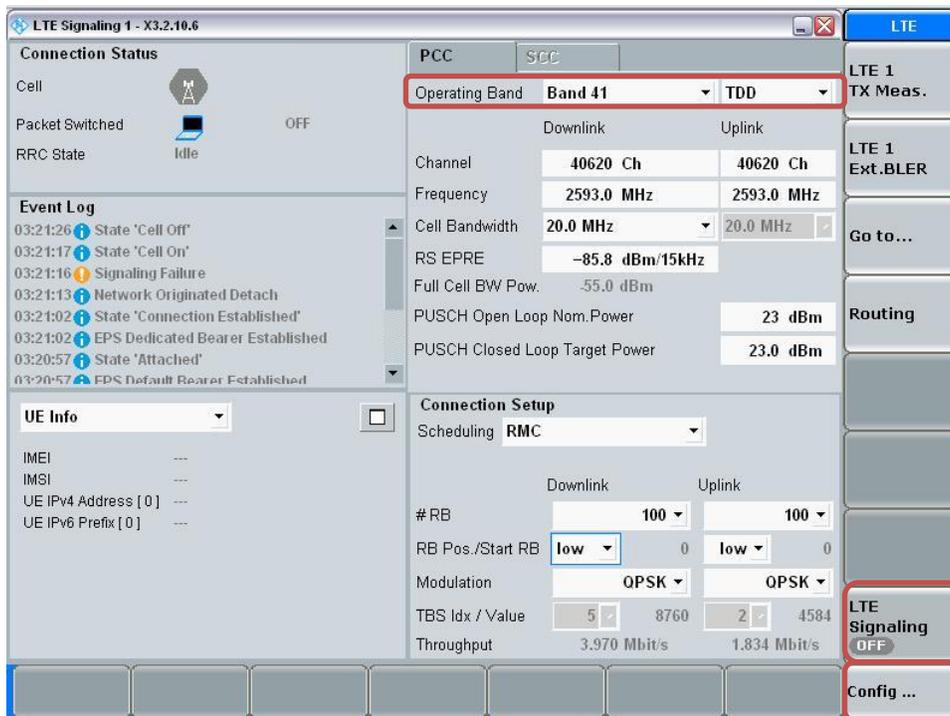


- Go to “Physical Cell Setup”
- Select “TDD” and Set “Uplink Downlink Configuration” to “0”
- Turn the cell on using “ON | OFF” key

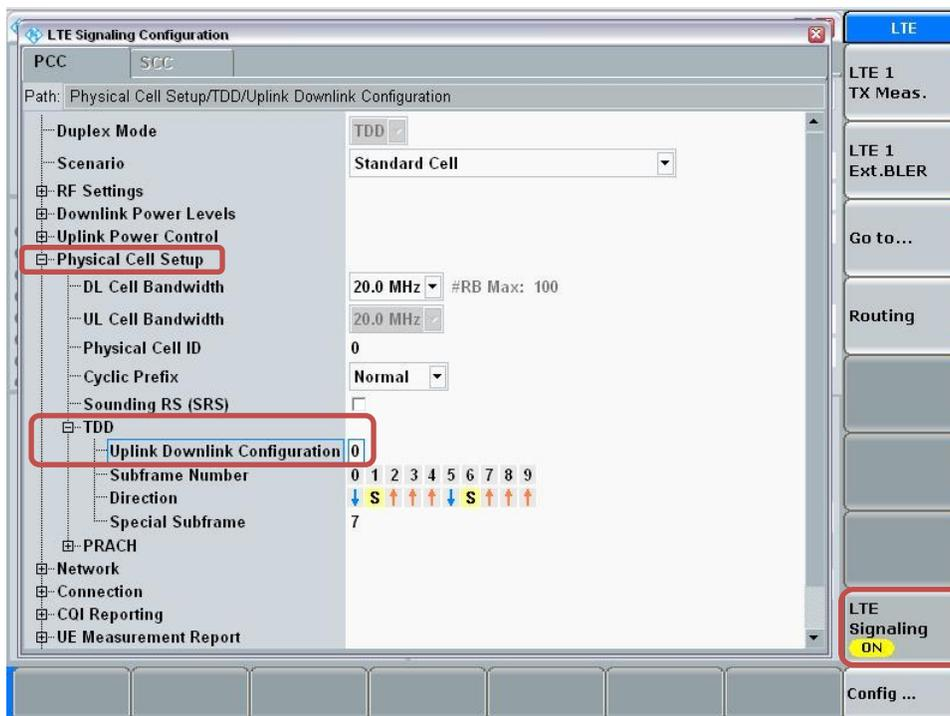


Connect to EUT

- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

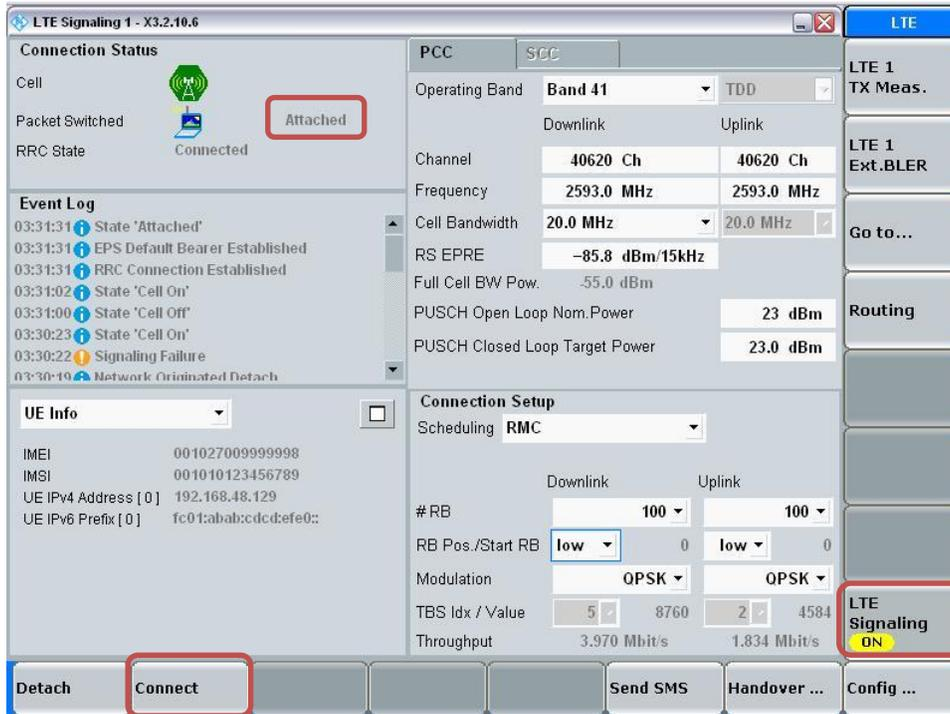


Max Power Setting

- Select “LTE 1 TX Meas.”
- Press “RESTART | STOP” Soft key

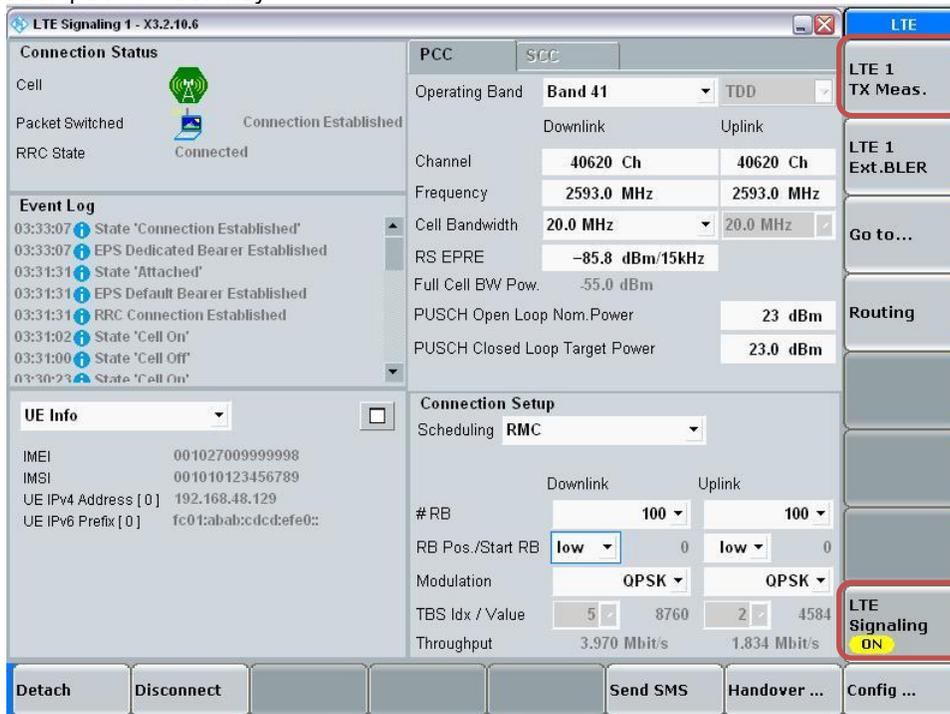

- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

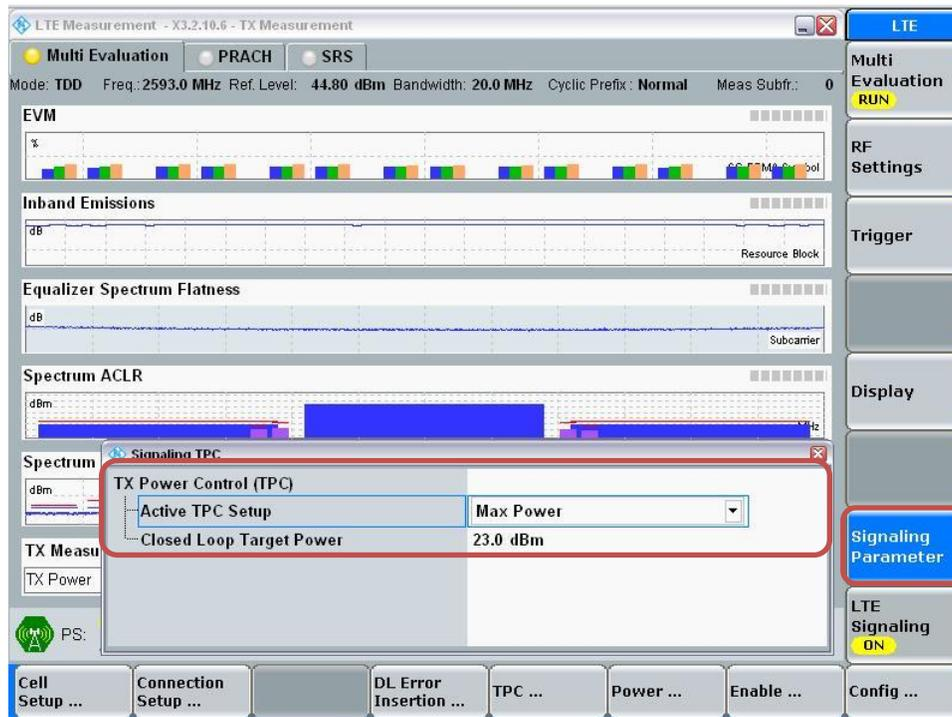

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”



LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	24.1	24.1	24.0	23.7	23.3	0.0	25
		1	49	24.2	24.0	24.0	23.6	23.3	0.0	25
		1	99	24.3	24.1	24.1	23.6	23.4	0.0	25
		50	0	23.3	23.1	22.9	22.6	22.4	1.0	24
		50	24	23.3	23.2	22.9	22.6	22.4	1.0	24
		50	50	23.4	23.2	23.0	22.6	22.4	1.0	24
	16QAM	100	0	23.3	23.2	22.9	22.6	22.4	1.0	24
		1	0	22.9	22.9	22.6	22.2	22.2	1.0	24
		1	49	23.0	23.2	22.8	22.3	22.3	1.0	24
		1	99	23.4	23.3	22.8	22.5	22.2	1.0	24
		50	0	22.3	22.1	21.9	21.6	21.4	2.0	23
		50	24	22.3	22.2	22.0	21.6	21.4	2.0	23
		50	50	22.4	22.2	22.0	21.6	21.4	2.0	23
		100	0	22.3	22.1	22.0	21.7	21.4	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
				15 MHz	QPSK	1	0	24.1	24.1	23.9
1	37	24.2	24.2			24.0	23.5	23.3	0.0	25
1	74	24.2	24.2			24.0	23.6	23.4	0.0	25
36	0	23.3	23.2			23.0	22.6	22.4	1.0	24
36	20	23.4	23.2			23.0	22.6	22.4	1.0	24
36	39	23.4	23.3			23.0	22.6	22.4	1.0	24
16QAM	75	0	23.4		23.3	23.0	22.6	22.4	1.0	24
	1	0	22.8		23.0	22.5	22.4	22.3	1.0	24
	1	37	23.0		23.1	22.9	22.2	22.5	1.0	24
	1	74	23.4		23.1	22.6	22.4	22.1	1.0	24
	36	0	22.4		22.3	21.9	21.7	21.4	2.0	23
	36	20	22.4		22.2	21.9	21.7	21.5	2.0	23
	36	39	22.4		22.3	22.0	21.6	21.5	2.0	23
	75	0	22.3		22.2	22.0	21.6	21.4	2.0	23
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
				10 MHz	QPSK	1	0	24.2	24.1	23.9
1	25	24.2	24.1			23.9	23.5	23.3	0.0	25
1	49	24.3	24.1			24.0	23.6	23.4	0.0	25
25	0	23.3	23.2			23.0	22.6	22.3	1.0	24
25	12	23.3	23.2			23.0	22.6	22.4	1.0	24
25	25	23.4	23.2			23.0	22.6	22.4	1.0	24
16QAM	50	0	23.3		23.2	22.9	22.6	22.4	1.0	24
	1	0	23.1		23.1	22.7	22.3	22.4	1.0	24
	1	25	23.1		23.1	22.8	22.3	22.3	1.0	24
	1	49	23.2		23.1	22.7	22.3	22.3	1.0	24
	25	0	22.3		22.2	21.9	21.6	21.4	2.0	23
	25	12	22.3		22.2	22.0	21.6	21.4	2.0	23
	25	25	22.4		22.2	22.0	21.6	21.4	2.0	23
	50	0	22.4		22.2	21.9	21.7	21.4	2.0	23

LTE Band 41 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	24.2	24.1	23.9	23.6	23.3	0.0	25
		1	12	24.3	24.1	23.9	23.6	23.3	0.0	25
		1	24	24.3	24.1	24.0	23.6	23.3	0.0	25
		12	0	23.3	23.2	22.9	22.6	22.4	1.0	24
		12	7	23.4	23.2	22.9	22.6	22.4	1.0	24
		12	13	23.4	23.2	23.0	22.6	22.4	1.0	24
	16QAM	25	0	23.3	23.2	22.9	22.6	22.4	1.0	24
		1	0	22.9	22.7	22.7	22.2	22.0	1.0	24
		1	12	23.0	22.7	22.7	22.2	21.9	1.0	24
		1	24	23.0	22.7	22.8	22.2	22.0	1.0	24
		12	0	22.3	22.1	21.9	21.6	21.4	2.0	23
		12	7	22.3	22.1	22.0	21.6	21.4	2.0	23
		12	13	22.3	22.1	22.0	21.6	21.4	2.0	23
		25	0	22.3	22.1	21.9	21.7	21.4	2.0	23

9.4 Wi-Fi 2.4 GHz (DTS Band)

Measured Results (Max power)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)		
					Meas Pwr	Tune-up Limit	SAR Test (Yes/No)
2.4	802.11b	1 Mbps	1	2412.0	16.8	18.0	Yes
			6	2437.0	17.2		
			11	2462.0	17.2		
			12	2467.0	16.5	17.0	No
			13	2472.0	15.6	16.0	
	802.11g	6 Mbps	1	2412.0	Not Required	17.0	No
			6	2437.0			
			11	2462.0			
			12	2467.0		12.5	
			13	2472.0		10.0	
	802.11n (HT20)	6.5 Mbps	1	2412.0	Not Required	17.0	No
			6	2437.0		16.0	
			11	2462.0		12.0	
12			2467.0	7.0			
13			2472.0	7.0			

Measured Results (reduced power)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)		
					Meas Pwr	Tune-up Limit	SAR Test (Yes/No)
2.4	802.11b	1 Mbps	1	2412.0	11.6	12.0	Yes
			6	2437.0	11.4		
			11	2462.0	11.7		
			12	2467.0	7.4	8.0	No
			13	2472.0	7.3		
	802.11g	6 Mbps	1	2412.0	11.7	12.0	No
			6	2437.0	11.5		
			11	2462.0	11.3		
			12	2467.0	7.5	8.0	
			13	2472.0	7.9		
	802.11n (HT20)	6.5 Mbps	1	2412.0	11.6	12.0	No
			6	2437.0	11.2		
			11	2462.0	10.8		
12			2467.0	11.1	6.0		
13			2472.0	5.1			

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the tune-up limit and the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

9.5 Bluetooth

Average Power Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Average Power (dBm)	
				Meas Pwr	Tune-up Limit
2.4	GFSK	0	2402	8.6	10.0
		39	2441	8.9	
		78	2480	7.8	
	EDR, 8-DPSK	0	2402	7.1	
		39	2441	7.4	
		78	2480	6.4	
	LE, GFSK-1M	0	2402	5.3	6.0
		19	2440	5.7	
		39	2480	5.0	
	LE, GFSK-2M	0	2402	5.1	
		19	2440	5.5	
		39	2480	4.8	

Note(s):

SAR test is evaluated at GFSK mode in Bluetooth

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.879	3.751	76.8%	1.30

Duty Cycle plots

GFSK



10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg .

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1 GSM 850

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	Voice	N/A	0	Left Touch	190	836.6	33.5	32.6	0.116	0.143	
					Left Tilt	190	836.6	33.5	32.6	0.064	0.079	
					Right Touch	190	836.6	33.5	32.6	0.141	0.174	1
					Right Tilt	190	836.6	33.5	32.6	0.070	0.087	
	Body-worn	GPRS 3 Slot	N/A	15	Rear	190	836.6	30.0	29.6	0.368	0.401	2
					Front	190	836.6	30.0	29.6	0.270	0.294	
	Hotspot	GPRS 3 Slot	N/A	10	Rear	128	824.4	30.0	29.4	0.674	0.773	
						190	836.6	30.0	29.6	0.755	0.822	3
						251	848.8	30.0	29.7	0.696	0.743	
					Front	190	836.6	30.0	29.6	0.251	0.273	
					Edge 2	190	836.6	30.0	29.6	0.425	0.463	
					Edge 3	190	836.6	30.0	29.6	0.295	0.321	
Edge 4	190	836.6	30.0	29.6	0.182	0.198						

10.2 GSM1900

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	Voice	N/A	0	Left Touch	661	1880.0	30.5	29.5	0.084	0.106	4
					Left Tilt	661	1880.0	30.5	29.5	0.046	0.057	
					Right Touch	661	1880.0	30.5	29.5	0.065	0.082	
					Right Tilt	661	1880.0	30.5	29.5	0.041	0.052	
	Body-worn	GPRS 3 Slot	N/A	15	Rear	661	1880.0	26.5	25.8	0.129	0.151	5
					Front	661	1880.0	26.5	25.8	0.114	0.133	
	Hotspot	GPRS 3 Slot	N/A	10	Rear	661	1880.0	26.5	25.8	0.275	0.321	6
					Front	661	1880.0	26.5	25.8	0.166	0.194	
					Edge 2	661	1880.0	26.5	25.8	0.075	0.087	
					Edge 3	661	1880.0	26.5	25.8	0.216	0.252	
					Edge 4	661	1880.0	26.5	25.8	0.162	0.189	

10.3 W-CDMA Band II

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	Rel.99 RMC	Off	0	Left Touch	9400	1880.0	24.5	23.9	0.297	0.341	7
					Left Tilt	9400	1880.0	24.5	23.9	0.177	0.203	
					Right Touch	9400	1880.0	24.5	23.9	0.209	0.240	
					Right Tilt	9400	1880.0	24.5	23.9	0.136	0.156	
	Body-worn	Rel.99 RMC	Off	15	Rear	9400	1880.0	24.5	23.9	0.356	0.409	8
					Front	9400	1880.0	24.5	23.9	0.229	0.263	
	Hotspot	Rel.99 RMC	On	10	Rear	9400	1880.0	21.5	20.3	0.344	0.453	
					Front	9400	1880.0	21.5	20.3	0.194	0.256	
					Edge 2	9400	1880.0	21.5	20.3	0.072	0.094	
					Edge 3	9400	1880.0	21.5	20.3	0.363	0.478	9
					Edge 4	9400	1880.0	21.5	20.3	0.203	0.267	

10.4 W-CDMA Band IV

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	Rel.99 RMC	Off	0	Left Touch	1413	1732.6	25.0	24.5	0.235	0.262	10
					Left Tilt	1413	1732.6	25.0	24.5	0.175	0.195	
					Right Touch	1413	1732.6	25.0	24.5	0.197	0.220	
					Right Tilt	1413	1732.6	25.0	24.5	0.150	0.168	
	Body-worn	Rel.99 RMC	Off	15	Rear	1413	1732.6	25.0	24.5	0.373	0.417	11
					Front	1413	1732.6	25.0	24.5	0.253	0.283	
	Hotspot	Rel.99 RMC	On	10	Rear	1413	1732.6	22.0	21.6	0.378	0.418	12
					Front	1413	1732.6	22.0	21.6	0.201	0.222	
					Edge 2	1413	1732.6	22.0	21.6	0.071	0.079	
					Edge 3	1413	1732.6	22.0	21.6	0.301	0.333	
					Edge 4	1413	1732.6	22.0	21.6	0.175	0.193	

10.5 W-CDMA Band V

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	Rel.99 RMC	N/A	0	Left Touch	4183	836.6	25.5	24.9	0.159	0.184	
					Left Tilt	4183	836.6	25.5	24.9	0.092	0.107	
					Right Touch	4183	836.6	25.5	24.9	0.193	0.224	13
					Right Tilt	4183	836.6	25.5	24.9	0.094	0.109	
	Body-worn	Rel.99 RMC	N/A	15	Rear	4183	836.6	25.5	24.9	0.313	0.363	14
					Front	4183	836.6	25.5	24.9	0.183	0.212	
	Hotspot	Rel.99 RMC	N/A	10	Rear	4132	826.4	25.5	24.9	0.670	0.764	
						4183	836.6	25.5	24.9	0.711	0.825	15
						4233	846.6	25.5	24.7	0.646	0.774	
					Front	4183	836.6	25.5	24.9	0.194	0.225	
					Edge 2	4183	836.6	25.5	24.9	0.296	0.343	
					Edge 3	4183	836.6	25.5	24.9	0.256	0.297	
Edge 4	4183	836.6	25.5	24.9	0.102	0.118						

10.6 LTE Band 2 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	QPSK	Off	0	Left Touch	19100	1900.0	1	0	25.0	24.5	0.263	0.293	16
								50	0	24.0	23.6	0.249	0.274	
					Left Tilt	19100	1900.0	1	0	25.0	24.5	0.161	0.180	
								50	0	24.0	23.6	0.150	0.165	
					Right Touch	19100	1900.0	1	0	25.0	24.5	0.183	0.204	
								50	0	24.0	23.6	0.170	0.187	
	Right Tilt	19100	1900.0	1	0	25.0	24.5	0.119	0.133					
				50	0	24.0	23.6	0.120	0.132					
	Body-worn	QPSK	Off	15	Rear	19100	1900.0	1	0	25.0	24.5	0.268	0.299	17
								50	0	24.0	23.6	0.257	0.283	
					Front	19100	1900.0	1	0	25.0	24.5	0.210	0.234	
								50	0	24.0	23.6	0.200	0.220	
	Hotspot	QPSK	On	10	Rear	19100	1900.0	1	0	22.0	20.9	0.399	0.510	18
								50	0	22.0	20.9	0.386	0.500	
					Front	19100	1900.0	1	0	22.0	20.9	0.213	0.272	
								50	0	22.0	20.9	0.217	0.281	
					Edge 2	19100	1900.0	1	0	22.0	20.9	0.083	0.107	
								50	0	22.0	20.9	0.080	0.104	
Edge 3					19100	1900.0	1	0	22.0	20.9	0.267	0.341		
							50	0	22.0	20.9	0.267	0.346		
Edge 4	19100	1900.0	1	0	22.0	20.9	0.231	0.295						
			50	0	22.0	20.9	0.225	0.291						

10.7 LTE Band 5 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	QPSK	N/A	0	Left Touch	20525	836.5	1	0	25.5	24.6	0.164	0.203	
								25	0	24.5	23.5	0.130	0.163	
					Left Tilt	20525	836.5	1	0	25.5	24.6	0.099	0.123	
								25	0	24.5	23.5	0.079	0.099	
					Right Touch	20525	836.5	1	0	25.5	24.6	0.195	0.242	19
								25	0	24.5	23.5	0.164	0.205	
	Right Tilt	20525	836.5	1	0	25.5	24.6	0.094	0.117					
				25	0	24.5	23.5	0.080	0.101					
	Body-worn	QPSK	N/A	15	Rear	20525	836.5	1	0	25.5	24.6	0.229	0.284	20
								25	0	24.5	23.5	0.181	0.226	
					Front	20525	836.5	1	0	25.5	24.6	0.138	0.171	
								25	0	24.5	23.5	0.111	0.139	
	Hotspot	QPSK	N/A	10	Rear	20525	836.5	1	0	25.5	24.6	0.402	0.498	21
								25	0	24.5	23.5	0.340	0.425	
					Front	20525	836.5	1	0	25.5	24.6	0.130	0.161	
								25	0	24.5	23.5	0.097	0.121	
					Edge 2	20525	836.5	1	0	25.5	24.6	0.198	0.246	
								25	0	24.5	23.5	0.153	0.191	
Edge 3					20525	836.5	1	0	25.5	24.6	0.145	0.180		
							25	0	24.5	23.5	0.110	0.138		
Edge 4	20525	836.5	1	0	25.5	24.6	0.077	0.095						
			25	0	24.5	23.5	0.060	0.075						

10.8 LTE Band 12 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	QPSK	N/A	0	Left Touch	23095	707.5	1	0	25.5	24.4	0.059	0.076	
								25	0	24.5	23.3	0.049	0.064	
					Left Tilt	23095	707.5	1	0	25.5	24.4	0.034	0.044	
								25	0	24.5	23.3	0.029	0.038	
					Right Touch	23095	707.5	1	0	25.5	24.4	0.066	0.085	22
								25	0	24.5	23.3	0.053	0.070	
					Right Tilt	23095	707.5	1	0	25.5	24.4	0.034	0.044	
								25	0	24.5	23.3	0.028	0.036	
	Body-worn	QPSK	N/A	15	Rear	23095	707.5	1	0	25.5	24.4	0.184	0.237	23
								25	0	24.5	23.3	0.148	0.195	
					Front	23095	707.5	1	0	25.5	24.4	0.081	0.104	
								25	0	24.5	23.3	0.065	0.086	
	Hotspot	QPSK	N/A	10	Rear	23095	707.5	1	0	25.5	24.4	0.205	0.264	24
								25	0	24.5	23.3	0.166	0.219	
					Front	23095	707.5	1	0	25.5	24.4	0.082	0.106	
								25	0	24.5	23.3	0.065	0.086	
					Edge 2	23095	707.5	1	0	25.5	24.4	0.094	0.121	
								25	0	24.5	23.3	0.073	0.096	
					Edge 3	23095	707.5	1	0	25.5	24.4	0.045	0.058	
								25	0	24.5	23.3	0.037	0.048	
					Edge 4	23095	707.5	1	0	25.5	24.4	0.071	0.092	
								25	0	24.5	23.3	0.057	0.075	

10.9 LTE Band 13 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	QPSK	N/A	0	Left Touch	23230	782.0	1	0	24.0	23.0	0.026	0.033	
								25	0	23.0	21.9	0.021	0.027	
					Left Tilt	23230	782.0	1	0	24.0	23.0	0.014	0.017	
								25	0	23.0	21.9	0.011	0.014	
					Right Touch	23230	782.0	1	0	24.0	23.0	0.029	0.036	25
								25	0	23.0	21.9	0.023	0.030	
					Right Tilt	23230	782.0	1	0	24.0	23.0	0.015	0.019	
								25	0	23.0	21.9	0.011	0.014	
	Body-worn	QPSK	N/A	15	Rear	23230	782.0	1	0	24.0	23.0	0.115	0.145	26
								25	0	23.0	21.9	0.092	0.117	
					Front	23230	782.0	1	0	24.0	23.0	0.060	0.075	
								25	0	23.0	21.9	0.049	0.063	
	Hotspot	QPSK	N/A	10	Rear	23230	782.0	1	0	24.0	23.0	0.129	0.162	27
								25	0	23.0	21.9	0.105	0.134	
					Front	23230	782.0	1	0	24.0	23.0	0.047	0.060	
								25	0	23.0	21.9	0.039	0.050	
					Edge 2	23230	782.0	1	0	24.0	23.0	0.088	0.111	
								25	0	23.0	21.9	0.072	0.092	
					Edge 3	23230	782.0	1	0	24.0	23.0	0.024	0.030	
								25	0	23.0	21.9	0.020	0.025	
					Edge 4	23230	782.0	1	0	24.0	23.0	0.065	0.082	
								25	0	23.0	21.9	0.052	0.066	

10.10 LTE Band 41 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 2	Head	QPSK	N/A	0	Left Touch	39750	2506.0	1	99	25.0	24.3	0.112	0.131	
								50	50	24.0	23.4	0.092	0.106	
					Left Tilt	39750	2506.0	1	99	25.0	24.3	0.133	0.156	
								50	50	24.0	23.4	0.104	0.120	
					Right Touch	39750	2506.0	1	99	25.0	24.3	0.171	0.201	28
								50	50	24.0	23.4	0.135	0.156	
					Right Tilt	39750	2506.0	1	99	25.0	24.3	0.073	0.085	
								50	50	24.0	23.4	0.057	0.066	
	Body-worn	QPSK	N/A	15	Rear	39750	2506.0	1	99	25.0	24.3	0.229	0.269	
								50	50	24.0	23.4	0.203	0.234	
					Front	39750	2506.0	1	99	25.0	24.3	0.241	0.283	29
								50	50	24.0	23.4	0.220	0.254	
	Hotspot	QPSK	N/A	10	Rear	39750	2506.0	1	99	25.0	24.3	0.481	0.564	30
								50	50	24.0	23.4	0.351	0.405	
					Front	39750	2506.0	1	99	25.0	24.3	0.388	0.455	
								50	50	24.0	23.4	0.354	0.409	
					Edge 2	39750	2506.0	1	99	25.0	24.3	0.333	0.391	
								50	50	24.0	23.4	0.307	0.354	
					Edge 3	39750	2506.0	1	99	25.0	24.3	0.260	0.305	
								50	50	24.0	23.4	0.241	0.278	

10.11 LTE Band 66 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1	Head	QPSK	Off	0	Left Touch	132572	1770.0	1	0	25.0	24.7	0.247	0.267	31
								50	0	24.0	23.5	0.181	0.201	
					Left Tilt	132572	1770.0	1	0	25.0	24.7	0.170	0.184	
								50	0	24.0	23.5	0.127	0.141	
					Right Touch	132572	1770.0	1	0	25.0	24.7	0.186	0.201	
								50	0	24.0	23.5	0.130	0.144	
					Right Tilt	132572	1770.0	1	0	25.0	24.7	0.152	0.164	
								50	0	24.0	23.5	0.111	0.123	
	Body-worn	QPSK	Off	15	Rear	132572	1770.0	1	0	25.0	24.7	0.412	0.445	32
								50	0	24.0	23.5	0.316	0.351	
					Front	132572	1770.0	1	0	25.0	24.7	0.287	0.310	
								50	0	24.0	23.5	0.216	0.240	
	Hotspot	QPSK	On	10	Rear	132572	1770.0	1	0	23.0	22.7	0.547	0.586	33
								50	0	23.0	22.6	0.530	0.583	
					Front	132572	1770.0	1	0	23.0	22.7	0.311	0.333	
								50	0	23.0	22.6	0.301	0.331	
					Edge 2	132572	1770.0	1	0	23.0	22.7	0.096	0.103	
								50	0	23.0	22.6	0.090	0.099	
					Edge 3	132572	1770.0	1	0	23.0	22.7	0.358	0.384	
								50	0	23.0	22.6	0.354	0.389	
	Edge 4	132572	1770.0	1	0	23.0	22.7	0.248	0.266					
				50	0	23.0	22.6	0.243	0.267					

10.12 Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	On	0	Left Touch	11	2462.0	0.180	99.6	12.0	11.7	0.118	0.128	1	34
					Left Tilt	11	2462.0	0.172	99.6	12.0	11.7				
					Right Touch	11	2462.0	0.083	99.6	12.0	11.7				
					Right Tilt	11	2462.0	0.083	99.6	12.0	11.7				
		Body-worn	Off	15	Rear	11	2462.0	0.077	99.6	18.0	17.2	0.061	0.074	1	35
					Front	11	2462.0	0.053	99.6	18.0	17.2				
		Hotspot	Off	10	Rear	11	2462.0	0.199	99.6	18.0	17.2	0.156	0.190	1	36
					Front	11	2462.0	0.113	99.6	18.0	17.2				
					Edge 1	11	2462.0	0.118	99.6	18.0	17.2				
					Edge 2	11	2462.0	0.066	99.6	18.0	17.2				

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
5. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.13 Bluetooth

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	GFSK	Head	0	Left Touch	39	2441.0	76.8	10.0	8.9	0.089	0.151	
				Left Tilt	39	2441.0	76.8	10.0	8.9	0.094	0.160	37
				Right Touch	39	2441.0	76.8	10.0	8.9	0.045	0.076	
				Right Tilt	39	2441.0	76.8	10.0	8.9	0.054	0.092	

Standalone SAR Test Exclusion Considerations & Estimated SAR

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-worn	2.480	10.0	10	15	1.0	0.140
	Hotspot	2.480	10.0	10	10	1.6	0.210

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Rear	No	0.205	N/A	N/A
	LTE Band 13	Hotspot	Rear	No	0.129	N/A	N/A
835	GSM 850	Hotspot	Rear	No	0.755	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.711	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.402	N/A	N/A
1750	WCDMA Band IV	Hotspot	Rear	No	0.378	N/A	N/A
	LTE Band 66	Hotspot	Rear	No	0.547	N/A	N/A
1900	GSM 1900	Hotspot	Rear	No	0.275	N/A	N/A
	WCDMA Band II	Hotspot	Edge 3	No	0.363	N/A	N/A
	LTE Band 2	Hotspot	Rear	No	0.399	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Hotspot	Rear	No	0.156	N/A	N/A
	Bluetooth	Head	Left Tilt	No	0.094	N/A	N/A
2600	LTE Band 41	Hotspot	Rear	No	0.481	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. DUT Holder Perturbations

In accordance with published DUT Holder Perturbations in Oct.2016 TCB workshop,

When Highest reported SAR is over 1.2 or 3.0 W/kg (1-g or 10-g respectively), Holder perturbation verification is required for each antenna, using the highest configuration among all applicable frequency bands. Both Head test and Body test (Edge 1-4 sides) are evaluated with DUT holder. Both Front and Rear sides are evaluated without DUT holder. (Details of test setup are refer to Appendix A.)

So we are only consider about Head test and Body test (Edge 1-4 sides).

All highest SAR level is not over 1.2 or 3.0 W/kg (1-g or 10-g respectively) in All bands.

Please refer to Section 10. **So DUT Holder perturbations verification are not required.**

13. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	GSM(Voice)	+	DTS
	2	GSM(Voice)	+	BT
	3	W-CDMA	+	DTS
	4	W-CDMA	+	BT
	5	LTE	+	DTS
	6	LTE	+	BT
Body-worn	7	GSM(Voice/GPRS)	+	DTS
	8	GSM(Voice/GPRS)	+	BT
	9	W-CDMA	+	DTS
	10	W-CDMA	+	BT
	11	LTE	+	DTS
	12	LTE	+	BT
Hotspot & Phablet-10g	13	GSM(GPRS)	+	DTS
	14	GSM(GPRS)	+	BT
	15	W-CDMA	+	DTS
	16	W-CDMA	+	BT
	17	LTE	+	DTS
	18	LTE	+	BT

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. W-CDMA, LTE supports Hotspot and VoIP.
3. DTS Radio cannot transmit simultaneously with Bluetooth Radio.
4. BT tethering is consider about each RF exposure conditions

Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine **SAR₁**, or **SAR₂**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

The antennas for the unlicensed transmitters are closely situated. As a result, the associated SAR hotspots are also closely situated. Some of the sum of SAR calculations yielded results over 1.6 W/kg. The SPLSR calculations for these situations were performed by treating the unlicensed SAR values as a single transmitter. The most conservative distance between all the unlicensed hotspots to the licensed hotspot was used for the value of *d* in the SPLSR calculation.

Simultaneous transmission SAR measurement

When simultaneous transmission SAR measurements are required in different frequency bands not covered by a single probe calibration point then separate tests for each frequency band are performed. The tests are performed using enlarged zoom scans which are processed, by means of superposition, using the DASY5 volume scan postprocessing procedures to determine the 1-g SAR for the aggregate SAR distribution.

The spatial resolution used for all enlarged zoom scans is the same as used for the most stringent zoom scans. I.E. the scan parameters required for the highest frequency assessed are used for all enlarged zoom scans. The scans cover the complete area of the device to ensure all transmitting antennas and radiating structures are assessed.

DASY5 provides the ability to perform Multiband Evaluations according to the latest standards using the Volume Scan job as well as appropriate routines for the Post-processing.

In order to extract and process measurements within different frequency bands, the SEMCAD X Post-processor performs the combination and subsequent superposition of these measurement data via DASY5= Combined MultiBand Averaged SAR.

Combined Multi Band Averaged SAR allows - in addition to the data extraction - an evaluation of the 1 g, 10 g and/or arbitrary averaged mass SAR.

Power Scaling Factor is used to allow the volume scans to be scaled by a value other than "1", this is important when the results need to be scaled to different maximum power levels. The Power Scaling Factor is applied to each individual point of the scan. When power scaling is used in multi-band combinations the scaling factor is applied to each individual point of the first scan, the second factor is then applied to each individual point of the second scan and so on. The scans are then combined.

13.1 Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
					Head	All Position	0.341	0.128
Body-worn	All Position	0.445	0.074	0.140	0.519	No	0.585	No
Hotspot	All Position	0.825	0.190	0.210	1.015	No	1.035	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

4788869685-S1V2 FCC Report SAR_App A_Photos & Ant. Locations

4788869685-S1V2 FCC Report SAR_App B_Highest SAR Test Plots

4788869685-S1V2 FCC Report SAR_App C_System Check Plots

4788869685-S1V2 FCC Report SAR_App D_SAR Tissue Ingredients

4788869685-S1V2 FCC Report SAR_App E_Probe Cal. Certificates

4788869685-S1V2 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT