



**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

**SAR EVALUATION REPORT**

**FOR**

**GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC**

**MODEL NUMBER: SM-A236M/DSN, SM-A236M/N**

**FCC ID: A3LSMA236MN**

**REPORT NUMBER: 4790406782-S1V2**

**ISSUE DATE: 7/11/2022**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433**



**Testing Laboratory**

**TL-637**

**Revision History**

Rev.	Date	Revisions	Revised By
V1	7/1/2022	Initial Issue	--
V2	7/11/2022	Revised note number in Sec.12.18	Juyeon Choi

## Table of Contents

<b>1.</b>	<b>Attestation of Test Results .....</b>	<b>6</b>
1.1.	<i>The Highest Reported SAR for RF exposure conditions for each bands .....</i>	<i>7</i>
<b>2.</b>	<b>Test Specification, Methods and Procedures.....</b>	<b>8</b>
<b>3.</b>	<b>Facilities and Accreditation .....</b>	<b>8</b>
<b>4.</b>	<b>SAR Measurement System &amp; Test Equipment .....</b>	<b>9</b>
4.1.	<i>SAR Measurement System.....</i>	<i>9</i>
4.2.	<i>SAR Scan Procedures .....</i>	<i>11</i>
4.3.	<i>Test Equipment.....</i>	<i>13</i>
<b>5.</b>	<b>Measurement Uncertainty.....</b>	<b>15</b>
5.1.	<i>DECISION RULE.....</i>	<i>15</i>
<b>6.</b>	<b>Device Under Test (DUT) Information .....</b>	<b>15</b>
6.1.	<i>DUT Description .....</i>	<i>15</i>
6.2.	<i>Wireless Technologies.....</i>	<i>16</i>
6.3.	<i>Nominal and Maximum Output Power.....</i>	<i>17</i>
6.4.	<i>Power Back-off Operation.....</i>	<i>20</i>
6.5.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>21</i>
6.6.	<i>LTE (TDD) Considerations.....</i>	<i>23</i>
6.7.	<i>NR (Sub 6GHz) SAR Test and Reporting Considerations .....</i>	<i>24</i>
<b>7.</b>	<b>RF Exposure Conditions (Test Configurations) .....</b>	<b>25</b>
<b>8.</b>	<b>Dielectric Property Measurements &amp; System Check .....</b>	<b>26</b>
8.1.	<i>Dielectric Property Measurements .....</i>	<i>26</i>
8.2.	<i>System Check.....</i>	<i>30</i>
<b>9.</b>	<b>Conducted Output Power Measurements.....</b>	<b>33</b>
9.1.	<i>GSM .....</i>	<i>33</i>
9.2.	<i>W-CDMA .....</i>	<i>35</i>
9.3.	<i>LTE.....</i>	<i>41</i>
9.4.	<i>NR (Sub 6GHz).....</i>	<i>70</i>
9.5.	<i>Wi-Fi 2.4 GHz (DTS Band).....</i>	<i>89</i>
9.6.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	<i>90</i>
9.7.	<i>Bluetooth .....</i>	<i>91</i>
<b>10.</b>	<b>Measured and Reported (Scaled) SAR Results.....</b>	<b>92</b>
10.1.	<i>GSM 850.....</i>	<i>94</i>
10.2.	<i>GSM 1900.....</i>	<i>94</i>

10.3.	WCDMA Band II.....	94
10.4.	WCDMA Band IV.....	95
10.5.	WCDMA Band V.....	95
10.6.	LTE Band 2 (20MHz Bandwidth).....	95
10.7.	LTE Band 5 (10MHz Bandwidth).....	96
10.8.	LTE Band 12 (10MHz Bandwidth).....	97
10.9.	LTE Band 13 (10MHz Bandwidth).....	97
10.10.	LTE Band 26 (15MHz Bandwidth).....	98
10.11.	LTE Band 41 (20MHz Bandwidth).....	98
10.12.	LTE Band 66 (20MHz Bandwidth).....	99
10.13.	NR Band n5 (20MHz Bandwidth).....	100
10.14.	NR Band n66 (20MHz Bandwidth).....	100
10.15.	Wi-Fi (DTS Band).....	101
10.16.	Wi-Fi (U-NII Bands).....	102
10.17.	Bluetooth.....	103
<b>11.</b>	<b>SAR Measurement Variability.....</b>	<b>104</b>
<b>12.</b>	<b>Simultaneous Transmission SAR Analysis.....</b>	<b>105</b>
12.1.	Sum of the SAR for GSM850 & Wi-Fi & BT.....	107
12.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT.....	107
12.3.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT.....	108
12.4.	Sum of the SAR for WCDMA Band IV & Wi-Fi & BT.....	108
12.5.	Sum of the SAR for WCDMA Band V & Wi-Fi & BT.....	108
12.6.	Sum of the SAR for LTE Band 2 (Main 2 Ant.) & Wi-Fi & BT.....	109
12.7.	Sum of the SAR for LTE Band 5 & Wi-Fi & BT.....	109
12.8.	Sum of the SAR for LTE Band 12 & Wi-Fi & BT.....	109
12.9.	Sum of the SAR for LTE Band 13 & Wi-Fi & BT.....	110
12.10.	Sum of the SAR for LTE Band 26 & Wi-Fi & BT.....	110
12.11.	Sum of the SAR for LTE Band 41 & Wi-Fi & BT.....	110
12.12.	Sum of the SAR for LTE Band 66 (Main 2 Ant.) & Wi-Fi & BT.....	111
12.13.	Sum of the SAR for NR Band n5 & Wi-Fi & BT.....	111
12.14.	Sum of the SAR for NR Band n66 & Wi-Fi & BT.....	111
12.15.	Sum of the SAR for ENDC(LTE B2 (Sub 1 Ant.) + NR Bn5) & Wi-Fi & BT.....	112
12.16.	Sum of the SAR for ENDC(LTE B66 (Sub 1 Ant.) + NR Bn5) & Wi-Fi & BT.....	112
12.17.	Sum of the SAR for ENDC(LTE B5 + NR Bn66 (Sub 1 Ant.)) & Wi-Fi & BT.....	113
12.18.	Sum of the SAR for ENDC(LTE B2 (Sub 1 Ant.) + NR Bn66) & Wi-Fi & BT.....	114
<b>Appendixes</b>	<b>.....</b>	<b>118</b>

4790406782-S1 FCC Report SAR\_App A\_Photos & Ant. Locations ..... 118

4790406782-S1 FCC Report SAR\_App B\_Highest SAR Test Plots ..... 118

4790406782-S1 FCC Report SAR\_App C\_System Check Plots ..... 118

4790406782-S1 FCC Report SAR\_App D\_SAR Tissue Ingredients..... 118



4790406782-S1 FCC Report SAR\_App E\_Probe Cal. Certificates..... 118

4790406782-S1 FCC Report SAR\_App F\_Dipole Cal. Certificates ..... 118

4790406782-S1 FCC Report SAR\_App G\_Proximity Sensor feature..... 118

4790406782-S1 FCC Report SAR\_App H\_LTE Carrier Aggregation ..... 118

### 1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMA236MN			
Model Number		SM-A236M/DSN, SM-A236M/N			
Applicable Standards		FCC 47 CFR § 2.1093 IEEE Std 1528-2013 Published RF exposure KDB procedures			
Exposure Category		SAR Limits (W/Kg)			
		Peak spatial-average (1g of tissue)		Product Specific 10g (10g of tissue)	
General population / Uncontrolled exposure		1.6		4.0	
RF Exposure Conditions		Equipment Class - The Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
Head		0.78	0.18	0.21	0.43
Body-worn		0.52	0.24	0.46	0.15
Hotspot		1.10	0.33	0.63	0.32
Product Specific 10g		N/A	N/A	1.97	N/A
Simultaneous TX	Head	1.53	1.22	1.53	1.53
	Body-worn	1.27	1.11	1.27	1.27
	Hotspot	1.59	1.59	1.59	1.59
	Product Specific 10g	N/A	N/A	N/A	N/A
Date Tested		5/23/2022 to 7/1/2022			
Test Results		Pass			
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>					
Approved & Released By:			Prepared By:		
					
Justin Park Operations Leader UL Korea, Ltd. Suwon Laboratory			Juyeon Choi Laboratory Technician UL Korea, Ltd. Suwon Laboratory		

### 1.1. The Highest Reported SAR for RF exposure conditions for each bands

Equipment Class	Band	Antenna	The Highest Reported SAR (W/kg)			
			1g of tissue			10g of tissue
			Head Exposure condition	Body-worn Exposure condition	Hotspot Exposure condition	Product Specific Exposure condition
PCE	GSM 850	Main. 1	0.300	0.480	<b>1.100</b>	N/A
	GSM 1900	Main. 2	0.191	0.295	0.433	N/A
	WCDMA Band II	Main. 2	0.245	0.504	0.473	N/A
	WCDMA Band IV	Main. 2	0.249	0.500	0.499	N/A
	WCDMA Band V	Main. 1	0.286	0.435	0.711	N/A
	LTE Band 2	Main. 2	0.283	<b>0.522</b>	0.702	N/A
	LTE Band 2	Sub. 1	<b>0.777</b>	0.140	0.277	N/A
	LTE Band 4	Main. 2	N/A	N/A	N/A	N/A
	LTE Band 5	Main. 1	0.291	0.450	0.761	N/A
	LTE Band 12	Main. 1	0.123	0.274	0.242	N/A
	LTE Band 13	Main. 1	0.235	0.411	0.538	N/A
	LTE Band 17	Main. 1	N/A	N/A	N/A	N/A
	LTE Band 26	Main. 1	0.291	0.417	0.672	N/A
	LTE Band 66	Main. 2	0.314	0.482	0.525	N/A
	LTE Band 66	Sub. 1	0.692	0.066	0.211	N/A
	LTE Band 41	Main. 2	0.217	0.370	0.775	N/A
	NR Band n5	Main. 1	0.262	0.300	0.639	N/A
	NR Band n66	Main. 2	0.178	0.356	0.747	N/A
	NR Band n66	Sub. 1	0.716	0.201	0.631	N/A
DTS	2.4GHz WLAN	WiFi/BT Ant.	<b>0.183</b>	<b>0.235</b>	<b>0.327</b>	N/A
UNII	5GHz WLAN	WiFi/BT Ant.	<b>0.206</b>	<b>0.464</b>	<b>0.631</b>	<b>1.970</b>
DSS	Bluetooth	WiFi/BT Ant.	<b>0.434</b>	<b>0.151</b>	<b>0.320</b>	N/A

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02
- 971168 D01 Power Meas License Digital System v03r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October, 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB workshop](#) May, 2017; RF Exposure Procedures (LTE Test Conditions)
- [TCB workshop](#) November, 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR)
- [TCB workshop](#) April, 2018; RF Exposure Procedures (LTE DL CA SAR Test Exclusion Update)
- [TCB workshop](#) April, 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))
- [TCB workshop](#) October, 2020; 5G RFX Policies (Intra-band and Inter-band NSA-EN-DC evaluation)
- [TCB workshop](#) April, 2022; RF Exposure Procedures (5G NR FR1 Measurement)
- [TCB workshop](#) April, 2022; RF Exposure Procedure (Sum-Peak Location Separation Ratio)

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 6 Room
SAR 7 Room
SAR 8 Room
SAR 9 Room

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.


The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.



## 4. SAR Measurement System & Test Equipment


### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

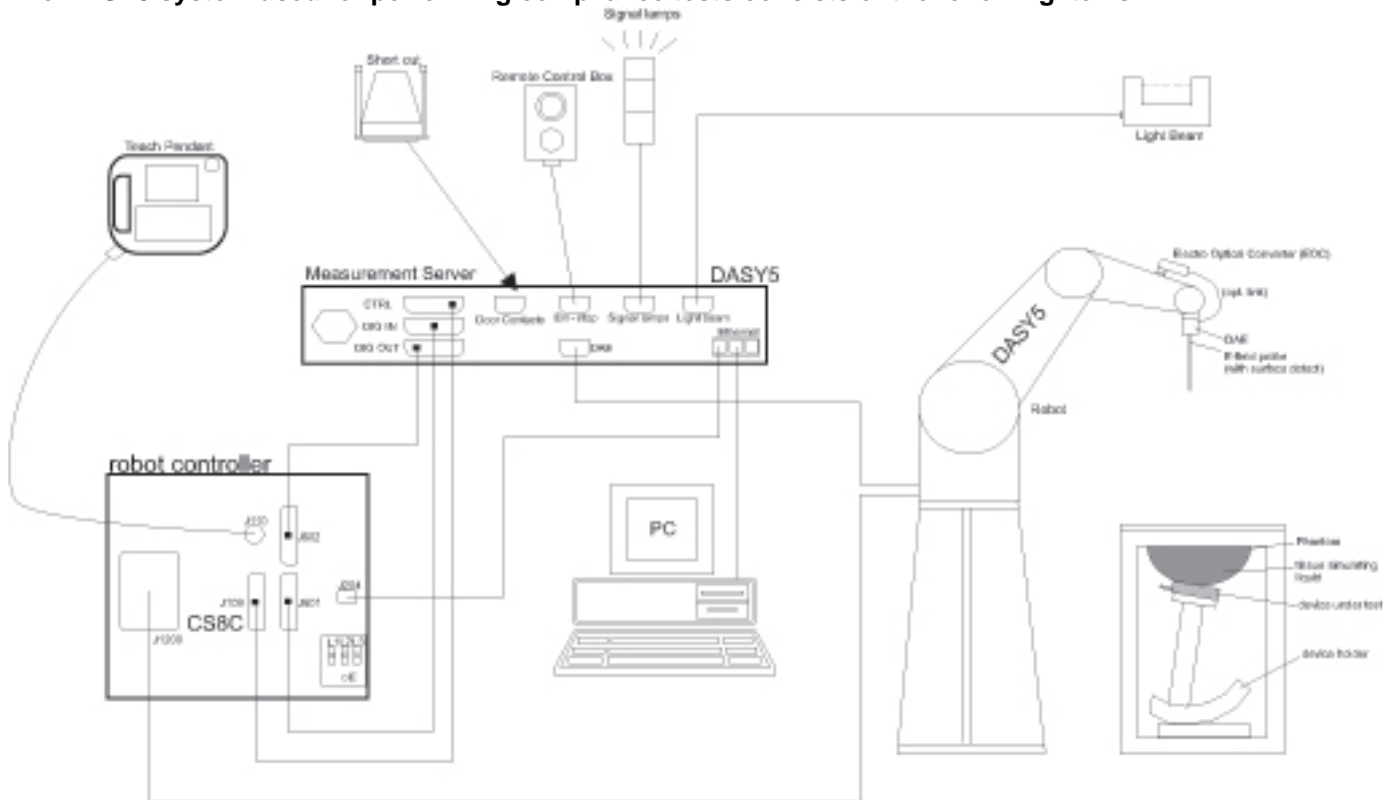

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

The DASY6 & 8 system used for performing compliance tests consists of the following items:

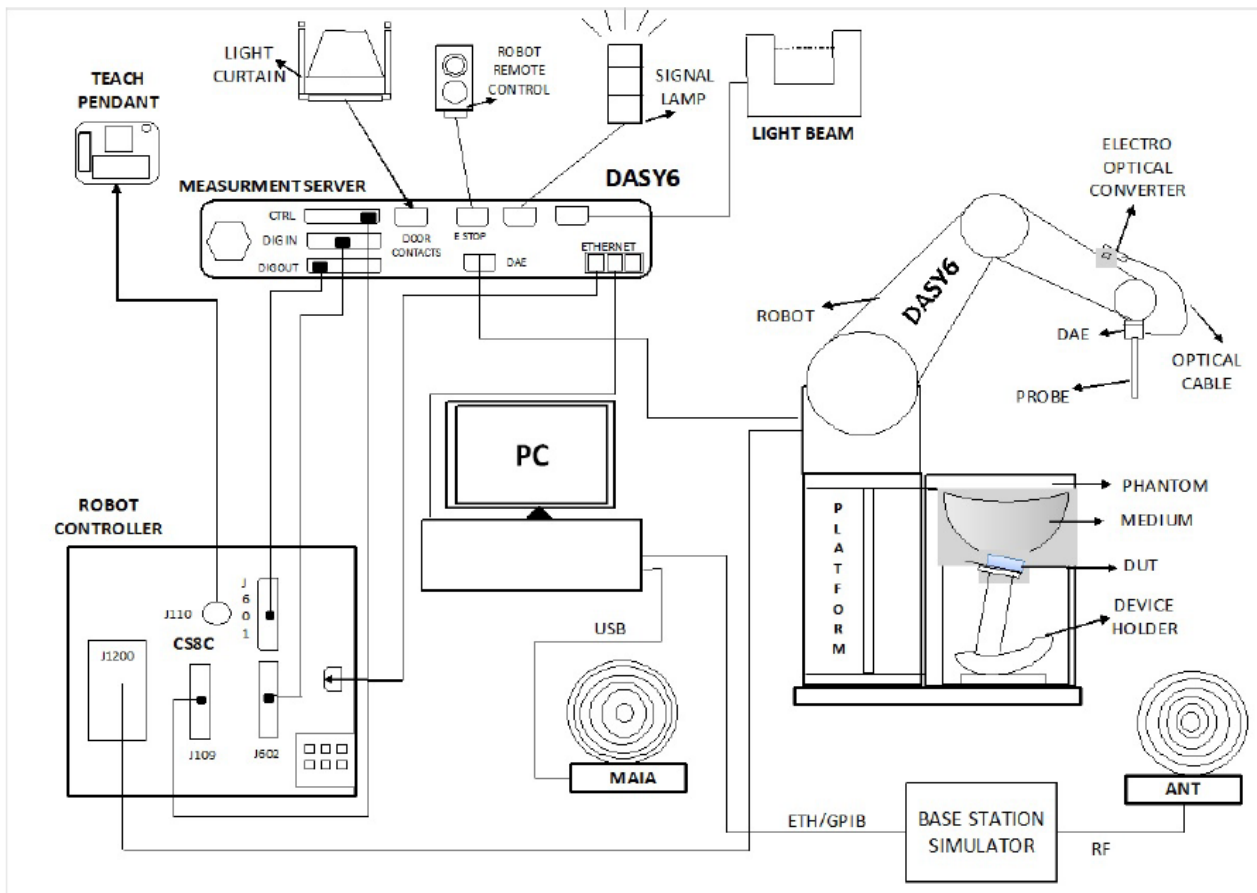

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY6 or 8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-6-2022
Network Analyzer	ROHDE & SCHWARZ	ZNB 20	102256	8-6-2022
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	7-21-2022
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3851	8-4-2022
Thermometer	LKM	DTM3000	3862	8-4-2022

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-4-2022
MXG Analog Signal Generator	Keysight	N5181B	MY59100587	8-4-2022
MXG Analog Signal Generator	Keysight	N5173B	MY59101083	8-4-2022
Power Sensor	Keysight	U2000A	MY60180020	8-4-2022
Power Sensor	Agilent	U2000A	MY54260007	8-4-2022
Power Sensor	Agilent	U2000A	MY54260010	8-4-2022
Power Amplifier	EXODUS	AMP2027	1410025-AMP2027-10003	8-4-2022
Power Amplifier	EXODUS	AMP2027ADB	10002	8-4-2022
Directional Coupler	Agilent	772D	MY52180193	8-3-2022
Directional Coupler	H.P	778D	16133	8-3-2022
Low Pass Filter	MICROLAB	LA-15N	3943	8-3-2022
Low Pass Filter	FILTRON	L14012FL	1410003S	8-3-2022
Low Pass Filter	MICROLAB	LA-60N	3942	8-3-2022
Low Pass Filter	MINI-CIRCUITS	NLP-1200	VUU19301915	8-4-2022
Attenuator	KEY SIGHT	8491B/003	VE2017A0283	8-4-2022
Attenuator	KEY SIGHT	8491B/010	MY39271981	8-4-2022
Attenuator	KEY SIGHT	8491B/010	MY39272011	8-4-2022
Attenuator	KEY SIGHT	8491B/020	MY39271973	8-4-2022
Attenuator	MINI-CIRCUITS	BW-N3W5+	N/A	8-4-2022
Attenuator	MINI-CIRCUITS	BW-N10W5+	N/A	8-4-2022
Attenuator	MINI-CIRCUITS	BW-N20W5+	N/A	8-4-2022
E-Field Probe	SPEAG	EX3DV4	7330	1-28-2023
E-Field Probe	SPEAG	EX3DV4	7313	3-2-2023
E-Field Probe	SPEAG	EX3DV4	7545	8-26-2022
E-Field Probe	SPEAG	EX3DV4	7645	4-29-2023
E-Field Probe	SPEAG	EX3DV4	7376	7-30-2022
E-Field Probe	SPEAG	EX3DV4	3928	3-3-2023
Data Acquisition Electronics	SPEAG	DAE4	1494	7-27-2022
Data Acquisition Electronics	SPEAG	DAE4	1591	3-24-2023
Data Acquisition Electronics	SPEAG	DAE4	1343	8-23-2022
Data Acquisition Electronics	SPEAG	DAE4	1667	4-27-2023
Data Acquisition Electronics	SPEAG	DAE4	1668	4-27-2023
Data Acquisition Electronics	SPEAG	DAE4	912	11-22-2022
System Validation Dipole	SPEAG	D750V3	1205	2023-04-27
System Validation Dipole	SPEAG	D835V2	4d194	3-24-2023
System Validation Dipole	SPEAG	D835V2	4d174	2023-03-17
System Validation Dipole	SPEAG	D1750V2	1125	2-24-2023
System Validation Dipole	SPEAG	D1900V2	5d190	2022-11-24
System Validation Dipole	SPEAG	D2450V2	960	3-24-2023
System Validation Dipole	SPEAG	D2600V2	1178	2023-04-23
System Validation Dipole	SPEAG	D5GHzV2	1209	11-24-2022
Thermometer	Lutron	MHB-382SD	AH.91463	8-4-2022
Thermometer	Lutron	MHB-382SD	AH.50215	8-3-2022
Thermometer	Lutron	MHB-382SD	AH.50213	8-4-2022
Thermometer	Lutron	MHB-382SD	AH.45903	8-3-2022
Thermometer	Lutron	MHB-382SD	AK.18789	8-4-2022

#### Note(s):

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations. (for blue box items)
3. All equipments were used until Cal.Due data.

**Others**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-3-2022
Base Station Simulator	R & S	CMW500	150314	8-4-2022
Base Station Simulator	R & S	CMW500	162790	8-3-2022
Base Station Simulator	R & S	CMW500	169803	5-27-2023
Base Station Simulator	R & S	CMW500	169801	8-3-2022
Base Station Simulator	R & S	CMW500	169799	8-3-2022
Base Station Simulator	R & S	CMW500	169800	6-20-2023
Base Station Simulator	R & S	CMW500	169797	8-3-2022
Base Station Simulator	R & S	CMW500	169798	8-3-2022
UXM 5G Wireless Test Platform	Keysight	E7515B	MY59150850	12-13-2022
UXM 5G Wireless Test Platform	Keysight	E7515B	MY58460570	12-13-2022
UXM 5G Wireless Test Platform	Keysight	E7515B	MY57510596	8-6-2022
Radio Communication Test Station	Anritsu	MT8000A	6272398203	6-17-2023

**Note(s):**

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. All equipments were used until Cal.Due data.

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

### 5.1. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedures 1, Clause 4.4.2 in IEC Guide 115:2007.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	Refer to Appendix A.		
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.		
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.8 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5.2 GHz_UNII-1, Wi-Fi 5.8 GHz_UNII-3)		
Test Sample Information	<b>No.</b>	<b>S/N</b>	<b>Notes</b>
	1	R3CT506NBRK	Main Conducted
	2	R3CT506NC3R	Main Conducted
	3	R3CT506V0DW	Main Conducted
	4	R3CT506V1TY	WLAN Conducted
	5	R3CT506TWEM	SAR
	6	R3CT506TVQP	SAR
	7	R3CT506TYRH	SAR
	8	R3CT506V23F	SAR
	9	R3CT506V24Z	SAR

## 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK)	GPRS Multi-Slot Class:	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
		GPRS (GMSK)	<input type="checkbox"/> Class 8 - 1 Up, 4 Down	
		EGPRS (8PSK)	<input type="checkbox"/> Class 10 - 2 Up, 4 Down	
			<input type="checkbox"/> Class 12 - 4 Up, 4 Down	
			<input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	
Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Category 24) HSUPA (Category 6) DC-HSDPA (Category 24) HSPA+ (DL only)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 FDD Band 26 TDD Band 41 FDD Band 66	QPSK 16QAM 64QAM 256QAM Rel. 15 Carrier Aggregation (1 Uplink and 4 Downlinks)		100% (FDD) 63.3% (TDD)
		Does this device support SV-LTE (1xRTT-LTE)? <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
5G NR (Sub 6) FDD Bands	NR Band n5 NR Band n66	DFT-s-OFDM: ■ $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: ■ QPSK, 16QAM, 64QAM, 256QAM		100%
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		SISO mode 98.9% (802.11b)
	5 GHz	802.11a 802.11n (HT20) & (HT40) 802.11ac (VHT20) & (VHT40) & (VHT80)		SISO mode 98.7% (802.11a) 98.3% (802.11ac (VHT80))
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 5.0 LE		76.8% (DH5)
NFC	13.56 MHz	Type A/B/F		N/A <sup>Note.3</sup>

### Notes:

1. The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.8% and was considered and used for SAR Testing.
2. Duty cycle for Wi-Fi is referenced from the DTS and UNII report.
3. Measured Duty Cycle is not required due to SAR test exemption.



### 6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Antenna	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power (Hotspot & Proximity sensor & Earjack back-off) (dBm)	
				Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr
GSM850	Main 1 Ant.	Voice	1	34.00	24.97		
		GPRS	1	34.00	24.97		
		GPRS	2	32.00	25.98		
		GPRS	3	30.00	25.74		
		GPRS	4	28.50	25.49		
		EGPRS	1	27.50	18.47		
		EGPRS	2	26.00	19.98		
		EGPRS	3	24.00	19.74		
GSM1900	Main 2 Ant.	Voice	1	31.00	21.97	29.00	19.97
		GPRS	1	31.00	21.97	29.00	19.97
		GPRS	2	28.00	21.98	27.00	20.98
		GPRS	3	27.00	22.74	25.50	21.24
		GPRS	4	25.00	21.99	23.00	19.99
		EGPRS	1	27.00	17.97	25.00	15.97
		EGPRS	2	25.00	18.98	23.00	16.98
		EGPRS	3	23.50	19.24	21.00	16.74
		EGPRS	4	22.00	18.99	20.00	16.99

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (Hotspot & Proximity sensor & Earjack back-off) (dBm)
W-CDMA Band II	Main 2 Ant.	R99	25.00	22.00
		HSDPA	24.50	21.50
		HSUPA	24.50	21.50
		DC-HSDPA	23.00	20.00
W-CDMA Band IV	Main 2 Ant.	R99	25.00	22.00
		HSDPA	24.50	21.50
		HSUPA	24.50	21.50
		DC-HSDPA	24.00	21.00
W-CDMA Band V	Main 1 Ant.	R99	25.00	
		HSDPA	24.50	
		HSUPA	24.50	
		DC-HSDPA	24.00	

**Note :**

- GSM / WCDMA Bands is not support RCV Back-off operation.

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)	
				Hotspot & Proximity sensor & Ear-jack back-off	
LTE Band 2	Main 2 Ant.	QPSK	24.50	22.00	
LTE Band 2	Sub 1 Ant.	QPSK	20.00		
LTE Band 4	Main 2 Ant.	QPSK	25.00	22.00	
LTE Band 5	Main 1 Ant.	QPSK	24.70		
LTE Band 12	Main 1 Ant.	QPSK	25.70		
LTE Band 13	Main 1 Ant.	QPSK	24.70		
LTE Band 17	Main 1 Ant.	QPSK	25.70		
LTE Band 26	Main 1 Ant.	QPSK	25.00		
LTE Band 66	Main 2 Ant.	QPSK	25.00	22.00	
LTE Band 66	Sub 1 Ant.	QPSK	19.00		
LTE Band 41	Main 2 Ant.	QPSK	24.00		

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)	
				Hotspot back-off	RCV back-off
NR Band n5	Main 1 Ant.	DFT-s-OFDM QPSK	24.00		
NR Band n66	Main 2 Ant.	DFT-s-OFDM QPSK	24.50		
NR Band n66	Sub 1 Ant.	DFT-s-OFDM QPSK	24.00	22.00	18.00

**Note .:**

1. LTE Bands is not support RCV Back-off operation.
2. NR Bands is not support Proximity sensor back-off operation.

**Normal WLAN**

Band	Mode	Max (dBm)	Reduce (dBm)	Max (dBm)				Reduce (dBm)			
		b	b	a	g	n	ac	a	g	n	ac
2.4GHz	1Ch	18.50	12.00		18.00	17.50			12.00	12.00	
	2-5Ch	19.00	12.00		18.00	18.00			12.00	12.00	
	6Ch	20.00	12.00		18.00	18.00			12.00	12.00	
	7-10Ch	19.00	12.00		18.00	18.00			12.00	12.00	
	11Ch	14.50	12.00		17.00	16.00			12.00	12.00	
	12Ch	8.00	8.00		6.00	6.00			6.00	6.00	
	13Ch	8.00	8.00		6.00	5.50			6.00	5.50	
5GHz (20MHz)	UNII-1			16.00	15.00	15.00	15.00	11.00	11.00	11.00	11.00
	UNII-2A			16.00	15.00	15.00	15.00	11.00	11.00	11.00	11.00
	UNII-2C			16.00	15.00	15.00	15.00	11.00	11.00	11.00	11.00
	UNII-3			16.00	15.00	15.00	15.00	11.00	11.00	11.00	11.00
5GHz (40MHz)	UNII-1				14.00	14.00			11.00	11.00	11.00
	UNII-2A				14.00	14.00			11.00	11.00	11.00
	UNII-2C				14.00	14.00			11.00	11.00	11.00
	UNII-3				14.00	14.00			11.00	11.00	11.00
5GHz (80MHz)	UNII-1						13.00				11.00
	UNII-2A						13.00				11.00
	UNII-2C						13.00				11.00
	UNII-3						13.00				11.00

**Note :**

1. This device uses an independent fixed level power reduction mechanism for WLAN mode operations during RCV operation. Detailed descriptions of the power reduction mechanism are included in the operational description.

**Bluetooth-Maximum power**

Band	Mode	Maximum output power (dBm)
2.4GHz	Bluetooth_GFSK	18.00
2.4GHz	Bluetooth_EDR	13.50
2.4GHz	Bluetooth_1LE	8.50
2.4GHz	Bluetooth_2LE	8.50

### 6.4. Power Back-off Operation

This device supports multiple power back-off modes: WWAN (Hotspot), WWAN (Proximity sensor), WWAN (ear-jack), WWAN (RCV) and WLAN (RCV). Each of the power back-off operates within specific exposure conditions for certain technologies. For full details on how each power back-off mode operates, refer to the Operational Description.

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Product Specific 10-g
WWAN (Hotspot)	GSM 1900 WCDMA Band II & IV LTE Band 2 & 4 & 66 NR Band n66 (Sub.1)	N/A	N/A	✓	N/A
WWAN (Proximity sensor)	GSM 1900 WCDMA Band II & IV LTE Band 2 & 4 & 66	N/A	N/A	N/A	✓
WWAN (Ear-jack)	GSM 1900 WCDMA Band II & IV LTE Band 2 & 4 & 66	N/A	✓	N/A	✓
WWAN (RCV)	NR Band n66 (Sub.1)	✓	N/A	N/A	N/A
WLAN (RCV)	2.4GHz/5GHz WLAN	✓	N/A	N/A	N/A

**Note(s):**

1. Tune-up Limits for WWAN (Hotspot) and WWAN (Proximity Sensor) are all Reduced Average Powers. Please refer to Sec.9 for all conducted power measurements.
2. WWAN Back-off priority: RCV → Hotspot → Ear-jack → Proximity Sensor
3. Body-worn SAR with ear-jack connected is not required due to Body-worn measured at max power is not over 1.2 W/kg.

#### Product Specific 10g Adjusted SAR Calculation

Wireless technologies	Max Tune-up Limit (dBm)	Reduced Tune-Up Limit (dBm)	Power Factor	Reported SAR Limit (W/kg)
GSM 1900	22.74	21.24	1.41	0.850
WCDMA Band II	25.00	22.00	2.00	0.601
WCDMA Band IV	25.00	22.00	2.00	0.601
LTE Band 2	24.50	22.00	1.78	0.675
LTE Band 4	25.00	22.00	2.00	0.601
LTE Band 66	25.00	22.00	2.00	0.601
NR Band n66 (Sub.1)	24.00	22.00	1.58	0.757

**Note(s):**

1. Tune-up limit powers for GSM 1900 is frame power(dBm).
2. Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Extremity SAR testing is not required for this band in accordance with KDB 648474 §2.5 b. Refer to §10 for Reported SAR results. If the Reported SAR 1g value in §10 is less than the Reported SAR Limit listed above, then Extremity SAR is not required.
3. LTE 50% RB is scaled up to the Max Tune-Up Limit with MPR included.
4. For Reported SAR limit in above table, it was calculated using Max tune-up Limit & Reduced Tune-up limit & Reported SAR 1.2 W/kg. (Reported SAR Limit = 1.2 W/kg / Power factor, Power factor =  $10^{((\text{Max tune-up limit} - \text{Reduced tune-up limit})/10)}$ )

### 6.5. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700/ 1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23205/ 779.5		
Mid			23230/ 782	23230/ 782			
High				23255/ 784.5			
Band 17	Frequency range: 704 - 716 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low			23780/ 709	23755/ 706.5			
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			

**General LTE SAR Test and Reporting Considerations (Continued)**

	Band 26	Frequency range: 814 - 849 MHz																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
	Low		26765/ 821.5	26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7																																																													
	Mid		26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5																																																													
	High		26965/ 841.5	26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3																																																													
	Band 41	Frequency range: 2496 - 2690 MHz																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
		Low	39750 / 2506.0																																																																	
		Low-Mid	40185 / 2549.5																																																																	
		Mid	40620 / 2593.0																																																																	
		Mid-High	41055 / 2636.5																																																																	
	High	41490 / 2680.0																																																																		
	Band 66	Frequency range: 1710 - 1780 MHz																																																																		
Channel Bandwidth																																																																				
20 MHz		15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
Low		132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7																																																													
Mid		132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745																																																													
High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3																																																														
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																			
Maximum power reduction (MPR)	<p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design                      The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.                      A-MPR (additional MPR) was disabled during SAR testing</p>						Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )							MPR (dB)																																																												
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																														
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																													
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																													
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																													
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																													
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																													
256 QAM	≥ 1						≤ 5																																																													
Power reduction	Yes																																																																			
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																			

**Notes:**

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports Overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE devices.
- LTE Band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$20480 \cdot T_s$				
6	$19760 \cdot T_s$	$23040 \cdot T_s$				
7	$21952 \cdot T_s$	$12800 \cdot T_s$				
8	$24144 \cdot T_s$	-	-	-		
9	$13168 \cdot T_s$	-	-	-	-	

#### Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x ( $T_s$ ) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:  
 Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$   
 where  
 $T_s = 1/(15000 \times 2048)$  seconds

**Note(s):**  
 This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

### 6.7. NR (Sub 6GHz) SAR Test and Reporting Considerations

Item	Description														
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band n5	Frequency range: 824 - 849 MHz													
		Channel Bandwidth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
	Low										166800/834	166300/831.5	165800/829	165300/826.5	
	Mid										167300/836.5	167300/836.5	167300/836.5	167300/836.5	
	High										167800/839	168300/841.5	168800/844	169300/846.5	
	Band n66	Frequency range: 1710 - 1780 MHz													
		Channel Bandwidth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
	Low										344000/1720	343500/1717.5	343000/1715	342500/1712.5	
	Mid										349000/1745	349000/1745	349000/1745	349000/1745	
	High										354000/1770	354500/1772.5	355000/1775	355500/1777.5	
	SCS	15 kHz													
	Modulations Supported in UL	DFT-s-OFDM: $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM													
A-MPR (Additional MPR) disabled for SAR Testing?	Yes														
EN-DC Carrier Aggregation Possible Combinations															
LTE Anchor Bands for NR Band n5	LTE Band 2, 66														
LTE Anchor Bands for NR Band n66 (Main Ant.1)	LTE Band 2														
LTE Anchor Bands for NR Band n66 (Sub Ant.1)	LTE Band 5														

**Notes:**

- SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, Due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
- NR configurations of SAR test were determined according to Section 5.2 of KDB 941225 D05.
- All NR Bands has supports both SA and NSA.



### 7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	Antennaa	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note	
WWAN	Head	All Main Antennas	0 mm	Left Touch	N/A	Yes		
				Left Tilt (15°)	N/A	Yes		
				Right Touch	N/A	Yes		
				Right Tilt (15°)	N/A	Yes		
	Body	All Main Antennas	15 mm	Rear	N/A	Yes		
				Front	N/A	Yes		
	Hotspot	Main 1 Ant.	10 mm	Rear	< 25 mm	Yes	✓	
				Front	< 25 mm	Yes	✓	
				Edge 1 (Top)	> 25 mm	No	1	
				Edge 2 (Right)	< 25 mm	Yes		
				Edge 3 (Bottom)	< 25 mm	Yes		
				Edge 4 (Left)	< 25 mm	Yes		
	Hotspot	Main 2 Ant.	10 mm	Rear	< 25 mm	Yes	✓	
				Front	< 25 mm	Yes	✓	
				Edge 1 (Top)	> 25 mm	No	1	
				Edge 2 (Right)	> 25 mm	No	1	
				Edge 3 (Bottom)	< 25 mm	Yes		
				Edge 4 (Left)	< 25 mm	Yes		
	Hotspot	Sub 1 Ant.	10 mm	Rear	< 25 mm	Yes	✓	
				Front	< 25 mm	Yes	✓	
				Edge 1 (Top)	< 25 mm	Yes	✓	
				Edge 2 (Right)	< 25 mm	Yes		
				Edge 3 (Bottom)	> 25 mm	No	1	
				Edge 4 (Left)	> 25 mm	No	1	
Product Specific 10-g	All Main Antennas	0 mm	Rear	Refer to notes 2 & 3				
			Front					
			Edge 1 (Top)					
			Edge 2 (Right)					
			Edge 3 (Bottom)					
			Edge 4 (Left)					
WLAN/BT&BLE	Head	WiFi/BT 2.4G & WiFi 5G	0 mm	Left Touch	N/A	Yes		
				Left Tilt (15°)	N/A	Yes		
				Right Touch	N/A	Yes		
				Right Tilt (15°)	N/A	Yes		
	Body	WiFi/BT 2.4G & WiFi 5G	15 mm	Rear	N/A	Yes		
				Front	N/A	Yes		
	Hotspot	WiFi/BT 2.4G & WiFi 5G	10 mm	Rear	< 25 mm	Yes		
				Front	< 25 mm	Yes		
				Edge 1 (Top)	< 25 mm	Yes		
				Edge 2 (Right)	> 25 mm	No	1	
				Edge 3 (Bottom)	> 25 mm	No	1	
				Edge 4 (Left)	< 25 mm	Yes		
	Product Specific 10-g	WiFi/BT 2.4G & WiFi 5G	0 mm	Rear	Refer to notes 2 & 4			
				Front				
				Edge 1 (Top)				
				Edge 2 (Right)				
Edge 3 (Bottom)								
Edge 4 (Left)								

**Notes:**

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: When hotspot mode applies, Product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- For Phablet devices: When hotspot mode applies and power reduction applies to hotspot mode, Product specific 10-g SAR is required for each test position that has an adjusted SAR to maximum power that is > 1.2 W/kg.
- For Phablet devices: When hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head	
	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5100	36.1	4.55
5200	36.0	4.66
5300	35.9	4.76
5400	35.8	4.86
5500	35.6	4.96
5600	35.5	5.07
5700	35.4	5.17
5800	35.3	5.27
6000	35.1	5.48

NOTE: For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

SAR test were performed in All RF exposure conditions using Head tissue according to TCB workshop note of April, 2019.

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-20-2022	Head 1750	e'	39.4900	Relative Permittivity ( $\epsilon_r$ ):	39.49	40.08	-1.48	5
		e"	13.6100	Conductivity ( $\sigma$ ):	1.32	1.37	-3.26	5
	Head 1710	e'	39.5500	Relative Permittivity ( $\epsilon_r$ ):	39.55	40.15	-1.48	5
		e"	13.5700	Conductivity ( $\sigma$ ):	1.29	1.35	-4.17	5
	Head 1755	e'	39.4700	Relative Permittivity ( $\epsilon_r$ ):	39.47	40.08	-1.51	5
		e"	13.6000	Conductivity ( $\sigma$ ):	1.33	1.37	-3.26	5
6-20-2022	Head 1900	e'	39.1600	Relative Permittivity ( $\epsilon_r$ ):	39.16	40.00	-2.10	5
		e"	13.5100	Conductivity ( $\sigma$ ):	1.43	1.40	1.95	5
	Head 1850	e'	39.1700	Relative Permittivity ( $\epsilon_r$ ):	39.17	40.00	-2.08	5
		e"	13.4600	Conductivity ( $\sigma$ ):	1.38	1.40	-1.10	5
	Head 1910	e'	39.1600	Relative Permittivity ( $\epsilon_r$ ):	39.16	40.00	-2.10	5
		e"	13.5100	Conductivity ( $\sigma$ ):	1.43	1.40	2.48	5
6-22-2022	Head 1750	e'	39.3400	Relative Permittivity ( $\epsilon_r$ ):	39.34	40.08	-1.86	5
		e"	13.9200	Conductivity ( $\sigma$ ):	1.35	1.37	-1.06	5
	Head 1710	e'	39.4100	Relative Permittivity ( $\epsilon_r$ ):	39.41	40.15	-1.83	5
		e"	14.1300	Conductivity ( $\sigma$ ):	1.34	1.35	-0.22	5
	Head 1755	e'	39.3400	Relative Permittivity ( $\epsilon_r$ ):	39.34	40.08	-1.84	5
		e"	13.9000	Conductivity ( $\sigma$ ):	1.36	1.37	-1.12	5

**SAR 6 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-13-2022	Head 835	e'	42.1800	Relative Permittivity ( $\epsilon_r$ ):	42.18	41.50	1.64	5
		e"	19.2500	Conductivity ( $\sigma$ ):	0.89	0.90	-0.69	5
	Head 820	e'	42.3300	Relative Permittivity ( $\epsilon_r$ ):	42.33	41.60	1.75	5
		e"	19.3100	Conductivity ( $\sigma$ ):	0.88	0.90	-2.01	5
	Head 850	e'	42.0200	Relative Permittivity ( $\epsilon_r$ ):	42.02	41.50	1.25	5
		e"	19.1600	Conductivity ( $\sigma$ ):	0.91	0.92	-1.03	5
6-16-2022	Head 750	e'	41.6600	Relative Permittivity ( $\epsilon_r$ ):	41.66	41.96	-0.72	5
		e"	21.3900	Conductivity ( $\sigma$ ):	0.89	0.89	-0.12	5
	Head 700	e'	42.5600	Relative Permittivity ( $\epsilon_r$ ):	42.56	42.22	0.81	5
		e"	21.9200	Conductivity ( $\sigma$ ):	0.85	0.89	-4.05	5
	Head 790	e'	41.3600	Relative Permittivity ( $\epsilon_r$ ):	41.36	41.76	-0.95	5
		e"	21.0500	Conductivity ( $\sigma$ ):	0.92	0.90	3.18	5
6-16-2022	Head 835	e'	40.9000	Relative Permittivity ( $\epsilon_r$ ):	40.90	41.50	-1.45	5
		e"	20.2800	Conductivity ( $\sigma$ ):	0.94	0.90	4.62	5
	Head 820	e'	41.0900	Relative Permittivity ( $\epsilon_r$ ):	41.09	41.60	-1.23	5
		e"	20.5200	Conductivity ( $\sigma$ ):	0.94	0.90	4.13	5
	Head 850	e'	40.6500	Relative Permittivity ( $\epsilon_r$ ):	40.65	41.50	-2.05	5
		e"	20.1500	Conductivity ( $\sigma$ ):	0.95	0.92	4.08	5
6-20-2022	Head 835	e'	42.0600	Relative Permittivity ( $\epsilon_r$ ):	42.06	41.50	1.35	5
		e"	19.1700	Conductivity ( $\sigma$ ):	0.89	0.90	-1.11	5
	Head 820	e'	42.2300	Relative Permittivity ( $\epsilon_r$ ):	42.23	41.60	1.51	5
		e"	19.2100	Conductivity ( $\sigma$ ):	0.88	0.90	-2.51	5
	Head 850	e'	41.8900	Relative Permittivity ( $\epsilon_r$ ):	41.89	41.50	0.94	5
		e"	19.1300	Conductivity ( $\sigma$ ):	0.90	0.92	-1.19	5
6-21-2022	Head 750	e'	42.3600	Relative Permittivity ( $\epsilon_r$ ):	42.36	41.96	0.95	5
		e"	21.2500	Conductivity ( $\sigma$ ):	0.89	0.89	-0.77	5
	Head 700	e'	43.5000	Relative Permittivity ( $\epsilon_r$ ):	43.50	42.22	3.04	5
		e"	22.0000	Conductivity ( $\sigma$ ):	0.86	0.89	-3.70	5
	Head 790	e'	41.7200	Relative Permittivity ( $\epsilon_r$ ):	41.72	41.76	-0.09	5
		e"	21.2900	Conductivity ( $\sigma$ ):	0.94	0.90	4.36	5

**SAR 7 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-13-2022	Head 1750	e'	39.1000	Relative Permittivity ( $\epsilon_r$ ):	39.10	40.08	-2.46	5
		e"	13.8500	Conductivity ( $\sigma$ ):	1.35	1.37	-1.56	5
	Head 1710	e'	39.1300	Relative Permittivity ( $\epsilon_r$ ):	39.13	40.15	-2.53	5
		e"	13.9900	Conductivity ( $\sigma$ ):	1.33	1.35	-1.20	5
	Head 1755	e'	39.1100	Relative Permittivity ( $\epsilon_r$ ):	39.11	40.08	-2.41	5
		e"	13.8300	Conductivity ( $\sigma$ ):	1.35	1.37	-1.62	5
6-13-2022	Head 1900	e'	39.1600	Relative Permittivity ( $\epsilon_r$ ):	39.16	40.00	-2.10	5
		e"	13.6000	Conductivity ( $\sigma$ ):	1.44	1.40	2.63	5
	Head 1850	e'	39.1200	Relative Permittivity ( $\epsilon_r$ ):	39.12	40.00	-2.20	5
		e"	13.6300	Conductivity ( $\sigma$ ):	1.40	1.40	0.15	5
	Head 1910	e'	39.1600	Relative Permittivity ( $\epsilon_r$ ):	39.16	40.00	-2.10	5
		e"	13.6100	Conductivity ( $\sigma$ ):	1.45	1.40	3.24	5
6-17-2022	Head 1750	e'	40.5900	Relative Permittivity ( $\epsilon_r$ ):	40.59	40.08	1.26	5
		e"	13.8600	Conductivity ( $\sigma$ ):	1.35	1.37	-1.48	5
	Head 1710	e'	40.6500	Relative Permittivity ( $\epsilon_r$ ):	40.65	40.15	1.26	5
		e"	14.0400	Conductivity ( $\sigma$ ):	1.33	1.35	-0.85	5
	Head 1755	e'	40.5900	Relative Permittivity ( $\epsilon_r$ ):	40.59	40.08	1.28	5
		e"	13.8400	Conductivity ( $\sigma$ ):	1.35	1.37	-1.55	5
6-20-2022	Head 1900	e'	38.8000	Relative Permittivity ( $\epsilon_r$ ):	38.80	40.00	-3.00	5
		e"	13.2300	Conductivity ( $\sigma$ ):	1.40	1.40	-0.16	5
	Head 1850	e'	38.7600	Relative Permittivity ( $\epsilon_r$ ):	38.76	40.00	-3.10	5
		e"	13.3100	Conductivity ( $\sigma$ ):	1.37	1.40	-2.20	5
	Head 1910	e'	38.7900	Relative Permittivity ( $\epsilon_r$ ):	38.79	40.00	-3.03	5
		e"	13.2100	Conductivity ( $\sigma$ ):	1.40	1.40	0.21	5
6-20-2022	Head 2450	e'	39.8500	Relative Permittivity ( $\epsilon_r$ ):	39.85	39.20	1.66	5
		e"	13.6900	Conductivity ( $\sigma$ ):	1.86	1.80	3.61	5
	Head 2400	e'	39.9400	Relative Permittivity ( $\epsilon_r$ ):	39.94	39.30	1.64	5
		e"	13.7200	Conductivity ( $\sigma$ ):	1.83	1.75	4.52	5
	Head 2480	e'	39.8200	Relative Permittivity ( $\epsilon_r$ ):	39.82	39.16	1.68	5
		e"	13.6800	Conductivity ( $\sigma$ ):	1.89	1.83	2.95	5

**SAR 8 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-13-2022	Head 5250	e'	35.9300	Relative Permittivity ( $\epsilon_r$ ):	35.93	35.93	-0.01	5
		e"	16.1900	Conductivity ( $\sigma$ ):	4.73	4.70	0.51	5
	Head 5260	e'	35.9100	Relative Permittivity ( $\epsilon_r$ ):	35.91	35.92	-0.03	5
		e"	16.1900	Conductivity ( $\sigma$ ):	4.74	4.71	0.48	5
	Head 5600	e'	35.1900	Relative Permittivity ( $\epsilon_r$ ):	35.19	35.53	-0.97	5
		e"	16.3900	Conductivity ( $\sigma$ ):	5.10	5.06	0.85	5
	Head 5800	e'	34.8800	Relative Permittivity ( $\epsilon_r$ ):	34.88	35.30	-1.19	5
		e"	16.4500	Conductivity ( $\sigma$ ):	5.31	5.27	0.67	5
	Head 5825	e'	34.8200	Relative Permittivity ( $\epsilon_r$ ):	34.82	35.30	-1.36	5
		e"	16.4500	Conductivity ( $\sigma$ ):	5.33	5.27	1.10	5
6-27-2022	Head 835	e'	39.8500	Relative Permittivity ( $\epsilon_r$ ):	39.85	41.50	-3.98	5
		e"	19.5800	Conductivity ( $\sigma$ ):	0.91	0.90	1.01	5
	Head 820	e'	39.8200	Relative Permittivity ( $\epsilon_r$ ):	39.82	41.60	-4.28	5
		e"	19.8300	Conductivity ( $\sigma$ ):	0.90	0.90	0.63	5
	Head 850	e'	39.8800	Relative Permittivity ( $\epsilon_r$ ):	39.88	41.50	-3.90	5
		e"	19.3600	Conductivity ( $\sigma$ ):	0.92	0.92	0.00	5
6-30-2022	Head 5250	e'	35.7200	Relative Permittivity ( $\epsilon_r$ ):	35.72	35.93	-0.59	5
		e"	15.6400	Conductivity ( $\sigma$ ):	4.57	4.70	-2.90	5
	Head 5260	e'	35.7000	Relative Permittivity ( $\epsilon_r$ ):	35.70	35.92	-0.62	5
		e"	15.6500	Conductivity ( $\sigma$ ):	4.58	4.71	-2.87	5
	Head 5600	e'	35.1200	Relative Permittivity ( $\epsilon_r$ ):	35.12	35.53	-1.16	5
		e"	15.8500	Conductivity ( $\sigma$ ):	4.94	5.06	-2.47	5
	Head 5800	e'	34.8000	Relative Permittivity ( $\epsilon_r$ ):	34.80	35.30	-1.42	5
		e"	15.9900	Conductivity ( $\sigma$ ):	5.16	5.27	-2.15	5
	Head 5825	e'	34.7600	Relative Permittivity ( $\epsilon_r$ ):	34.76	35.30	-1.53	5
		e"	15.9900	Conductivity ( $\sigma$ ):	5.18	5.27	-1.73	5

**SAR 9 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-13-2022	Head 2450	e'	37.9800	Relative Permittivity ( $\epsilon_r$ ):	37.98	39.20	-3.11	5
		e"	13.4500	Conductivity ( $\sigma$ ):	1.83	1.80	1.79	5
	Head 2400	e'	38.0400	Relative Permittivity ( $\epsilon_r$ ):	38.04	39.30	-3.20	5
		e"	13.4100	Conductivity ( $\sigma$ ):	1.79	1.75	2.16	5
	Head 2480	e'	37.9600	Relative Permittivity ( $\epsilon_r$ ):	37.96	39.16	-3.07	5
		e"	13.5200	Conductivity ( $\sigma$ ):	1.86	1.83	1.74	5
6-14-2022	Head 2600	e'	39.2800	Relative Permittivity ( $\epsilon_r$ ):	39.28	39.01	0.69	5
		e"	13.2800	Conductivity ( $\sigma$ ):	1.92	1.96	-2.16	5
	Head 2500	e'	39.4200	Relative Permittivity ( $\epsilon_r$ ):	39.42	39.14	0.72	5
		e"	13.2000	Conductivity ( $\sigma$ ):	1.83	1.85	-1.03	5
	Head 2700	e'	39.0900	Relative Permittivity ( $\epsilon_r$ ):	39.09	38.88	0.53	5
		e"	13.3900	Conductivity ( $\sigma$ ):	2.01	2.07	-2.90	5
6-21-2022	Head 835	e'	42.1000	Relative Permittivity ( $\epsilon_r$ ):	42.10	41.50	1.45	5
		e"	20.1200	Conductivity ( $\sigma$ ):	0.93	0.90	3.79	5
	Head 820	e'	42.1600	Relative Permittivity ( $\epsilon_r$ ):	42.16	41.60	1.34	5
		e"	20.4200	Conductivity ( $\sigma$ ):	0.93	0.90	3.63	5
	Head 850	e'	42.0500	Relative Permittivity ( $\epsilon_r$ ):	42.05	41.50	1.33	5
		e"	19.8500	Conductivity ( $\sigma$ ):	0.94	0.92	2.53	5
6-21-2022	Head 1750	e'	40.0000	Relative Permittivity ( $\epsilon_r$ ):	40.00	40.08	-0.21	5
		e"	13.8900	Conductivity ( $\sigma$ ):	1.35	1.37	-1.27	5
	Head 1710	e'	40.0600	Relative Permittivity ( $\epsilon_r$ ):	40.06	40.15	-0.21	5
		e"	14.0500	Conductivity ( $\sigma$ ):	1.34	1.35	-0.78	5
	Head 1755	e'	40.0000	Relative Permittivity ( $\epsilon_r$ ):	40.00	40.08	-0.19	5
		e"	13.8700	Conductivity ( $\sigma$ ):	1.35	1.37	-1.33	5
6-27-2022	Head 1750	e'	40.3000	Relative Permittivity ( $\epsilon_r$ ):	40.30	40.08	0.54	5
		e"	14.0100	Conductivity ( $\sigma$ ):	1.36	1.37	-0.42	5
	Head 1710	e'	40.3600	Relative Permittivity ( $\epsilon_r$ ):	40.36	40.15	0.53	5
		e"	14.1700	Conductivity ( $\sigma$ ):	1.35	1.35	0.07	5
	Head 1755	e'	40.3000	Relative Permittivity ( $\epsilon_r$ ):	40.30	40.08	0.56	5
		e"	13.9900	Conductivity ( $\sigma$ ):	1.37	1.37	-0.48	5

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

### Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Cal. Due Date	Target SAR Values (W/kg)	
				1g/10g	Head
D750V3	1205	4-27-2021	4-27-2023	1g	8.66
				10g	5.65
D835V2	4d194	3-24-2022	3-24-2023	1g	9.77
				10g	6.39
D835V2	4d174	3-17-2021	3-17-2023	1g	9.70
				10g	6.29
D1750V2	1125	2-24-2022	2-24-2023	1g	36.80
				10g	19.40
D1900V2	5d190	11-24-2020	11-24-2022	1g	40.10
				10g	20.70
D2450V2	960	3-24-2022	3-24-2023	1g	51.90
				10g	24.00
D2600V2	1178	4-23-2021	4-23-2023	1g	56.60
				10g	25.40
D5GHzV2	1209	11-24-2021	11-24-2022	1g	78.00
				10g	22.40
				1g	80.90
				10g	23.10
				1g	79.00
				10g	22.40

### Note(s):

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations.
3. All equipments were used until Cal.Due data.

### System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

**SAR 1 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-20-2022	D1750V2	1125	Head	1g	3.70	37.0	36.80	0.54	1
				10g	1.92	19.2	19.40	-1.03	
6-20-2022	D1900V2	5d190	Head	1g	4.22	42.2	40.10	5.24	
				10g	2.13	21.3	20.70	2.90	
6-22-2022	D1750V2	1125	Head	1g	3.79	37.9	36.80	2.99	
				10g	2.01	20.1	19.40	3.61	

**SAR 6 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-13-2022	D835V2	4d174	Head	1g	0.98	9.8	9.70	1.44	2
				10g	0.65	6.5	6.29	2.70	
6-16-2022	D750V3	1205	Head	1g	0.86	8.6	8.66	-0.58	
				10g	0.58	5.8	5.65	2.12	
6-16-2022	D835V2	4d174	Head	1g	0.92	9.2	9.70	-5.46	
				10g	0.60	6.0	6.29	-4.29	
6-20-2022	D835V2	4d194	Head	1g	1.01	10.1	9.77	3.38	
				10g	0.66	6.6	6.39	3.60	
6-21-2022	D750V3	1205	Head	1g	0.87	8.7	8.66	0.81	
				10g	0.58	5.8	5.65	3.19	

**SAR 7 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-13-2022	D1750V2	1125	Head	1g	3.57	35.7	36.80	-2.99	3
				10g	1.89	18.9	19.40	-2.58	
6-13-2022	D1900V2	5d190	Head	1g	4.25	42.5	40.10	5.99	
				10g	2.18	21.8	20.70	5.31	
6-17-2022	D1750V2	1125	Head	1g	3.52	35.2	36.80	-4.35	
				10g	1.86	18.6	19.40	-4.12	
6-20-2022	D1900V2	5d190	Head	1g	4.11	41.1	40.10	2.49	
				10g	2.13	21.3	20.70	2.90	
6-20-2022	D2450V2	960	Head	1g	5.52	55.2	51.90	6.36	
				10g	2.57	25.7	24.00	7.08	

**SAR 8 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-13-2022	D5GHzV2 (5250)	1209	Head	1g	7.94	79.4	78.00	1.79	5
				10g	2.29	22.9	22.40	2.23	
6-13-2022	D5GHzV2 (5600)	1209	Head	1g	8.44	84.4	80.90	4.33	
				10g	2.44	24.4	23.10	5.63	
6-13-2022	D5GHzV2 (5800)	1209	Head	1g	8.36	83.6	79.00	5.82	
				10g	2.40	24.0	22.40	7.14	
6-27-2022	D835V2	4d194	Head	1g	0.91	9.1	9.77	-6.55	6
				10g	0.60	6.0	6.39	-6.57	
6-30-2022	D5GHzV2 (5250)	1209	Head	1g	7.8	78.1	78.0	0.13	
				10g	2.3	22.7	22.4	1.34	
6-30-2022	D5GHzV2 (5800)	1209	Head	1g	8.2	81.6	79.0	3.29	
				10g	2.4	23.6	22.4	5.36	

**SAR 9 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-13-2022	D2450V2	960	Head	1g	5.50	55.0	51.90	5.97	
				10g	2.55	25.5	24.00	6.25	
6-14-2022	D2600V2	1178	Head	1g	5.23	52.3	56.60	-7.60	7
				10g	2.35	23.5	25.40	-7.48	
6-21-2022	D835V2	4d194	Head	1g	0.95	9.5	9.77	-2.97	
				10g	0.61	6.1	6.39	-3.91	
6-21-2022	D1750V2	1125	Head	1g	3.44	34.4	36.80	-6.52	8
				10g	1.83	18.3	19.40	-5.67	
6-27-2022	D1750V2	1125	Head	1g	3.59	35.9	36.80	-2.45	
				10g	1.91	19.1	19.40	-1.55	



## 9. Conducted Output Power Measurements

### 9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

#### GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	128	824.2	32.61	23.58	34.00	24.97
			190	836.6	33.04	24.01		
			251	848.8	33.36	24.33		
GPRS (GMSK)	CS1	1	128	824.2	32.76	23.73	34.00	24.97
			190	836.6	32.93	23.90		
			251	848.8	33.17	24.14		
		2	128	824.2	31.01	24.99	32.00	25.98
			190	836.6	31.50	25.48		
			251	848.8	31.84	25.82		
		3	128	824.2	29.26	25.00	30.00	25.74
			190	836.6	29.57	25.31		
			251	848.8	29.66	25.40		
		4	128	824.2	27.37	24.36	28.50	25.49
			190	836.6	27.57	24.56		
			251	848.8	27.03	24.02		
EGPRS (8PSK)	MCS5	1	128	824.2	26.61	17.58	27.50	18.47
			190	836.6	27.29	18.26		
			251	848.8	27.44	18.41		
		2	128	824.2	24.89	18.87	26.00	19.98
			190	836.6	25.13	19.11		
			251	848.8	25.33	19.31		
		3	128	824.2	22.96	18.70	24.00	19.74
			190	836.6	23.24	18.98		
			251	848.8	23.37	19.11		
		4	128	824.2	21.91	18.90	23.00	19.99
			190	836.6	22.40	19.39		
			251	848.8	22.41	19.40		

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is  $\leq 1.2$ W/kg.

**GSM1900 Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				Reduced Average Power (dBm) Hotspot back-off				Reduced Average Power (dBm) Proximity sensor back-off			
					Measured		Tune-up Limit		Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	512	1850.2	29.82	20.79	31.00	21.97	27.49	18.46	29.00	19.97	27.55	18.52	29.00	19.97
			661	1880.0	29.80	20.77			27.53	18.50			27.60	18.57		
			810	1909.8	29.87	20.84			27.88	18.85			27.94	18.91		
GPRS (GMSK)	CS1	1	512	1850.2	29.59	20.56	31.00	21.97	27.73	18.70	29.00	19.97	27.67	18.64	29.00	19.97
			661	1880.0	29.61	20.58			27.62	18.59			27.55	18.52		
			810	1909.8	29.64	20.61			27.94	18.91			27.88	18.85		
		2	512	1850.2	25.95	19.93	28.00	21.98	25.42	19.40	27.00	20.98	26.39	20.37	27.00	20.98
			661	1880.0	26.79	20.77			26.36	20.34			26.29	20.27		
			810	1909.8	26.45	20.43			26.04	20.02			25.98	19.96		
	3	512	1850.2	24.84	20.58	27.00	22.74	23.82	19.56	25.50	21.24	23.71	19.45	25.50	21.24	
		661	1880.0	25.58	21.32			23.70	19.44			23.62	19.36			
		810	1909.8	24.94	20.68			23.80	19.54			23.75	19.49			
	4	512	1850.2	24.00	20.99	25.00	21.99	22.63	19.62	23.00	19.99	22.45	19.44	23.00	19.99	
		661	1880.0	23.84	20.83			20.60	17.59			20.63	17.62			
		810	1909.8	24.00	20.99			22.26	19.25			22.23	19.22			
EGPRS (8PSK)	MCS5	1	512	1850.2	25.28	16.25	27.00	17.97	24.25	15.22	25.00	15.97	24.21	15.18	25.00	15.97
			661	1880.0	25.61	16.58			24.26	15.23			24.24	15.21		
			810	1909.8	25.51	16.48			24.17	15.14			24.16	15.13		
		2	512	1850.2	23.47	17.45	25.00	18.98	22.23	16.21	23.00	16.98	22.20	16.18	23.00	16.98
			661	1880.0	23.52	17.50			22.30	16.28			22.29	16.27		
			810	1909.8	23.45	17.43			22.20	16.18			22.17	16.15		
	3	512	1850.2	21.96	17.70	23.50	19.24	20.33	16.07	21.00	16.74	20.30	16.04	21.00	16.74	
		661	1880.0	22.08	17.82			20.38	16.12			20.38	16.12			
		810	1909.8	21.95	17.69			20.49	16.23			20.47	16.21			
	4	512	1850.2	20.97	17.96	22.00	18.99	19.00	15.99	20.00	16.99	18.99	15.98	20.00	16.99	
		661	1880.0	21.16	18.15			18.98	15.97			18.98	15.97			
		810	1909.8	21.10	18.09			18.91	15.90			18.90	15.89			

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots for Max power and Reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2W/kg.

## 9.2. W-CDMA

### Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

**HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals**

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A <sub>hs</sub> = $\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

**DC-HSDPA Setup Procedures used to establish the test signals**

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

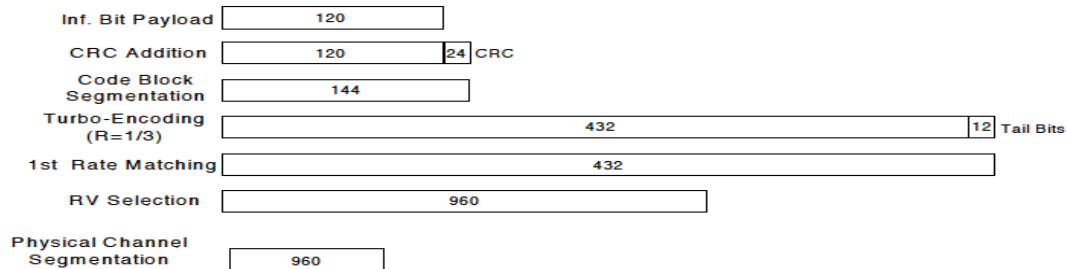

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 12			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

**HSPA+**

HSPA+ is only supported to down link. Therefore, the RF conducted power is not measured.

**W-CDMA Band II Measured Results**

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm) Hotspot back-off			Reduced Average Power (dBm) Proximity sensor back-off		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.29	N/A	25.00	20.36	N/A	22.00	20.38	N/A	22.00
		9400	1880.0	23.42			20.38			20.36		
		9538	1907.6	23.43			20.31			20.32		
HSDPA	Subtest 1	9262	1852.4	22.26	0	24.50	19.37	0	21.50	19.38	0	21.50
		9400	1880.0	22.40			19.34			19.35		
		9538	1907.6	22.41			19.30			19.34		
	Subtest 2	9262	1852.4	22.28	0	24.50	19.36	0	21.50	19.31	0	21.50
		9400	1880.0	22.38			19.36			19.36		
		9538	1907.6	22.40			19.32			19.32		
	Subtest 3	9262	1852.4	21.77	0.5	24.00	18.84	0.5	21.00	18.86	0.5	21.00
		9400	1880.0	21.91			18.81			18.81		
		9538	1907.6	21.89			18.81			18.81		
	Subtest 4	9262	1852.4	21.79	0.5	24.00	18.87	0.5	21.00	18.88	0.5	21.00
		9400	1880.0	21.90			18.85			18.81		
		9538	1907.6	21.90			18.79			18.82		
HSUPA	Subtest 1	9262	1852.4	22.27	0	24.50	19.35	0	21.50	19.34	0	21.50
		9400	1880.0	22.35			19.35			19.37		
		9538	1907.6	22.37			19.32			19.31		
	Subtest 2	9262	1852.4	20.26	2	22.50	17.36	2	19.50	17.36	2	19.50
		9400	1880.0	20.34			17.34			17.34		
		9538	1907.6	20.33			17.30			17.29		
	Subtest 3	9262	1852.4	21.24	1	23.50	18.37	1	20.50	18.38	1	20.50
		9400	1880.0	21.35			18.33			18.33		
		9538	1907.6	21.34			18.27			18.29		
	Subtest 4	9262	1852.4	20.28	2	22.50	17.36	2	19.50	17.36	2	19.50
		9400	1880.0	20.39			17.35			17.34		
		9538	1907.6	20.35			17.33			17.27		
	Subtest 5	9262	1852.4	22.24	0	24.50	19.10	0	21.50	19.00	0	21.50
		9400	1880.0	22.38			19.13			19.10		
		9538	1907.6	22.38			19.25			19.16		
DC-HSDPA	Subtest 1	9262	1852.4	22.29	0	23.00	19.33	0	20.00	19.34	0	20.00
		9400	1880.0	22.40			19.36			19.38		
		9538	1907.6	22.45			19.34			19.35		
	Subtest 2	9262	1852.4	22.31	0	23.00	19.31	0	20.00	19.34	0	20.00
		9400	1880.0	22.36			19.33			19.33		
		9538	1907.6	22.39			19.33			19.30		
	Subtest 3	9262	1852.4	21.82	0.5	22.50	18.83	0.5	19.50	18.85	0.5	19.50
		9400	1880.0	21.85			18.86			18.84		
		9538	1907.6	21.87			18.81			18.83		
	Subtest 4	9262	1852.4	21.77	0.5	22.50	18.85	0.5	19.50	18.86	0.5	19.50
		9400	1880.0	21.88			18.84			18.85		
		9538	1907.6	21.89			18.83			18.80		

**W-CDMA Band IV Measured Results**

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm) Hotspot back-off			Reduced Average Power (dBm) Proximity sensor back-off			
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	23.26	N/A	25.00	20.35	N/A	22.00	20.35	N/A	22.00	
		1413	1732.6	23.41			20.52			20.53			
		1513	1752.6	23.72			20.56			20.55			
HSDPA	Subtest 1	1312	1712.4	22.26	0	24.50	19.33	0	21.50	19.35	0	21.50	
		1413	1732.6	22.38			19.53			19.53			
		1513	1752.6	22.72			19.55			19.58			
	Subtest 2	1312	1712.4	22.26	0	24.50	19.34	0	21.50	19.30	0	21.50	
		1413	1732.6	22.41			19.50			19.50			
		1513	1752.6	22.73			19.52			19.55			
	Subtest 3	1312	1712.4	21.74	0.5	24.00	18.81	0.5	21.00	18.83	0.5	21.00	
		1413	1732.6	21.89			18.99			19.01			
		1513	1752.6	22.20			19.02			19.04			
	Subtest 4	1312	1712.4	21.73	0.5	24.00	18.82	0.5	21.00	18.81	0.5	21.00	
		1413	1732.6	21.90			19.01			19.01			
		1513	1752.6	22.21			19.02			19.03			
	HSUPA	Subtest 1	1312	1712.4	22.20	0	24.50	19.31	0	21.50	19.32	0	21.50
			1413	1732.6	22.40			19.48			19.53		
			1513	1752.6	22.69			19.53			19.56		
Subtest 2		1312	1712.4	20.22	2	22.50	17.33	2	19.50	17.31	2	19.50	
		1413	1732.6	20.41			17.51			17.49			
		1513	1752.6	20.73			17.54			17.53			
Subtest 3		1312	1712.4	21.71	1	23.50	18.30	1	20.50	18.28	1	20.50	
		1413	1732.6	21.85			18.47			18.50			
		1513	1752.6	22.18			18.52			18.53			
Subtest 4		1312	1712.4	20.21	2	22.50	17.33	2	19.50	17.32	2	19.50	
		1413	1732.6	20.38			17.51			17.50			
		1513	1752.6	20.70			17.53			17.55			
Subtest 5		1312	1712.4	22.18	0	24.50	19.32	0	21.50	19.33	0	21.50	
		1413	1732.6	22.39			19.07			19.06			
		1513	1752.6	22.70			19.11			19.10			
DC-HSDPA	Subtest 1	1312	1712.4	22.24	0	24.00	19.38	0	21.00	19.34	0	21.00	
		1413	1732.6	22.38			19.53			19.54			
		1513	1752.6	22.68			19.58			19.58			
	Subtest 2	1312	1712.4	22.23	0	24.00	19.37	0	21.00	19.37	0	21.00	
		1413	1732.6	22.37			19.50			19.53			
		1513	1752.6	22.70			19.53			19.55			
	Subtest 3	1312	1712.4	21.76	0.5	23.50	18.81	0.5	20.50	18.82	0.5	20.50	
		1413	1732.6	21.88			18.99			19.03			
		1513	1752.6	22.19			19.01			19.04			
	Subtest 4	1312	1712.4	21.74	0.5	23.50	18.85	0.5	20.50	18.82	0.5	20.50	
		1413	1732.6	21.86			19.00			19.02			
		1513	1752.6	22.18			19.05			19.05			

**W-CDMA Band V Measured Results**

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.33	N/A	25.00
		4183	836.6	24.37		
		4233	846.6	24.34		
HSDPA	Subtest 1	4132	826.4	23.07	0	24.50
		4183	836.6	23.35		
		4233	846.6	23.34		
	Subtest 2	4132	826.4	23.07	0	24.50
		4183	836.6	23.33		
		4233	846.6	23.30		
	Subtest 3	4132	826.4	22.59	0.5	24.00
		4183	836.6	22.81		
		4233	846.6	22.83		
	Subtest 4	4132	826.4	22.58	0.5	24.00
		4183	836.6	22.82		
		4233	846.6	22.80		
HSUPA	Subtest 1	4132	826.4	23.05	0	24.50
		4183	836.6	23.31		
		4233	846.6	23.29		
	Subtest 2	4132	826.4	21.08	2	22.50
		4183	836.6	21.28		
		4233	846.6	21.28		
	Subtest 3	4132	826.4	22.06	1	23.50
		4183	836.6	22.28		
		4233	846.6	22.27		
	Subtest 4	4132	826.4	21.07	2	22.50
		4183	836.6	21.31		
		4233	846.6	21.28		
	Subtest 5	4132	826.4	22.94	0	24.50
		4183	836.6	23.18		
		4233	846.6	23.16		
DC-HSDPA	Subtest 1	4132	826.4	23.10	0	24.00
		4183	836.6	23.38		
		4233	846.6	23.31		
	Subtest 2	4132	826.4	23.07	0	24.00
		4183	836.6	23.32		
		4233	846.6	23.31		
	Subtest 3	4132	826.4	22.57	0.5	23.50
		4183	836.6	22.80		
		4233	846.6	22.82		
	Subtest 4	4132	826.4	22.58	0.5	23.50
		4183	836.6	22.81		
		4233	846.6	22.79		



### 9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

#### **Maximum Output Power (Tune-up Limit) for LTE**

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be ≤ the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
  - LTE Band 4 (1710 – 1755 MHz) is covered by LTE Band 66 (1710 – 1780 MHz)
  - LTE Band 17 (704 – 716 MHz) is covered by LTE Band 12 (699 – 716 MHz)

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths.

When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for Higher order modulations. When the highest maximum output power for Higher order modulations are ≤ 0.5 dB higher than the QPSK or when the reported SAR for QPSK configuration is ≤ 1.45 W/kg.

# 1. Max power

## LTE Band 2 (Main. 2 Ant.) Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				18700	18900	19100		
				1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	23.39	23.40	23.45	0.0	24.50
		1	49	23.38	23.40	23.42	0.0	24.50
		1	99	23.39	23.38	23.44	0.0	24.50
		50	0	22.51	22.53	22.58	1.0	23.50
		50	24	22.53	22.52	22.60	1.0	23.50
		50	50	22.50	22.49	22.59	1.0	23.50
	16QAM	100	0	22.49	22.50	22.60	1.0	23.50
		1	0	22.98	22.98	22.87	1.0	23.50
		1	49	22.97	22.98	22.82	1.0	23.50
		1	99	22.98	22.99	22.84	1.0	23.50
		50	0	21.53	21.53	21.59	2.0	22.50
		50	24	21.54	21.56	21.58	2.0	22.50
	64QAM	50	50	21.50	21.51	21.54	2.0	22.50
		100	0	21.54	21.50	21.58	2.0	22.50
		1	0	21.76	22.08	21.70	2.0	22.50
		1	49	21.76	22.17	21.70	2.0	22.50
		1	99	21.80	22.08	21.62	2.0	22.50
		50	0	20.55	20.53	20.57	3.0	21.50
	256QAM	50	24	20.57	20.53	20.58	3.0	21.50
		50	50	20.56	20.48	20.57	3.0	21.50
		100	0	20.52	20.48	20.60	3.0	21.50
		1	0	18.67	18.65	18.51	4.0	20.50
		1	49	18.65	18.68	18.46	4.0	20.50
		1	99	18.65	18.61	18.41	4.0	20.50
15 MHz	QPSK	50	0	18.52	18.50	18.60	4.0	20.50
		50	24	18.53	18.51	18.61	4.0	20.50
		50	50	18.52	18.51	18.58	4.0	20.50
		100	0	18.48	18.47	18.59	4.0	20.50
		1	0	23.14	23.18	23.10	0.0	24.50
		1	37	23.04	23.18	23.06	0.0	24.50
	16QAM	1	74	23.14	23.19	23.06	0.0	24.50
		36	0	22.47	22.51	22.55	1.0	23.50
		36	20	22.48	22.50	22.55	1.0	23.50
		36	39	22.47	22.56	22.50	1.0	23.50
		75	0	22.47	22.47	22.55	1.0	23.50
		1	0	22.82	22.91	22.41	1.0	23.50
	64QAM	1	37	22.84	22.89	22.42	1.0	23.50
		1	74	22.82	22.92	22.44	1.0	23.50
		36	0	21.58	21.52	21.54	2.0	22.50
		36	20	21.58	21.48	21.54	2.0	22.50
		36	39	21.59	21.56	21.54	2.0	22.50
		75	0	21.52	21.49	21.55	2.0	22.50
	256QAM	1	0	21.65	22.05	21.82	2.0	22.50
		1	37	21.61	22.13	21.78	2.0	22.50
		1	74	21.65	22.15	21.81	2.0	22.50
		36	0	20.61	20.51	20.57	3.0	21.50
		36	20	20.58	20.50	20.58	3.0	21.50
		36	39	20.58	20.57	20.56	3.0	21.50
QPSK	75	0	20.53	20.54	20.53	3.0	21.50	
	1	0	18.38	18.80	18.95	4.0	20.50	
	1	37	18.34	18.83	18.90	4.0	20.50	
	1	74	18.40	18.84	18.94	4.0	20.50	
	36	0	18.54	18.50	18.60	4.0	20.50	
	36	20	18.52	18.51	18.55	4.0	20.50	
16QAM	36	39	18.52	18.59	18.56	4.0	20.50	
	75	0	18.52	18.50	18.57	4.0	20.50	

**LTE Band 2 (Main. 2 Ant) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18650	18900	19150		
				1855 MHz	1880 MHz	1905 MHz		
10 MHz	QPSK	1	0	23.22	23.24	23.28	0.0	24.50
		1	25	23.20	23.24	23.25	0.0	24.50
		1	49	23.19	23.17	23.25	0.0	24.50
		25	0	22.60	22.61	22.68	1.0	23.50
		25	12	22.58	22.62	22.67	1.0	23.50
		25	25	22.57	22.65	22.65	1.0	23.50
	16QAM	50	0	22.59	22.60	22.65	1.0	23.50
		1	0	22.93	22.62	22.58	1.0	23.50
		1	25	22.89	22.63	22.54	1.0	23.50
		1	49	22.87	22.53	22.53	1.0	23.50
		25	0	21.62	21.73	21.73	2.0	22.50
		25	12	21.68	21.70	21.72	2.0	22.50
	64QAM	25	25	21.60	21.73	21.64	2.0	22.50
		50	0	21.64	21.65	21.64	2.0	22.50
		1	0	21.76	21.85	21.98	2.0	22.50
		1	25	21.73	21.91	21.95	2.0	22.50
		1	49	21.74	21.85	21.90	2.0	22.50
		25	0	20.70	20.69	20.71	3.0	21.50
	256QAM	25	12	20.71	20.68	20.70	3.0	21.50
		25	25	20.65	20.71	20.63	3.0	21.50
		50	0	20.67	20.56	20.65	3.0	21.50
1		0	18.50	18.67	19.22	4.0	20.50	
1		25	18.42	18.66	19.12	4.0	20.50	
1		49	18.38	18.66	19.14	4.0	20.50	
5 MHz	QPSK	25	0	18.68	18.71	18.73	4.0	20.50
		25	12	18.66	18.69	18.65	4.0	20.50
		25	25	18.61	18.73	18.65	4.0	20.50
		50	0	18.63	18.63	18.65	4.0	20.50
		16QAM	18625	18900	19175	MPR	Tune-up Limit	
			1852.5 MHz	1880 MHz	1907.5 MHz			
	1		0	23.29	23.30			23.33
	1		12	23.24	23.32	23.23	0.0	24.50
	1		24	23.23	23.26	23.24	0.0	24.50
	12		0	22.64	22.65	22.63	1.0	23.50
	64QAM	12	7	22.61	22.64	22.64	1.0	23.50
		12	13	22.54	22.63	22.56	1.0	23.50
		25	0	22.59	22.59	22.61	1.0	23.50
		1	0	23.05	22.71	22.77	1.0	23.50
		1	12	23.00	22.63	22.68	1.0	23.50
		1	24	22.99	22.66	22.69	1.0	23.50
	256QAM	12	0	21.78	21.67	21.73	2.0	22.50
		12	7	21.79	21.68	21.76	2.0	22.50
		12	13	21.68	21.64	21.64	2.0	22.50
		25	0	21.65	21.56	21.62	2.0	22.50
		1	0	22.02	21.85	21.57	2.0	22.50
1		12	22.00	21.88	21.61	2.0	22.50	
16QAM	1	24	21.92	21.84	21.50	2.0	22.50	
	12	0	20.60	20.69	20.72	3.0	21.50	
	12	7	20.66	20.65	20.64	3.0	21.50	
	12	13	20.57	20.65	20.60	3.0	21.50	
	25	0	20.56	20.58	20.56	3.0	21.50	
	1	0	18.79	18.68	18.36	4.0	20.50	
64QAM	1	12	18.70	18.78	18.35	4.0	20.50	
	1	24	18.72	18.68	18.29	4.0	20.50	
	12	0	18.70	18.65	18.66	4.0	20.50	
	12	7	18.65	18.62	18.68	4.0	20.50	
	12	13	18.57	18.64	18.56	4.0	20.50	
	25	0	18.60	18.57	18.65	4.0	20.50	

**LTE Band 2 (Main. 2 Ant) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit		
				18615	18900	19185				
				1851.5 MHz	1880 MHz	1908.5 MHz				
3 MHz	QPSK	1	0	23.31	23.33	23.31	0.0	24.50		
		1	8	23.19	23.18	23.14	0.0	24.50		
		1	14	23.18	23.19	23.20	0.0	24.50		
		8	0	22.60	22.58	22.65	1.0	23.50		
		8	4	22.57	22.62	22.63	1.0	23.50		
		8	7	22.58	22.63	22.61	1.0	23.50		
	16QAM	15	0	22.56	22.54	22.60	1.0	23.50		
		1	0	22.99	22.73	22.60	1.0	23.50		
		1	8	22.82	22.58	22.44	1.0	23.50		
		1	14	22.85	22.55	22.45	1.0	23.50		
		8	0	21.65	21.66	21.73	2.0	22.50		
		8	4	21.67	21.67	21.74	2.0	22.50		
	64QAM	8	7	21.64	21.74	21.72	2.0	22.50		
		15	0	21.62	21.56	21.66	2.0	22.50		
		1	0	22.06	22.05	21.77	2.0	22.50		
		1	8	21.79	22.13	21.68	2.0	22.50		
		1	14	21.84	21.95	21.64	2.0	22.50		
		8	0	20.57	20.66	20.70	3.0	21.50		
	256QAM	8	4	20.51	20.68	20.66	3.0	21.50		
		8	7	20.49	20.73	20.62	3.0	21.50		
		15	0	20.63	20.56	20.63	3.0	21.50		
1		0	18.64	19.03	18.47	4.0	20.50			
1		8	18.66	19.07	18.38	4.0	20.50			
1		14	18.50	19.00	18.29	4.0	20.50			
1.4 MHz	QPSK	8	0	18.76	18.65	18.56	4.0	20.50		
		8	4	18.75	18.65	18.55	4.0	20.50		
		8	7	18.76	18.70	18.53	4.0	20.50		
		15	0	18.61	18.61	18.68	4.0	20.50		
		BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
						18607	18900	19193		
	1850.7 MHz					1880 MHz	1909.3 MHz			
	1.4 MHz	QPSK	1	0	23.26	23.19	23.16	0.0	24.50	
			1	3	23.27	23.19	23.20	0.0	24.50	
			1	5	23.18	23.11	23.11	0.0	24.50	
			3	0	23.17	23.24	23.14	0.0	24.50	
			3	1	23.20	23.29	23.19	0.0	24.50	
			3	3	23.16	23.27	23.16	0.0	24.50	
		16QAM	6	0	22.45	22.58	22.53	1.0	23.50	
			1	0	22.67	23.08	22.48	1.0	23.50	
			1	3	22.75	23.05	22.53	1.0	23.50	
			1	5	22.60	22.96	22.43	1.0	23.50	
			3	0	22.51	22.79	22.71	1.0	23.50	
			3	1	22.49	22.81	22.72	1.0	23.50	
		64QAM	3	3	22.56	22.72	22.71	1.0	23.50	
			6	0	21.65	21.43	21.67	2.0	22.50	
1			0	22.05	21.69	21.85	2.0	22.50		
1			3	22.12	21.71	21.89	2.0	22.50		
1			5	21.99	21.59	21.81	2.0	22.50		
3			0	21.82	21.70	21.30	2.0	22.50		
256QAM		3	1	21.82	21.74	21.73	2.0	22.50		
		3	3	21.80	21.76	21.68	2.0	22.50		
		6	0	20.48	20.84	21.47	3.0	21.50		
	1	0	18.70	18.88	18.73	4.0	20.50			
	1	3	18.83	18.69	18.80	4.0	20.50			
	1	5	18.68	18.72	18.73	4.0	20.50			
256QAM	3	0	18.47	18.70	18.71	4.0	20.50			
	3	1	18.50	18.69	18.72	4.0	20.50			
	3	3	18.45	18.67	18.69	4.0	20.50			
	6	0	18.47	18.67	18.68	4.0	20.50			

**LTE Band 2 (Sub. 2 Ant.) Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				18700	18900	19100		
				1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	18.92	19.00	18.51	0.0	20.00
		1	49	18.86	18.79	18.38	0.0	20.00
		1	99	18.74	18.94	18.22	0.0	20.00
		50	0	18.16	18.01	17.71	1.0	19.00
		50	24	18.14	18.13	17.53	1.0	19.00
		50	50	18.11	18.18	17.49	1.0	19.00
	16QAM	100	0	18.16	18.15	17.57	1.0	19.00
		1	0	18.31	18.51	18.15	1.0	19.00
		1	49	18.27	18.52	17.93	1.0	19.00
		1	99	18.22	18.66	17.87	1.0	19.00
		50	0	17.15	17.11	16.46	2.0	18.00
		50	24	17.18	17.04	16.49	2.0	18.00
	64QAM	50	50	17.09	17.19	16.53	2.0	18.00
		100	0	17.24	17.13	16.61	2.0	18.00
		1	0	17.51	17.42	16.89	2.0	18.00
		1	49	17.42	17.39	16.84	2.0	18.00
		1	99	17.39	17.52	16.76	2.0	18.00
		50	0	16.32	16.11	15.53	3.0	17.00
	256QAM	50	24	16.39	16.13	15.52	3.0	17.00
		50	50	16.26	16.26	15.31	3.0	17.00
		100	0	16.34	16.16	15.53	3.0	17.00
1		0	13.92	14.04	13.09	5.0	15.00	
1		49	13.75	13.83	13.12	5.0	15.00	
1		99	13.72	13.87	13.11	5.0	15.00	
15 MHz	QPSK	50	0	14.34	14.18	13.56	5.0	15.00
		50	24	14.37	14.21	13.46	5.0	15.00
		50	50	14.22	14.25	13.39	5.0	15.00
		100	0	14.28	14.27	13.35	5.0	15.00
		1	0	18.77	18.63	18.83	0.0	20.00
		1	37	18.74	18.73	18.72	0.0	20.00
	16QAM	1	74	18.74	18.83	18.72	0.0	20.00
		36	0	18.05	17.92	18.00	1.0	19.00
		36	20	17.96	17.93	17.99	1.0	19.00
		36	39	18.06	17.97	17.88	1.0	19.00
		75	0	18.13	17.94	17.99	1.0	19.00
		1	0	18.05	18.34	18.13	1.0	19.00
	64QAM	1	37	17.98	18.34	17.93	1.0	19.00
		1	74	17.96	18.48	17.98	1.0	19.00
		36	0	17.18	16.97	16.91	2.0	18.00
		36	20	17.16	17.00	16.88	2.0	18.00
		36	39	17.15	17.09	16.85	2.0	18.00
		75	0	17.12	17.02	16.98	2.0	18.00
	256QAM	1	0	17.35	17.16	17.36	2.0	18.00
		1	37	17.20	17.25	17.23	2.0	18.00
		1	74	17.68	17.37	17.29	2.0	18.00
36		0	16.28	15.97	15.94	3.0	17.00	
36		20	16.24	15.97	15.91	3.0	17.00	
36		39	16.17	16.04	15.86	3.0	17.00	
256QAM	75	0	16.16	16.07	16.02	3.0	17.00	
	1	0	14.19	13.86	13.78	5.0	15.00	
	1	37	14.05	13.57	13.62	5.0	15.00	
	1	74	14.02	13.69	13.61	5.0	15.00	
	36	0	14.11	13.89	13.88	5.0	15.00	
	36	20	14.07	13.93	13.87	5.0	15.00	
256QAM	36	39	13.98	14.03	13.79	5.0	15.00	
	75	0	14.05	14.01	13.94	5.0	15.00	

**LTE Band 2 (Sub. 2 Ant.) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18650	18900	19150		
				1855 MHz	1880 MHz	1905 MHz		
10 MHz	QPSK	1	0	19.02	19.04	18.84	0.0	20.00
		1	25	18.96	19.13	18.74	0.0	20.00
		1	49	18.95	19.08	18.76	0.0	20.00
		25	0	18.19	18.15	17.99	1.0	19.00
		25	12	18.21	18.08	17.93	1.0	19.00
		25	25	18.15	18.13	17.96	1.0	19.00
		50	0	18.18	18.11	17.93	1.0	19.00
	16QAM	1	0	18.11	18.03	18.50	1.0	19.00
		1	25	18.04	17.71	18.42	1.0	19.00
		1	49	18.53	17.77	18.42	1.0	19.00
		25	0	17.24	17.11	17.03	2.0	18.00
		25	12	17.21	17.13	17.00	2.0	18.00
		25	25	17.13	17.15	17.02	2.0	18.00
		50	0	17.11	17.08	16.94	2.0	18.00
	64QAM	1	0	17.47	17.23	17.32	2.0	18.00
		1	25	17.39	17.27	17.25	2.0	18.00
		1	49	17.32	17.36	17.23	2.0	18.00
		25	0	16.27	16.19	16.10	3.0	17.00
		25	12	16.27	16.24	16.03	3.0	17.00
		25	25	16.18	16.24	16.02	3.0	17.00
		50	0	16.25	16.20	16.07	3.0	17.00
256QAM	1	0	14.08	14.17	13.74	5.0	15.00	
	1	25	14.20	14.21	13.79	5.0	15.00	
	1	49	14.14	14.28	13.70	5.0	15.00	
	25	0	14.17	14.08	14.12	5.0	15.00	
	25	12	14.16	14.12	14.04	5.0	15.00	
	25	25	14.08	14.11	14.05	5.0	15.00	
	50	0	14.09	14.12	14.07	5.0	15.00	
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18625	18900	19175		
				1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	19.00	18.61	18.95	0.0	20.00
		1	12	18.96	18.67	18.92	0.0	20.00
		1	24	18.93	18.56	18.99	0.0	20.00
		12	0	18.18	17.69	18.02	1.0	19.00
		12	7	18.14	17.68	18.07	1.0	19.00
		12	13	18.05	17.64	18.03	1.0	19.00
		25	0	18.10	17.66	17.97	1.0	19.00
	16QAM	1	0	18.11	17.63	18.01	1.0	19.00
		1	12	18.02	17.68	18.01	1.0	19.00
		1	24	17.99	17.62	18.51	1.0	19.00
		12	0	17.26	16.69	17.13	2.0	18.00
		12	7	17.16	16.61	17.07	2.0	18.00
		12	13	17.06	16.71	17.04	2.0	18.00
		25	0	17.14	16.69	17.05	2.0	18.00
	64QAM	1	0	17.33	16.87	17.19	2.0	18.00
		1	12	17.29	16.92	17.23	2.0	18.00
		1	24	17.28	16.86	17.18	2.0	18.00
		12	0	16.42	15.98	16.28	3.0	17.00
		12	7	16.38	15.95	16.35	3.0	17.00
		12	13	16.33	15.95	16.25	3.0	17.00
		25	0	16.22	15.76	16.07	3.0	17.00
	256QAM	1	0	14.21	13.64	14.04	5.0	15.00
		1	12	14.11	13.76	13.95	5.0	15.00
		1	24	14.11	13.68	14.07	5.0	15.00
		12	0	14.07	13.58	13.92	5.0	15.00
		12	7	14.02	13.50	13.93	5.0	15.00
		12	13	13.94	13.57	13.88	5.0	15.00
25		0	14.10	13.62	13.95	5.0	15.00	

**LTE Band 2 (Sub. 2 Ant.) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18615	18900	19185		
				1851.5 MHz	1880 MHz	1908.5 MHz		
3 MHz	QPSK	1	0	18.93	18.70	18.88	0.0	20.00
		1	8	19.00	18.74	18.89	0.0	20.00
		1	14	19.03	18.72	19.00	0.0	20.00
		8	0	18.01	17.93	17.99	1.0	19.00
		8	4	18.06	17.92	17.98	1.0	19.00
		8	7	18.01	17.87	18.01	1.0	19.00
		15	0	17.93	17.83	17.96	1.0	19.00
	16QAM	1	0	17.81	17.93	17.84	1.0	19.00
		1	8	17.94	18.11	17.99	1.0	19.00
		1	14	17.79	18.10	17.89	1.0	19.00
		8	0	17.03	16.78	16.89	2.0	18.00
		8	4	16.99	16.66	16.87	2.0	18.00
		8	7	16.99	16.71	16.80	2.0	18.00
		15	0	16.97	16.75	16.82	2.0	18.00
	64QAM	1	0	17.21	17.07	17.11	2.0	18.00
		1	8	17.24	17.01	17.10	2.0	18.00
		1	14	17.27	17.09	17.05	2.0	18.00
		8	0	16.25	16.12	16.20	3.0	17.00
		8	4	16.23	15.98	16.22	3.0	17.00
		8	7	16.17	15.99	16.19	3.0	17.00
		15	0	16.17	16.03	16.10	3.0	17.00
256QAM	1	0	14.04	13.68	14.00	5.0	15.00	
	1	8	14.01	14.13	14.03	5.0	15.00	
	1	14	13.88	13.78	13.99	5.0	15.00	
	8	0	14.22	13.83	14.10	5.0	15.00	
	8	4	13.90	14.04	14.02	5.0	15.00	
	8	7	14.20	13.99	14.22	5.0	15.00	
	15	0	13.98	14.00	14.01	5.0	15.00	
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				18607	18900	19193		
				1850.7 MHz	1880 MHz	1909.3 MHz		
1.4 MHz	QPSK	1	0	18.92	18.88	18.79	0.0	20.00
		1	3	18.77	18.81	18.67	0.0	20.00
		1	5	18.66	18.86	18.65	0.0	20.00
		3	0	18.61	18.95	18.55	0.0	20.00
		3	1	18.70	18.88	18.65	0.0	20.00
		3	3	18.67	18.82	18.67	0.0	20.00
		6	0	17.83	17.95	17.80	1.0	19.00
	16QAM	1	0	17.86	18.18	17.76	1.0	19.00
		1	3	18.03	18.14	18.10	1.0	19.00
		1	5	18.02	18.15	18.12	1.0	19.00
		3	0	18.18	17.89	18.05	1.0	19.00
		3	1	18.30	17.83	18.22	1.0	19.00
		3	3	18.00	17.74	18.11	1.0	19.00
		6	0	16.73	16.88	16.77	2.0	18.00
	64QAM	1	0	17.00	17.24	17.20	2.0	18.00
		1	3	17.19	17.37	17.23	2.0	18.00
		1	5	17.05	17.38	17.32	2.0	18.00
		3	0	17.17	17.01	17.08	2.0	18.00
		3	1	17.31	17.06	17.20	2.0	18.00
		3	3	16.90	16.88	16.78	2.0	18.00
		6	0	15.87	15.86	15.90	3.0	17.00
	256QAM	1	0	13.75	13.85	13.80	5.0	15.00
		1	3	14.07	14.05	13.99	5.0	15.00
		1	5	14.08	14.18	14.02	5.0	15.00
		3	0	13.88	13.68	13.70	5.0	15.00
		3	1	14.02	13.61	13.99	5.0	15.00
		3	3	13.88	13.65	13.84	5.0	15.00
6		0	14.08	13.97	14.01	5.0	15.00	

**LTE Band 5 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				Measured Pwr (dBm)			MPR	Tune-up Limit	
				20425	20525	20625			
				826.5 MHz	836.5 MHz	846.5 MHz			
10 MHz	QPSK	1	0		23.91		0.0	24.70	
		1	25		23.97		0.0	24.70	
		1	49		23.90		0.0	24.70	
		25	0		23.05		1.0	23.70	
		25	12		23.15		1.0	23.70	
		25	25		23.10		1.0	23.70	
	16QAM	50	0		23.04		1.0	23.70	
		1	0		22.98		1.0	23.70	
		1	25		23.08		1.0	23.70	
		1	49		22.96		1.0	23.70	
		25	0		22.14		2.0	22.70	
		25	12		22.21		2.0	22.70	
	64QAM	25	25		22.17		2.0	22.70	
		50	0		22.10		2.0	22.70	
		1	0		22.22		2.0	22.70	
		1	25		22.32		2.0	22.70	
		1	49		22.28		2.0	22.70	
		25	0		21.16		3.0	21.70	
	256QAM	25	12		21.25		3.0	21.70	
		25	25		21.19		3.0	21.70	
		50	0		21.04		3.0	21.70	
		1	0		19.02		5.0	19.70	
		1	25		19.14		5.0	19.70	
		1	49		19.09		5.0	19.70	
5 MHz	QPSK	25	0		19.19		5.0	19.70	
		25	12		19.28		5.0	19.70	
		25	25		19.25		5.0	19.70	
		50	0		19.13		5.0	19.70	
		1	0		23.82	24.07	24.09	0.0	24.70
		1	12		23.80	24.07	24.05	0.0	24.70
	16QAM	1	24		23.92	24.08	24.11	0.0	24.70
		12	0		22.78	23.06	23.05	1.0	23.70
		12	7		22.90	23.14	23.13	1.0	23.70
		12	13		22.84	23.12	23.09	1.0	23.70
		25	0		22.88	23.10	23.12	1.0	23.70
		1	0		23.36	23.26	23.21	1.0	23.70
64QAM	1	12		23.29	23.15	23.17	1.0	23.70	
	1	24		23.39	23.25	23.19	1.0	23.70	
	12	0		21.95	22.11	22.13	2.0	22.70	
	12	7		22.03	22.14	22.19	2.0	22.70	
	12	13		22.00	22.13	22.18	2.0	22.70	
	25	0		21.93	22.06	22.15	2.0	22.70	
256QAM	1	0		22.05	22.02	22.43	2.0	22.70	
	1	12		22.03	22.10	22.52	2.0	22.70	
	1	24		22.16	22.08	22.42	2.0	22.70	
	12	0		20.86	21.07	21.05	3.0	21.70	
	12	7		20.90	21.16	21.17	3.0	21.70	
	12	13		20.91	21.16	21.12	3.0	21.70	
256QAM	25	0		20.89	21.11	21.07	3.0	21.70	
	1	0		18.87	18.89	19.27	5.0	19.70	
	1	12		18.98	18.96	19.19	5.0	19.70	
	1	24		19.02	18.93	19.29	5.0	19.70	
	12	0		18.79	19.12	19.13	5.0	19.70	
	12	7		18.94	19.17	19.21	5.0	19.70	
256QAM	12	13		18.87	19.15	19.14	5.0	19.70	
	25	0		18.91	19.25	19.15	5.0	19.70	



**LTE Band 5 Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.70	24.02	24.15	0.0	24.70
		1	8	23.61	23.88	24.03	0.0	24.70
		1	14	23.73	24.06	24.09	0.0	24.70
		8	0	22.75	23.00	23.03	1.0	23.70
		8	4	22.82	23.10	23.03	1.0	23.70
		8	7	22.83	23.11	23.13	1.0	23.70
		15	0	22.81	23.08	23.01	1.0	23.70
	16QAM	1	0	22.82	23.01	23.50	1.0	23.70
		1	8	22.70	22.92	23.42	1.0	23.70
		1	14	22.82	22.94	23.49	1.0	23.70
		8	0	21.74	22.12	22.05	2.0	22.70
		8	4	21.85	22.22	22.08	2.0	22.70
		8	7	21.90	22.23	22.17	2.0	22.70
		15	0	21.78	22.11	22.09	2.0	22.70
	64QAM	1	0	22.09	22.48	22.14	2.0	22.70
		1	8	21.99	22.62	22.14	2.0	22.70
		1	14	22.10	22.54	22.16	2.0	22.70
		8	0	20.70	21.09	21.05	3.0	21.70
		8	4	20.77	21.22	21.04	3.0	21.70
		8	7	20.79	21.20	21.13	3.0	21.70
		15	0	20.88	21.10	21.06	3.0	21.70
	256QAM	1	0	18.79	19.43	18.89	5.0	19.70
		1	8	18.89	19.50	18.92	5.0	19.70
		1	14	18.86	19.54	18.91	5.0	19.70
		8	0	18.84	19.16	19.00	5.0	19.70
		8	4	19.00	19.23	19.04	5.0	19.70
		8	7	19.00	19.24	19.11	5.0	19.70
		15	0	18.87	19.20	19.11	5.0	19.70
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	23.58	23.98	23.95	0.0	24.70
		1	3	23.65	24.01	23.90	0.0	24.70
		1	5	23.61	23.96	23.89	0.0	24.70
		3	0	23.58	23.87	23.94	0.0	24.70
		3	1	23.67	23.95	23.96	0.0	24.70
		3	3	23.64	23.94	23.99	0.0	24.70
		6	0	22.75	22.96	22.99	1.0	23.70
	16QAM	1	0	22.63	23.12	23.49	1.0	23.70
		1	3	22.76	23.21	23.40	1.0	23.70
		1	5	22.66	23.11	23.40	1.0	23.70
		3	0	22.84	23.00	23.20	1.0	23.70
		3	1	22.89	23.05	23.21	1.0	23.70
		3	3	22.90	23.10	23.17	1.0	23.70
		6	0	21.89	22.12	21.86	2.0	22.70
	64QAM	1	0	21.71	22.23	22.57	2.0	22.70
		1	3	21.86	22.31	22.63	2.0	22.70
		1	5	21.79	22.24	22.53	2.0	22.70
		3	0	21.74	22.01	22.31	2.0	22.70
		3	1	21.86	21.99	22.31	2.0	22.70
		3	3	21.88	21.98	22.29	2.0	22.70
		6	0	21.01	21.08	20.98	3.0	21.70
	256QAM	1	0	19.12	19.14	19.17	5.0	19.70
		1	3	18.61	19.25	19.31	5.0	19.70
		1	5	18.56	19.14	19.16	5.0	19.70
		3	0	18.51	19.14	18.98	5.0	19.70
		3	1	18.56	19.15	19.06	5.0	19.70
		3	3	18.62	19.15	18.96	5.0	19.70
		6	0	18.85	19.15	18.99	5.0	19.70

**LTE Band 12 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				Measured Pwr (dBm)			MPR	Tune-up Limit	
				23095	707.5 MHz				
10 MHz	QPSK	1	0		25.02		0.0	25.70	
		1	25		25.11		0.0	25.70	
		1	49		25.04		0.0	25.70	
		25	0		24.18		1.0	24.70	
		25	12		24.26		1.0	24.70	
		25	25		24.30		1.0	24.70	
	16QAM	50	0		24.22		1.0	24.70	
		1	0		24.07		1.0	24.70	
		1	25		24.23		1.0	24.70	
		1	49		24.14		1.0	24.70	
		25	0		23.28		2.0	23.70	
		25	12		23.34		2.0	23.70	
	64QAM	25	25		23.38		2.0	23.70	
		50	0		23.26		2.0	23.70	
		1	0		23.47		2.0	23.70	
		1	25		23.61		2.0	23.70	
		1	49		23.50		2.0	23.70	
		25	0		22.23		3.0	22.70	
	256QAM	25	12		22.34		3.0	22.70	
		25	25		22.38		3.0	22.70	
50		0		22.26		3.0	22.70		
1		0		20.03		5.0	20.70		
1		25		20.22		5.0	20.70		
1		49		20.23		5.0	20.70		
5 MHz	QPSK	25	0		20.28		5.0	20.70	
		25	12		20.33		5.0	20.70	
		25	25		20.38		5.0	20.70	
		50	0		20.22		5.0	20.70	
		1	0		24.74	24.99	25.01	0.0	25.70
		1	12		24.83	25.04	24.97	0.0	25.70
	16QAM	1	24		24.88	25.06	24.98	0.0	25.70
		12	0		23.89	24.00	24.02	1.0	24.70
		12	7		23.97	24.05	24.02	1.0	24.70
		12	13		23.92	24.06	23.88	1.0	24.70
		25	0		23.88	24.03	24.00	1.0	24.70
		1	0		23.85	24.11	24.50	1.0	24.70
	64QAM	1	12		23.82	24.15	24.42	1.0	24.70
		1	24		23.95	24.19	24.27	1.0	24.70
		12	0		22.95	23.09	23.17	2.0	23.70
		12	7		23.00	23.13	23.15	2.0	23.70
		12	13		22.96	23.15	23.00	2.0	23.70
		25	0		22.86	23.06	23.05	2.0	23.70
	256QAM	1	0		23.16	23.31	23.25	2.0	23.70
		1	12		23.19	23.46	23.17	2.0	23.70
1		24		23.29	23.42	23.07	2.0	23.70	
12		0		21.84	22.03	22.12	3.0	22.70	
12		7		21.90	22.07	22.06	3.0	22.70	
12		13		21.89	22.09	21.95	3.0	22.70	
256QAM	25	0		21.88	21.96	22.01	3.0	22.70	
	1	0		19.92	20.06	20.08	5.0	20.70	
	1	12		19.90	20.18	20.13	5.0	20.70	
	1	24		20.07	20.21	19.91	5.0	20.70	
	12	0		19.83	20.03	20.01	5.0	20.70	
	12	7		19.93	20.08	20.03	5.0	20.70	
256QAM	12	13		19.87	20.12	19.90	5.0	20.70	
	25	0		19.89	20.00	19.98	5.0	20.70	

**LTE Band 12 Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23025	23095	23165		
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	24.87	25.00	24.89	0.0	25.70
		1	8	24.85	24.92	24.90	0.0	25.70
		1	14	24.80	24.96	24.84	0.0	25.70
		8	0	23.82	24.00	24.00	1.0	24.70
		8	4	23.90	24.11	23.98	1.0	24.70
		8	7	23.88	24.10	23.97	1.0	24.70
	16QAM	15	0	23.87	24.02	23.97	1.0	24.70
		1	0	24.22	24.09	23.91	1.0	24.70
		1	8	24.07	23.99	23.76	1.0	24.70
		1	14	24.16	24.04	23.76	1.0	24.70
		8	0	22.88	23.07	23.10	2.0	23.70
		8	4	22.98	23.19	23.08	2.0	23.70
	64QAM	8	7	22.98	23.15	23.04	2.0	23.70
		15	0	22.91	23.00	22.97	2.0	23.70
		1	0	22.83	23.07	23.33	2.0	23.70
		1	8	22.87	23.15	23.11	2.0	23.70
		1	14	22.91	23.11	23.01	2.0	23.70
		8	0	21.83	22.08	21.93	3.0	22.70
	256QAM	8	4	21.92	22.13	21.90	3.0	22.70
		8	7	21.88	22.15	21.87	3.0	22.70
		15	0	21.85	22.10	22.01	3.0	22.70
1		0	19.58	19.83	20.00	5.0	20.70	
1		8	19.64	19.89	20.01	5.0	20.70	
1		14	19.57	19.85	19.79	5.0	20.70	
1.4 MHz	QPSK	8	0	19.69	19.95	20.10	5.0	20.70
		8	4	19.81	20.06	20.12	5.0	20.70
		8	7	19.79	20.09	20.12	5.0	20.70
		15	0	19.90	20.04	19.95	5.0	20.70
		1	0	24.65	24.89	24.89	0.0	25.70
		1	3	24.68	24.93	24.95	0.0	25.70
	16QAM	1	5	24.62	24.89	24.77	0.0	25.70
		3	0	24.68	24.89	24.83	0.0	25.70
		3	1	24.79	24.94	24.84	0.0	25.70
		3	3	24.73	24.92	24.81	0.0	25.70
		6	0	23.75	24.01	23.85	1.0	24.70
		1	0	24.22	23.90	24.00	1.0	24.70
	64QAM	1	3	24.24	23.98	24.08	1.0	24.70
		1	5	24.15	23.94	23.93	1.0	24.70
		3	0	23.92	24.14	23.80	1.0	24.70
		3	1	23.88	24.12	23.77	1.0	24.70
		3	3	23.97	24.17	23.81	1.0	24.70
		6	0	22.65	23.19	23.05	2.0	23.70
	256QAM	1	0	22.78	23.05	23.00	2.0	23.70
		1	3	22.91	23.08	23.05	2.0	23.70
		1	5	22.80	23.08	22.85	2.0	23.70
3		0	22.90	23.06	23.02	2.0	23.70	
3		1	22.94	23.13	23.06	2.0	23.70	
3		3	22.93	23.17	23.04	2.0	23.70	
256QAM	6	0	22.06	22.31	22.14	3.0	22.70	
	1	0	19.37	19.63	19.94	5.0	20.70	
	1	3	20.30	20.10	20.06	5.0	20.70	
	1	5	19.93	20.05	19.79	5.0	20.70	
	3	0	19.99	20.00	19.94	5.0	20.70	
	3	1	20.02	20.03	19.88	5.0	20.70	
		3	3	20.03	20.05	19.85	5.0	20.70
		6	0	20.08	20.08	19.93	5.0	20.70

**LTE Band 13 Masured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				Measured Pwr (dBm)		MPR	Tune-up Limit
				23230	782 MHz		
10 MHz	QPSK	1	0	23.75		0.0	24.70
		1	25	23.66		0.0	24.70
		1	49	23.64		0.0	24.70
		25	0	22.69		1.0	23.70
		25	12	22.68		1.0	23.70
		25	25	22.73		1.0	23.70
	16QAM	50	0	22.68		1.0	23.70
		1	0	23.23		1.0	23.70
		1	25	23.05		1.0	23.70
		1	49	23.11		1.0	23.70
		25	0	21.80		2.0	22.70
		25	12	21.78		2.0	22.70
	64QAM	25	25	21.74		2.0	22.70
		50	0	21.73		2.0	22.70
		1	0	21.87		2.0	22.70
		1	25	21.87		2.0	22.70
		1	49	21.86		2.0	22.70
		25	0	20.74		3.0	21.70
	256QAM	25	12	20.71		3.0	21.70
		25	25	20.79		3.0	21.70
		50	0	20.71		3.0	21.70
1		0	18.59		5.0	19.70	
1		25	18.51		5.0	19.70	
1		49	18.52		5.0	19.70	
5 MHz	QPSK	25	0	18.72		5.0	19.70
		25	12	18.71		5.0	19.70
		25	25	18.74		5.0	19.70
		50	0	18.68		5.0	19.70
		1	0	23.72		0.0	24.70
		1	12	23.64		0.0	24.70
	16QAM	1	24	23.62		0.0	24.70
		12	0	22.60		1.0	23.70
		12	7	22.64		1.0	23.70
		12	13	22.67		1.0	23.70
		25	0	22.60		1.0	23.70
		1	0	22.84		1.0	23.70
	64QAM	1	12	22.77		1.0	23.70
		1	24	22.75		1.0	23.70
		12	0	21.70		2.0	22.70
		12	7	21.73		2.0	22.70
		12	13	21.74		2.0	22.70
		25	0	21.62		2.0	22.70
	256QAM	1	0	21.57		2.0	22.70
		1	12	21.66		2.0	22.70
		1	24	21.60		2.0	22.70
12		0	20.66		3.0	21.70	
12		7	20.66		3.0	21.70	
12		13	20.69		3.0	21.70	
256QAM	25	0	20.56		3.0	21.70	
	1	0	18.72		5.0	19.70	
	1	12	18.84		5.0	19.70	
	1	24	18.73		5.0	19.70	
	12	0	18.64		5.0	19.70	
	12	7	18.64		5.0	19.70	
		12	13	18.69		5.0	19.70
		25	0	18.61		5.0	19.70

**LTE Band 26 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				Measured Pwr (dBm)						
				26740 819 MHz	26790 824 MHz	26865 831.5 MHz	26990 844 MHz			
15 MHz	QPSK	1	0		23.70	23.72		0.0	25.00	
		1	37		23.71	23.81		0.0	25.00	
		1	74		23.81	23.92		0.0	25.00	
		36	0		22.66	22.80		1.0	24.00	
		36	20		22.78	22.86		1.0	24.00	
		36	39		22.83	22.93		1.0	24.00	
	75	0		22.77	22.84		1.0	24.00		
	16QAM	1	0		23.16	23.10		1.0	24.00	
		1	37		23.01	23.27		1.0	24.00	
		1	74		23.19	23.30		1.0	24.00	
		36	0		21.61	21.85		2.0	23.00	
		36	20		21.73	21.90		2.0	23.00	
		36	39		21.82	22.01		2.0	23.00	
	75	0		21.77	21.88		2.0	23.00		
	64QAM	1	0		22.02	22.03		2.0	23.00	
		1	37		22.02	22.17		2.0	23.00	
		1	74		22.15	22.23		2.0	23.00	
		36	0		20.69	20.87		3.0	22.00	
		36	20		20.79	20.90		3.0	22.00	
		36	39		20.87	20.99		3.0	22.00	
	75	0		20.81	20.88		3.0	22.00		
	256QAM	1	0		19.14	19.01		5.0	20.00	
		1	37		19.09	19.12		5.0	20.00	
		1	74		19.32	19.30		5.0	20.00	
36		0		18.69	18.76		5.0	20.00		
36		20		18.78	18.83		5.0	20.00		
36		39		18.86	18.90		5.0	20.00		
75	0		18.83	18.84		5.0	20.00			
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)				MPR	Tune-up Limit	
				26740 819 MHz	26790 824 MHz	26865 831.5 MHz	26990 844 MHz			
				26740 819 MHz	26790 824 MHz	26865 831.5 MHz	26990 844 MHz			
10 MHz	QPSK	1	0	23.78	23.93	23.90	24.08	0.0	25.00	
		1	25	23.71	23.95	23.92	24.09	0.0	25.00	
		1	49	23.64	24.06	24.00	24.02	0.0	25.00	
		25	0	22.88	23.01	23.00	23.14	1.0	24.00	
		25	12	22.84	23.10	22.98	23.15	1.0	24.00	
		25	25	22.80	23.11	23.06	23.21	1.0	24.00	
	50	0	22.84	23.09	22.99	23.13	1.0	24.00		
	16QAM	1	0	22.88	23.35	22.97	23.47	1.0	24.00	
		1	25	22.79	23.34	22.93	23.45	1.0	24.00	
		1	49	22.70	23.42	22.94	23.44	1.0	24.00	
		25	0	21.95	22.09	22.04	22.15	2.0	23.00	
		25	12	21.93	22.14	22.05	22.17	2.0	23.00	
		25	25	21.92	22.15	22.09	22.19	2.0	23.00	
	50	0	21.88	22.13	21.99	22.12	2.0	23.00		
	64QAM	1	0	22.19	22.09	22.23	22.27	2.0	23.00	
		1	25	22.04	22.14	22.40	22.33	2.0	23.00	
		1	49	22.00	22.29	22.46	22.31	2.0	23.00	
		25	0	20.96	21.11	21.08	21.27	3.0	22.00	
		25	12	20.89	21.18	21.05	21.23	3.0	22.00	
		25	25	20.89	21.17	21.11	21.31	3.0	22.00	
	50	0	20.86	21.14	21.03	21.18	3.0	22.00		
	256QAM	1	0	18.95	18.76	19.40	18.90	5.0	20.00	
		1	25	18.82	18.86	19.51	18.97	5.0	20.00	
		1	49	18.81	18.95	19.69	18.94	5.0	20.00	
25		0	18.96	19.04	19.09	19.18	5.0	20.00		
25		12	18.95	19.11	19.06	19.20	5.0	20.00		
25		25	18.87	19.13	19.16	19.23	5.0	20.00		
50	0	18.89	19.10	19.07	19.17	5.0	20.00			

**LTE Band 26 Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)				MPR	Tune-up Limit
				26715	26790	26865	27015		
				816.5 MHz	824 MHz	831.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	23.86	24.02	23.97	24.17	0.0	25.00
		1	12	23.82	23.98	23.97	24.05	0.0	25.00
		1	24	23.81	24.03	24.01	24.00	0.0	25.00
		12	0	22.90	22.95	22.94	23.16	1.0	24.00
		12	7	22.87	23.08	22.95	23.18	1.0	24.00
		12	13	22.83	23.03	23.01	23.09	1.0	24.00
		25	0	22.86	23.05	22.95	23.12	1.0	24.00
	16QAM	1	0	23.00	23.43	23.13	23.61	1.0	24.00
		1	12	22.88	23.43	23.08	23.62	1.0	24.00
		1	24	22.95	23.44	23.15	23.54	1.0	24.00
		12	0	21.94	22.13	22.01	22.29	2.0	23.00
		12	7	21.91	22.21	22.05	22.29	2.0	23.00
		12	13	21.86	22.19	22.10	22.26	2.0	23.00
		25	0	21.83	22.11	21.96	22.19	2.0	23.00
	64QAM	1	0	22.14	22.32	21.92	22.52	2.0	23.00
		1	12	22.06	22.36	22.06	22.51	2.0	23.00
		1	24	22.04	22.35	22.00	22.44	2.0	23.00
		12	0	20.95	20.99	21.03	21.17	3.0	22.00
		12	7	20.91	21.11	21.06	21.20	3.0	22.00
		12	13	20.87	21.05	21.09	21.14	3.0	22.00
		25	0	20.86	21.04	20.94	21.09	3.0	22.00
	256QAM	1	0	18.96	19.12	18.74	19.34	5.0	20.00
		1	12	19.01	19.14	18.87	19.22	5.0	20.00
		1	24	18.88	19.21	18.81	19.25	5.0	20.00
12		0	18.90	18.97	18.94	19.18	5.0	20.00	
12		7	18.90	19.08	19.02	19.21	5.0	20.00	
12		13	18.82	19.05	19.06	19.14	5.0	20.00	
25		0	18.86	19.04	19.03	19.16	5.0	20.00	
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)				MPR	Tune-up Limit
				26705	26790	26865	27025		
				815.5 MHz	824 MHz	831.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.79	23.97	23.94	24.13	0.0	25.00
		1	8	23.66	23.90	23.83	24.02	0.0	25.00
		1	14	23.70	23.98	23.96	24.04	0.0	25.00
		8	0	22.86	22.92	22.93	23.13	1.0	24.00
		8	4	22.92	23.03	22.94	23.14	1.0	24.00
		8	7	22.86	23.05	23.07	23.11	1.0	24.00
		15	0	22.83	23.02	22.94	23.09	1.0	24.00
	16QAM	1	0	22.92	23.34	22.88	23.48	1.0	24.00
		1	8	22.90	23.23	22.84	23.40	1.0	24.00
		1	14	22.85	23.39	22.89	23.46	1.0	24.00
		8	0	21.86	21.99	22.03	22.14	2.0	23.00
		8	4	21.90	22.16	22.08	22.18	2.0	23.00
		8	7	21.94	22.12	22.15	22.19	2.0	23.00
		15	0	21.82	22.07	21.97	22.17	2.0	23.00
	64QAM	1	0	22.22	22.05	22.36	22.18	2.0	23.00
		1	8	22.09	22.10	22.50	22.15	2.0	23.00
		1	14	22.18	22.17	22.46	22.15	2.0	23.00
		8	0	20.85	20.99	21.04	21.13	3.0	22.00
		8	4	20.84	21.09	21.10	21.12	3.0	22.00
		8	7	20.84	21.09	21.16	21.15	3.0	22.00
		15	0	20.91	21.05	20.98	21.12	3.0	22.00
	256QAM	1	0	18.90	18.78	19.32	18.93	5.0	20.00
		1	8	18.95	18.82	19.40	18.89	5.0	20.00
		1	14	18.85	18.83	19.43	18.83	5.0	20.00
8		0	18.98	18.89	18.99	19.06	5.0	20.00	
8		4	19.02	19.00	19.05	19.08	5.0	20.00	
8		7	19.05	19.05	19.13	19.05	5.0	20.00	
15		0	18.92	19.09	19.03	19.15	5.0	20.00	

**LTE Band 26 Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)				MPR	Tune-up Limit
				26697	26790	26865	27033		
				814.7 MHz	824 MHz	831.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	23.71	23.85	23.93	23.90	0.0	25.00
		1	3	23.76	23.88	23.99	23.93	0.0	25.00
		1	5	23.73	23.85	23.93	23.89	0.0	25.00
		3	0	23.72	23.83	23.84	23.93	0.0	25.00
		3	1	23.77	23.89	23.86	23.95	0.0	25.00
		3	3	23.70	23.86	23.89	23.98	0.0	25.00
	16QAM	6	0	22.78	22.98	22.84	23.02	1.0	24.00
		1	0	22.72	22.84	23.03	23.41	1.0	24.00
		1	3	22.88	22.94	23.17	23.44	1.0	24.00
		1	5	22.76	22.85	23.08	23.36	1.0	24.00
		3	0	22.96	23.07	22.90	23.18	1.0	24.00
		3	1	22.99	23.09	22.91	23.17	1.0	24.00
	64QAM	3	3	23.01	23.09	23.03	23.11	1.0	24.00
		6	0	21.97	22.13	22.01	21.87	2.0	23.00
		1	0	22.08	22.30	22.33	22.06	2.0	23.00
		1	3	22.06	22.40	22.53	22.14	2.0	23.00
		1	5	22.00	22.37	22.43	22.04	2.0	23.00
		3	0	21.78	22.25	22.15	22.06	2.0	23.00
	256QAM	3	1	21.78	22.27	22.19	22.13	2.0	23.00
		3	3	21.78	22.25	22.25	22.16	2.0	23.00
		6	0	20.86	20.94	20.91	21.30	3.0	22.00
		1	0	18.88	18.94	19.02	19.15	5.0	20.00
		1	3	18.94	19.11	19.23	19.28	5.0	20.00
		1	5	18.87	19.02	19.07	19.16	5.0	20.00
		3	0	18.86	18.96	18.87	18.98	5.0	20.00
		3	1	18.81	19.01	18.90	19.01	5.0	20.00
	3	3	18.80	19.06	18.93	18.92	5.0	20.00	
	6	0	18.86	19.04	18.82	18.96	5.0	20.00	

**Note(s):**

1. For Orange box's output power results, There are measured for the test of Part.90.

**LTE Band 66 (Main 2. Ant) Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				132072	132322	132572		
				1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	23.40	23.78	23.52	0.0	25.00
		1	49	23.46	23.59	23.47	0.0	25.00
		1	99	23.51	23.56	23.45	0.0	25.00
		50	0	22.49	22.82	22.57	1.0	24.00
		50	24	22.62	22.65	22.62	1.0	24.00
		50	50	22.61	22.67	22.59	1.0	24.00
	100	0	22.59	22.62	22.56	1.0	24.00	
	16QAM	1	0	22.82	23.21	23.18	1.0	24.00
		1	49	22.87	23.18	23.10	1.0	24.00
		1	99	22.94	23.17	23.08	1.0	24.00
		50	0	21.45	21.69	21.58	2.0	23.00
		50	24	21.58	21.66	21.65	2.0	23.00
		50	50	21.57	21.70	21.61	2.0	23.00
	100	0	21.61	21.67	21.56	2.0	23.00	
	64QAM	1	0	21.83	22.31	21.79	2.0	23.00
		1	49	21.82	22.36	21.79	2.0	23.00
		1	99	21.97	22.26	21.79	2.0	23.00
		50	0	20.58	20.69	20.56	3.0	22.00
		50	24	20.68	20.67	20.65	3.0	22.00
		50	50	20.68	20.71	20.61	3.0	22.00
	100	0	20.61	20.63	20.57	3.0	22.00	
256QAM	1	0	18.64	18.81	18.54	4.0	21.00	
	1	49	18.73	18.85	18.54	4.0	21.00	
	1	99	18.77	18.84	18.55	4.0	21.00	
	50	0	18.50	18.65	18.59	4.0	21.00	
	50	24	18.60	18.67	18.66	4.0	21.00	
	50	50	18.60	18.68	18.59	4.0	21.00	
100	0	18.56	18.63	18.55	4.0	21.00		
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				132047	132322	132597		
				1717.5 MHz	1745 MHz	1772.5 MHz		
				15 MHz	QPSK	1	0	23.46
1	37	23.50	23.60			23.51	0.0	25.00
1	74	23.54	23.57			23.62	0.0	25.00
36	0	22.50	22.69			22.68	1.0	24.00
36	20	22.60	22.68			22.67	1.0	24.00
36	39	22.61	22.71			22.65	1.0	24.00
75	0	22.55	22.65		22.65	1.0	24.00	
16QAM	1	0	22.92		22.64	23.00	1.0	24.00
	1	37	22.97		22.68	23.03	1.0	24.00
	1	74	23.01		22.61	22.97	1.0	24.00
	36	0	21.47		21.70	21.71	2.0	23.00
	36	20	21.57		21.68	21.70	2.0	23.00
	36	39	21.58		21.73	21.72	2.0	23.00
75	0	21.56	21.67		21.65	2.0	23.00	
64QAM	1	0	22.03		21.96	21.83	2.0	23.00
	1	37	22.17		22.03	21.63	2.0	23.00
	1	74	22.20		21.98	21.77	2.0	23.00
	36	0	20.53		20.72	20.74	3.0	22.00
	36	20	20.61		20.71	20.74	3.0	22.00
	36	39	20.59		20.74	20.68	3.0	22.00
75	0	20.63	20.65		20.67	3.0	22.00	
256QAM	1	0	18.73	19.04	18.64	4.0	21.00	
	1	37	18.85	19.10	18.50	4.0	21.00	
	1	74	18.86	19.05	18.72	4.0	21.00	
	36	0	18.68	18.65	18.65	4.0	21.00	
	36	20	18.56	18.68	18.67	4.0	21.00	
	36	39	18.58	18.72	18.62	4.0	21.00	
75	0	18.55	18.65	18.62	4.0	21.00		



**LTE Band 66 (Main 2. Ant) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				132022	132322	132622		
				1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	23.56	23.67	23.66	0.0	25.00
		1	25	23.55	23.66	23.61	0.0	25.00
		1	49	23.61	23.62	23.52	0.0	25.00
		25	0	22.59	22.76	22.75	1.0	24.00
		25	12	22.66	22.75	22.75	1.0	24.00
		25	25	22.68	22.82	22.77	1.0	24.00
	16QAM	50	0	22.66	22.74	22.76	1.0	24.00
		1	0	22.96	22.73	22.63	1.0	24.00
		1	25	22.99	22.78	22.63	1.0	24.00
		1	49	23.00	22.70	22.58	1.0	24.00
		25	0	21.63	21.86	21.79	2.0	23.00
		25	12	21.75	21.85	21.82	2.0	23.00
	64QAM	25	25	21.76	21.90	21.78	2.0	23.00
		50	0	21.69	21.79	21.75	2.0	23.00
		1	0	21.78	22.13	21.89	2.0	23.00
		1	25	21.76	22.17	21.65	2.0	23.00
		1	49	21.83	22.10	21.90	2.0	23.00
		25	0	20.69	20.82	20.84	3.0	22.00
	256QAM	25	12	20.75	20.81	20.78	3.0	22.00
		25	25	20.75	20.86	20.83	3.0	22.00
		50	0	20.67	20.77	20.82	3.0	22.00
		1	0	18.58	19.36	18.64	4.0	21.00
		1	25	18.66	19.28	18.58	4.0	21.00
		1	49	18.69	19.41	18.59	4.0	21.00
25		0	18.69	18.88	18.79	4.0	21.00	
25		12	18.80	18.82	18.79	4.0	21.00	
25		25	18.76	18.91	18.79	4.0	21.00	
50		0	18.70	18.79	18.75	4.0	21.00	

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131997	132322	132647		
				1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	23.57	23.76	23.76	0.0	25.00
		1	12	23.51	23.76	23.67	0.0	25.00
		1	24	23.58	23.76	23.70	0.0	25.00
		12	0	22.60	22.76	22.73	1.0	24.00
		12	7	22.65	22.77	22.73	1.0	24.00
		12	13	22.60	22.82	22.72	1.0	24.00
	16QAM	25	0	22.59	22.73	22.77	1.0	24.00
		1	0	23.07	22.88	22.88	1.0	24.00
		1	12	23.09	22.79	22.80	1.0	24.00
		1	24	23.08	22.91	22.89	1.0	24.00
		12	0	21.76	21.76	21.81	2.0	23.00
		12	7	21.79	21.74	21.82	2.0	23.00
	64QAM	12	13	21.75	21.82	21.81	2.0	23.00
		25	0	21.67	21.71	21.77	2.0	23.00
		1	0	21.77	21.70	22.18	2.0	23.00
		1	12	21.53	21.81	22.06	2.0	23.00
		1	24	21.73	21.71	22.11	2.0	23.00
		12	0	20.42	20.79	20.73	3.0	22.00
	256QAM	12	7	20.43	20.78	20.72	3.0	22.00
		12	13	20.47	20.86	20.73	3.0	22.00
		25	0	20.40	20.68	20.71	3.0	22.00
		1	0	18.66	18.55	18.93	4.0	21.00
		1	12	18.77	18.60	18.83	4.0	21.00
		1	24	18.74	18.54	18.92	4.0	21.00
256QAM	12	0	18.69	18.77	18.76	4.0	21.00	
	12	7	18.70	18.80	18.80	4.0	21.00	
	12	13	18.67	18.84	18.73	4.0	21.00	
	25	0	18.69	18.82	18.77	4.0	21.00	

**LTE Band 66 (Main 2. Ant) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131987	132322	132657		
				1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	23.55	23.68	23.64	0.0	25.00
		1	8	23.45	23.62	23.55	0.0	25.00
		1	14	23.55	23.71	23.69	0.0	25.00
		8	0	22.59	22.68	22.71	1.0	24.00
		8	4	22.61	22.82	22.73	1.0	24.00
		8	7	22.63	22.81	22.74	1.0	24.00
	16QAM	15	0	22.60	22.70	22.73	1.0	24.00
		1	0	22.95	22.80	22.61	1.0	24.00
		1	8	22.94	22.79	22.55	1.0	24.00
		1	14	22.97	22.77	22.61	1.0	24.00
		8	0	21.62	21.77	21.80	2.0	23.00
		8	4	21.68	21.89	21.82	2.0	23.00
	64QAM	8	7	21.70	21.87	21.88	2.0	23.00
		15	0	21.63	21.74	21.76	2.0	23.00
		1	0	21.72	22.19	21.75	2.0	23.00
		1	8	21.44	22.39	21.77	2.0	23.00
		1	14	21.50	22.22	21.83	2.0	23.00
		8	0	20.25	20.78	20.77	3.0	22.00
	256QAM	8	4	20.29	20.92	20.75	3.0	22.00
		8	7	20.30	20.91	20.75	3.0	22.00
		15	0	20.35	20.71	20.72	3.0	22.00
		1	0	18.58	19.13	18.50	4.0	21.00
		1	8	18.67	19.28	18.72	4.0	21.00
		1	14	18.63	19.23	18.68	4.0	21.00
1.4 MHz	QPSK	8	0	18.76	18.79	18.63	4.0	21.00
		8	4	18.81	18.92	18.66	4.0	21.00
		8	7	18.81	18.93	18.70	4.0	21.00
		15	0	18.70	18.78	18.78	4.0	21.00
		1	0	23.40	23.62	23.64	0.0	25.00
		1	3	23.42	23.66	23.65	0.0	25.00
	16QAM	1	5	23.40	23.63	23.63	0.0	25.00
		3	0	23.45	23.60	23.59	0.0	25.00
		3	1	23.49	23.67	23.58	0.0	25.00
		3	3	23.49	23.64	23.57	0.0	25.00
		6	0	22.53	22.74	22.62	1.0	24.00
		1	0	22.93	22.66	22.75	1.0	24.00
	64QAM	1	3	22.97	22.81	22.82	1.0	24.00
		1	5	22.91	22.70	22.77	1.0	24.00
		3	0	22.69	22.89	22.62	1.0	24.00
		3	1	22.73	22.94	22.61	1.0	24.00
		3	3	22.65	22.92	22.68	1.0	24.00
		6	0	21.39	21.90	21.77	2.0	23.00
	256QAM	1	0	21.76	22.31	21.70	2.0	23.00
		1	3	21.61	22.33	21.76	2.0	23.00
		1	5	21.49	22.27	21.70	2.0	23.00
		3	0	21.13	22.00	21.71	2.0	23.00
		3	1	21.12	22.01	21.81	2.0	23.00
		3	3	21.08	22.05	21.82	2.0	23.00
16QAM	6	0	20.26	20.70	20.92	3.0	22.00	
	1	0	18.63	18.92	18.87	4.0	21.00	
	1	3	18.75	19.05	18.95	4.0	21.00	
	1	5	18.64	18.95	18.87	4.0	21.00	
	3	0	18.66	18.68	18.65	4.0	21.00	
	3	1	18.68	18.76	18.67	4.0	21.00	
256QAM	3	3	18.59	18.67	18.55	4.0	21.00	
	6	0	18.64	18.68	18.64	4.0	21.00	

**LTE Band 66 (Sub 1. Ant) Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				132072	132322	132572		
				1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	17.26	17.25	17.30	0.0	19.00
		1	49	17.27	17.20	17.18	0.0	19.00
		1	99	17.41	17.36	17.08	0.0	19.00
		50	0	16.39	16.32	16.38	1.0	18.00
		50	24	16.50	16.34	16.33	1.0	18.00
		50	50	16.47	16.44	16.28	1.0	18.00
		100	0	16.51	16.41	16.41	1.0	18.00
	16QAM	1	0	16.24	16.29	16.36	1.0	18.00
		1	49	16.30	16.20	16.24	1.0	18.00
		1	99	16.42	16.38	16.11	1.0	18.00
		50	0	15.36	15.32	15.36	2.0	17.00
		50	24	15.42	15.32	15.34	2.0	17.00
		50	50	15.41	15.40	15.27	2.0	17.00
		100	0	15.45	15.40	15.37	2.0	17.00
	64QAM	1	0	15.48	15.54	15.59	2.0	17.00
		1	49	15.51	15.47	15.54	2.0	17.00
		1	99	15.57	15.57	15.35	2.0	17.00
		50	0	14.44	14.41	14.48	3.0	16.00
		50	24	14.51	14.44	14.42	3.0	16.00
		50	50	14.49	14.54	14.40	3.0	16.00
		100	0	14.47	14.41	14.40	3.0	16.00
256QAM	1	0	12.31	12.33	12.48	5.0	14.00	
	1	49	12.32	12.29	12.34	5.0	14.00	
	1	99	12.37	12.45	12.26	5.0	14.00	
	50	0	12.36	12.35	12.45	5.0	14.00	
	50	24	12.43	12.36	12.35	5.0	14.00	
	50	50	12.42	12.49	12.30	5.0	14.00	
	100	0	12.48	12.41	12.38	5.0	14.00	
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				132047	132322	132597		
				1717.5 MHz	1745 MHz	1772.5 MHz		
				15 MHz	QPSK	1		
1	37	17.12	17.16			17.05	0.0	19.00
1	74	17.15	17.34			17.09	0.0	19.00
36	0	16.00	16.26			16.15	1.0	18.00
36	20	16.15	16.34			16.16	1.0	18.00
36	39	16.15	16.36			16.03	1.0	18.00
75	0	16.14	16.37			16.11	1.0	18.00
16QAM	1	0	16.00		16.52	16.55	1.0	18.00
	1	37	16.01		16.46	16.39	1.0	18.00
	1	74	16.13		16.77	16.34	1.0	18.00
	36	0	15.08		15.40	15.17	2.0	17.00
	36	20	15.25		15.37	15.09	2.0	17.00
	36	39	15.23		15.48	15.05	2.0	17.00
	75	0	15.22		15.31	15.03	2.0	17.00
64QAM	1	0	15.12		15.59	15.35	2.0	17.00
	1	37	15.33		15.49	15.13	2.0	17.00
	1	74	15.32		15.60	15.12	2.0	17.00
	36	0	14.24		14.33	14.09	3.0	16.00
	36	20	14.34		14.28	14.10	3.0	16.00
	36	39	14.25		14.39	14.00	3.0	16.00
	75	0	14.23		14.32	14.08	3.0	16.00
256QAM	1	0	12.03	12.71	12.21	5.0	14.00	
	1	37	12.14	12.76	11.98	5.0	14.00	
	1	74	12.22	12.89	12.02	5.0	14.00	
	36	0	12.06	12.12	12.13	5.0	14.00	
	36	20	12.17	12.27	12.02	5.0	14.00	
	36	39	12.14	12.30	12.05	5.0	14.00	
	75	0	12.18	12.33	12.00	5.0	14.00	

**LTE Band 66 (Sub 1. Ant) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				132022	132322	132622		
				1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	17.08	17.06	17.21	0.0	19.00
		1	25	17.16	17.29	17.13	0.0	19.00
		1	49	17.27	17.35	17.15	0.0	19.00
		25	0	16.32	16.35	16.44	1.0	18.00
		25	12	16.41	16.32	16.32	1.0	18.00
		25	25	16.36	16.52	16.32	1.0	18.00
	16QAM	50	0	16.40	16.44	16.31	1.0	18.00
		1	0	16.13	16.74	16.29	1.0	18.00
		1	25	16.27	16.31	16.23	1.0	18.00
		1	49	16.23	16.33	16.22	1.0	18.00
		25	0	15.30	15.33	15.36	2.0	17.00
		25	12	15.34	15.41	15.31	2.0	17.00
	64QAM	25	25	15.42	15.59	15.30	2.0	17.00
		50	0	15.29	15.36	15.25	2.0	17.00
		1	0	15.50	15.56	15.49	2.0	17.00
		1	25	15.45	15.56	15.41	2.0	17.00
		1	49	15.51	15.53	15.30	2.0	17.00
		25	0	14.35	14.31	14.48	3.0	16.00
	256QAM	25	12	14.57	14.46	14.41	3.0	16.00
		25	25	14.47	14.62	14.40	3.0	16.00
		50	0	14.48	14.47	14.33	3.0	16.00
1		0	12.20	12.34	12.39	5.0	14.00	
1		25	12.39	12.41	12.05	5.0	14.00	
1		49	12.42	12.53	12.35	5.0	14.00	
25		0	12.19	12.26	12.32	5.0	14.00	
25		12	12.28	12.43	12.26	5.0	14.00	
25		25	12.31	12.40	12.23	5.0	14.00	
50	0	12.40	12.44	12.37	5.0	14.00		
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131997	132322	132647		
				1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	17.10	17.17	17.05	0.0	19.00
		1	12	17.17	17.25	17.10	0.0	19.00
		1	24	17.24	17.32	17.20	0.0	19.00
		12	0	16.30	16.44	16.33	1.0	18.00
		12	7	16.35	16.34	16.28	1.0	18.00
		12	13	16.40	16.40	16.35	1.0	18.00
	16QAM	25	0	16.38	16.41	16.40	1.0	18.00
		1	0	16.16	16.34	16.23	1.0	18.00
		1	12	16.17	16.33	16.20	1.0	18.00
		1	24	16.34	16.36	16.18	1.0	18.00
		12	0	15.37	15.38	15.30	2.0	17.00
		12	7	15.27	15.46	15.44	2.0	17.00
	64QAM	12	13	15.41	15.45	15.43	2.0	17.00
		25	0	15.42	15.37	15.27	2.0	17.00
		1	0	15.37	15.56	15.50	2.0	17.00
		1	12	15.50	15.55	15.43	2.0	17.00
		1	24	15.45	15.55	15.46	2.0	17.00
		12	0	14.54	14.60	14.55	3.0	16.00
	256QAM	12	7	14.64	14.52	14.53	3.0	16.00
		12	13	14.44	14.68	14.42	3.0	16.00
		25	0	14.45	14.46	14.50	3.0	16.00
		1	0	12.34	12.28	12.13	5.0	14.00
		1	12	12.36	12.45	12.33	5.0	14.00
		1	24	12.27	12.33	12.22	5.0	14.00
		12	0	12.19	12.27	12.30	5.0	14.00
		12	7	12.28	12.36	12.29	5.0	14.00
		12	13	12.25	12.33	12.28	5.0	14.00
25	0	12.33	12.32	12.33	5.0	14.00		

**LTE Band 66 (Sub 1. Ant) Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131987	132322	132657		
				1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	17.27	17.21	17.15	0.0	19.00
		1	8	17.20	17.31	17.00	0.0	19.00
		1	14	17.18	17.27	17.14	0.0	19.00
		8	0	16.26	16.37	16.28	1.0	18.00
		8	4	16.32	16.38	16.05	1.0	18.00
		8	7	16.28	16.34	16.24	1.0	18.00
	16QAM	15	0	16.31	16.35	16.24	1.0	18.00
		1	0	16.63	16.35	16.23	1.0	18.00
		1	8	16.35	16.32	16.17	1.0	18.00
		1	14	16.20	16.28	16.10	1.0	18.00
		8	0	15.30	15.41	15.16	2.0	17.00
		8	4	15.35	15.26	15.35	2.0	17.00
	64QAM	8	7	15.21	15.32	15.19	2.0	17.00
		15	0	15.33	15.32	15.27	2.0	17.00
		1	0	15.27	15.66	15.82	2.0	17.00
		1	8	15.35	15.71	15.20	2.0	17.00
		1	14	15.37	15.53	15.48	2.0	17.00
		8	0	14.30	14.48	14.47	3.0	16.00
	256QAM	8	4	14.43	14.59	14.44	3.0	16.00
		8	7	14.47	14.63	14.33	3.0	16.00
		15	0	14.31	14.40	14.17	3.0	16.00
		1	0	12.77	12.46	12.21	5.0	14.00
		1	8	12.43	12.55	12.48	5.0	14.00
		1	14	12.41	12.44	12.34	5.0	14.00
1.4 MHz	QPSK	8	0	12.55	12.61	12.57	5.0	14.00
		8	4	12.54	12.60	12.37	5.0	14.00
		8	7	12.59	12.65	12.42	5.0	14.00
		15	0	12.25	12.39	12.09	5.0	14.00
		1	0	17.11	17.21	17.24	0.0	19.00
		1	3	17.31	17.37	17.25	0.0	19.00
	16QAM	1	5	17.20	17.25	17.21	0.0	19.00
		3	0	17.19	17.22	17.30	0.0	19.00
		3	1	17.20	17.20	17.32	0.0	19.00
		3	3	17.21	17.26	17.20	0.0	19.00
		6	0	16.55	16.45	16.50	1.0	18.00
		1	0	16.38	16.44	16.43	1.0	18.00
	64QAM	1	3	16.45	16.58	16.50	1.0	18.00
		1	5	16.50	16.65	16.34	1.0	18.00
		3	0	16.60	16.74	16.32	1.0	18.00
		3	1	16.45	16.51	16.47	1.0	18.00
		3	3	16.60	16.67	16.55	1.0	18.00
		6	0	15.34	15.44	15.33	2.0	17.00
	256QAM	1	0	15.35	15.41	15.37	2.0	17.00
		1	3	15.41	15.44	15.30	2.0	17.00
		1	5	15.33	15.48	15.44	2.0	17.00
		3	0	15.29	15.34	15.33	2.0	17.00
		3	1	15.60	15.78	15.65	2.0	17.00
		3	3	15.00	15.45	15.23	2.0	17.00
256QAM	6	0	14.40	14.43	14.60	3.0	16.00	
	1	0	12.10	12.15	12.33	5.0	14.00	
	1	3	12.28	12.32	12.15	5.0	14.00	
	1	5	12.33	12.48	12.26	5.0	14.00	
	3	0	12.35	12.37	12.33	5.0	14.00	
	3	1	12.30	12.20	12.26	5.0	14.00	
256QAM	3	3	12.41	12.38	12.30	5.0	14.00	
	6	0	12.22	12.44	12.42	5.0	14.00	

**LTE Band 41 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							MPR	Tune-up Limit
				Measured Pwr (dBm)								
				39750	40185	40620	41055	41490				
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz				
20 MHz	QPSK	1	0	23.29	23.16	23.25	23.15	22.86	0.0	24.00		
		1	49	23.20	22.95	22.77	22.59	22.80	0.0	24.00		
		1	99	23.14	22.93	22.88	22.74	22.93	0.0	24.00		
		50	0	22.35	22.14	21.90	21.70	21.93	1.0	23.00		
		50	24	22.28	22.14	21.96	21.66	21.93	1.0	23.00		
		50	50	22.24	22.12	21.93	21.71	22.01	1.0	23.00		
	100	0	22.28	22.11	21.97	21.66	21.94	1.0	23.00			
	16QAM	1	0	22.36	22.06	21.83	21.82	21.88	1.0	23.00		
		1	49	22.34	21.96	21.68	21.72	21.89	1.0	23.00		
		1	99	22.27	21.95	21.75	21.85	22.03	1.0	23.00		
		50	0	21.40	21.11	20.91	20.74	20.90	2.0	22.00		
		50	24	21.32	21.12	20.97	20.70	20.90	2.0	22.00		
		50	50	21.27	21.10	20.95	20.75	20.99	2.0	22.00		
	100	0	21.29	21.13	20.96	20.67	20.94	2.0	22.00			
	64QAM	1	0	21.33	21.43	20.86	20.77	21.26	2.0	22.00		
		1	49	21.30	21.37	20.75	20.71	21.19	2.0	22.00		
		1	99	21.20	21.39	20.87	20.85	21.38	2.0	22.00		
		50	0	20.39	20.16	19.93	19.76	19.97	3.0	21.00		
		50	24	20.36	20.19	20.00	19.69	19.99	3.0	21.00		
		50	50	20.32	20.15	19.97	19.75	20.04	3.0	21.00		
	100	0	20.35	20.18	19.97	19.74	19.97	3.0	21.00			
	256QAM	1	0	18.76	18.23	17.99	18.10	17.95	5.0	19.00		
		1	49	18.65	18.06	17.90	17.99	17.92	5.0	19.00		
		1	99	18.60	18.09	18.03	18.18	18.08	5.0	19.00		
50		0	18.40	18.14	17.92	17.71	17.94	5.0	19.00			
50		24	18.28	18.13	18.00	17.72	17.96	5.0	19.00			
50		50	18.29	18.11	17.95	17.74	18.05	5.0	19.00			
100	0	18.27	18.14	17.99	17.71	17.99	5.0	19.00				
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit		
				Measured Pwr (dBm)								
				39750	40185	40620	41055	41490				
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz				
15 MHz	QPSK	1	0	23.21	23.01	22.85	22.63	22.81	0.0	24.00		
		1	37	23.14	22.91	22.72	22.54	22.78	0.0	24.00		
		1	74	23.14	22.97	22.83	22.62	22.88	0.0	24.00		
		36	0	22.32	22.14	21.91	21.68	21.94	1.0	23.00		
		36	20	22.26	22.12	21.93	21.64	21.93	1.0	23.00		
		36	39	22.22	22.11	21.94	21.71	22.01	1.0	23.00		
	75	0	22.22	22.14	21.95	21.65	21.92	1.0	23.00			
	16QAM	1	0	22.29	22.05	21.89	21.78	21.88	1.0	23.00		
		1	37	22.23	21.92	21.83	21.68	21.79	1.0	23.00		
		1	74	22.23	21.98	21.87	21.74	21.92	1.0	23.00		
		36	0	21.40	21.12	20.92	20.72	20.89	2.0	22.00		
		36	20	21.27	21.11	20.95	20.65	20.90	2.0	22.00		
		36	39	21.25	21.13	20.95	20.72	20.99	2.0	22.00		
	75	0	21.25	21.14	20.95	20.66	20.92	2.0	22.00			
	64QAM	1	0	21.10	20.67	21.14	20.88	20.87	2.0	22.00		
		1	37	21.05	20.55	21.09	20.79	20.76	2.0	22.00		
		1	74	20.97	20.57	21.12	20.60	20.56	2.0	22.00		
		36	0	20.30	20.23	19.97	19.66	20.01	3.0	21.00		
		36	20	20.20	20.19	20.04	19.63	20.00	3.0	21.00		
		36	39	20.20	20.20	20.03	19.71	20.08	3.0	21.00		
	75	0	20.29	20.12	19.98	19.70	19.94	3.0	21.00			
	256QAM	1	0	18.44	18.20	17.67	17.77	17.96	5.0	19.00		
		1	37	18.39	18.09	17.65	17.74	17.88	5.0	19.00		
		1	74	18.33	18.07	17.70	17.85	18.09	5.0	19.00		
36		0	18.31	18.14	17.95	17.67	17.97	5.0	19.00			
36		20	18.23	18.13	17.97	17.64	17.97	5.0	19.00			
36		39	18.21	18.10	17.99	17.70	18.02	5.0	19.00			
75	0	18.24	18.17	17.97	17.71	17.98	5.0	19.00				

**LTE Band 41 Measured Results (Continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	23.37	23.14	23.02	22.76	22.92	0.0	24.00
		1	25	23.34	23.12	23.00	22.75	22.94	0.0	24.00
		1	49	23.27	23.07	22.95	22.69	22.97	0.0	24.00
		25	0	22.49	22.23	22.04	21.74	22.01	1.0	23.00
		25	12	22.39	22.25	22.07	21.77	22.05	1.0	23.00
		25	25	22.37	22.24	22.09	21.84	22.13	1.0	23.00
	16QAM	50	0	22.36	22.24	22.07	21.76	22.03	1.0	23.00
		1	0	22.50	22.24	22.03	21.94	22.05	1.0	23.00
		1	25	22.47	22.14	22.00	21.89	21.99	1.0	23.00
		1	49	22.48	22.10	21.98	21.87	22.04	1.0	23.00
		25	0	21.45	21.26	21.04	20.77	21.05	2.0	22.00
		25	12	21.39	21.29	21.12	20.78	21.09	2.0	22.00
	64QAM	25	25	21.39	21.25	21.10	20.86	21.13	2.0	22.00
		50	0	21.42	21.24	21.09	20.83	21.07	2.0	22.00
		1	0	21.50	20.88	21.31	20.90	20.63	2.0	22.00
		1	25	21.48	20.84	21.28	20.88	20.62	2.0	22.00
		1	49	21.42	20.72	21.29	20.89	20.67	2.0	22.00
		25	0	20.42	20.31	20.06	19.73	20.10	3.0	21.00
	256QAM	25	12	20.36	20.30	20.09	19.78	20.12	3.0	21.00
		25	25	20.31	20.30	20.06	19.82	20.22	3.0	21.00
50		0	20.36	20.27	20.07	19.76	20.10	3.0	21.00	
1		0	18.50	18.51	17.78	17.82	18.25	5.0	19.00	
1		25	18.38	18.43	17.79	17.73	18.19	5.0	19.00	
1		49	18.27	18.36	17.78	17.83	18.28	5.0	19.00	
5 MHz	QPSK	25	0	18.44	18.30	18.15	17.81	18.04	5.0	19.00
		25	12	18.40	18.29	18.17	17.82	18.05	5.0	19.00
		25	25	18.39	18.30	18.14	17.88	18.16	5.0	19.00
		50	0	18.41	18.32	18.13	17.79	18.11	5.0	19.00
		1	0	23.40	23.05	22.87	22.71	22.86	0.0	24.00
		1	12	23.28	23.03	22.80	22.67	22.89	0.0	24.00
	16QAM	1	24	23.30	23.07	22.90	22.76	22.97	0.0	24.00
		12	0	22.36	22.20	22.03	21.72	21.98	1.0	23.00
		12	7	22.33	22.22	22.09	21.79	22.08	1.0	23.00
		12	13	22.31	22.23	22.02	21.71	22.14	1.0	23.00
		25	0	22.30	22.22	22.05	21.72	22.02	1.0	23.00
		1	0	22.29	22.25	21.90	21.65	22.05	1.0	23.00
	64QAM	1	12	22.29	22.23	21.83	21.75	22.03	1.0	23.00
		1	24	22.25	22.31	21.93	21.82	22.21	1.0	23.00
		12	0	21.40	21.23	21.06	20.72	21.05	2.0	22.00
		12	7	21.33	21.28	21.06	20.74	21.06	2.0	22.00
		12	13	21.29	21.27	21.06	20.70	21.13	2.0	22.00
		25	0	21.31	21.23	21.07	20.76	21.06	2.0	22.00
	256QAM	1	0	21.20	21.70	21.24	20.68	21.48	2.0	22.00
		1	12	21.23	21.74	21.24	20.55	21.50	2.0	22.00
1		24	21.11	21.71	21.24	20.60	21.61	2.0	22.00	
12		0	20.42	20.42	20.03	19.84	20.22	3.0	21.00	
12		7	20.42	20.45	20.04	19.85	20.19	3.0	21.00	
12		13	20.38	20.39	20.03	19.80	20.20	3.0	21.00	
256QAM	25	0	20.36	20.19	20.00	19.77	20.00	3.0	21.00	
	1	0	18.68	18.28	18.18	18.05	18.08	5.0	19.00	
	1	12	18.80	18.27	18.27	18.14	18.04	5.0	19.00	
	1	24	18.68	18.26	18.21	18.17	18.22	5.0	19.00	
	12	0	18.44	18.23	18.09	17.81	17.98	5.0	19.00	
	12	7	18.40	18.28	18.12	17.81	18.04	5.0	19.00	
256QAM	12	13	18.35	18.24	18.08	17.80	18.05	5.0	19.00	
	25	0	18.35	18.25	18.05	17.80	18.02	5.0	19.00	















### 9.4. NR (Sub 6GHz)

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 138.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS138.521-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power 3

Modulation	MPR (dB)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM Pi/2 BPSK	≤ 3.5 <sup>1</sup>	≤ 1.2 <sup>1</sup>	≤ 0.2 <sup>1</sup>
DFT-s-OFDM QPSK	≤ 1	≤ 0.5 <sup>2</sup>	0 <sup>2</sup>
DFT-s-OFDM 16 QAM	≤ 2	≤ 2.5	≤ 1
DFT-s-OFDM 64 QAM		≤ 4.5	
DFT-s-OFDM 256 QAM		≤ 3	≤ 1.5
CP-OFDM QPSK	≤ 3	≤ 3	≤ 2
CP-OFDM 16 QAM		≤ 3.5	
CP-OFDM 64 QAM		≤ 6.5	
CP-OFDM 256 QAM			

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0dB MPR is 26dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40% of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

The allowed A-MPR values specified below in Table 6.2.3.3.1-1 of 3GPP TS138.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of “NS\_01”

Table 6.2.3.3.1-1: Additional maximum power reduction (A-MPR)

Network Signalling label	Requirements (subclause)	NR Band	Channel bandwidth (MHz)	Resources Blocks (N <sub>RB</sub> )	A-MPR (dB)
NS_01		Table 5.2-1	5, 10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100	Table 5.3.2-1	N/A


Uplink RB allocations were used to Table 6.1-1 of the 3GPP TS 138.521-1.

Channel Bandwidth	SCS(kHz)	OFDM	RB allocation							
			Edge_Full_Left	Edge_Full_Right	Edge_1RB_Left	Edge_1RB_Right	Outer_Full	Inner_Full	Inner_1RB_Left	Inner_1RB_Right
5MHz	15	DFT-s	2@0	2@23	1@0	1@24	25@0	12@6	1@1	1@23
		CP	2@0	2@23	1@0	1@24	25@0	13@6	1@1	1@23
	30	DFT-s	2@0	2@9	1@0	1@10	10@0	5@2 <sup>1</sup>	1@1	1@9
		CP	2@0	2@9	1@0	1@10	11@0	5@2 <sup>1</sup>	1@1	1@9
	60	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10MHz	15	DFT-s	2@0	2@50	1@0	1@51	50@0	25@12	1@1	1@50
		CP	2@0	2@50	1@0	1@51	52@0	26@13	1@1	1@50
	30	DFT-s	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
		CP	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
	60	DFT-s	2@0	2@9	1@0	1@10	10@0	5@2 <sup>1</sup>	1@1	1@9
		CP	2@0	2@9	1@0	1@10	11@0	5@2 <sup>1</sup>	1@1	1@9
15MHz	15	DFT-s	2@0	2@77	1@0	1@78	75@0	38@18	1@1	1@77
		CP	2@0	2@77	1@0	1@78	79@0	39@19 <sup>1</sup>	1@1	1@77
	30	DFT-s	2@0	2@36	1@0	1@37	38@0	19@9	1@1	1@36
		CP	2@0	2@36	1@0	1@37	38@0	19@9	1@1	1@36
	60	DFT-s	2@0	2@16	1@0	1@17	18@0	9@4	1@1	1@16
		CP	2@0	2@16	1@0	1@17	18@0	9@4	1@1	1@16
20MHz	15	DFT-s	2@0	2@104	1@0	1@105	106@0	53@26	1@1	1@104
		CP	2@0	2@104	1@0	1@105	106@0	53@26	1@1	1@104
	30	DFT-s	2@0	2@49	1@0	1@50	50@0	25@12	1@1	1@49
		CP	2@0	2@49	1@0	1@50	51@0	25@12 <sup>1</sup>	1@1	1@49
	60	DFT-s	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
		CP	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22

## Procedures used to establish power measurement for NR Bands

### Switching to NSA mode or SA mode

- Click the “Utility” button in the right of Test application screen
- Select “5G NR NSA” in the “TA Mode Switch” for NSA mode
- Select “5G NR Standalone” in the “TA Mode Switch” for SA mode

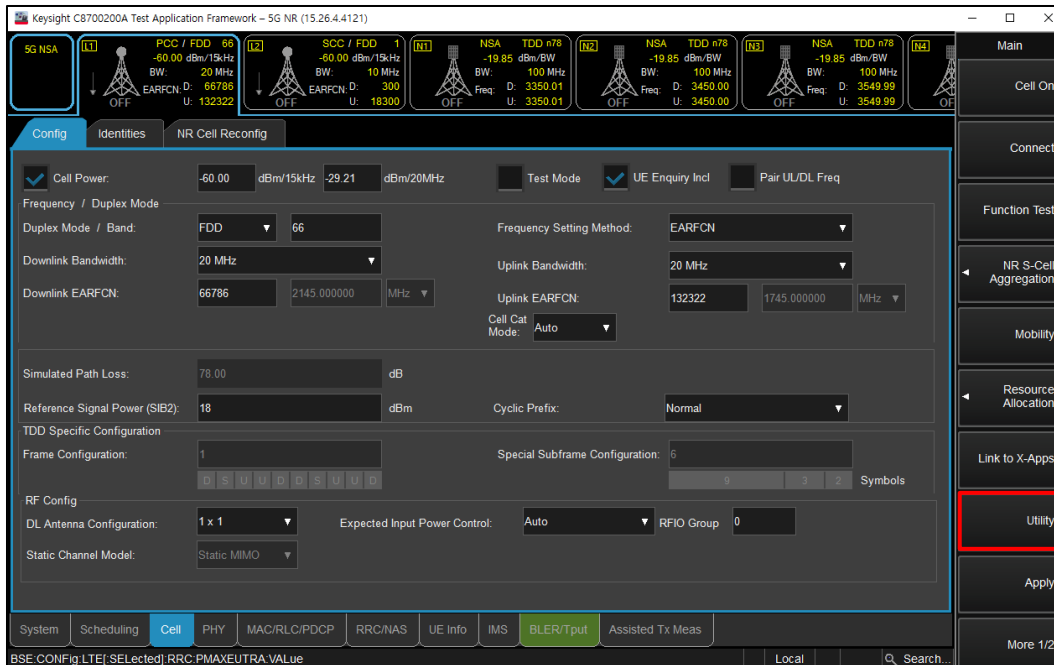


(Figure 1-1)



(Figure 1-2)


### NSA Mode

- Select operating band, BW and Channel for LTE (LTE -> Cell -> Config)

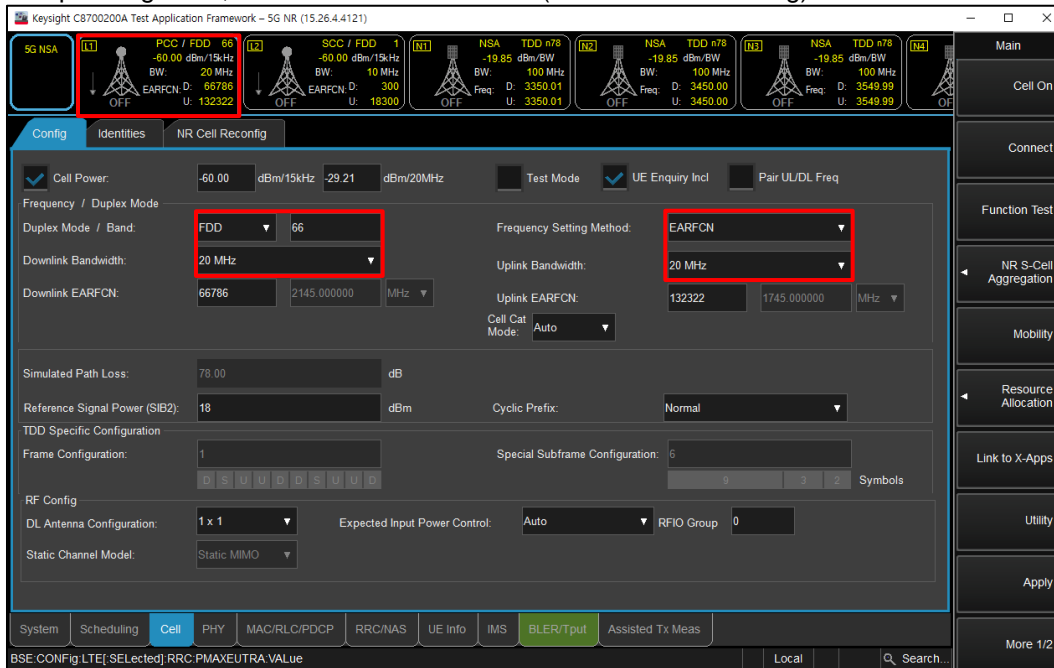

(Figure 2-1)


- Select operating band, SCS, BW and Channel for NR (NR -> Cell -> Config)

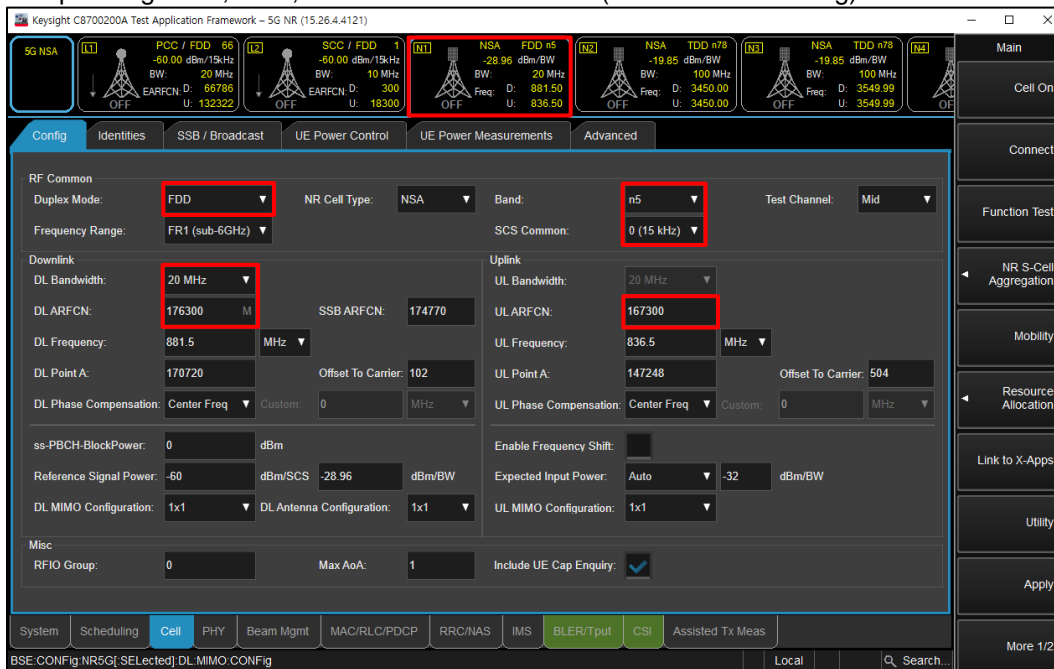

(Figure 2-2)




- Select “UL RMC (TX tests, TS 38.521)” for maximum power RB scheduling (NR -> Scheduling -> Quick Config)

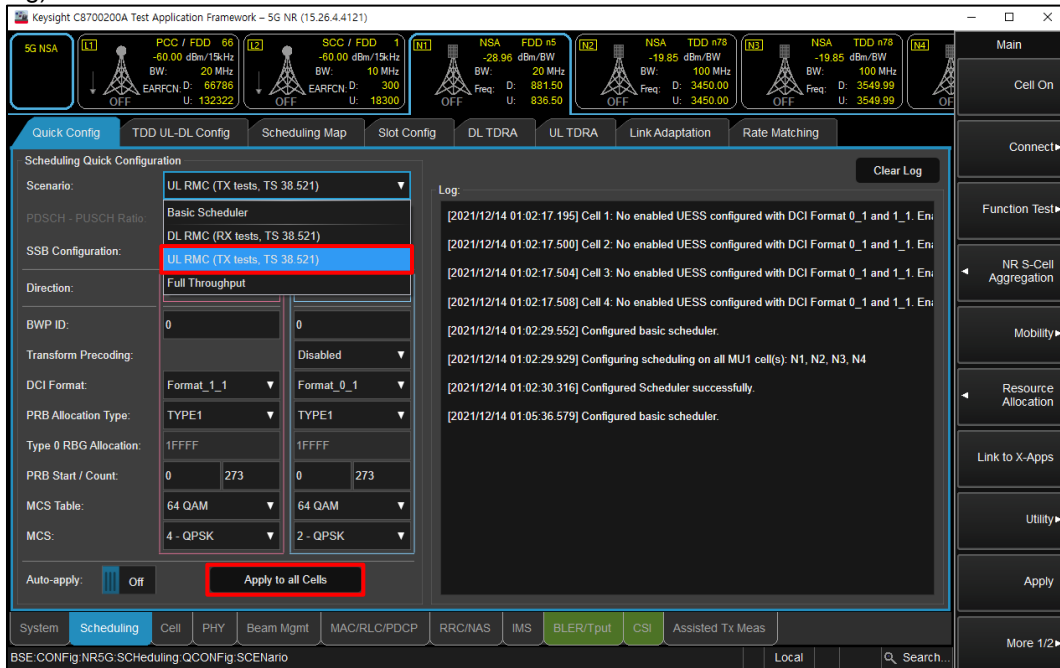


(Figure 2-3)

- To set waveform for NR Band (NR -> PHY -> PUSCH)
  - Select highest modulation in the MCS Table and MCS Table Transform Precoder
  - Enable Transform Precoder: DFT-s-OFDM / disable for CP-OFDM
  - Enable pi/2 BPSK TP: DFT-s-OFDM, pi/2 BPSK modulation

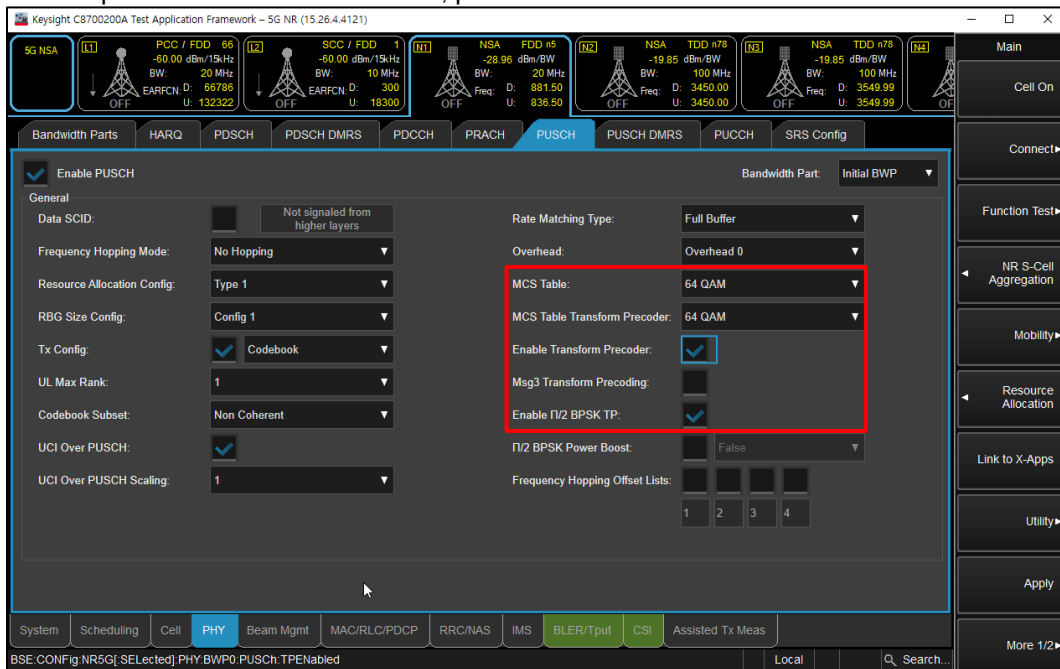


(Figure 2-4)

- Select Uplink Modulation and RB setting (NR -> Scheduling -> Scheduling Map)

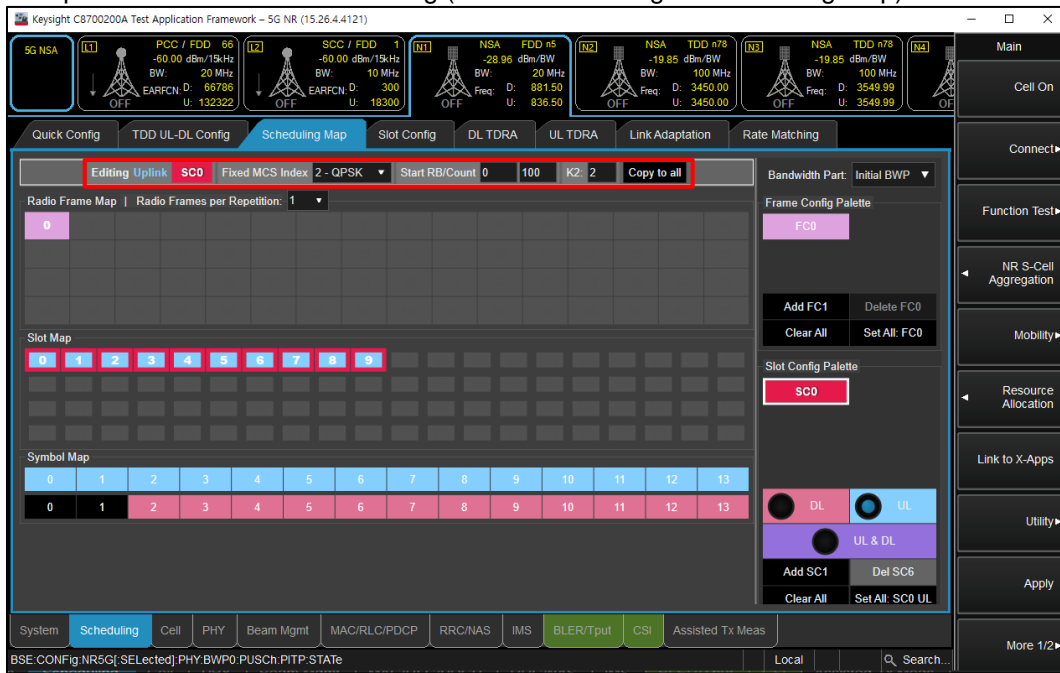


(Figure 2-5)

- Click “Cell On” button in the right of Test application screen in the LTE tab
- If necessary, turn the Airplane Mode on/off in the DUT

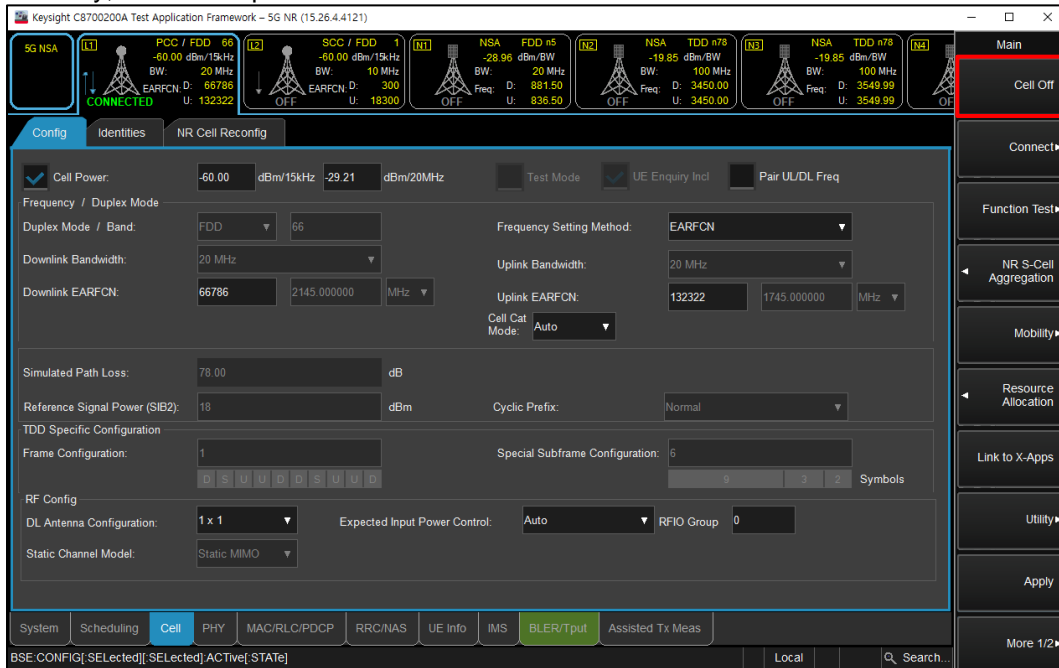


(Figure 2-6)

- Click “Cell On” button in the right of Test application screen in the NR tab
- Click “NR S-Cell Aggregation” and “Apply” to aggregate NR band

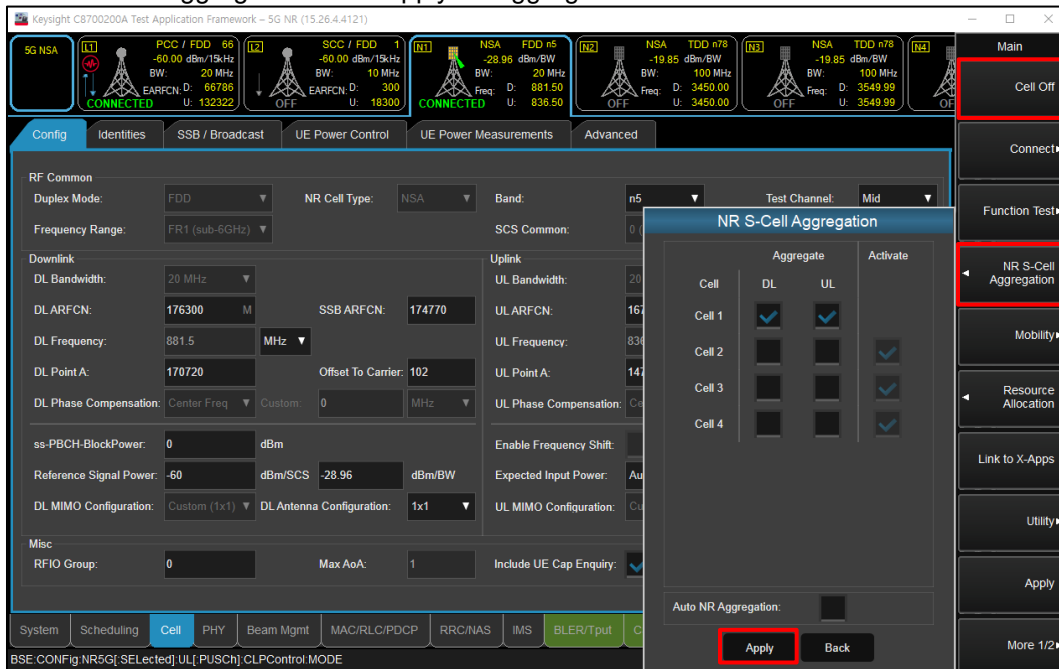


(Figure 2-7)

- Select “All Down Bits” of UL Power control Mode in LTE tab for NR maximum power (LTE -> PHY -> UE Power Control)

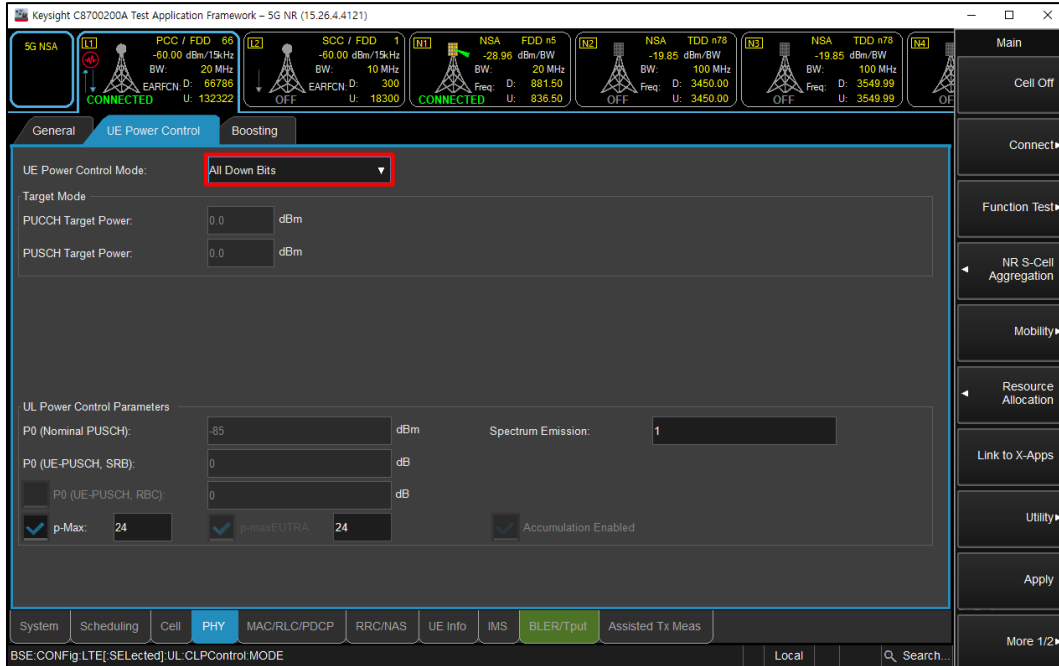


(Figure 2-8)

- Select “All Up Bits” of UL Power control Mode in NR tab for NR maximum power (NR -> Cell -> UE Power Control)
- To read the output power, click the “Link to X-Apps”

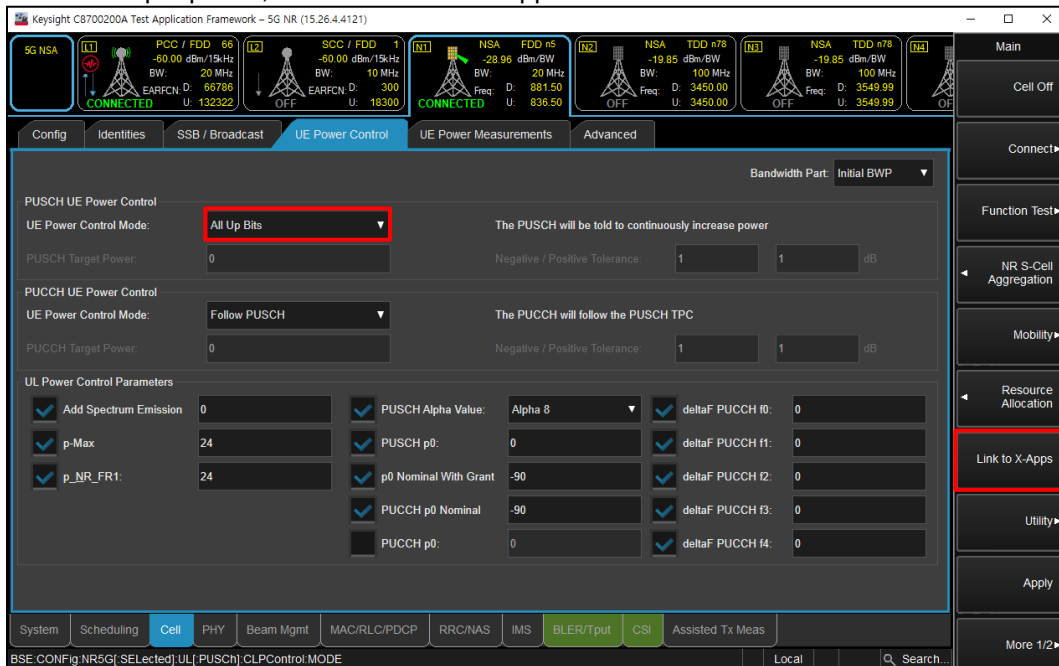


(Figure 2-9)

- Select “Channel Power” for NR output power

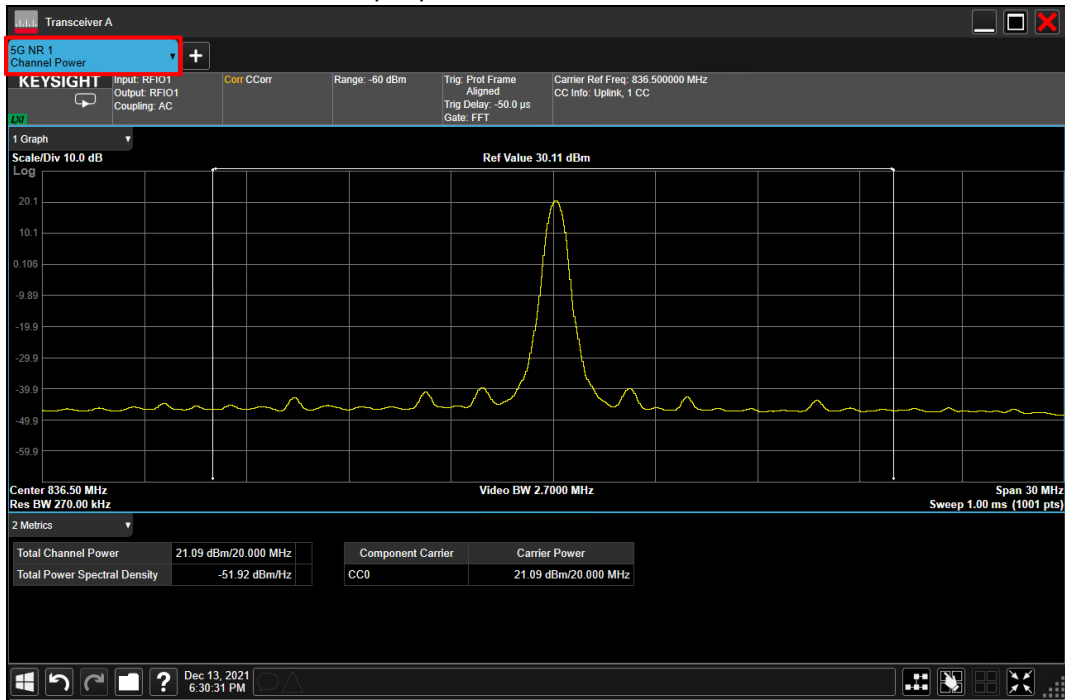

(Figure 2-10)


- Select “Channel Power” for LTE output power

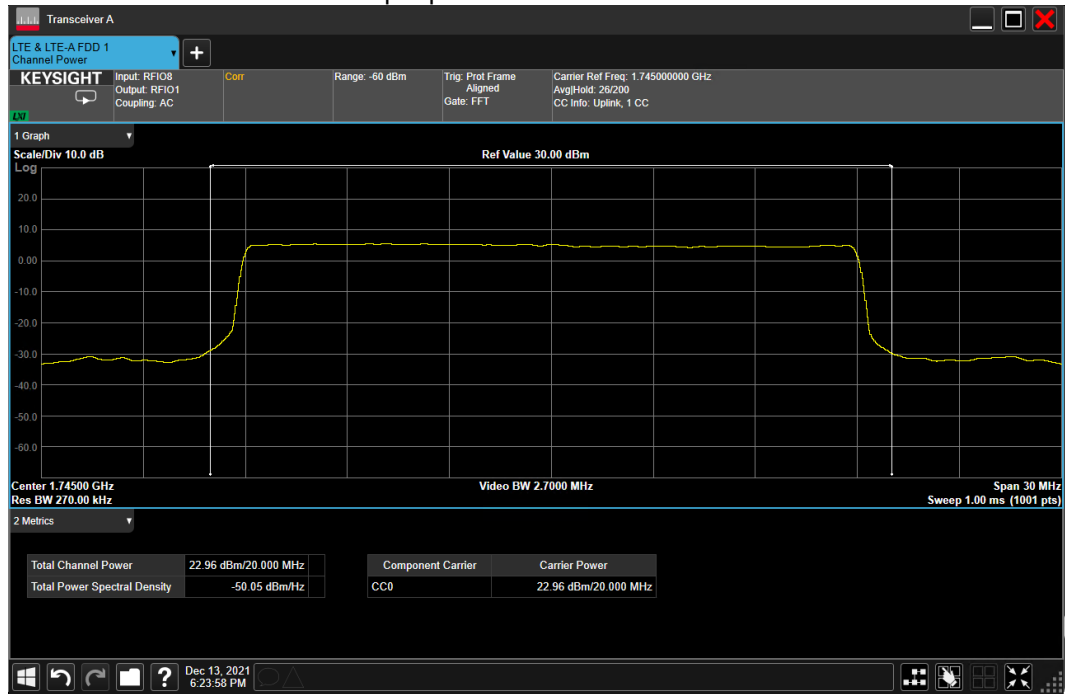

(Figure 2-11)


### SA Mode

- Select operating band, SCS, BW and Channel for NR (NR -> Cell -> Config)

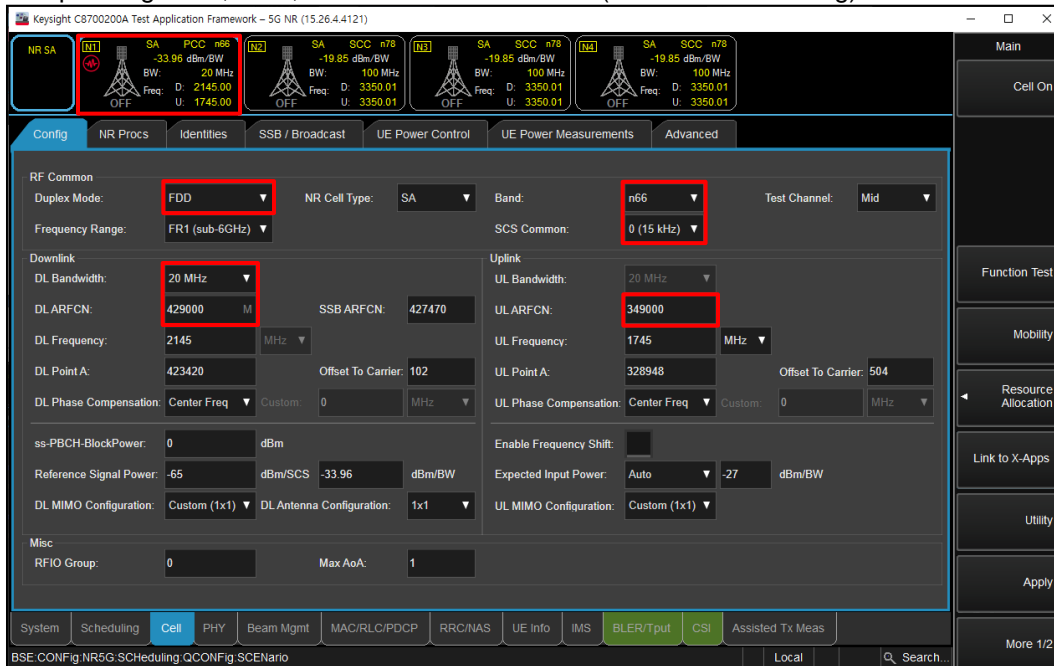


(Figure 3-1)

- Select "UL RMC (TX tests, TS 38.521)" for maximum power RB scheduling (NR -> Scheduling -> Quick Config)

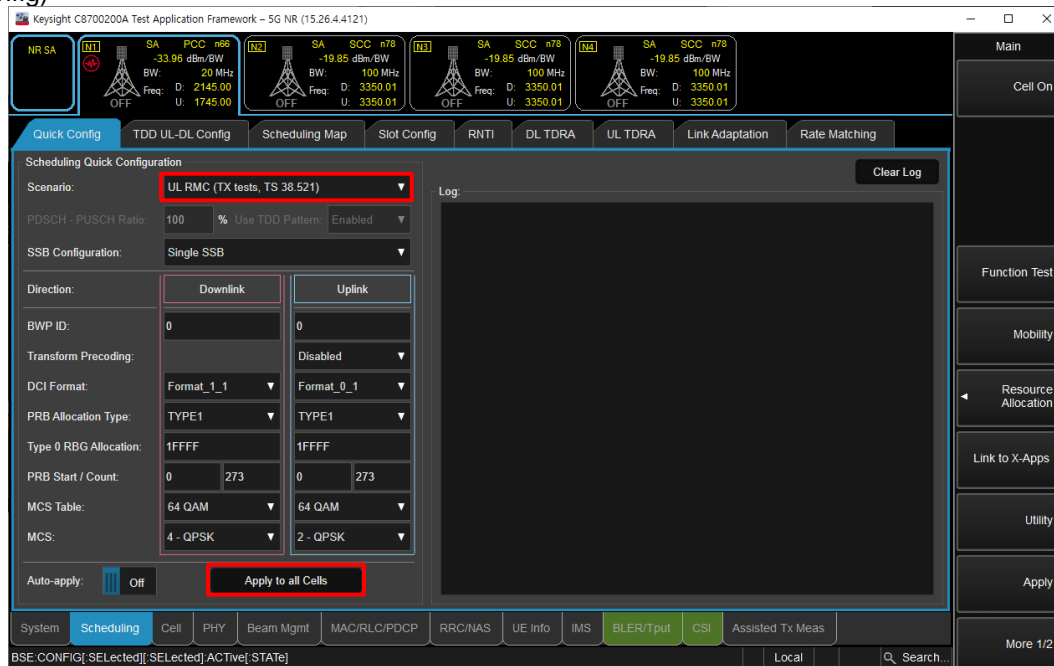

(Figure 3-2)

- To set waveform for NR Band (NR -> PHY -> PUSCH)
  - Select highest modulation in the MCS Table and MCS Table Transform Precoder
  - Enable Transform Precoder: DFT-s-OFDM / disable for CP-OFDM
  - Enable pi/2 BPSK TP: DFT-s-OFDM, pi/2 BPSK modulation

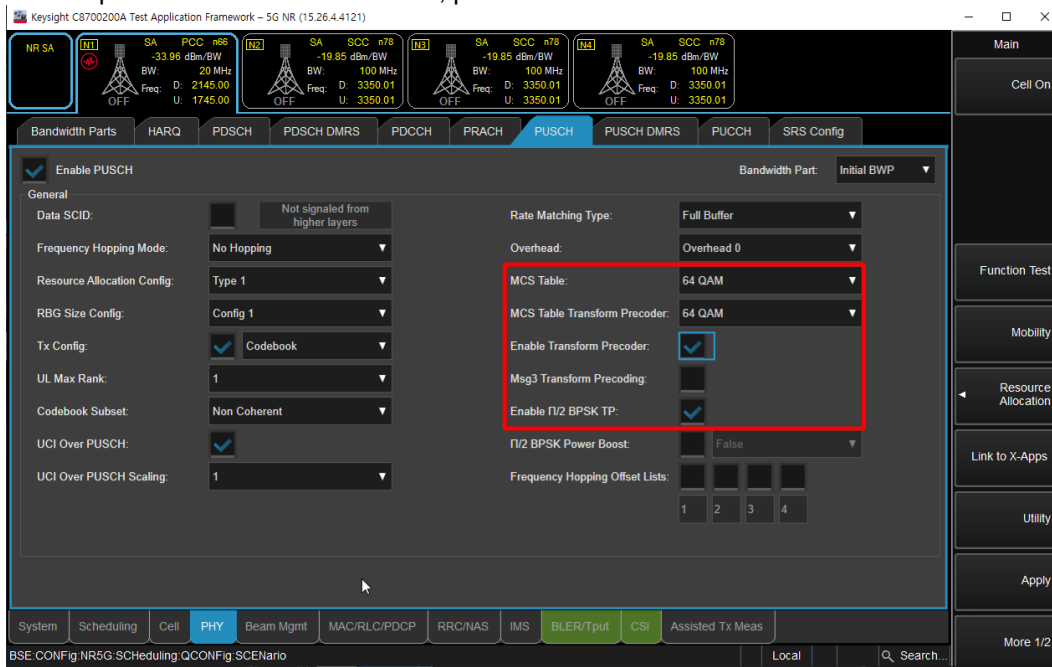


(Figure 3-3)

- Select Uplink Modulation and RB setting (NR -> Scheduling -> Scheduling Map)



(Figure 3-4)

- Click “Cell On” button in the right of Test application screen
- If necessary, turn the Airplane Mode on/off in the DUT
- Select “All Up Bits” of UL Power control Mode (Cell -> UE Power Control)
- To read the output power, click the “Link to X-Apps”

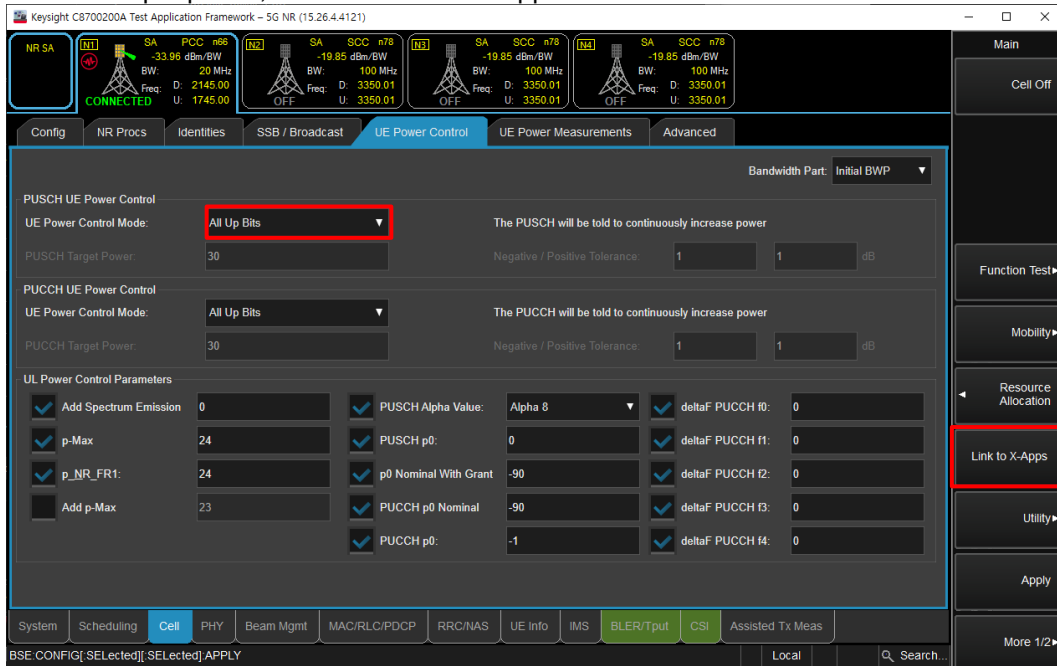

(Figure 3-5)

- Select “Channel Power”



(Figure 3-6)



# 1. Max power

## NR Band n5 Measured Results

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
					Measured Pwr (dBm)		MPR	Tune-up Limit
					167300	836.5 MHz		
20 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.53	0.0	24.00	
			1	53	23.79	0.0	24.00	
			1	104	23.64	0.0	24.00	
			50	0	23.33	0.5	23.50	
			50	28	23.86	0.0	24.00	
			50	56	23.31	0.5	23.50	
			100	0	23.41	0.5	23.50	
		QPSK	1	1	23.57	0.0	24.00	
			1	53	23.68	0.0	24.00	
			1	104	23.61	0.0	24.00	
			50	0	22.54	1.0	23.00	
			50	28	23.81	0.0	24.00	
			50	56	22.87	1.0	23.00	
		16QAM	100	0	22.93	1.0	23.00	
			1	1	22.45	1.0	23.00	
			1	53	22.71	1.0	23.00	
		64QAM	1	104	22.64	1.0	23.00	
			1	1	21.41	2.5	21.50	
		256QAM	1	1	18.89	4.5	19.50	
		CP-OFDM	QPSK	1	1	22.15	1.5	22.50
15 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.52	0.0	24.00	
15 MHz	DFT-s-OFDM	π/2 BPSK	1	40	23.81	0.0	24.00	
			1	77	23.87	0.0	24.00	
			36	0	23.40	0.5	23.50	
			36	22	23.94	0.0	24.00	
			36	43	23.49	0.5	23.50	
			75	0	23.49	0.5	23.50	
			QPSK	1	1	23.68	0.0	24.00
		1		40	23.90	0.0	24.00	
		1		77	23.91	0.0	24.00	
		36		0	22.98	1.0	23.00	
		36		22	23.97	0.0	24.00	
		36		43	22.99	1.0	23.00	
		16QAM	75	0	22.96	1.0	23.00	
			1	1	22.62	1.0	23.00	
			1	1	21.45	2.5	21.50	
		64QAM	1	1	18.92	4.5	19.50	
		CP-OFDM	QPSK	1	1	22.17	1.5	22.50

**NR Band n5 Measured Results (Continued)**

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit	
					167300	836.5 MHz				
10 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.76			0.0	24.00	
			1	26	23.88			0.0	24.00	
			1	50	23.94			0.0	24.00	
			25	0	23.47			0.5	23.50	
			25	14	23.98			0.0	24.00	
			25	27	23.49			0.5	23.50	
			50	0	23.48			0.5	23.50	
		QPSK	1	1	23.80			0.0	24.00	
			1	26	23.99			0.0	24.00	
			1	50	23.98			0.0	24.00	
			25	0	22.95			1.0	23.00	
			25	14	23.96			0.0	24.00	
			25	27	22.99			1.0	23.00	
			50	0	22.94			1.0	23.00	
	16QAM	1	1	22.80			1.0	23.00		
64QAM	1	1	21.48			2.5	21.50			
256QAM	1	1	19.18			4.5	19.50			
CP-OFDM	QPSK	1	1	22.16			1.5	22.50		
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit	
					165300	167300	169300			
5 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.64	23.88	23.94	0.0	24.00	
			1	13	23.58	23.96	23.87	0.0	24.00	
			1	23	23.60	23.85	23.98	0.0	24.00	
			12	0	23.10	23.44	23.49	0.5	23.50	
			12	7	23.61	23.98	23.98	0.0	24.00	
			12	13	23.11	23.46	23.42	0.5	23.50	
			25	0	23.15	23.48	23.49	0.5	23.50	
		QPSK	1	1	23.63	23.96	23.88	0.0	24.00	
			1	13	23.55	23.97	23.82	0.0	24.00	
			1	23	23.58	23.93	23.80	0.0	24.00	
			12	0	22.69	22.85	22.92	1.0	23.00	
			12	7	23.59	23.96	23.94	0.0	24.00	
			12	13	22.65	22.97	22.95	1.0	23.00	
			25	0	22.57	22.95	22.95	1.0	23.00	
		16QAM	1	1	22.51	22.90	22.89	1.0	23.00	
		64QAM	1	1	21.43	21.50	21.49	2.5	21.50	
		256QAM	1	1	18.89	19.19	19.26	4.5	19.50	
		CP-OFDM	QPSK	1	1	21.89	22.18	22.23	1.5	22.50

**NR Band n66 (Main 2. Ant) Measured Results**

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
					Measured Pwr (dBm)			MPR	Tune-up Limit
					344000	349000	354000		
					1720 MHz	1745 MHz	1770 MHz		
20 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.87	23.81	23.94	0.0	24.50
			1	53	23.85	23.78	23.73	0.0	24.50
			1	104	24.06	23.93	23.99	0.0	24.50
			50	0	23.49	23.53	23.62	0.5	24.00
			50	28	24.09	24.02	24.02	0.0	24.50
			50	56	23.57	23.42	23.63	0.5	24.00
		100	0	23.55	23.51	23.61	0.5	24.00	
		QPSK	1	1	23.96	23.92	24.06	0.0	24.50
			1	53	23.92	23.83	23.81	0.0	24.50
			1	104	24.10	23.98	24.40	0.0	24.50
			50	0	23.06	23.04	23.12	1.0	23.50
			50	28	24.07	24.01	24.08	0.0	24.50
	50		56	23.14	23.02	23.15	1.0	23.50	
	16QAM	1	1	22.97	22.93	23.08	1.0	23.50	
		1	53	22.87	22.92	22.91	1.0	23.50	
		1	104	23.02	22.99	23.02	1.0	23.50	
	64QAM	1	1	21.77	21.79	21.85	2.5	22.00	
	256QAM	1	1	19.08	19.36	19.19	4.5	20.00	
CP-OFDM	QPSK	1	1	22.28	22.35	22.57	1.5	23.00	
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					343500	349000	354500		
					1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.13	23.66	23.08	0.0	24.50
			1	40	23.20	23.61	23.11	0.0	24.50
			1	77	23.36	23.76	23.19	0.0	24.50
			36	0	22.90	23.50	22.83	0.5	24.00
			36	22	23.39	23.90	23.34	0.0	24.50
			36	43	23.05	23.45	22.89	0.5	24.00
		75	0	23.06	23.48	22.88	0.5	24.00	
		QPSK	1	1	23.25	23.83	23.26	0.0	24.50
			1	40	23.35	23.75	23.31	0.0	24.50
			1	77	23.58	23.86	23.37	0.0	24.50
			36	0	22.52	23.05	22.45	1.0	23.50
			36	22	23.55	23.96	22.15	0.0	24.50
	36		43	22.62	23.04	22.17	1.0	23.50	
	75	0	22.61	23.01	22.50	1.0	23.50		
	16QAM	1	1	22.32	22.83	22.33	1.0	23.50	
	64QAM	1	1	21.25	21.67	21.17	2.5	22.00	
	256QAM	1	1	18.56	18.82	18.54	4.5	20.00	
	CP-OFDM	QPSK	1	1	21.69	22.19	21.62	1.5	23.00

**NR Band n66 (Main 2. Ant) Measured Results (Continued)**

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					343000	349000	355000		
					1715 MHz	1745 MHz	1775 MHz		
10 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.38	23.95	23.35	0.0	24.50
			1	26	23.51	23.87	23.40	0.0	24.50
			1	50	23.49	24.04	23.47	0.0	24.50
			25	0	23.14	23.59	22.99	0.5	24.00
			25	14	23.70	24.11	23.55	0.0	24.50
			25	27	23.18	23.58	23.07	0.5	24.00
		50	0	23.20	23.60	23.06	0.5	24.00	
		QPSK	1	1	23.58	24.03	23.50	0.0	24.50
			1	26	23.67	24.12	23.56	0.0	24.50
			1	50	23.70	24.15	23.53	0.0	24.50
			25	0	22.74	23.11	22.59	1.0	23.50
			25	14	23.68	24.16	23.64	0.0	24.50
			25	27	22.76	23.11	22.63	1.0	23.50
	50	0	22.73	23.09	22.63	1.0	23.50		
16QAM	1	1	22.55	22.97	22.48	1.0	23.50		
64QAM	1	1	21.41	21.53	21.32	2.5	22.00		
256QAM	1	1	18.71	19.23	18.70	4.5	20.00		
CP-OFDM	QPSK	1	1	21.95	22.32	21.83	1.5	23.00	
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					342500	349000	355500		
					1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	DFT-s-OFDM	π/2 BPSK	1	1	23.36	23.80	23.29	0.0	24.50
			1	13	23.57	23.86	23.33	0.0	24.50
			1	23	23.59	23.97	23.46	0.0	24.50
			12	0	23.17	23.59	22.97	0.5	24.00
			12	7	23.64	24.07	23.49	0.0	24.50
			12	13	23.16	23.54	23.02	0.5	24.00
		25	0	23.17	23.64	23.04	0.5	24.00	
		QPSK	1	1	23.64	24.08	23.49	0.0	24.50
			1	13	23.54	24.31	23.56	0.0	24.50
			1	23	23.59	24.18	23.44	0.0	24.50
			12	0	22.71	23.16	22.45	1.0	23.50
			12	7	23.57	24.14	23.46	0.0	24.50
			12	13	22.76	23.10	22.52	1.0	23.50
		25	0	22.73	23.15	22.46	1.0	23.50	
		16QAM	1	1	22.63	23.06	22.34	1.0	23.50
		64QAM	1	1	21.41	21.89	21.28	2.5	22.00
		256QAM	1	1	18.71	19.22	18.67	4.5	20.00
	CP-OFDM	QPSK	1	1	22.07	22.45	22.01	1.5	23.00

**NR Band n66 (Sub 1. Ant) Measured Results**

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
					Measured Pwr (dBm)			MPR	Tune-up Limit
					344000	349000	354000		
					1720 MHz	1745 MHz	1770 MHz		
20 MHz	DFT-s-OFDM	π/2 BPSK	1	1	22.24	22.05	22.25	0.0	24.00
			1	53	22.27	22.61	22.55	0.0	24.00
			1	104	22.35	22.27	22.07	0.0	24.00
			50	0	21.97	22.03	22.05	0.5	23.50
			50	28	22.43	22.56	22.66	0.0	24.00
			50	56	21.98	22.64	21.96	0.5	23.50
		100	0	22.01	21.99	22.05	0.5	23.50	
		QPSK	1	1	22.24	22.05	22.21	0.0	24.00
			1	53	22.31	22.54	22.59	0.0	24.00
			1	104	22.42	22.26	22.04	0.0	24.00
			50	0	21.39	21.53	21.53	1.0	23.00
			50	28	22.39	22.57	22.67	0.0	24.00
			50	56	21.42	21.52	21.58	1.0	23.00
		16QAM	100	0	21.48	21.52	21.46	1.0	23.00
			1	1	21.35	21.16	21.31	1.0	23.00
			1	53	21.37	21.66	21.64	1.0	23.00
		64QAM	1	104	21.47	21.33	21.06	1.0	23.00
			1	1	20.17	19.93	20.11	2.5	21.50
256QAM	1	1	17.97	17.73	17.86	4.5	19.50		
CP-OFDM	QPSK	1	1	20.74	20.42	20.57	1.5	22.50	
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					343500	349000	354500		
					1717.5 MHz	1745 MHz	1772.5 MHz		
					15 MHz	DFT-s-OFDM	π/2 BPSK	1	1
1	40	22.25	22.66	22.43				0.0	24.00
1	77	22.38	22.50	22.21				0.0	24.00
36	0	21.94	22.14	22.09				0.5	23.50
36	22	22.49	22.63	22.60				0.0	24.00
36	43	21.96	22.23	21.95				0.5	23.50
75	0	21.96	22.10	22.15			0.5	23.50	
QPSK	1	1	22.35	22.24			22.36	0.0	24.00
	1	40	22.29	22.63			22.49	0.0	24.00
	1	77	22.44	22.55			22.29	0.0	24.00
	36	0	21.48	21.54			21.23	1.0	23.00
	36	22	22.51	22.58			22.65	0.0	24.00
	36	43	21.07	21.76			21.42	1.0	23.00
16QAM	75	0	21.50	21.64			21.61	1.0	23.00
	1	1	21.42	21.29			21.43	1.0	23.00
	1	1	20.27	20.14			19.96	2.5	21.50
64QAM	1	1	18.05	18.00			18.22	4.5	19.50
256QAM	1	1	18.05	18.00			18.22	4.5	19.50
CP-OFDM	QPSK	1	1	20.97	20.87	20.95	1.5	22.50	

**NR Band n66 (Sub 1. Ant) Measured Results**

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					343000	349000	355000		
					1715 MHz	1745 MHz	1775 MHz		
10 MHz	DFT-s-OFDM	π/2 BPSK	1	1	22.21	22.26	22.28	0.0	24.00
			1	26	22.40	22.37	22.26	0.0	24.00
			1	50	22.37	22.35	22.18	0.0	24.00
			25	0	21.94	21.82	21.83	0.5	23.50
			25	14	22.47	22.47	22.31	0.0	24.00
			25	27	21.96	22.00	21.76	0.5	23.50
			50	0	21.95	21.95	21.79	0.5	23.50
		QPSK	1	1	22.40	22.32	22.29	0.0	24.00
			1	26	22.50	22.39	22.23	0.0	24.00
			1	50	22.44	22.43	22.24	0.0	24.00
			25	0	21.71	21.32	21.45	1.0	23.00
			25	14	22.58	22.55	22.34	0.0	24.00
			25	27	21.51	21.47	21.25	1.0	23.00
		16QAM	1	1	21.42	21.33	21.37	1.0	23.00
64QAM	1		1	20.28	20.02	20.26	2.5	21.50	
256QAM	1		1	18.09	18.06	18.06	4.5	19.50	
CP-OFDM	QPSK	1	1	20.69	20.71	20.09	1.5	22.50	
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
					342500	349000	355500		
					1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	DFT-s-OFDM	π/2 BPSK	1	1	22.24	22.17	22.18	0.0	24.00
			1	13	22.38	22.31	22.33	0.0	24.00
			1	23	22.45	22.40	22.26	0.0	24.00
			12	0	21.89	21.95	21.78	0.5	23.50
			12	7	22.42	22.39	22.28	0.0	24.00
			12	13	21.99	22.00	21.80	0.5	23.50
			25	0	21.91	21.94	21.76	0.5	23.50
		QPSK	1	1	22.40	22.26	22.18	0.0	24.00
			1	13	22.44	22.38	22.36	0.0	24.00
			1	23	22.46	22.37	22.24	0.0	24.00
			12	0	21.50	21.46	21.32	1.0	23.00
			12	7	22.48	22.45	22.28	0.0	24.00
			12	13	21.46	21.50	21.26	1.0	23.00
		16QAM	1	1	21.48	21.43	21.27	1.0	23.00
64QAM	1		1	20.25	20.16	20.14	2.5	21.50	
256QAM	1		1	18.13	18.09	18.00	4.5	19.50	
CP-OFDM	QPSK	1	1	20.85	20.94	20.76	1.5	22.50	

## 2. Reduced power

### NR Band n66 (Sub1. Ant) Measured Results

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Reduced Average Power (dBm)					Reduced Average Power (dBm)							
					Hotspot back-off					RCV back-off							
					Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit			
					344000	349000	354000			344000	349000	354000					
					1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz					
20 MHz	DFT-s-OFDM	π/2 BPSK	1	1	20.43	20.14	20.31	0.0	22.00	16.24	16.07	16.25	0.0	18.00			
			1	53	20.39	20.73	20.65	0.0	22.00	16.28	16.58	16.52	0.0	18.00			
			1	104	20.49	20.37	20.08	0.0	22.00	16.39	16.24	15.97	0.0	18.00			
			50	0	20.55	20.60	20.61	0.0	22.00	16.41	16.51	16.53	0.0	18.00			
			50	28	20.59	20.76	20.76	0.0	22.00	16.45	16.62	16.67	0.0	18.00			
			50	56	20.53	20.68	20.46	0.0	22.00	16.42	16.56	16.34	0.0	18.00			
		QPSK	100	0	20.49	20.60	20.60	0.0	22.00	16.43	16.53	16.49	0.0	18.00			
			1	1	20.41	20.13	20.29	0.0	22.00	16.25	16.12	16.24	0.0	18.00			
			1	53	20.36	20.70	20.71	0.0	22.00	16.27	16.56	16.62	0.0	18.00			
			1	104	20.46	20.36	20.02	0.0	22.00	16.38	16.26	15.91	0.0	18.00			
			50	0	20.53	20.60	20.59	0.0	22.00	16.34	16.51	16.47	0.0	18.00			
			50	28	20.52	20.79	20.82	0.0	22.00	16.41	16.55	16.65	0.0	18.00			
		16QAM	50	56	20.52	20.64	20.45	0.0	22.00	16.40	16.52	16.37	0.0	18.00			
			100	0	20.51	20.56	20.48	0.0	22.00	16.44	16.53	16.36	0.0	18.00			
			1	1	20.50	20.41	20.35	0.0	22.00	16.34	16.14	16.35	0.0	18.00			
			1	53	20.46	20.74	20.68	0.0	22.00	16.49	16.67	16.56	0.0	18.00			
		64QAM	1	104	20.48	20.42	20.13	0.0	22.00	16.51	16.35	15.97	0.0	18.00			
			1	1	20.26	20.02	20.19	0.5	21.50	16.71	16.49	16.67	0.0	18.00			
256QAM	1	1	18.11	17.76	17.95	2.5	19.50	16.56	16.33	16.39	0.0	18.00					
CP-OFDM	QPSK	1	1	20.35	20.02	20.14	0.0	22.00	16.29	16.06	16.16	0.0	18.00				
BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit			
					343500	349000	354500			343500	349000	354500					
								1717.5 MHz	1745 MHz	1772.5 MHz			1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	DFT-s-OFDM	π/2 BPSK	1	1	20.29	20.25	20.38	0.0	22.00	16.34	16.33	16.55	0.0	18.00			
			1	40	20.33	20.66	20.54	0.0	22.00	16.25	16.57	16.54	0.0	18.00			
			1	77	20.44	20.49	20.22	0.0	22.00	16.38	16.48	16.26	0.0	18.00			
			36	0	20.42	20.65	20.66	0.0	22.00	16.36	16.55	16.60	0.0	18.00			
			36	22	20.49	20.63	20.68	0.0	22.00	16.44	16.62	16.62	0.0	18.00			
			36	43	20.57	20.71	20.50	0.0	22.00	16.46	16.63	16.48	0.0	18.00			
		QPSK	75	0	20.54	20.63	20.68	0.0	22.00	16.42	16.57	16.50	0.0	18.00			
			1	1	20.25	20.33	20.49	0.0	22.00	16.28	16.17	16.36	0.0	18.00			
			1	40	20.34	20.65	20.57	0.0	22.00	16.24	16.62	16.48	0.0	18.00			
			1	77	20.53	20.63	20.34	0.0	22.00	16.34	16.49	16.17	0.0	18.00			
			36	0	20.52	20.60	20.46	0.0	22.00	16.51	16.52	16.58	0.0	18.00			
			36	22	20.50	20.69	20.69	0.0	22.00	16.43	16.60	16.51	0.0	18.00			
		16QAM	36	43	20.55	20.72	20.55	0.0	22.00	16.44	16.68	16.45	0.0	18.00			
			75	0	20.55	20.68	20.57	0.0	22.00	16.50	16.48	16.56	0.0	18.00			
			1	1	20.53	20.27	20.43	0.0	22.00	16.37	16.24	16.37	0.0	18.00			
			1	1	20.25	20.14	19.84	0.5	21.50	16.61	16.68	16.69	0.0	18.00			
		64QAM	1	1	18.11	17.97	18.03	2.5	19.50	16.52	16.65	16.55	0.0	18.00			
		CP-OFDM	QPSK	1	1	20.32	20.03	20.31	0.0	22.00	16.40	16.00	16.34	0.0	18.00		

**NR Band n66 (Sub1. Ant) Measured Results**

BW (MHz)	Modulation	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit	Measured Pwr (dBm)			MPR	Tune-up Limit		
					343000	349000	355000			343000	349000	355000				
					1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz				
10 MHz	DFT-s-OFDM	π/2 BPSK	1	1	20.37	20.44	20.36	0.0	22.00	16.26	16.43	16.15	0.0	18.00		
			1	26	20.53	20.47	20.35	0.0	22.00	16.32	16.44	16.12	0.0	18.00		
			1	50	20.56	20.53	20.28	0.0	22.00	16.37	16.41	16.17	0.0	18.00		
			25	0	20.51	20.40	20.39	0.0	22.00	16.39	16.31	16.28	0.0	18.00		
			25	14	20.56	20.54	20.36	0.0	22.00	16.47	16.47	16.26	0.0	18.00		
			25	27	20.59	20.52	20.34	0.0	22.00	16.41	16.39	16.27	0.0	18.00		
		QPSK	50	0	20.57	20.58	20.40	0.0	22.00	16.42	16.38	16.23	0.0	18.00		
			1	1	20.49	20.44	20.42	0.0	22.00	16.39	16.36	16.35	0.0	18.00		
			1	26	20.58	20.50	20.42	0.0	22.00	16.50	16.36	16.25	0.0	18.00		
			1	50	20.56	20.50	20.40	0.0	22.00	16.39	16.43	16.22	0.0	18.00		
			25	0	20.58	20.49	20.28	0.0	22.00	16.41	16.31	16.28	0.0	18.00		
			25	14	20.62	20.57	20.38	0.0	22.00	16.47	16.38	16.27	0.0	18.00		
		CP-OFDM	QPSK	25	27	20.66	20.53	20.61	0.0	22.00	16.49	16.48	16.23	0.0	18.00	
				50	0	20.54	20.58	20.38	0.0	22.00	16.41	16.44	16.22	0.0	18.00	
				16QAM	1	1	20.61	20.66	20.43	0.0	22.00	16.54	16.69	16.47	0.0	18.00
				64QAM	1	1	20.27	19.97	20.32	0.5	21.50	16.67	16.53	16.68	0.0	18.00
5 MHz	DFT-s-OFDM	π/2 BPSK	1	1	20.39	20.28	20.23	0.0	22.00	16.42	16.32	15.99	0.0	18.00		
			1	13	20.51	20.51	20.23	0.0	22.00	16.56	16.39	16.22	0.0	18.00		
			1	23	20.48	20.50	20.26	0.0	22.00	16.52	16.39	16.17	0.0	18.00		
			12	0	20.46	20.44	20.31	0.0	22.00	16.47	16.36	16.15	0.0	18.00		
			12	7	20.48	20.50	20.33	0.0	22.00	16.41	16.35	16.27	0.0	18.00		
			12	13	20.50	20.47	20.28	0.0	22.00	16.40	16.42	16.14	0.0	18.00		
		QPSK	25	0	20.47	20.52	20.29	0.0	22.00	16.46	16.41	16.18	0.0	18.00		
			1	1	20.41	20.38	20.31	0.0	22.00	16.35	16.30	16.08	0.0	18.00		
			1	13	20.51	20.50	20.24	0.0	22.00	16.35	16.32	16.24	0.0	18.00		
			1	23	20.53	20.50	20.33	0.0	22.00	16.48	16.36	16.13	0.0	18.00		
			12	0	20.54	20.45	20.31	0.0	22.00	16.42	16.38	16.16	0.0	18.00		
			12	7	20.59	20.54	20.32	0.0	22.00	16.50	16.42	16.20	0.0	18.00		
		CP-OFDM	QPSK	12	13	20.62	20.46	20.29	0.0	22.00	16.39	16.44	16.21	0.0	18.00	
				25	0	20.55	20.52	20.39	0.0	22.00	16.46	16.48	16.14	0.0	18.00	
				16QAM	1	1	20.46	20.43	20.29	0.0	22.00	16.46	16.35	16.35	0.0	18.00
				64QAM	1	1	20.34	20.30	20.15	0.5	21.50	16.64	16.68	16.61	0.0	18.00
CP-OFDM	QPSK	256QAM	1	1	18.09	18.11	18.02	2.5	19.50	16.51	16.56	16.47	0.0	18.00		
		1	1	20.29	20.32	20.29	0.0	22.00	16.57	16.61	16.43	0.0	18.00			



### 9.5. Wi-Fi 2.4 GHz (DTS Band)

#### WLAN output power results

Antenna	Mode	Data Rate	Ch #	Freq. (MHz)	WLAN mode power						
					Max.Average Power			Reduced Average Power			
					Meas. Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	Meas. Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	
WiFi 2.4G Ant	802.11b	1 Mbps	1	2412.0	17.78	18.50	Yes	11.24	12.00	Yes	
			6	2437.0	19.45	20.00					
			11	2462.0	13.85	14.50					
			12	2467.0	7.11	8.00	No	7.15			8.00
			13	2472.0	7.40	8.00					
	802.11g	6 Mbps	1	2412.0	Not Required	18.00	No	Not Required	12.00	No	
			6	2437.0							
			11	2462.0		17.00	No				
			12	2467.0		6.00					
	13	2472.0	6.00								
	802.11n	MCS 0	1	2412.0	Not Required	17.50	No	Not Required	12.00	No	
			6	2437.0							
			11	2462.0		16.50					
			12	2467.0		6.00	No				
			13	2472.0		5.50					

**Note(s):**

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11n/g mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

### 9.6. Wi-Fi 5GHz (U-NII Bands)

#### WLAN output power Results

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	WLAN mode power					
						Max. Average Power			Reduced Average Power		
						Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)
5GHz Ant	5.3 (UNII 2A)	802.11a	6 Mbps	52	5260	15.77	16.00	Yes	Not Required	11.00	No
				56	5280	14.80					
				60	5300	15.28					
				64	5320	15.71					
		802.11n (HT20)	6.5 Mbps	Not Required			15.00	No	Not Required	11.00	No
		802.11n (HT40)	13.5 Mbps	Not Required			14.00	No	Not Required	11.00	No
	802.11ac (VHT20)	6.5 Mbps	Not Required			15.00	No	Not Required	11.00	No	
	802.11ac (VHT40)	13.5 Mbps	Not Required			14.00	No	Not Required	11.00	No	
	802.11ac (VHT80)	29.3 Mbps	58	5290.0	Not Required	13.00	No	10.22	11.00	Yes	
	5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	14.96	16.00	Yes	Not Required	11.00	No
				120	5600	15.66					
				124	5620	15.13					
				144	5720	14.82					
		802.11n (HT20)	6.5 Mbps	Not Required			15.00	No	Not Required	11.00	No
		802.11n (HT40)	13.5 Mbps	Not Required			14.00	No	Not Required	11.00	No
	802.11ac (VHT20)	6.5 Mbps	Not Required			15.00	No	Not Required	11.00	No	
	802.11ac (VHT40)	13.5 Mbps	Not Required			14.00	No	Not Required	11.00	No	
	802.11ac (VHT80)	29.3 Mbps	106	5530.0	Not Required	13.00	No	10.49	11.00	Yes	
	122	5610.0	Not Required	10.59							
	138	5690.0	Not Required	10.33							
	5.8 (UNII 3)	802.11a	6 Mbps	149	5745	14.84	16.00	Yes	Not Required	11.00	No
157				5785	15.25						
165				5825	15.48						
802.11n (HT20)		6.5 Mbps	Not Required			15.00	No	Not Required	11.00	No	
802.11n (HT40)		13.5 Mbps	Not Required			14.00	No	Not Required	11.00	No	
802.11ac (VHT20)		6.5 Mbps	Not Required			15.00	No	Not Required	11.00	No	
802.11ac (VHT40)	13.5 Mbps	Not Required			14.00	No	Not Required	11.00	No		
802.11ac (VHT80)	29.3 Mbps	155	5775.0	Not Required	13.00	No	10.54	11.00	Yes		

**Note(s):**

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n, ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - ≤ 1.2 W/kg, SAR is not required for UNII band I
  - > 1.2 W/kg, both bands should be tested independently for SAR.

### 9.7. Bluetooth

#### Bluetooth Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Average Power (dBm)	
				Meas Pwr	Tune-up Limit
2.4	GFSK	0	2402	16.67	18.00
		39	2441	16.67	
		78	2480	17.77	
	EDR 8-DPSK	0	2402	11.50	13.50
		39	2441	11.78	
		78	2480	13.10	
	LE GFSK, 1M (37 pkt)	0	2402	5.82	8.50
		19	2440	7.20	
		39	2480	8.02	
	LE GFSK, 2M (37 pkt)	0	2402	5.67	8.50
		19	2440	7.00	
		39	2480	7.89	

**Note(s):**


For All exposure conditions, SAR test is evaluated at GFSK mode in Bluetooth using maximum power condition.

#### Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.880	3.750	76.8%	1.15

### Duty Cycle plots

#### GFSK

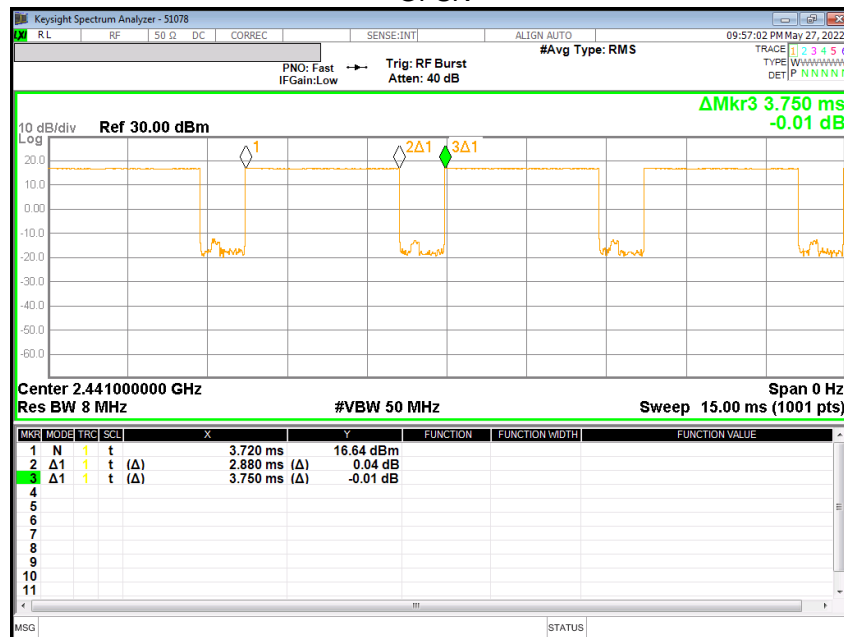

## 10. Measured and Reported (Scaled) SAR Results

### SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN= Measured SAR \*Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR \* Tune-up scaling factor \* Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or  $2.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or  $1.5$  W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or  $1.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm.

When hotspot mode does not apply, 10-g extremity SAR is required for all surfaces and edges with an antenna located at  $\leq 25$ mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg; However, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the  $1.2$  W/kg SAR test reduction threshold.

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR  $< 1.2$  W/kg.

### KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

**KDB 248227 D01 SAR meas for 802.11:**

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

### 10.1. GSM 850

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	GPRS 2 Slots	N/A	0	Left Touch	251	848.8	32.00	31.84	0.289	0.300	1
					Left Tilt	251	848.8	32.00	31.84	0.146	0.151	
					Right Touch	251	848.8	32.00	31.84	0.285	0.296	
					Right Tilt	251	848.8	32.00	31.84	0.144	0.149	
	Body-worn	GPRS 2 Slots	N/A	15	Rear	251	848.8	32.00	31.84	0.463	0.480	2
					Front	251	848.8	32.00	31.84	0.195	0.202	
	Hotspot	GPRS 2 Slots	N/A	10	Rear	128	824.4	32.00	31.01	0.859	1.079	
						190	836.6	32.00	31.50	0.966	1.084	
						251	848.8	32.00	31.84	1.060	1.100	3
					Front	251	848.8	32.00	31.84	0.207	0.215	
Edge 2					251	848.8	32.00	31.84	0.375	0.389		
Edge 3					251	848.8	32.00	31.84	0.501	0.520		
Edge 4	251	848.8	32.00	31.84	0.216	0.224						

### 10.2. GSM 1900

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	GPRS 3 Slots	Off	0	Left Touch	661	1880.0	27.00	25.58	0.138	0.191	4
					Left Tilt	661	1880.0	27.00	25.58	0.081	0.112	
					Right Touch	661	1880.0	27.00	25.58	0.114	0.158	
					Right Tilt	661	1880.0	27.00	25.58	0.077	0.107	
	Body-worn	GPRS 3 Slots	Off	15	Rear	661	1880.0	27.00	25.58	0.213	0.295	5
					Front	661	1880.0	27.00	25.58	0.184	0.255	
	Hotspot	GPRS 3 Slots	On	10	Rear	661	1880.0	25.50	23.70	0.286	0.433	6
					Front	661	1880.0	25.50	23.70	0.200	0.303	
					Edge 3	661	1880.0	25.50	23.70	0.272	0.412	
					Edge 4	661	1880.0	25.50	23.70	0.153	0.232	

### 10.3. WCDMA Band II

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	Rel 99 RMC	Off	0	Left Touch	9400	1880.0	25.00	23.42	0.170	0.245	7
					Left Tilt	9400	1880.0	25.00	23.42	0.107	0.154	
					Right Touch	9400	1880.0	25.00	23.42	0.158	0.227	
					Right Tilt	9400	1880.0	25.00	23.42	0.109	0.157	
	Body-worn	Rel 99 RMC	Off	15	Rear	9400	1880.0	25.00	23.42	0.350	0.504	8
					Front	9400	1880.0	25.00	23.42	0.295	0.424	
	Hotspot	Rel 99 RMC	On	10	Rear	9400	1880.0	22.00	20.38	0.326	0.473	9
					Front	9400	1880.0	22.00	20.38	0.254	0.369	
					Edge 3	9400	1880.0	22.00	20.38	0.305	0.443	
					Edge 4	9400	1880.0	22.00	20.38	0.192	0.279	

**Note(s):**

Orange box is the highest SAR value in WWAN Hotspot exposure.

### 10.4. WCDMA Band IV

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	Rel 99 RMC	Off	0	Left Touch	1413	1732.6	25.00	23.41	0.173	0.249	10
					Left Tilt	1413	1732.6	25.00	23.41	0.126	0.182	
					Right Touch	1413	1732.6	25.00	23.41	0.156	0.225	
					Right Tilt	1413	1732.6	25.00	23.41	0.111	0.160	
	Body-worn	Rel 99 RMC	Off	15	Rear	1413	1732.6	25.00	23.41	0.347	0.500	11
					Front	1413	1732.6	25.00	23.41	0.309	0.446	
	Hotspot	Rel 99 RMC	On	10	Rear	1413	1732.6	22.00	20.52	0.286	0.402	
					Front	1413	1732.6	22.00	20.52	0.245	0.344	
					Edge 3	1413	1732.6	22.00	20.52	0.355	0.499	12
					Edge 4	1413	1732.6	22.00	20.52	0.183	0.257	

### 10.5. WCDMA Band V

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	Rel 99 RMC	N/A	0	Left Touch	4183	836.6	25.00	24.37	0.217	0.251	
					Left Tilt	4183	836.6	25.00	24.37	0.115	0.133	
					Right Touch	4183	836.6	25.00	24.37	0.247	0.286	13
					Right Tilt	4183	836.6	25.00	24.37	0.144	0.166	
	Body-worn	Rel 99 RMC	N/A	15	Rear	4183	836.6	25.00	24.37	0.376	0.435	14
					Front	4183	836.6	25.00	24.37	0.203	0.235	
	Hotspot	Rel 99 RMC	N/A	10	Rear	4183	836.6	25.00	24.37	0.615	0.711	15
					Front	4183	836.6	25.00	24.37	0.194	0.224	
					Edge 2	4183	836.6	25.00	24.37	0.360	0.416	
					Edge 3	4183	836.6	25.00	24.37	0.340	0.393	
Edge 4	4183	836.6	25.00	24.37	0.204	0.236						

### 10.6. LTE Band 2 (20MHz Bandwidth)

#### Main Ant.2 SAR results

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch#.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
										Tune-up limit	Meas.	Meas.	Scaled					
Main 2 Ant.	Head	QPSK	OFF	0	Left Touch	19100	1900.0	1	0	24.50	23.45	0.222	0.283	16				
								50	24	23.50	22.60	0.177	0.218					
					Left Tilt	19100	1900.0	1	0	24.50	23.45	0.108	0.138					
								50	24	23.50	22.60	0.093	0.114					
					Right Touch	19100	1900.0	1	0	24.50	23.45	0.147	0.187					
								50	24	23.50	22.60	0.128	0.157					
					Right Tilt	19100	1900.0	1	0	24.50	23.45	0.094	0.120					
								50	24	23.50	22.60	0.077	0.095					
					Body-worn	QPSK	Off	15	Rear	19100	1900.0	1	0	24.50	23.45	0.410	0.522	17
												50	24	23.50	22.60	0.359	0.442	
	Front	19100	1900.0	1					0	24.50	23.45	0.357	0.455					
				50					24	23.50	22.60	0.296	0.364					
	Hotspot	QPSK	On	10	Rear	19100	1900.0	1	0	22.00	20.51	0.473	0.667					
								50	24	22.00	20.62	0.511	0.702	18				
					Front	19100	1900.0	1	0	22.00	20.51	0.336	0.474					
								50	24	22.00	20.62	0.357	0.491					
					Edge 3	19100	1900.0	1	0	22.00	20.51	0.396	0.558					
								50	24	22.00	20.62	0.411	0.565					
					Edge 4	19100	1900.0	1	0	22.00	20.51	0.204	0.287					
								50	24	22.00	20.62	0.212	0.291					

**Note(s):**

Orange box is the highest SAR value in WWAN Body-worn exposure conditions.

**Sub Ant.1 SAR results**

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Sub 1 Ant.	Head	QPSK	N/A	0	Left Touch	18900	1880.0	1	0	20.00	19.00	0.617	0.777	19
								50	24	19.00	18.18	0.508	0.614	
					Left Tilt	18900	1880.0	1	0	20.00	19.00	0.439	0.553	
								50	24	19.00	18.18	0.355	0.429	
					Right Touch	18900	1880.0	1	0	20.00	19.00	0.366	0.461	
								50	24	19.00	18.18	0.299	0.361	
					Right Tilt	18900	1880.0	1	0	20.00	19.00	0.304	0.383	
								50	24	19.00	18.18	0.243	0.293	
	Body-worn	QPSK	N/A	15	Rear	18900	1880.0	1	0	20.00	19.00	0.111	0.140	20
								50	24	19.00	18.18	0.091	0.110	
					Front	18900	1880.0	1	0	20.00	19.00	0.089	0.112	
								50	24	19.00	18.18	0.071	0.086	
	Hotspot	QPSK	N/A	10	Rear	18900	1880.0	1	0	20.00	19.00	0.220	0.277	21
								50	24	19.00	18.18	0.181	0.219	
					Front	18900	1880.0	1	0	20.00	19.00	0.159	0.200	
								50	24	19.00	18.18	0.129	0.156	
Edge 1					18900	1880.0	1	0	20.00	19.00	0.099	0.125		
							50	24	19.00	18.18	0.082	0.098		
Edge 2					18900	1880.0	1	0	20.00	19.00	0.149	0.188		
							50	24	19.00	18.18	0.121	0.146		

**Note(s):**

1. For LTE Band 2 of Sub Ant.1., It work only EN-DC scenarios.
2. Orange box is the highest SAR value in WWAN Body-worn exposure conditions.

**10.7. LTE Band 5 (10MHz Bandwidth)**

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	20525	836.5	1	25	24.70	23.97	0.205	0.243	
								25	25	23.70	23.15	0.173	0.196	
					Left Tilt	20525	836.5	1	25	24.70	23.97	0.122	0.144	
								25	25	23.70	23.15	0.105	0.119	
					Right Touch	20525	836.5	1	25	24.70	23.97	0.246	0.291	22
								25	25	23.70	23.15	0.205	0.233	
					Right Tilt	20525	836.5	1	25	24.70	23.97	0.153	0.181	
								25	25	23.70	23.15	0.125	0.142	
	Body-worn	QPSK	N/A	15	Rear	20525	836.5	1	25	24.70	23.97	0.380	0.450	23
								25	25	23.70	23.15	0.324	0.368	
					Front	20525	836.5	1	25	24.70	23.97	0.219	0.259	
								25	25	23.70	23.15	0.163	0.185	
	Hotspot	QPSK	N/A	10	Rear	20525	836.5	1	25	24.70	23.97	0.643	0.761	24
								25	25	23.70	23.15	0.540	0.613	
					Front	20525	836.5	1	25	24.70	23.97	0.207	0.245	
								25	25	23.70	23.15	0.163	0.185	
					Edge 2	20525	836.5	1	25	24.70	23.97	0.347	0.411	
								25	25	23.70	23.15	0.285	0.323	
Edge 3					20525	836.5	1	25	24.70	23.97	0.414	0.490		
							25	25	23.70	23.15	0.349	0.396		
Edge 4					20525	836.5	1	25	24.70	23.97	0.190	0.225		
							25	25	23.70	23.15	0.153	0.174		



### 10.8. LTE Band 12 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	23095	707.5	1	25	25.70	25.11	0.107	0.123	
								25	25	24.70	24.30	0.093	0.102	
					Left Tilt	23095	707.5	1	25	25.70	25.11	0.064	0.073	
								25	25	24.70	24.30	0.059	0.065	
					Right Touch	23095	707.5	1	25	25.70	25.11	0.107	0.123	25
								25	25	24.70	24.30	0.092	0.101	
					Right Tilt	23095	707.5	1	25	25.70	25.11	0.065	0.074	
								25	25	24.70	24.30	0.054	0.059	
	Body-worn	QPSK	N/A	15	Rear	23095	707.5	1	25	25.70	25.11	0.239	0.274	26
								25	25	24.70	24.30	0.204	0.224	
					Front	23095	707.5	1	25	25.70	25.11	0.137	0.157	
								25	25	24.70	24.30	0.117	0.128	
	Hotspot	QPSK	N/A	10	Rear	23095	707.5	1	25	25.70	25.11	0.211	0.242	27
								25	25	24.70	24.30	0.177	0.194	
					Front	23095	707.5	1	25	25.70	25.11	0.119	0.136	
								25	25	24.70	24.30	0.102	0.112	
					Edge 2	23095	707.5	1	25	25.70	25.11	0.211	0.242	
								25	25	24.70	24.30	0.187	0.205	
					Edge 3	23095	707.5	1	25	25.70	25.11	0.098	0.112	
								25	25	24.70	24.30	0.086	0.094	
					Edge 4	23095	707.5	1	25	25.70	25.11	0.115	0.132	
								25	25	24.70	24.30	0.103	0.113	

### 10.9. LTE Band 13 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	23230	782.0	1	0	24.70	23.75	0.174	0.217	
								25	25	23.70	22.73	0.137	0.171	
					Left Tilt	23230	782.0	1	0	24.70	23.75	0.101	0.126	
								25	25	23.70	22.73	0.087	0.109	
					Right Touch	23230	782.0	1	0	24.70	23.75	0.189	0.235	28
								25	25	23.70	22.73	0.159	0.199	
					Right Tilt	23230	782.0	1	0	24.70	23.75	0.108	0.134	
								25	25	23.70	22.73	0.084	0.105	
	Body-worn	QPSK	N/A	15	Rear	23230	782.0	1	0	24.70	23.75	0.330	0.411	29
								25	25	23.70	22.73	0.269	0.336	
					Front	23230	782.0	1	0	24.70	23.75	0.219	0.273	
								25	25	23.70	22.73	0.180	0.225	
	Hotspot	QPSK	N/A	10	Rear	23230	782.0	1	0	24.70	23.75	0.432	0.538	30
								25	25	23.70	22.73	0.372	0.465	
					Front	23230	782.0	1	0	24.70	23.75	0.197	0.245	
								25	25	23.70	22.73	0.163	0.204	
					Edge 2	23230	782.0	1	0	24.70	23.75	0.332	0.413	
								25	25	23.70	22.73	0.248	0.310	
					Edge 3	23230	782.0	1	0	24.70	23.75	0.105	0.131	
								25	25	23.70	22.73	0.090	0.113	
					Edge 4	23230	782.0	1	0	24.70	23.75	0.175	0.218	
								25	25	23.70	22.73	0.145	0.181	

### 10.10. LTE Band 26 (15MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	26865	831.5	1	74	25.00	23.92	0.197	0.253	
								36	39	24.00	22.93	0.154	0.197	
					Left Tilt	26865	831.5	1	74	25.00	23.92	0.117	0.150	
								36	39	24.00	22.93	0.093	0.119	
					Right Touch	26865	831.5	1	74	25.00	23.92	0.227	0.291	31
								36	39	24.00	22.93	0.172	0.220	
					Right Tilt	26865	831.5	1	74	25.00	23.92	0.137	0.176	
								36	39	24.00	22.93	0.104	0.133	
	Body-worn	QPSK	N/A	15	Rear	26865	831.5	1	74	25.00	23.92	0.325	0.417	32
								36	39	24.00	22.93	0.251	0.321	
					Front	26865	831.5	1	74	25.00	23.92	0.179	0.230	
								36	39	24.00	22.93	0.144	0.184	
	Hotspot	QPSK	N/A	10	Rear	26865	831.5	1	74	25.00	23.92	0.524	0.672	33
								36	39	24.00	22.93	0.405	0.518	
					Front	26865	831.5	1	74	25.00	23.92	0.169	0.217	
								36	39	24.00	22.93	0.135	0.173	
					Edge 2	26865	831.5	1	74	25.00	23.92	0.309	0.396	
								36	39	24.00	22.93	0.250	0.320	
					Edge 3	26865	831.5	1	74	25.00	23.92	0.153	0.196	
								36	39	24.00	22.93	0.125	0.160	
					Edge 4	26865	831.5	1	74	25.00	23.92	0.316	0.405	
								36	39	24.00	22.93	0.246	0.315	

### 10.11. LTE Band 41 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.		
										Tune-up limit	Meas.	Meas.	Scaled			
Main 2 Ant.	Head	QPSK	N/A	0	Left Touch	39750	2506.0	1	0	24.00	23.29	0.184	0.217	34		
								50	0	23.00	22.35	0.151	0.175			
					Left Tilt	39750	2506.0	1	0	24.00	23.29	0.058	0.068			
								50	0	23.00	22.35	0.054	0.063			
					Right Touch	39750	2506.0	1	0	24.00	23.29	0.126	0.148			
								50	0	23.00	22.35	0.104	0.121			
					Right Tilt	39750	2506.0	1	0	24.00	23.29	0.123	0.145			
								50	0	23.00	22.35	0.105	0.122			
	Body-worn	QPSK	N/A	15	Rear	39750	2506.0	1	0	24.00	23.29	0.314	0.370	35		
								50	0	23.00	22.35	0.249	0.289			
					Front	39750	2506.0	1	0	24.00	23.29	0.251	0.296			
								50	0	23.00	22.35	0.202	0.235			
	Hotspot	QPSK	N/A	10	Rear	39750	2506.0	1	0	24.00	23.29	0.539	0.635			
								50	0	23.00	22.35	0.454	0.527			
								40185	2506.0	1	0	24.00	23.16	0.634	0.769	
								40620	2549.5	1	0	24.00	23.25	0.652	0.775	36
					41055	2593.0	1	0	24.00	23.15	0.602	0.732				
															41490	2636.5
					Front	39750	2506.0	1	0	24.00	23.29	0.403	0.475			
								50	0	23.00	22.35	0.324	0.376			
					Edge 3	39750	2506.0	1	0	24.00	23.29	0.453	0.533			
								50	0	23.00	22.35	0.374	0.434			
					Edge 4	39750	2506.0	1	0	24.00	23.29	0.182	0.214			
								50	0	23.00	22.35	0.183	0.213			

### 10.12. LTE Band 66 (20MHz Bandwidth)

#### Main Ant.2 SAR results

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	QPSK	Off	0	Left Touch	132322	1745.0	1	0	25.00	23.78	0.194	0.257	
								50	0	24.00	22.82	0.073	0.096	
					Left Tilt	132322	1745.0	1	0	25.00	23.78	0.113	0.150	
								50	0	24.00	22.82	0.091	0.120	
					Right Touch	132322	1745.0	1	0	25.00	23.78	0.237	0.314	37
								50	0	24.00	22.82	0.184	0.241	
	Right Tilt	132322	1745.0	1	0	25.00	23.78	0.103	0.136					
				50	0	24.00	22.82	0.082	0.108					
	Body-worn	QPSK	Off	15	Rear	132322	1745.0	1	0	25.00	23.78	0.364	0.482	38
								50	0	24.00	22.82	0.283	0.371	
					Front	132322	1745.0	1	0	25.00	23.78	0.358	0.474	
								50	0	24.00	22.82	0.281	0.369	
	Hotspot	QPSK	On	10	Rear	132322	1745.0	1	0	22.00	20.60	0.300	0.414	
								50	0	22.00	20.73	0.302	0.405	
					Front	132322	1745.0	1	0	22.00	20.60	0.291	0.402	
								50	0	22.00	20.73	0.289	0.387	
Edge 3					132322	1745.0	1	0	22.00	20.60	0.379	0.523		
							50	0	22.00	20.73	0.392	0.525	39	
Edge 4					132322	1745.0	1	0	22.00	20.60	0.205	0.283		
							50	0	22.00	20.73	0.210	0.281		

#### Sub Ant.1 SAR results

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
										Tune-up limit	Meas.	Meas.	Scaled					
Sub 1 Ant.	Head	QPSK	N/A	0	Left Touch	132072	1720.0	1	99	19.00	17.41	0.480	0.692	40				
								50	24	18.00	16.50	0.358	0.506					
					Left Tilt	132072	1720.0	1	99	19.00	17.41	0.186	0.268					
								50	24	18.00	16.50	0.126	0.178					
					Right Touch	132072	1720.0	1	99	19.00	17.41	0.182	0.262					
								50	24	18.00	16.50	0.126	0.178					
					Right Tilt	132072	1720.0	1	99	19.00	17.41	0.149	0.215					
								50	24	18.00	16.50	0.101	0.143					
					Body-worn	QPSK	N/A	15	Rear	132072	1720.0	1	99	19.00	17.41	0.046	0.066	41
												50	24	18.00	16.50	0.029	0.041	
									Front	132072	1720.0	1	99	19.00	17.41	0.038	0.055	
												50	24	18.00	16.50	0.025	0.035	
	Hotspot	QPSK	N/A	10					Rear	132072	1720.0	1	99	19.00	17.41	0.146	0.211	42
												50	24	18.00	16.50	0.106	0.150	
					Front	132072	1720.0	1	99	19.00	17.41	0.073	0.105					
								50	24	18.00	16.50	0.051	0.072					
					Edge 3	132072	1720.0	1	99	19.00	17.41	0.046	0.066					
								50	24	18.00	16.50	0.028	0.040					
Edge 4	132072	1720.0	1	99	19.00	17.41	0.070	0.101										
			50	24	18.00	16.50	0.055	0.078										

**Note(s):**

- For LTE Band 66 of Sub Ant.1., It work only EN-DC scenarios.

### 10.13. NR Band n5 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Modulation	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
											Tune-up limit	Meas.	Meas.	Scaled					
Main 1 Ant.	Head	DFT-s-OFDM	QPSK	N/A	0	Left Touch	167300	836.5	1	53	24.00	23.68	0.220	0.237					
									50	28	24.00	23.81	0.227	0.237					
						Left Tilt	167300	836.5	1	53	24.00	23.68	0.132	0.142					
									50	28	24.00	23.81	0.141	0.147					
						Right Touch	167300	836.5	1	53	24.00	23.68	0.243	0.262	43				
									50	28	24.00	23.81	0.248	0.259					
						Right Tilt	167300	836.5	1	53	24.00	23.68	0.145	0.156					
									50	28	24.00	23.81	0.146	0.153					
						CP-OFDM	QPSK	N/A	0	Right Touch	167300	836.5	1	1	22.50	22.15	0.146	0.158	
						Body-worn	DFT-s-OFDM	QPSK	N/A	15	Rear	167300	836.5	1	53	24.00	23.68	0.279	0.300
	50	28	24.00	23.81	0.272									0.284					
	Front	167300	836.5	1	53						24.00	23.68	0.151	0.163					
				50	28						24.00	23.81	0.154	0.161					
	CP-OFDM	QPSK	N/A	15	Rear		167300	836.5	1	1	22.50	22.15	0.194	0.210					
	Hotspot	DFT-s-OFDM	QPSK	N/A	10		Rear	167300	836.5	1	53	24.00	23.68	0.594	0.639	45			
						50				28	24.00	23.81	0.588	0.614					
						Front				167300	836.5	1	53	24.00	23.68		0.150	0.161	
												50	28	24.00	23.81		0.147	0.154	
						Edge 2	167300	836.5	1	53	24.00	23.68	0.334	0.360					
									50	28	24.00	23.81	0.333	0.348					
						Edge 3	167300	836.5	1	53	24.00	23.68	0.282	0.304					
									50	28	24.00	23.81	0.375	0.392					
						Edge 4	167300	836.5	1	53	24.00	23.68	0.198	0.213					
									50	28	24.00	23.81	0.197	0.206					
CP-OFDM						QPSK	N/A	10	Rear	167300	836.5	1	1	22.50	22.15	0.428	0.464		

### 10.14. NR Band n66 (20MHz Bandwidth)

#### Main Ant.2 SAR results

Antenna	RF Exposure Conditions	Modulation	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
											Tune-up limit	Meas.	Meas.	Scaled					
Main 2 Ant.	Head	DFT-s-OFDM	QPSK	N/A	0	Left Touch	354000	1770.0	1	104	24.5	24.4	0.161	0.165	46				
									50	28	24.5	24.1	0.162	0.178					
						Left Tilt	354000	1770.0	1	104	24.5	24.4	0.124	0.127					
									50	28	24.5	24.1	0.110	0.121					
						Right Touch	354000	1770.0	1	104	24.5	24.4	0.156	0.160					
									50	28	24.5	24.1	0.152	0.167					
						Right Tilt	354000	1770.0	1	104	24.5	24.4	0.086	0.088					
									50	28	24.5	24.1	0.009	0.010					
						CP-OFDM	QPSK	N/A	0	Left Touch	354000	1770.0	1	1	23.0	22.6	0.110	0.121	
						Body-worn	DFT-s-OFDM	QPSK	N/A	15	Rear	354000	1770.0	1	104	24.5	24.4	0.306	0.313
	50	28	24.5	24.1	0.323									0.356					
	Front	354000	1770.0	1	104						24.5	24.4	0.263	0.269					
				50	28						24.5	24.1	0.265	0.292					
	CP-OFDM	QPSK	N/A	15	Rear		354000	1770.0	1	1	23.0	22.6	0.221	0.244					
	Hotspot	DFT-s-OFDM	QPSK	N/A	10		Rear	354000	1770.0	1	104	24.5	24.4	0.717	0.734	48			
						50				28	24.5	24.1	0.678	0.747					
						Front				354000	1770.0	1	104	24.5	24.4		0.461	0.472	
												50	28	24.5	24.1		0.471	0.519	
						Edge 3	354000	1770.0	1	104	24.5	24.4	0.701	0.717					
									50	28	24.5	24.1	0.604	0.665					
						Edge 4	354000	1770.0	1	104	24.5	24.4	0.462	0.473					
									50	28	24.5	24.1	0.461	0.508					
						CP-OFDM	QPSK	N/A	10	Rear	354000	1770.0	1	1	23.0	22.6	0.386	0.426	

**Note(s):**

1. CP-OFDM mode were evaluated at worst configuration of DFT-s-OFDM in each exposure conditions.

**Sub Ant.1 SAR results**

Antenna	RF Exposure Conditions	Modulation	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
											Tune-up limit	Meas.	Meas.	Scaled	
Sub 1 Ant.	Head	DFT-s-OFDM	QPSK	On	0	Left Touch	354000	1770.0	1	53	18.0	16.6	0.478	0.657	49
									50	28	18.0	16.7	0.525	0.716	
						Left Tilt	354000	1770.0	1	53	18.0	16.6	0.419	0.576	
									50	28	18.0	16.7	0.443	0.605	
		Right Touch	354000	1770.0	1	53	18.0	16.6	0.272	0.374					
					50	28	18.0	16.7	0.276	0.377					
		Right Tilt	354000	1770.0	1	53	18.0	16.6	0.266	0.365					
					50	28	18.0	16.7	0.272	0.371					
	CP-OFDM	QPSK	On	0	Left Touch	354000	1770.0	1	1	18.0	16.2	0.422	0.645		
	Body-worn	DFT-s-OFDM	QPSK	Off	15	Rear	354000	1770.0	1	53	24.0	22.6	0.145	0.201	50
						50	28	24.0	22.7	0.146	0.198				
		Front	354000	1770.0	1	53	24.0	22.6	0.134	0.185					
					50	28	24.0	22.7	0.137	0.186					
	CP-OFDM	QPSK	Off	15	Rear	354000	1770.0	1	1	22.5	20.6	0.117	0.182		
	Hotspot	DFT-s-OFDM	QPSK	On	10	Rear	354000	1770.0	1	53	22.0	20.7	0.465	0.626	51
									50	28	22.0	20.8	0.481	0.631	
						Front	354000	1770.0	1	53	22.0	20.7	0.310	0.417	
									50	28	22.0	20.8	0.318	0.417	
		Edge 1	354000	1770.0	1	53	22.0	20.7	0.209	0.281					
					50	28	22.0	20.8	0.203	0.266					
Edge 2		354000	1770.0	1	53	22.0	20.7	0.270	0.363						
				50	28	22.0	20.8	0.269	0.353						
CP-OFDM	QPSK	On	10	Rear	354000	1770.0	1	1	22.0	20.1	0.275	0.422			

**Note(s):**

1. CP-OFDM mode were evaluated at worst configuration of DFT-s-OFDM in each exposure conditions.
2. For NR Band n66 of Sub Ant.1., It work only EN-DC scenarios

**10.15. Wi-Fi (DTS Band)**

**WLAN SAR results**

Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled		
802.11b 1 Mbps	Head	On	0	Left Touch	11	2462.0	98.9%	12.00	11.82	0.128	0.135		
				Left Tilt	11	2462.0	98.9%	12.00	11.82	0.147	0.155		
				Right Touch	11	2462.0	98.9%	12.00	11.82	0.174	0.183		52
				Right Tilt	11	2462.0	98.9%	12.00	11.82	0.167	0.176		
	Body-worn	Off	15	Rear	6	2437.0	98.9%	20.00	19.45	0.205	0.235		53
				Front	6	2437.0	98.9%	20.00	19.45	0.055	0.063		
	Hotspot	Off	10	Rear	6	2437.0	98.9%	20.00	19.45	0.285	0.327		54
				Front	6	2437.0	98.9%	20.00	19.45	0.106	0.122		
				Edge 1	6	2437.0	98.9%	20.00	19.45	0.158	0.181		
				Edge 4	6	2437.0	98.9%	20.00	19.45	0.078	0.090		

**Note(s):**

1. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Orange box is the highest SAR value in each exposure conditions.

### 10.16. Wi-Fi (U-NII Bands)

#### U-NII 2A Results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.				
											Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled						
WLAN Ant	5.3 GHz U-NII 2A	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	58	5290.0	0.172	98.3%	11.00	10.08										
						Left Tilt	58	5290.0	0.176	98.3%	11.00	10.08										
						Right Touch	58	5290.0	0.174	98.3%	11.00	10.08										
						Right Tilt	58	5290.0	0.203	98.3%	11.00	10.08	0.161	0.202					1	55		
		802.11a 6 Mbps	Body-worn	Off	15	Rear	52	5260.0	0.522	98.7%	16.00	15.51	0.409	0.464						56		
						Front	52	5260.0	0.357	98.7%	16.00	15.51	0.112	0.127						2		
			Product Specific 10-g	Off	0	Rear	52	5260.0	5.840	98.7%	16.00	15.51				1.060	1.203			57		
						Front	52	5260.0	1.100	98.7%	16.00	15.51										
	Edge 1	52	5260.0	5.790	98.7%	16.00	15.51							1.040	1.180			2				
								Edge 4	52	5260.0	1.610	98.7%	16.00	15.51								

#### U-NII 2C Results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.			
											Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled					
WLAN Ant	5.5 GHz U-NII 2C	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	106	5530.0	0.020	98.3%	11.00	10.59									
						Left Tilt	106	5530.0	0.057	98.3%	11.00	10.59									
						Right Touch	106	5530.0	0.051	98.3%	11.00	10.59									
						Right Tilt	106	5530.0	0.203	98.3%	11.00	10.59	0.184	0.206					1	58	
		802.11a 6 Mbps	Body-worn	Off	15	Rear	124	5620.0	0.339	98.7%	16.00	15.52	0.253	0.286					1	59	
						Front	124	5620.0	0.258	98.7%	16.00	15.52									
			Product Specific 10-g	Off	0	Rear	124	5620.0	7.690	98.7%	16.00	15.52				1.430	1.619			2	
						Front	124	5620.0	1.900	98.7%	16.00	15.52									
	Edge 1	124	5620.0	9.680	98.7%	16.00	15.52						1.740	1.970			60				
	Edge 4	124	5620.0	2.880	98.7%	16.00	15.52														

#### U-NII 3 Results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.			
											Tune-up limit	Meas.	Meas.	Scaled					
WLAN Ant	5.8 GHz U-NII 3	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	155	5775.0	0.210	98.3%	11.00	10.39							
						Left Tilt	155	5775.0	0.284	98.3%	11.00	10.39	0.175	0.205			1	61	
						Right Touch	155	5775.0	0.151	98.3%	11.00	10.39							
						Right Tilt	155	5775.0	0.241	98.3%	11.00	10.39							
		802.11a 6 Mbps	Body-worn	Off	15	Rear	157	5785.0	0.364	98.7%	16.00	15.64	0.259	0.285			1	62	
						Front	157	5785.0	0.262	98.7%	16.00	15.64							
			Hotspot	Off	10	Rear	149	5745.0	0.608	98.7%	16.00	15.29	0.412	0.492			2		
						Front	149	5745.0	0.322	98.7%	16.00	15.29	0.243	0.290			3		
	Edge 1	149	5745.0	0.702	98.7%	16.00	15.29	0.529	0.631					63					
	Edge 4	149	5745.0	0.187	98.7%	16.00	15.29												

**Note(s):**

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
4. Orange box is the highest SAR value in each exposure conditions.

**10.17. Bluetooth**

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	GFSK	Head	N/A	0	Left Touch	78	2480.0	76.8%	18.00	17.77	0.228	0.313	
					Left Tilt	78	2480.0	76.8%	18.00	17.77	0.281	0.386	
					Right Touch	78	2480.0	76.8%	18.00	17.77	0.316	0.434	64
					Right Tilt	78	2480.0	76.8%	18.00	17.77	0.314	0.431	
	GFSK	Body-worn	N/A	15	Rear	78	2480.0	76.8%	18.00	17.77	0.110	0.151	65
					Front	78	2480.0	76.8%	18.00	17.77	0.039	0.054	
	GFSK	Hotspot	N/A	10	Rear	78	2480.0	76.8%	18.00	17.77	0.233	0.320	66
					Front	78	2480.0	76.8%	18.00	17.77	0.073	0.100	
					Edge 1	78	2480.0	76.8%	18.00	17.77	0.114	0.157	
					Edge 4	78	2480.0	76.8%	18.00	17.77	0.048	0.066	

**Note(s):**

Orange box is the highest SAR value in each exposure conditions.

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <math><0.8</math> or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
835	GSM850	Hotspot	Rear	Yes	1.060	1.060	1.00

### Note(s):

1. In above table, Only some bands above 0.8 or 2.0 (1-g or 10-g Measured SAR) were listed
2. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$



## 12. Simultaneous Transmission SAR Analysis

### Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations			
Head & Body-w orn & Hotspot & Phablet-10g	1	WWAN (2G/3G/LTE/NR)	+	DTS	Scenarios
	2	WWAN (2G/3G/LTE/NR)	+	UNII	
	3	WWAN (2G/3G/LTE/NR)	+	BT	
	4	WWAN (2G/3G/LTE/NR)	+	UNII + BT	
	5	WWAN (ENDC(LTE+NR))	+	DTS	
	6	WWAN (ENDC(LTE+NR))	+	UNII	
	7	WWAN (ENDC(LTE+NR))	+	BT	
	8	WWAN (ENDC(LTE+NR))	+	UNII + BT	

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. U-NII supports Wi-Fi Direct, Hotspot and VoIP.
3. GPRS, W-CDMA, LTE, NR supports Hotspot and VoIP
4. U-NII Radio can transmit simultaneously with Bluetooth Radio.
5. DTS Radio cannot transmit simultaneously with UNII Radio.
6. DTS Radio cannot transmit simultaneously with Bluetooth Radio.
7. BT tethering is considered about each RF exposure conditions.
8. NR Radio support to both SA and NSA (ENDC) Radio.

### Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

#### Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

## SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

**SAR<sub>1</sub>** is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**R<sub>i</sub>** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine **SAR<sub>1</sub>** or **SAR<sub>2</sub>**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

The antennas for the unlicensed transmitters are closely situated. As a result, the associated SAR hotspots are also closely situated. Some of the sum of SAR calculations yielded results over 1.6 W/kg. The SPLSR calculations for these situations were performed by treating the unlicensed SAR values as a single transmitter. The most conservative distance between all the unlicensed hotspots to the licensed hotspot was used for the value of *d* in the SPLSR calculation.

## Sum-Peak Location Separation Ratio (SPLSR)

Per April 2022 TCB Workshop Notes, Sum-Peak Location Separation Ratio (SPLSR) procedure can be applied to evaluate to simultaneous transmission SAR analysis.

Sum-Peak Location Separation Ratio (SPLSR) can be applied when Simultaneous transmission SAR is over 1.6 or 4.0 W/kg (1-g or 10-g respectively), it can algebraically sum the SAR values of the co-located pair and use that value in SPLSR calculation.

The minimum distance between the nearest antennas of the pair of antennas in the same position as the spatially separated antennas shall be conservatively calculated.

### Test procedure

**Step.1** Sum zoom scan values on the co-located antenna pair.

**Step.2** Apply PLSR procedure for the spatially separated antenna and aggregate SAR distribution of the co-located antenna pair's sum SAR and minimum distance are used for SPLSR calculation.

### 12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.300	0.183	0.206	0.434	0.483	0.506	0.734	0.940
Body-Worn (1-g SAR)	All position	0.480	0.235	0.464	0.151	0.716	0.944	0.631	1.095
Hotspot (1-g SAR)	Rear	1.100	0.327	0.492	0.320	1.427	1.592	1.420	1.912
	Front	0.215	0.122	0.290	0.100	0.336	0.505	0.315	0.605
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.389							
	Edge 3	0.520							
Product Specific 10-g (10-g SAR)	All position			1.970					

**SAR to Peak Location Separation Ratio (SPLSR)**

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg) (1-g or 10-g)	Calculated Distance (mm)	1-g SPLSR (= < 0.04) or 10-g SPLSR (= < 0.10)	Volume Scan (Yes/No)	Figure	
		WWAN	DTS	UNII	BT						
		1	2	3	4						
Hotspot (1-g SAR)	Rear	1.100		0.492	0.320	1+3+4	1.912			1	
		1.100		0.492		1+3	1.592	167.9	0.01		No
		1.100			0.320	1+4	1.420	161.3	0.01		No
				0.492	0.320	3+4	0.812	17.2	0.04		No

### 12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.191	0.183	0.206	0.434	0.375	0.397	0.625	0.831
Body-Worn (1-g SAR)	All position	0.295	0.235	0.464	0.151	0.531	0.759	0.446	0.910
Hotspot (1-g SAR)	Rear	0.433	0.327	0.492	0.320	0.760	0.925	0.753	1.245
	Front	0.303	0.122	0.290	0.100	0.424	0.593	0.403	0.693
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.412							
Product Specific 10-g (10-g SAR)	All position			1.970					

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

### 12.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.245	0.183	0.206	0.434	0.428	0.451	0.679	0.885
Body-Worn (1-g SAR)	All position	0.504	0.235	0.464	0.151	0.739	0.968	0.655	1.119
Hotspot (1-g SAR)	Rear	0.473	0.327	0.492	0.320	0.801	0.965	0.793	1.285
	Front	0.369	0.122	0.290	0.100	0.491	0.659	0.469	0.759
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.443							
Edge 4	0.279	0.090	0.631	0.066	0.368	0.910	0.345	0.976	
Product Specific 10-g (10-g SAR)	All position			1.970					

### 12.4. Sum of the SAR for WCDMA Band IV & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.249	0.183	0.206	0.434	0.433	0.456	0.683	0.890
Body-Worn (1-g SAR)	All position	0.500	0.235	0.464	0.151	0.736	0.964	0.651	1.115
Hotspot (1-g SAR)	Rear	0.402	0.327	0.492	0.320	0.729	0.894	0.722	1.214
	Front	0.344	0.122	0.290	0.100	0.466	0.634	0.445	0.735
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.499							
Edge 4	0.257	0.090	0.631	0.066	0.347	0.889	0.323	0.955	
Product Specific 10-g (10-g SAR)	All position			1.970					

### 12.5. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.286	0.183	0.206	0.434	0.469	0.492	0.720	0.926
Body-Worn (1-g SAR)	All position	0.435	0.235	0.464	0.151	0.670	0.899	0.586	1.050
Hotspot (1-g SAR)	Rear	0.711	0.327	0.492	0.320	1.038	1.203	1.031	1.523
	Front	0.224	0.122	0.290	0.100	0.346	0.514	0.325	0.615
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.416							
	Edge 3	0.393							
Edge 4	0.236	0.090	0.631	0.066	0.325	0.867	0.302	0.933	
Product Specific 10-g (10-g SAR)	All position			1.970					

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

### 12.6. Sum of the SAR for LTE Band 2 (Main 2 Ant.)& Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.283	0.183	0.206	0.434	0.466	0.489	0.717	0.923
Body-Worn (1-g SAR)	All position	0.522	0.235	0.464	0.151	0.757	0.986	0.673	1.137
Hotspot (1-g SAR)	Rear	0.702	0.327	0.492	0.320	1.029	1.194	1.022	1.514
	Front	0.491	0.122	0.290	0.100	0.612	0.781	0.591	0.881
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.565							
	Edge 4	0.291	0.090	0.631	0.066	0.381	0.923	0.357	0.989
Product Specific 10-g (10-g SAR)	All position			1.970					

### 12.7. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.291	0.183	0.206	0.434	0.474	0.497	0.725	0.931
Body-Worn (1-g SAR)	All position	0.450	0.235	0.464	0.151	0.685	0.914	0.601	1.065
Hotspot (1-g SAR)	Rear	0.761	0.327	0.492	0.320	1.088	1.252	1.081	1.572
	Front	0.245	0.122	0.290	0.100	0.367	0.535	0.345	0.635
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.411							
	Edge 3	0.490							
	Edge 4	0.225	0.090	0.631	0.066	0.314	0.856	0.291	0.922
Product Specific 10-g (10-g SAR)	All position			1.970					

### 12.8. Sum of the SAR for LTE Band 12 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.123	0.183	0.206	0.434	0.306	0.329	0.557	0.763
Body-Worn (1-g SAR)	All position	0.274	0.235	0.464	0.151	0.509	0.738	0.425	0.889
Hotspot (1-g SAR)	Rear	0.242	0.327	0.492	0.320	0.569	0.733	0.562	1.053
	Front	0.136	0.122	0.290	0.100	0.258	0.426	0.237	0.527
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.242							
	Edge 3	0.112							
	Edge 4	0.132	0.090	0.631	0.066	0.221	0.763	0.198	0.829
Product Specific 10-g (10-g SAR)	All position			1.970					

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

### 12.9. Sum of the SAR for LTE Band 13 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.235	0.183	0.206	0.434	0.419	0.441	0.669	0.875
Body-Worn (1-g SAR)	All position	0.411	0.235	0.490	0.151	0.646	0.901	0.562	1.052
Hotspot (1-g SAR)	Rear	0.538	0.327	0.492	0.320	0.865	1.029	0.858	1.349
	Front	0.245	0.122	0.290	0.100	0.367	0.535	0.345	0.635
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.413							
	Edge 3	0.131							
	Edge 4	0.218	0.090	0.631	0.066	0.307	0.849	0.284	0.915
Product Specific 10-g (10-g SAR)	All position			1.970					

### 12.10. Sum of the SAR for LTE Band 26 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.291	0.183	0.206	0.434	0.475	0.497	0.725	0.931
Body-Worn (1-g SAR)	All position	0.417	0.235	0.464	0.151	0.652	0.881	0.568	1.032
Hotspot (1-g SAR)	Rear	0.672	0.327	0.492	0.320	0.999	1.164	0.992	1.484
	Front	0.217	0.122	0.290	0.100	0.338	0.507	0.317	0.607
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.396							
	Edge 3	0.196							
	Edge 4	0.405	0.090	0.631	0.066	0.495	1.037	0.471	1.103
Product Specific 10-g (10-g SAR)	All position			1.970					

### 12.11. Sum of the SAR for LTE Band 41 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.217	0.183	0.206	0.434	0.400	0.423	0.651	0.857
Body-Worn (1-g SAR)	All position	0.370	0.235	0.464	0.151	0.605	0.834	0.521	0.985
Hotspot (1-g SAR)	Rear	0.775	0.327	0.492	0.320	1.102	1.267	1.095	1.587
	Front	0.475	0.122	0.290	0.100	0.596	0.765	0.575	0.865
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.533							
	Edge 4	0.214	0.090	0.631	0.066	0.304	0.846	0.280	0.912
Product Specific 10-g (10-g SAR)	All position			1.970					

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

**12.12. Sum of the SAR for LTE Band 66 (Main 2 Ant.) & Wi-Fi & BT**

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.314	0.183	0.206	0.434	0.497	0.520	0.748	0.954
Body-Worn (1-g SAR)	All position	0.482	0.235	0.464	0.151	0.717	0.946	0.633	1.097
Hotspot (1-g SAR)	Rear	0.414	0.327	0.492	0.320	0.741	0.906	0.734	1.226
	Front	0.402	0.122	0.290	0.100	0.523	0.692	0.502	0.792
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.525							
	Edge 4	0.283	0.090	0.631	0.066	0.373	0.914	0.349	0.980
Product Specific 10-g (10-g SAR)	All position			1.970					

**12.13. Sum of the SAR for NR Band n5 & Wi-Fi & BT**

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.262	0.183	0.206	0.434	0.445	0.468	0.696	0.902
Body-Worn (1-g SAR)	All position	0.300	0.235	0.464	0.151	0.536	0.764	0.451	0.915
Hotspot (1-g SAR)	Rear	0.639	0.327	0.492	0.320	0.967	1.131	0.959	1.451
	Front	0.161	0.122	0.290	0.100	0.283	0.451	0.262	0.552
	Edge 1		0.181	0.631	0.157				
	Edge 2	0.360							
	Edge 3	0.392							
	Edge 4	0.213	0.090	0.631	0.066	0.303	0.845	0.279	0.910
Product Specific 10-g (10-g SAR)	All position			1.970					

**12.14. Sum of the SAR for NR Band n66 & Wi-Fi & BT**

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.178	0.183	0.206	0.434	0.362	0.385	0.612	0.819
Body-Worn (1-g SAR)	All position	0.356	0.235	0.464	0.151	0.591	0.820	0.507	0.971
Hotspot (1-g SAR)	Rear	0.747	0.327	0.492	0.320	1.074	1.239	1.067	1.559
	Front	0.519	0.122	0.290	0.100	0.641	0.809	0.619	0.909
	Edge 1		0.181	0.631	0.157				
	Edge 2								
	Edge 3	0.717							
	Edge 4	0.508	0.090	0.631	0.066	0.597	1.139	0.574	1.205
Product Specific 10-g (10-g SAR)	All position			1.970					

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

### 12.15. Sum of the SAR for ENDC(LTE B2 (Sub 1 Ant.) + NR Bn5) & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg)			
		WWAN		DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1-a(LTE)	1-a(NR)	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	Left touch	0.777	0.237	0.135	0.206	0.313	1.149	1.220	1.327	1.533
	Left tilt	0.553	0.147	0.155	0.206	0.386	0.855	0.906	1.086	1.292
	Right touch	0.461	0.262	0.183	0.206	0.434	0.906	0.928	1.156	1.362
	Right tilt	0.383	0.156	0.176	0.206	0.431	0.715	0.745	0.970	1.176
Body-Worn (1-g SAR)	All position	0.140	0.300	0.235	0.464	0.151	0.675	0.904	0.591	1.055
Hotspot (1-g SAR)	Rear	0.277	0.639	0.327	0.492	0.320	1.244	1.408	1.236	1.728
	Front	0.200	0.161	0.122	0.290	0.100	0.483	0.652	0.462	0.752
	Edge 1	0.125		0.181	0.631	0.157	0.306	0.756	0.282	0.913
	Edge 2	0.188	0.360							
	Edge 3		0.392							
Product Specific 10-g (10-g SAR)	All position				1.970					

Sum-Peak Location Separation Ratio

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg) (1-g or 10-g)	Calculated Distance (mm)	1-g SPLSR (=0.04) or 10-g SPPLSR (=0.10)	Volume Scan (Yes/No)	Figure	
		WWAN		DTS	UNII	BT						
		1a	1b	2	3	4						
Hotspot (1-g SAR)	Rear	0.277	0.639		0.492	0.320	1a+1b+3+4	1.728			2	
		0.277	0.639				1a+1b	0.916	149.4	0.01		No
		0.277			0.812		1a+(3+4)	1.089	37.2	0.03		No
			0.639		0.812		1b+(3+4)	1.451	155.3	0.01		No
Sum-Peak Location Separation Ratio					0.812	3+4	0.812					

Note.2

### 12.16. Sum of the SAR for ENDC(LTE B66 (Sub 1 Ant.) + NR Bn5) & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg)			
		WWAN		DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1-a(LTE)	1-a(NR)	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	Left touch	0.692	0.237	0.135	0.206	0.313	1.064	1.135	1.242	1.448
	Left tilt	0.268	0.147	0.155	0.206	0.386	0.571	0.622	0.801	1.007
	Right touch	0.262	0.262	0.183	0.206	0.434	0.707	0.730	0.958	1.164
	Right tilt	0.215	0.156	0.176	0.206	0.431	0.547	0.577	0.802	1.008
Body-Worn (1-g SAR)	All position	0.066	0.300	0.235	0.464	0.151	0.602	0.831	0.518	0.982
Hotspot (1-g SAR)	Rear	0.211	0.639	0.327	0.492	0.320	1.177	1.342	1.170	1.662
	Front	0.105	0.161	0.122	0.290	0.100	0.388	0.557	0.367	0.657
	Edge 1	0.066		0.181	0.631	0.157	0.248	0.698	0.223	0.854
	Edge 2	0.101	0.360							
	Edge 3		0.392							
Product Specific 10-g (10-g SAR)	All position				1.970					

Sum-Peak Location Separation Ratio

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg) (1-g or 10-g)	Calculated Distance (mm)	1-g SPLSR (=0.04) or 10-g SPPLSR (=0.10)	Volume Scan (Yes/No)	Figure	
		WWAN		DTS	UNII	BT						
		1a	1b	2	3	4						
Hotspot (1-g SAR)	Rear	0.211	0.639		0.492	0.320	1a+1b+3+4	1.662			3	
		0.211	0.639				1a+1b	0.850	144.5	0.01		No
		0.211			0.812		1a+(3+4)	1.023	42.4	0.02		No
			0.639		0.812		1b+(3+4)	1.451	155.3	0.01		No
Sum-Peak Location Separation Ratio					0.812	3+4	0.812					

Note.2

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.
- According to 2022 Apr TCBC Workshop, SPLSR (Sum-Peak Location Separation Ratio) can algebraically sum the SAR values of the co-located pair and use that value in SPLSR calculation. Use the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.



### 12.17. Sum of the SAR for ENDC(LTE B5 + NR Bn66 (Sub 1 Ant.)) & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg)			
		WWAN		DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1-a(LTE)	1-a(NR)	2	3	4	1+2	1+3	1+4	1+3+4
Head (1-g SAR)	Left touch	0.243	0.716	0.135	0.206	0.313	1.094	1.165	1.272	1.478
	Left tilt	0.144	0.605	0.155	0.206	0.386	0.904	0.955	1.135	1.341
	Right touch	0.291	0.377	0.183	0.206	0.434	0.851	0.874	1.102	1.308
	Right tilt	0.181	0.371	0.176	0.206	0.431	0.728	0.758	0.983	1.189
Body-Worn (1-g SAR)	All position	0.450	0.201	0.235	0.464	0.151	0.886	1.114	0.801	1.265
Hotspot (1-g SAR)	Rear	0.761	0.631	0.327	0.492	0.320	1.719	1.884	1.712	2.204
	Front	0.245	0.417	0.122	0.290	0.100	0.784	0.952	0.762	1.052
	Edge 1	0.281	0.281	0.181	0.631	0.157				
	Edge 2	0.411	0.092							
	Edge 3	0.490								
	Edge 4	0.225		0.090	0.631	0.066	0.314	0.856	0.291	0.922
Product Specific 10-g (10-g SAR)	All position				1.970					

**Sum-Peak Location Separation Ratio**

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg) (1-g or 10-g)	Calculated Distance (mm)	1-g SPLSR (=<0.04) or 10-g SPLSR (=<0.10)	Volume Scan (Yes/No)	Figure	
		WWAN		DTS	UNII	BT						
		1a	1b	2	3	4						
Hotspot (1-g SAR)	Rear	0.761	0.631	0.327			(1a+1b)+2	1.719			4	
		0.761	0.631				1a+1b	1.392	153.4	0.01		No
		0.761		0.327			1a+2	1.088	161.2	0.01		No
			0.631	0.327			1b+2	0.958	54.2	0.02		No
Hotspot (1-g SAR)	Rear	0.761	0.631		0.492	0.320	(1a+1b)+3+4	2.204			5	
		0.761			0.812		1a+(3+4)	1.573	161.2	0.01		No
			0.631		0.812		1b+(3+4)	1.443	40.1	0.04		No
<b>Sum-Peak Location Separation Ratio</b> <i>Note.2</i>					0.812		3+4	0.812				

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.
- According to 2022 Apr TCBC Workshop, SPLSR (Sum-Peak Location Separation Ratio) can algebraically sum the SAR values of the co-located pair and use that value in SPLSR calculation. Use the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.
- Simultaneous transmission scenarios (1+3 & 1+4) are a subset of (1+3+4) scenario.

### 12.18. Sum of the SAR for ENDC(LTE B2 (Sub 1 Ant.) + NR Bn66) & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg)			
		WWAN		DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1-a(LTE)	1-a(NR)	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	Left touch	0.777	0.178	0.135	0.206	0.313	1.090	1.161	1.268	1.474
	Left tilt	0.553	0.127	0.155	0.206	0.386	0.835	0.886	1.065	1.272
	Right touch	0.461	0.167	0.183	0.206	0.434	0.812	0.834	1.062	1.268
	Right tilt	0.383	0.088	0.176	0.206	0.431	0.647	0.677	0.902	1.108
Body-Worn (1-g SAR)	All position	0.140	0.356	0.235	0.464	0.151	0.731	0.960	0.647	1.111
Hotspot (1-g SAR)	Rear	0.277	0.747	0.327	0.492	0.320	1.351	1.516	1.344	1.836
	Front	0.200	0.519	0.122	0.290	0.100	0.841	1.009	0.819	1.109
	Edge 1	0.125		0.181	0.631	0.157	0.306	0.756	0.282	0.913
	Edge 2	0.188								
	Edge 3		0.717							
Product Specific 10-g (10-g SAR)	All position			0.090	0.631	0.066				

**Sum-Peak Location Separation Ratio**

RF Exposure	Test Position	Standalone SAR (W/kg)					Sum of SAR (W/kg) (1-g or 10-g)	Calculated Distance (mm)	1-g SPLSR (= < 0.04) or 10-g SPPLSR (= < 0.10)	Volume Scan (Yes/No)	Figure	
		WWAN		DTS	UNII	BT						
		1a	1b	2	3	4						
Hotspot (1-g SAR)	Rear	0.277	0.747		0.492	0.320	1a+1b+3+4	1.836			6	
		0.277	0.747				1a+1b	1.024	149.2	0.01		No
		0.277			0.812		1a+(3+4)	1.089	37.2	0.03		No
			0.747		0.812		1b+(3+4)	1.559	142.5	0.01		No
<b>Sum-Peak Location Separation Ratio</b> <i>Note.2</i>					0.812	3+4	0.812					

**Note(s):**

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.
- According to 2022 Apr TCBC Workshop, SPLSR (Sum-Peak Location Separation Ratio) can algebraically sum the SAR values of the co-located pair and use that value in SPLSR calculation. Use the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.

**Conclusion:**

- Simultaneous Transmission SAR analysis results is satisfied the FCC Limit requirement according to procedure with "Sum of SAR" or "Sum-Peak Location Separation Ratio"

Figure (1)

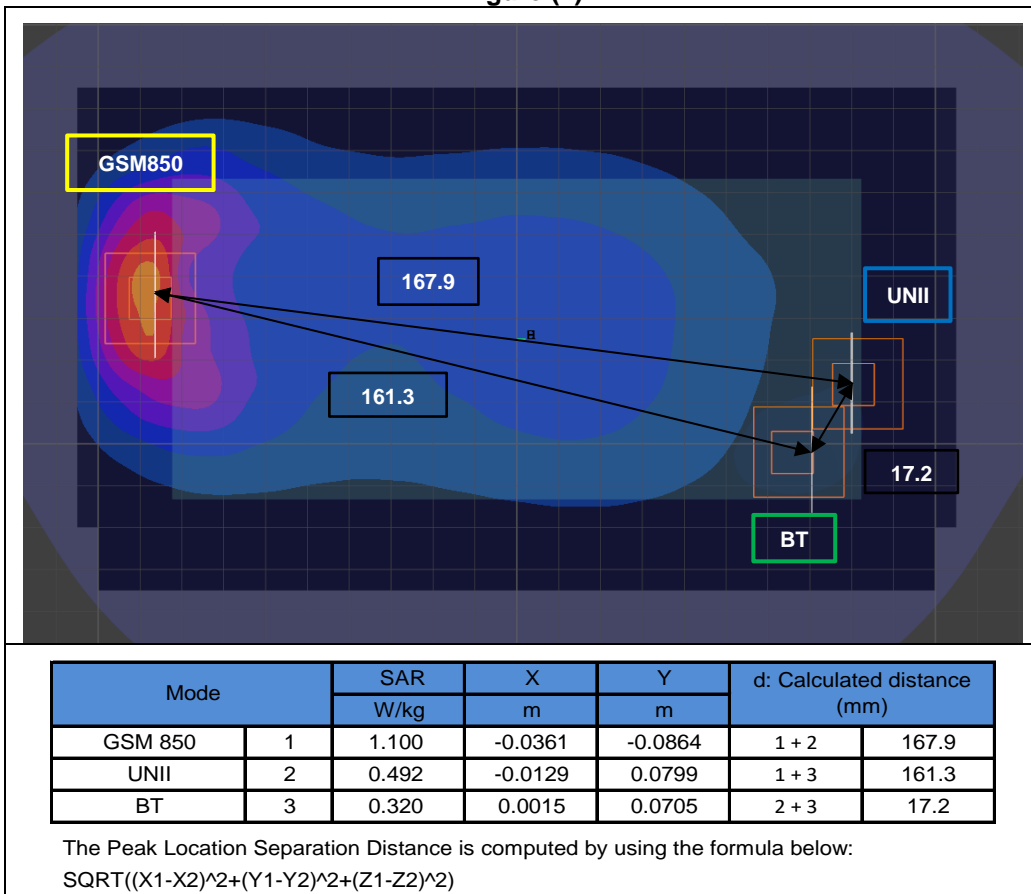


Figure (2)

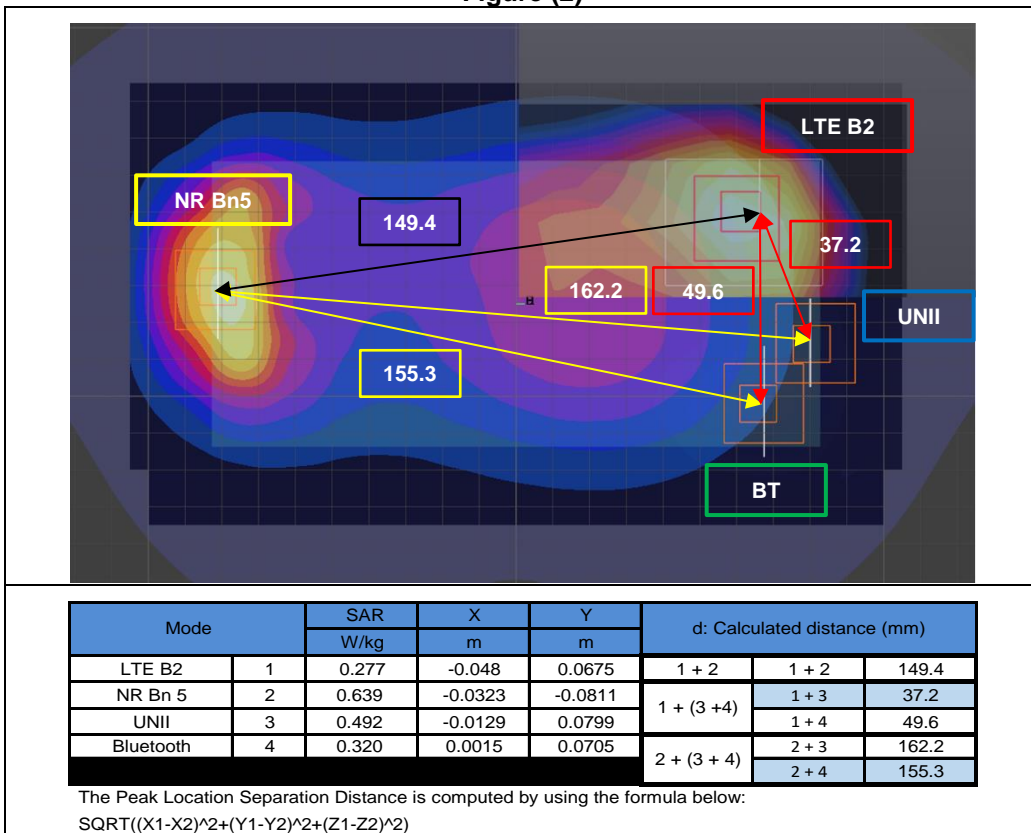


Figure (3)

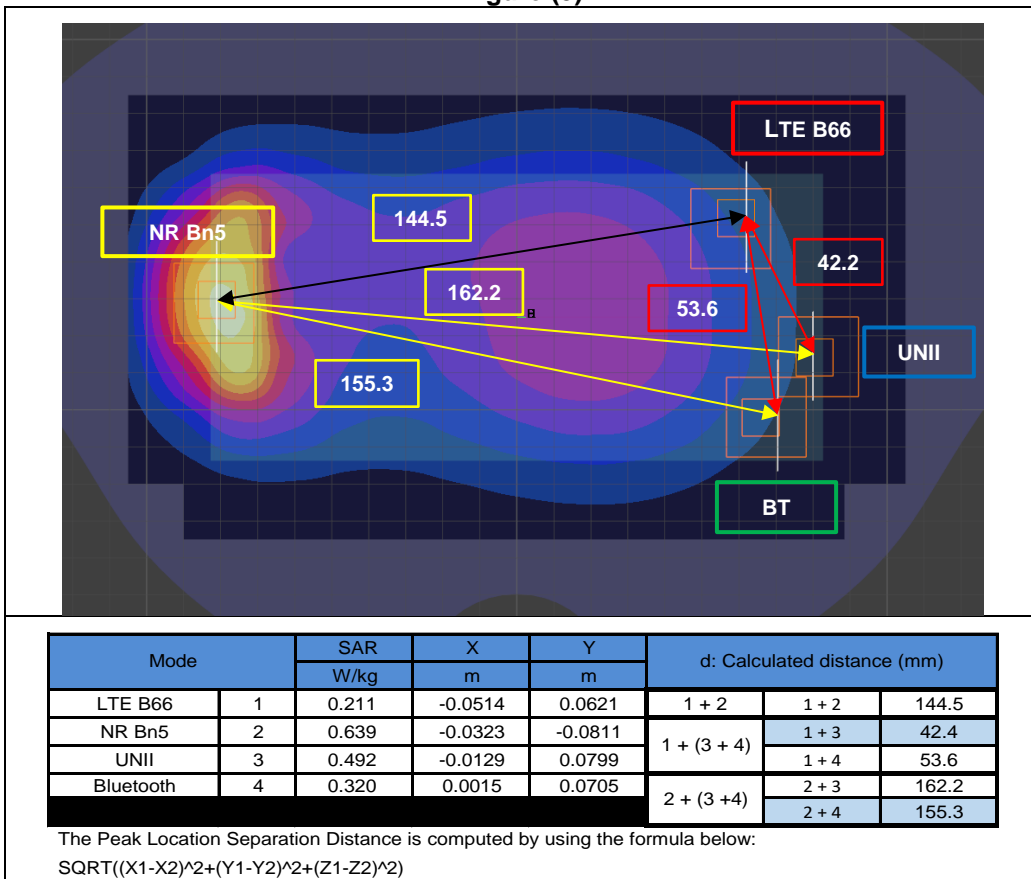


Figure (4)

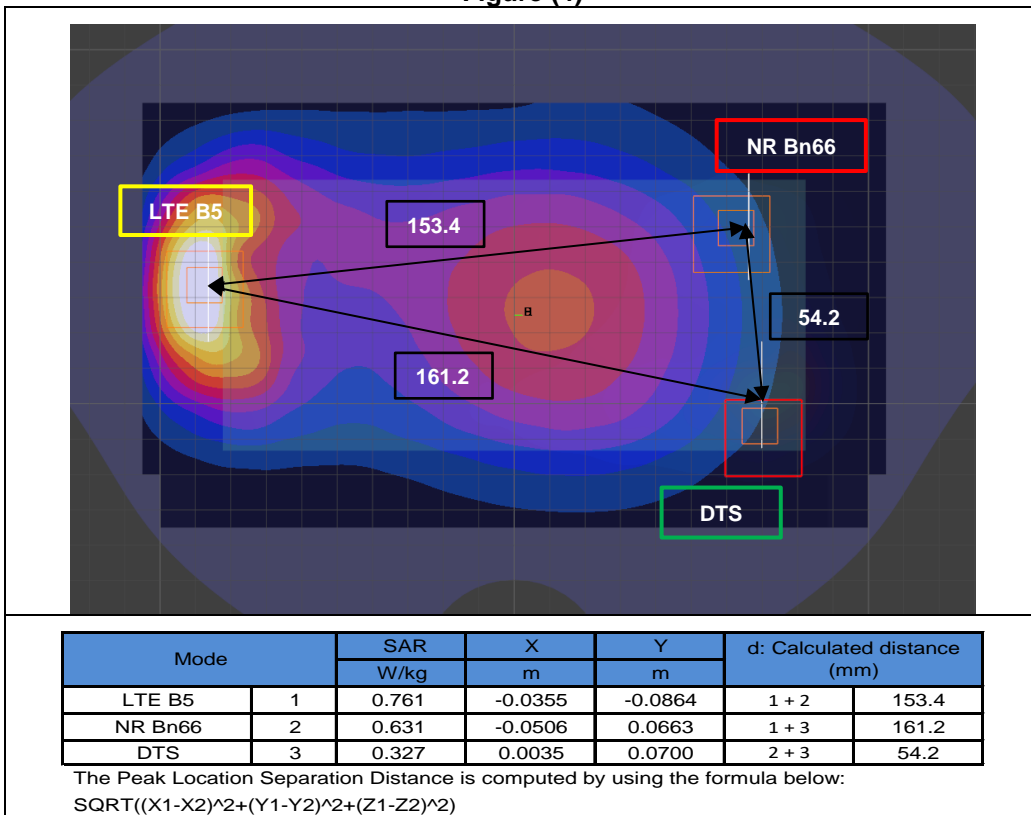


Figure (5)


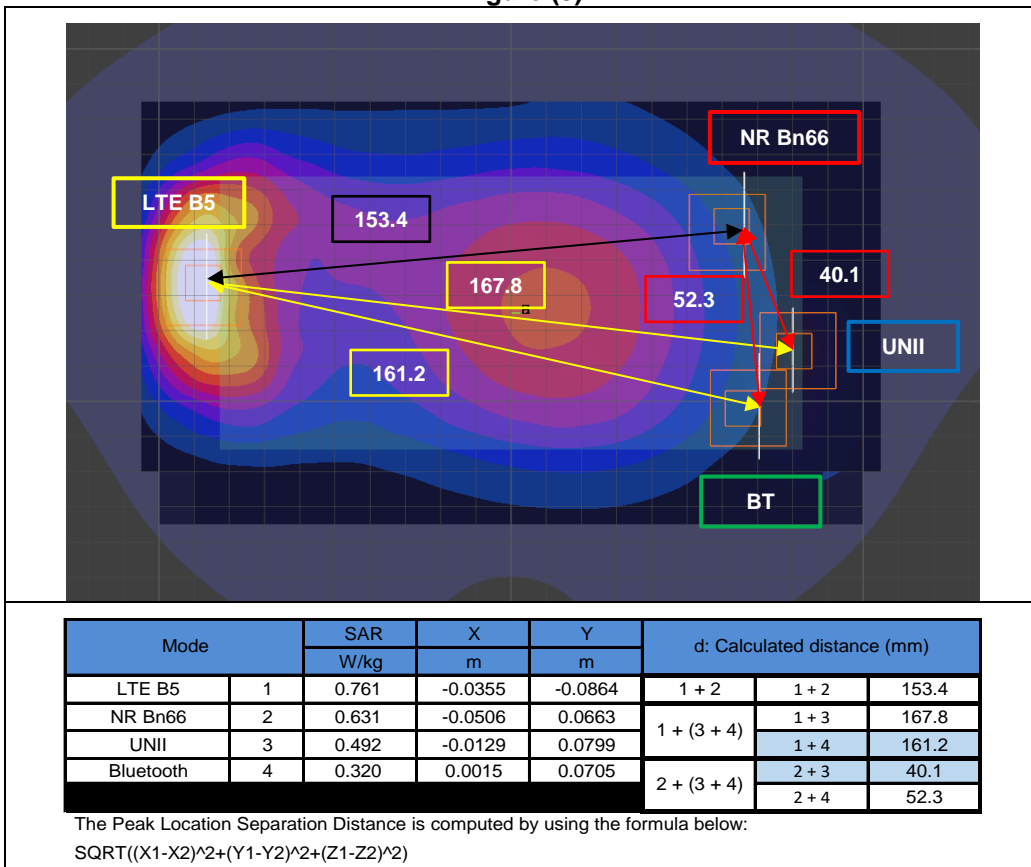


Figure (6)

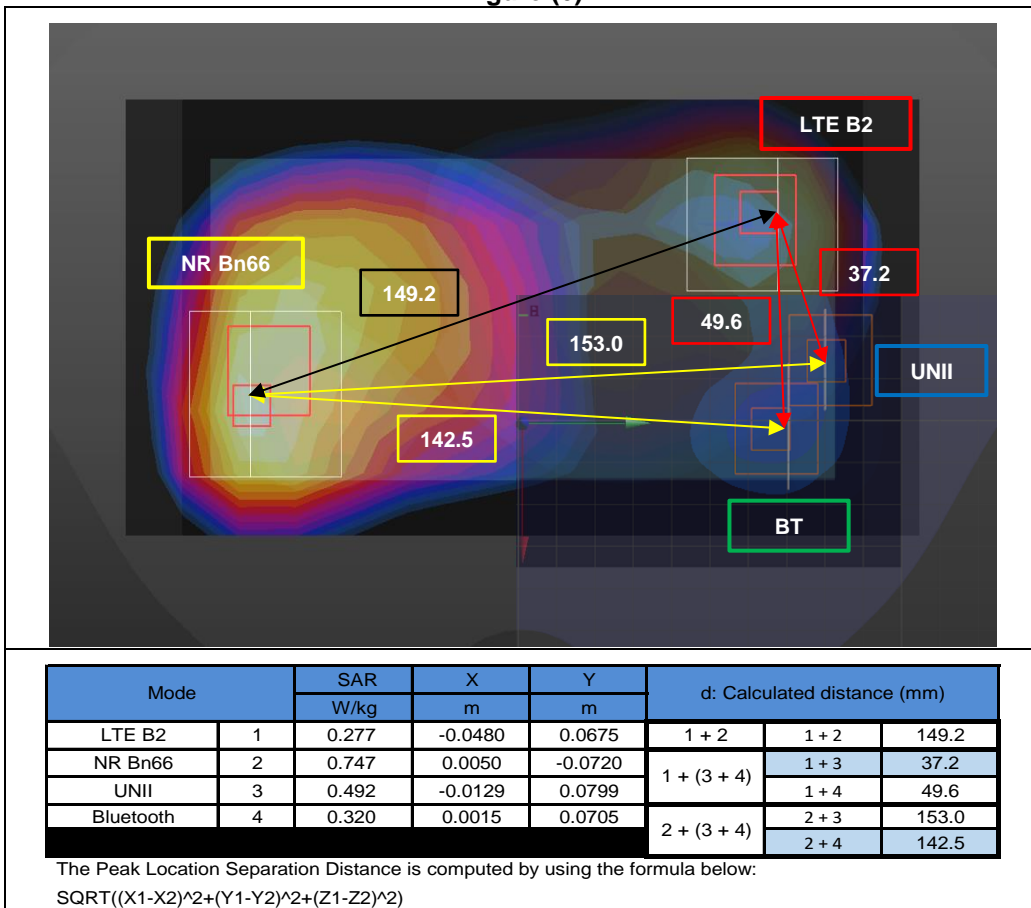

## Appendixes

Refer to separated files for the following appendixes.

4790406782-S1 FCC Report SAR\_App A\_Photos & Ant. Locations

4790406782-S1 FCC Report SAR\_App B\_Highest SAR Test Plots

4790406782-S1 FCC Report SAR\_App C\_System Check Plots

4790406782-S1 FCC Report SAR\_App D\_SAR Tissue Ingredients

4790406782-S1 FCC Report SAR\_App E\_Probe Cal. Certificates

4790406782-S1 FCC Report SAR\_App F\_Dipole Cal. Certificates

4790406782-S1 FCC Report SAR\_App G\_Proximity Sensor feature

4790406782-S1 FCC Report SAR\_App H\_LTE Carrier Aggregation

END OF REPORT