



HCT Co., Ltd.  
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
 Tel. +82 31 634 6300 Fax. +82 31 645 6401

## TAS Validation Report

<b>Applicant Name:</b> <b>SAMSUNG Electronics Co., Ltd.</b> 129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do, 16677 Rep. of Korea	<b>Date of Issue:</b> Oct. 06, 2023 <b>Test Report No.:</b> HCT-SR-2309-FC007-R2 <b>Test Site:</b> HCT CO., LTD.
---	--

**FCC ID:**

**A3LSMA256U**

<b>Equipment Type:</b>	<b>Mobile Phone</b>
<b>Application Type:</b>	<b>Certification</b>
<b>FCC Rule Part(s):</b>	<b>CFR §2.1093</b>
<b>Model name:</b>	<b>SM-A256U</b>
<b>Additional Model Name:</b>	<b>SM-A256U1/DS, SM-S256VL</b>
<b>Date of Test:</b>	<b>Aug. 30, 2023 ~ Sep. 25, 2023</b>
<b>Results:</b>	<b>Pass</b>

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By




---

Byeong-Chul, Yoon  
 Test Engineer  
 SAR Team  
 Certification Division

Reviewed By




---

Yun-leang, Heo  
 Technical Manager  
 SAR Team  
 Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

**REVISION HISTORY**

The revision history for this test report is shown in table.

<b>Revision No.</b>	<b>Date of Issue</b>	<b>Description</b>
0	Sep. 26, 2023	Initial Release
1	Oct. 05, 2023	Revised Sec 5
2	Oct. 06, 2023	Revised Sec 8

This test results were applied only to the test methods required by the standard.

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

## Table of Contents

1. Introduction .....	4
2. Test Result of the DUT .....	6
3. Tx Varying Transmission Test Cases and Test Proposal. ....	7
4. SAR Time Averaging Validation Test Procedures .....	8
5. Test Configurations .....	18
7. Conducted Power Test Results for Sub-6 TAS validation .....	21
8. Conclusions .....	56
9. Equipment List.....	57
10. References .....	58
Appendix A. Test sequence .....	59
Appendix B. Test setup Photo	

## 1. Introduction

This Process of TAS Validation is to demonstrate that the DUT complies with FCC RF exposure compliance requirement under varying Tx power transmission scenarios, thus validation the Samsung S.LSI TAS algorithm feature for FCC equipment authorization of the mobile phone. The value of Plimit used in this report per scenarios are determined.

FCC RF exposure limits are comprised of SAR (Specific Absorption Rate) and limits depending on frequency of operation. Both SAR regulatory specifications are defined over certain measurement duration allowing for time-averaging. The Samsung S.LSI proprietary TAS (Time Average SAR) algorithm has been designed to meet the compliance limits over the required duration, while still allowing dynamic control of transmit power for meeting system performance.

### 1.1 RF Exposure Limits for Frequencies < 6 GHz

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Partial Body)	1.6	8.0
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.4
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.0	20.0

#### NOTES:

- \* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole-body.
- \*\*\* The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

## 1.2 Interim Guidance for Time Averaging

Per October 2018 TCB Workshop Notes, the below time-averaging windows can be used for assessing time-averaged exposures for devices that are capable of actively monitoring and adjusting power output over time to comply with exposure limits.

Interim Guidance	Frequency (GHz)	Maximum Averaging Time (sec)
SAR	< 3	100
	3 – 6	60
MPE	6 - 10	30
	10 - 16	14
	16 – 24	8
	24 – 42	4
	42 – 95	2

## 2. Test Result of the DUT

### 2.1 Measurement Results Summary Table

Test Case #	Test Scenario	Tech	Band	Antenna	RSI	SAR Limit 1g [W/kg]	Max averaged time1g SAR[W/kg]	Test Results	
1-1	Time-varying Tx power transmission	LTE	7	Main 2	3	1.6	0.906	Verified	
1-2		LTE	41	Main 2	3	1.6	0.916	Verified	
1-3		LTE	48	Sub 3	4	1.6	1.009	Verified	
2-1		SA/FR1	25	Main 2	3	1.6	0.985	Verified	
2-2		SA/FR1	41	Main 2	3	1.6	0.986	Verified	
2-3		SA/FR1	48	Sub 3	4	1.6	1.027	Verified	
3-1		LTE	7	Main 2	3	1.6	0.846	Verified	
3-2		LTE	41	Main 2	3	1.6	0.858	Verified	
3-3		LTE	48	Sub 3	4	1.6	0.930	Verified	
4-1		SA/FR1	25	Main 2	3	1.6	0.942	Verified	
4-2		SA/FR1	41	Main 2	3	1.6	0.946	Verified	
4-3		SA/FR1	48	Sub 3	4	1.6	1.002	Verified	
5-1		Change in Call	LTE	7	Main 2	3	1.6	0.884	Verified
5-2			LTE	41	Main 2	3	1.6	0.908	Verified
5-3	LTE		48	Sub 3	4	1.6	1.047	Verified	
6-1	Re-selection	SA/FR1	25	Main 2	3	1.6	0.922	Verified	
		LTE	41	Main 2	3				
6-2		SA/FR1	41	Main 2	3	1.6	1.015	Verified	
		LTE	66	Main 2	3				
6-3		SA/FR1	48	Sub 3	4	1.6	1.007	Verified	
	LTE	48	Sub 3	4					
7-1	SAR exposure switch	LTE	12	Main 1	3	1.6	1.021	Verified	
		NSA/FR1	25	Main 2	3				
7-2		LTE	12	Main 1	3	1.6	0.992	Verified	
		NSA/FR1	41	Main 2	3				
8	RSI Change	SA/FR1	77	Sub 3	3/4	1.6	1.087	Verified	
9	LTE ULCA	LTE	41	Main 2	3	1.6	0.950	Verified	
10-1	WCDMA time varying Tx power	UMTS	2	Main 2	3	1.6	1.061	Verified	
10-2							1.003		
11-1	2G time varying Tx power	2G	GSM 1900	Main 2	3	1.6	0.882	Verified	
11-2							0.845		
12-1	Antenna Switching with Spatial TAS	LTE	7	Main 2	3	1.6	0.971	Verified	
			48	Sub 3	3				
12-2		SA/FR1	41	Main 2	3	1.6	0.977	Verified	
			77	Sub 3	3				
13-1	NSA with Spatial TAS	LTE	66	Main 2	3	1.6	1.001	Verified	
		NSA/FR1	77	Sub 3	3				
13-2		LTE	66	Main 3	3	1.6	1.008	Verified	
		NSA/FR1	41	Main 2	3				
14	NSA antenna switching with Spatial TAS	LTE	12	Main 1	3	1.6	1.045	Verified	
		NSA/FR1	41	Main 2	3				
		NSA/FR1	77	Sub 3	3				

Note : RSI (4) – Reduced-RCV ON, RSI(3) – Reduced-Hotspot Mode ON  
 FCC SAR Limit [W/kg]: 1.6W/kg,1g / Total exposure Limit :1.0

### 3. Tx Varying Transmission Test Cases and Test Proposal.

The following scenarios are covered in this report to demonstrate compliance with FCC RF exposure in Tx-varying transmission conditions.

1. During a time-varying Tx power transmission – to prove that TAS feature accounts for Tx power variations in time accurately.
2. During a call disconnect and re-establish scenario – to prove that the TAS feature accounts for history of Tx power from past accurately
3. During a technology/band handover – to prove that TAS feature accounts for history across transitions in band/technology
4. During RSI (Radio SAR index) change – to prove that TAS feature functions correctly to meet compliance limits across RSI changes
5. During UL CA- to prove that TAS feature can handle adding/removing CC and can handle both single CC and CA

As described in SAR Char.Report, the RF exposure is proportional to the Tx power for FR1. Thus, we rely on conducted power measurements (FR1) dynamic case to demonstrate that overall RF exposure is within the FCC limit.

The overall procedure for validating the test is summarized below:

1. Measure conducted power (FR1) over time, denoted as  $TxPower(t)$ , with time index  $t$
2. Convert measured powers to RF exposure values using linear relationship shown below. In below expression,  $P_{limit,FR1}$  would be the measured power at which FR1 technology meets measured SAR level of  $SAR\_design\_target$  as described in SAR Char Report .

$$SAR(t) = \frac{TxPower(t)}{P_{limit,FR1}} \times SAR\_design\_target$$

Eqn. (1)

3. Compute the average RF exposure over the most recent measurement duration which are denoted as  $T_{SAR}$  for FR1, respectively. These durations are as specified by FCC. This measurement duration interval is then given by  $[t - T_{SAR}, t]$  for FR1, respectively

4. Divide the RF exposure for FR1 by corresponding FCC limits and ensure the sum denoted as TER (total exposure ratio) is less than 1 for all  $t$ . Please refer following to following equations which describe the calculation of TER and its target constraint. The expressions below is general considering a number of FR1 radios in general denoted by  $L_{SAR}$ .

For FR1 transmissions only:

$$\sum_{i_{SAR}=0}^{L_{SAR}-1} \frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t \frac{SAR_{i_{SAR}}}{FCC\ SAR_{limit}} \leq 1$$

## 4. SAR Time Averaging Validation Test Procedures

Test Plan and test procedure for validating Samsung S.LSI TAS algorithm for FR1 scenarios.

### 4.1 Test sequence determination for validation

Two sequences for time varying Tx power are pre-defined as given below for FR1 case.

1. Test sequence A which is generated with one or two levels where one of the levels is maximum power level ( $P_{max}$ ) which is applied at least for 100s. Based on the second level this test sequence is sub-categorized into four different sequences used
  - a. Test Sequence A.i where after  $P_{max}$ , a second level of  $P_{limit}$  is requested till the end of the test
  - b. Test Sequence A.ii where after  $P_{max}$ , a second level of  $P_{max}-3dB$  is requested till the end of the test
  - c. Test Sequence A.iii where after  $P_{max}$ , a second level of  $P_{limit}-3dB$  is requested till the end of the test
  - d. Test Sequence A.iv where only  $P_{max}$  is requested till the end of the test
2. Test Sequence B is generated at multiple power levels that are specified in the Appendix as a function of  $P_{max}$  and  $P_{limit}$ .

### 4.2. Test configuration selection for Validation TAS

This section provides general guidance for selecting test cases in TAS algorithm validation.

#### 4.2.1 Test configuration selection for time-varying Tx power transmission

The Samsung S.LSI TAS algorithm is independent of band, modes or channel of any technology. Hence, we can validate using one or two combinations of band/mode/channel per technology. The criteria for selecting these would be based on the relative value of  $P_{limit}$  and  $P_{max}$  as determined in SAR Char Report. Essentially, we need to pick this combination such that  $P_{limit}$  is less than  $P_{max}$  so that the TAS algorithm will enforce power restriction.

#### 4.2.2 Test configuration selection for change in call

The criteria to select the technology/band for transition between call setup and call drop is to choose the one with least  $P_{limit}$  among all bands. The test is performed with DUT requested power at  $P_{max}$  so that the Samsung S.LSI TAS feature enforces power restriction for longest duration. The call change is performed when the DUT is operating with restricted power. One such test is sufficient since behavior is not dependent on band/technology.

#### 4.2.3 Test configuration for change in technology/band

FCC specifies different measurement durations for time averaging based on operating frequency. The change of operating frequency can result in change of time window for averaging, for e.g. change from 100s averaging for frequency below 3GHz to 60s averaging for frequency above 3GHz in FR1. The criteria for selecting test case to demonstrate compliance across time window change is to pick a technology/band corresponding to each time window such that  $P_{limit}$  is less than  $P_{max}$ . However, to show the performance of the TAS algorithm in this document, the case of low  $P_{limit}$  is considered, which is shown in SAR Char Report.



#### **4.2.4 Test configuration for change in RSI (radio SAR index)**

The criteria for selecting test case to demonstrate compliance across RSI change within a radio. The two RSI states are chosen by pick a technology/band from SAR Char. Report such that  $P_{limit}$  is less than  $P_{max}$  for both states. However, to show the performance of the TAS algorithm in this document, the case of low  $P_{limit}$  is considered, which is shown in Table 7.2.1.

#### **4.2.5 Test configuration for SAR exposure switching**

The criteria for selecting test case is to pick an LTE band and a NR band with  $P_{limit}$  lower than  $P_{max}$  in each case. The test is performed with both RATs connected in an EN-DC scenario. In the first portion of the test, DUT is requested to transmit at maximum power for NR and minimum power for LTE. In the second portion of the test, DUT is requested to transmit at maximum power for both NR and LTE. In the final portion of the test, DUT is requested to transmit at minimum power for NR and maximum power for LTE.

#### **4.2.6 Test configuration for Uplink CA**

The criteria for selecting this test case is to demonstrate the compliance of the TAS algorithm when an LTE transmission is done over multiple CC. This test shows that the TAS algorithm compliance is independent on the Transmission scenarios (single CC or CA).

#### **4.2.7 Test configuration for WCDMA time-varying Tx power**

The criteria of selecting this test configuration is to demonstrate that Samsung S.LSI algorithm is independent on bands or technology used. We will show that the algorithm can control the transmitted power of a WCDMA transmission with varying requested power as in the LTE and NR technologies.

#### **4.2.8 Test configuration for 2G time-varying Tx power**

The criteria of selecting this test configuration is to demonstrate that Samsung S.LSI algorithm is independent on bands or technology used. We will show that the algorithm can control the transmitted power of a 2G transmission with varying requested power as in the LTE and NR technologies.

#### **4.2.9 Test configuration for Spatial TAS**

The criteria of selecting these tests configuration is to demonstrate the compliance of the TAS algorithm while transmitting on multiple antennas with a coupling factor of 0. This spatial TAS algorithm will show that we can achieve enhanced performance based on the antenna coupling while ensuring compliance with FCC target level.

## 4.3 Test procedures for conducted power measurements


This section provides general conducted power measurement procedures to perform compliance test under dynamic scenarios.

### 4.3.1 Time-varying Tx power transmission scenario

This test is performed with two pre-defined test sequences as described in Section 4.1 for all technologies operating on sub-6GHz applying to both LTE and NR. The purpose of the test is to demonstrate the maximum power limiting enforcement and that the time-averaged SAR does not exceed the FCC limit at all times.

#### 4.3.1.1 Test procedure

1. Using the Pmax and Plimit obtained in Table 7.2.1, generate the test sequence of power levels for each selected technology/band. Both test sequences A and B are generated. Maximum power can be changed according to DUT test results.
2. Establish the connection of the DUT to the call box in the selected RAT, with the call box requesting the DUT Tx power to be according to the sequence determined in Step 1. An initial value of Tx power will be set to 0dBm for 100s before the desired test sequence starts to help with post-processing of the time-average value with the very first value in the sequence. This is illustrated in the figure below

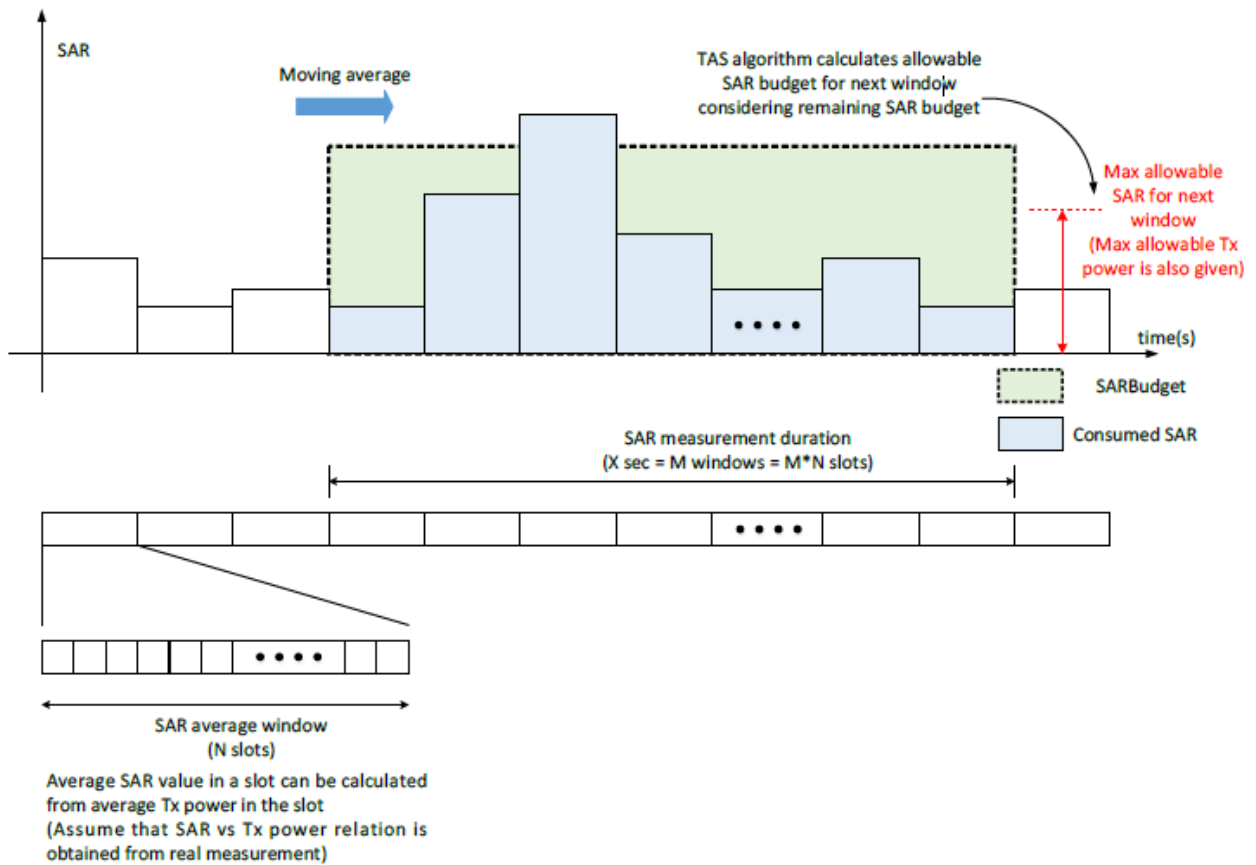

**Figure 4.3-1 SAR measurement from Tx power using block-wise processing**

3. Release connection.
4. After the completion of the test, prepare one plot with the following information:
  - A. Instantaneous Tx power versus time measured in Step 2
  - B. Requested Tx power versus time used in Step 2
  - C. Time-averaged power over 100s using instantaneous values from Step 2
  - D. Power level P<sub>limit</sub> which is determined as meeting SAR target in Table 7.2.1(P<sub>max</sub> P<sub>limit</sub> Table)
5. Make a second plot containing the following information:
  - A. Computed time-averaged 1gSAR versus time determined in Step 2
  - B. b. FCC 1gSAR limit of 1.6W/kg

The pass condition is to demonstrate time-averaged 1gSAR versus time shown in Step 5 value versus time does not exceed the FCC limit of 1.6 W/kg throughout the test duration. We would also demonstrate that time-averaged power does not exceed the P<sub>limit</sub> at any time in the plot in Step 4.

### 4.3.2 Change in call scenario

This test is to demonstrate that Samsung S.LSI TAS feature correctly accounts for past Tx powers during time averaging when a new call is established. The call change has to be carried out when the power limit enforcement is ongoing.

#### 4.3.2.1 Test procedure

1. Establish radio connection of DUT with call box e.g. using LTE technology
2. Configure call box to set DUT Tx power to a low value of -10dBm for 100s.
3. Configure call box to send “ALL UP” power control commands and continue LTE transmission from DUT so that maximum power of Pmax is achieved.
4. After 60s of transmission at Pmax power level, release the call from call box.
5. After 10s, re-establish the LTE connection from call box to DUT and repeat sending “ALL UP” power control command to bring the Tx power to Pmax level again and continue till the end of the test.
6. Release LTE connection.
7. After the completion of the test, prepare one plot with the following information (a) Instantaneous Tx power versus time (b) Requested Tx power versus time (c) Time-averaged power over 100s using instantaneous values and (d) Power level Plimit which is determined as meeting SAR target
8. Make a second plot containing the following information (a) Computed time-averaged 1gSAR versus time and (b) FCC 1gSAR limit of 1.6W/kg.

Pass condition is to demonstrate time-averaged 1gSAR value versus time does not exceed the FCC limit of 1.6 W/kg throughout the test duration. It is required to check if SAR calculation is accounting for call drop and connection. Current TAS algorithm software makes the UE estimate the exact amount of Tx power and average SAR even during call drop and call re-establishment event. The UE stores time information when it goes into a sleep mode and wake-up to calculate Tx power on / off duration.

### 4.3.3 Change in technology/band

This test is to demonstrate that Samsung S.LSI TAS feature can properly handle change of technology/band and consequently time window as necessary during handover scenarios. Since both Plimit and window duration can change across bands, we have to use separate equations below for converting Tx power to SAR as well as apply some combined SAR exposure criteria as shown below.

$$SAR_1(t) = \frac{TxPower_1(t)}{P_{limit,1,FR1}} * SAR\_design\_target_1 \quad (4.3-1)$$

$$SAR_2(t) = \frac{TxPower_2(t)}{P_{limit,2,FR1}} * SAR\_design\_target_2 \quad (4.3-2)$$

where  $P_{limit,1,FR1}$  would correspond to measured power at which first technology/band meets measured SAR level of  $SAR\_design\_target_1$  as described in Table 7.2.1 with time-averaging duration of  $T_{1,SAR}$ . Similarly, the quantities  $P_{limit,2,FR1}$ ,  $SAR\_design\_target_2$ ,  $T_{2,SAR}$  are defined for the second technology/band. When first band is chosen below 3GHz, we would have  $T_{1,SAR} = 100s$ , and by choosing second band to be above 3GHz, we would use  $T_{2,SAR} = 60s$ . On the other hand, when first band is chosen above 3GHz and second band below 3GHz, we would use  $T_{1,SAR} = 60s$  and  $T_{2,SAR} = 100s$ .

#### 4.3.4 Test procedure for handover between two TAS RATs

1. Establish radio connection of DUT with call box e.g. using 5G FR1 NR technology
2. Configure call box to set DUT Tx power to a low value of 0dBm for 100s.
3. Configure call box to send "ALL UP" power control commands and continue NR transmission from DUT so that maximum power of Pmax is achieved. Continue transmission at the maximum power for 410s.
4. Change RAT from NR to LTE and configure call box to send "ALL UP" power control commands in LTE
5. Continue call in LTE at maximum power for 400s.
6. Release LTE connection
7. After the completion of the test, prepare one plot with the following information for each RAT (a) Instantaneous Tx power versus time (b) Time-averaged power for each RAT according to the averaging duration and (c) Plimit corresponding to each RAT
8. Make a second plot containing the following information (a) Computed time-averaged 1gSAR versus time for each RAT (b) Sum of time-averaged SAR computed according to Eqn.(4.3-1) and (4.3-2), and (c) FCC 1g SAR limit of 1.6W/kg

Pass condition is to demonstrate total time-averaged 1gSAR value versus time does not exceed the FCC limit of 1.6 W/kg throughout the test duration. It is required to check if power limiting enforcement is operated as expected when RAT change occurs in-between.

#### 4.3.5 Change in RSI

This test is to demonstrate that Samsung S.LSI TAS feature can properly handle change of RSI resulting from different SAR index state detected by host platform software. It involves changing the Plimit value during the test for the same technology to emulate RSI change, while the SAR\_design\_target remains the same. Note that the DUT has a proximity sensor to manage extremity exposure, which is represented using RSI = 2, the DUT has a Hotspot mode to manage body exposure, which is represented using RSI = 3, the head exposure can be distinguished through audio receiver mode, represented as RSI = 4; similarly, the body worn with 15mm distance exposure is represented as RSI = 0

##### 4.3.5.1 Test procedure for change in RSI

1. Establish radio connection of DUT with call box e.g. using NR SA FR1
2. Configure DUT to send at low Tx power of 0 dBm for 110s and set the RSI index corresponding to Plimit of 18dBm
3. Configure call box to send "ALL UP" power control commands and continue SA FR 1 transmission from DUT so that maximum power of Pmax is achieved. Continue the transmission for 200s.
4. Change the RSI index corresponding to lower value of 16dBm and continue the transmission for another 300s
5. Release the SA FR1 connection.

Pass condition is to demonstrate time-averaged 1gSAR value versus time does not exceed the FCC limit 1.6 W/kg throughout the test duration. It is required to check if power limiting enforcement is operated as expected when RSI index is changed during the test. Test Configurations

### 4.3.6 SAR exposure switching

This test is to demonstrate that Samsung S.LSI TAS feature can properly handle change of dominant SAR exposure radio in the case of two simultaneous active RATs. It involves changing the required power of both radios such that either one or both of the RATs becomes dominant contributor to total exposure ratio at different times of the test.

#### 4.3.6.1 Test procedure for SAR exposure switching

1. Establish LTE and NR radio connection in NSA case with both call boxes, e.g. LTE and NR FR1 Technology.
2. Configure the LTE call box to send “ALL DOWN” power control commands for LTE and configure the NR call box to send “ALL UP” power control commands. This would correspond to NR dominant SAR scenario and continue this stage for about 220s.
3. In the second part of test, configure the LTE call box to send “ALL UP” power control commands and all transmissions are continued, resulting in maximum power requested from DUT for both LTE and NR. This stage of test is continued for another 110s.
4. In the third part of test, configure the NR call box to send “ALL DOWN” power control commands so that LTE becomes the dominant SAR radio. This stage is continued for another 110s.
5. Finally, both LTE and NR connections are released.

### 4.3.7 LTE Uplink CA

The test is to demonstrate that Samsung S.LSI TAS feature can properly handle the SAR exposure for LTE with the addition and/or removal of another intra-band LTE CC.

#### 4.3.7.1 Test procedure for uplink CA

1. Establish LTE connection of DUT with call box over Cell 1 E.g. one cell of the band Combo CA\_41C.
2. Configure the call box to send “ALL down” power control commands and continue this stage for about 100s.
3. Configure Call box to send “ALL UP” command for transmission on cell 1 and continue transmission for 200s
4. Establish LTE connection of DUT with call box over Cell 2 E.g. other cell of the band Combo CA\_41C.
5. Configure Call box to send “ALL UP” command for transmission on cell 2 and continue transmission for 200s
6. Release LTE connection for both cells

### 4.3.8 WCDMA time-varying Tx power

The test is to demonstrate that Samsung S.LSI TAS feature can properly handle the SAR exposure for WCDMA with varying requested power over time.

#### 4.3.8.1 Test Procedure for WCDMA\_Time\_varying\_Tx\_power\_Case1

1. Establish WCDMA connection of DUT with call box
2. Configure call box to set DUT Tx power to a low value of 0dBm for 100s.
3. Configure call box to send “ALL UP” power control commands and continue WCDMA transmission for 80s from DUT so that maximum power of Pmax is achieved.

4. Configure call box to set DUT Tx power to a lower value of  $P_{limit}(dBm)-3dB$  for 420s
5. Release WCDMA connection.

#### **4.3.8.2 Test Procedure for WCDMA\_Time\_varying\_Tx\_power\_Case2**

1. Establish WCDMA connection of DUT with call box
2. Configure call box to set DUT Tx power to a low value of 0dBm for 100s.
3. Configure call box with requesting the DUT Tx power to be according to the sequence B generated and continue 2G transmission till the end of the test.
4. Release WCDMA connection

#### **4.3.9 2G time-varying Tx power**

The test is to demonstrate that Samsung S.LSI TAS feature can properly handle the SAR exposure for 2G with varying requested power over time.

##### **4.3.9.1 Test Procedure for 2G\_Time\_varying\_Tx\_power\_Case1**

1. Establish 2G connection of DUT with call box
2. Configure call box to set DUT Tx power to a low value of 0dBm for 100s.
3. Configure call box to send "ALL UP" power control commands and continue 2G transmission for 500s from DUT so that maximum power of  $P_{max}$  is achieved.
4. Release 2G connection.

##### **4.3.9.2 Test Procedure for 2G\_Time\_varying\_Tx\_power\_Case2**

1. Establish 2G connection of DUT with call box
2. Configure call box to set DUT Tx power to a low value of 0dBm for 100s.
3. Configure call box with requesting the DUT Tx power to be according to the sequence B generated and continue 2G transmission till the end of the test.
4. Release 2G connection.

## 4.4 Spatial TAS

For the test cases with spatial TAS, we will consider 4 antennas (Main 1, Main 2, Main 3 and Sub 3) with two antenna groups where each antenna group consists of two antennas and multiple bands as in Table 4-1.

Table 4-1 Antennas and bands used in the spatial TAS conducted tests

AG#	Antenna	Band
AG0	Main 1, 2	GSM 1900, UMTS B2 LTE 7, 12, 41, 66 NR n25, n41
AG1	Main 3, Sub 3	LTE 48 NR n48, n77

The coupling matrix considered during the tests is

$$R = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

### 4.4.1 Test procedure for LTE Antenna switching with spatial TAS

1. Establish radio connection of DUT with call box e.g. using LTE technology (AG0)
2. Configure call box to set DUT Tx power to a low value of -10dBm for 100s.
3. Configure call box to send "ALL UP" power control commands and continue LTE transmission from DUT so that maximum power of Pmax is achieved for 240s.
4. Change the band from AG0 to AG1 so that the transmitting antenna changes to AG1 and continue transmission for 90s.
5. Change the band from AG1 to AG0 so that the transmitting antenna changes to AG0 and continue transmission till the end of the test.
6. Release LTE connection

### 4.4.2 Test procedure for SA FR1 Antenna switching with spatial TAS

1. Establish radio connection of DUT with call box e.g. using LTE technology (AG0)
2. Configure call box to set DUT Tx power to a low value of -10dBm for 140s.
3. Configure call box to send "ALL UP" power control commands and continue LTE transmission from DUT so that maximum power of Pmax is achieved for 140s.
4. Change the band from AG0 to AG1 so that the transmitting antenna changes to AG1 and continue transmission for 140s.
5. Change the band from Band AG1 to AG0 so that the transmitting antenna changes to AG0 and continue transmission till the end of the test.



#### 4.4.3 Test procedure for NSA with spatial TAS

1. Establish LTE and NR radio connection in NSA case with both call boxes, e.g. LTE (AG0) and NR (AG1)
2. Configure the LTE call box to send “ALL Down” power control commands for LTE and configure the NR call box to send “ALL Down” power control commands and continue for 150s.
3. Configure the LTE call box to send “ALL Up” power control commands for LTE while keeping the configuration of the NR call box at “ALL Down” power control commands. This would correspond to LTE dominant SAR scenario and continue this stage for about 140s.
4. Configure the NR call box to send “ALL UP” power control commands and all transmissions are continued, resulting in maximum power requested from DUT for both LTE and NR. This stage of test is continued for another 140s.
5. Configure the LTE call box to send “ALL DOWN” power control commands so that NR becomes the dominant SAR radio and continue transmission till the end of the test.
6. Finally, both LTE and NR connections are released.

#### 4.4.4 Test procedure for NSA antenna switching with spatial TAS

1. Establish LTE and NR radio connection in NSA case with both call boxes, e.g. LTE (AG0) and NR (AG0)
2. Configure the LTE call box to send “ALL Down” power control commands for LTE and configure the NR call box to send “ALL Down” power control commands and continue for 150s.
3. Configure the LTE call box to send “ALL Up” power control commands for LTE and configure the NR call box to send “ALL Down” power control commands. This would correspond to LTE dominant SAR scenario and continue this stage for about 200s.
4. Configure the NR call box to send “ALL UP” power control commands and all transmissions are continued, resulting in maximum power requested from DUT for both LTE and NR. This stage of test is continued for another 200s.
5. Change NR (AG1) so that NR transmitting antenna is switched to AG1 and continue transmission for 200s
6. Configure the LTE call box to send “ALL DOWN” power control commands so that NR becomes the dominant SAR radio and continue transmission till the end of the test.
7. Finally, both LTE and NR connections are released.

## 5. Test Configurations

Plim values in green indicate Plimit < Pmax			Plim values in grey indicate Plim > Pmax				Pmax	UL:DL Ratio
Plimit corresponding to 1 W/kg (1g) 2.5W/kg(10g) SAR_Design_target								
SAR Exposure Position			Body-worn	Head (RCV ON)	Hotspot (Hotspot on)	Phablet (Grip On) /Earjack	Maximum Tune-up Output Power (Frame Averaged Power) [dBm]	
Averaging volume			1g	1g	1g	10g		
seperation Distance			15 mm	0 mm	10 mm	0 mm		
Mode	Band	Antenna	RSI=0	RSI=4	RSI=3	RSI=1,2		
GSM/GPRS/EDGE	850	MAIN 1	27.4	29.4	20.7	20.7	24.7	37.5%
GSM/GPRS/EDGE	1900	MAIN 2	28.7	30.2	19.0	19.0	22.0	50.0%
UMTS	2	MAIN 2	27.4	28.0	20.5	20.5	24.0	100%
UMTS	4	MAIN 2	27.7	29.0	20.5	20.5	24.0	100%
UMTS	5	MAIN 1	29.6	29.9	24.9	27.2	24.5	100%
LTE FDD	2	MAIN 3	21.0	21.0	21.0	21.0	24.5	100%
LTE FDD	5	MAIN 1	28.5	29.5	26.7	28.6	24.5	100%
LTE FDD	7	MAIN 2	26.4	28.7	21.0	21.0	23.5	100%
LTE FDD	12	MAIN 1	30.7	32.8	31.3	28.4	24.5	100%
LTE FDD	13	MAIN 1	28.5	30.8	29.5	30.1	23.5	100%
LTE FDD	14	MAIN 1	29.7	31.0	28.1	30.6	23.5	100%
LTE FDD	25(2)	MAIN 2	28.4	30.2	21.5	21.5	24.0	100%
LTE FDD	26	MAIN 1	28.9	29.9	27.0	29.1	24.5	100%
LTE FDD	30	MAIN 2	29.1	30.0	21.0	21.0	23.0	100%
LTE TDD PC3	41(38)	MAIN 2	28.2	28.6	17.5	17.5	22.5	63.3%
LTE TDD PC3	41 ULCA	MAIN 2	27.8	28.5	17.5	17.5	21.5	63.3%
LTE TDD PC2	41	MAIN 2	27.7	28.9	17.9	17.9	22.4	43.3%
LTE TDD PC3	48	SUB 3	20.0	16.0	20.0	20.0	20.0	63.3%
LTE TDD PC3	48 ULCA	SUB 3	20.0	16.0	20.0	20.0	20.0	63.3%
LTE FDD	66(4)	MAIN 2	29.0	30.3	21.5	21.5	24.0	100%
LTE FDD	66(4)	MAIN 3	21.0	21.0	21.0	21.0	24.5	100%
LTE FDD	71	MAIN 1	30.9	32.3	28.4	28.9	23.5	100%
NR FDD	5	MAIN 1	28.7	29.8	26.3	28.1	24.5	100%
NR FDD	25(2)	MAIN 2	28.7	29.8	20.5	20.5	23.5	100%
NR FDD	30	MAIN 2	29.6	29.6	21.0	21.0	23.0	100%
NR TDD PC3	41	MAIN 2	26.2	26.2	21.0	21.0	23.0	100%
NR TDD PC2	41	MAIN 2	26.9	28.3	21.0	21.0	25.5	100%
NR TDD SRS 0	48	SUB 3	22.0	13.5	22.0	22.0	22.5	100%
NR TDD SRS 1	48	MAIN 2	13.0	13.0	13.0	13.0	18.5	100%
NR TDD SRS 2	48	SUB 2	13.0	13.0	13.0	13.0	18.5	100%
NR TDD SRS 3	48	SUB 5	13.0	13.0	13.0	13.0	18.5	100%
NR FDD	66	MAIN 2	29.4	30.8	21.0	21.0	23.5	100%
NR FDD	70	MAIN 2	30.8	31.8	21.5	21.5	24.0	100%
NR FDD	71	MAIN 1	29.8	31.7	28.3	29.1	24.0	100%
NR TDD SRS 0 PC3	77	SUB 3	18.0	16.0	18.0	18.0	23.0	100%
NR TDD SRS 1	77	MAIN 2	13.5	13.5	13.5	13.5	21.5	100%
NR TDD SRS 2	77	SUB 2	12.5	12.5	12.5	12.5	20.5	100%
NR TDD SRS 3	77	SUB 5	12.5	12.5	12.5	12.5	20.0	100%
NR TDD SRS 0 PC2	77	SUB 3	18.0	16.0	18.0	18.0	25.5	100%
NR TDD SRS 1	77	MAIN 2	13.5	13.5	13.5	13.5	21.5	100%
NR TDD SRS 2	77	SUB 2	12.5	12.5	12.5	12.5	20.5	100%
NR TDD SRS 3	77	SUB 5	12.5	12.5	12.5	12.5	20.0	100%
NR TDD SRS 0 PC3	77 DoD	SUB 3	18.0	16.0	18.0	18.0	23.0	100%
NR TDD SRS 1	77 DoD	MAIN 2	13.5	13.5	13.5	13.5	21.5	100%
NR TDD SRS 2	77 DoD	SUB 2	12.5	12.5	12.5	12.5	20.5	100%
NR TDD SRS 3	77 DoD	SUB 5	12.5	12.5	12.5	12.5	20.0	100%
NR TDD SRS 0 PC2	77 DoD	SUB 3	18.0	16.0	18.0	18.0	25.5	100%
NR TDD SRS 1	77 DoD	MAIN 2	13.5	13.5	13.5	13.5	21.5	100%
NR TDD SRS 2	77 DoD	SUB 2	12.5	12.5	12.5	12.5	20.5	100%
NR TDD SRS 3	77 DoD	SUB 5	12.5	12.5	12.5	12.5	20.0	100%

**Note:**

1. Radio SAR indicator (RSI) in the table above means the SAR test configuration of each mobile communication technology.
2. WLAN/BT mode are not controlled by The Samsung S.LSI proprietary TAS (Time Average SAR) algorithm.
2. Plimit and Tune up output power Pmax above table correspond to average power level accounting for duty cycle in the case of TDD Modulation schemes (GSM,LTE TDD,NR TDD)
3. Maximum tune up output Power Pmax is used to configure DUT during RF tune up procedure. The maximum allowed output power is equal to Tune up power +1 dB device design uncertainty.
4. Compared with the Plimit (Tune up Powers) declared in each RSI by the manufacturer and the Plimit (calculation) calculated by the SAR measurement of each RSI, the lower power is applied to the DUT as the Plimit at each RSI configurations.
5. when Hotspot Mode (RSI=3), Grip sensor (RSI=2) and Ear-jack mode(RSI=1) are triggered at the same time, RSI =4(RCV) takes higher priority. The Priority for power reduction was given in the order of hotspot(RSI=3), ear-jack.(RSI=1), and grip (RSI=2).

### 6.1 Test case list for sub-6GHz transmissions


To validate TAS algorithm in various sub-6GHz conditions, the chosen TC (Test Case) list is defined as in Table 6.1-1

**Table 6.1-1 Sub-6GHz TAS validation test case list**

No.	Test Scenario	Test case	Test configuration
TC01	Time-varying Tx power transmission	LTE_Time_Varying_Tx_Power_Case_1	LTE Band 7, 41, 48 Test Seq. A
TC02		SA_FR1_Time_Varying_Tx_Power_Case_1	NR Band n25, n41, n48 Test Seq. A
TC03		LTE_Time_Varying_Tx_Power_Case_2	LTE Band 7, 41, 48 Test Seq. B
TC04		SA_FR1_Time_Varying_Tx_Power_Case_2	NR Band n25, n41, n48 Test Seq. B
TC05	Change in call	LTE_Call_Disconnect_Reestablishment	LTE Band 7, 41, 48
TC06	Re-selection in call	SA_FR1_to_LTE_RAT_Re-selection	NR Band n25 to LTE Band 41 NR Band n41 to LTE Band 66 NR Band n48 to LTE band 48
TC07	SAR exposure switch	NSA_FR1_Dominant_Power_Switching	LTE Band 12 and NR Band n25 LTE Band 12 and NR Band n41
TC08	Change in RSI	SA_FR1_RF_SAR_Index_Change	NR Band n77
TC09	LTE ULCA.	LTE_UL_CA	LTE Band 41
TC10-1	WCDMA time varying Tx power	WCDMA_Time_varying_Tx_power_Case1	WCDMA Band 2
TC10-2		WCDMA_Time_varying_Tx_power_Case2	
TC11-1	2G time varying Tx power	2G_Time_varying_Tx_power_Case1	GSM1900
TC11-2		2G_Time_varying_Tx_power_Case2	
TC12	Antenna Switching with Spatial TAS	LTE_Ant_switching_Spatial_TAS	LTE Band 7, 48
		NR_Ant_switching_Spatial_TAS	NR Band n41, 77
TC13	NSA with Spatial TAS	NSA_Spatial_TAS	LTE Band 66 and NR Band 77 LTE Band 66 and NR band 41
TC14	NSA antenna switching with Spatial TAS	NSA_Ant_switching_Spatial_TAS	LTE Band 12 and NR Band n41 and NR Band n77

## 7. Conducted Power Test Results for Sub-6 TAS validation

### 7.1 Measurement set-up

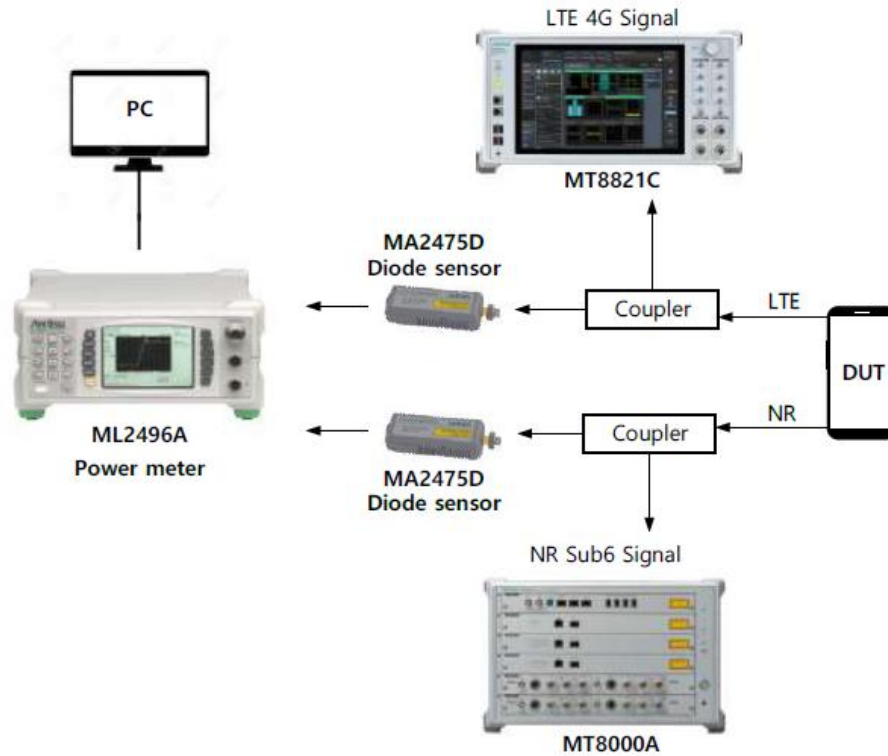

**Figure 7.1-1 Test set-up for legacy and sub 6GHz**

The test setup for TAS validation with sub-6GHz RATs only is shown in Figure 5.1-1. Normally, a power sensor would measure total power in the entire frequency of its specification e.g. 10MHz to 50GHz for the MA2475D unit. However, when two radios are active, we need to measure their powers separately for using the corresponding SAR mapping table. Therefore, this test setup considers scenarios where two radios would be transmitting from different ports of the DUT so that separate power sensors measure them individually. A common power meter is able to display and record the readings for each sensor at the same time for post processing at a PC. The signaling call boxes MT8000A and MT8821C are used to establish the call and data connection to the DUT on those same ports for NR and LTE, respectively.

The couplers are able to provide the transmit signal from DUT to power sensors while uplink and downlink signaling messages exchanged with the call boxes on the same paths. We can build scripts to program a certain sequence of power control commands from the call boxes to the DUT which can essentially instruct the DUT to change its transmit power.

Thus, if we want DUT to transmit at maximum power in LTE, then continuous power up commands are sent by MT8821C. Similarly, continuous power up commands from MT8000A will try to increase NR power up to its maximum limit. Other power control scenarios which mimic real field behavior such as sequence of power up followed by power down are also possible as described in Section 4. All the path losses from RF port of DUT to the callbox and the power meters are calibrated and automatically entered as offsets in the callbox and power meter, which are also connected to the control PC used in the test setup. We use an Anritsu AMS tool, which is capable of executing the entire test sequence including requested power variation over time and call setup/disconnect scenarios based on pre-configured test case definition.

Power readings for each active technology are recorded every 100ms and dumped in an excel file. A post

processing tool is used to extract data from the excel file and plot the required metrics such as time-averaged power, SAR values versus time as described in Section 4.

In summary, the tests have to be executed as following procedure.

1. Measure conduction sub 6GHz Tx power corresponds to SAR regulation.
2. Set sub 6GHz power level with some margin. And start the test
3. Execute time-varying test scenarios. And record sub 6GHz power using sub 6GHz power meter equipment.
4. Plot the recorded results over measurement time. And evaluate the results for validation.

Note that Plimit is different according to the used OEM, so it is necessary to set the Plimit suitable for each terminal.

### 7.2 Plimit and Pmax measurement results

The measured *Plimit* for all the selected radio configurations are listed in Table 7.2.1. *Pmax* was also measured for radio configurations selected for testing time-varying Tx power transmission scenario in order to generate test sequences following the test procedures. Note that Table 7.2.1 is not actual Plimit corresponding to 1W/kg SAR, but our measured averaged power when forcing Plimit in our SW based on Table 7.2.1.

TC#	Test scenario	Tech	Band	Antenna	RSI	RB/offset/BW	Mode	Configuration	Plimit setting (dBm)	Pmax setting (dBm)	measured Plimit (dBm)	measured Pmax (dBm)
1	Time varying Tx power case	LTE	7	Main 2	3	50/25/20MHz	QPSK	1g/10mm/Hotspot	21.0	22.5	21.31	22.23
			41	Main 2	3	1/0/20MHz	QPSK	1g/10mm/Hotspot	17.5*	22.5*	17.21	21.81
			48	Sub 3	2	50/49/20MHz	QPSK	1g/0mm/RCV	14.0*	19.0*	14.10	19.08
2		SA/FR1	25	Main 2	3	1/108/40MHz	DFT-s QPSK	1g/10mm/Hotspot	20.5	23.5	20.68	23.41
			41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
			48	Sub 3	2	1/1/40MHz	DFT-s QPSK	1g/0mm/RCV	13.5	22.5*	13.51	22.01
3		LTE	7	Main 2	3	50/25/20MHz	QPSK	1g/10mm/Hotspot	21.0	22.5	21.31	22.23
			41	Main 2	3	1/0/20MHz	QPSK	1g/10mm/Hotspot	17.5*	22.5*	17.21	21.81
			48	Sub 3	2	50/49/20MHz	QPSK	1g/0mm/RCV	14.0*	19.0*	14.10	19.08
4		SA/FR1	25	Main 2	3	1/108/40MHz	DFT-s QPSK	1g/10mm/Hotspot	20.5	23.5	20.68	23.41
			41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
			48	Sub 3	2	1/1/40MHz	DFT-s QPSK	1g/0mm/RCV	13.5	22.5*	13.51	22.01
5	Disconnect reestablishment	LTE	7	Main 2	3	50/25/20MHz	QPSK	1g/10mm/Hotspot	21.0	22.5	21.31	22.23
			41	Main 2	3	1/0/20MHz	QPSK	1g/10mm/Hotspot	17.5*	22.5*	17.21	21.81
			48	Sub 3	2	50/49/20MHz	QPSK	1g/0mm/RCV	14.0*	19.0*	14.10	19.08
6	FR1 to LTE IRAT Reselection	LTE	41	Main 2	3	1/0/20MHz	QPSK	1g/10mm/Hotspot	17.5*	22.5*	17.21	21.81
		SA/FR1	25	Main 2	3	1/108/40MHz	DFT-s QPSK	1g/10mm/Hotspot	20.5	23.5	20.68	23.41
		LTE	66	Main 2	3	50/49/20MHz	QPSK	1g/10mm/Hotspot	21.5	23.0	22.10	23.31
		SA/FR1	41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
		LTE	48	Sub 3	2	50/49/20MHz	QPSK	1g/0mm/RCV	14.0*	19.0*	14.10	19.08
		SA/FR1	48	Sub 3	2	1/1/40MHz	DFT-s QPSK	1g/0mm/RCV	13.5	22.5*	13.51	22.01
7	FR1 dominant power change	LTE	12	Main 1	3	1/0/10MHz	QPSK	1g/10mm/Hotspot	24.5	24.5	24.50	24.50
		NSA/FR1	25	Main 2	3	1/108/40MHz	DFT-s QPSK	1g/10mm/Hotspot	20.5	23.5	20.67	23.42
		LTE	12	Main 1	3	1/0/10MHz	QPSK	1g/10mm/Hotspot	24.5	24.5	24.50	24.50
		NSA/FR1	41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
8	RSI change	SA FR1	77	Sub 3	3/2	1/1/100MHz	DFT-s QPSK	1g/10mm/Hotspot 1g/0mm/RCV	18.0/ 16.0	23.0*	18.63/ 16.71	23.32

TC#	Test scenario	Tech	Band	Antenna	RSI	RB/offset/BW	Mode	Configuration	Plimit setting (dBm)	Pmax setting (dBm)	measured Plimit (dBm)	measured Pmax (dBm)
9	LTE UL CA	LTE	41	Main 2	3	1/0/20MHz	QPSK	1g/10mm/Hotspot	17.5*	22.5*/21.5*	17.21	21.81/20.68
10	WCDMA Time Varying Tx Power	WCDMA	2	Main 2	3	-	RMC	1g/10mm/Hotspot	20.5	24.0	21.05	24.11
11	2G Time varying Tx Power	2G	GSM1900	Main 2	3	-	GMSK	1g/10mm/Hotspot	19.0*	22.0*	18.69	22.31
12	Antenna switching with Spatial TAS	LTE	7	Main 2	3	50/25/20MHz	QPSK	1g/10mm/Hotspot	21.0	22.5	21.31	22.23
			48	Sub 3	3	50/25/20MHz	QPSK	1g/10mm/Hotspot	18.0*	19.0*	18.41	19.21
		SA/FR1	41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
			77	Sub 3	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	18.0	23.0*	18.19	23.31
13	NSA with spatial TAS	LTE	66	Main 2	3	50/49/20MHz	QPSK	1g/10mm/Hotspot	21.5	23.0	22.10	23.31
		NSA/FR1	77	Sub 3	3	1/1/100MHz	DFT-s QPSK	1g/10mm/Hotspot	18.0	23.0*	18.63	23.32
		LTE	66	Main 3	3	1/0/20MHz	QPSK	1g/10mm/Hotspot	21.0	24.5	21.47	24.00
		NSA/FR1	41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
14	NSA antenna switching with spatial TAS	LTE	12	Main 1	3	1/0/10MHz	QPSK	1g/10mm/Hotspot	24.5	24.5	24.50	24.50
		NSA/FR1	41	Main 2	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	21.0	23.0*	21.21	22.80
		NSA/FR1	77	Sub 3	3	135/69/100MHz	DFT-s QPSK	1g/10mm/Hotspot	18.0	23.0*	18.19	23.31

**Table 7.2.1..**

\* Plimit and Tune up output power Pmax in above table correspond to average power level after accounting for duty cycle in the case of TDD Modulation schemes (GSM, LTE TDD, NR TDD)

### 7.3 Time-varying Tx power measurement results

Following the test procedure in Section 4.3.1, the conducted Tx power measurement results for all selected test cases are listed in this section. In all conducted Tx power plots, the blue line shows the measured instantaneous power using the power meter, the red line shows the time-averaged Tx power and yellow line shows the P<sub>limit</sub> value corresponding to design target. In all SAR plots, the dotted blue line shows the time-averaged 1g SAR while the red line shows the corresponding FCC limit of 1.6W/kg. Time-varying Tx power measurements were conducted for TC #1-4 in Table 7.2.1 by generating the test sequence A or B given in Appendix.



TC01: LTE\_Time\_Varying\_Tx\_Power\_Case\_1 [LTE B7]

Figure 7.3-1 Time average conducted power of LTE B7 in TC01

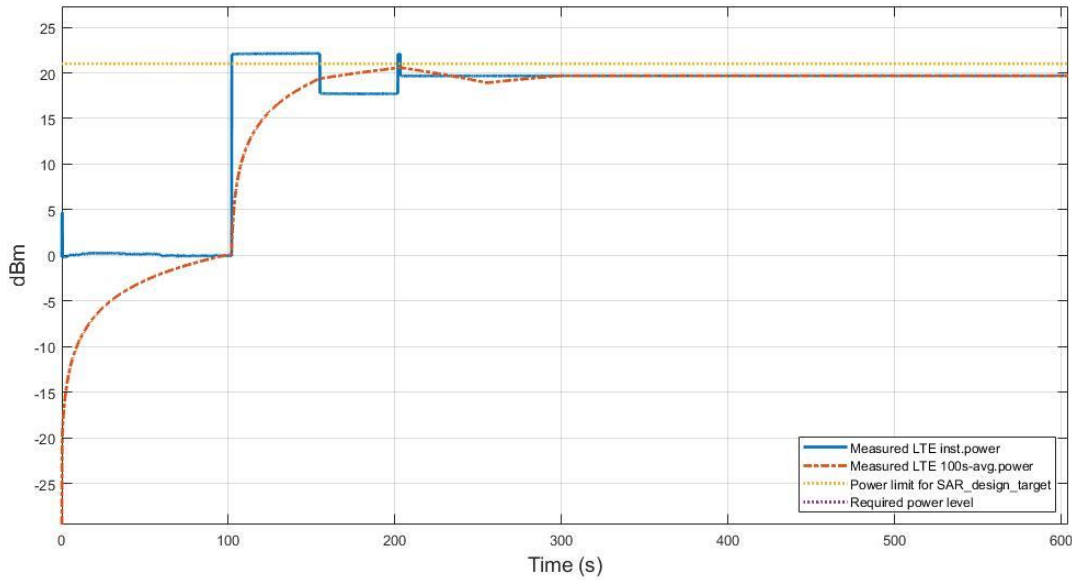


Figure 7.3-1 shows the conducted Tx power plot with calculated time-averaged power based on the measured instantaneous Tx power with 1gSAR FCC Limit value. As shown in Figure 7.3-1, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is smaller than the target power, and it will saturate to target power with little margin. Figure 7.3-2 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

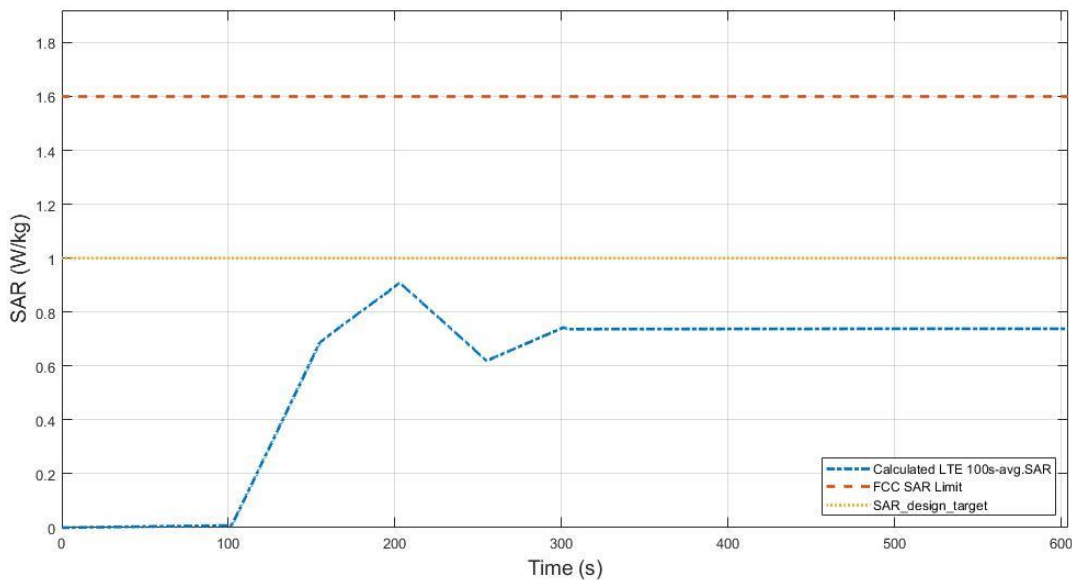


Figure 7.3-2 Total time-averaged SAR in TC01

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.906 W/kg
Device uncertainty	1 dB

TC01: LTE\_Time\_Varying\_Tx\_Power\_Case\_1 [LTE B41]

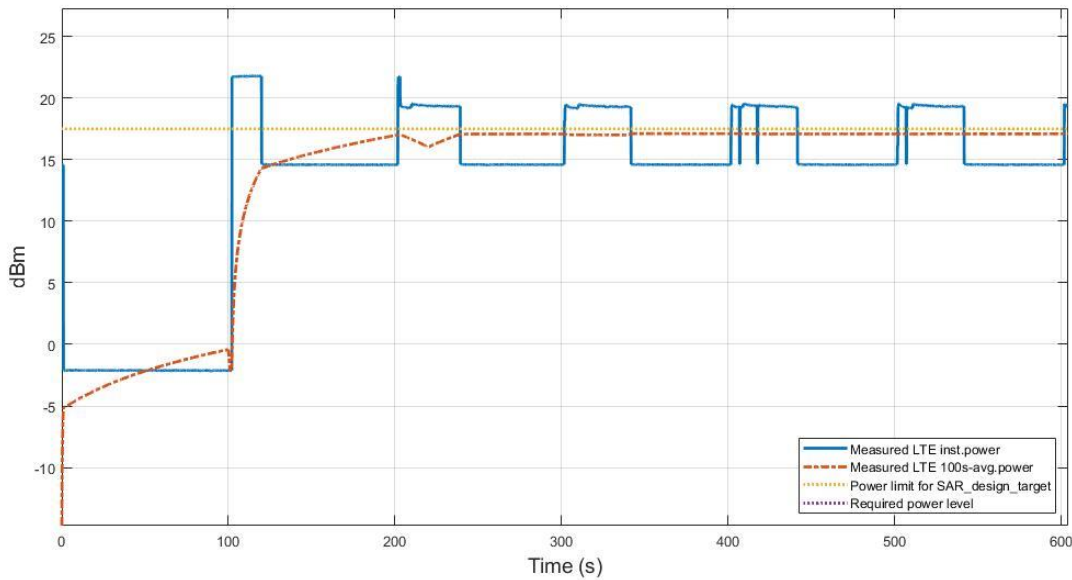


Figure 7.3-3 Time average conducted power of LTE B41 in TC01

Figure 7.3-3 shows the conducted Tx power plot with calculated time-averaged power based on the measured instantaneous Tx power with 1gSAR FCC Limit value. As shown in Figure 7.3-3, it is confirmed for time average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is smaller than the target power, and it will saturate to target power with little margin. Figure 7.3-4 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.


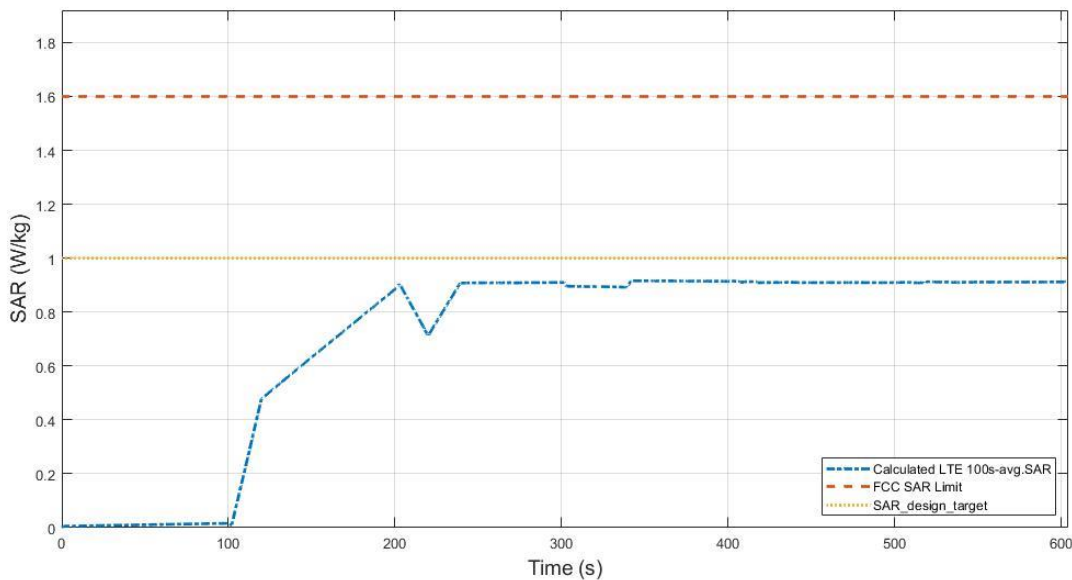


Figure 7.3-4 Total time-averaged SAR in TC01


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.916 W/kg
Device uncertainty	1 dB

**TC01: LTE\_Time\_Varying\_Tx\_Power\_Case\_1 [LTE B48]**

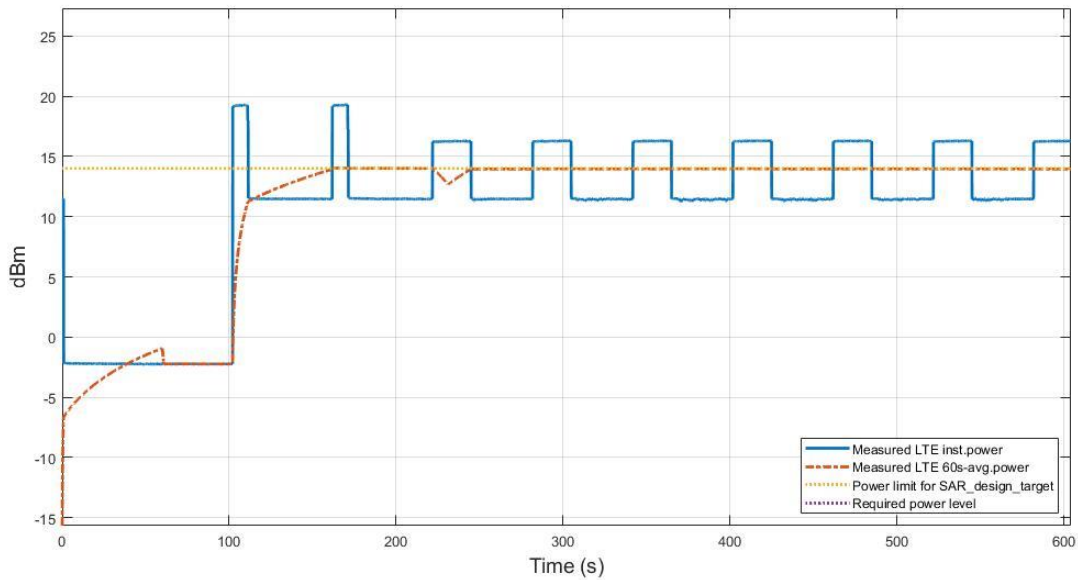

**Figure 7.3-5 Time average conducted power of LTE B48 in TC01**

Figure 7.3-5 shows the conducted Tx power plot with calculated time-averaged power based on the measured instantaneous Tx power with 1gSAR FCC Limit value. As shown in Figure 7.3-5, it is confirmed for time average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is smaller than the target power, and it will saturate to target power with little margin. Figure 7.3-6 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

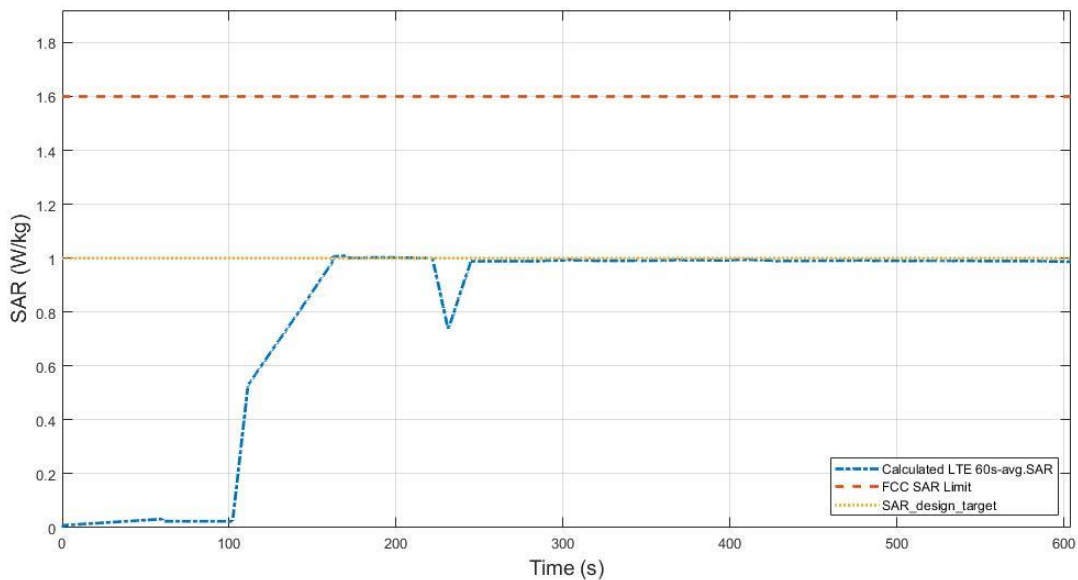

**Figure 7.3-6 Total time-averaged SAR in TC01**

FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (blue curve)	1.009 W/kg
Device uncertainty	1 dB

TC02: SA\_FR1\_Time\_Varying\_Tx\_Power\_Case\_1 [n25]

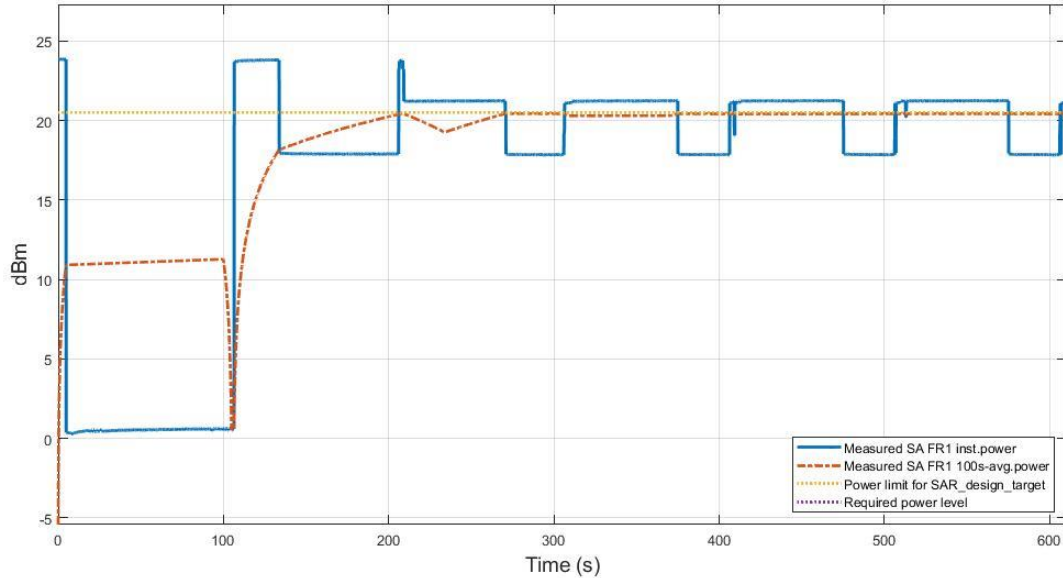


Figure 7.3-7 Time-average conducted power of SA FR1 n25 in TC02

Figure 7.3-7 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-7, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-8 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.


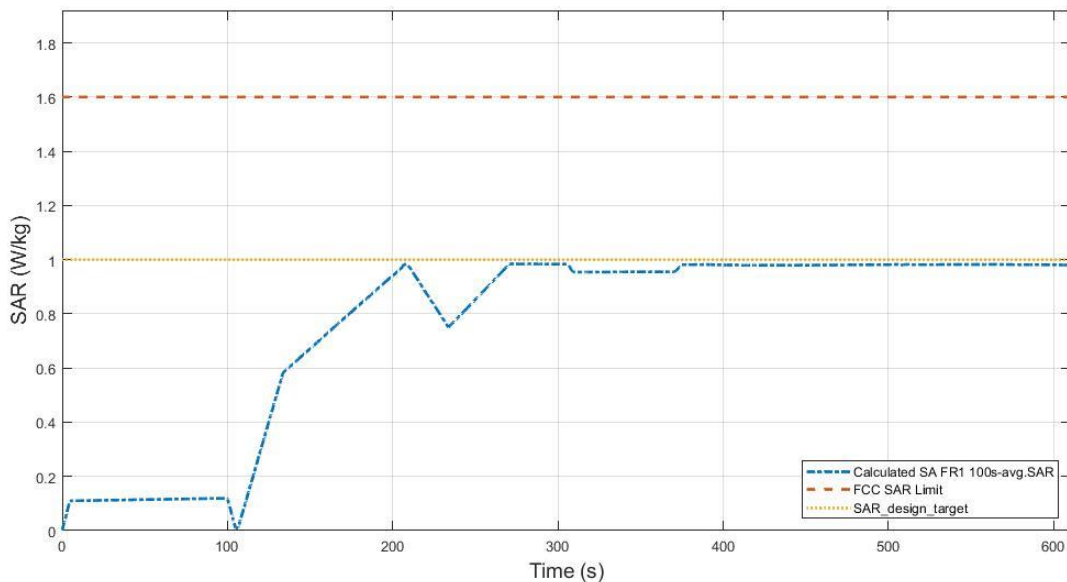


Figure 7.3-8 Total time-averaged SAR in TC02


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.985 W/kg
Device uncertainty	1 dB

TC02: SA\_FR1\_Time\_Varying\_Tx\_Power\_Case\_1 [n41]

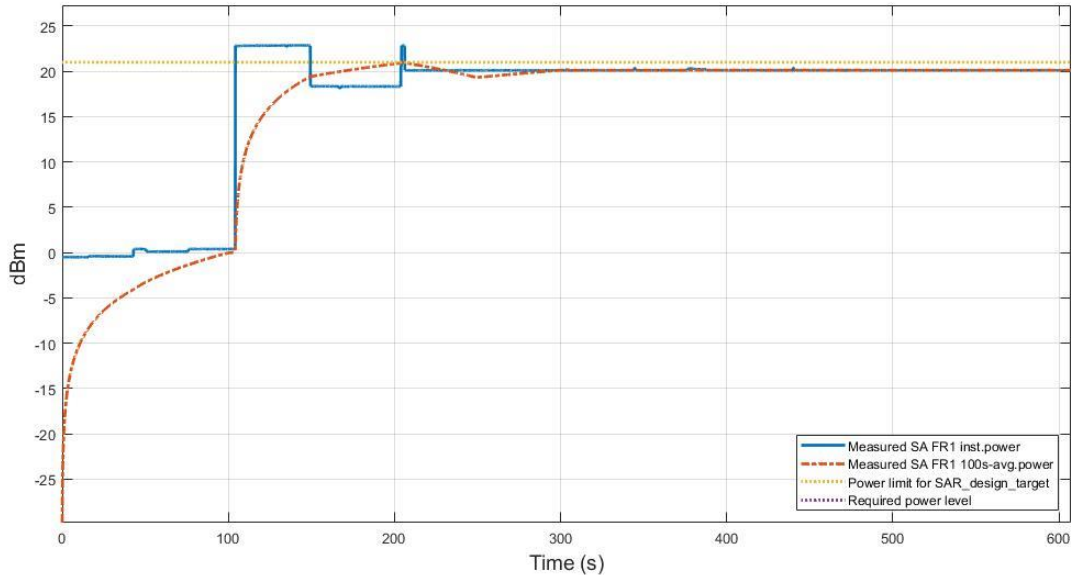

**Figure 7.3-9 Time-average conducted power of SA FR1 n41 in TC02**


Figure 7.3-9 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-9, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of Plimit. Figure 7.3-10 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

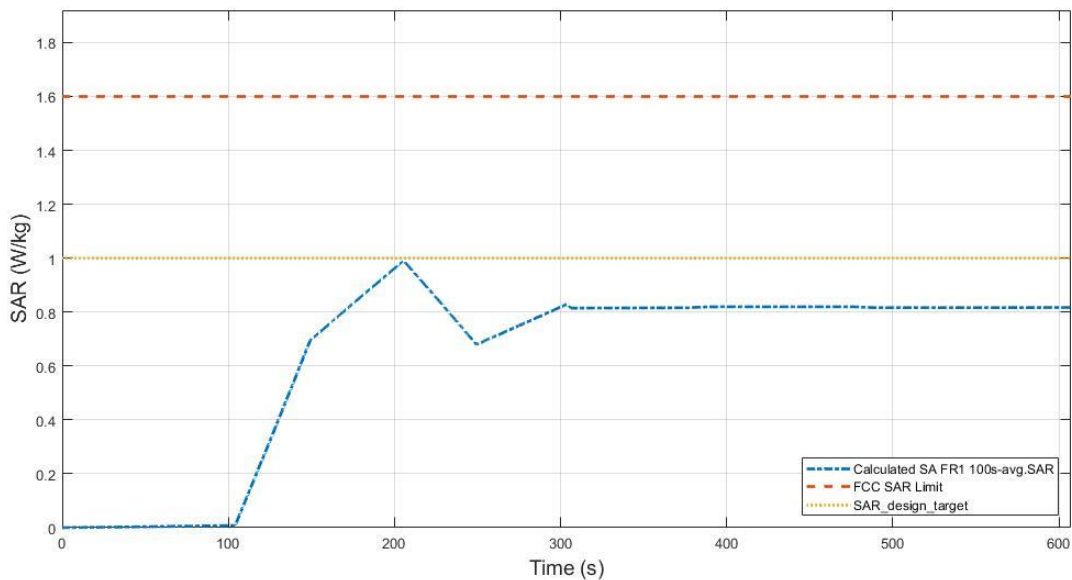

**Figure 7.3-10 Total time-averaged SAR in TC02**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.986 W/kg
Device uncertainty	1 dB

TC02: SA\_FR1\_Time\_Varying\_Tx\_Power\_Case\_1 [n48]

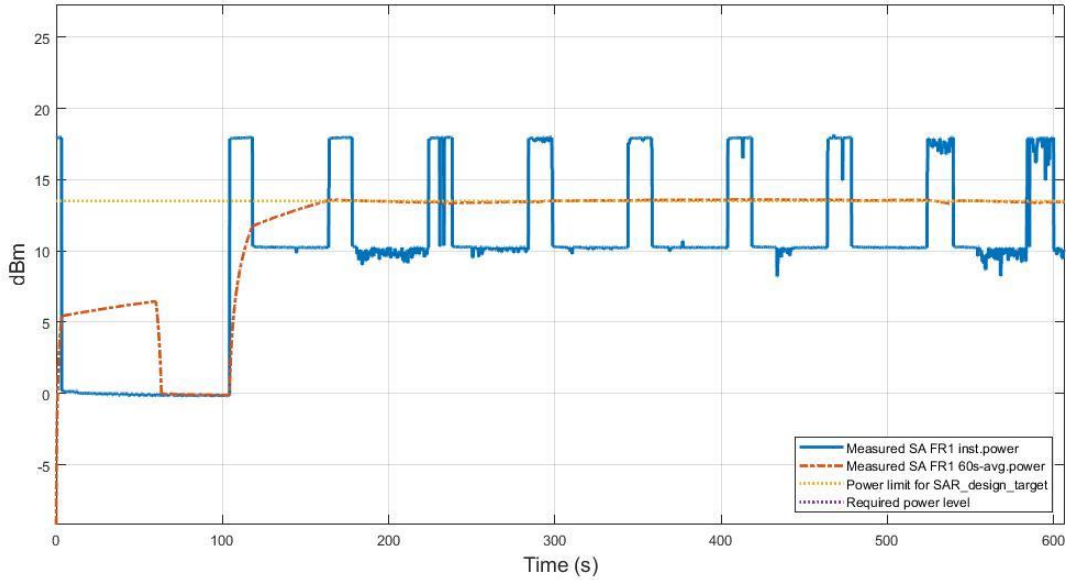

**Figure 7.3-11 Time-average conducted power of SA FR1 n48 in TC02**


Figure 7.3-11 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-11, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-12 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

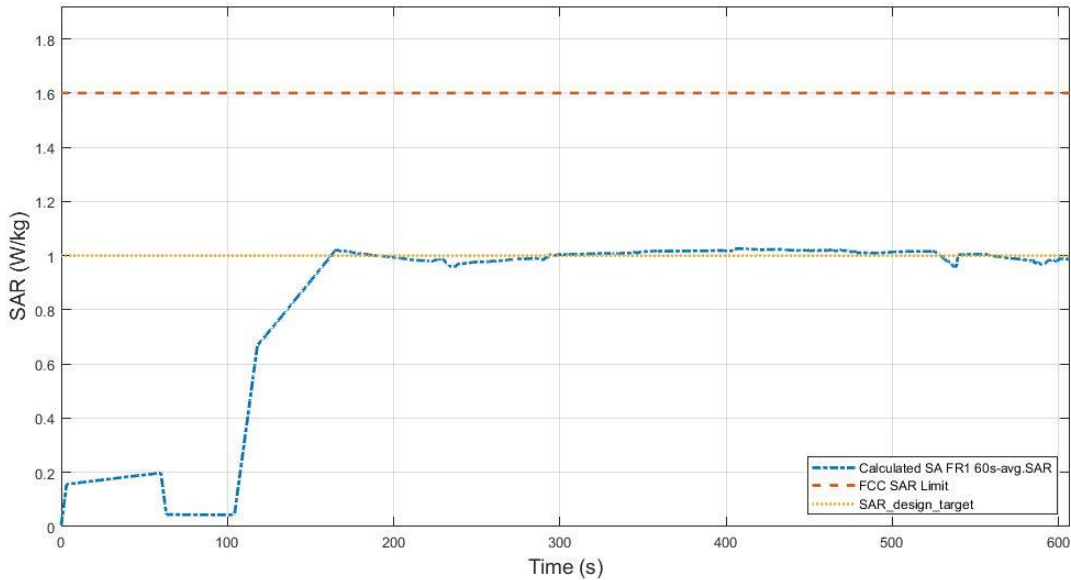

**Figure 7.3-12 Total time-averaged SAR in TC02**


FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (blue curve)	1.027 W/kg
Device uncertainty	1 dB

TC03: LTE\_Time\_Varying\_Tx\_Power\_Case\_2 [LTE B7]

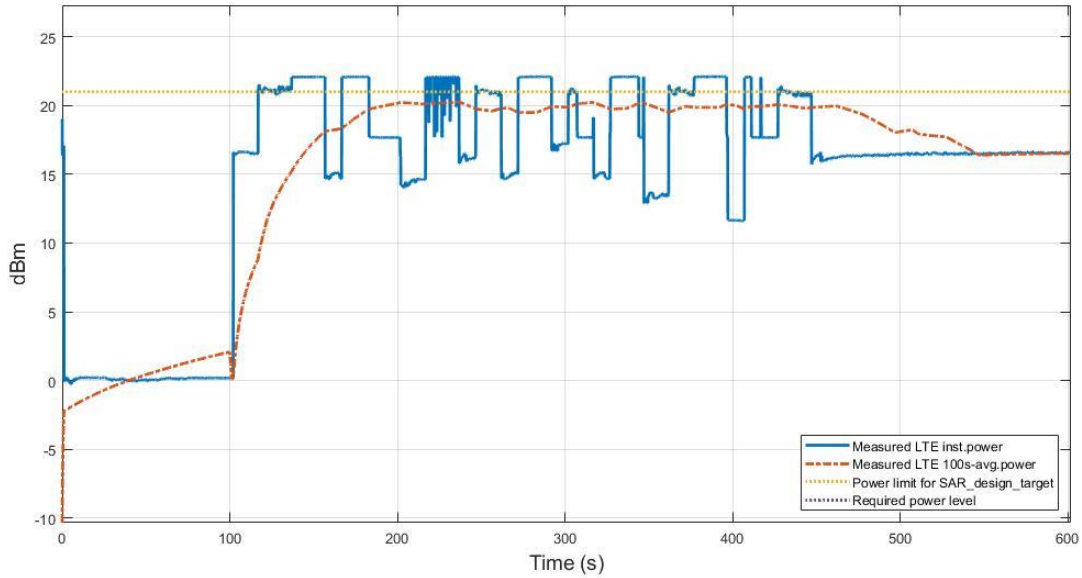

**Figure 7.3-13 Conducted Tx power of LTE B7 in TC03**


Figure 7.3-13 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-13, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-14 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

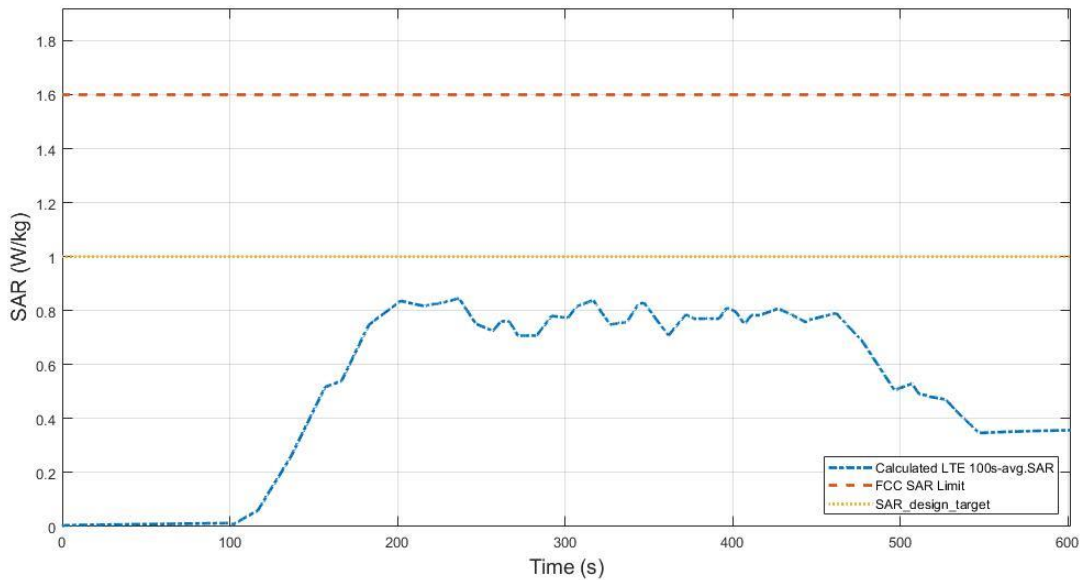

**Figure 7.3-14 Total time-averaged SAR in TC03**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.846 W/kg
Device uncertainty	1 dB

**TC03: LTE\_Time\_Varying\_Tx\_Power\_Case\_2 [LTE B41]**

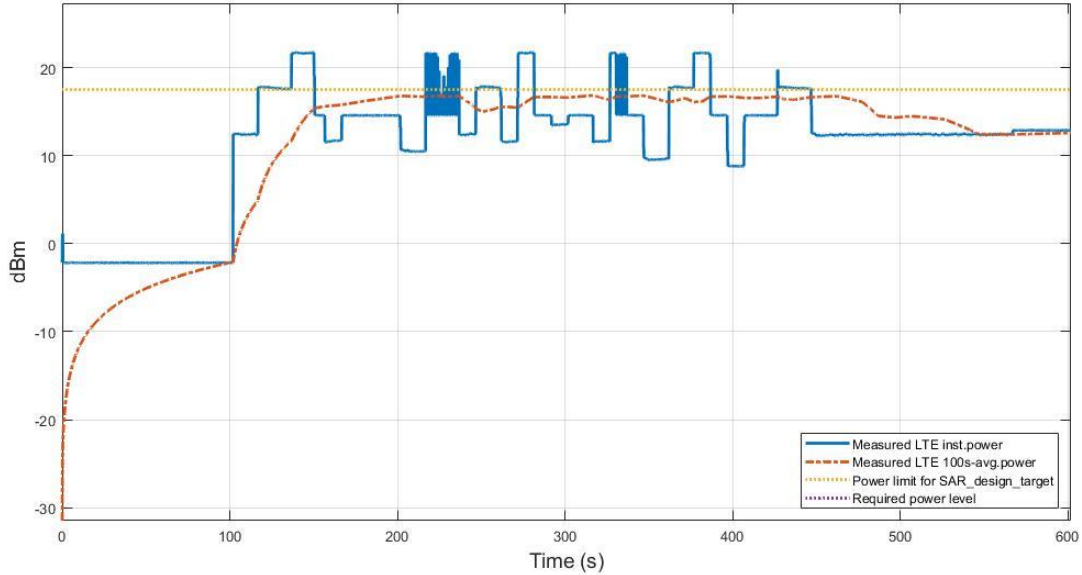

**Figure 7.3-15 Conducted Tx power of LTE B41 in TC03**

Figure 7.3-15 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-15, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-16 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

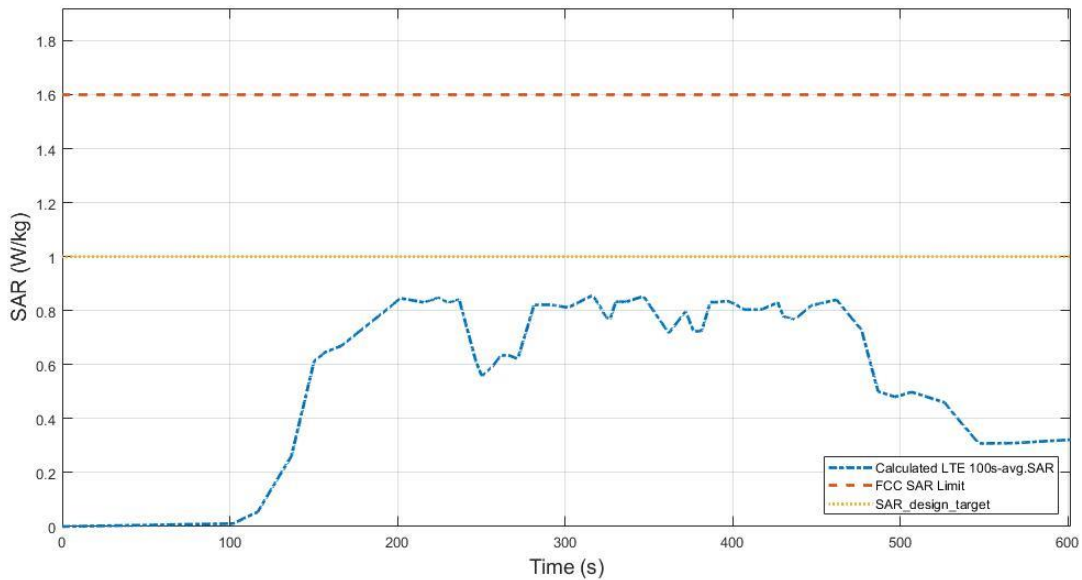


**Figure 7.3-16 Total time-averaged SAR in TC03**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.858W/kg
Device uncertainty	1 dB




**TC03: LTE\_Time\_Varying\_Tx\_Power\_Case\_2 [LTE B48]**

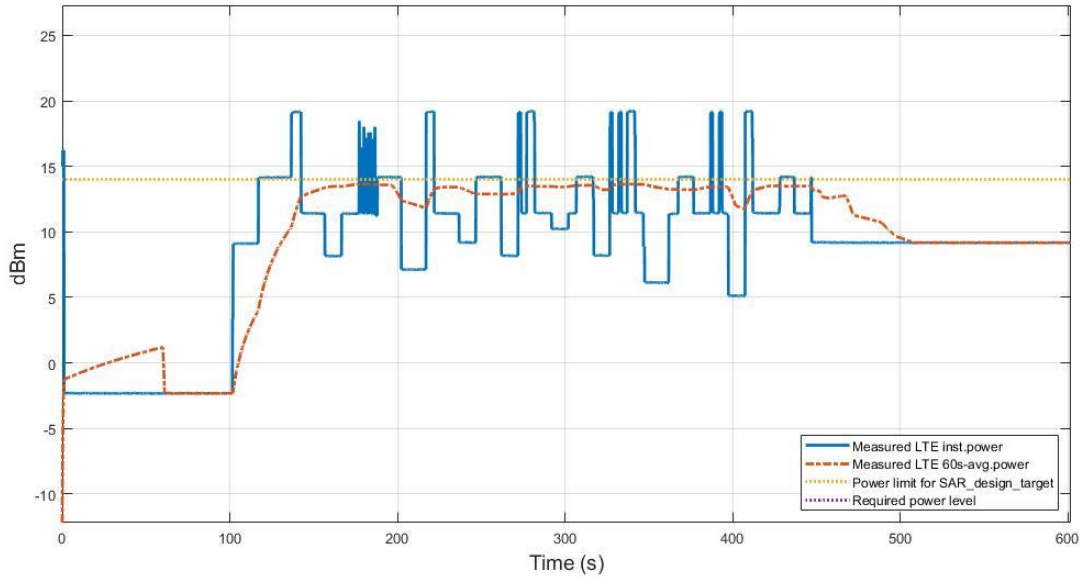

**Figure 7.3-17 Conducted Tx power of LTE B48 in TC03**

Figure 7.3-17 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-17, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of Plimit. Figure 7.3-18 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

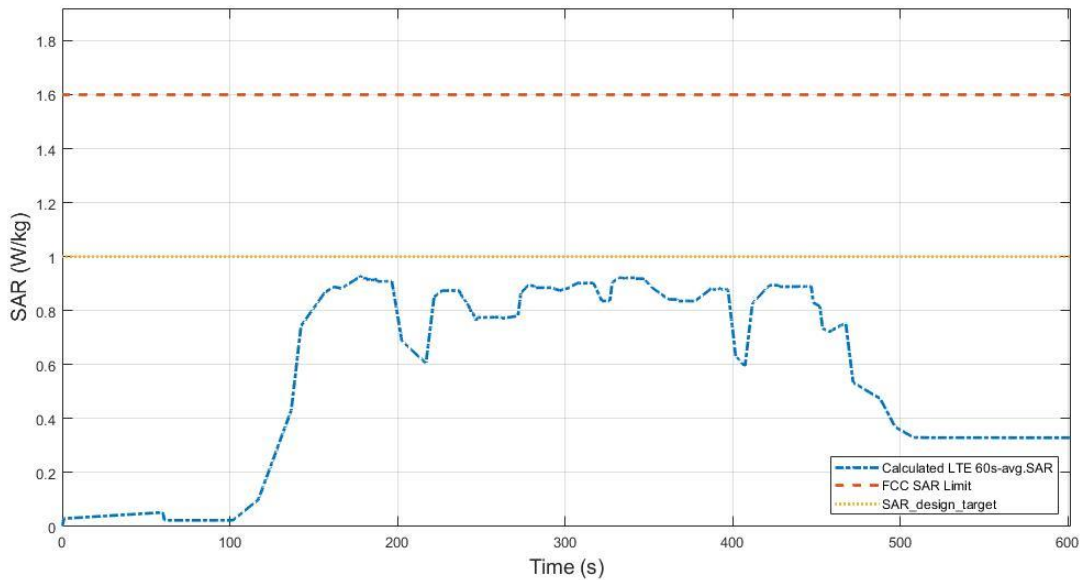

**Figure 7.3-18 Total time-averaged SAR in TC03**

FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (blue curve)	0.930W/kg
Device uncertainty	1 dB

TC04: SA\_FR1\_Time\_Varying\_Tx\_Power\_Case\_2 [n25]

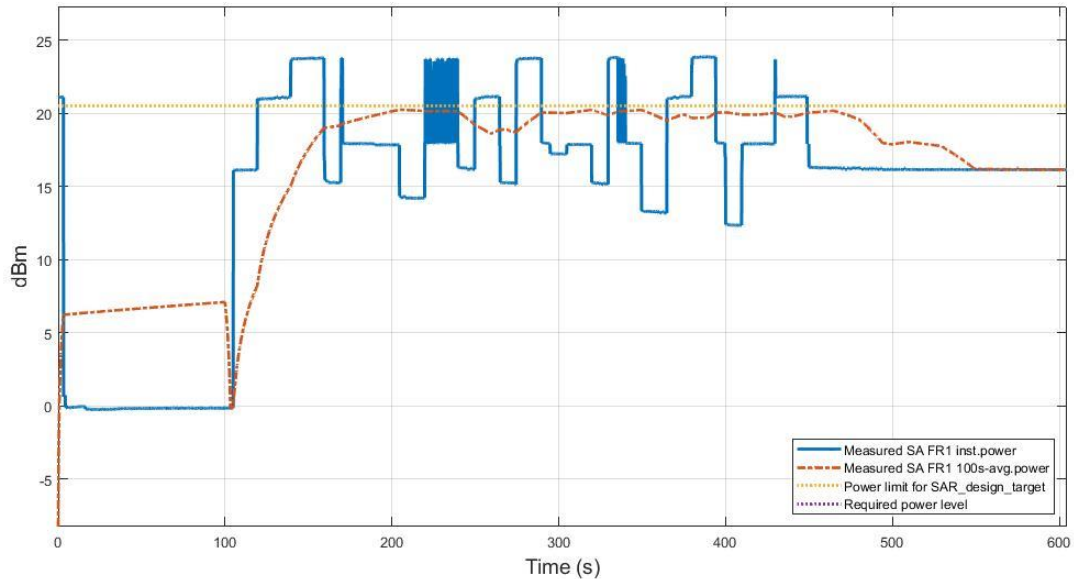


Figure 7.3-19 Conducted Tx power for SA FR1 n25 in TC04

Figure 7.3-19 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-19, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-20 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.


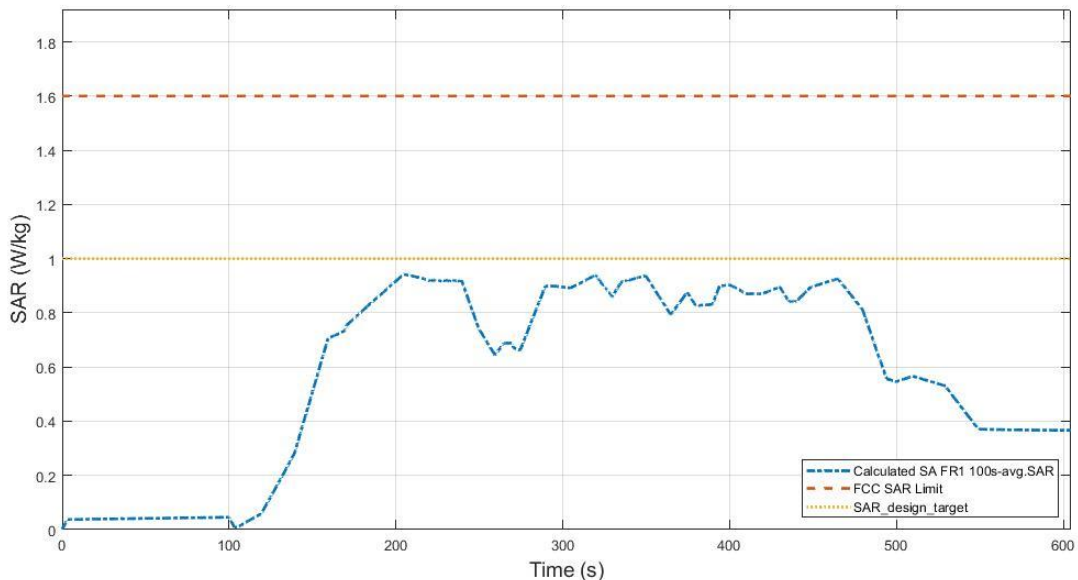


Figure 7.3-20 Total time-averaged SAR in TC04


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.942 W/kg
Device uncertainty	1 dB

**TC04: SA\_FR1\_Time\_Varying\_Tx\_Power\_Case\_2 [n41]**

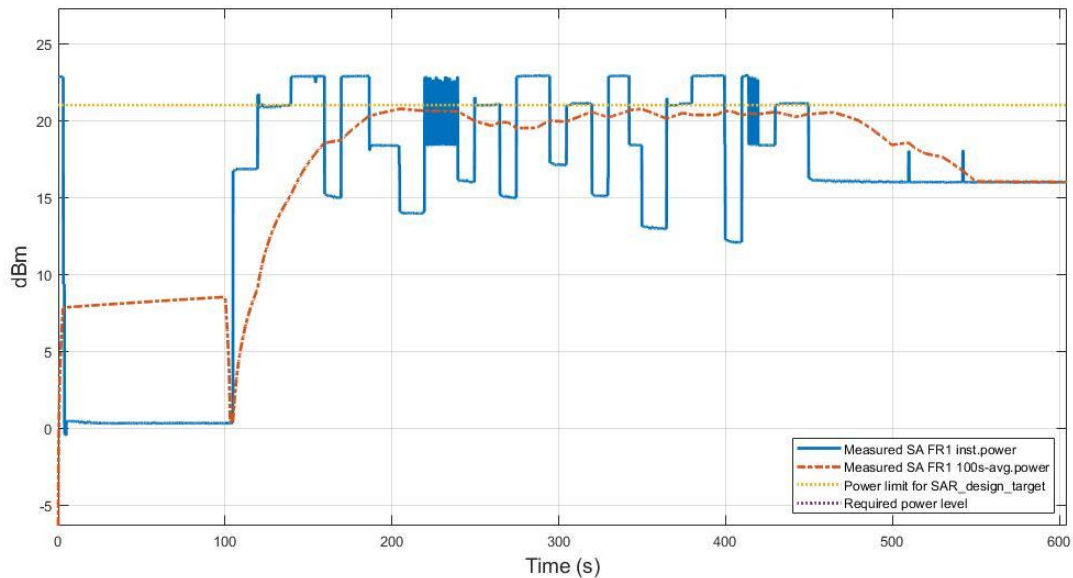

**Figure 7.3-21 Conducted Tx power for SA FR1 n41 in TC04**


Figure 7.3-21 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-21, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-22 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

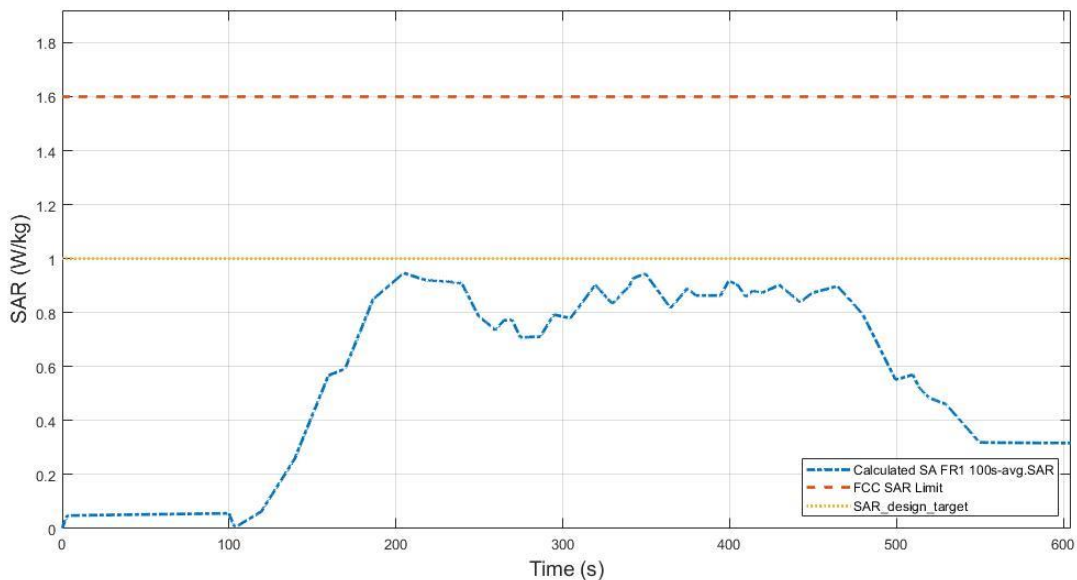

**Figure 7.3-22 Total time-averaged SAR in TC04**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.946 W/kg
Device uncertainty	1 dB

**TC04: SA\_FR1\_Time\_Varying\_Tx\_Power\_Case\_2 [n48]**

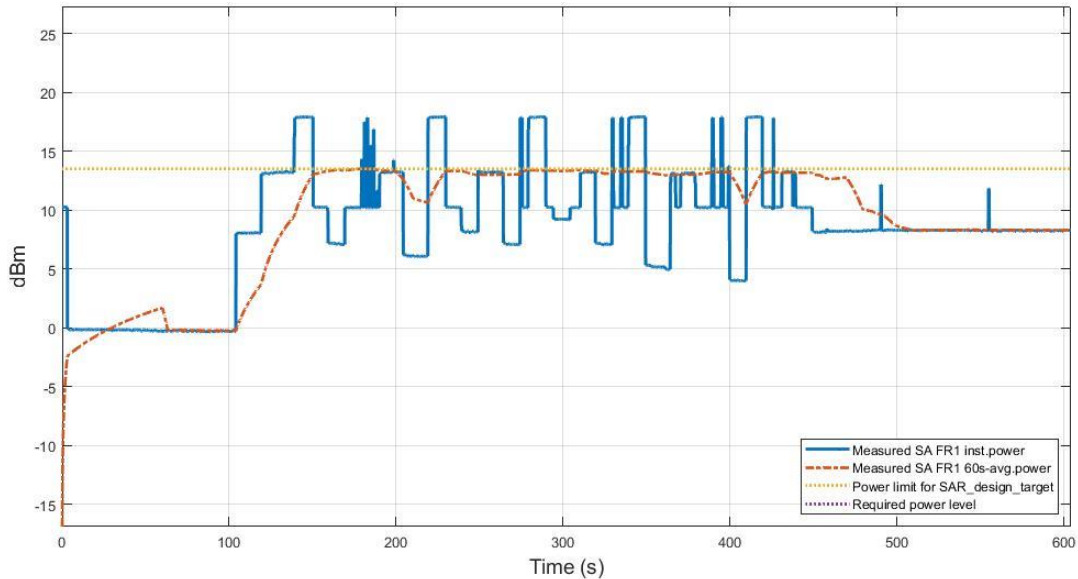

**Figure 7.3-23 Conducted Tx power for SA FR1 n48 in TC04**

Figure 7.3-23 shows the instantaneous and time-averaged Tx power for this test. As shown in Figure 7.3-23, it is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.3-24 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg.

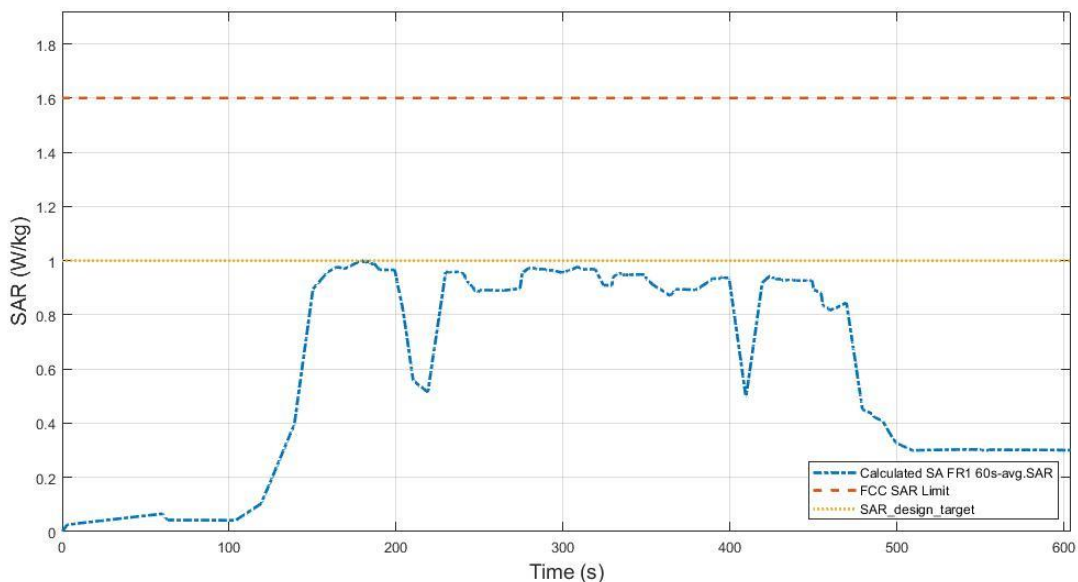

**Figure 7.3-24 Total time-averaged SAR in TC04**

FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (blue curve)	1.002 W/kg
Device uncertainty	1 dB

### 7.4 Change in call test results

The test results in this section are obtained following the procedure in Section 4.3.2. The test case corresponds to TC#5 in Table 7.2.1.

#### TC05: LTE\_Call\_Disconnect\_Reestablishment

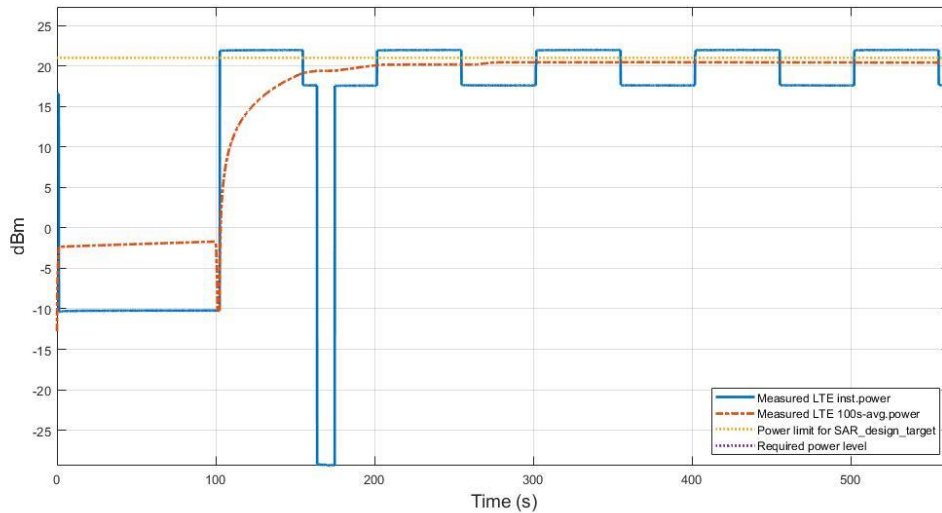


Figure 7.4-1 Conducted Tx power in Call\_Disconnect\_Reestablishment LTE Band 7 case TC05


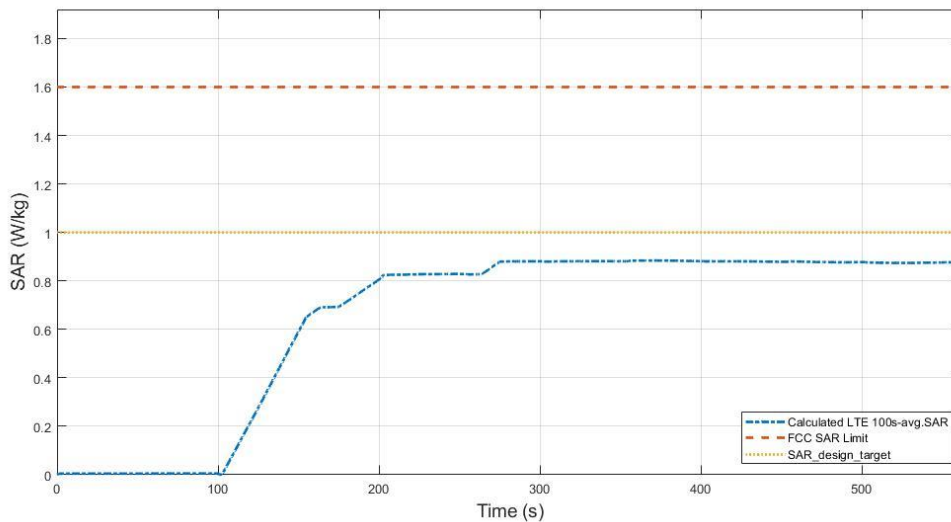


Figure 7.4-1 shows the instantaneous and time-averaged Tx power for this test. The call disconnected around 160s and resumed after 10s. It is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of P<sub>limit</sub>. Figure 7.4-2 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg. Looking at the results, it can be seen that even if transmission is stopped due to a call drop, the SAR value measured for a period of time window is stored in the window section and is continuously checked.


Figure 7.4-2 Conducted Tx power in Call\_Disconnect\_Re-establishment LTE Band 7 case TC05

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.884 W/kg
Device uncertainty	1 dB

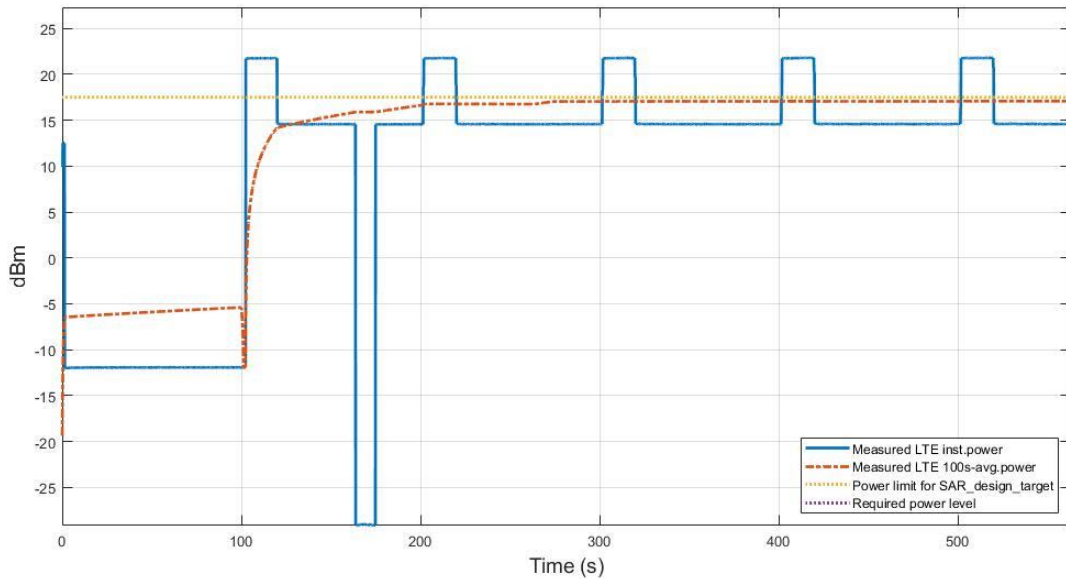


**Figure 7.4-3 Conducted Tx power in Call\_Disconnect\_Re-establishment LTE Band 41 case TC05**

Figure 7.4-3 shows the instantaneous and time-averaged Tx power for this test. The call disconnected around 160s and resumed after 10s. It is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of Plimit. Figure 7.4-4 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg. Looking at the results, it can be seen that even if transmission is stopped due to a call drop, the SAR value measured for a period of time window is stored in the window section and is continuously checked.

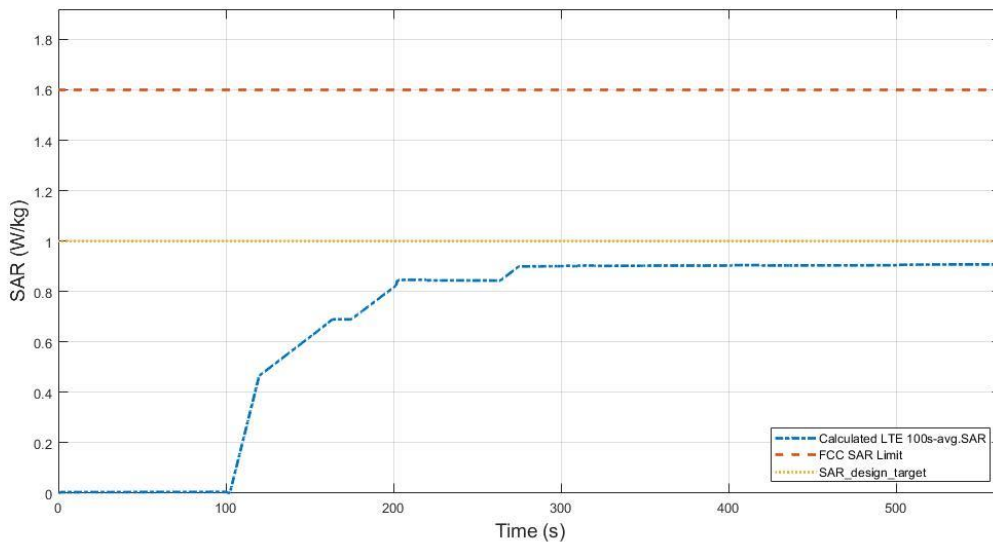


**Figure 7.4-4 Conducted Tx power in Call\_Disconnect\_Re-establishment LTE Band 41 case TC05**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.908 W/kg
Device uncertainty	1 dB

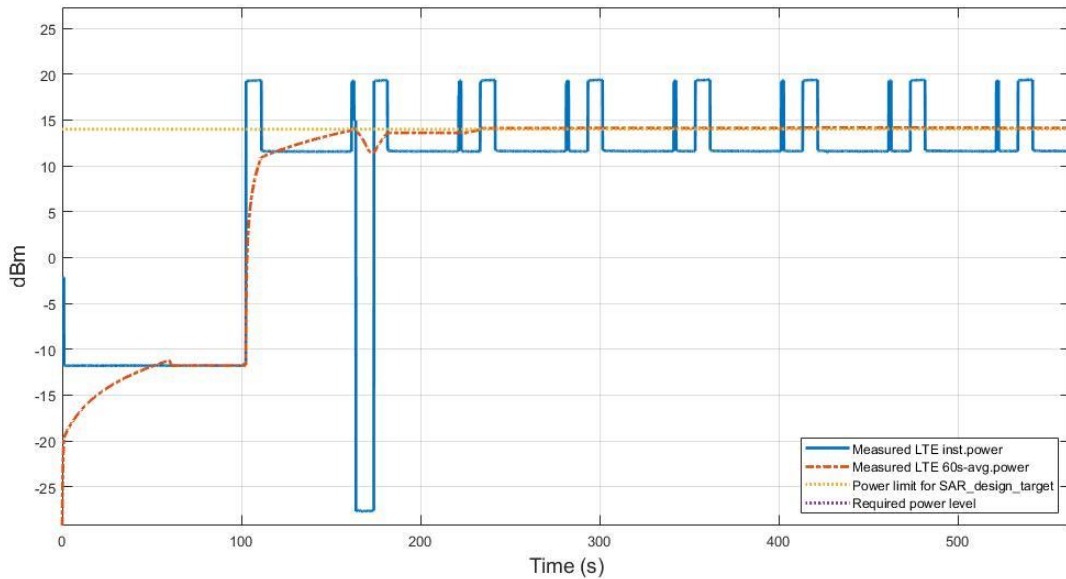

**Figure 7.4-5 Conducted Tx power in Call\_Disconnect\_Re-establishment LTE Band 48 case TC05**

Figure 7.4-5 shows the instantaneous and time-averaged Tx power for this test. The call disconnected around 160s and resumed after 10s. It is confirmed for time-average Tx power that the FCC limit was not exceeded, and that the averaged Tx power is lower than the value of Plimit. Figure 7.4-6 shows the plot of calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/kg. Looking at the results, it can be seen that even if transmission is stopped due to a call drop, the SAR value measured for a period of time window is stored in the window section and is continuously checked.

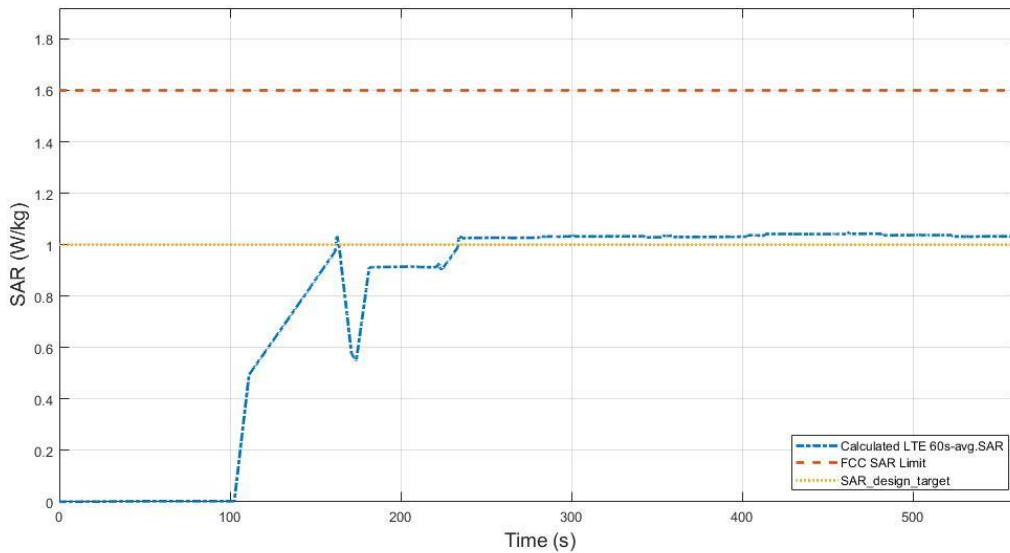


**Figure 7.4-4 Conducted Tx power in Call\_Disconnect\_Re-establishment LTE Band 48 case TC05**

FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (blue curve)	1.047 W/kg
Device uncertainty	1 dB

**7.5 Re-selection in call test results**


The test results in this section are obtained following the procedure in Section 4.3.4. The test cases correspond to TC#6 in Table 7.2.1.

**TC06: FR1 to LTE IRAT Re-selection**

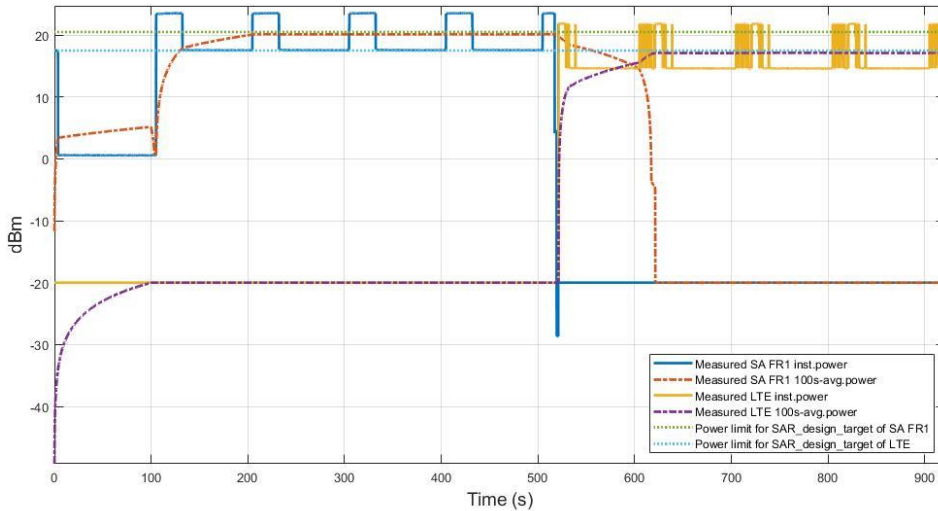

**Figure 7.5-1 Conducted Tx power for SAR IRAT re-selection in test TC06 [n25 to LTE Band 41]**


Figure 7.5-1 shows the instantaneous and time-averaged conducted Tx power for both LTE Band 41 and NR FR1 Band n25 for the duration of the test. Around time stamp of ~510s, a RAT re-selection from NR Band n25 to LTE Band 41 was executed, resulting in reduction of time-averaged power of Band 41 and simultaneous increase in time-averaged power of Band n25. Figure 7.5-2 shows the time-averaged 1gSAR value for each of LTE Band 41 and NR FR1 Band n25, as well as the total SAR value. We can see that the total 1gSAR is higher during the band transitions, but is always under the total FCC limit of 1.6W/kg.

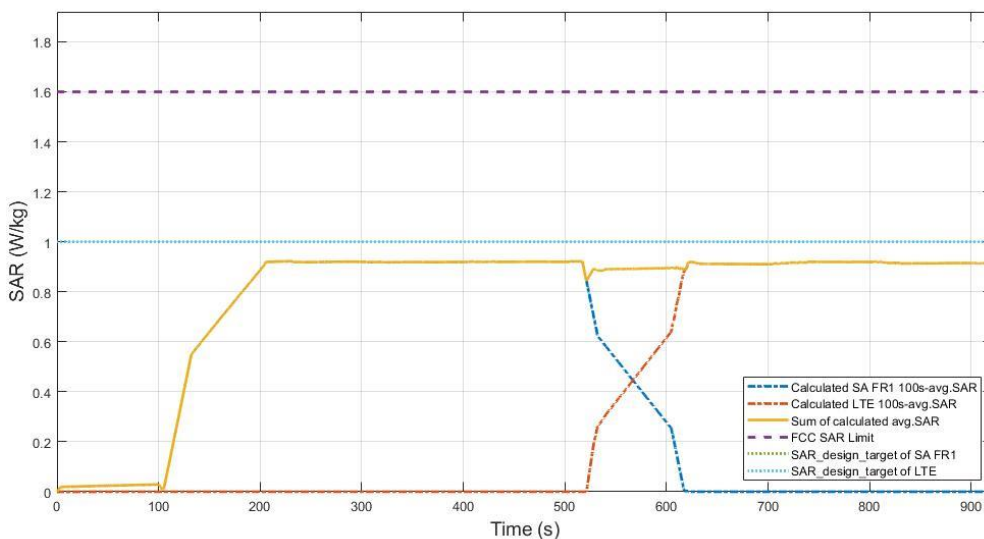

**Figure 7.5-2 Conducted Tx power for SAR IRAT re-selection in test TC06**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (yellow curve)	0.922 W/kg
Device uncertainty	1 dB



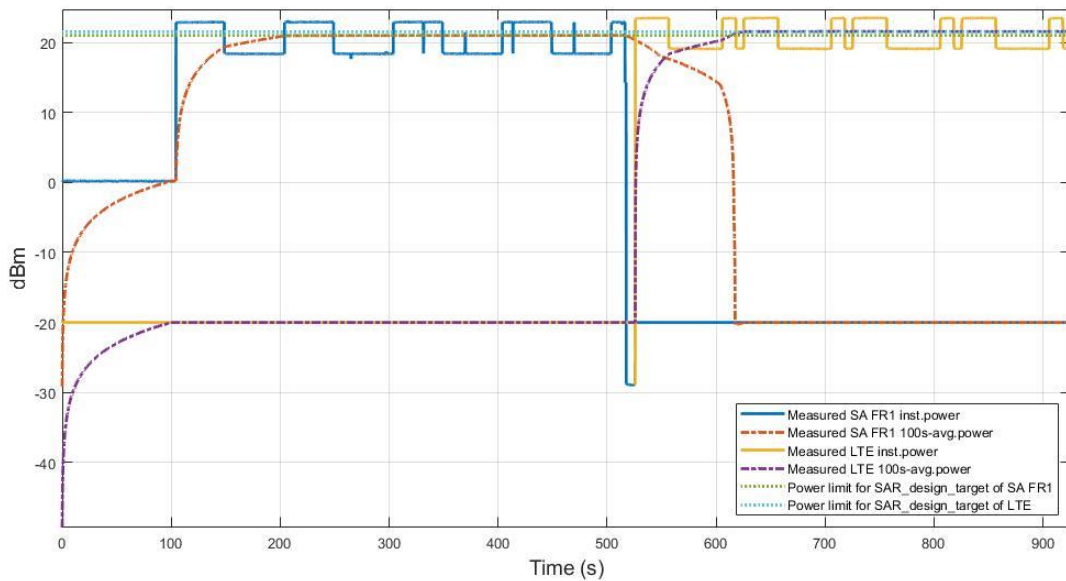


**Figure 7.5-3 Conducted Tx power for SAR IRAT re-selection in test TC06 [n41 to LTE Band 66]**

Figure 7.5-3 shows the instantaneous and time-averaged conducted Tx power for both LTE Band 66 and NR FR1 Band n41 for the duration of the test. Around time stamp of ~510s, a RAT re-selection from NR Band 41 to LTE Band 66 was executed, resulting in reduction of time-averaged power of Band 66 and simultaneous increase in time-averaged power of Band n41. Figure 7.5-4 shows the time-averaged 1gSAR value for each of LTE Band 66 and NR FR1 Band n41, as well as the total SAR value. We can see that the total 1gSAR is higher during the band transitions, but is always under the total FCC limit of 1.6W/kg.

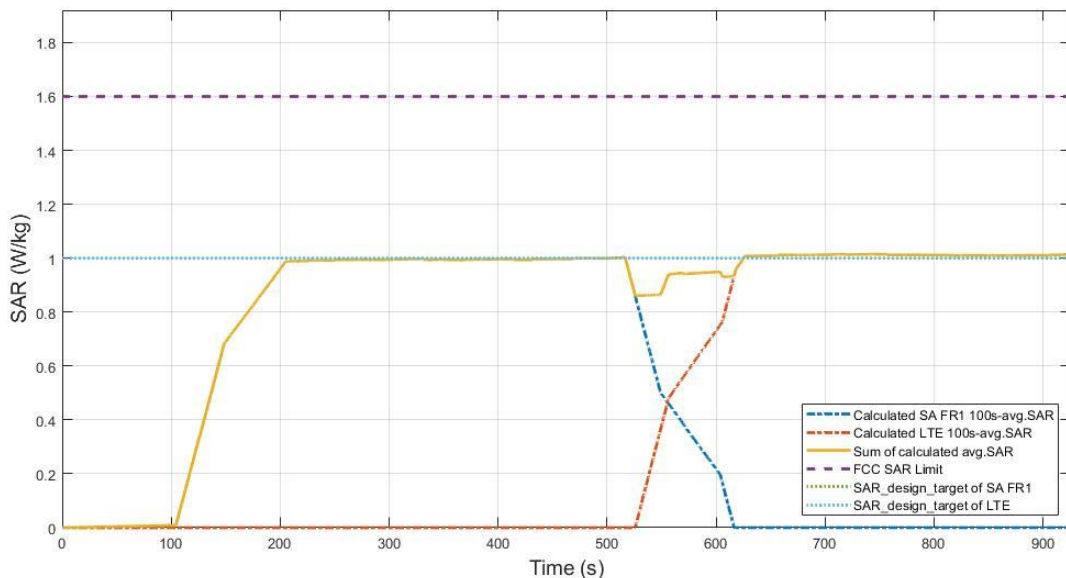


**Figure 7.5-4 Conducted Tx power for SAR IRAT re-selection in test TC06**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (yellow curve)	1.015 W/kg
Device uncertainty	1 dB

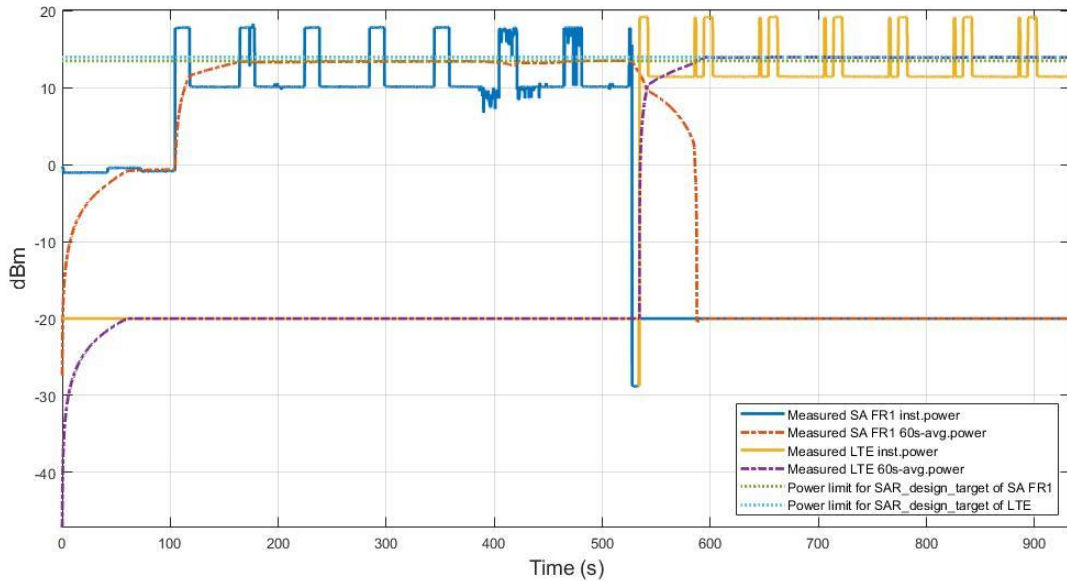

**Figure 7.5-5 Conducted Tx power for SAR IRAT re-selection in test TC06 [n48 to LTE Band 48]**

Figure 7.5-5 shows the instantaneous and time-averaged conducted Tx power for both LTE Band 48 and NR FR1 Band n48 for the duration of the test. Around time stamp of ~510s, a RAT re-selection from NR Band 48 to LTE Band 48 was executed, resulting in reduction of time-averaged power of Band 48 and simultaneous increase in time-averaged power of Band n48. Figure 7.5-6 shows the time-averaged 1gSAR value for each of LTE Band 48 and NR FR1 Band n48, as well as the total SAR value. We can see that the total 1gSAR is higher during the band transitions, but is always under the total FCC limit of 1.6W/kg.

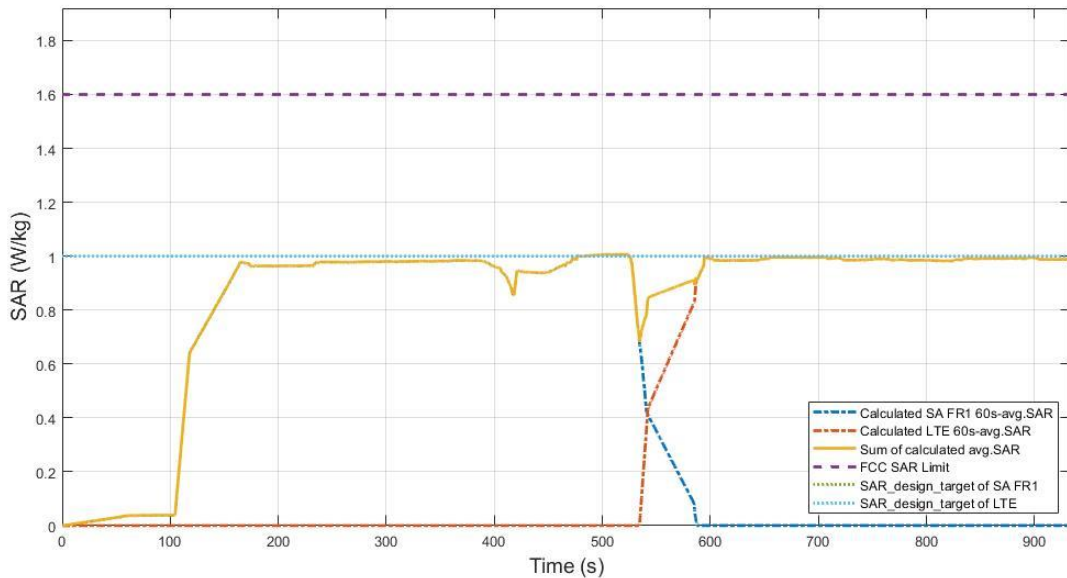


**Figure 7.5-6 Conducted Tx power for SAR IRAT re-selection in test TC06**

FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (yellow curve)	1.007 W/kg
Device uncertainty	1 dB

### 7.6 Switch in SAR exposure test results


The test results in this section are obtained following the procedure in Section 4.3.6 The test cases correspond to TC#7 in Table 7.2.1.

#### TC07: NSA\_FR1\_Dominant\_Power\_Switching

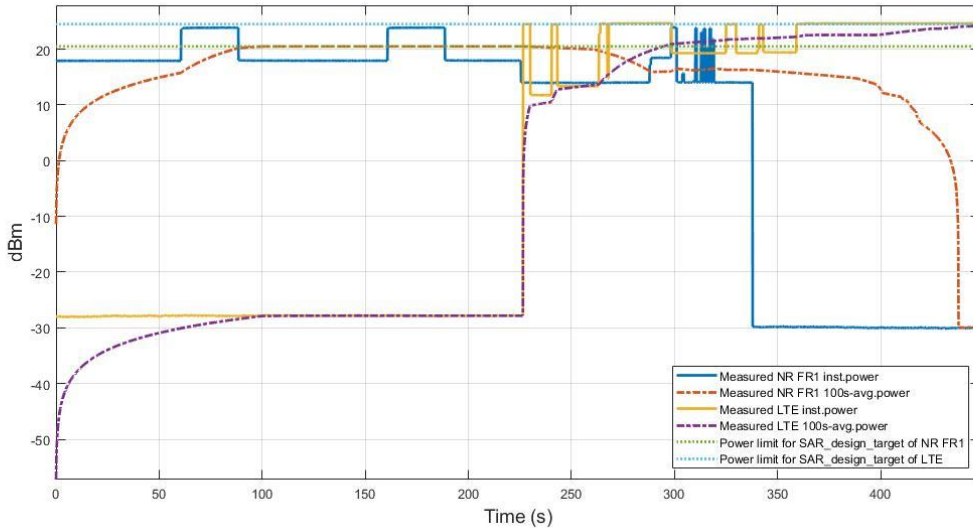


**Figure 7.6-1 Time average SAR of LTE Band 12 and FR1 n25 EN-DC case**

Figure 7.6-1 shows the instantaneous and time-averaged Tx power for both LTE band B12 and NR FR1 band n25 versus time. When both LTE and FR1 operate, the SAR value was the highest instantaneously, but it can be seen that sum of average power in LTE and FR1 decreases again as soon as it is turned off. Figure 7.6-2 shows the computed time-averaged SAR value for LTE and FR1 as well as the sum. It was confirmed that algorithm operated under the total SAR design target limit of 1W/kg, while also being under the FCC limit of 1.6W/kg at all times. After the operation of FR1 is turned off, it can also be seen that the average power of LTE increases.

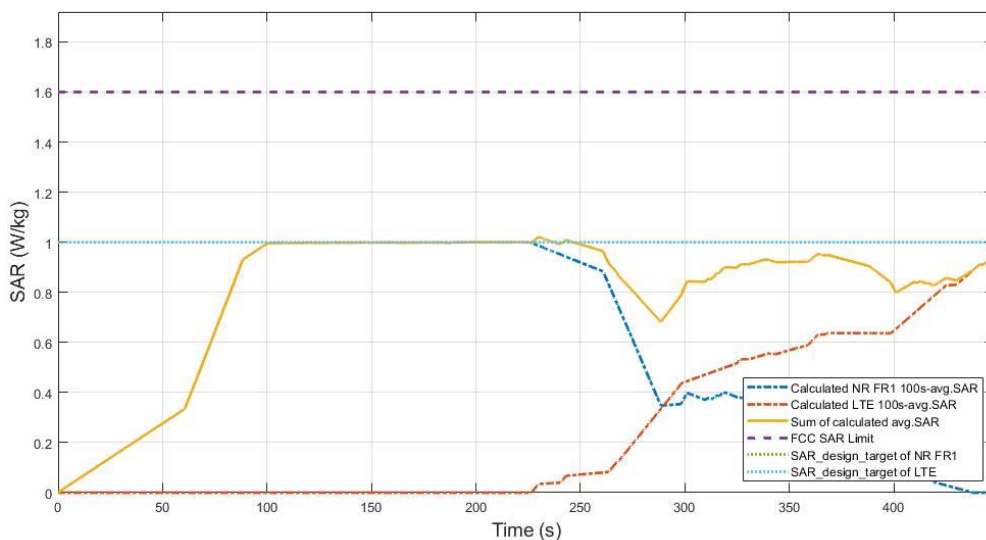


**Figure 7.6-2 Total time-averaged SAR in TC07**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (yellow curve)	1.021 W/kg
Device uncertainty	1 dB

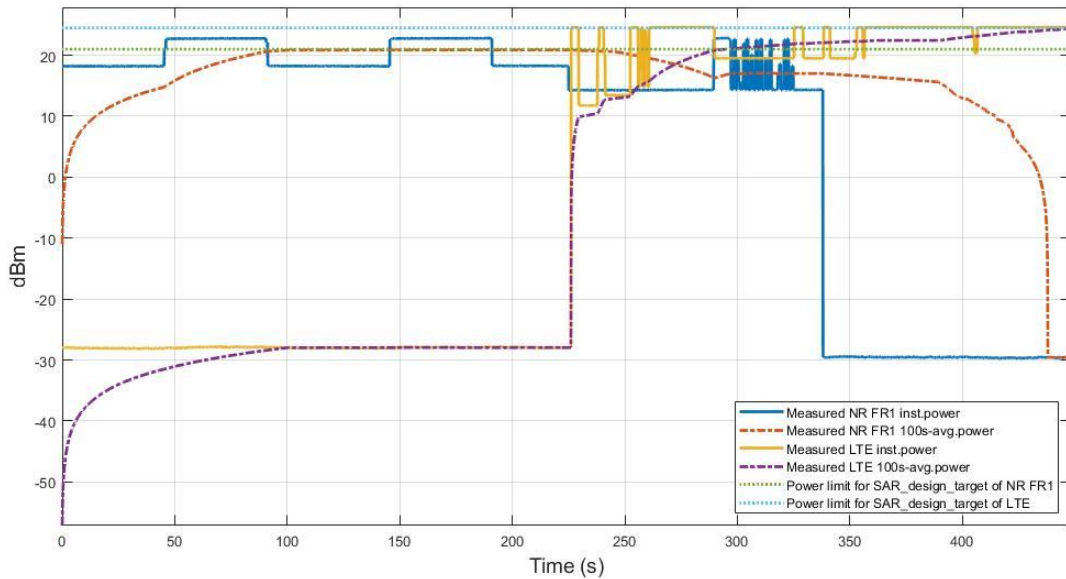

**Figure 7.6-3 Time average SAR of LTE Band 12 and FR1 n41 EN-DC case**

Figure 7.6-3 shows the instantaneous and time-averaged Tx power for both LTE band B12 and NR FR1 band n41 versus time. When both LTE and FR1 operate, the SAR value was the highest instantaneously, but it can be seen that sum of average power in LTE and FR1 decreases again as soon as it is turned off. Figure 7.6-4 shows the computed time-averaged SAR value for LTE and FR1 as well as the sum. It was confirmed that algorithm operated under the total SAR design target limit of 1W/kg, while also being under the FCC limit of 1.6W/kg at all times. After the operation of FR1 is turned off, it can also be seen that the average power of LTE increases.

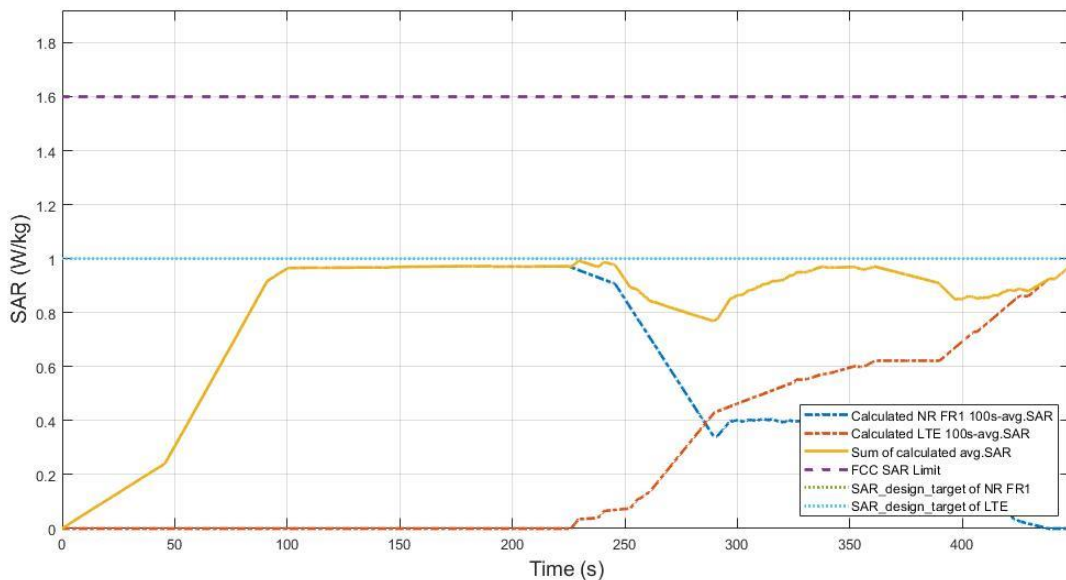


**Figure 7.6-4 Total time-averaged SAR in TC07**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (yellow curve)	0.992 W/kg
Device uncertainty	1 dB

### 7.7 Change in RSI value results


The test results in this section are obtained following the procedure in Section 4.3.5. The test cases correspond to TC#08 in Table 7.2.1.

#### TC08: SA\_FR1\_RF\_SAR\_Index\_Change

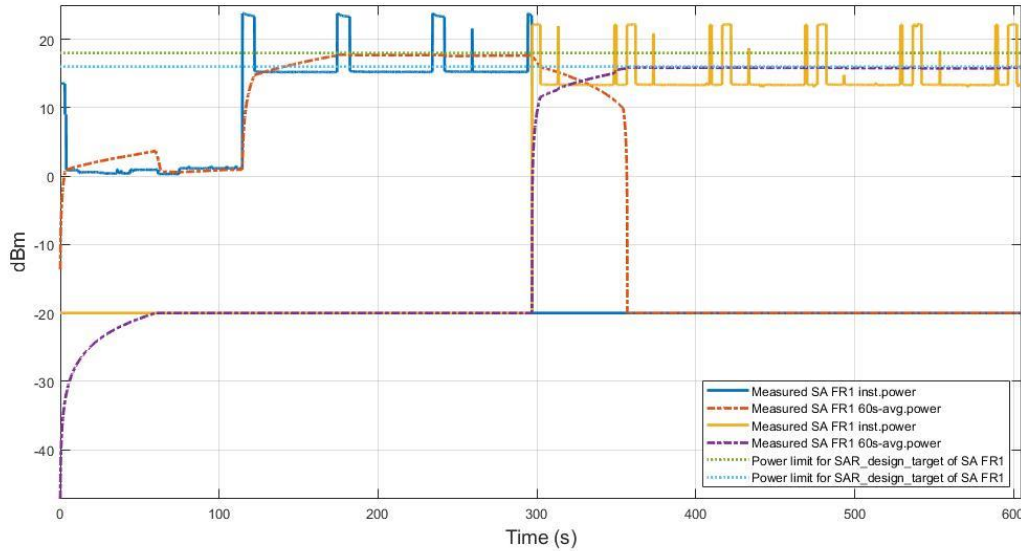

**Figure 7.7-1 Conducted Tx power for SAR RSI Change FR1 n77 in test TC8**

Figure 7.7-1 shows the instantaneous and time-averaged conducted Tx power for both SA FR1 Band n77 for the duration of the test. Around time stamp of ~310s, the RFI value is changed from low RSI with Plimit of 18dBm to high RSI with Plimit of 16 dBm, resulting in reduction of target time-averaged power of SA FR1 Band n77. It can be seen that Plimit value of high RSI is lower than that of low RSI, so in high RSI region, more Tx power is limited compared to low RSI region. Figure 7.7-2 shows the time-averaged 1gSAR value for each of low and high RSI value, as well as the total SAR value. We can see that the total 1gSAR is always under the total FCC limit of 1.6W/Kg.

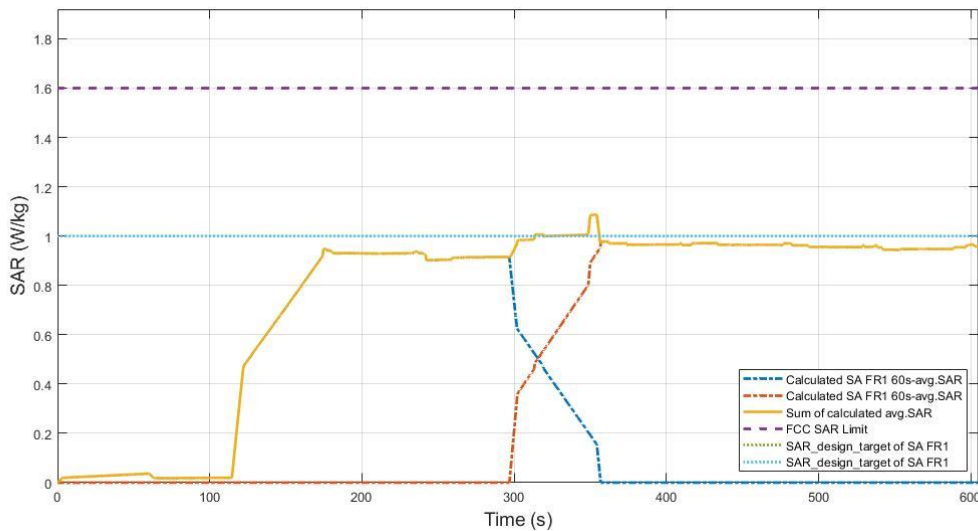


**Figure 7.7-2 Total time-averaged SAR FR1 n77 in TC8**

FCC 1gSAR limit	1.6 W/kg
Max 60s-time average 1gSAR (yellow curve)	1.087 W/kg
Device uncertainty	1 dB

### 7.8 LTE Uplink CA


The test results in this section are obtained following the procedure in Section 4.3.7. The test cases correspond to TC#9 in Table 7.2.1.

#### TC09: LTE\_UL\_CA

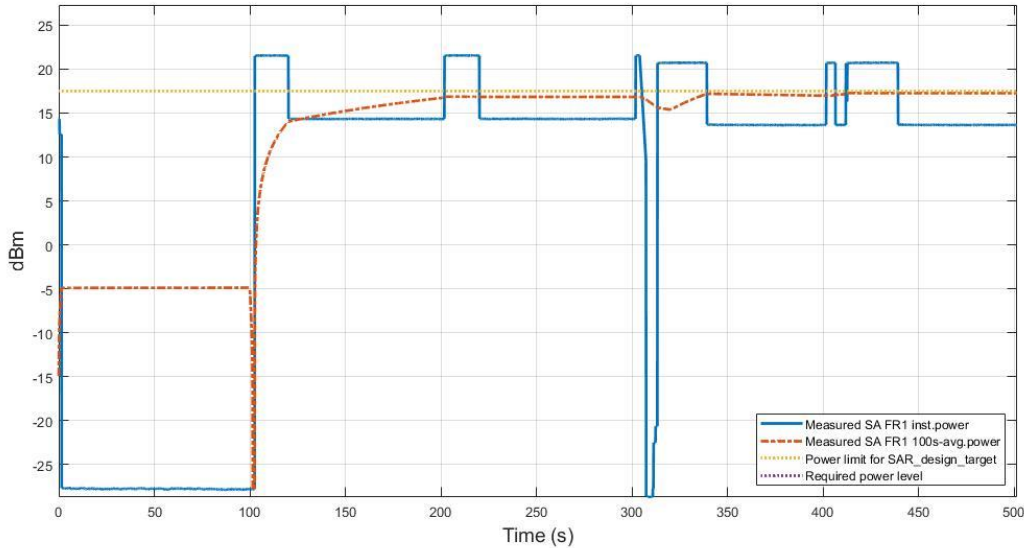

**Figure 7.8-1 Conducted Transmitted Power of test TC9 [LTE Band 41]**

Figure 7.8-1 shows the conducted Tx power plot with calculated time-averaged power based on the measured instantaneous Tx power with 1gSAR FCC Limit value. The setting value and measured values are described in Table 7.2-1. After a 200s seconds from the start a single CC is transmitted. Next after 110s, an intra-band CA is configured (CA\_41C) where a new CC is added and the transmission is continued for another 200s. As shown in Figure 7.8-1, the total power of the two CC is kept almost the same as in the single CC transmission. Consequently, the average SAR in Figure 7.8-2 is below 1W/kg which is below the FCC limit of 1.6W/kg.

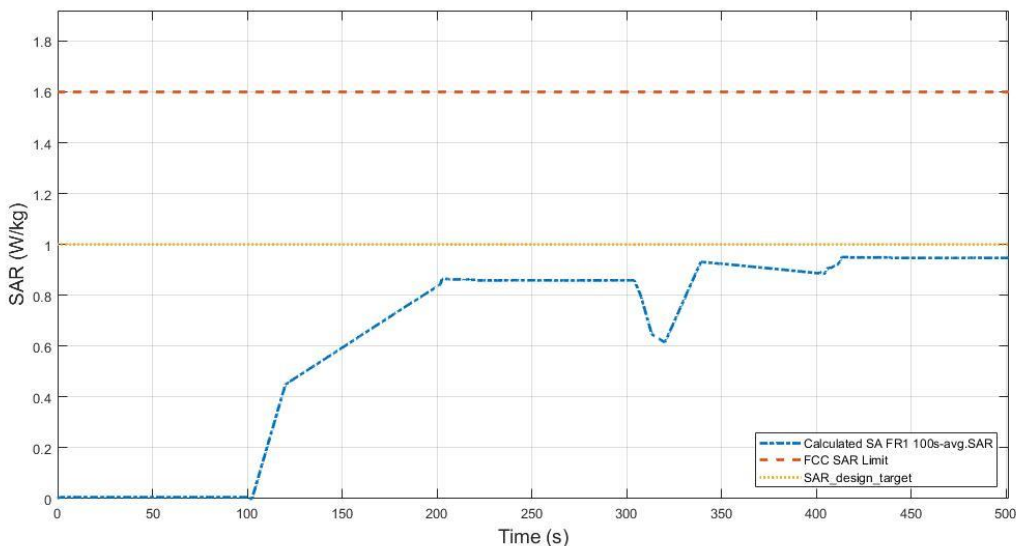


**Figure 7.8-2 Total time-averaged SAR in TC9**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.950 W/kg
Device uncertainty	1 dB

### 7.9 WCDMA Time-varying Tx power


The test results in this section are obtained following the procedure in Section 4.3.8. The test cases correspond to TC#10 in Table 7.2.1.

#### TC10-1: WCDMA\_Time\_varying\_Tx\_power\_Case1

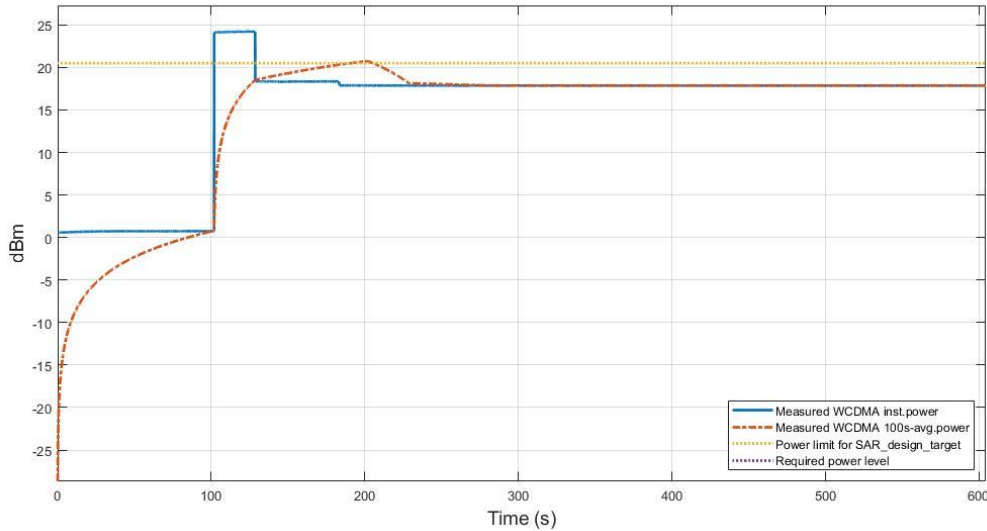

**Figure 7.9-1 Conducted Transmitted power for WCDMA Band 2 in Test TC10-1**


Figure 7.9-1 shows the conducted Tx power plot with calculated time-averaged power based on the measured instantaneous Tx power with 1gSAR FCC Limit value. At the beginning a 0dBm power is requested for 100s, so the transmission is kept around this level. After those 100s a maximum power is requested, which yields the TAS to operate between that max power and a lower level since the Plimit is below the maximum power. After 80s, a power of half the Plimit is requested, so the transmission is kept fixed at that level. Consequently, the total average SAR shown in Figure 7.9-2 is about 1W/kg which is below the FCC limit of 1.6W/kg.

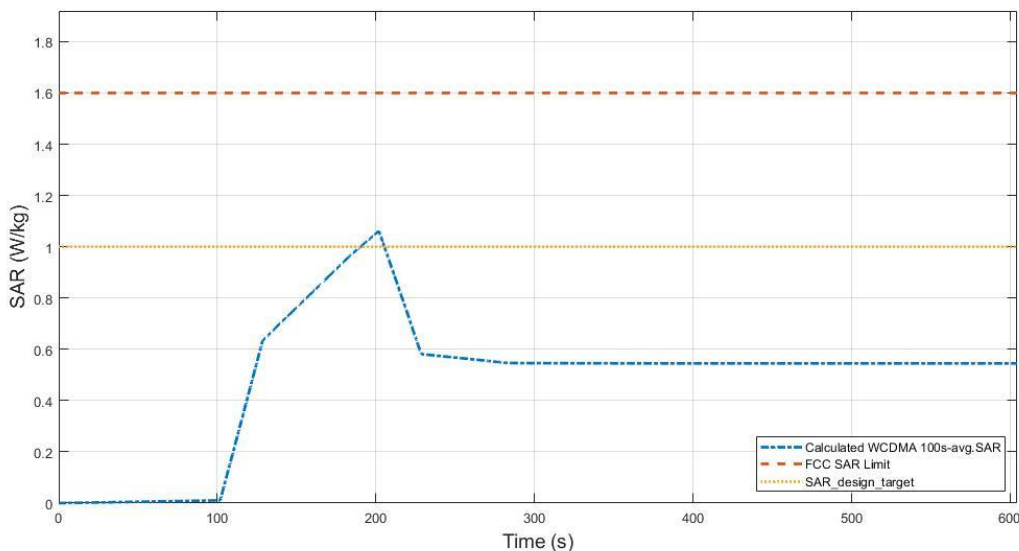

**Figure 7.9-2 Total time-averaged SAR in TC10-1**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	1.061 W/kg
Device uncertainty	1 dB

**TC10-2: WCDMA\_Time\_varying\_Tx\_power\_Case2**

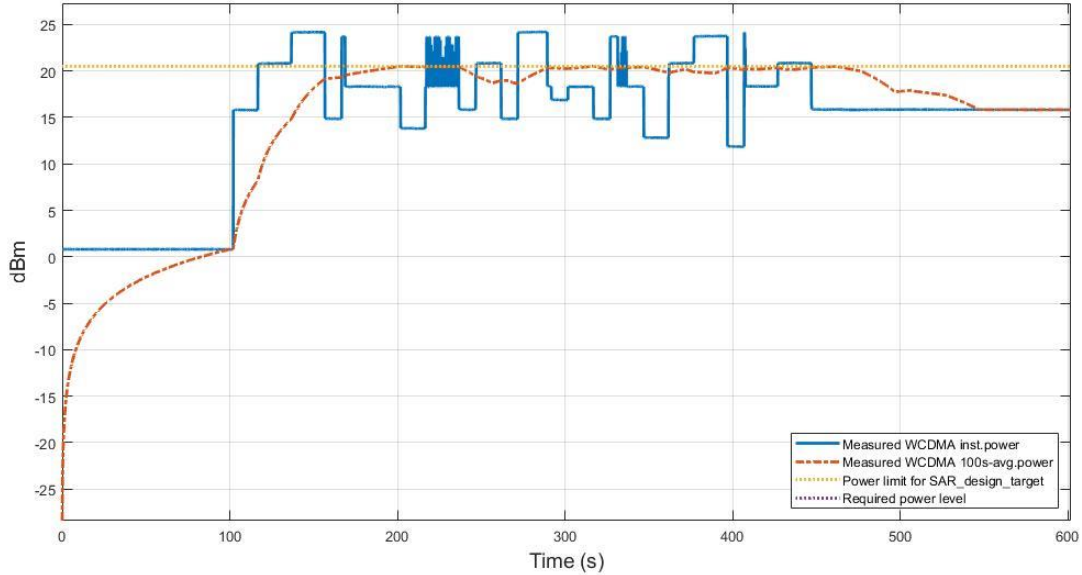

**Figure 7.9-3 Conducted Transmitted power for WCDMA Band 2 in Test TC10-2**

Figure 7.9-3 shows the instantaneous and time-averaged Tx power with test sequence B for WCDMA Band 2. In addition, Figure 7.9-3 shows that the moving-averaged Tx power is below the value of the targeted Plimit. Figure 7.9-4 shows the calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/Kg.

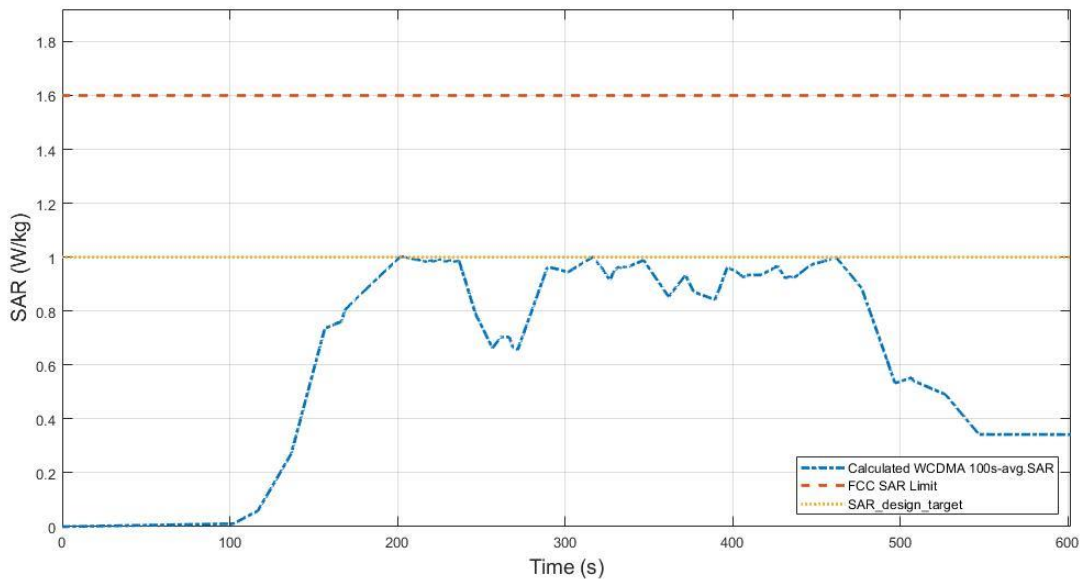

**Figure 7.9-2 Total time-averaged SAR in TC10-2**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	1.003 W/kg
Device uncertainty	1 dB



### 7.10 2G Time-varying Tx power


The test results in this section are obtained following the procedure in Section 4.3.9. The test cases correspond to TC#11-1 in Table 7.2.1.

#### TC11-1: 2G\_Time\_varying\_Tx\_power\_Case1

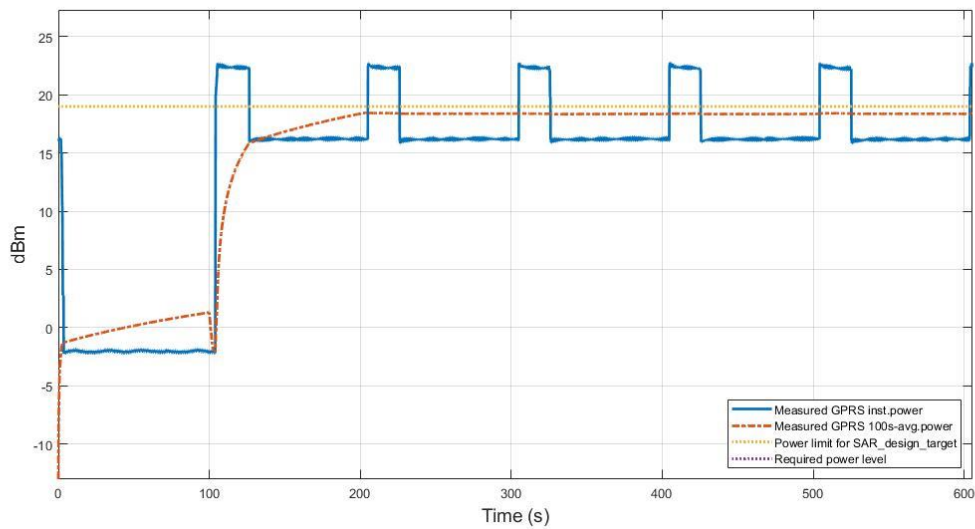

**Figure 7.10-1 Conducted Transmitted power for 2G in Test TC11-1 [GSM1900]**


Figure 7.10-1 shows the conducted Tx power plot with calculated time-averaged power based on the measured instantaneous Tx power with 1gSAR FCC Limit value. At the beginning a 0dBm power is requested for 100s, so the transmission is kept low around this level. After those 100s a maximum power is requested, which yields the TAS to operate between that max power and a lower level since the Plimit is below the maximum power and continues for 500s. Consequently, the total average SAR shown in Figure 7.10-2 is below 1W/kg which is below the FCC limit of 1.6W/kg.

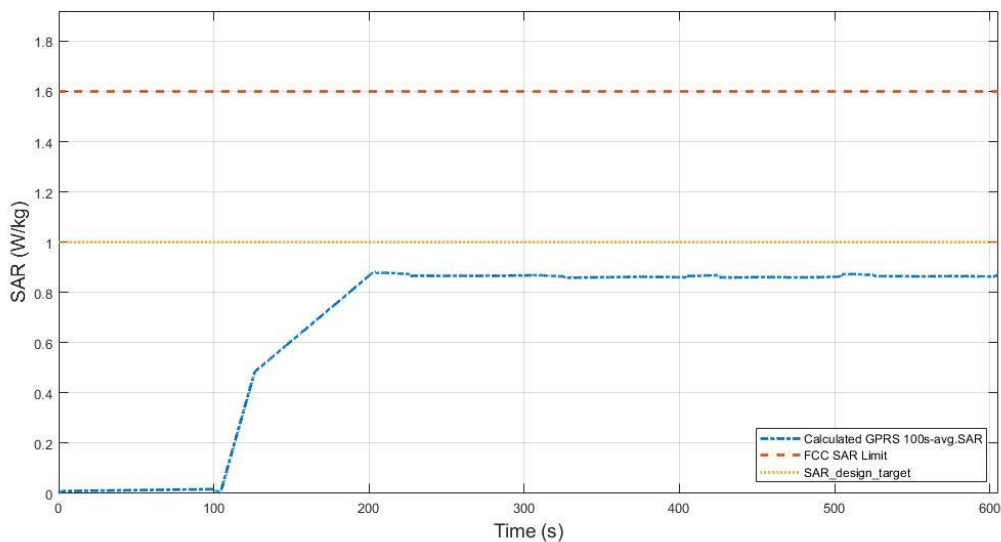

**Figure 7.10-2 Total time-averaged SAR in TC11-1**


FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.882 W/kg
Device uncertainty	1 dB

TC11-2: 2G\_Time\_varying\_Tx\_power\_Case2

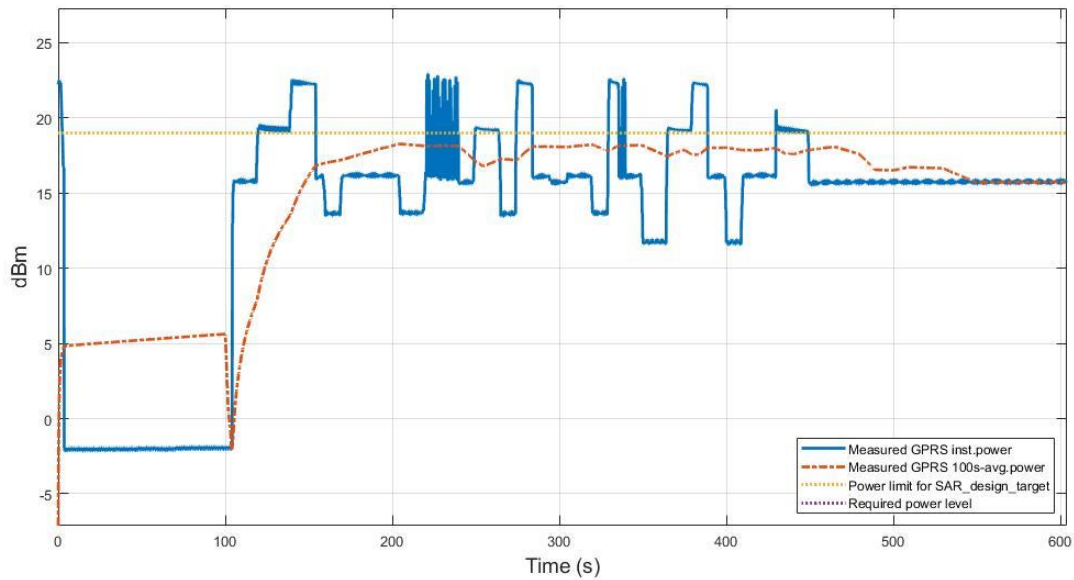

**Figure 7.10-3 Conducted Transmitted power for 2G in Test TC11-2 [GSM1900]**

Figure 7.10-3 shows the instantaneous and time-averaged Tx power with test sequence B for 2G (GSM1900). In addition, Figure 7.10-3 shows that the moving-averaged Tx power is below the value of the targeted Plimit. Figure 7.10-4 shows the calculated time-averaged 1gSAR for this test demonstrating that exposure is well below the FCC limit of 1.6W/Kg.

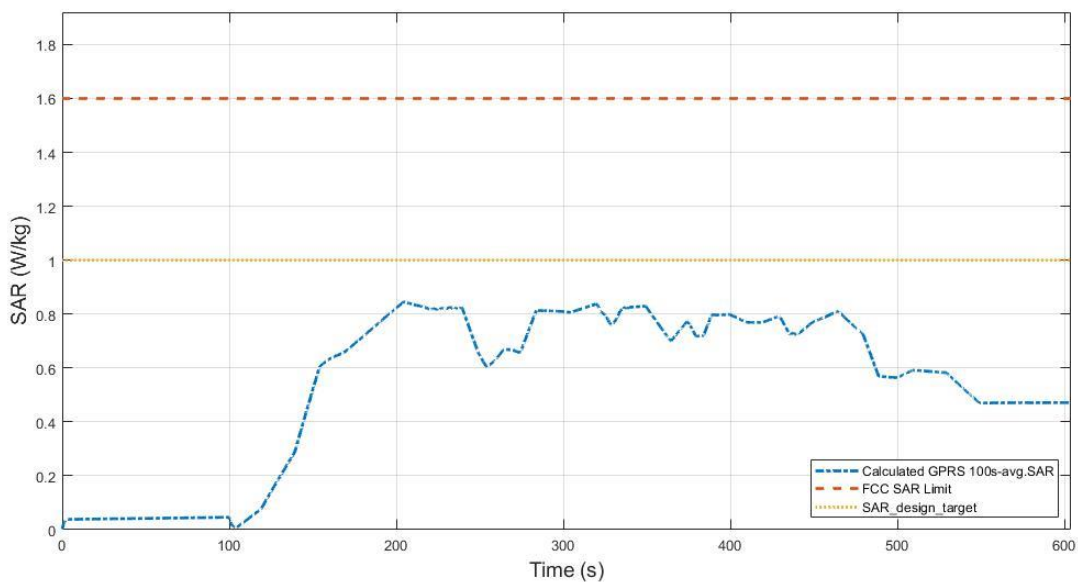


**Figure 7.10-4 Total time-averaged SAR in TC11-2**

FCC 1gSAR limit	1.6 W/kg
Max 100s-time average 1gSAR (blue curve)	0.845 W/kg
Device uncertainty	1 dB

### 7.11 Antenna switching with spatial TAS


The test results in this section are obtained following the procedure in Section 4.4.1. The test cases correspond to TC#12 in Table 7.2.1.

#### TC12: LTE\_Ant\_switching\_Spatial\_TAS

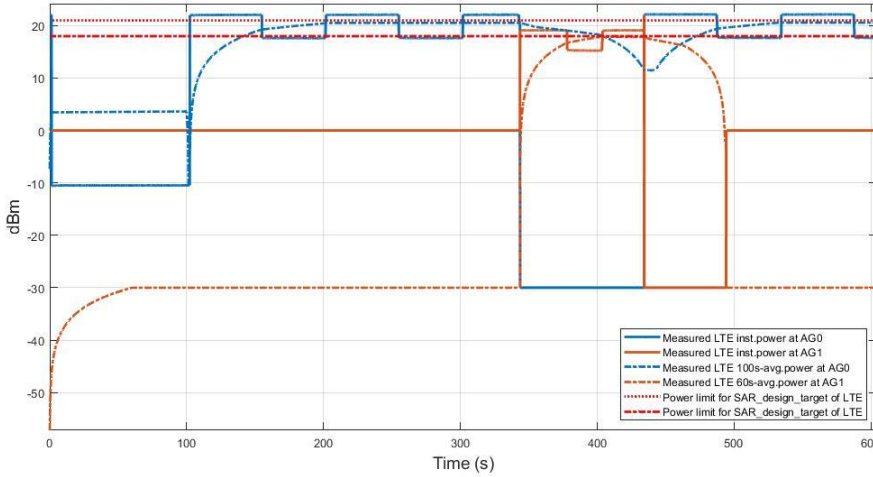

**Figure 7.11-1 Conducted Transmitted power for LTE Band 7 and LTE band 48 in Test TC12**

Figure 7.11-1 shows the instantaneous and time-averaged conducted Tx power at antenna (Main2) with LTE band B7 (AG0) and at antenna(Sub3) with LTE band B48 (AG1). Transmission is initialized on AG0 where it was set for very low power for ~100s. After that, a maximum power is requested and the TAS starts to cycle. After ~240s a band change happens to LTE B48 (AG1) which operates at antenna(Sub3) and an average maximum power is requested. Since the coupling between AG0 and AG1 is 0, then transmission at Antenna(Sub3) will start from maximum power regardless of the transmission at Antenna(Main2) and will continue transmission for ~90s. Next, another band change is done to the first band B7 and so an antenna switching to Antenna(Main2) happens where a maximum power is requested which yields a transmission at Pmax. Consequently, the total average SAR shown in Figure 7.11-2 at each antenna Group is below 1W/kg which is below the FCC limit of 1.6W/kg.

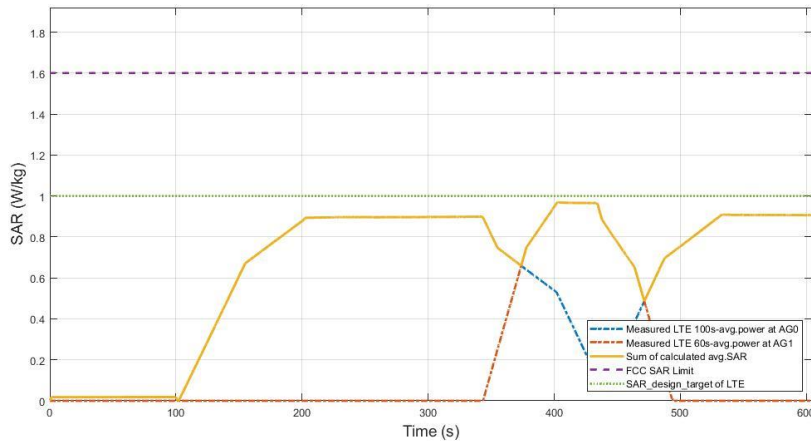


**Figure 7.11-2 Total time-averaged SAR in TC12**

FCC 1gSAR limit	1.6 W/kg
Sum of calculated average SAR (yellow curve)	0.971 W/kg
Device uncertainty	1 dB


The test results in this section are obtained following the procedure in Section 4.4.2. The test cases correspond to TC#12 in Table 7.2.1.

**TC12: SA\_FR1\_Ant\_switching\_Spatial\_TAS**

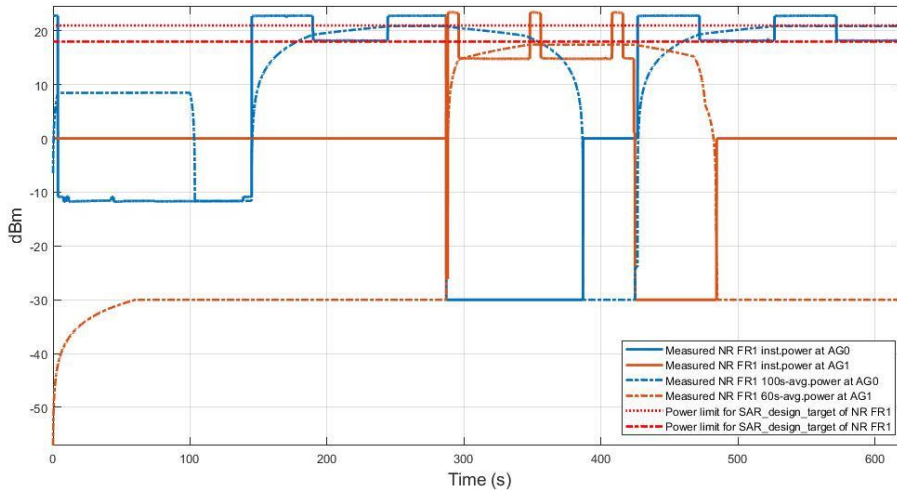

**Figure 7.11-3 Conducted Transmitted power for NR Band 41 and NR band 77 in Test TC12**

Figure 7.11-3 shows the instantaneous and time-averaged conducted Tx power at antenna(Main2) with SA FR1 band n41 (AG0) and at antenna(Sub3) with SA FR1 band n77 (AG1). Transmission is initialized on AG0 where it was set for very low power for ~140s. After that, a maximum power is requested and the TAS starts to cycle. After ~150s a band change happens to SA FR1 n77 (AG1) which operates at antenna(Sub3) and a maximum power is requested. Since the coupling between AG0 and AG1 is 0, then transmission at Antenna(Sub3) will start from maximum power regardless of the transmission at Antenna(main2) and will continue transmission for ~150s. Next, another band change is done to the first band n41 and so an antenna switching to Antenna (Main2) happens where a maximum power is requested. Consequently, the total average SAR shown in Figure 7.11-4 at each antenna Group is below 1W/kg which is below the FCC limit of 1.6W/kg.

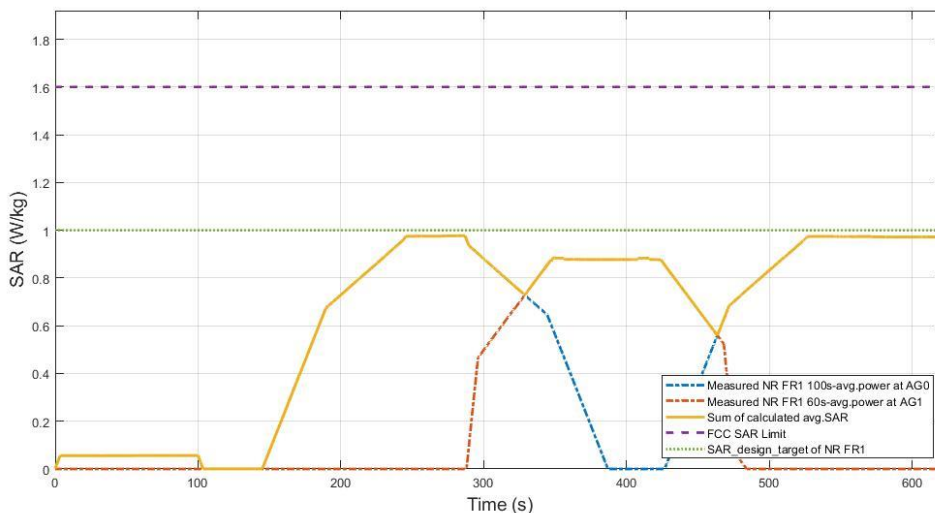


**Figure 7.11-4 Total time-averaged SAR in TC12**

FCC 1gSAR limit	1.6 W/kg
Sum of calculated average SAR (yellow curve)	0.977 W/kg
Device uncertainty	1 dB

**7.12 NSA with spatial TAS**


The test results in this section are obtained following the procedure in Section 4.4.3. The test cases correspond to TC#13 in Table 7.2.1.

**TC13: NSA\_Spatial\_TAS**

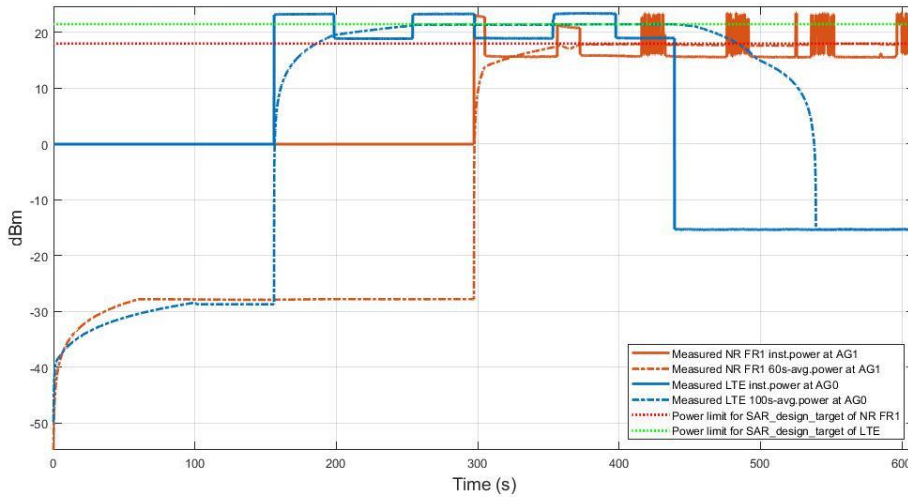


**Figure 7.12-1 Conducted Transmitted power for LTE Band 66 and NR band n77 in Test TC13**

Figure 7.12-1 shows the instantaneous and time-averaged conducted Tx power for a NSA operation where LTE is transmitting at antenna(Main2) band B66 (AG0) and FR1 at antenna(Sub3) with band n77 (AG1). After the ENDC connection establishment, Both LTE and FR1 are set to no transmission for ~150s. Next, a transmission starts with LTE Band 66 (AG0) requesting full max power and no transmission for FR1 and continue for ~140s. After that, a maximum power is requested for FR1 band n77 (AG1) and transmission is done on Antenna(Sub3) and continue for ~140s. Since both AGs are fully uncoupled, each RAT will operate with full Plimit. Next, The LTE transmission is down while FR1 continues transmission. Consequently, the total average SAR (100s average+60s average) is shown in Figure 7.14-2 at each antenna Group is about 1W/kg which is below the FCC limit of 1.6W/kg.

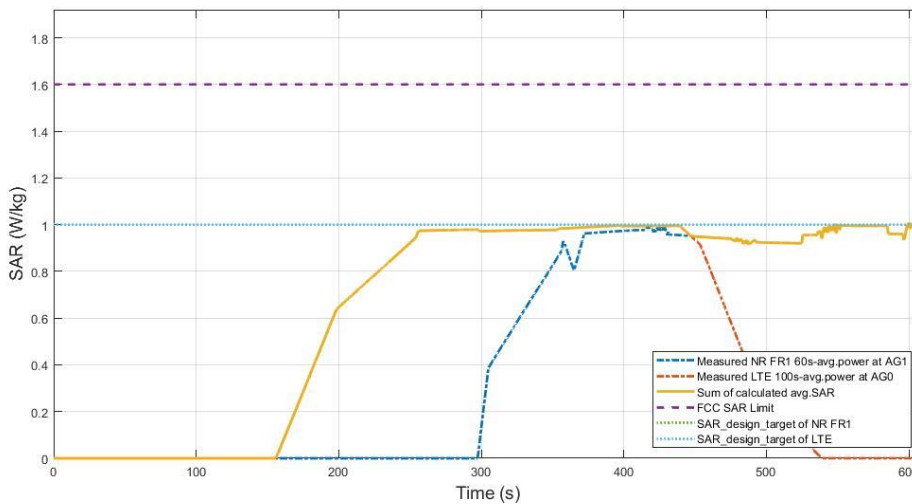


**Figure 7.12-2 Total time-averaged SAR in TC13**

FCC 1gSAR limit	1.6 W/kg
Sum of calculated average SAR (yellow curve)	1.001 W/kg
Device uncertainty	1 dB

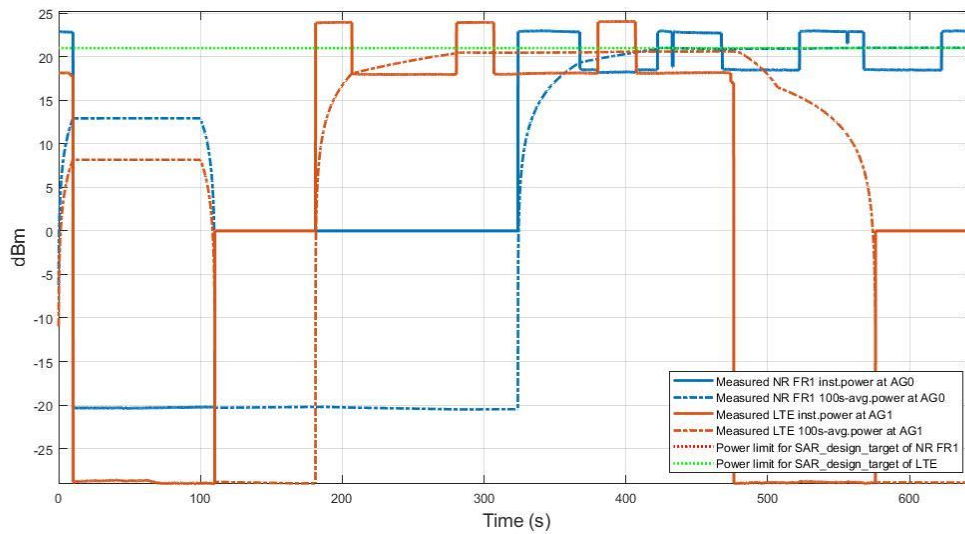

**Figure 7.12-3 Conducted Transmitted power for LTE Band 66 and NR band n41 in Test TC13**

Figure 7.12-3 shows the instantaneous and time-averaged conducted Tx power for a NSA operation where LTE is transmitting at antenna(Main3) band B66 (AG1) and FR1 at antenna(Main) with band n41 (AG0). After the ENDC connection establishment, Both LTE and FR1 are set to no transmission for ~150s. Next, a transmission starts with LTE Band 66 (AG1) requesting full max power and no transmission for FR1 and continue for ~140s. After that, a maximum power is requested for FR1 band n41 (AG0) and transmission is done on Antenna(main2) and continue for ~140s. Since both AGs are fully uncoupled, each RAT will operate with full Plimit. Next, The LTE transmission is down while FR1 continues transmission. Consequently, the total average SAR is shown in Figure 7.14-4 at each antenna Group is about 1W/kg which is below the FCC limit of 1.6W/kg.

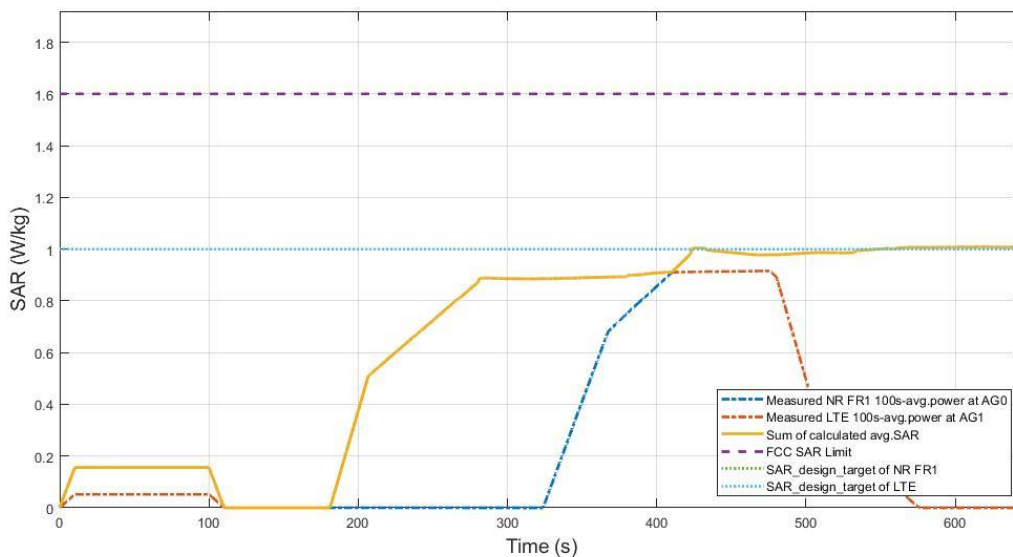


**Figure 7.12-4 Total time-averaged SAR in TC13**

FCC 1gSAR limit	1.6 W/kg
Sum of calculated average SAR (yellow curve)	1.008 W/kg
Device uncertainty	1 dB

**7.13 NSA antenna switching with spatial TAS**


The test results in this section are obtained following the procedure in Section 4.4.4. The test cases correspond to TC#14 in Table 7.2.1.

**TC14: NSA\_Ant\_switching\_Spatial\_TAS**

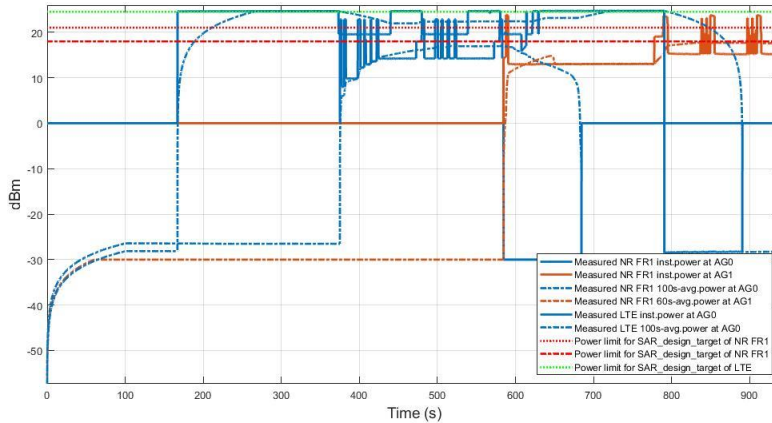

**Figure 7.13-1 Conducted Transmitted power for LTE Band 12 and NR band n41, n77 in Test TC14**

Figure 7.13-1 shows the instantaneous and time-averaged conducted Tx power for a NSA operation where LTE is transmitting at antenna(Main1) band B12 (AG0) and FR1 at antennas(Main2, Sub3) with bands n41(AG0) and n77 (AG1) respectively. After the ENDC connection establishment, Both LTE band 12(Main1) and FR1 n41(Main2) are set to no transmission for ~150s. Next, a transmission starts with LTE requesting full max power and no transmission for FR1 and continue for ~200s. After that, a maximum power is requested for FR1 band n41 and transmission is done on Antenna(Main2) and continue for ~200s. Since LTE Band 12 and FR1 n41 are fully coupled, each RAT will operate, the SAR value was the highest instantaneously, but it can be seen that sum of average power in LTE Band 12(AG0) and FR1 n41(AG0) decreases again as soon as it is turned off. Next, FR1 will switch to band n77 (AG1) where FR1 requests maximum power and transmission continues for ~200s. Next, The LTE transmission is down while FR1 continues transmission. Consequently, the total average SAR (100s average+60s average) shown in Figure 7.13-2 at each antenna group is about 1W/kg which is below the FCC limit of 1.6W/kg.

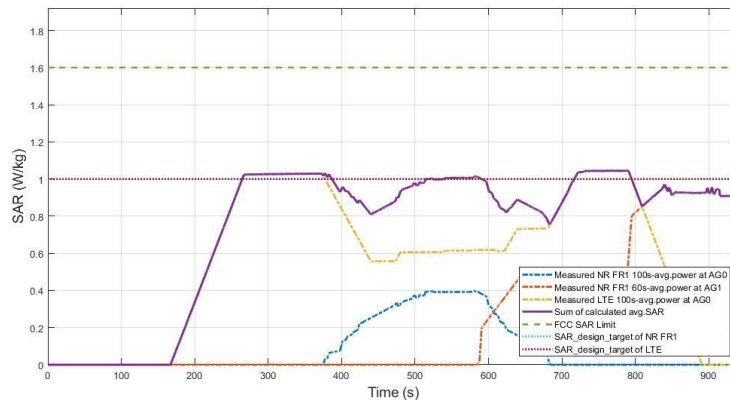

**Figure 7.13-2 Total time-averaged SAR in TC14**

FCC 1gSAR limit	1.6 W/kg
Sum of calculated average SAR (purple curve)	1.045
Device uncertainty	1 dB

## 8. Conclusions

Samsung Time-Averaging SAR (TAS) feature employed in Samsung Mobile Phone(FCC A3LSMA256U) has been validated through conducted power measurement as well as SAR measurement. As demonstrated in this report, TAS feature limit the transmit power effectively and shows that SAR value does not exceed 1.6 W/kg for all the transmission scenarios.



## 9. Equipment List

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
Narda	Directional Coupler / 4216-10	01490	11/29/2022	Annual	11/29/2023
Narda	Directional Coupler / 4216-10	01489	11/29/2022	Annual	11/29/2023
HP	Power Divider/11636B	50659	05/26/2023	Annual	05/26/2024
HP	Power Divider/11636B	58698	01/26/2023	Annual	01/26/2024
RFCOREA	2Way Splitter	473842	12/21/2022	Annual	12/21/2023
RFCOREA	2Way Splitter	473841	12/21/2022	Annual	12/21/2023
Anritsu	Radio Communication Analyzer / MT8821C	6262044720	12/07/2022	Annual	12/07/2023
Anritsu	Radio Communication Analyzer / MT8821C	6262116770	08/02/2023	Annual	08/02/2024
Anritsu	Radio Communication Test Station / MT8000A	6262036812	12/08/2022	Annual	12/08/2023
Anritsu	Power Meter / ML2496A	2041001	11/29/2022	Annual	11/29/2023
Anritsu	Power Sensor / MA2475D	1911225	11/29/2022	Annual	11/29/2023
Anritsu	Power Sensor / MA2475D	1911226	11/29/2022	Annual	11/29/2023

## 10. References

The following documents contain reference in this technical document.

[1] [ForOEM][Samsung+S.LSI]+Time+average+SAR+algorithm(FCC)\_v.2.7\_v0.2\_PDF\_v0.0

## Appendix A. Test sequence

### 1.1 Test sequence is generated based on below parameters of the DUT:

1. Measured maximum power ( $P_{max}$ )
2. Measured Tx power ( $P_{limit}$ ) to satisfy SAR Compliance
3. Setup time to make SAR Remaining be full
4. Do test according to test sequence

### 1.2 Test Sequence A waveform:

Based on the parameters above, the test sequence A is generated with one or two levels where one of the levels is maximum power level ( $P_{max}$ ) which is applied at least for 100s. Based on the second level this test sequence is sub-categorized into four different sequences used

- a. Test Sequence A.i where after  $P_{max}$ , a second level of  $P_{limit}$  is requested till the end of the test
- b. Test Sequence A.ii where after  $P_{max}$ , a second level of  $P_{max}-3dB$  is requested till the end of the test
- c. Test Sequence A.iii where after  $P_{max}$ , a second level of  $P_{limit}-3dB$  is requested till the end of the test
- d. Test Sequence A.iv where only  $P_{max}$  is requested till the end of the test

### 1.3 Test Sequence B waveform:

Based on the parameters above, the Test Type B is generated with pre-defined power levels, which is described in Table 1.3.1

**Table 1.3.1 Table of test sequence B**

Time duration (second)	Power level (dB)
15	$P_{limit} - 5$
20	$P_{limit}$
20	$P_{limit} + 5$
10	$P_{limit} - 6$
20	$P_{max}$
15	$P_{limit}$
15	$P_{limit} - 7$
20	$P_{max}$
10	$P_{limit} - 5$
15	$P_{limit}$
10	$P_{limit} - 6$
20	$P_{limit} + 5$
10	$P_{limit} - 4$
15	$P_{limit}$
10	$P_{limit} - 6$
20	$P_{max}$
15	$P_{limit} - 8$
15	$P_{limit}$
20	$P_{max}$
10	$P_{limit} - 9$
20	$P_{limit} + 5$
20	$P_{limit}$
15	$P_{limit} - 5$