



# FCC RF Test Report

APPLICANT : Samsung Electronics Co., Ltd.  
EQUIPMENT : MOBILE PHONE  
BRAND NAME : SAMSUNG  
MODEL NAME : SM-A300YZ  
FCC ID : A3LSMA300YZ  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Sep. 29, 2014 and testing was completed on Oct. 22, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Applicable Standards ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Pre-Scanned RF Power ..... 8

    2.3 Test Mode ..... 9

    2.4 Connection Diagram of Test System ..... 10

    2.5 Support Unit used in test configuration and system ..... 11

    2.6 EUT Operation Test Setup ..... 11

    2.7 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB Bandwidth Measurement ..... 12

    3.2 Output Power Measurement ..... 14

    3.3 Power Spectral Density Measurement ..... 17

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 19

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 29

    3.6 AC Conducted Emission Measurement ..... 46

    3.7 Antenna Requirements ..... 50

**4 LIST OF MEASURING EQUIPMENT ..... 51**

**5 UNCERTAINTY OF EVALUATION ..... 52**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.13 dB at 2390.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.54 dB at 0.340 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Samsung Electronics Co., Ltd.

No.9 WeiWu Rd., Micro Electronic Industrial Park, Jingang Highway, Xiqing District, Tianjin, China

## 1.2 Manufacturer

Samsung Electronics Co., Ltd.

No.9 WeiWu Rd., Micro Electronic Industrial Park, Jingang Highway, Xiqing District, Tianjin, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MOBILE PHONE
Brand Name	SAMSUNG
Model Name	SM-A300YZ
FCC ID	A3LSMA300YZ
GSM Operating Band(s)	GSM 900/1800/1900/850MHz
GPRS/EGPRS Multi-slot Class	GPRS Class 33, EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I/II/V/VIII
LTE Operating Band(s)	FDD Band 3/8/28
Wi-Fi Specification	2.4GHz 802.11b/g/n HT20
Bluetooth Version	Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
ANT+ Specification	2.4GHz
HW Version	REV0.0
SW Version	A300YZ.001
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 19.84 dBm (0.0964 W) 802.11g : 22.38 dBm (0.1730 W) 802.11n HT20 : 21.78 dBm (0.1507 W)
Antenna Type	802.11b/g/n : SUS Antenna with gain -1.3 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.		
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	TH01-SZ	CO01-SZ	831040

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	03CH01-KS		149928

**Note:** The test site complies with ANSI C63.4 2003 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 01	2412 MHz	19.84	CH 01	19.77	19.80	19.83
CH 06	2437 MHz	19.55				
CH 11	2462 MHz	18.21				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412 MHz	21.64	CH 06	22.33	22.28	22.23	22.19	22.21	22.31	22.29
CH 06	2437 MHz	22.38								
CH 11	2462 MHz	21.25								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412 MHz	21.37	CH 06	21.76	21.68	21.65	21.61	21.71	21.72	21.70
CH 06	2437 MHz	21.78								
CH 11	2462 MHz	20.38								




## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)			
<b>Remark:</b> For radiated TCs, the tests were performed with adapter, earphone and USB cable.				

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

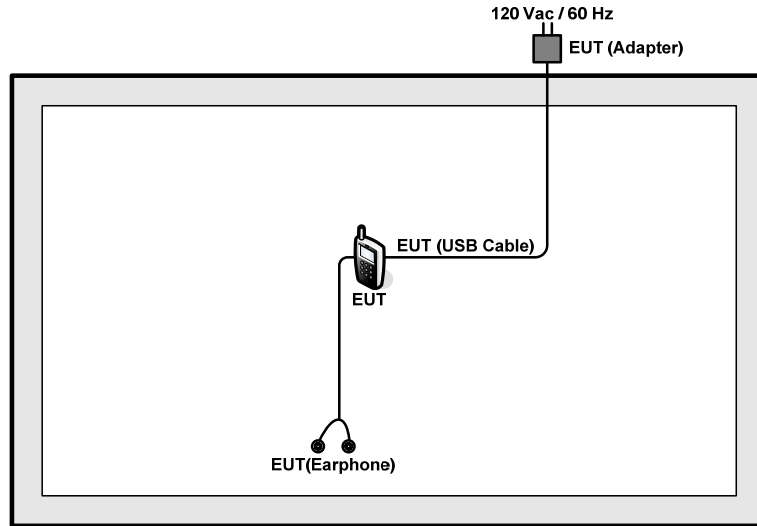

### <AC Conducted Emission Mode>

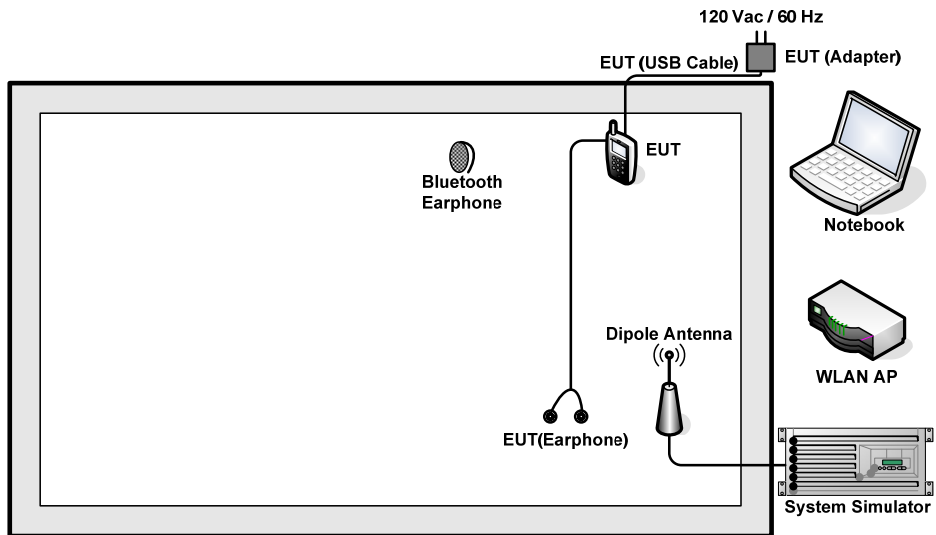

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	WLAN AP	D-Link	DIR-815	KA2IR815A1	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 7.5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

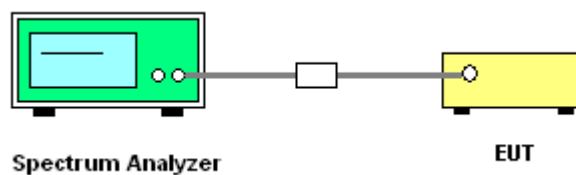




3.1.5 Test Result of 6dB Bandwidth

Test Band :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	7.08	0.50	Pass
11b	1Mbps	1	6	2437	7.52	0.50	Pass
11b	1Mbps	1	11	2462	7.08	0.50	Pass
11g	6Mbps	1	1	2412	16.32	0.50	Pass
11g	6Mbps	1	6	2437	16.30	0.50	Pass
11g	6Mbps	1	11	2462	16.44	0.50	Pass
HT20	MCS0	1	1	2412	17.52	0.50	Pass
HT20	MCS0	1	6	2437	17.32	0.50	Pass
HT20	MCS0	1	11	2462	17.60	0.50	Pass

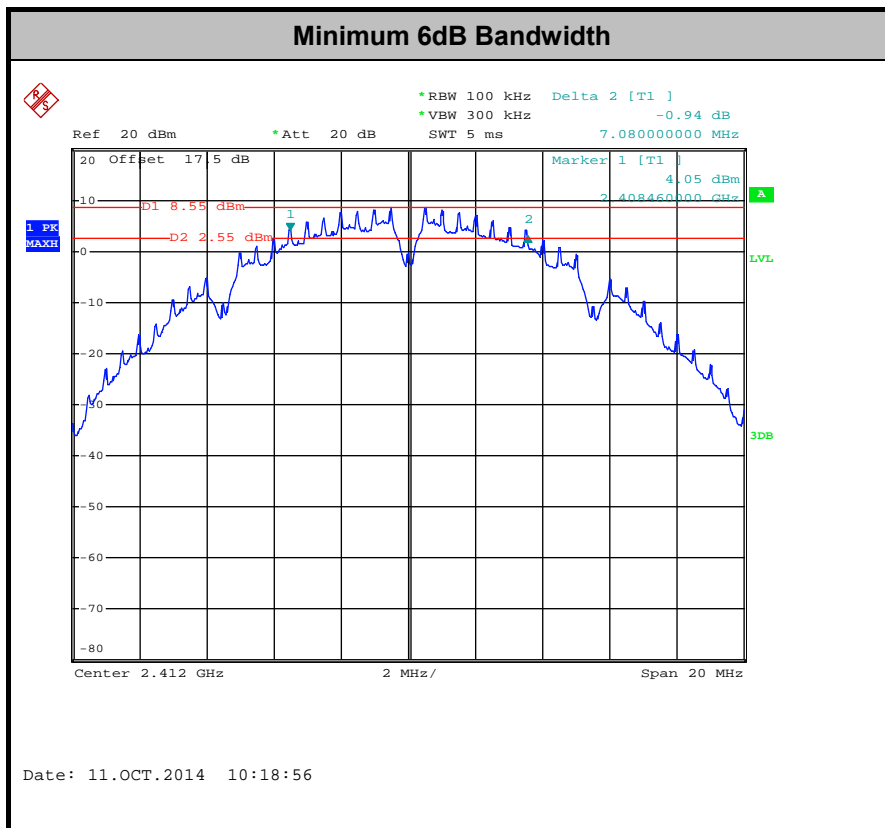

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

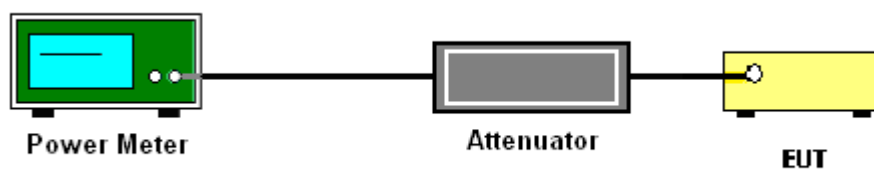



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	19.84	30.00	-1.30	Pass
11b	1Mbps	1	6	2437	19.55	30.00	-1.30	Pass
11b	1Mbps	1	11	2462	18.21	30.00	-1.30	Pass
11g	6Mbps	1	1	2412	21.64	30.00	-1.30	Pass
11g	6Mbps	1	6	2437	22.38	30.00	-1.30	Pass
11g	6Mbps	1	11	2462	21.25	30.00	-1.30	Pass
HT20	MCS0	1	1	2412	21.37	30.00	-1.30	Pass
HT20	MCS0	1	6	2437	21.78	30.00	-1.30	Pass
HT20	MCS0	1	11	2462	20.38	30.00	-1.30	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.06	16.59	30.00	-1.30	Pass
11b	1Mbps	1	6	2437	0.06	16.29	30.00	-1.30	Pass
11b	1Mbps	1	11	2462	0.06	14.85	30.00	-1.30	Pass
11g	6Mbps	1	1	2412	0.29	13.11	30.00	-1.30	Pass
11g	6Mbps	1	6	2437	0.29	13.18	30.00	-1.30	Pass
11g	6Mbps	1	11	2462	0.29	11.57	30.00	-1.30	Pass
HT20	MCS0	1	1	2412	0.34	12.18	30.00	-1.30	Pass
HT20	MCS0	1	6	2437	0.34	12.25	30.00	-1.30	Pass
HT20	MCS0	1	11	2462	0.34	10.66	30.00	-1.30	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

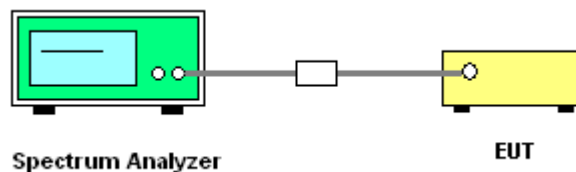




### 3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-5.23	8.00	-1.30	Pass
11b	1Mbps	1	6	2437	-5.68	8.00	-1.30	Pass
11b	1Mbps	1	11	2462	-7.15	8.00	-1.30	Pass
11g	6Mbps	1	1	2412	-10.53	8.00	-1.30	Pass
11g	6Mbps	1	6	2437	-11.18	8.00	-1.30	Pass
11g	6Mbps	1	11	2462	-13.49	8.00	-1.30	Pass
HT20	MCS0	1	1	2412	-14.25	8.00	-1.30	Pass
HT20	MCS0	1	6	2437	-13.24	8.00	-1.30	Pass
HT20	MCS0	1	11	2462	-15.62	8.00	-1.30	Pass

Note: Measured power density (dBm) has offset with cable loss.

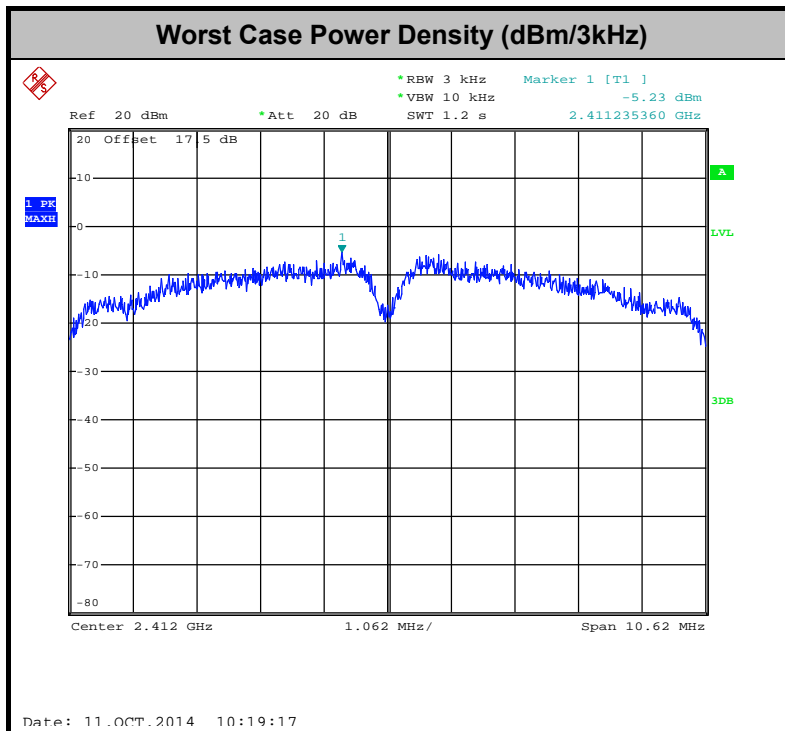

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

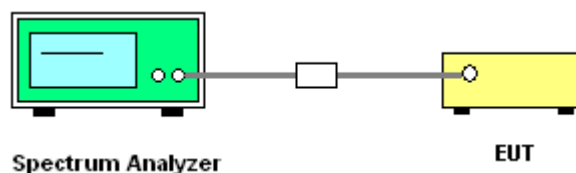





### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Liang

#### WLAN 802.11b Channel 01


<b>100kHz PSD reference Level</b>	<b>Low Channel Plot</b>
-----------------------------------	-------------------------

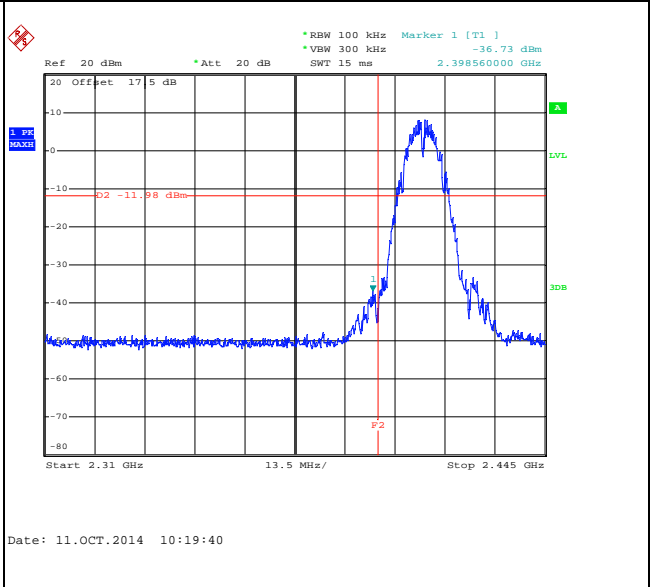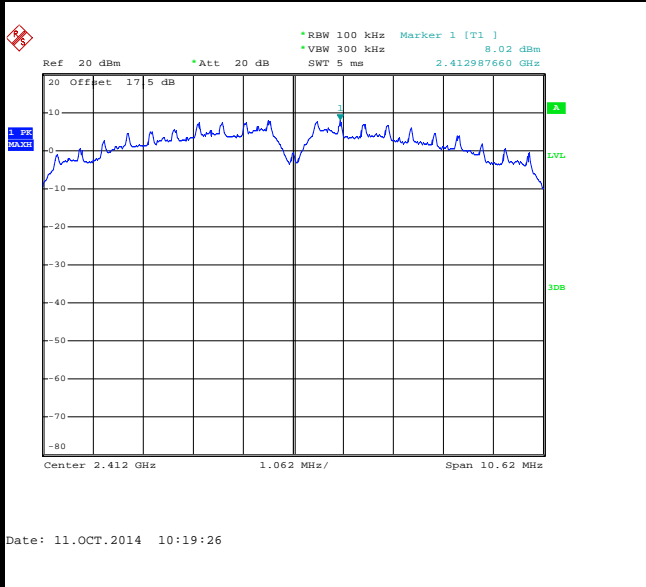

#### Spurious Emission 30MHz~3GHz

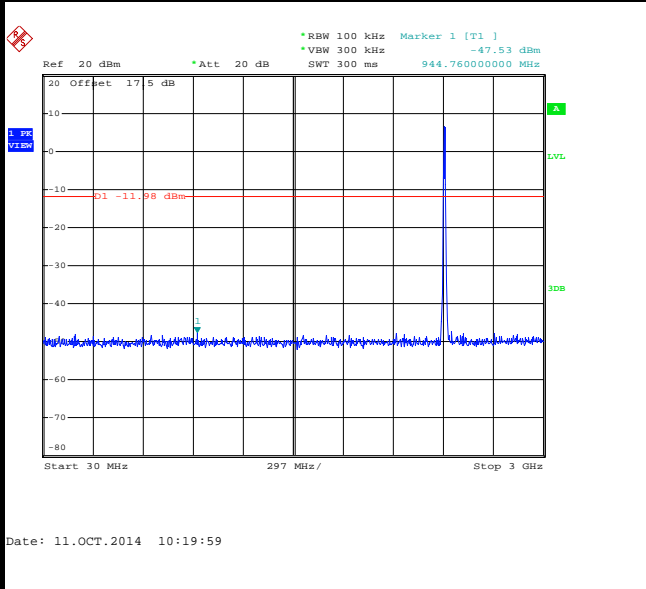

#### Spurious Emission 2GHz~25GHz

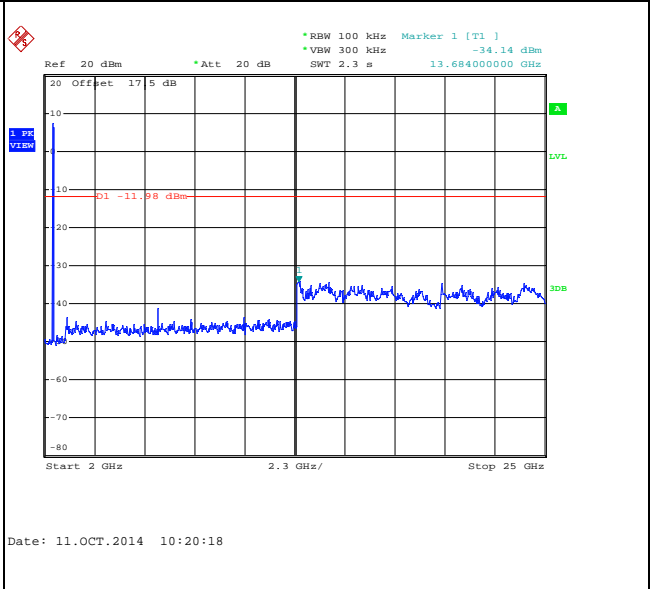





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Liang

WLAN 802.11b Channel 06


100kHz PSD reference Level

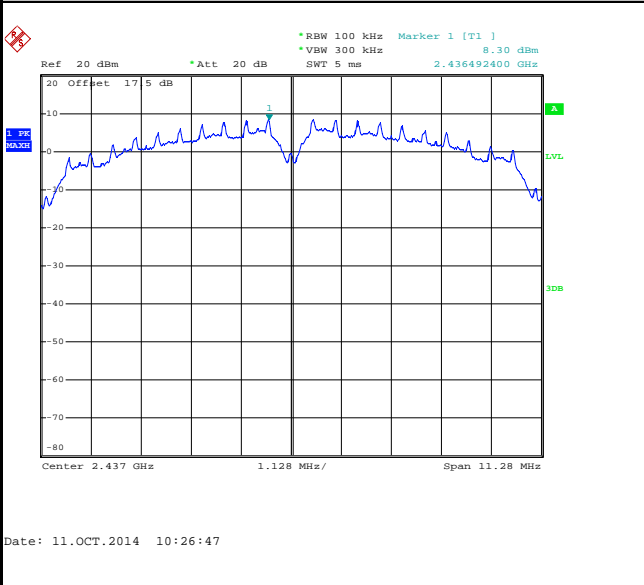

Spurious Emission 30MHz~3GHz

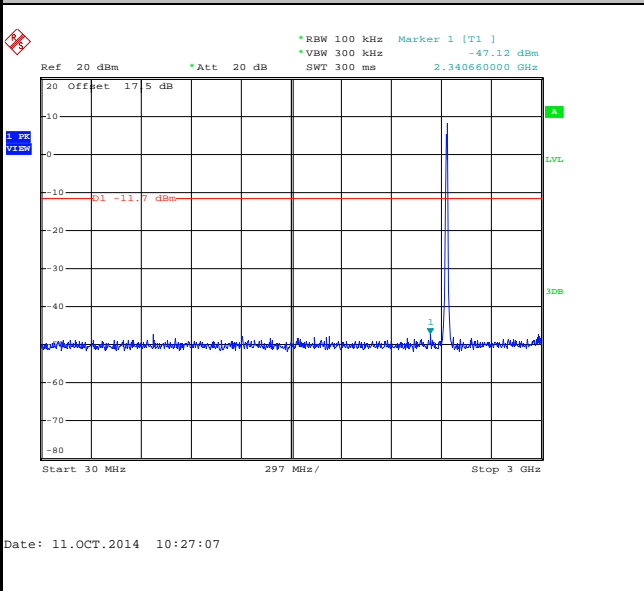

Spurious Emission 2GHz~25GHz

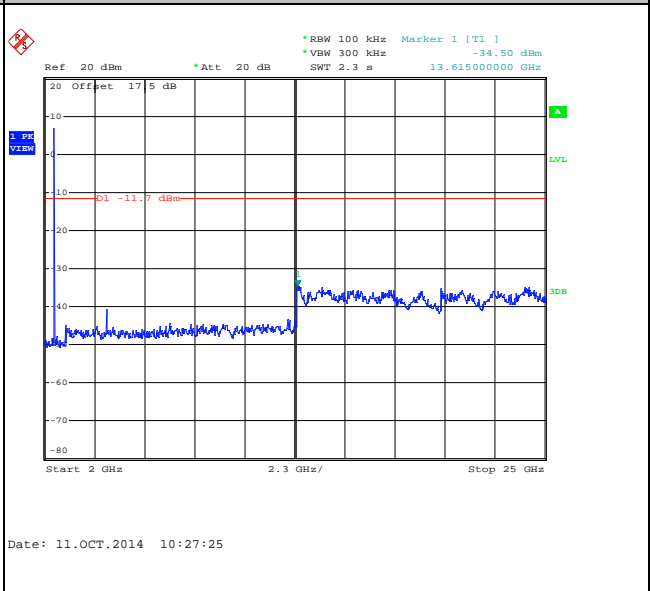





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Liang

WLAN 802.11b Channel 11


100kHz PSD reference Level

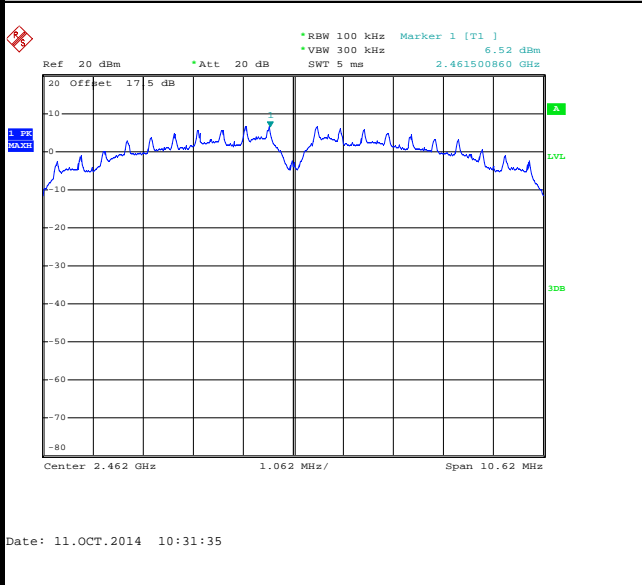


High Channel Plot

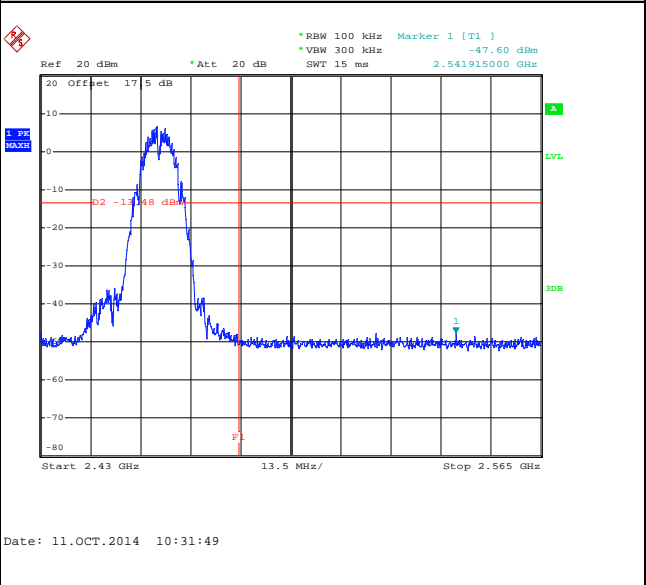

Spurious Emission 30MHz~3GHz

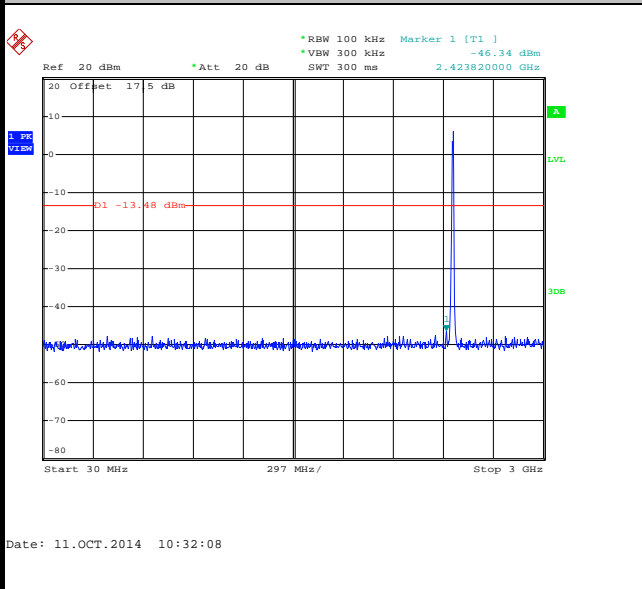

Spurious Emission 2GHz~25GHz

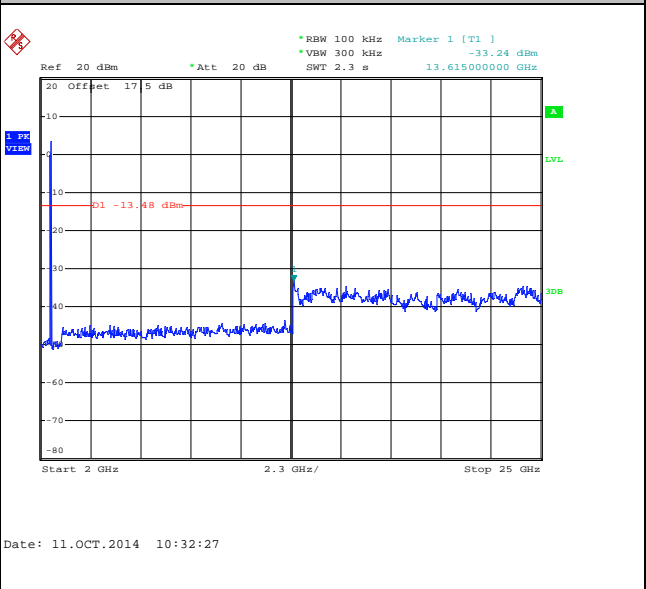




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Liang


WLAN 802.11g Channel 01

100kHz PSD reference Level

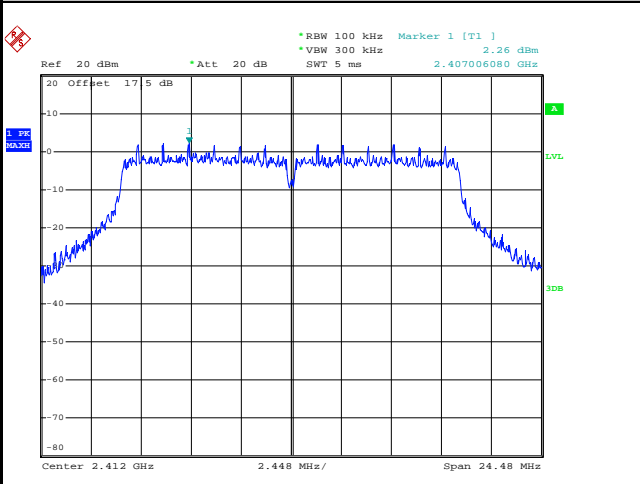


Date: 11.OCT.2014 10:54:22

Low Channel Plot

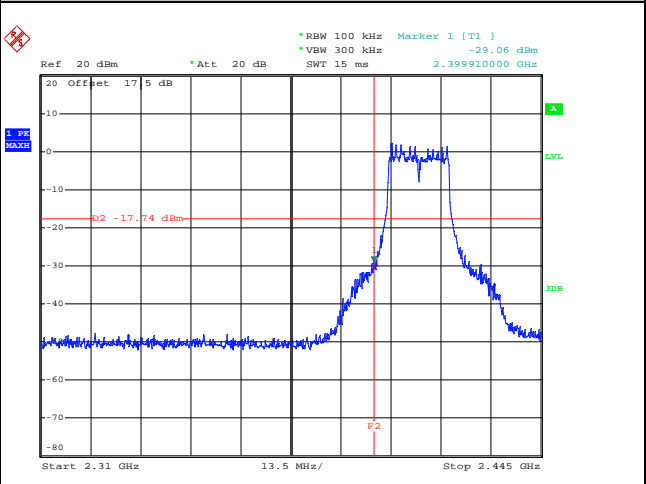


Date: 11.OCT.2014 10:54:36

Spurious Emission 30MHz~3GHz

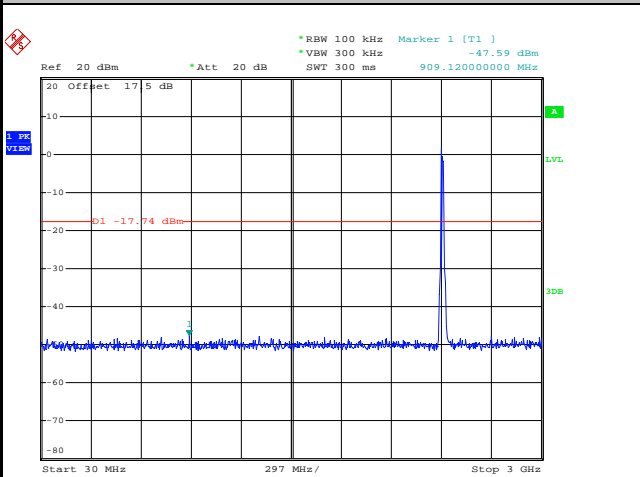

Date: 11.OCT.2014 10:54:55

Spurious Emission 2GHz~25GHz

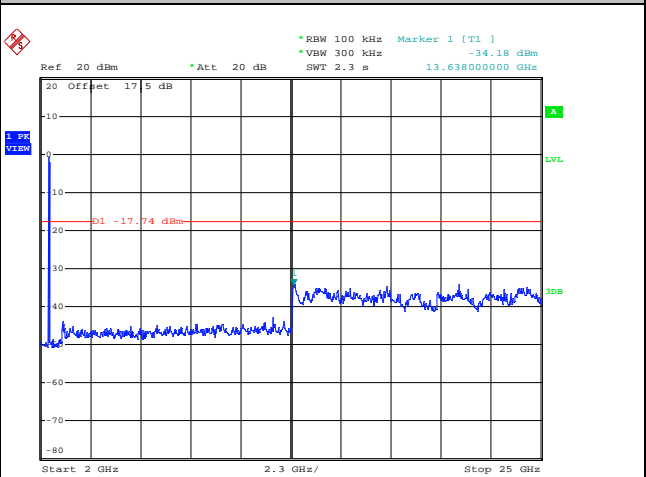


Date: 11.OCT.2014 10:55:13




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Liang

WLAN 802.11g Channel 06


100kHz PSD reference Level

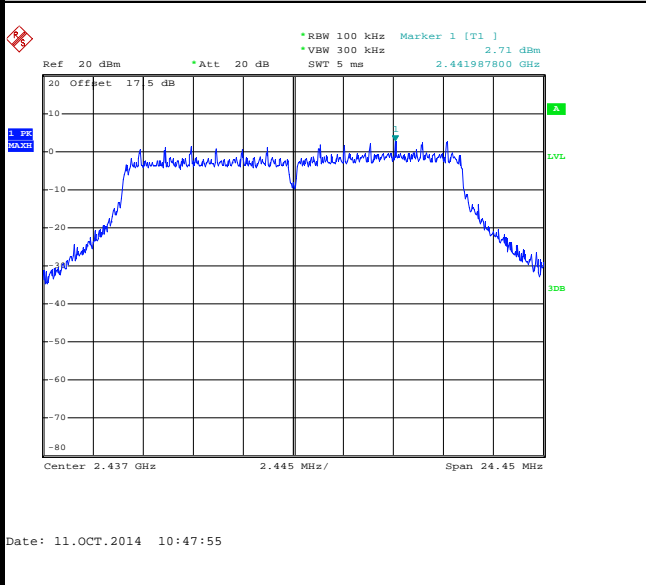

Spurious Emission 30MHz~3GHz

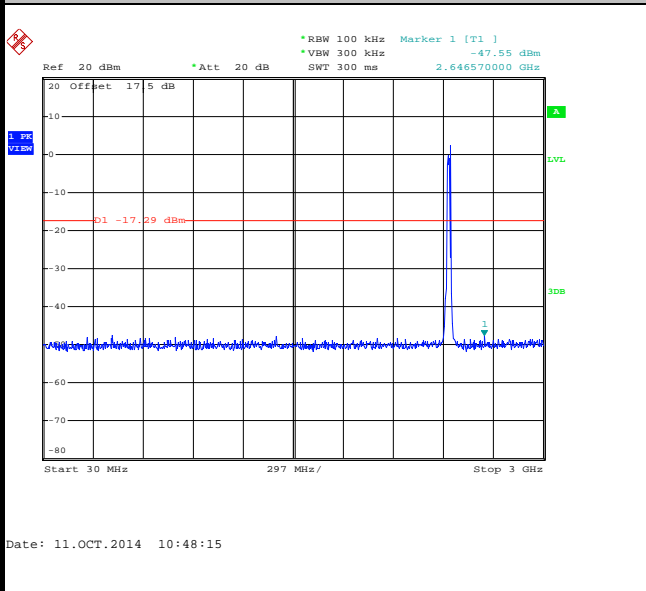

Spurious Emission 2GHz~25GHz

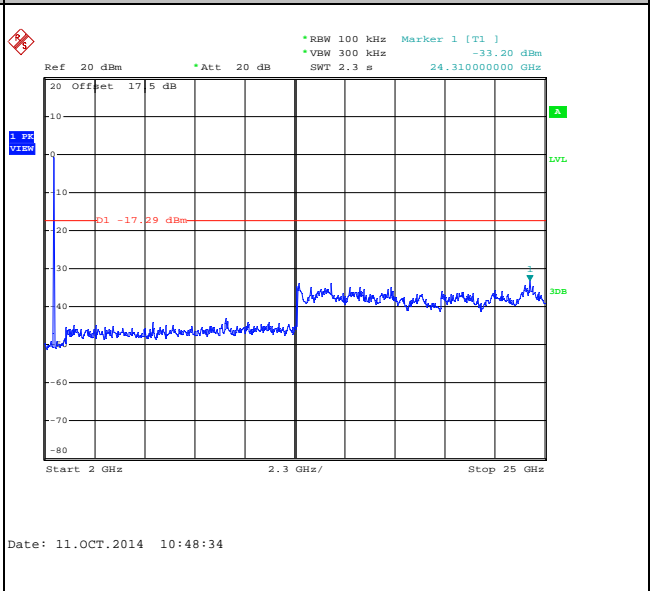





Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Liang

WLAN 802.11g Channel 11


100kHz PSD reference Level

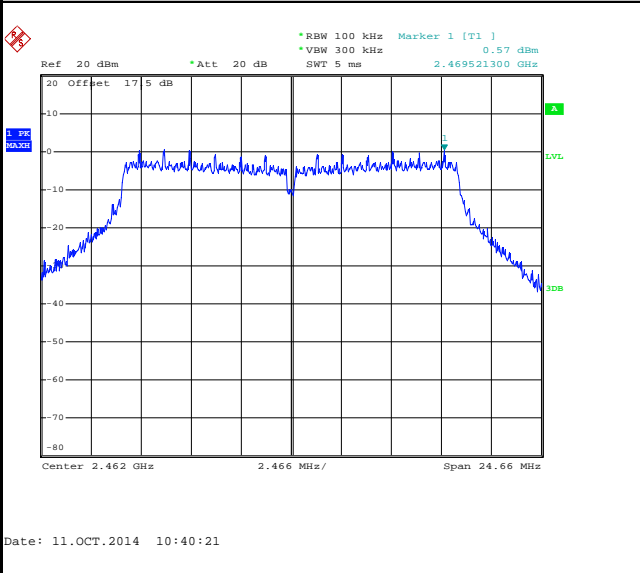


High Channel Plot

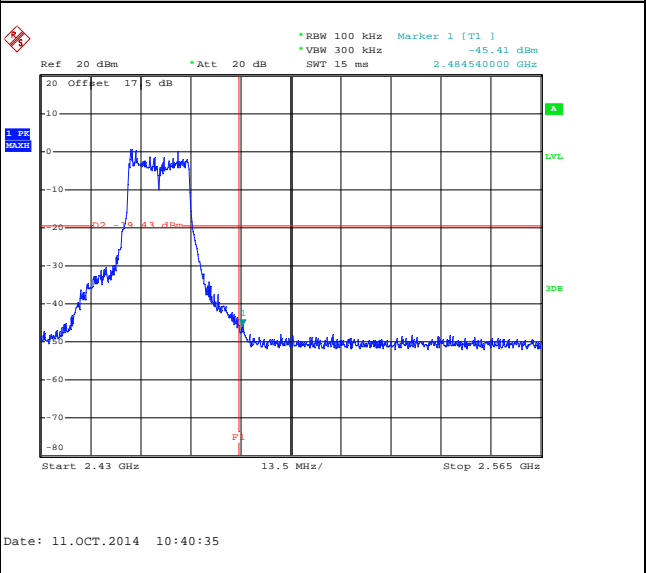

Spurious Emission 30MHz~3GHz

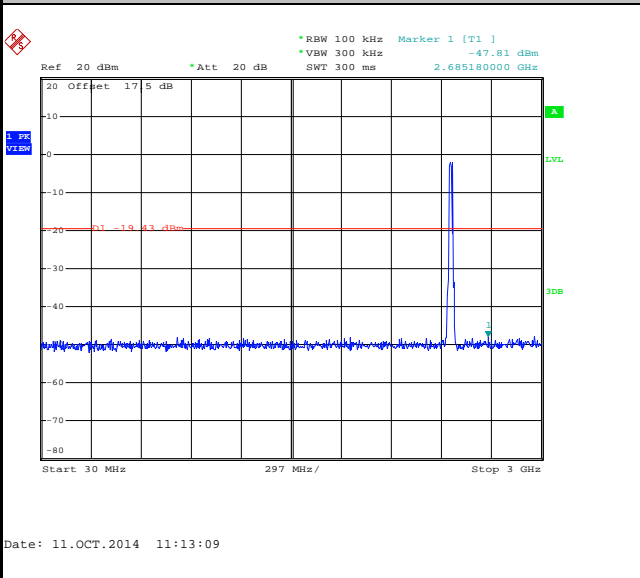

Spurious Emission 2GHz~25GHz

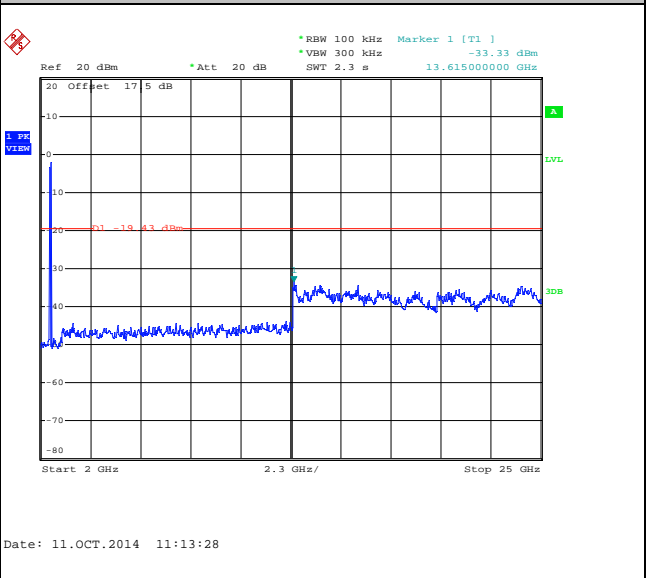





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Liang

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

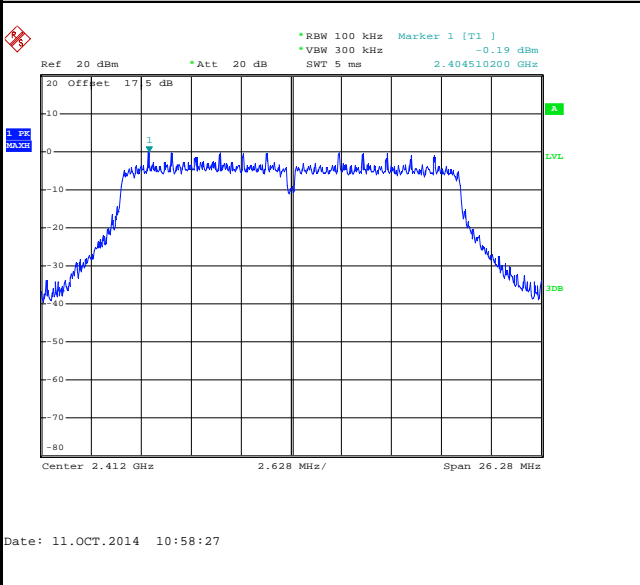


Low Channel Plot

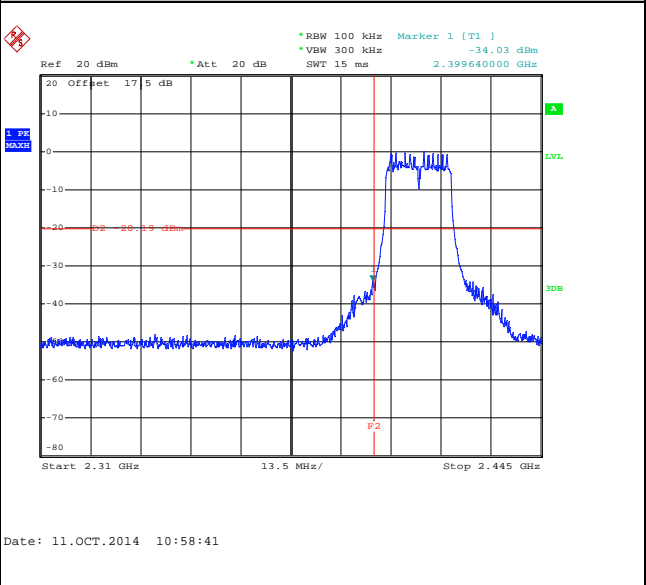

Spurious Emission 30MHz~3GHz

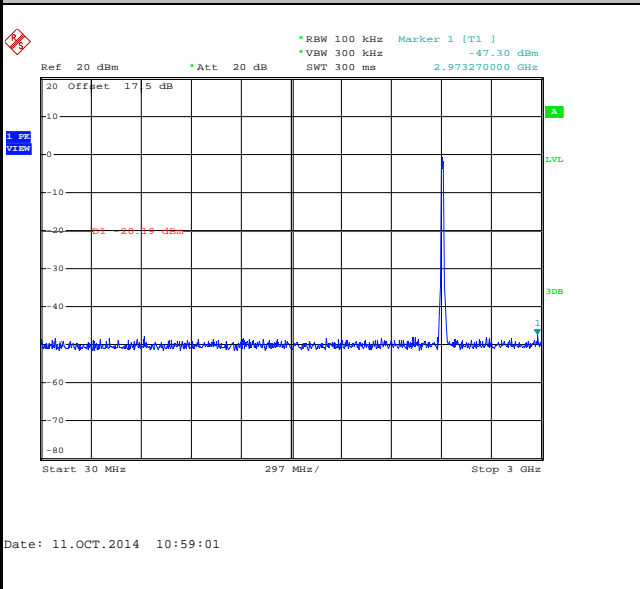

Spurious Emission 2GHz~25GHz

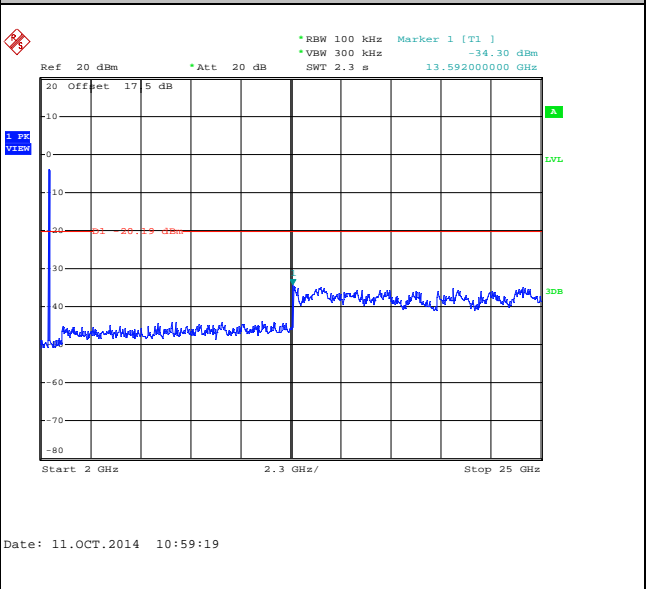





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Liang

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

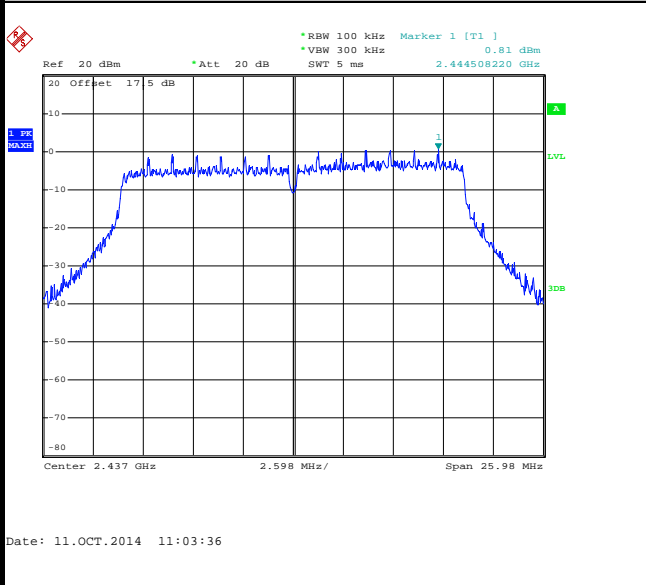

Spurious Emission 30MHz~3GHz

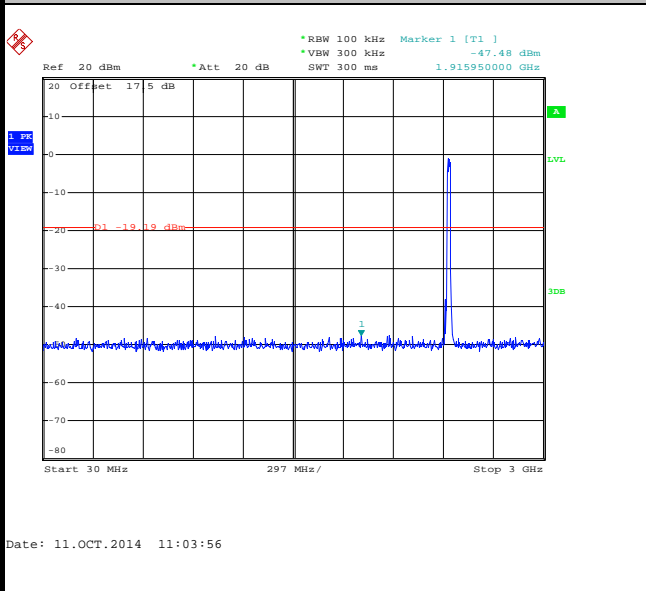

Spurious Emission 2GHz~25GHz

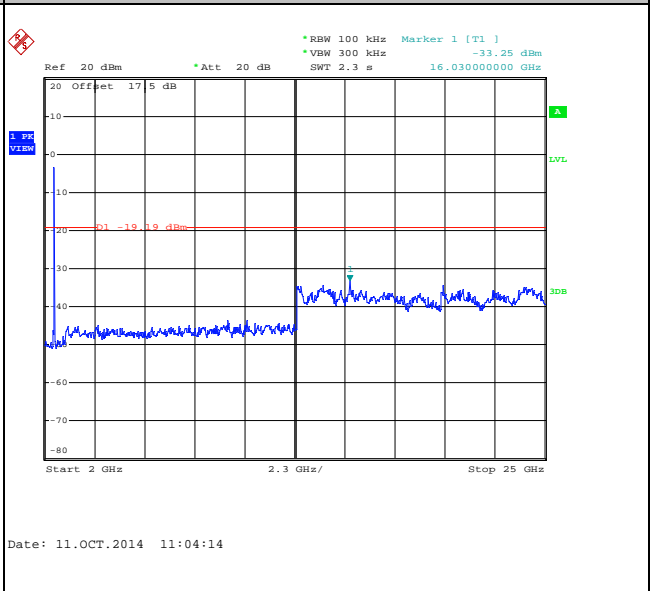




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Liang


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

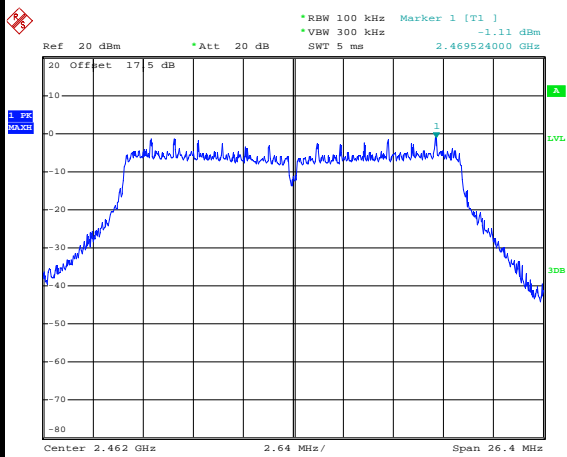


Date: 11.OCT.2014 11:08:48

High Channel Plot

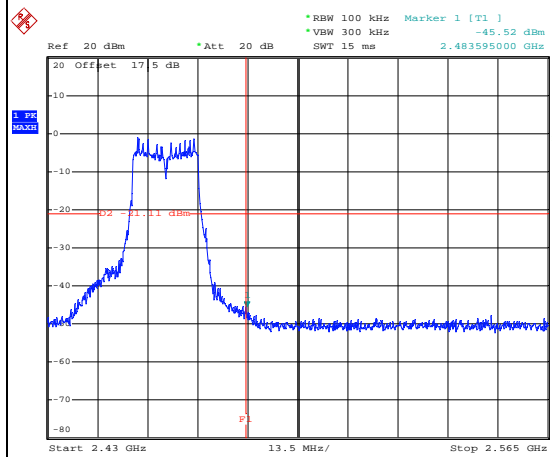


Date: 11.OCT.2014 11:09:02

Spurious Emission 30MHz~3GHz

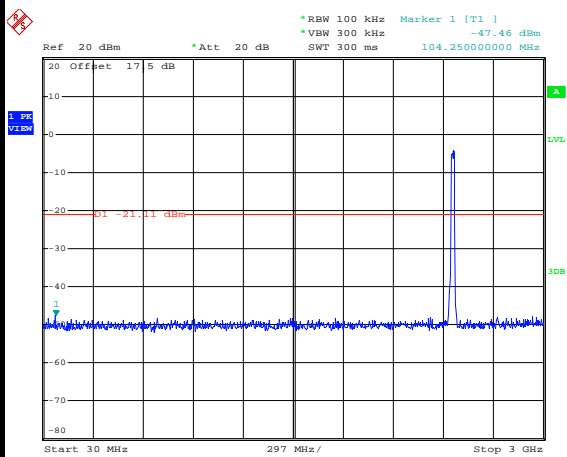

Date: 11.OCT.2014 11:09:22

Spurious Emission 2GHz~25GHz

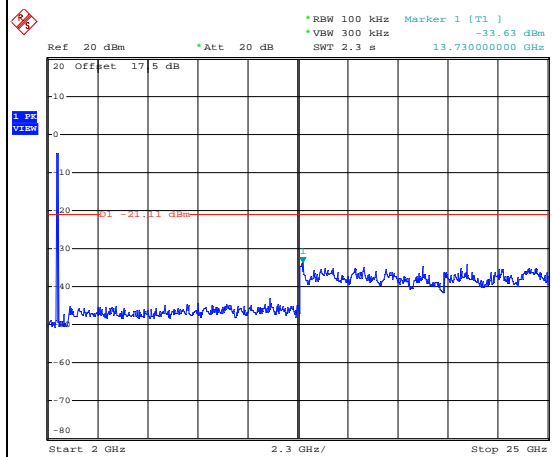

Date: 11.OCT.2014 11:09:40



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.


For average measurement:

  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.73	-	-	10Hz
802.11g	93.52	1.401	0.714	1kHz
2.4GHz 802.11n HT20	92.44	1.293	0.774	1kHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

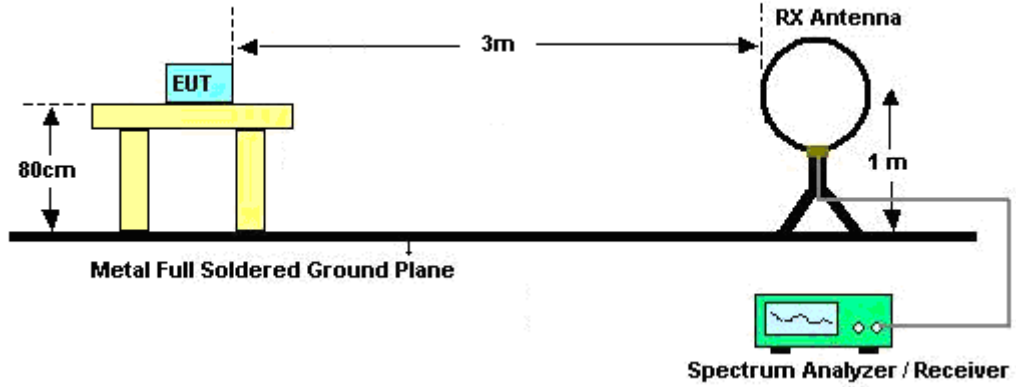

For radiated emissions from 30MHz to 1GHz

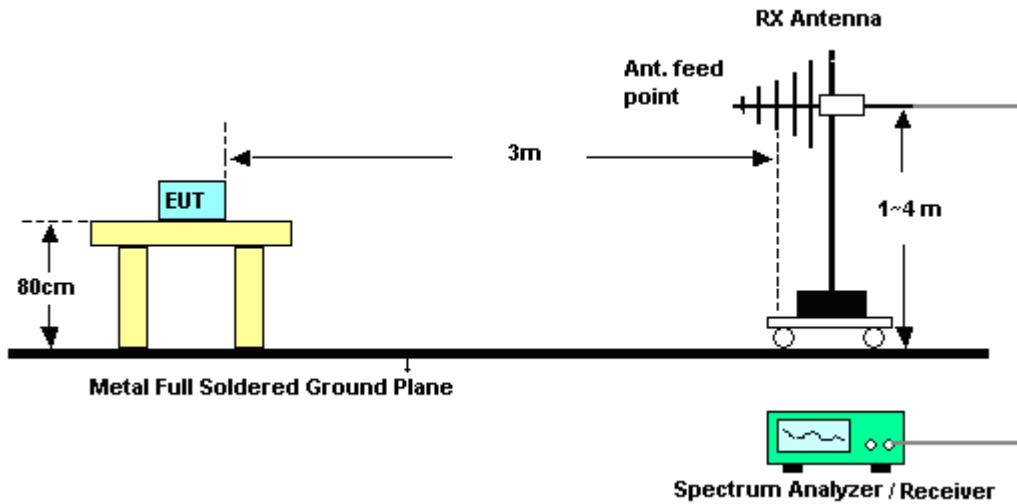

For radiated emissions above 1GHz

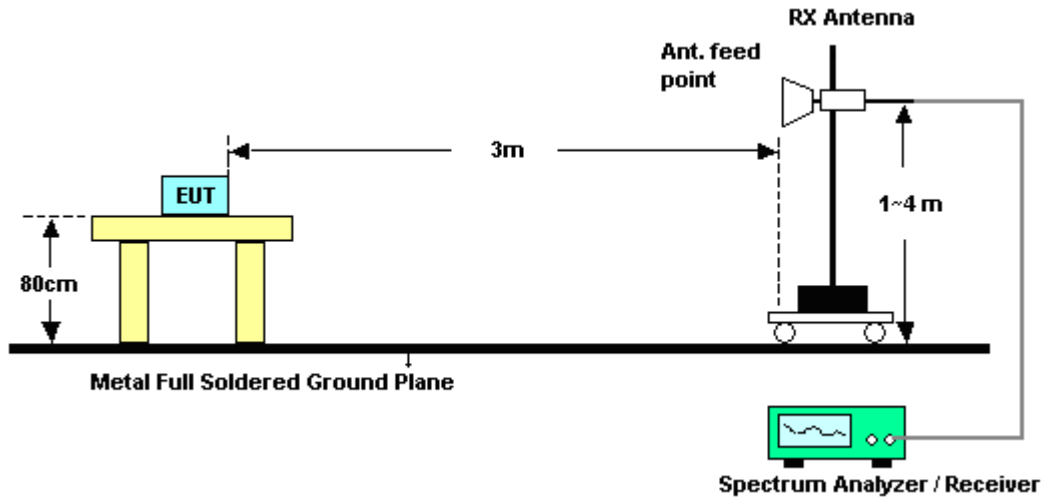

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Feng Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2387.85	49.71	-24.29	74	51.14	32.01	2.64	36.08	100	156	Peak
2387.31	39.31	-14.69	54	40.74	32.01	2.64	36.08	100	156	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2318.91	47.27	-26.73	74	49.36	31.76	2.58	36.43	129	96	Peak
2387.22	35.78	-18.22	54	37.21	32.01	2.64	36.08	129	96	Average

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Feng Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.95	51.96	-22.04	74	52.73	32.34	2.68	35.79	100	157	Peak
2486.17	40.96	-13.04	54	41.73	32.34	2.68	35.79	100	157	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2485.93	49.04	-24.96	74	49.81	32.34	2.68	35.79	106	95	Peak
2486.26	37.77	-16.23	54	38.54	32.34	2.68	35.79	106	95	Average



Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Feng Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	67.11	-6.89	74	68.54	32.01	2.64	36.08	100	156	Peak
2390	45.08	-8.92	54	46.51	32.01	2.64	36.08	100	156	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	54.33	-19.67	74	55.76	32.01	2.64	36.08	130	289	Peak
2390	37.04	-16.96	54	38.47	32.01	2.64	36.08	130	289	Average

Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Feng Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.65	70.19	-3.81	74	70.96	32.34	2.68	35.79	100	157	Peak
2483.53	45.86	-8.14	54	46.63	32.34	2.68	35.79	100	157	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.74	64.38	-9.62	74	65.15	32.34	2.68	35.79	103	95	Peak
2483.53	42.24	-11.76	54	43.01	32.34	2.68	35.79	103	95	Average



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Feng Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2390	70.87	-3.13	74	72.3	32.01	2.64	36.08	100	161	Peak
2390	44.69	-9.31	54	46.12	32.01	2.64	36.08	100	161	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	57.7	-16.3	74	59.13	32.01	2.64	36.08	130	101	Peak
2390	37.6	-16.4	54	39.03	32.01	2.64	36.08	130	101	Average

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Feng Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.91	67.23	-6.77	74	68	32.34	2.68	35.79	100	169	Peak
2483.56	43.98	-10.02	54	44.75	32.34	2.68	35.79	100	169	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.13	66.45	-7.55	74	67.22	32.34	2.68	35.79	103	91	Peak
2483.5	42.1	-11.9	54	42.87	32.34	2.68	35.79	103	91	Average



**3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	109.74	-	-	111.02	32.08	2.66	36.02	100	156	Peak
2412	104.02	-	-	105.3	32.08	2.66	36.02	100	156	Average
4824	46.11	-27.89	74	44.78	34.2	3.78	36.65	126	347	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	104.87	-	-	106.15	32.08	2.66	36.02	129	96	Peak
2412	99.27	-	-	100.55	32.08	2.66	36.02	129	96	Average
4824	44.88	-29.12	74	43.55	34.2	3.78	36.65	106	27	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	110.16	-	-	111.2	32.21	2.66	35.91	120	158	Peak
2437	103.98	-	-	105.02	32.21	2.66	35.91	120	158	Average
4874	53.04	-20.96	74	51.9	34.2	3.78	36.84	102	358	Peak
4874	47.9	-6.1	54	46.76	34.2	3.78	36.84	102	358	Average
7312	47.45	-26.55	74	45.86	35.72	4.73	38.86	103	258	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	104.55	-	-	105.59	32.21	2.66	35.91	108	96	Peak
2437	98.89	-	-	99.93	32.21	2.66	35.91	108	96	Average
4874	46.12	-27.88	74	44.98	34.2	3.78	36.84	118	59	Peak
7312	47.57	-26.43	74	45.98	35.72	4.73	38.86	104	308	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	108.12	-	-	109.03	32.27	2.67	35.85	100	157	Peak
2462	102.17	-	-	103.08	32.27	2.67	35.85	100	157	Average
4924	44.48	-29.52	74	43.53	34.2	3.78	37.03	106	258	Peak
7386	45.42	-28.58	74	44.08	35.76	4.77	39.19	100	53	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	103.21	-	-	104.12	32.27	2.67	35.85	106	95	Peak
2462	97.63	-	-	98.54	32.27	2.67	35.85	106	95	Average
4924	43.66	-30.34	74	42.71	34.2	3.78	37.03	108	241	Peak
7386	47.04	-26.96	74	45.7	35.76	4.77	39.19	167	296	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	107.68	-	-	108.96	32.08	2.66	36.02	100	156	Peak
2412	96.62	-	-	97.9	32.08	2.66	36.02	100	156	Average
4824	46.1	-27.9	74	44.77	34.2	3.78	36.65	123	67	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	99.67	-	-	100.95	32.08	2.66	36.02	130	289	Peak
2412	88.1	-	-	89.38	32.08	2.66	36.02	130	289	Average
4824	45.73	-28.27	74	44.4	34.2	3.78	36.65	185	307	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	109.58	-	-	110.62	32.21	2.66	35.91	122	159	Peak
2437	97.43	-	-	98.47	32.21	2.66	35.91	122	159	Average
4874	45.03	-28.97	74	43.89	34.2	3.78	36.84	126	348	Peak
7312	46.94	-27.06	74	45.35	35.72	4.73	38.86	100	259	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	105.53	-	-	106.57	32.21	2.66	35.91	104	93	Peak
2437	94.3	-	-	95.34	32.21	2.66	35.91	104	93	Average
4874	44.55	-29.45	74	43.41	34.2	3.78	36.84	124	253	Peak
7312	47.04	-26.96	74	45.45	35.72	4.73	38.86	115	24	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	107.76	-	-	108.67	32.27	2.67	35.85	100	157	Peak
2462	96.53	-	-	97.44	32.27	2.67	35.85	100	157	Average
4924	44.17	-29.83	74	43.22	34.2	3.78	37.03	159	301	Peak
7386	46.27	-27.73	74	44.93	35.76	4.77	39.19	107	251	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	102.22	-	-	103.13	32.27	2.67	35.85	103	95	Peak
2462	91.28	-	-	92.19	32.27	2.67	35.85	103	95	Average
4924	44.61	-29.39	74	43.66	34.2	3.78	37.03	104	225	Peak
7386	46.9	-27.1	74	45.56	35.76	4.77	39.19	134	228	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.13	-18.87	40	34.4	19.2	0.19	32.66	-	-	Peak
74.62	26.34	-13.66	40	49.91	8.61	0.47	32.65	100	0	Peak
112.45	22.81	-20.69	43.5	43.47	11.4	0.58	32.64	-	-	Peak
213.33	28.45	-15.05	43.5	49.77	10.42	0.75	32.49	-	-	Peak
345.25	22.68	-23.32	46	39.33	14.81	0.9	32.36	-	-	Peak
533.43	23.98	-22.02	46	36.57	18.3	1.27	32.16	-	-	Peak
2412	106.48	-	-	107.76	32.08	2.66	36.02	100	161	Peak
2412	95.3	-	-	96.58	32.08	2.66	36.02	100	161	Average
4824	44.82	-29.18	74	43.49	34.2	3.78	36.65	103	59	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	31.51	-8.49	40	44.78	19.2	0.19	32.66	200	0	Peak
45.52	27.29	-12.71	40	48.39	11.25	0.31	32.66	-	-	Peak
80.44	24.01	-15.99	40	46.96	9.1	0.6	32.65	-	-	Peak
177.44	21.79	-21.71	43.5	42.78	10.66	0.83	32.48	-	-	Peak
227.88	23.64	-22.36	46	44.25	11.08	0.8	32.49	-	-	Peak
939.86	26.36	-19.64	46	34.57	21.82	1.72	31.75	-	-	Peak
2412	99.79	-	-	101.07	32.08	2.66	36.02	130	101	Peak
2412	88.2	-	-	89.48	32.08	2.66	36.02	130	101	Average
4824	44.68	-29.32	74	43.35	34.2	3.78	36.65	119	328	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	107.18	-	-	108.22	32.21	2.66	35.91	100	151	Peak
2437	96.25	-	-	97.29	32.21	2.66	35.91	100	151	Average
4874	44.99	-29.01	74	43.85	34.2	3.78	36.84	126	307	Peak
7312	46.53	-27.47	74	44.94	35.72	4.73	38.86	105	67	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	103.63	-	-	104.67	32.21	2.66	35.91	105	91	Peak
2437	92.38	-	-	93.42	32.21	2.66	35.91	105	91	Average
4874	43.83	-30.17	74	42.69	34.2	3.78	36.84	176	342	Peak
7312	46.86	-27.14	74	45.27	35.72	4.73	38.86	102	38	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	106.15	-	-	107.06	32.27	2.67	35.85	100	169	Peak
2462	94.58	-	-	95.49	32.27	2.67	35.85	100	169	Average
4924	44.47	-29.53	74	43.52	34.2	3.78	37.03	132	51	Peak
7386	46.66	-27.34	74	45.32	35.76	4.77	39.19	104	69	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Feng Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	100.89	-	-	101.8	32.27	2.67	35.85	103	91	Peak
2462	90.02	-	-	90.93	32.27	2.67	35.85	103	91	Average
4924	44.95	-29.05	74	44	34.2	3.78	37.03	100	0	Peak
7386	46.29	-27.71	74	44.95	35.76	4.77	39.19	163	186	Peak



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

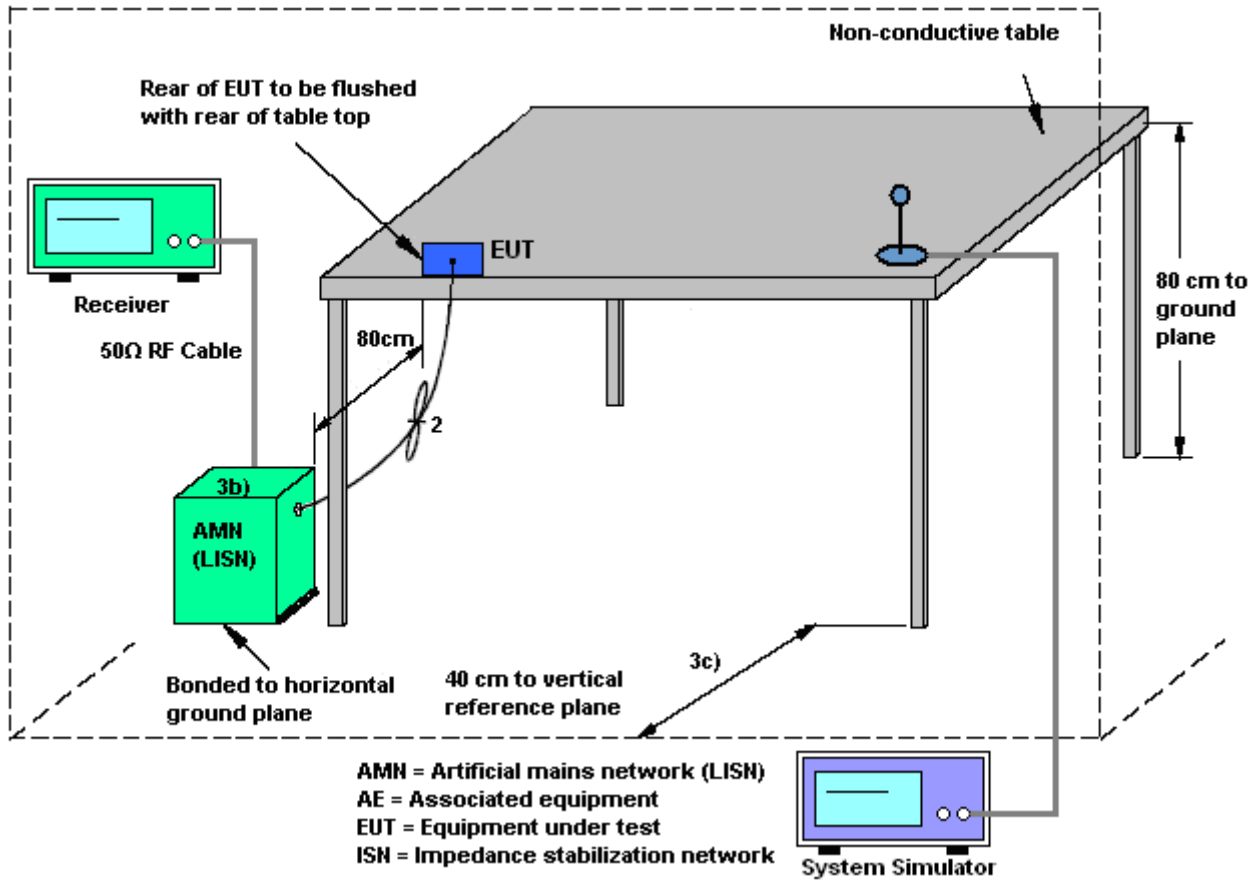



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jack Tian	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

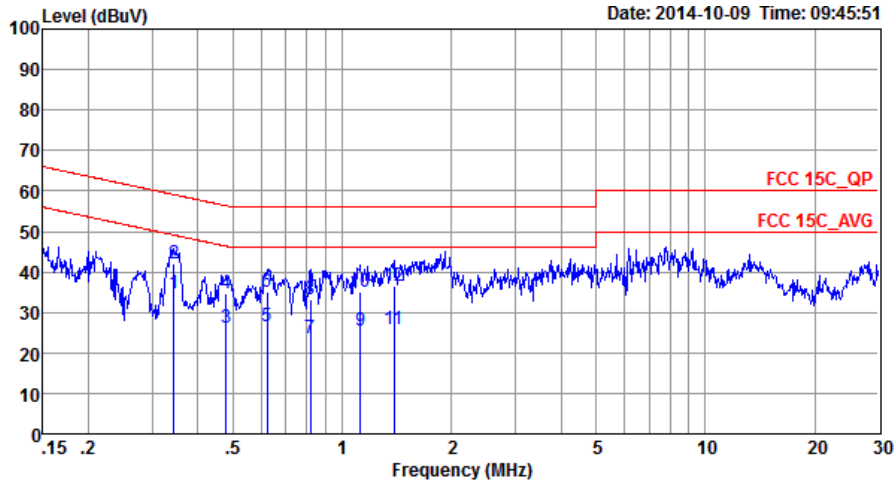


Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_L\_20140304 LINE  
 Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.34	34.55	-14.54	49.09	24.09	0.27	10.19	Average
2	0.34	42.05	-17.04	59.09	31.59	0.27	10.19	QP
3	0.48	26.35	-20.01	46.36	15.89	0.30	10.16	Average
4	0.48	34.65	-21.71	56.36	24.19	0.30	10.16	QP
5	0.62	26.57	-19.43	46.00	16.20	0.22	10.15	Average
6	0.62	35.17	-20.83	56.00	24.80	0.22	10.15	QP
7	0.82	23.46	-22.54	46.00	13.10	0.21	10.15	Average
8	0.82	33.26	-22.74	56.00	22.90	0.21	10.15	QP
9	1.12	25.41	-20.59	46.00	15.00	0.25	10.16	Average
10	1.12	35.21	-20.79	56.00	24.80	0.25	10.16	QP
11	1.39	25.81	-20.19	46.00	15.40	0.24	10.17	Average
12	1.39	36.51	-19.49	56.00	26.10	0.24	10.17	QP



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jack Tian	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

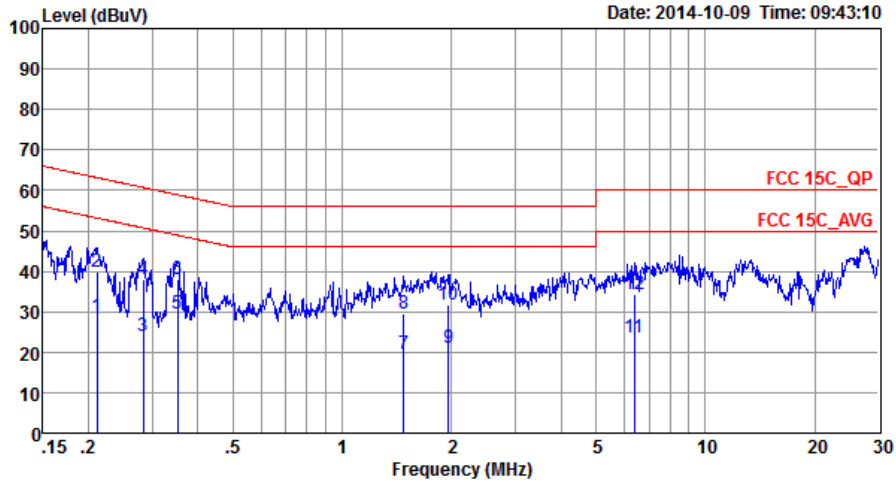

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_N\_20140304 NEUTRAL

Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.21	28.91	-24.23	53.14	18.30	0.33	10.28	Average
2	0.21	40.01	-23.13	63.14	29.40	0.33	10.28	QP
3	0.28	24.17	-26.55	50.72	13.61	0.35	10.21	Average
4	0.28	38.07	-22.65	60.72	27.51	0.35	10.21	QP
5 *	0.35	29.66	-19.25	48.91	19.10	0.38	10.18	Average
6	0.35	38.16	-20.75	58.91	27.60	0.38	10.18	QP
7	1.48	19.42	-26.58	46.00	8.90	0.35	10.17	Average
8	1.48	29.62	-26.38	56.00	19.10	0.35	10.17	QP
9	1.96	20.86	-25.14	46.00	10.30	0.37	10.19	Average
10	1.96	31.56	-24.44	56.00	21.00	0.37	10.19	QP
11	6.39	23.72	-26.28	50.00	13.00	0.45	10.27	Average
12	6.39	34.42	-25.58	60.00	23.70	0.45	10.27	QP



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 03, 2014	Oct. 11, 2014	Mar. 02, 2015	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	0.3GHz~6GHz	Mar. 03, 2014	Oct. 11, 2014	Mar. 02, 2015	Conducted (TH01-SZ)
Power Sensor	Dare	RPR3006W	TH01SZ00019	0.3GHz~6GHz	Mar. 14, 2014	Oct. 11, 2014	Mar. 13, 2015	Conducted (TH01-SZ)
ESCIO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	Oct. 09, 2014	Feb. 20, 2015	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 04, 2014	Oct. 09, 2014	Mar. 03, 2015	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 04, 2014	Oct. 09, 2014	Mar. 03, 2015	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Dec. 17, 2013	Oct. 09, 2014	Dec. 16, 2014	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Oct. 22, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Oct. 22, 2014	May 03, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 08, 2014	Oct. 22, 2014	Oct. 07, 2015	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Oct. 22, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Oct. 22, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Oct. 22, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Oct. 22, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Oct. 22, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Oct. 22, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 22, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 22, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 22, 2014	NCR	Radiation (03CH01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----