

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
TEL: +82-31-645-6300 **FAX: +82-31-645-6401**

FCC UNII REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:

March 22, 2019

Location:

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1903-FC044

FCC ID: **A3LSMA3050**

APPLICANT: **SAMSUNG Electronics Co., Ltd.**

Model: SM-A3050

Additional Model: SM-A3058

EUT Type: Mobile Phone

Modulation type OFDM

FCC Classification: Unlicensed National Information Infrastructure(UNII)

FCC Rule Part(s): Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.



Report prepared by : Jung Ki Lim
Engineer of Telecommunication testing center



Approved by : Kwon Jeong
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1903-FC044	March 22, 2019	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
EUT DESCRIPTION	4
2. MAXIMUM OUTPUT POWER	5
3. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE.....	6
GENERAL TEST PROCEDURES.....	6
DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION	7
5. FACILITIES AND ACCREDITATIONS.....	7
5.1 FACILITIES	7
5.2 EQUIPMENT.....	7
6. ANTENNA REQUIREMENTS.....	7
7. MEASUREMENT UNCERTAINTY	8
8. DESCRIPTION OF TESTS	9
9. SUMMARY OF TEST RESULTS	2 5
10. TEST RESULT	2 6
10.1 DUTY CYCLE.....	2 6
10.2 26 dB BANDWIDTH.....	2 9
10.3 6 dB BANDWIDTH.....	3 8
10.4 OUTPUT POWER MEASUREMENT	4 0
10.5 POWER SPECTRAL DENSITY	4 3
10.6 FREQUENCY STABILITY.....	5 2
10.6.1 20MHz BW	5 2
10.6.2 40MHz BW	6 8
10.6.3 80MHz BW	8 4
10.7 STRADDLE CHANNEL.....	1 0 0
10.7.1 26dB Bandwidth.....	1 0 0
10.7.2 6 dB Bandwidth.....	1 0 3
10.7.3 Output Power	1 0 6
10.7.4 Power Spectral Density.....	1 0 9
10.8 RADIATED SPURIOUS EMISSIONS.....	1 1 2
10.9 RADIATED RESTRICTED BAND EDGE.....	1 5 5
10.10 POWERLINE CONDUCTED EMISSIONS	1 7 4
11. LIST OF TEST EQUIPMENT	1 7 8
12. ANNEX A_ TEST SETUP PHOTO	1 8 0

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SM-A3050	
Additional Model	SM-A3058	
EUT Type	Mobile Phone	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BG580ABU Type: Li-ion battery	
Travel Adapter Information	Model : EP-TA200 Manufacture: DONGYANG E&P	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	UNII 1	20MHz BW : 5180 - 5240 40MHz BW : 5190 - 5230 80MHz BW : 5210
	UNII 2A	20MHz BW : 5260 - 5320 40MHz BW : 5270 - 5310 80MHz BW : 5290
	UNII 2C	20MHz BW : 5500 - 5720 40MHz BW : 5510 - 5710 80MHz BW : 5530 – 5690
Antenna Specification	UNII 3	20MHz BW : 5745 - 5825 40MHz BW : 5755 - 5795 80MHz BW : 5775
	Antenna type: LDS Peak Gain : -4.06 dBi	
Straddle channel	Supported	
TDWR Band	Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	February 25, 2019 ~ March 20, 2019	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	Channel Bandwidth (MHz)	Frequency Range (MHz)	Power (dBm)	Power (W)
UNII1	802.11a	20	5180 – 5240	16.25	0.042
	802.11n	20	5180 – 5240	15.78	0.038
	802.11n	40	5190 - 5230	15.04	0.032
	802.11ac	20	5180 – 5240	16.08	0.041
	802.11ac	40	5190 - 5230	14.97	0.031
	802.11ac	80	5210	6.29	0.004
UNII2A	802.11a	20	5260 – 5320	15.96	0.039
	802.11n	20	5260 – 5320	15.95	0.039
	802.11n	40	5270 – 5310	14.82	0.030
	802.11ac	20	5260 – 5320	15.91	0.039
	802.11ac	40	5270 – 5310	14.75	0.030
	802.11ac	80	5290	7.86	0.006
UNII2C	802.11a	20	5500 – 5720	16.30	0.043
	802.11n	20	5500 – 5720	16.19	0.042
	802.11n	40	5510 – 5710	15.14	0.033
	802.11ac	20	5500 – 5720	16.29	0.043
	802.11ac	40	5510 – 5710	14.91	0.031
	802.11ac	80	5530 – 5690	11.87	0.015
UNII3	802.11a	20	5745 – 5825	16.37	0.043
	802.11n	20	5745 – 5825	16.37	0.043
	802.11n	40	5755 – 5795	14.81	0.030
	802.11ac	20	5745 – 5825	16.21	0.042
	802.11ac	40	5755 – 5795	14.81	0.030
	802.11ac	80	5775	11.59	0.014

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

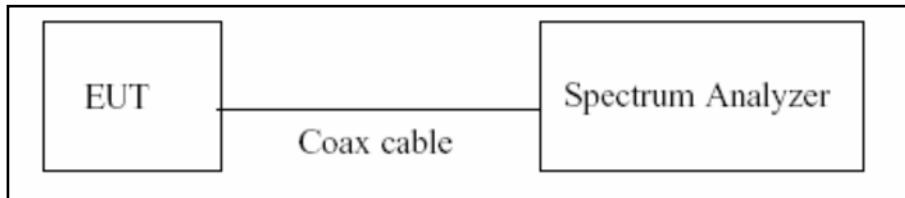

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/ T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

8.2. 6dB Bandwidth & 26dB Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

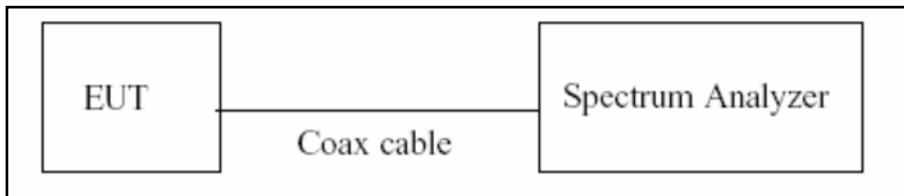

Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3*RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	<ul style="list-style-type: none"> - Master : Not exceed 1 W(=30dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

Test Configuration

Power Meter

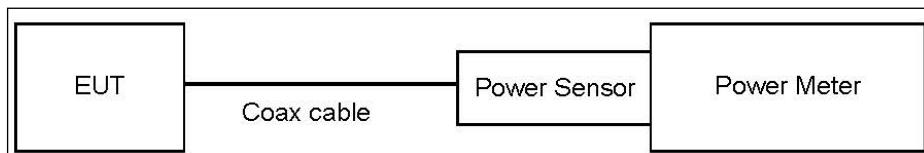

Spectrum Analyzer(Only Straddle Channel)

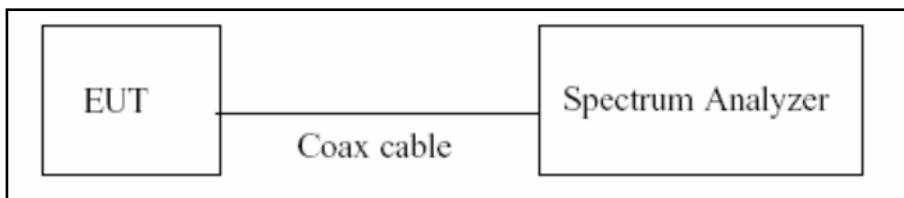

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2*span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss


3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	20.63
UNII 2A	20.63
UNII 2C	20.63
UNII 3	20.63

(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density**Limit**

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

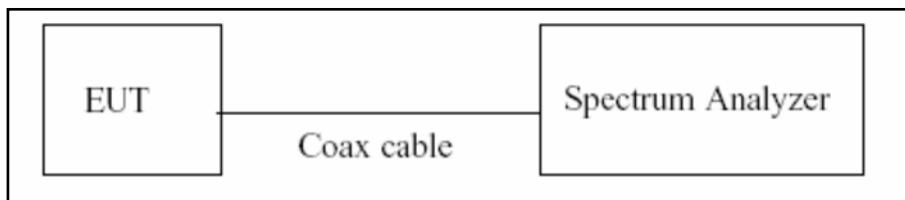Test Configuration**Test Procedure**

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	20.63
UNII 2A	20.63
UNII 2C	20.63
UNII 3	20.63


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

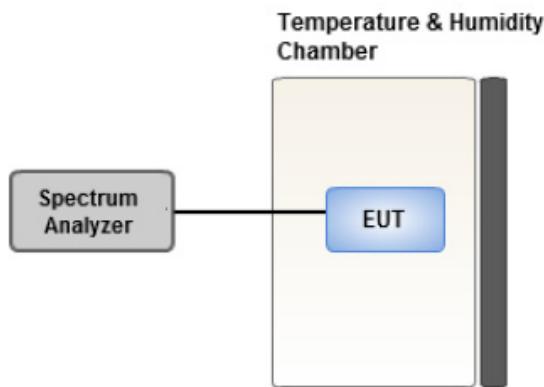

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor


8.7. Radiated Test**Limit**

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

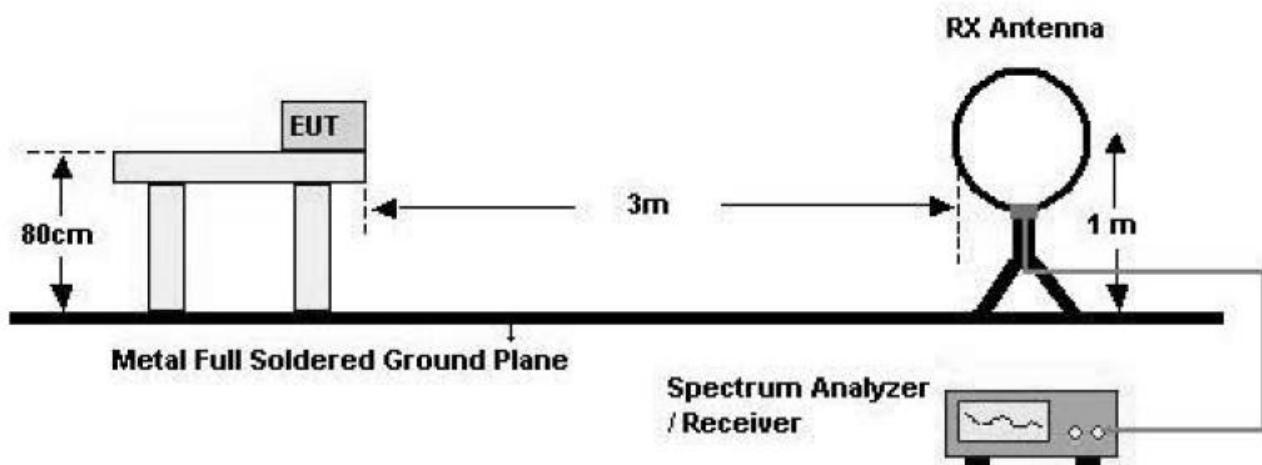

30 MHz - 1 GHz

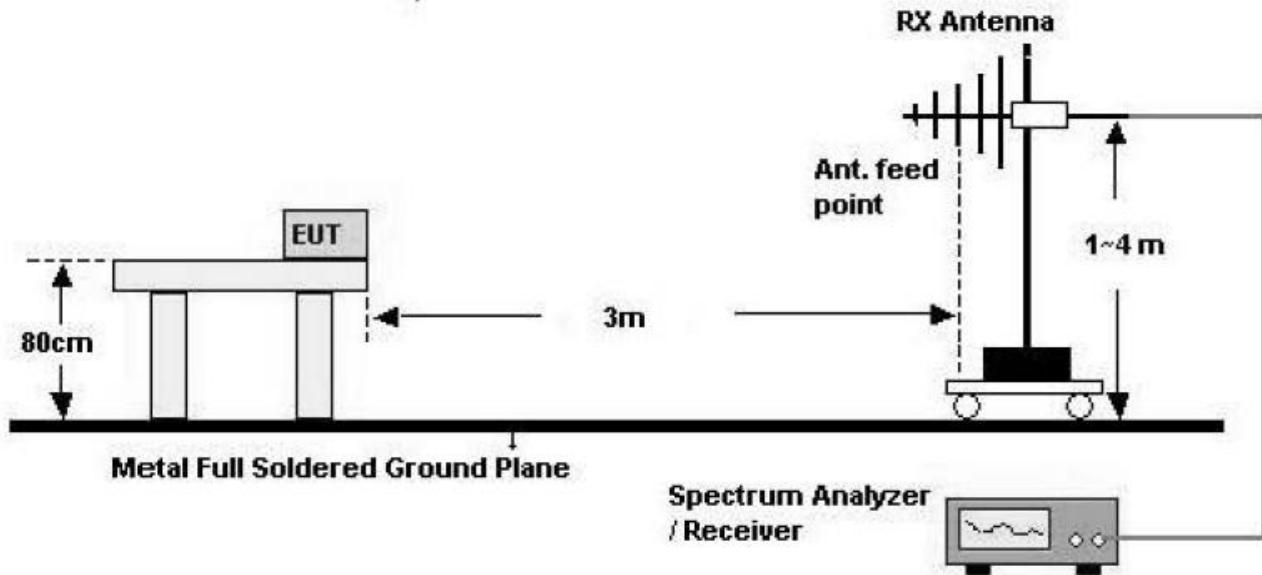

Above 1 GHz

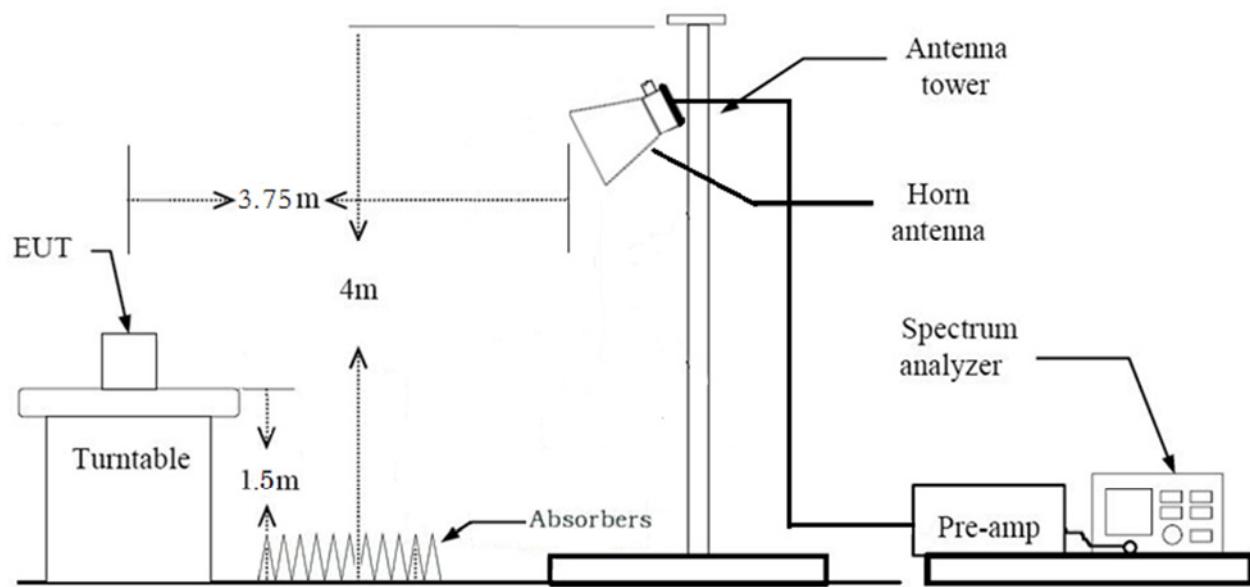

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40 \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40 \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \times \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.

The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times \text{RBW}$

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log \left(\frac{\text{test distance}}{\text{specific distance}} \right)$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = $VBW \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
11. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log \left(\frac{\text{test distance}}{\text{specific distance}} \right)$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is $<$ 98 percent) = VBW \geq 1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

10. Measured Frequency Range :

- 4500MHz ~ 5150MHz
- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz
- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.943	0.257	1000
802.11n(HT20)	MCS 0	0.944	0.249	1000
802.11n(HT40)	MCS 0	0.874	0.586	3000
802.11ac(VHT20)	MCS 0	0.938	0.278	1000
802.11ac(VHT40)	MCS 0	0.864	0.634	3000
802.11ac(VHT80)	MCS 0	0.851	0.699	3000

8.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Y
3. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11a : 6Mbps
 - 802.11n : MCS0
 - 802.11ac : MCS0
4. SM-A3050, SM-A3058 were tested and the worst case results are reported.
(Worst case : SM-A3050)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SM-A3050, SM-A3058 were tested and the worst case results are reported.
(Worst case : SM-A3050)

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported
2. SM-A3050, SM-A3058 were tested and the worst case results are reported.
(Worst case : SM-A3050)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A		PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW(5150-5250 MHz) < 250 mW or $11+10 \log \log_{10} (\text{BW})$ dBm (5250-5350 MHz) < 250 mW or $11+10 \log \log_{10} (\text{BW})$ dBm (5470-5725 MHz) <1 W(5725-5850 MHz)	Conducted	PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g) §2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.429	1.516	0.943	0.257
	9	0.960	1.056	0.909	0.414
	12	0.728	0.828	0.880	0.557
	18	0.491	0.598	0.821	0.859
	24	0.371	0.488	0.761	1.186
	36	0.255	0.378	0.676	1.702
	48	0.195	0.318	0.613	2.125
	54	0.179	0.302	0.593	2.272


Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.336	1.415	0.944	0.249
	1	0.690	0.792	0.871	0.601
	2	0.474	0.586	0.809	0.922
	3	0.365	0.469	0.778	1.089
	4	0.249	0.367	0.678	1.691
	5	0.200	0.323	0.619	2.084
	6	0.184	0.299	0.615	2.109
	7	0.169	0.280	0.602	2.206
802.11n (HT40)	0	0.664	0.760	0.874	0.586
	1	0.350	0.458	0.766	1.159
	2	0.248	0.363	0.683	1.657
	3	0.195	0.311	0.628	2.020
	4	0.144	0.259	0.557	2.541
	5	0.116	0.240	0.484	3.148
	6	0.108	0.232	0.467	3.311
	7	0.100	0.224	0.447	3.493

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.344	1.433	0.938	0.278
	1	0.684	0.788	0.868	0.616
	2	0.466	0.580	0.804	0.946
	3	0.366	0.472	0.775	1.105
	4	0.260	0.374	0.694	1.584
	5	0.203	0.318	0.638	1.950
	6	0.189	0.310	0.608	2.159
	7	0.173	0.296	0.584	2.337
	8	0.152	0.267	0.569	2.450
802.11ac (VHT40)	0	0.668	0.773	0.864	0.634
	1	0.356	0.460	0.774	1.113
	2	0.252	0.366	0.689	1.621
	3	0.198	0.304	0.653	1.853
	4	0.148	0.262	0.564	2.487
	5	0.120	0.244	0.490	3.100
	6	0.113	0.236	0.478	3.208
	7	0.104	0.228	0.457	3.399
	8	0.096	0.220	0.436	3.602
	9	0.088	0.212	0.415	3.819
802.11ac (VHT80)	0	0.596	0.700	0.851	0.699
	1	0.319	0.434	0.735	1.337
	2	0.228	0.351	0.649	1.876
	3	0.180	0.304	0.593	2.269
	4	0.136	0.260	0.524	2.809
	5	0.112	0.236	0.474	3.243
	6	0.104	0.227	0.458	3.393
	7	0.096	0.219	0.438	3.588
	8	0.088	0.212	0.416	3.813
	9	0.084	0.207	0.405	3.923


Note:

In order to simplify the report, attached plots were only lowest datarate.


802.11a

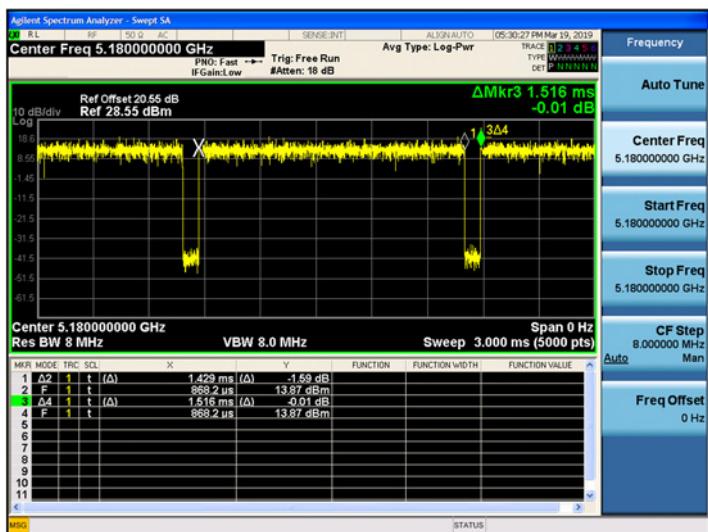


802.11n(HT20)

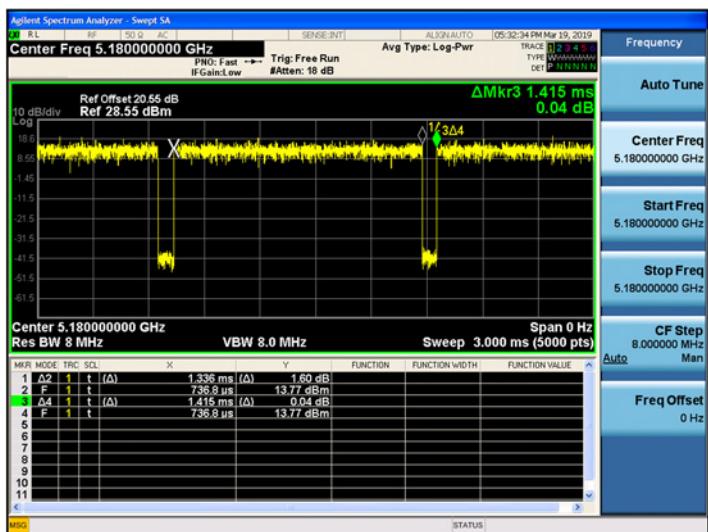


802.11n(HT40)

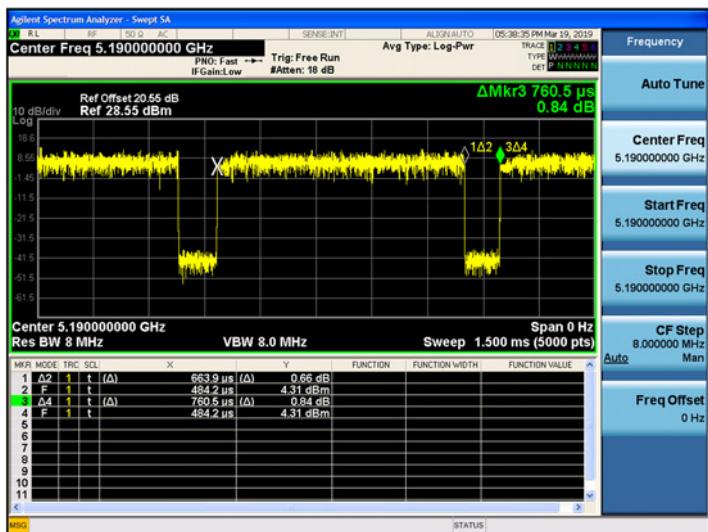


802.11ac(VHT20)

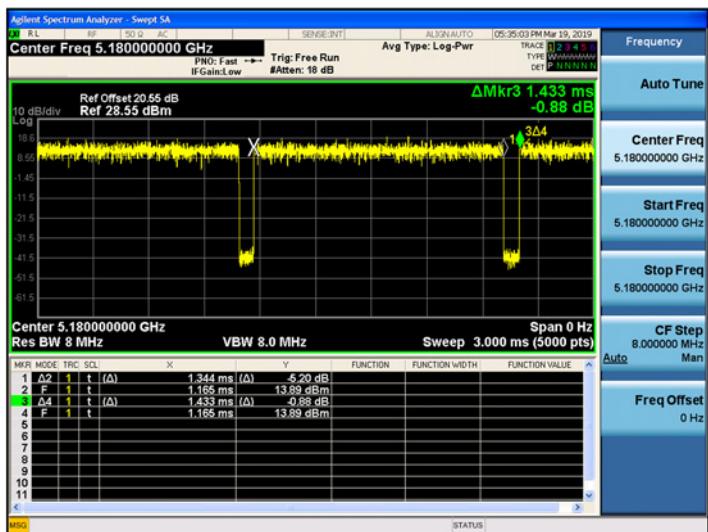

802.11ac(VHT40)

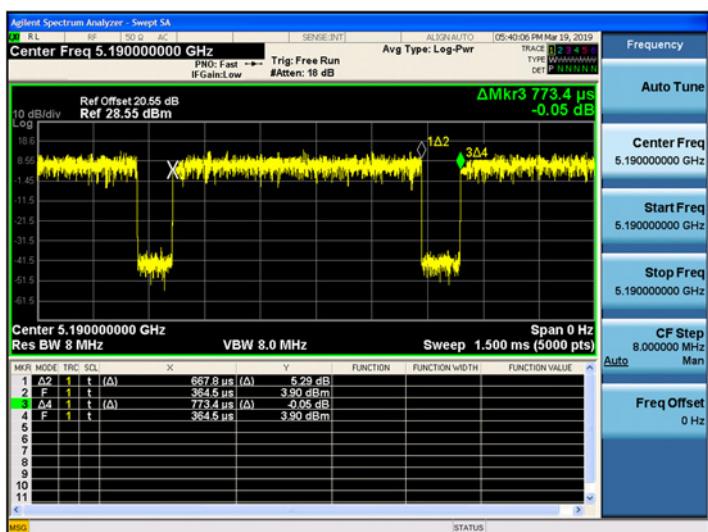

802.11ac(VHT80)

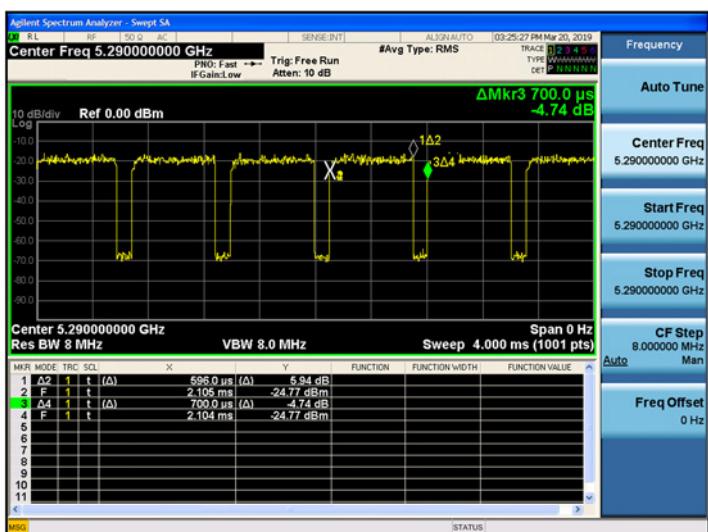

10.2 26 dB BANDWIDTH

802.11a Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	19.51	16.374
5200	40	19.68	16.403
5240	48	19.57	16.416
5260	52	19.37	16.411
5300	60	19.57	16.419
5320	64	19.08	16.391
5500	100	19.38	16.344
5600	120	19.27	16.401
5720	144	19.48	16.423
5745	149	22.00	16.435
5785	157	19.75	16.418
5825	165	21.90	16.394

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.27	17.400
5200	40	22.57	17.429
5240	48	23.58	17.427
5260	52	21.43	17.376
5300	60	20.26	17.378
5320	64	19.73	17.410
5500	100	19.53	17.367
5600	120	23.32	17.396
5720	144	20.04	17.406
5745	149	21.72	17.417
5785	157	19.75	17.372
5825	165	19.83	17.407

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	42.44	37.411
5230	46	44.82	37.848
5270	54	43.13	37.848
5310	62	41.78	37.294
5510	102	42.55	37.660
5590	118	43.26	37.936
5710	142	42.90	37.515
5755	151	60.61	37.953
5795	159	43.75	38.008

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.98	17.398
5200	40	22.69	17.392
5240	48	23.63	17.449
5260	52	21.73	17.429
5300	60	19.49	17.397
5320	64	19.75	17.375
5500	100	19.51	17.378
5600	120	19.79	17.416
5720	144	22.80	17.414
5745	149	23.26	17.410
5785	157	21.91	17.418
5825	165	22.27	17.401




802.11ac(VHT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	42.54	37.929
5230	46	41.95	37.697
5270	54	43.02	37.909
5310	62	42.59	37.701
5510	102	42.12	37.611
5590	118	42.20	37.528
5710	142	41.66	37.563
5755	151	43.45	37.852
5795	159	43.03	37.910

802.11ac(VHT80) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	81.32	75.365
5290	58	81.35	75.397
5530	106	81.32	75.382
5610	122	83.54	75.520
5690	138	85.21	75.402
5775	155	81.96	75.417

Test Plots(802.11a)
Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 1 BAND 26dB Bandwidth (CH 40)

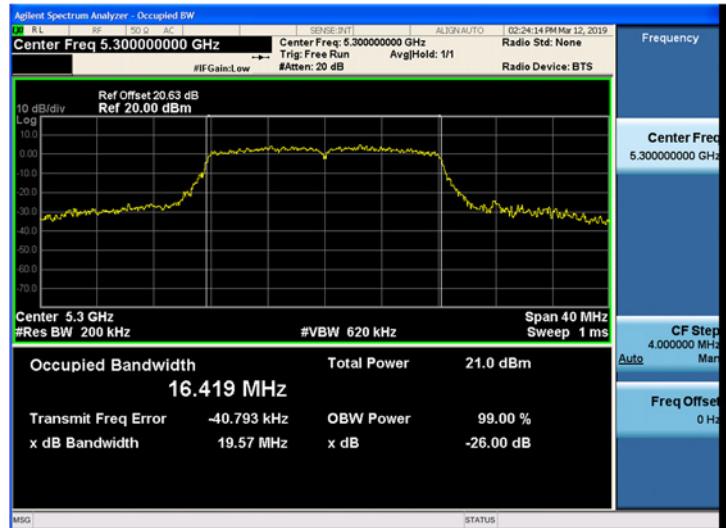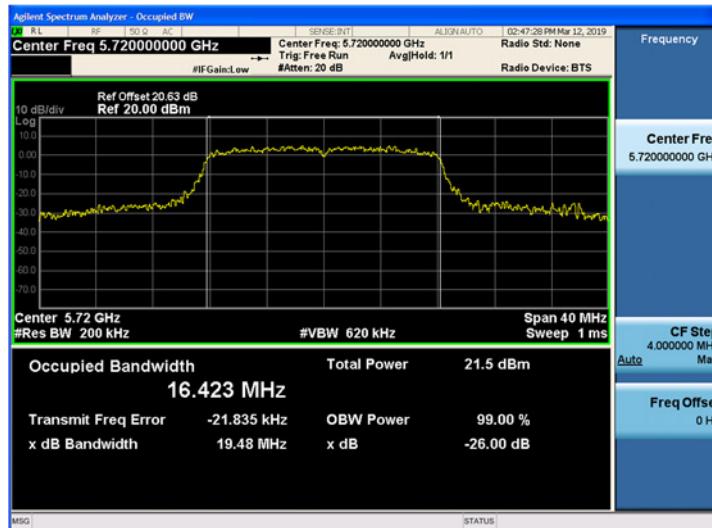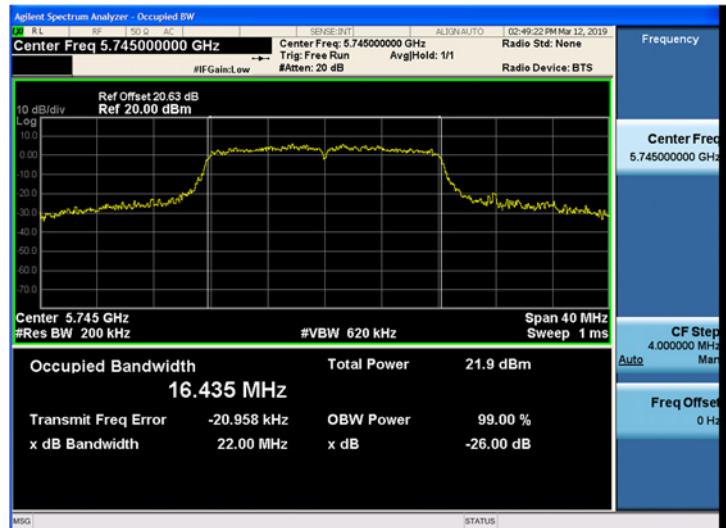
802.11a UNII 2A BAND 26dB Bandwidth (CH 60)

802.11a UNII 2C BAND 26dB Bandwidth (CH144)

802.11a UNII 3 BAND 26dB Bandwidth (CH 149)


Test Plots(802.11n(HT20))

Note:

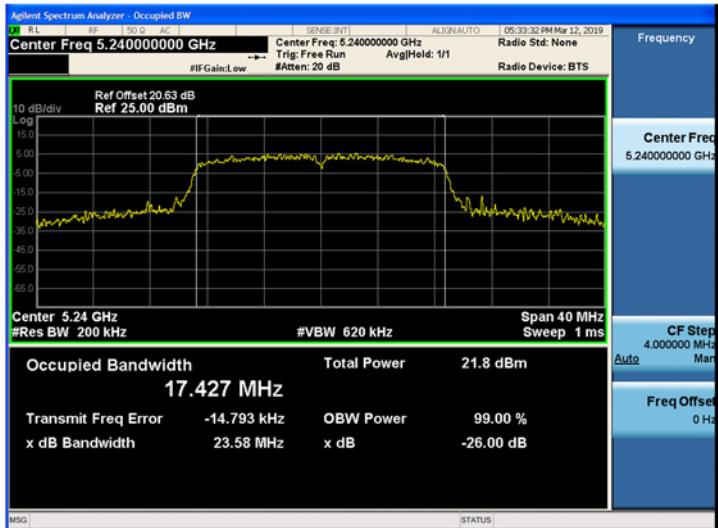In order to simplify the report, attached plots were only the most wide channel.


802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 48)




802.11n_HT20 UNII 2A BAND 26dB Bandwidth(CH 52)



802.11n_HT20 UNII 2C BAND 26dB Bandwidth(CH 120)

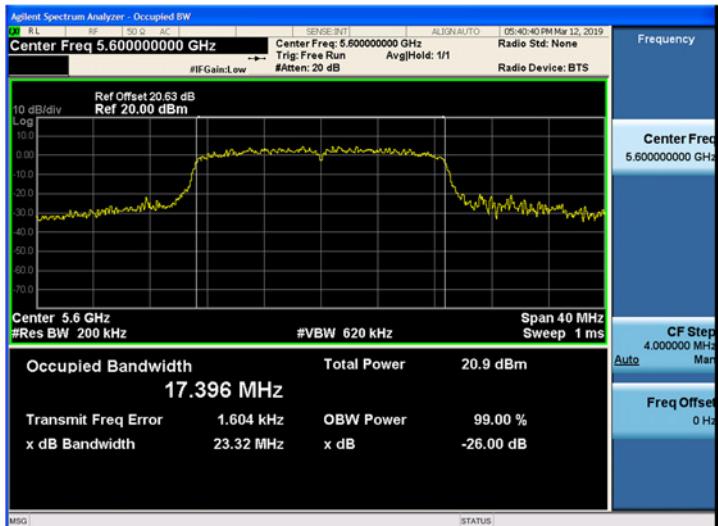

802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 149)

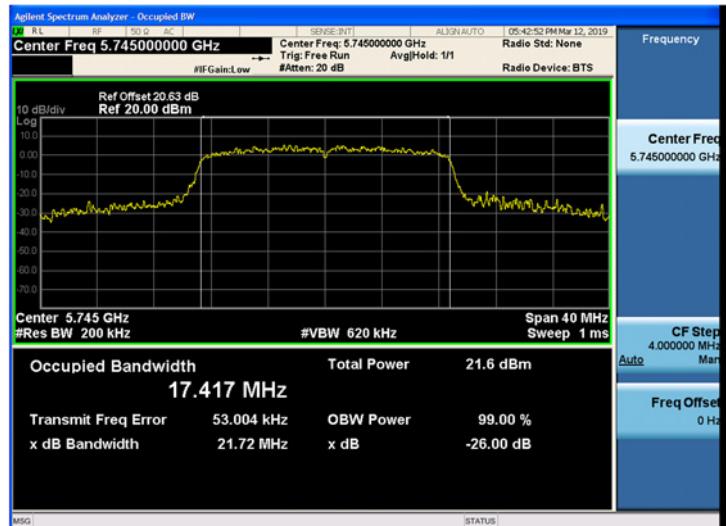


Test Plots(802.11n(HT40))


Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

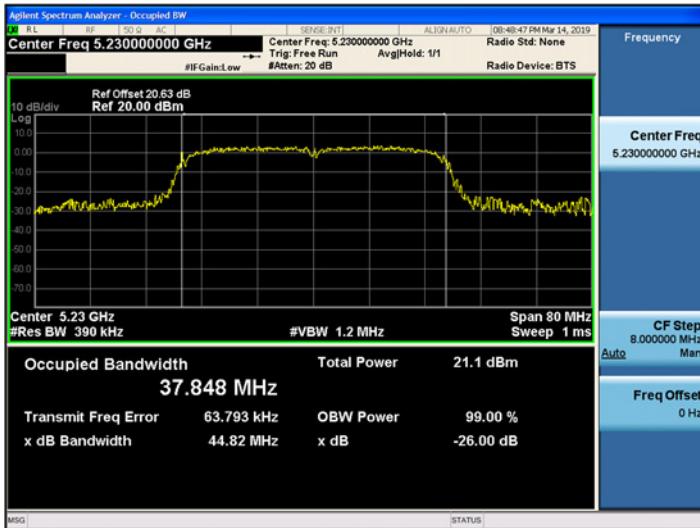


802.11n_HT40 UNII 2A BAND 26dB Bandwidth (CH 54)

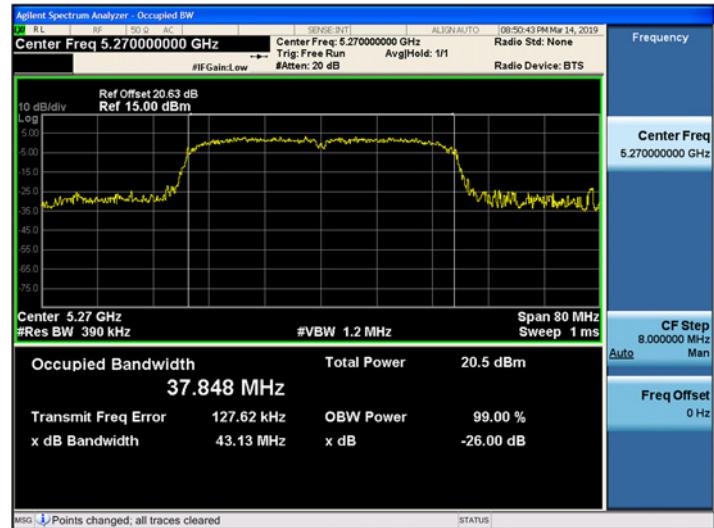

802.11n_HT40 UNII 2C BAND 26dB Bandwidth(CH 118)

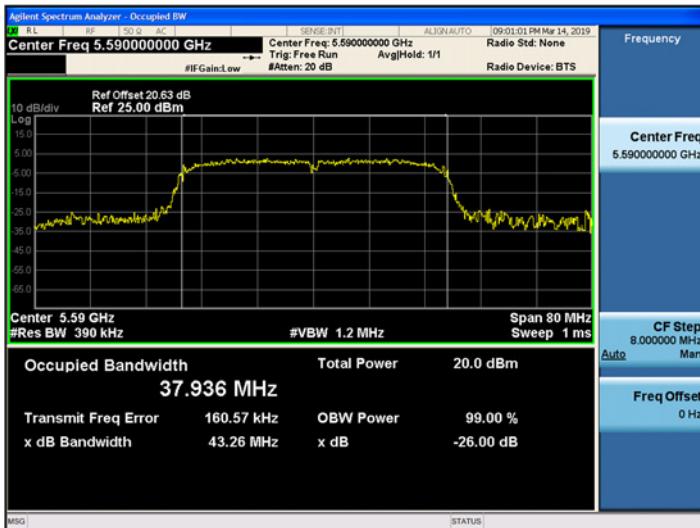

802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 151)

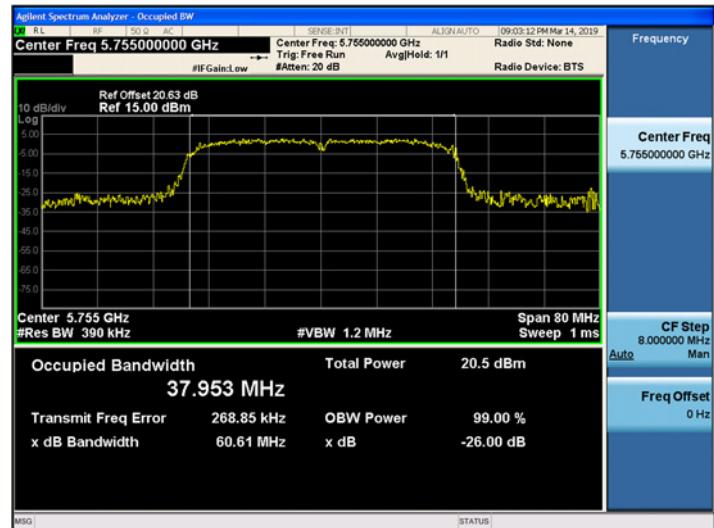

Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11ac_VHT20 UNII 1 BAND 26dB Bandwidth(CH 48)




802.11ac_VHT20 UNII 2A BAND 26dB Bandwidth(CH 52)



802.11ac_VHT20 UNII 2C BAND 26dB Bandwidth(CH 144)

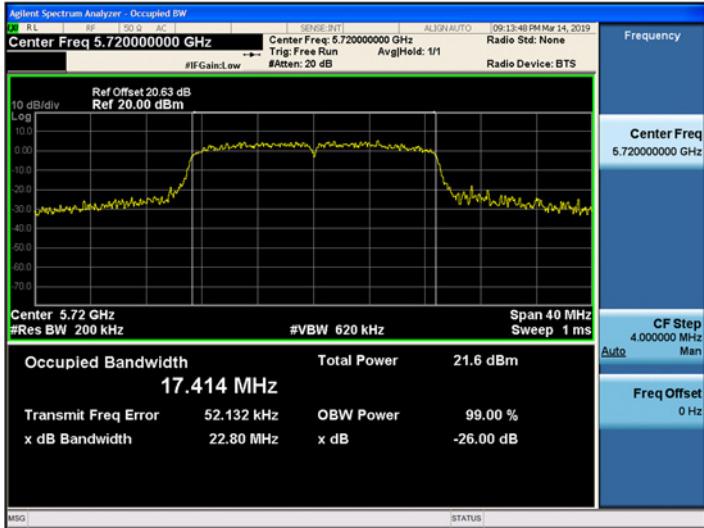

802.11ac_VHT20 UNII 3 BAND 26dB Bandwidth(CH 149)

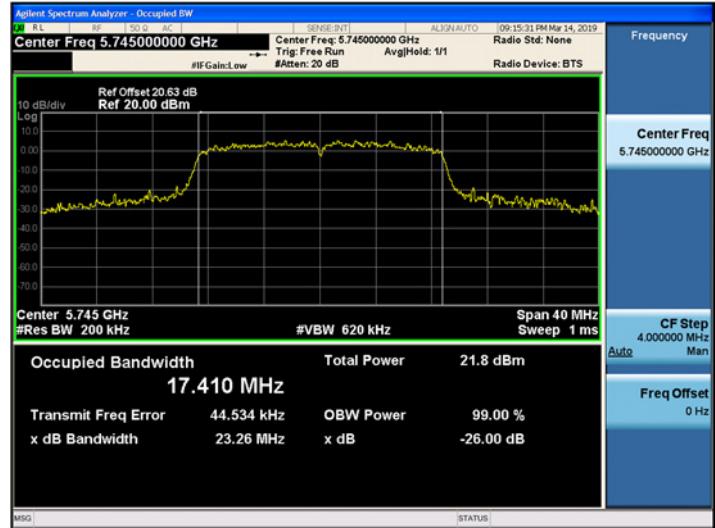

Test Plots(802.11ac(VHT40))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 38)




802.11ac_VHT40 UNII 2A BAND 26dB Bandwidth (CH 54)

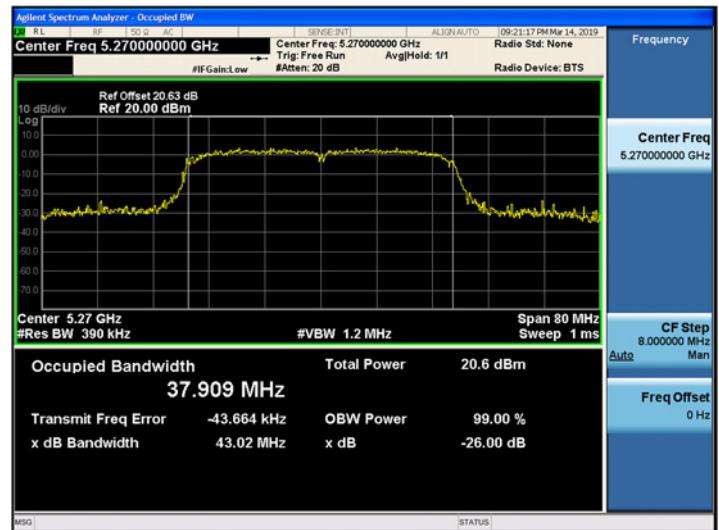

802.11ac_VHT40 UNII 2C BAND 26dB Bandwidth(CH 118)



802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 151)

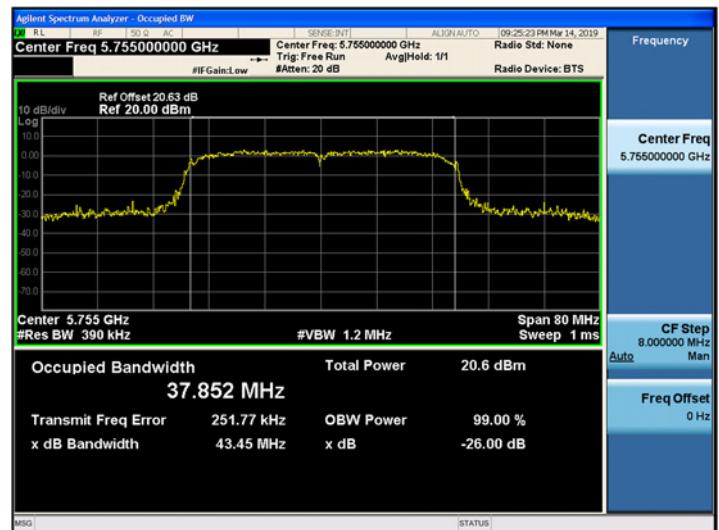

Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)




802.11ac_VHT80 UNII 2A BAND 26dB Bandwidth (CH 58)



802.11ac_VHT80 UNII 2C BAND 26dB Bandwidth(CH 138)



802.11ac_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)

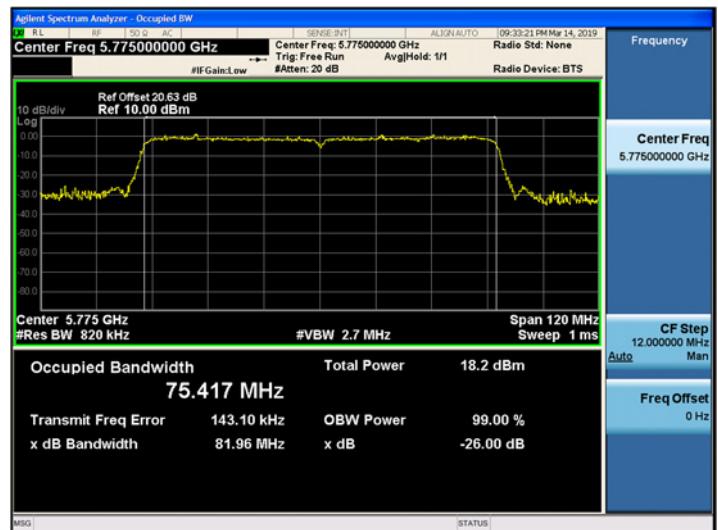

10.3 6 dB BANDWIDTH

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.07	> 0.5	Pass
5785	157	15.69	> 0.5	Pass
5825	165	15.83	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	14.77	> 0.5	Pass
5785	157	15.13	> 0.5	Pass
5825	165	15.19	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.20	> 0.5	Pass
5795	159	35.14	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.33	> 0.5	Pass
5785	157	15.09	> 0.5	Pass
5825	165	15.08	> 0.5	Pass


802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.21	> 0.5	Pass
5795	159	35.09	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.29	> 0.5	Pass

Test Plots

Note:

In order to simplify the report, attached plots were only the most narrow channel.

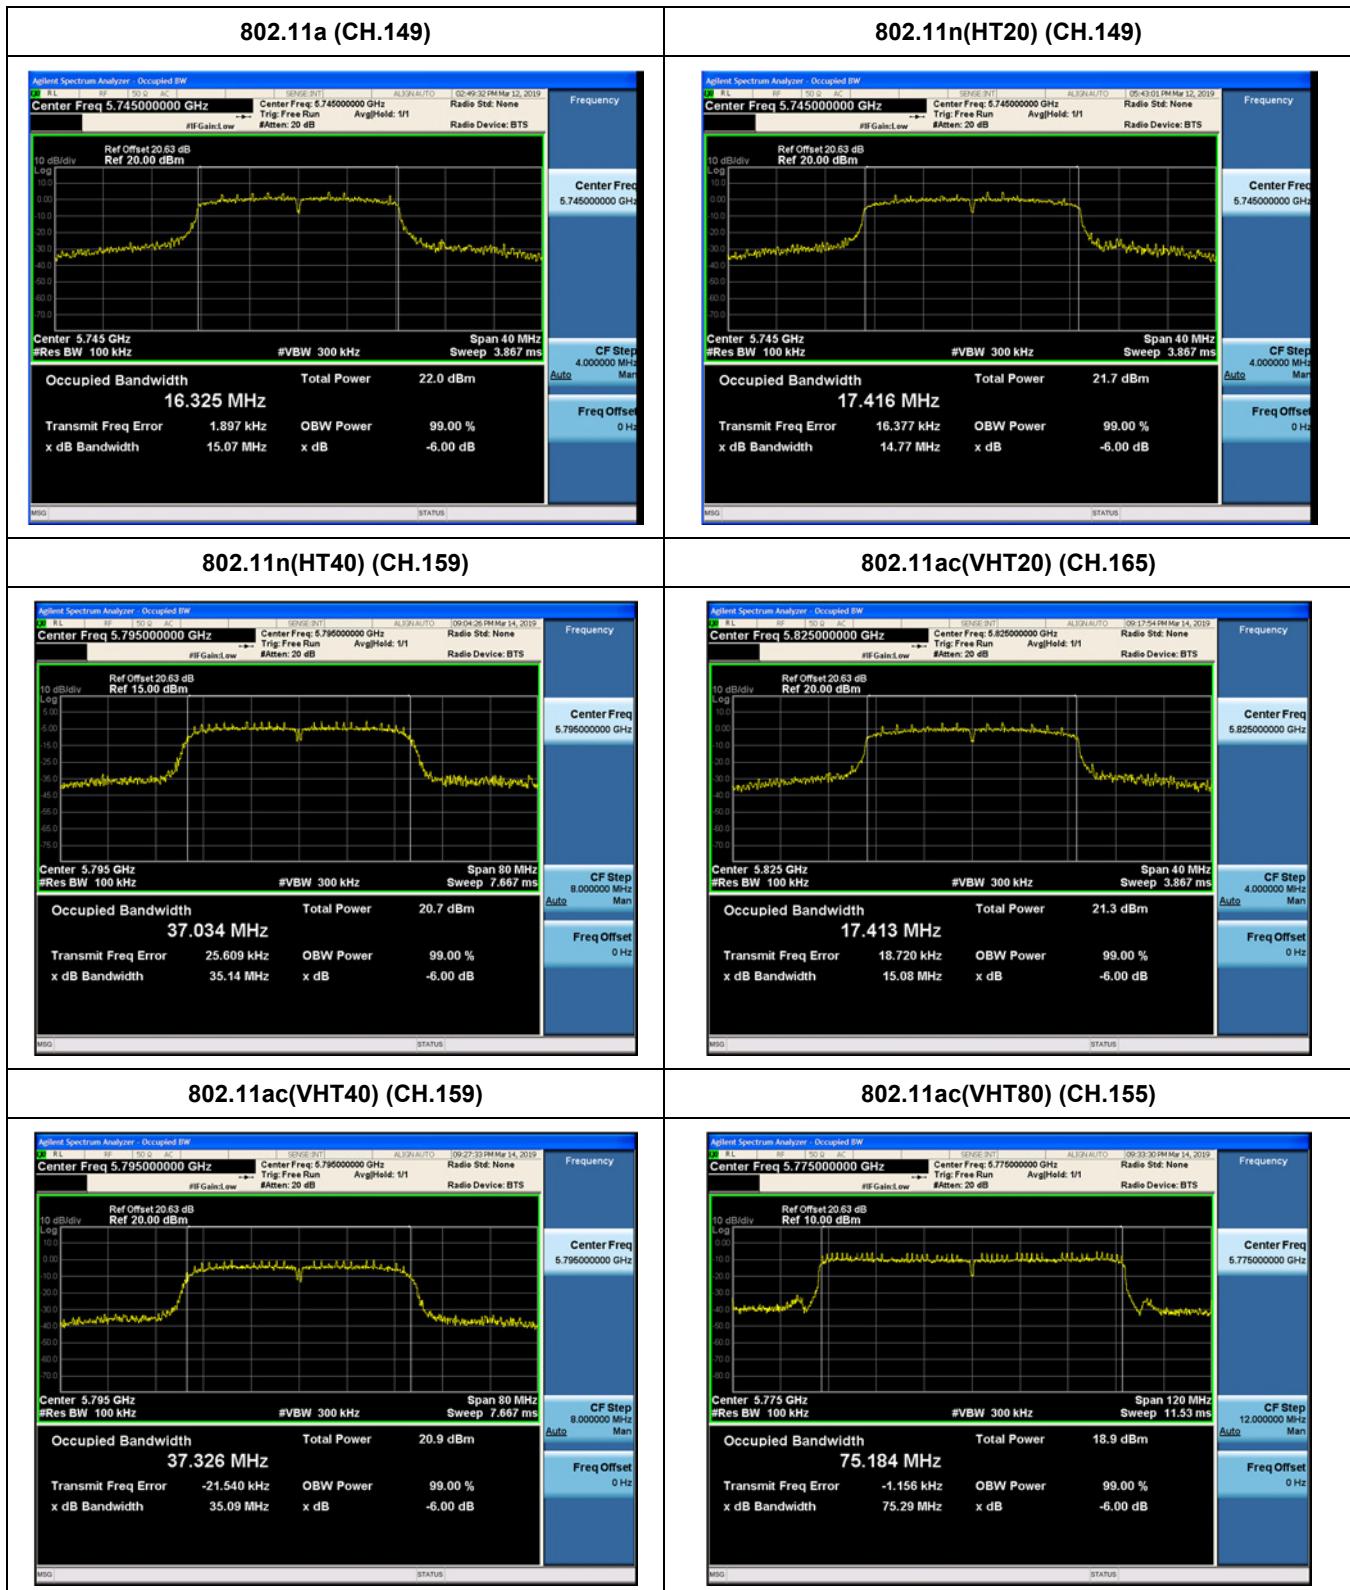

10.4 OUTPUT POWER MEASUREMENT

802.11a Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	16	13.47	1.702	15.17	23.98
5200	40	16	14.14	1.186	15.32	23.98
5240	48	16	14.55	1.702	16.25	23.98
5260	52	16	14.77	1.186	15.96	23.98
5300	56	16	13.98	1.702	15.68	23.98
5320	64	16	13.88	1.702	15.58	23.98
5500	100	14	12.58	1.702	14.28	23.98
5600	120	16	14.54	1.702	16.24	23.98
5720	144	16	14.60	1.702	16.30	23.98
5745	149	16	15.19	1.186	16.37	30.00
5785	157	16	14.30	1.702	16.00	30.00
5825	165	16	14.57	0.859	15.42	30.00

802.11n(20MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	16	13.34	1.691	15.03	23.98
5200	40	16	13.74	1.691	15.43	23.98
5240	48	16	14.85	0.922	15.78	23.98
5260	52	16	14.26	1.691	15.95	23.98
5300	56	16	13.88	1.691	15.57	23.98
5320	64	16	13.81	1.691	15.50	23.98
5500	100	14	12.55	1.691	14.24	23.98
5600	120	16	14.99	0.922	15.91	23.98
5720	144	16	14.50	1.691	16.19	23.98
5745	149	14	15.28	1.089	16.37	30.00
5785	157	16	14.07	1.691	15.76	30.00
5825	165	15	13.43	1.691	15.12	30.00

802.11n(40MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	11.5	10.01	2.020	12.03	23.98
5230	46	14	13.02	2.020	15.04	23.98
5270	54	14	14.23	0.586	14.82	23.98
5310	62	11	8.76	2.541	11.30	23.98
5510	102	11	7.03	2.541	9.57	23.98
5590	118	14	13.11	1.657	14.76	23.98
5710	142	14	12.60	2.541	15.14	23.98
5755	151	14	13.15	1.657	14.81	30.00
5795	159	14	12.12	2.541	14.67	30.00

802.11ac(20MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	16	14.39	1.584	15.97	23.98
5200	40	16	13.87	1.584	15.45	23.98
5240	48	16	14.50	1.584	16.08	23.98
5260	52	16	14.33	1.584	15.91	23.98
5300	56	16	14.00	1.584	15.59	23.98
5320	64	16	14.61	0.946	15.55	23.98
5500	100	14	12.81	1.584	14.39	23.98
5600	120	16	14.44	1.584	16.03	23.98
5720	144	16	14.71	1.584	16.29	23.98
5745	149	16	15.27	0.946	16.21	30.00
5785	157	16	14.25	1.584	15.83	30.00
5825	165	15	14.21	0.946	15.15	30.00

802.11ac(40MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	11.5	9.31	2.487	11.80	23.98
5230	46	14	12.49	2.487	14.97	23.98
5270	54	14	12.26	2.487	14.75	23.98
5310	62	11	9.94	1.621	11.56	23.98
5510	102	11	6.78	2.487	9.27	23.98
5590	118	14	12.42	2.487	14.91	23.98
5710	142	14	12.66	1.853	14.51	23.98
5755	151	14	12.32	2.487	14.81	30.00
5795	159	14	12.69	1.853	14.55	30.00

802.11ac(80MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	7	4.02	2.269	6.29	23.98
5290	58	8.5	5.59	2.269	7.86	23.98
5530	106	9.5	6.69	2.269	8.96	23.98
5610	122	12	9.06	2.809	11.87	23.98
5690	138	12	9.37	2.269	11.64	23.98
5775	155	12	8.78	2.809	11.59	30.00

10.5 POWER SPECTRAL DENSITY

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	2.192	1.702	3.894	11
5200	40	3.547	1.186	4.733	11
5240	48	3.653	1.702	5.355	11
5260	52	4.175	1.186	5.361	11
5300	60	3.205	1.702	4.907	11
5320	64	2.865	1.702	4.567	11
5500	100	1.139	1.702	2.841	11
5600	120	3.170	1.702	4.872	11
5720	144	3.781	1.702	5.483	11
5745	149	0.903	1.186	2.089	30
5785	157	1.074	1.702	2.776	30
5825	165	-0.361	0.859	0.498	30

802.11n(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	2.297	1.691	3.988	11
5200	40	2.928	1.691	4.619	11
5240	48	3.756	0.922	4.678	11
5260	52	3.532	1.691	5.223	11
5300	60	2.742	1.691	4.433	11
5320	64	2.399	1.691	4.090	11
5500	100	0.919	1.691	2.610	11
5600	120	3.049	0.922	3.971	11
5720	144	3.799	1.691	5.490	11
5745	149	0.820	1.089	1.909	30
5785	157	0.498	1.691	2.189	30
5825	165	0.005	1.691	1.696	30

802.11n(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5190	38	-4.694	2.020	-2.674	11
5230	46	-1.254	2.020	0.766	11
5270	54	-1.498	2.020	0.522	11
5310	62	-5.372	2.541	-2.831	11
5510	102	-8.650	2.541	-6.109	11
5590	118	-1.794	1.657	-0.137	11
5710	142	-2.518	2.541	0.023	11
5755	151	-4.235	1.657	-2.578	30
5795	159	-5.213	2.541	-2.672	30

802.11ac(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	2.776	1.584	4.360	11
5200	40	2.903	1.584	4.487	11
5240	48	3.654	1.584	5.238	11
5260	52	4.179	1.584	5.763	11
5300	60	3.348	1.584	4.932	11
5320	64	3.477	0.946	4.423	11
5500	100	0.536	1.584	2.120	11
5600	120	1.819	1.584	3.403	11
5720	144	3.129	1.584	4.713	11
5745	149	0.906	0.946	1.852	30
5785	157	0.438	1.584	2.022	30
5825	165	-1.273	0.946	-0.327	30



802.11ac(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5190	38	-4.936	2.487	-2.449	11
5230	46	-1.539	2.487	0.948	11
5270	54	-1.989	2.487	0.498	11
5310	62	-4.775	1.621	-3.154	11
5510	102	-7.519	2.487	-5.032	11
5590	118	-2.418	2.487	0.069	11
5710	142	-1.972	1.853	-0.119	11
5755	151	-4.350	2.487	-1.863	30
5795	159	-4.184	1.853	-2.331	30

802.11ac(80MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5210	42	-13.462	2.269	-11.193	11
5290	58	-12.617	2.269	-10.348	11
5530	106	-12.120	2.269	-9.851	11
5610	122	-8.848	2.809	-6.039	11
5690	138	-9.048	2.269	-6.779	11
5775	155	-11.479	2.809	-8.670	11

Test Plots(802.11a)

Note:



In order to simplify the report, attached plots were only channel of highest power.

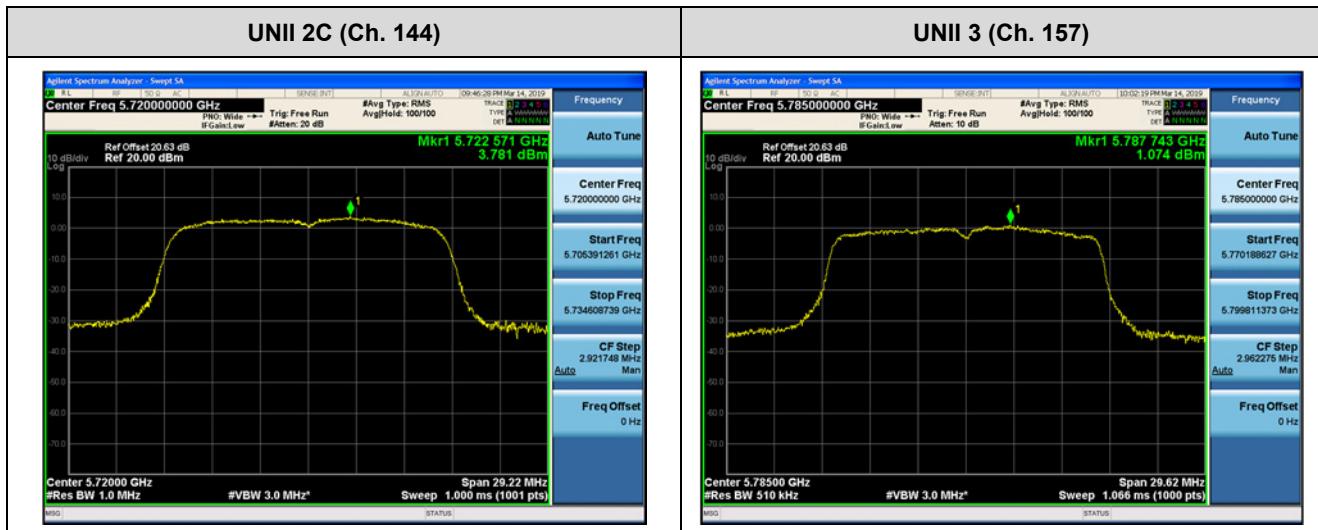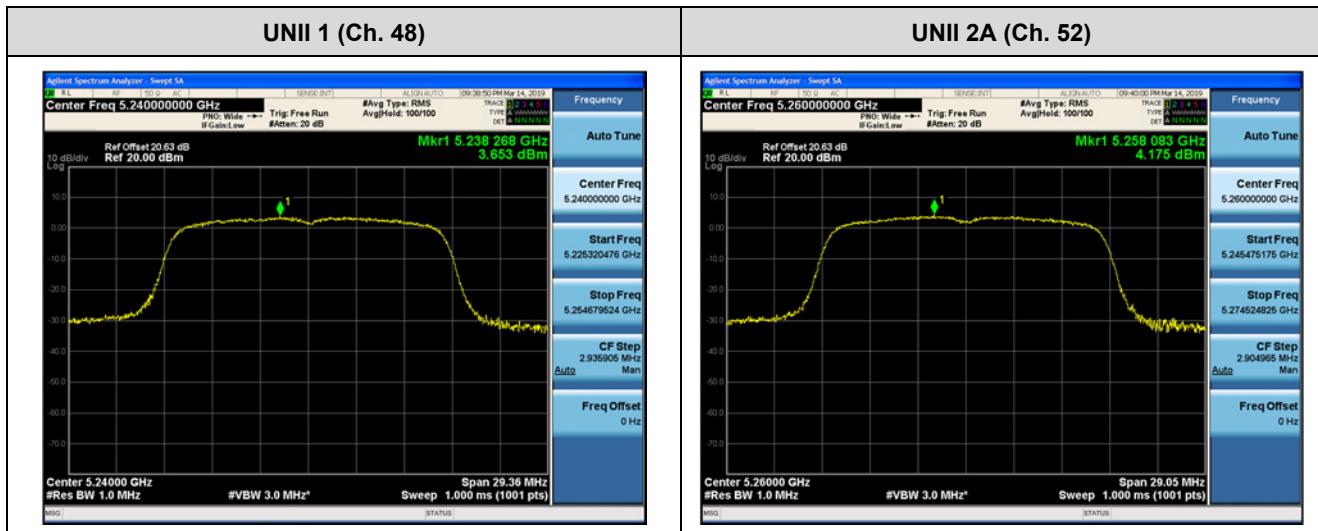

Test Plots(802.11n(HT20))



Note:

In order to simplify the report, attached plots were only channel of highest power.

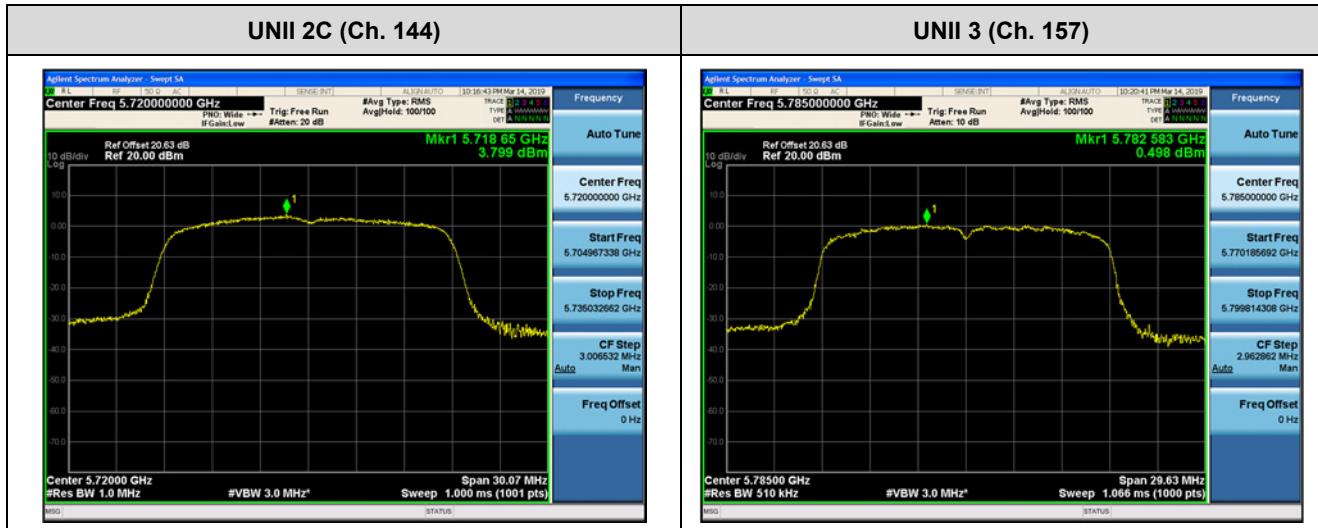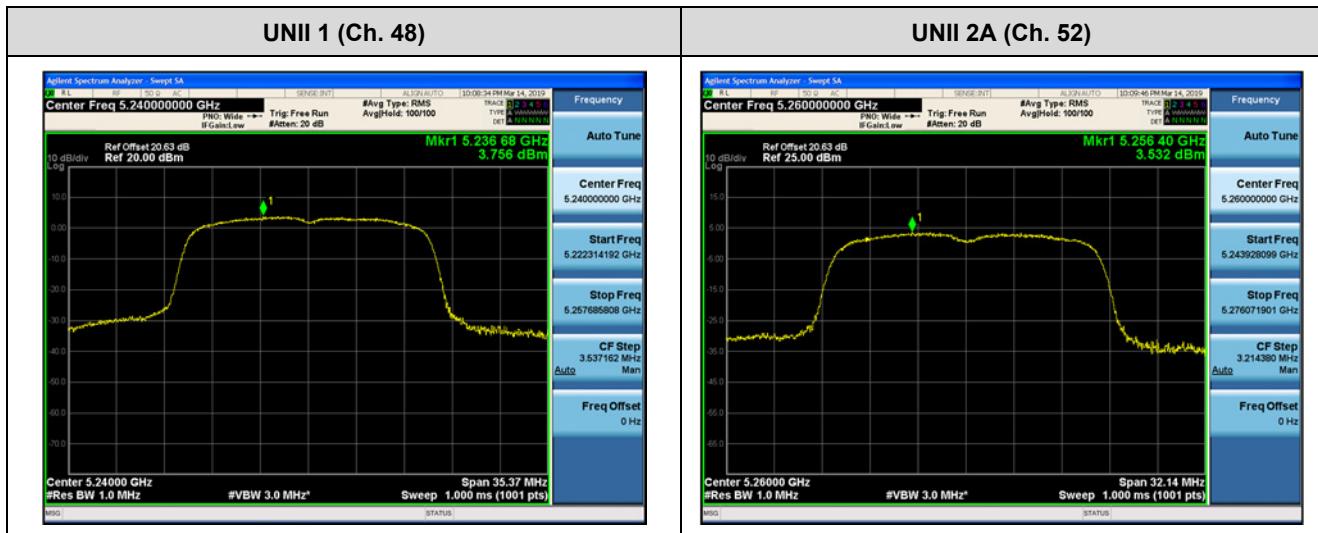

Test Plots(802.11n(HT40))
Note:



In order to simplify the report, attached plots were only channel of highest power.

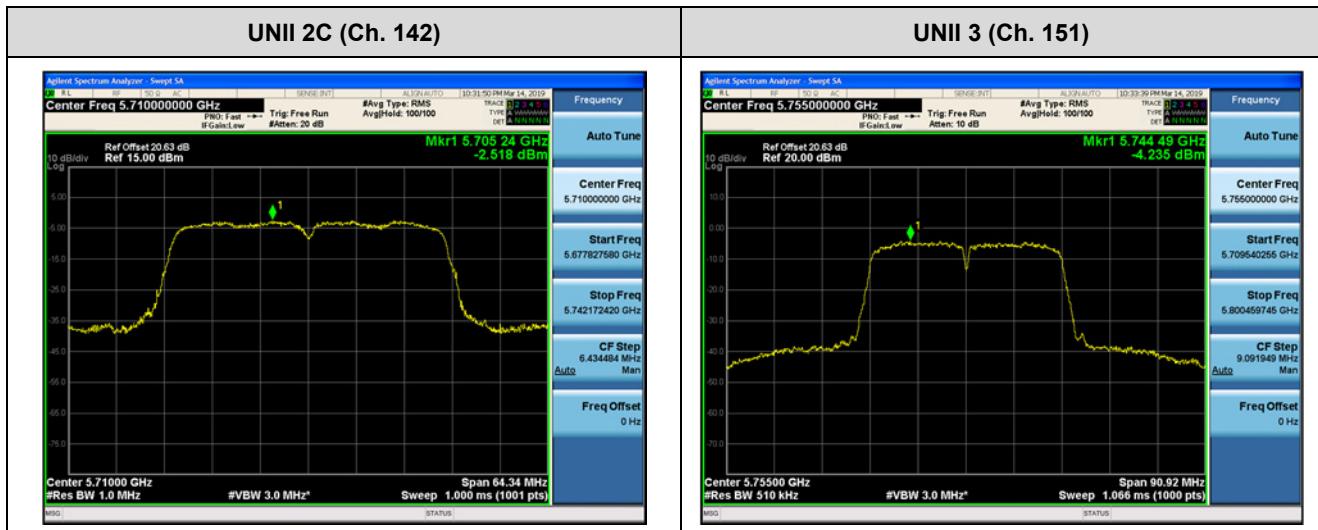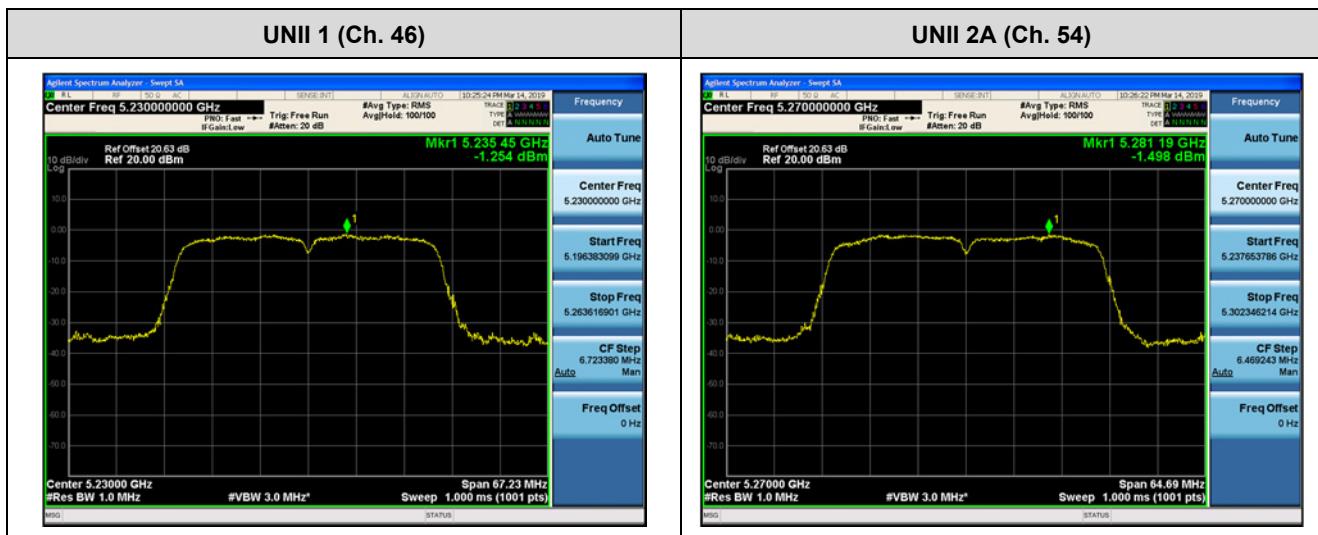

Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only channel of highest power.

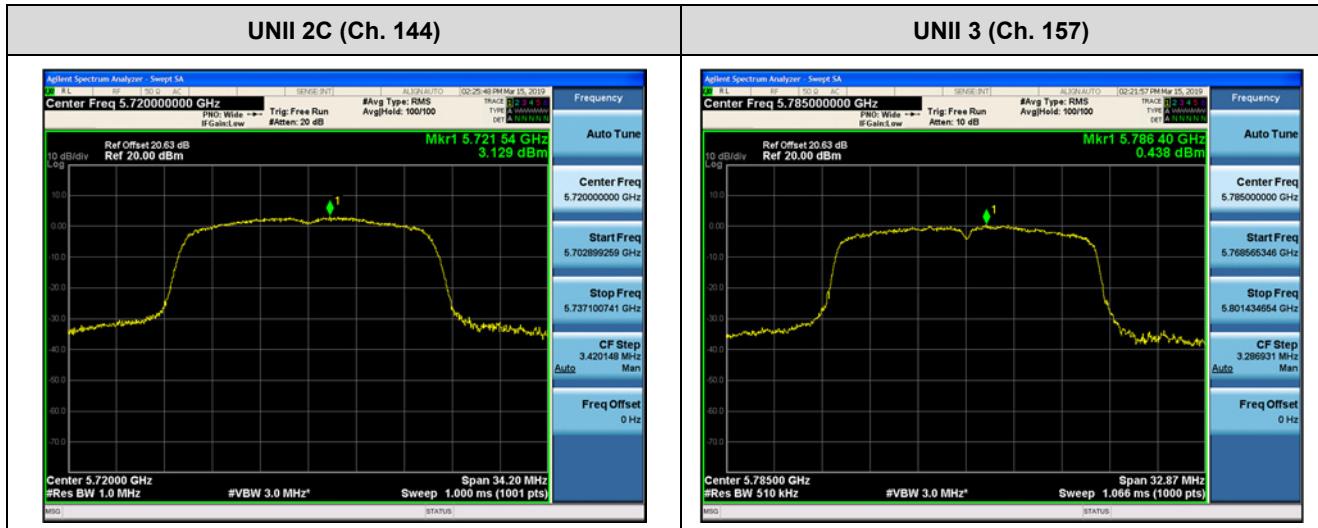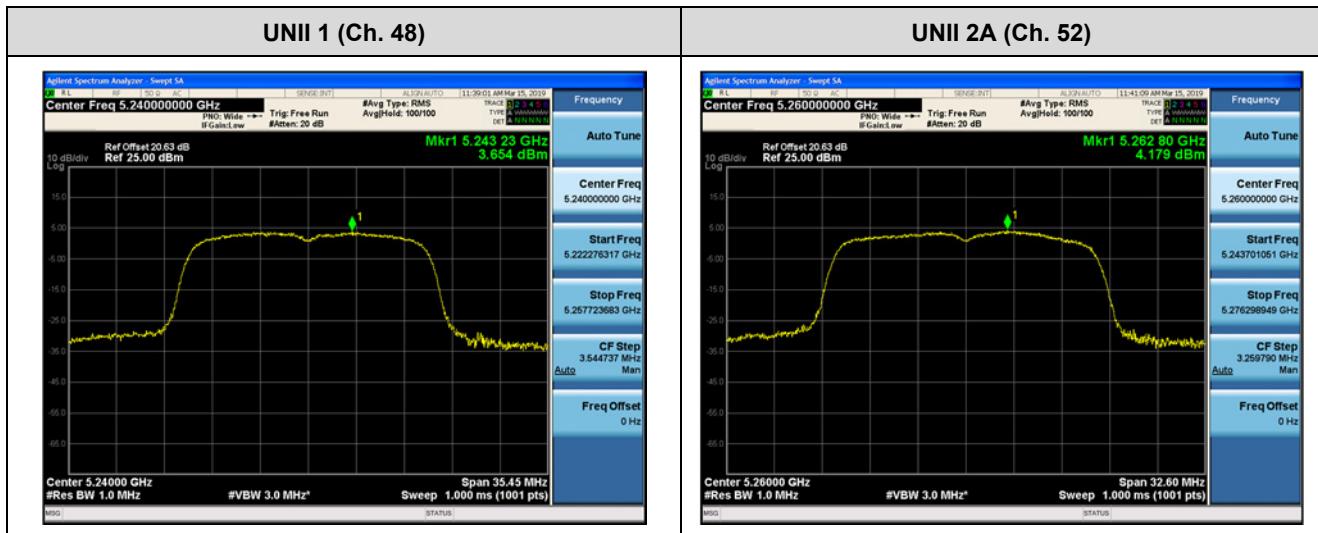

Test Plots(802.11ac(VHT40))

Note:



In order to simplify the report, attached plots were only channel of highest power.

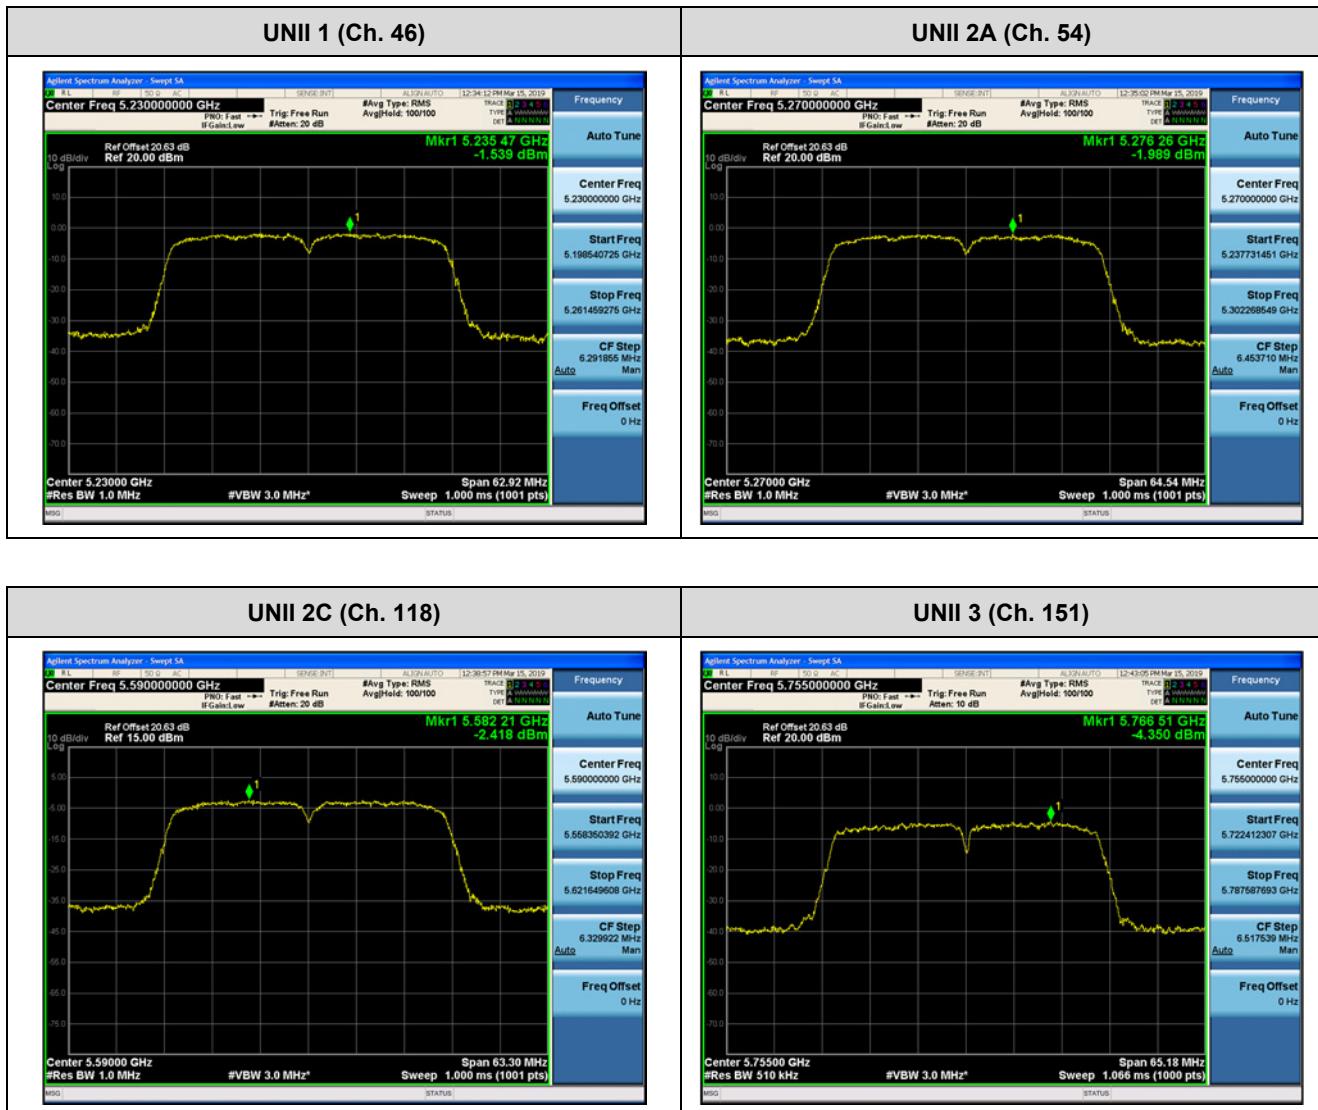

Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of highest power.

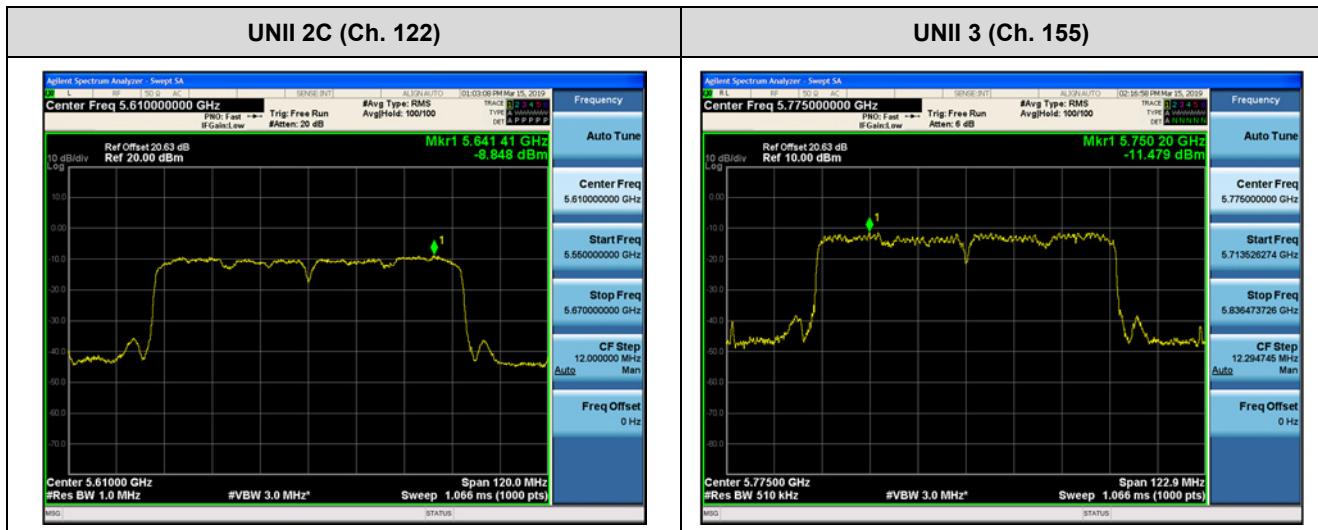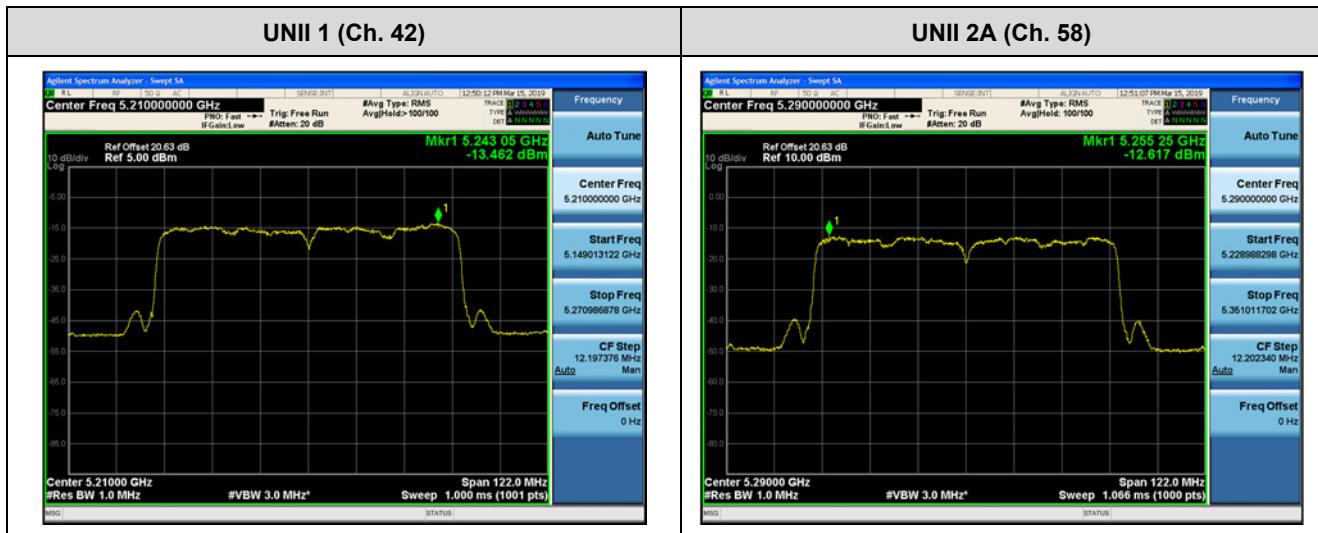

10.6 FREQUENCY STABILITY.

10.6.1 20MHz BW

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,180,000,000 Hz
CHANNEL:	36
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5180050.94	50.94
100%		-30	5180006.65	6.65
100%		-20	5180021.23	21.23
100%		-10	5180010.23	10.23
100%		0	5180046.15	46.15
100%		+10	5180063.90	63.90
100%		+30	5180063.04	63.04
100%		+40	5180024.32	24.32
100%		+50	5180045.08	45.08
115%		+20	5180065.63	65.63
End. Point	3.40	+20	5180014.41	14.41

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,260,000,000 Hz
CHANNEL:	52
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5260098.03	98.03
100%		-30	5260056.60	56.60
100%		-20	5260099.36	99.36
100%		-10	5260022.36	22.36
100%		0	5260079.84	79.84
100%		+10	5260091.61	91.61
100%		+30	5260083.11	83.11
100%		+40	5260048.44	48.44
100%		+50	5260074.53	74.53
115%	4.40	+20	5260072.16	72.16
End. Point	3.40	+20	5260024.78	24.78

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
OPERATING FREQUENCY: 5,500,000,000 Hz
CHANNEL: 100
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5500054.87	54.87
100%		-30	5500049.72	49.72
100%		-20	5500068.47	68.47
100%		-10	5500032.87	32.87
100%		0	5500067.88	67.88
100%		+10	5500001.75	1.75
100%		+30	5500032.04	32.04
100%		+40	5500050.45	50.45
100%		+50	5500086.50	86.50
115%	4.40	+20	5500097.17	97.17
End. Point	3.40	+20	5500031.24	31.24

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
OPERATING FREQUENCY: 5,745,000,000 Hz
CHANNEL: 149
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5745016.05	16.05
100%		-30	5745053.09	53.09
100%		-20	5745018.86	18.86
100%		-10	5745091.15	91.15
100%		0	5745080.66	80.66
100%		+10	5745083.03	83.03
100%		+30	5745091.49	91.49
100%		+40	5745014.87	14.87
100%		+50	5745064.47	64.47
115%	4.40	+20	5745032.67	32.67
End. Point	3.40	+20	5745027.32	27.32

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5180046.16	46.16
100%		-30	5180038.72	38.72
100%		-20	5180016.66	16.66
100%		-10	5180066.92	66.92
100%		0	5180028.12	28.12
100%		+10	5180015.19	15.19
100%		+30	5180060.82	60.82
100%		+40	5180077.25	77.25
100%		+50	5180036.75	36.75
115%	4.40	+20	5180054.92	54.92
End. Point	3.40	+20	5180052.18	52.18

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5260028.38	28.38
100%		-30	5260034.13	34.13
100%		-20	5260030.08	30.08
100%		-10	5260082.55	82.55
100%		0	5260042.11	42.11
100%		+10	5260078.69	78.69
100%		+30	5260066.69	66.69
100%		+40	5260085.75	85.75
100%		+50	5260022.28	22.28
115%	4.40	+20	5260020.37	20.37
End. Point	3.40	+20	5260016.76	16.76

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5500076.05	76.05
100%		-30	5500046.74	46.74
100%		-20	5500047.64	47.64
100%		-10	5500040.66	40.66
100%		0	5500093.21	93.21
100%		+10	5500071.80	71.80
100%		+30	5500061.13	61.13
100%		+40	5500071.76	71.76
100%		+50	5500014.11	14.11
115%	4.40	+20	5500070.36	70.36
End. Point	3.40	+20	5500055.28	55.28

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5745088.50	88.50
100%		-30	5745057.09	57.09
100%		-20	5745059.93	59.93
100%		-10	5745062.43	62.43
100%		0	5745031.26	31.26
100%		+10	5745075.97	75.97
100%		+30	5745099.16	99.16
100%		+40	5745021.50	21.50
100%		+50	5745038.15	38.15
115%	4.40	+20	5745054.14	54.14
End. Point	3.40	+20	5745098.39	98.39

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5180099.78	99.78
100%		-30	5180008.28	8.28
100%		-20	5180093.79	93.79
100%		-10	5180043.89	43.89
100%		0	5180076.34	76.34
100%		+10	5180030.43	30.43
100%		+30	5180029.91	29.91
100%		+40	5180096.24	96.24
100%		+50	5180032.06	32.06
115%	4.40	+20	5180087.17	87.17
End. Point	3.40	+20	5180090.04	90.04

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
OPERATING FREQUENCY: 5,260,000,000 Hz
CHANNEL: 52
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5260055.17	55.17
100%		-30	5260025.07	25.07
100%		-20	5260021.04	21.04
100%		-10	5260091.30	91.30
100%		0	5260052.42	52.42
100%		+10	5260061.57	61.57
100%		+30	5260008.31	8.31
100%		+40	5260050.68	50.68
100%		+50	5260044.60	44.60
115%	4.40	+20	5260091.71	91.71
End. Point	3.40	+20	5260063.59	63.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,500,000,000 Hz
CHANNEL:	100
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5500041.41	41.41
100%		-30	5500060.66	60.66
100%		-20	5500065.69	65.69
100%		-10	5500059.21	59.21
100%		0	5500056.78	56.78
100%		+10	5500014.02	14.02
100%		+30	5500026.78	26.78
100%		+40	5500082.54	82.54
100%		+50	5500018.32	18.32
115%	4.40	+20	5500037.15	37.15
End. Point	3.40	+20	5500026.43	26.43

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
OPERATING FREQUENCY: 5,745,000,000 Hz
CHANNEL: 149
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5745089.42	89.42
100%		-30	5745094.79	94.79
100%		-20	5745086.49	86.49
100%		-10	5745040.97	40.97
100%		0	5745012.23	12.23
100%		+10	5745023.09	23.09
100%		+30	5745055.15	55.15
100%		+40	5745080.87	80.87
100%		+50	5745012.69	12.69
115%	4.40	+20	5745034.69	34.69
End. Point	3.40	+20	5745041.60	41.60

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5180091.23	91.23
100%		-30	5180011.66	11.66
100%		-20	5180007.54	7.54
100%		-10	5180003.28	3.28
100%		0	5180005.31	5.31
100%		+10	5180031.70	31.70
100%		+30	5180045.05	45.05
100%		+40	5180081.31	81.31
100%		+50	5180061.13	61.13
115%	4.40	+20	5180005.91	5.91
End. Point	3.40	+20	5180087.48	87.48

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5260009.95	9.95
100%		-30	5260029.28	29.28
100%		-20	5260054.95	54.95
100%		-10	5260009.83	9.83
100%		0	5260038.81	38.81
100%		+10	5260087.23	87.23
100%		+30	5260036.82	36.82
100%		+40	5260012.45	12.45
100%		+50	5260067.85	67.85
115%	4.40	+20	5260048.18	48.18
End. Point	3.40	+20	5260048.53	48.53

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5500057.94	57.94
100%		-30	5500067.04	67.04
100%		-20	5500027.04	27.04
100%		-10	5500053.63	53.63
100%		0	5500067.96	67.96
100%		+10	5500019.35	19.35
100%		+30	5500044.93	44.93
100%		+40	5500037.69	37.69
100%		+50	5500062.92	62.92
115%	4.40	+20	5500053.46	53.46
End. Point	3.40	+20	5500063.62	63.62

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,745,000,000 Hz
CHANNEL:	149
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5745049.26	49.26
100%		-30	5745097.84	97.84
100%		-20	5745017.47	17.47
100%		-10	5745098.20	98.20
100%		0	5745040.79	40.79
100%		+10	5745065.45	65.45
100%		+30	5745053.56	53.56
100%		+40	5745070.99	70.99
100%		+50	5745067.05	67.05
115%	4.40	+20	5745002.67	2.67
End. Point	3.40	+20	5745020.47	20.47

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.6.2 40MHz BW

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
OPERATING FREQUENCY: 5,190,000,000 Hz
CHANNEL: 38
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5190045.30	45.30
100%		-30	5190049.93	49.93
100%		-20	5190059.43	59.43
100%		-10	5190089.28	89.28
100%		0	5190061.75	61.75
100%		+10	5190043.16	43.16
100%		+30	5190038.79	38.79
100%		+40	5190017.49	17.49
100%		+50	5190048.65	48.65
115%	4.40	+20	5190020.30	20.30
End. Point	3.40	+20	5190080.43	80.43

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5270015.56	15.56
100%		-30	5270097.52	97.52
100%		-20	5270099.50	99.50
100%		-10	5270093.77	93.77
100%		0	5270077.48	77.48
100%		+10	5270040.53	40.53
100%		+30	5270088.22	88.22
100%		+40	5270015.57	15.57
100%		+50	5270049.37	49.37
115%	4.40	+20	5270086.30	86.30
End. Point	3.40	+20	5270065.21	65.21

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
OPERATING FREQUENCY: 5,510,000,000 Hz
CHANNEL: 102
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5510090.11	90.11
100%		-30	5510061.87	61.87
100%		-20	5510091.13	91.13
100%		-10	5510083.97	83.97
100%		0	5510077.10	77.10
100%		+10	5510047.10	47.10
100%		+30	5510055.92	55.92
100%		+40	5510072.33	72.33
100%		+50	5510034.55	34.55
115%	4.40	+20	5510096.09	96.09
End. Point	3.40	+20	5510044.30	44.30

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5755078.96	78.96
100%		-30	5755045.74	45.74
100%		-20	5755058.48	58.48
100%		-10	5755033.89	33.89
100%		0	5755066.78	66.78
100%		+10	5755014.78	14.78
100%		+30	5755070.39	70.39
100%		+40	5755025.40	25.40
100%		+50	5755085.07	85.07
115%	4.40	+20	5755029.21	29.21
End. Point	3.40	+20	5755020.07	20.07

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5190021.66	21.66
100%		-30	5190032.36	32.36
100%		-20	5190068.98	68.98
100%		-10	5190015.42	15.42
100%		0	5190043.07	43.07
100%		+10	5190076.05	76.05
100%		+30	5190045.15	45.15
100%		+40	5190051.02	51.02
100%		+50	5190026.77	26.77
115%	4.40	+20	5190030.34	30.34
End. Point	3.40	+20	5190016.81	16.81

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,270,000,000 Hz
CHANNEL:	54
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	99.70	99.70
100%		-30	80.91	80.91
100%		-20	44.60	44.60
100%		-10	31.45	31.45
100%		0	24.29	24.29
100%		+10	92.93	92.93
100%		+30	75.37	75.37
100%		+40	78.95	78.95
100%		+50	16.79	16.79
115%	4.40	+20	4.83	4.83
End. Point	3.40	+20	96.59	96.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,510,000,000 Hz
CHANNEL:	102
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	39.35	39.35
100%		-30	42.05	42.05
100%		-20	20.31	20.31
100%		-10	7.19	7.19
100%		0	53.44	53.44
100%		+10	85.22	85.22
100%		+30	19.58	19.58
100%		+40	48.88	48.88
100%		+50	59.92	59.92
115%	4.40	+20	47.67	47.67
End. Point	3.40	+20	5.31	5.31

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
OPERATING FREQUENCY: 5,755,000,000 Hz
CHANNEL: 151
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	37.70	37.70
100%		-30	90.90	90.90
100%		-20	2.90	2.90
100%		-10	22.18	22.18
100%		0	68.29	68.29
100%		+10	15.55	15.55
100%		+30	30.87	30.87
100%		+40	4.77	4.77
100%		+50	76.80	76.80
115%	4.40	+20	86.03	86.03
End. Point	3.40	+20	1.29	1.29

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5190026.73	26.73
100%		-30	5190099.83	99.83
100%		-20	5190097.65	97.65
100%		-10	5190073.64	73.64
100%		0	5190036.98	36.98
100%		+10	5190051.56	51.56
100%		+30	5190077.22	77.22
100%		+40	5190082.21	82.21
100%		+50	5190067.67	67.67
115%	4.40	+20	5190045.70	45.70
End. Point	3.40	+20	5190016.30	16.30

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	53.94	53.94
100%		-30	80.68	80.68
100%		-20	50.76	50.76
100%		-10	63.65	63.65
100%		0	17.27	17.27
100%		+10	81.45	81.45
100%		+30	12.77	12.77
100%		+40	43.57	43.57
100%		+50	36.43	36.43
115%	4.40	+20	2.59	2.59
End. Point	3.40	+20	33.72	33.72

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,510,000,000 Hz
 CHANNEL: 102
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	6.15	6.15
100%		-30	25.43	25.43
100%		-20	24.53	24.53
100%		-10	94.03	94.03
100%		0	96.72	96.72
100%		+10	59.33	59.33
100%		+30	92.97	92.97
100%		+40	76.46	76.46
100%		+50	62.15	62.15
115%	4.40	+20	96.62	96.62
End. Point	3.40	+20	30.66	30.66

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	71.38	71.38
100%		-30	2.47	2.47
100%		-20	43.81	43.81
100%		-10	89.29	89.29
100%		0	64.65	64.65
100%		+10	65.27	65.27
100%		+30	23.60	23.60
100%		+40	37.14	37.14
100%		+50	71.54	71.54
115%	4.40	+20	29.45	29.45
End. Point	3.40	+20	9.61	9.61

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5190059.05	59.05
100%		-30	5190008.15	8.15
100%		-20	5190071.81	71.81
100%		-10	5190061.73	61.73
100%		0	5190047.20	47.20
100%		+10	5190046.83	46.83
100%		+30	5190022.71	22.71
100%		+40	5190062.51	62.51
100%		+50	5190028.05	28.05
115%	4.40	+20	5190086.41	86.41
End. Point	3.40	+20	5190056.40	56.40

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	71.33	71.33
100%		-30	26.30	26.30
100%		-20	2.47	2.47
100%		-10	88.03	88.03
100%		0	14.03	14.03
100%		+10	13.81	13.81
100%		+30	6.06	6.06
100%		+40	37.95	37.95
100%		+50	42.90	42.90
115%	4.40	+20	2.77	2.77
End. Point	3.40	+20	68.39	68.39

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,510,000,000 Hz
 CHANNEL: 102
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	22.14	22.14
100%		-30	89.85	89.85
100%		-20	13.03	13.03
100%		-10	78.44	78.44
100%		0	22.26	22.26
100%		+10	13.34	13.34
100%		+30	34.45	34.45
100%		+40	27.18	27.18
100%		+50	30.67	30.67
115%	4.40	+20	90.02	90.02
End. Point	3.40	+20	99.53	99.53

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	57.26	57.26
100%		-30	43.09	43.09
100%		-20	49.53	49.53
100%		-10	63.12	63.12
100%		0	61.64	61.64
100%		+10	73.93	73.93
100%		+30	10.61	10.61
100%		+40	22.38	22.38
100%		+50	46.33	46.33
115%	4.40	+20	19.63	19.63
End. Point	3.40	+20	92.94	92.94

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.6.3 80MHz BW

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
OPERATING FREQUENCY: 5,210,000,000 Hz
CHANNEL: 42
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210009.64	9.64
100%		-30	5210039.67	39.67
100%		-20	5210019.91	19.91
100%		-10	5210003.19	3.19
100%		0	5210090.26	90.26
100%		+10	5210023.41	23.41
100%		+30	5210007.87	7.87
100%		+40	5210098.49	98.49
100%		+50	5210089.11	89.11
115%	4.40	+20	5210050.06	50.06
End. Point	3.40	+20	5210028.96	28.96

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	98.18	98.18
100%		-30	59.75	59.75
100%		-20	68.87	68.87
100%		-10	94.65	94.65
100%		0	98.46	98.46
100%		+10	87.54	87.54
100%		+30	6.45	6.45
100%		+40	47.22	47.22
100%		+50	92.77	92.77
115%	4.40	+20	56.95	56.95
End. Point	3.40	+20	66.80	66.80

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
OPERATING FREQUENCY: 5,530,000,000 Hz
CHANNEL: 106
REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	90.76	90.76
100%		-30	55.75	55.75
100%		-20	67.28	67.28
100%		-10	60.60	60.60
100%		0	48.72	48.72
100%		+10	87.50	87.50
100%		+30	86.63	86.63
100%		+40	47.39	47.39
100%		+50	21.82	21.82
115%	4.40	+20	44.96	44.96
End. Point	3.40	+20	46.85	46.85

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	55.07	55.07
100%		-30	80.22	80.22
100%		-20	95.83	95.83
100%		-10	38.61	38.61
100%		0	15.15	15.15
100%		+10	12.93	12.93
100%		+30	95.08	95.08
100%		+40	69.60	69.60
100%		+50	73.85	73.85
115%	4.40	+20	14.88	14.88
End. Point	3.40	+20	60.86	60.86

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210092.25	92.25
100%		-30	5210013.94	13.94
100%		-20	5210014.56	14.56
100%		-10	5210010.81	10.81
100%		0	5210085.83	85.83
100%		+10	5210088.04	88.04
100%		+30	5210031.20	31.20
100%		+40	5210008.09	8.09
100%		+50	5210068.40	68.40
115%	4.40	+20	5210009.50	9.50
End. Point	3.40	+20	5210058.90	58.90

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	49.67	49.67
100%		-30	21.74	21.74
100%		-20	96.58	96.58
100%		-10	88.50	88.50
100%		0	49.02	49.02
100%		+10	61.06	61.06
100%		+30	87.59	87.59
100%		+40	77.03	77.03
100%		+50	58.54	58.54
115%	4.40	+20	13.85	13.85
End. Point	3.40	+20	17.13	17.13

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,530,000,000 Hz
 CHANNEL: 106
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	57.06	57.06
100%		-30	77.13	77.13
100%		-20	42.88	42.88
100%		-10	33.73	33.73
100%		0	83.31	83.31
100%		+10	40.18	40.18
100%		+30	34.03	34.03
100%		+40	82.99	82.99
100%		+50	25.94	25.94
115%	4.40	+20	78.23	78.23
End. Point	3.40	+20	36.07	36.07

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.