



SAR EVALUATION REPORT

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

For
GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, NFC and ANT+

FCC ID: A3LSMA310N0
Model Name: SM-A310N0

Report Number: 15K22698-S1V1
Issue Date: 1/27/2016

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	1/27/2016	Initial Issue	Sunghoon Kim

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System</i>	7
4.2.	<i>SAR Scan Procedures</i>	8
4.3.	<i>Test Equipment</i>	10
5.	Measurement Uncertainty	10
6.	Device Under Test (DUT) Information	11
6.1.	<i>DUT Description</i>	11
6.2.	<i>Wireless Technologies</i>	11
6.3.	<i>Nominal and Maximum Output Power</i>	12
6.4.	<i>General LTE SAR Test and Reporting Considerations</i>	14
7.	RF Exposure Conditions (Test Configurations)	15
8.	Dielectric Property Measurements & System Check	16
8.1.	<i>Dielectric Property Measurements</i>	16
8.2.	<i>System Check</i>	19
9.	Conducted Output Power Measurements	22
9.1.	<i>GSM</i>	22
9.2.	<i>W-CDMA</i>	23
9.3.	<i>LTE</i>	27
9.4.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	31
9.5.	<i>Bluetooth</i>	32
10.	Measured and Reported (Scaled) SAR Results	33
10.1.	<i>GSM1900</i>	35
10.2.	<i>W-CDMA Band II</i>	36
10.3.	<i>W-CDMA Band V</i>	36
10.4.	<i>LTE Band 5 (10MHz Bandwidth)</i>	37
10.5.	<i>LTE Band 17 (10MHz Bandwidth)</i>	37
10.6.	<i>Wi-Fi (DTS Band)</i>	38
10.7.	<i>Bluetooth</i>	39
11.	SAR Measurement Variability	40
12.	Simultaneous Transmission SAR Analysis	41

12.1. Sum of the SAR for WWAN & Wi-Fi & BT..... 42

Appendixes..... 43

16K22698-S1V1 FCC Report SAR_App A_Photos & Ant. Locations 43

16K22698-S1V1 FCC Report SAR_App B_Highest SAR Test Plots 43



16K22698-S1V1 FCC Report SAR_App C_System Check Plots 43

16K22698-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients..... 43

16K22698-S1V1 FCC Report SAR_App E_Probe Cal. Certificates..... 43

16K22698-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates 43

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.				
FCC ID	A3LSMA310N0				
Model Name	SM-A310N0				
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013				
SAR Limits (W/Kg)					
Exposure Category	Peak spatial-average(1g of tissue)				
General population / Uncontrolled exposure	1.6				
The Highest Reported SAR (W/kg)					
RF Exposure Conditions	Equipment Class				
	Licensed	DTS	U-NII	DSS (BT)	
Head	0.312	0.532	N/A	N/A	
Body-worn	0.632	0.222			
Hotspot/Wi-Fi Direct	0.967	0.270			
Simultaneous TX	Head	0.844			0.844
	Body-worn	0.854			0.854
	Hotspot/Wi-Fi Direct	1.237			1.237
Date Tested	1/14/2016 to 1/25/2016				
Test Results	Pass				
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>					
Approved & Released By:		Prepared By:			
					
JiHo Choi Operations Manager UL Korea, Ltd Suwon Laboratory		Sunghoon Kim Laboratory Engineer UL Korea, Ltd Suwon Laboratory			

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

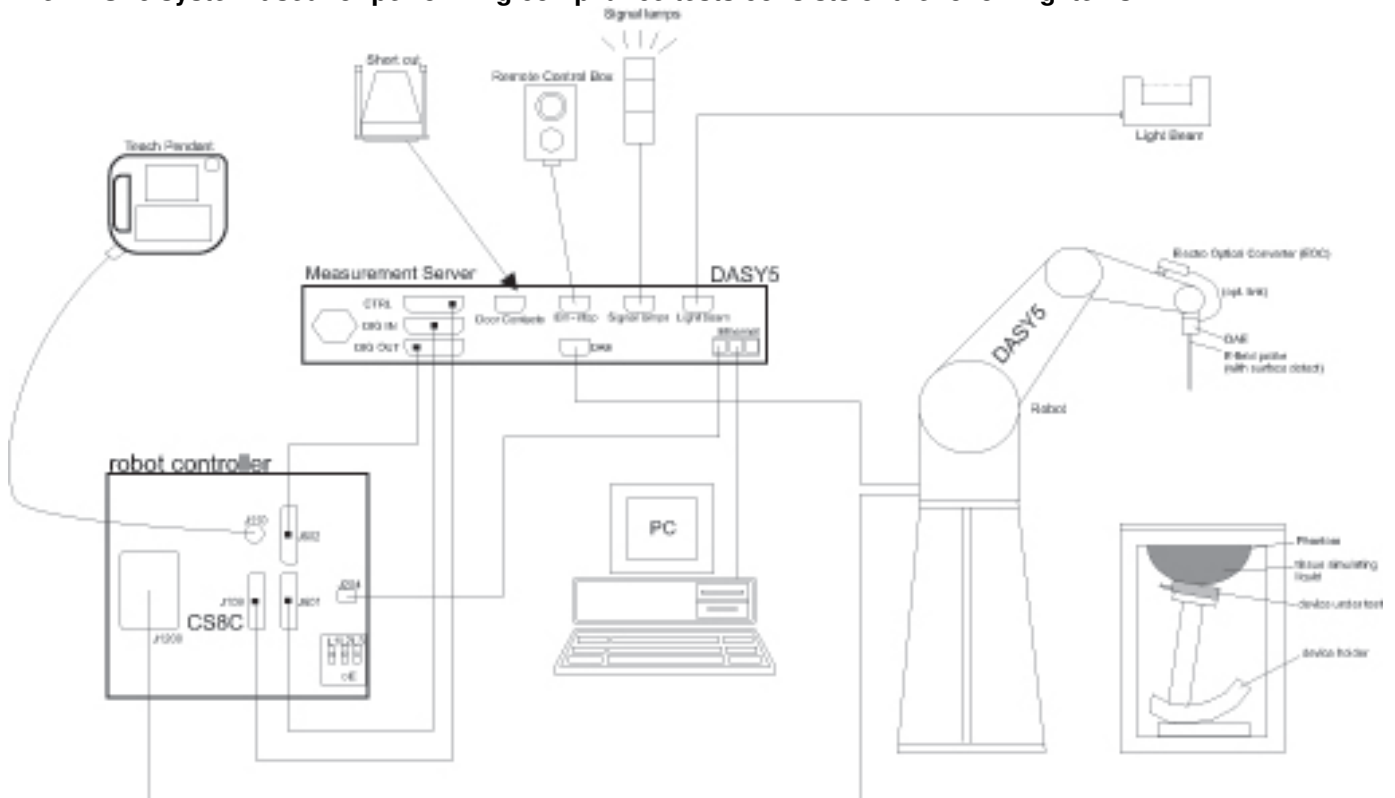

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-18-2016
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-4-2016
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-19-2016
Thermometer	Lutron	MHB-382SD	AH.91478	8-12-2016

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-18-2016
Power Sensor	Agilent	U2000A	MY54260010	8-18-2016
Power Sensor	Agilent	U2000A	MY54260007	8-18-2016
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-18-2016
Directional Coupler	Agilent	772D	MY52180193	8-18-2016
Directional Coupler	Agilent	778D	MY52180432	8-18-2016
Low Pass Filter	MICROLAB	LA-15N	03943	8-18-2016
Low Pass Filter	FILTRON	L14012FL	1410003S	8-18-2016
Low Pass Filter	MICROLAB	LA-60N	03942	8-18-2016
Attenuator	Agilent	8491B/003	MY39269292	8-18-2016
Attenuator	Agilent	8491B/010	MY39269315	8-18-2016
Attenuator	Agilent	8491B/020	MY39269298	8-18-2016
E-Field Probe (SAR1)	SPEAG	EX3DV4	7314	9-25-2016
E-Field Probe (SAR2)	SPEAG	EX3DV4	7376	9-2-2016
E-Field Probe (SAR3)	SPEAG	EX3DV4	7330	2-12-2016
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1447	9-23-2016
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1468	9-15-2016
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1446	8-17-2016
System Validation Dipole	SPEAG	D750V3	1122	8-17-2016
System Validation Dipole	SPEAG	D835V2	4d194	9-17-2016
System Validation Dipole	SPEAG	D1900V2	5d199	2-6-2016
System Validation Dipole	SPEAG	D2450V2	960	2-5-2016
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-12-2016
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	8-19-2016
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-24-2016

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-18-2016
Base Station Simulator	R & S	CMW500	150314	8-18-2016

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 132 mm x 64 mm Overall Diagonal: 142 mm Display Diagonal: 121 mm												
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.												
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.												
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)												
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz)												
Test Sample Information	<table border="1"> <thead> <tr> <th>No.</th> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3100b35312298233</td> <td>Conducted</td> </tr> <tr> <td>2</td> <td>3100b3271a258225</td> <td>SAR</td> </tr> <tr> <td>3</td> <td>3100b32f1025827d</td> <td>SAR</td> </tr> </tbody> </table>	No.	S/N	Notes	1	3100b35312298233	Conducted	2	3100b3271a258225	SAR	3	3100b32f1025827d	SAR
No.	S/N	Notes											
1	3100b35312298233	Conducted											
2	3100b3271a258225	SAR											
3	3100b32f1025827d	SAR											

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	1900	Voice (GMSK) GPRS (GMSK) EGPRS (Rx only)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down
		Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7)	100%
LTE	FDD Band 5 FDD Band 17	QPSK 16QAM	100%
		Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
Bluetooth	2.4 GHz	Version 4.1 LE	N/A

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		Max. RF Output Power (dBm)		Reduce. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit	Target	Max. tune-up tolerance limit
GSM1900	Voice (1 slot)	31.0	31.5	31.0	31.5
	GPRS 1 slot	31.0	31.5	29.5	30.0
	GPRS 2 slots	28.5	29.0	26.0	26.5
	GPRS 3 slots	27.0	27.5	25.0	25.5
	GPRS 4 slots	26.0	26.5	23.0	23.5
W-CDMA Band V	R99	24.0	24.5	N/A	
	HSDPA	22.5	23.0		
	HSUPA	23.5	24.0		
W-CDMA Band II	R99	22.5	23.0	19.5	20.0
	HSDPA	22.5	23.0	19.5	20.0
	HSUPA	22.5	23.0	19.5	20.0
LTE Band 5	QPSK, 16QAM	23.9	24.4	N/A	
LTE Band 17	QPSK, 16QAM	23.5	24.0	N/A	

Note(s):

The device utilizes power reduction under some portable hotspot conditions for SAR compliance.

There is power reduction for GSM1900, WCDMA Band II.

The reduced powers were confirmed via conducted power measurements the RF port.

Detailed description of the hotspot power reduction mechanism is included in the operational description.

Upper limit (dB):		Max. RF Output Power (dBm)		Reduce RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	17.0	17.5	12.0	12.5
	802.11g	14.0	14.5	12.0	12.5
	802.11n HT20	13.0	13.5	12.0	12.5
Bluetooth		9.5	10.0	N/A	
Bluetooth LE		7.5	8.0	N/A	

Note(s):

This device utilizes independent power reduction mechanisms for SAR compliance for the licensed transmitter and the WLAN transmitter. Additionally, the device uses an independent single-step fixed level power reduction mechanism for WLAN operations were evaluated at reduced power according to the head SAR positions described in IEEE 1528.

The reduced powers for the power reduction mechanisms were confirmed via conducted power measurements at the RF port.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 - 849 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																						
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																						
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																						
	Band 17	Frequency range: 704 - 716 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low			23780/ 709	23755/ 706.5																																								
	Mid			23790/ 710	23790/ 710																																								
	High			23800/ 711	23825/ 713.5																																								
LTE transmitter and antenna implementation	LTE has 1 Main TX/RX Ant and 2 Diversity RX Ant Refer to Appendix A...																																												
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	Yes																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-25-2016	Head 2450	e'	39.0000	Relative Permittivity (ϵ_r):	39.00	39.20	-0.51	5
		e"	13.3400	Conductivity (σ):	1.82	1.80	0.96	5
	Head 2410	e'	39.1000	Relative Permittivity (ϵ_r):	39.10	39.28	-0.46	5
		e"	13.2900	Conductivity (σ):	1.78	1.76	1.16	5
	Head 2475	e'	38.9000	Relative Permittivity (ϵ_r):	38.90	39.17	-0.69	5
		e"	13.3900	Conductivity (σ):	1.84	1.83	0.86	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-17-2016	Head 835	e'	41.8200	Relative Permittivity (ϵ_r):	41.82	41.50	0.77	5
		e"	18.7900	Conductivity (σ):	0.87	0.90	-3.07	5
	Head 820	e'	41.9700	Relative Permittivity (ϵ_r):	41.97	41.60	0.88	5
		e"	18.8200	Conductivity (σ):	0.86	0.90	-4.49	5
	Head 850	e'	41.6600	Relative Permittivity (ϵ_r):	41.66	41.50	0.39	5
		e"	18.7800	Conductivity (σ):	0.89	0.92	-3.00	5
1-20-2016	Body 835	e'	54.7500	Relative Permittivity (ϵ_r):	54.75	55.20	-0.82	5
		e"	21.6400	Conductivity (σ):	1.00	0.97	3.58	5
	Body 820	e'	54.8500	Relative Permittivity (ϵ_r):	54.85	55.28	-0.77	5
		e"	21.7000	Conductivity (σ):	0.99	0.97	2.16	5
	Body 850	e'	54.6700	Relative Permittivity (ϵ_r):	54.67	55.16	-0.88	5
		e"	21.5900	Conductivity (σ):	1.02	0.99	3.37	5
1-21-2016	Head 835	e'	41.4800	Relative Permittivity (ϵ_r):	41.48	41.50	-0.05	5
		e"	19.1600	Conductivity (σ):	0.89	0.90	-1.16	5
	Head 820	e'	41.5300	Relative Permittivity (ϵ_r):	41.53	41.60	-0.17	5
		e"	19.1600	Conductivity (σ):	0.87	0.90	-2.77	5
	Head 850	e'	41.3700	Relative Permittivity (ϵ_r):	41.37	41.50	-0.31	5
		e"	19.2000	Conductivity (σ):	0.91	0.92	-0.83	5
1-25-2016	Body 2450	e'	51.1300	Relative Permittivity (ϵ_r):	51.13	52.70	-2.98	5
		e"	14.6200	Conductivity (σ):	1.99	1.95	2.14	5
	Body 2410	e'	51.2500	Relative Permittivity (ϵ_r):	51.25	52.76	-2.86	5
		e"	14.4900	Conductivity (σ):	1.94	1.91	1.79	5
	Body 2475	e'	51.0300	Relative Permittivity (ϵ_r):	51.03	52.67	-3.11	5
		e"	14.7400	Conductivity (σ):	2.03	1.99	2.18	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-14-2016	Body 750	e'	54.3900	Relative Permittivity (ε _r):	54.39	55.55	-2.08	5
		e"	23.1500	Conductivity (σ):	0.97	0.96	0.24	5
	Body 700	e'	54.9900	Relative Permittivity (ε _r):	54.99	55.74	-1.34	5
		e"	23.7000	Conductivity (σ):	0.92	0.96	-3.83	5
	Body 790	e'	54.0600	Relative Permittivity (ε _r):	54.06	55.39	-2.41	5
		e"	22.9600	Conductivity (σ):	1.01	0.97	4.39	5
1-14-2016	Head 750	e'	40.8900	Relative Permittivity (ε _r):	40.89	41.96	-2.55	5
		e"	21.4000	Conductivity (σ):	0.89	0.89	-0.07	5
	Head 700	e'	41.7800	Relative Permittivity (ε _r):	41.78	42.22	-1.04	5
		e"	22.0700	Conductivity (σ):	0.86	0.89	-3.40	5
	Head 790	e'	40.4100	Relative Permittivity (ε _r):	40.41	41.76	-3.22	5
		e"	21.3400	Conductivity (σ):	0.94	0.90	4.60	5
1-15-2016	Body 835	e'	53.5600	Relative Permittivity (ε _r):	53.56	55.20	-2.97	5
		e"	21.3500	Conductivity (σ):	0.99	0.97	2.19	5
	Body 820	e'	53.7000	Relative Permittivity (ε _r):	53.70	55.28	-2.85	5
		e"	21.3900	Conductivity (σ):	0.98	0.97	0.70	5
	Body 850	e'	53.4500	Relative Permittivity (ε _r):	53.45	55.16	-3.10	5
		e"	21.3400	Conductivity (σ):	1.01	0.99	2.17	5
1-19-2016	Body 1900	e'	52.8300	Relative Permittivity (ε _r):	52.83	53.30	-0.88	5
		e"	14.9500	Conductivity (σ):	1.58	1.52	3.91	5
	Body 1850	e'	53.0000	Relative Permittivity (ε _r):	53.00	53.30	-0.56	5
		e"	14.9200	Conductivity (σ):	1.53	1.52	0.97	5
	Body 1910	e'	52.8000	Relative Permittivity (ε _r):	52.80	53.30	-0.94	5
		e"	14.9400	Conductivity (σ):	1.59	1.52	4.39	5
1-21-2016	Head 1900	e'	39.1400	Relative Permittivity (ε _r):	39.14	40.00	-2.15	5
		e"	13.0600	Conductivity (σ):	1.38	1.40	-1.45	5
	Head 1850	e'	39.3200	Relative Permittivity (ε _r):	39.32	40.00	-1.70	5
		e"	12.9600	Conductivity (σ):	1.33	1.40	-4.78	5
	Head 1910	e'	39.1400	Relative Permittivity (ε _r):	39.14	40.00	-2.15	5
		e"	13.0500	Conductivity (σ):	1.39	1.40	-1.00	5
1-22-2016	Body 750	e'	57.9800	Relative Permittivity (ε _r):	57.98	55.55	4.38	5
		e"	23.1400	Conductivity (σ):	0.96	0.96	0.20	5
	Body 700	e'	58.2600	Relative Permittivity (ε _r):	58.26	55.74	4.52	5
		e"	23.6800	Conductivity (σ):	0.92	0.96	-3.91	5
	Body 790	e'	57.3500	Relative Permittivity (ε _r):	57.35	55.39	3.53	5
		e"	22.5400	Conductivity (σ):	0.99	0.97	2.48	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1122	8-17-2015	750	1g	8.23	8.60
				10g	5.37	5.67
D835V2	4d194	9-17-2015	835	1g	9.38	9.49
				10g	6.09	6.18
D1900V2	5d199	2-6-2015	1900	1g	41.00	40.60
				10g	21.40	21.60
D2450V2	960	2-5-2015	2450	1g	53.30	50.80
				10g	24.80	23.60

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-25-2016	D2450V2	960	Head	1g	5.39	53.90	53.3	1.13	1,2
				10g	2.43	24.30	24.8	-2.02	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
01-17-2016	D835V2	4d194	Head	1g	0.97	9.74	9.38	3.84	
				10g	0.65	6.45	6.09	5.91	
01-20-2016	D835V2	4d194	Body	1g	1.01	10.10	9.49	6.43	
				10g	0.67	6.65	6.18	7.61	
01-21-2016	D835V2	4d194	Head	1g	1.00	10.00	9.38	6.61	3,4
				10g	0.67	6.65	6.09	9.20	
1-25-2016	D2450V2	960	Body	1g	5.45	54.50	50.8	7.28	5,6
				10g	2.49	24.90	23.6	5.51	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
01-14-2016	D750V3	1122	Body	1g	0.85	8.50	8.6	-1.16	
				10g	0.57	5.66	5.67	-0.18	
01-14-2016	D750V3	1122	Head	1g	0.77	7.71	8.23	-6.32	7,8
				10g	0.51	5.10	5.37	-5.03	
01-15-2016	D835V2	4d194	Body	1g	1.03	10.30	9.49	8.54	9,10
				10g	0.68	6.77	6.18	9.55	
01-19-2016	D1900V2	5d199	Body	1g	4.01	40.10	40.60	-1.23	
				10g	2.02	20.20	21.60	-6.48	
01-21-2016	D1900V2	5d199	Head	1g	3.84	38.40	41.00	-6.34	11,12
				10g	1.96	19.60	21.40	-8.41	
01-22-2016	D750V3	1122	Body	1g	0.91	9.07	8.6	5.47	
				10g	0.60	6.02	5.67	6.17	

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Pwr		Reduce. Pwr	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	31.2	22.2	31.2	22.2
				661	1880.0	31.1	22.1	31.1	22.0
				810	1909.8	30.9	21.9	30.9	21.8
	GPRS (GMSK)	CS1	1	512	1850.2	31.3	22.2	28.8	19.7
				661	1880.0	31.1	22.0	28.8	19.8
				810	1909.8	30.9	21.9	28.6	19.6
			2	512	1850.2	27.7	21.7	25.1	19.1
				661	1880.0	27.8	21.7	25.0	19.0
				810	1909.8	27.6	21.6	25.0	19.0
			3	512	1850.2	26.9	22.6	24.5	20.2
				661	1880.0	26.7	22.4	24.3	20.1
				810	1909.8	26.9	22.7	24.3	20.1
			4	512	1850.2	26.0	23.0	23.2	20.2
				661	1880.0	25.8	22.8	23.2	20.2
				810	1909.8	25.8	22.8	23.1	20.1

EGPRS(8PSK) is Rx only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Head VoIP : GMSK (GPRS) mode with 4 time slots for Max power, based on the output power measurements above.
- Hotspot mode : GMSK (GPRS) mode with 4 time slots for Reduce power, based on the output power measurements above.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	Subtest	HSDPA	HSDPA	HSDPA	HSDPA
		1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelisation Codes	2xSF2				SF4	

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7 Therefore, the RF conducted power is not measured.

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	MPR (dB)	Reduce. Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.5	N/A	19.4
			9400	1880.0	N/A	22.3	N/A	19.3
			9538	1907.6	N/A	22.4	N/A	19.4
	HSDPA	Subtest 1	9262	1852.4	0	22.4	0	19.3
			9400	1880.0	0	22.2	0	19.1
			9538	1907.6	0	22.3	0	19.2
		Subtest 2	9262	1852.4	0	22.5	0	19.4
			9400	1880.0	0	22.4	0	19.3
			9538	1907.6	0	22.4	0	19.3
		Subtest 3	9262	1852.4	0.5	21.8	0	19.5
			9400	1880.0	0.5	21.6	0	19.3
			9538	1907.6	0.5	21.7	0	19.4
		Subtest 4	9262	1852.4	0.5	21.6	0	19.4
			9400	1880.0	0.5	21.4	0	19.3
			9538	1907.6	0.5	21.5	0	19.3
	HSUPA	Subtest 1	9262	1852.4	0	21.5	0	18.6
			9400	1880.0	0	21.4	0	18.4
			9538	1907.6	0	21.4	0	18.5
		Subtest 2	9262	1852.4	2	19.1	0	18.7
			9400	1880.0	2	19.0	0	18.5
			9538	1907.6	2	19.0	0	18.5
		Subtest 3	9262	1852.4	1	21.6	0	18.6
			9400	1880.0	1	21.4	0	18.4
			9538	1907.6	1	21.5	0	18.5
		Subtest 4	9262	1852.4	2	19.6	0	18.6
			9400	1880.0	2	19.5	0	18.5
			9538	1907.6	2	19.5	0	18.5
		Subtest 5	9262	1852.4	0	22.5	0	19.6
			9400	1880.0	0	22.3	0	19.5
			9538	1907.6	0	22.4	0	19.6

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.6	
			4183	836.6	N/A	23.7	
			4233	846.6	N/A	23.9	
	HSDPA	Subtest 1	4132	826.4	0	21.9	
			4183	836.6	0	22.0	
			4233	846.6	0	22.2	
		Subtest 2	4132	826.4	0	21.6	
			4183	836.6	0	21.7	
			4233	846.6	0	21.8	
		Subtest 3	4132	826.4	0.5	20.9	
			4183	836.6	0.5	21.0	
			4233	846.6	0.5	21.1	
		Subtest 4	4132	826.4	0.5	20.7	
			4183	836.6	0.5	20.8	
			4233	846.6	0.5	20.9	
		HSUPA	Subtest 1	4132	826.4	0	22.6
				4183	836.6	0	22.7
				4233	846.6	0	22.9
	Subtest 2		4132	826.4	2	21.2	
			4183	836.6	2	21.3	
			4233	846.6	2	21.4	
	Subtest 3		4132	826.4	1	22.1	
			4183	836.6	1	22.2	
			4233	846.6	1	22.4	
	Subtest 4		4132	826.4	2	21.2	
			4183	836.6	2	21.3	
			4233	846.6	2	21.4	
	Subtest 5		4132	826.4	0	23.6	
			4183	836.6	0	23.7	
			4233	846.6	0	23.9	

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	24.1	24.0	23.8
			1	25	0	24.0	24.0	23.7
			1	49	0	24.1	24.0	23.8
			25	0	1	22.0	21.9	21.9
			25	12	1	22.1	22.0	21.8
			25	25	1	22.0	21.9	21.7
			50	0	1	22.0	21.9	21.8
		16QAM	1	0	1	22.6	22.9	22.8
			1	25	1	22.6	22.9	22.7
			1	49	1	22.5	22.9	22.7
			25	0	2	20.8	20.9	20.7
			25	12	2	20.8	20.8	20.7
			25	25	2	20.9	20.8	20.7
			50	0	2	20.8	20.8	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	24.2	24.1	23.8
			1	12	0	24.0	24.0	23.7
			1	24	0	24.1	24.1	23.8
			12	0	1	22.2	21.9	21.8
			12	6	1	22.1	22.0	21.8
			12	11	1	22.0	21.8	21.7
			25	0	1	22.0	21.9	21.8
		16QAM	1	0	1	23.1	22.9	22.4
			1	12	1	23.1	22.9	22.3
			1	24	1	23.1	22.8	22.4
			12	0	2	20.8	20.6	20.5
			12	6	2	20.8	20.7	20.5
			12	11	2	20.7	20.6	20.5
			25	0	2	20.9	20.7	20.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	24.3	24.1	23.8
			1	8	0	24.1	24.0	23.7
			1	14	0	24.2	24.1	23.8
			8	0	1	22.1	21.9	21.6
			8	4	1	22.1	21.9	21.6
			8	7	1	22.1	21.9	21.6
			15	0	1	22.0	21.9	21.7
		16QAM	1	0	1	22.8	23.3	22.8
			1	8	1	22.8	23.2	22.8
			1	14	1	22.8	23.3	22.8
			8	0	2	20.8	20.4	20.5
			8	4	2	20.7	20.4	20.4
			8	7	2	20.7	20.4	20.4
			15	0	2	20.8	20.7	20.4

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	24.0	23.9	23.7
			1	3	0	24.0	23.9	23.7
			1	5	0	24.0	23.9	23.7
			3	0	0	23.9	23.8	23.7
			3	1	0	24.0	23.8	23.7
			3	3	0	24.0	23.9	23.7
			6	0	1	22.0	21.8	21.7
		16QAM	1	0	1	23.1	22.9	23.0
			1	3	1	23.1	22.9	22.9
			1	5	1	23.0	22.9	22.8
			3	0	1	23.0	22.7	22.8
			3	1	1	23.0	22.7	22.7
			3	3	1	23.0	22.7	22.6
			6	0	2	20.9	20.5	20.5

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						710 MHz
LTE Band 17	10	QPSK	1	0	0	23.5
			1	25	0	23.4
			1	49	0	23.4
			25	0	1	21.6
			25	12	1	21.5
			25	25	1	21.5
			50	0	1	21.5
		16QAM	1	0	1	22.6
			1	25	1	22.5
			1	49	1	22.4
			25	0	2	20.7
			25	12	2	20.6
			25	25	2	20.4
			50	0	2	20.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						710 MHz
LTE Band 17	5	QPSK	1	0	0	23.8
			1	12	0	23.7
			1	24	0	23.7
			12	0	1	21.6
			12	6	1	21.5
			12	11	1	21.5
			25	0	1	21.4
		16QAM	1	0	1	22.1
			1	12	1	22.0
			1	24	1	22.0
			12	0	2	20.4
			12	6	2	20.3
			12	11	2	20.3
			25	0	2	20.4

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.4. Wi-Fi 2.4GHz (DTS Band)

Measured Results (Max Power)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
2.4	802.11b	1 Mbps	1	2412	16.7	17.5	Yes	
			6	2437	16.9			
			11	2462	16.4			
	802.11g	6 Mbps	1	2412	Not Require	14.5	No	1
			6	2437				
			11	2462				
	802.11n (HT20)	6.5 Mbps	1	2412	Not Require	13.5	No	1
			6	2437				
			11	2462				

Measured Results (Reduce Power)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
2.4	802.11b	1 Mbps	1	2412	12.2	12.0	Yes	
			6	2437	12.1			
			11	2462	11.7			
	802.11g	6 Mbps	1	2412	12.1	12.0	No	1
			6	2437	12.0			
			11	2462	11.7			
	802.11n (HT20)	6 Mbps	1	2412	11.9	12.0	No	1
			6	2437	11.8			
			11	2462	11.6			

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.5. Bluetooth

Maximum tune-up tolerance limit is 10 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Additional 1-g SAR testing at 5 mm is not required. For hotspot mode, 10-g extremity SAR is not required for the surfaces and edges since all 1-g reported SAR < 1.2 W/kg. **(for Phablet only)**

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM1900

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	Off	0	Left Touch	661	1880.0	31.5	31.1	0.146	0.160	
				Left Tilt	661	1880.0	31.5	31.1	0.039	0.042	
				Right Touch	661	1880.0	31.5	31.1	0.163	0.179	
				Right Tilt	661	1880.0	31.5	31.1	0.044	0.049	
Head VoIP	GPRS 4 Slots	Off	0	Left Touch	661	1880.0	26.5	25.8	0.122	0.145	
				Left Tilt	661	1880.0	26.5	25.8	0.032	0.038	
				Right Touch	661	1880.0	26.5	25.8	0.161	0.191	1
				Right Tilt	661	1880.0	26.5	25.8	0.038	0.045	
Body-worn	Voice	Off	15	Rear	661	1880.0	31.5	31.1	0.321	0.353	
				Front	661	1880.0	31.5	31.1	0.287	0.315	
Body-worn(VoIP)	GPRS 4 Slots	Off	15	Rear	661	1880.0	26.5	25.8	0.306	0.362	2
				Front	661	1880.0	26.5	25.8	0.264	0.313	
Hotspot	GPRS 4 Slots	On	10	Rear	661	1880.0	23.5	23.2	0.376	0.400	
				Front	661	1880.0	23.5	23.2	0.310	0.330	
				Edge 2	661	1880.0	23.5	23.2	0.053	0.056	
				Edge 3	661	1880.0	23.5	23.2	0.742	0.790	3
				Edge 4	661	1880.0	23.5	23.2	0.095	0.101	

10.2. W-CDMA Band II

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	9400	1880.0	23.0	22.3	0.187	0.218	
				Left Tilt	9400	1880.0	23.0	22.3	0.039	0.046	
				Right Touch	9400	1880.0	23.0	22.3	0.203	0.237	4
				Right Tilt	9400	1880.0	23.0	22.3	0.057	0.066	
Body-worn	Rel 99 RMC	Off	15	Rear	9400	1880.0	23.0	22.3	0.541	0.632	5
				Front	9400	1880.0	23.0	22.3	0.441	0.515	
Hotspot	Rel 99 RMC	On	10	Rear	9400	1880.0	20.0	19.3	0.533	0.620	
				Front	9400	1880.0	20.0	19.3	0.405	0.471	
				Edge 2	9400	1880.0	20.0	19.3	0.076	0.088	
				Edge 3	9262	1852.4	20.0	19.4	0.822	0.933	
					9400	1880.0	20.0	19.3	0.832	0.967	6
				Edge 4	9538	1907.6	20.0	19.4	0.734	0.841	
Edge 4	9400	1880.0	20.0	19.3	0.140	0.163					

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	4183	836.6	24.5	23.7	0.213	0.258	
				Left Tilt	4183	836.6	24.5	23.7	0.119	0.144	
				Right Touch	4183	836.6	24.5	23.7	0.249	0.301	7
				Right Tilt	4183	836.6	24.5	23.7	0.138	0.167	
Body-worn	Rel 99 RMC	Off	15	Rear	4183	836.6	24.5	23.7	0.390	0.472	8
				Front	4183	836.6	24.5	23.7	0.362	0.438	
Hotspot	Rel 99 RMC	Off	10	Rear	4183	836.6	24.5	23.7	0.620	0.750	9
				Front	4183	836.6	24.5	23.7	0.549	0.664	
				Edge 2	4183	836.6	24.5	23.7	0.340	0.411	
				Edge 3	4183	836.6	24.5	23.7	0.317	0.384	
				Edge 4	4183	836.6	24.5	23.7	0.217	0.263	

10.4. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.					
									Tune-up limit	Meas.	Meas.	Scaled						
Head	QPSK	Off	0	Left Touch	20525	836.5	1	0	24.4	24.0	0.278	0.305	10					
							25	12	23.4	22.0	0.167	0.232						
				Left Tilt	20525	836.5	1	0	24.4	24.0	0.163	0.179						
							25	12	23.4	22.0	0.094	0.131						
				Right Touch	20525	836.5	1	0	24.4	24.0	0.284	0.312						
							25	12	23.4	22.0	0.164	0.228						
				Right Tilt	20525	836.5	1	0	24.4	24.0	0.151	0.166						
							25	12	23.4	22.0	0.083	0.115						
Body-worn	QPSK	Off	15	Rear	20525	836.5	1	0	24.4	24.0	0.470	0.516	11					
							25	12	23.4	22.0	0.224	0.311						
				Front	20525	836.5	1	0	24.4	24.0	0.430	0.472						
							25	12	23.4	22.0	0.231	0.321						
				Hotspot	QPSK	Off	10	Rear	20525	836.5	1	0		24.4	24.0	0.654	0.718	12
											25	12		23.4	22.0	0.417	0.580	
Front	20525	836.5	1					0	24.4	24.0	0.577	0.633						
			25					12	23.4	22.0	0.369	0.513						
Edge 2	20525	836.5	1					0	24.4	24.0	0.421	0.462						
			25					12	23.4	22.0	0.279	0.388						
Edge 3	20525	836.5	1					0	24.4	24.0	0.338	0.371						
			25					12	23.4	22.0	0.219	0.304						
Edge 4	20525	836.5	1	0	24.4	24.0	0.243	0.267										
			25	12	23.4	22.0	0.098	0.136										

10.5. LTE Band 17 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.					
									Tune-up limit	Meas.	Meas.	Scaled						
Head	QPSK	Off	0	Left Touch	23790	710.0	1	0	24.0	23.5	0.126	0.142	13					
							25	0	23.0	21.6	0.078	0.108						
				Left Tilt	23790	710.0	1	0	24.0	23.5	0.060	0.067						
							25	0	23.0	21.6	0.038	0.053						
				Right Touch	23790	710.0	1	0	24.0	23.5	0.120	0.135						
							25	0	23.0	21.6	0.072	0.100						
				Right Tilt	23790	710.0	1	0	24.0	23.5	0.057	0.064						
							25	0	23.0	21.6	0.034	0.047						
Body-worn	QPSK	Off	15	Rear	23790	710.0	1	0	24.0	23.5	0.230	0.259	14					
							25	0	23.0	21.6	0.138	0.192						
				Front	23790	710.0	1	0	24.0	23.5	0.187	0.210						
							25	0	23.0	21.6	0.110	0.153						
				Hotspot	QPSK	Off	10	Rear	23790	710.0	1	0		24.0	23.5	0.450	0.506	15
											25	0		23.0	21.6	0.279	0.389	
Front	23790	710.0	1					0	24.0	23.5	0.340	0.383						
			25					0	23.0	21.6	0.212	0.295						
Edge 2	23790	710.0	1					0	24.0	23.5	0.086	0.096						
			25					0	23.0	21.6	0.053	0.073						
Edge 3	23790	710.0	1					0	24.0	23.5	0.137	0.154						
			25					0	23.0	21.6	0.083	0.116						
Edge 4	23790	710.0	1	0	24.0	23.5	0.152	0.171										
			25	0	23.0	21.6	0.096	0.134										

10.6. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	1	2412	0.385	12.5	12.2			
				Left Tilt	1	2412	0.320	12.5	12.2			
				Right Touch	1	2412	0.669	12.5	12.2	0.494	0.532	16
				Right Tilt	1	2412	0.670	12.5	12.2	0.447	0.481	
		Body-worn	15	Rear	6	2437	0.245	17.5	16.9	0.192	0.222	17
				Front	6	2437	0.146	17.5	16.9			
		Hotspot & Wi-Fi Direct	10	Rear	6	2437	0.314	17.5	16.9	0.233	0.270	18
				Front	6	2437	0.254	17.5	16.9			
				Edge 1	6	2437	0.214	17.5	16.9			
				Edge 4	6	2437	0.166	17.5	16.9			

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was >0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.7. Bluetooth

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
10.0	10	10	2.480	1.6	Rear/Front	0.210

Conclusion:

*: The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 17	Hotspot	Rear	No	0.45	N/A	N/A
850	WCDMA Band V	Hotspot	Rear	No	0.62	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.654	N/A	N/A
1900	GSM1900	Hotspot	Edge 3	No	0.742	N/A	N/A
	WCDMA Band II	Hotspot	Edge 3	Yes	0.832	0.825	1.01
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.494	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	GSM(Voice)	+	DTS
	3	GSM(GPRS)	+	DTS
	5	W-CDMA	+	DTS
	7	LTE	+	DTS
Body-w orn	9	GSM(Voice)	+	DTS
	11	GSM(Voice)	+	BT
	12	GSM(GPRS)	+	DTS
	14	GSM(GPRS)	+	BT
	15	W-CDMA	+	DTS
	17	W-CDMA	+	BT
	18	LTE	+	DTS
	20	LTE	+	BT
Hotspot & Wi-Fi Direct	21	GSM(GPRS)	+	DTS
	23	W-CDMA	+	DTS
	25	LTE	+	DTS
Notes:				
1. DTS support Hotspot and Wi-Fi Direct.				
2. GPRS, W-CDMA and LTE support Hotspot.				
3. VoIP is supported in GPRS, W-CDMA and LTE.				
4. DTS Radio cannot transmit simultaneously w ith Bluetooth Radio.				

12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
				∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	0.312	0.532		0.844	No		
Body-worn	0.632	0.222	0.210	0.854	No	0.842	No
Hotspot	0.967	0.270	0.210	1.237	No	1.177	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

16K22698-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

16K22698-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

16K22698-S1V1 FCC Report SAR_App C_System Check Plots

16K22698-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

16K22698-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

16K22698-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT