



**FCC CFR47 PART 15 SUBPART C**

**ANT+**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC**

**MODEL NUMBER : SM-A310M/DS, SM-A310M**

**FCC ID: A3LSMA310M**

**REPORT NUMBER: 15K22210-E5**

**ISSUE DATE: DEC 01, 2015**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	11/25/15	Initial issue	Junwhan Lee
2	12/01/15	Revised equipment list	Junwhan Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>4</b>
<b>2. TEST METHODOLOGY</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
<b>5. EQUIPMENT UNDER TEST</b>	<b>6</b>
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. WORST-CASE CONFIGURATION AND MODE	6
5.5. DESCRIPTION OF TEST SETUP	7
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>9</b>
<b>7. LIMITS AND RESULTS</b>	<b>10</b>
7.1. 99% BANDWIDTH	10
7.2. TRANSMITTER RADIATED EMISSIONS	14
7.2.1. DUTY CYCLE	15
7.2.2. FUNDAMENTAL FREQUENCY RADIATED EMISSION	16
7.2.3. TRANSMITTER RESTRICTED BAND EDGES	17
7.2.4. SPURIOUS BELOW 1 GHz	22
<b>8. AC POWER LINE CONDUCTED EMISSIONS</b>	<b>24</b>
<b>9. SETUP PHOTOS</b>	<b>29</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC  
**MODEL NUMBER:** SM-A310M/DS, SM-A310M  
**SERIAL NUMBER:** 31004a4aeb191221 (RADIATED); R38GA0PDTTJ (CONDUCTED)  
**DATE TESTED:** NOV 06, 2015 - NOV 21, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Chamber 1
<input checked="" type="checkbox"/> Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC.  
This test report addresses the ANT+ operational mode.

SM-A310M and SM-A310M/DS are same hardware but for different number of SIM card slot.  
SM-A310M has one slot. SM-A310M/DS is dual SIM version.  
SM-A310M/DS was used for the test.

### 5.2. MAXIMUM OUTPUT POWER

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range [MHz]	Mode	Peak E-field Strength [dBuV/m]	Avg E-field Strength [dBuV/m]	Distance [m]
2402 - 2480	ANT +	95.35	46.71	3.00

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antennas, with a maximum gain of -3.75 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50EWE	DK2G608VS/A-E	N/A
Data Cable	SAMSUNG	EP-DG920UWE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

### TEST SETUP

The EUT is set to continuously transmit in ANT + test mode.

**SETUP DIAGRAM FOR TESTS**

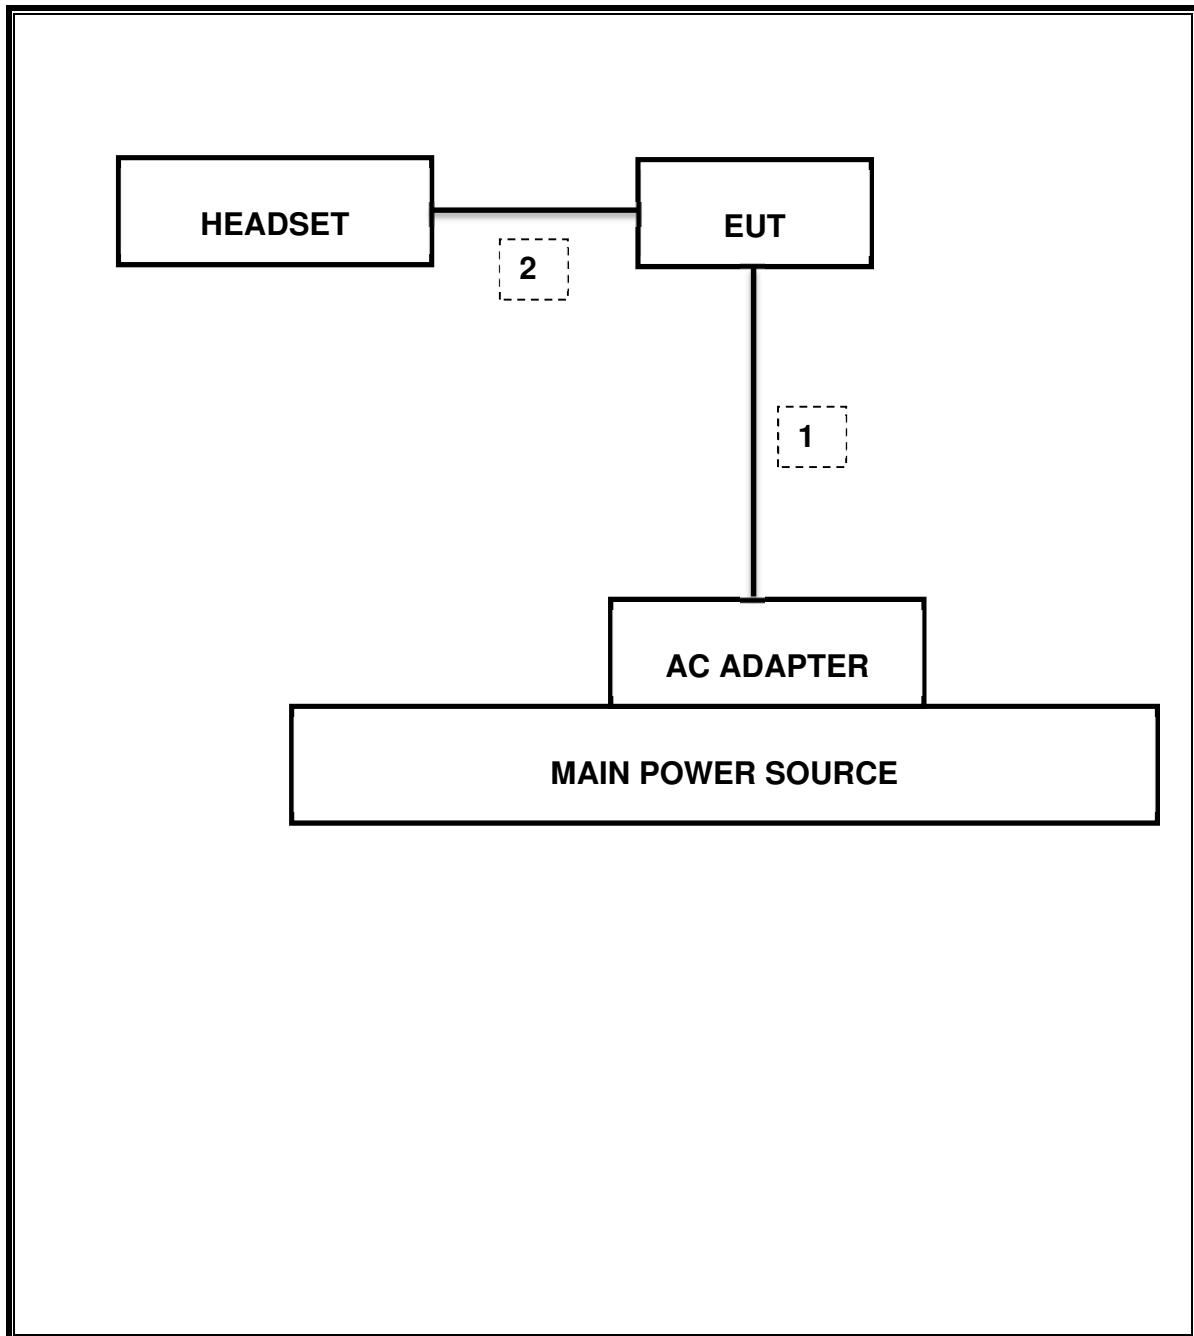

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-16
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-16
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-16
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

## 7. LIMITS AND RESULTS

### 7.1. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS


Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2402	1.003
Mid	2441	1.016
High	2480	1.014
Worst		1.016

**99% BANDWIDTH PLOTS**


**LOW CHANNEL**

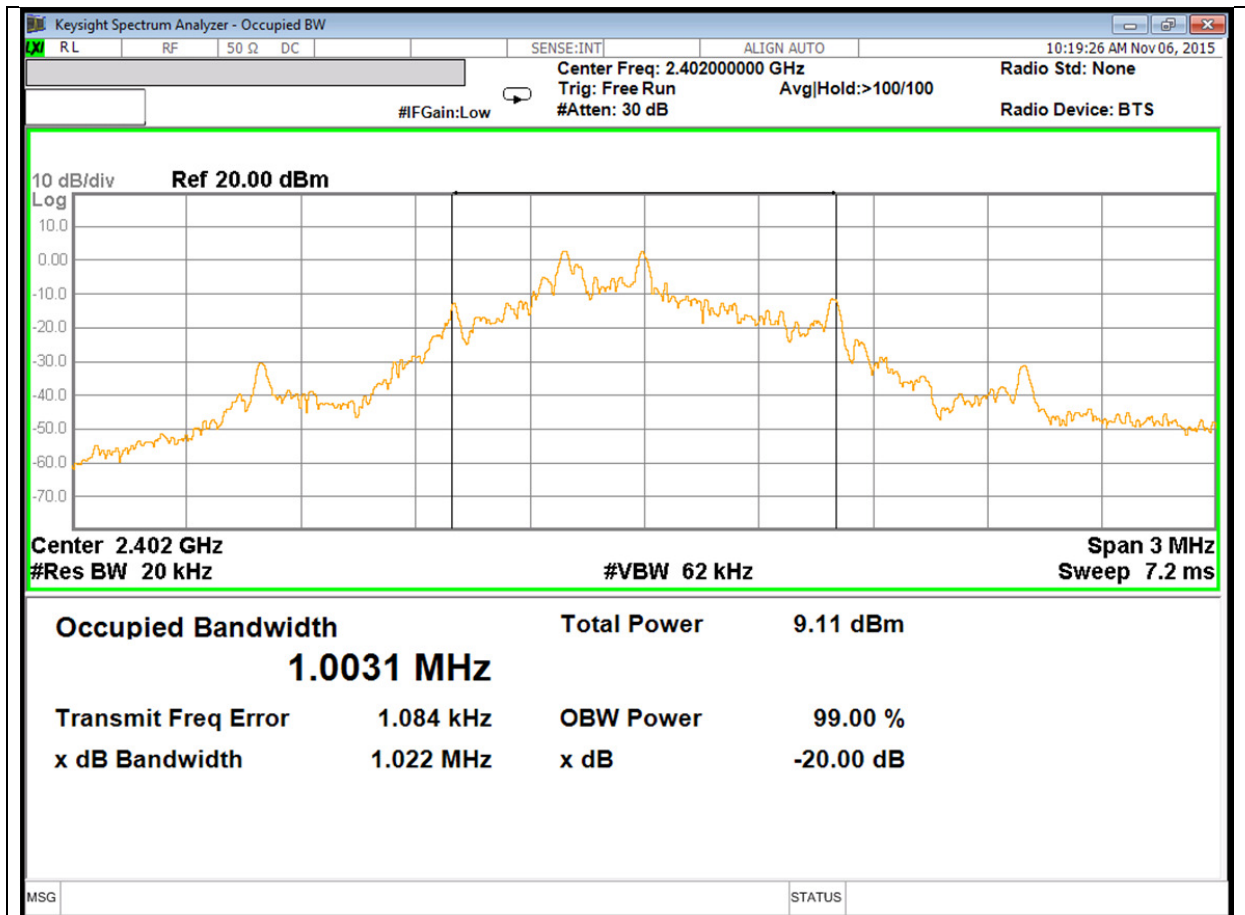

**MID CHANNEL**

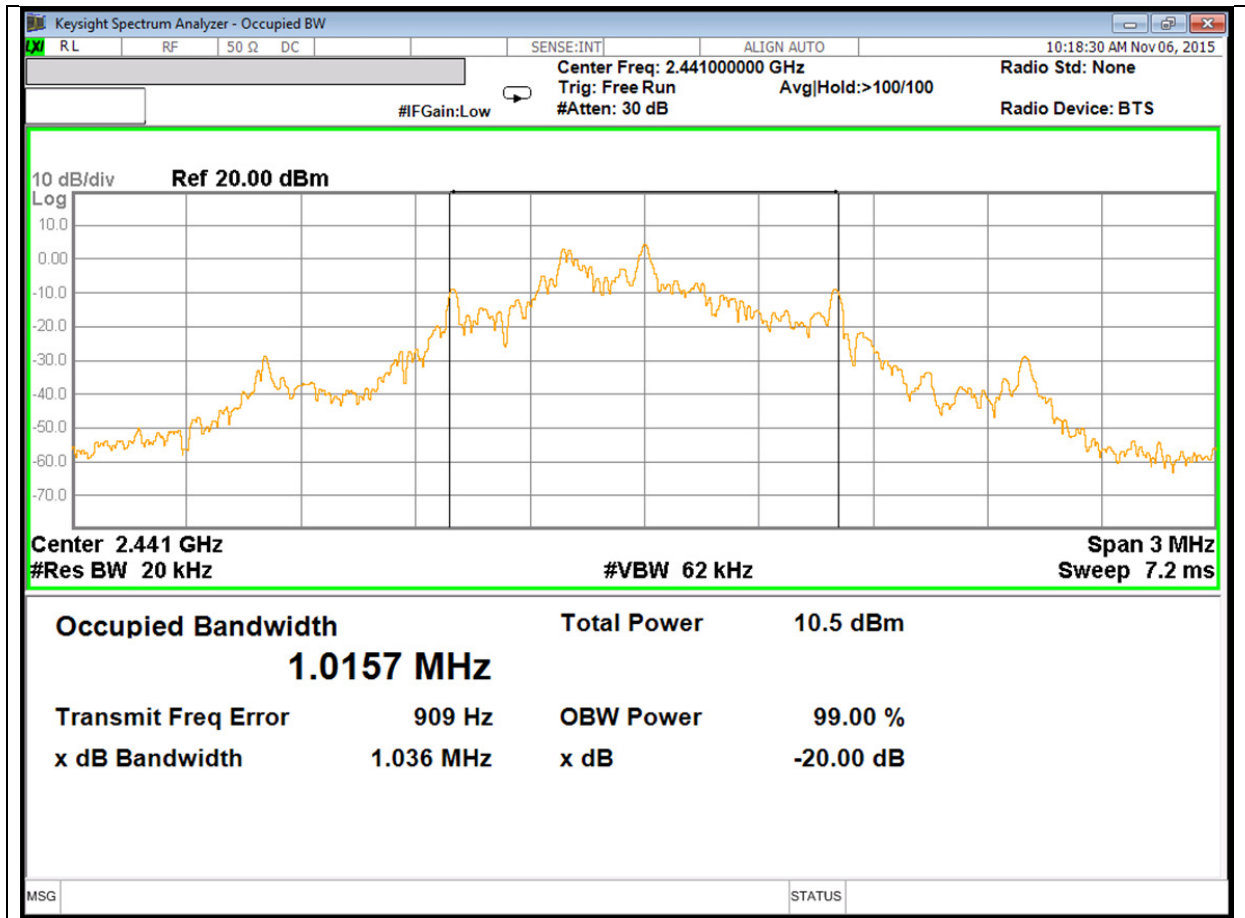

### HIGH CHANNEL

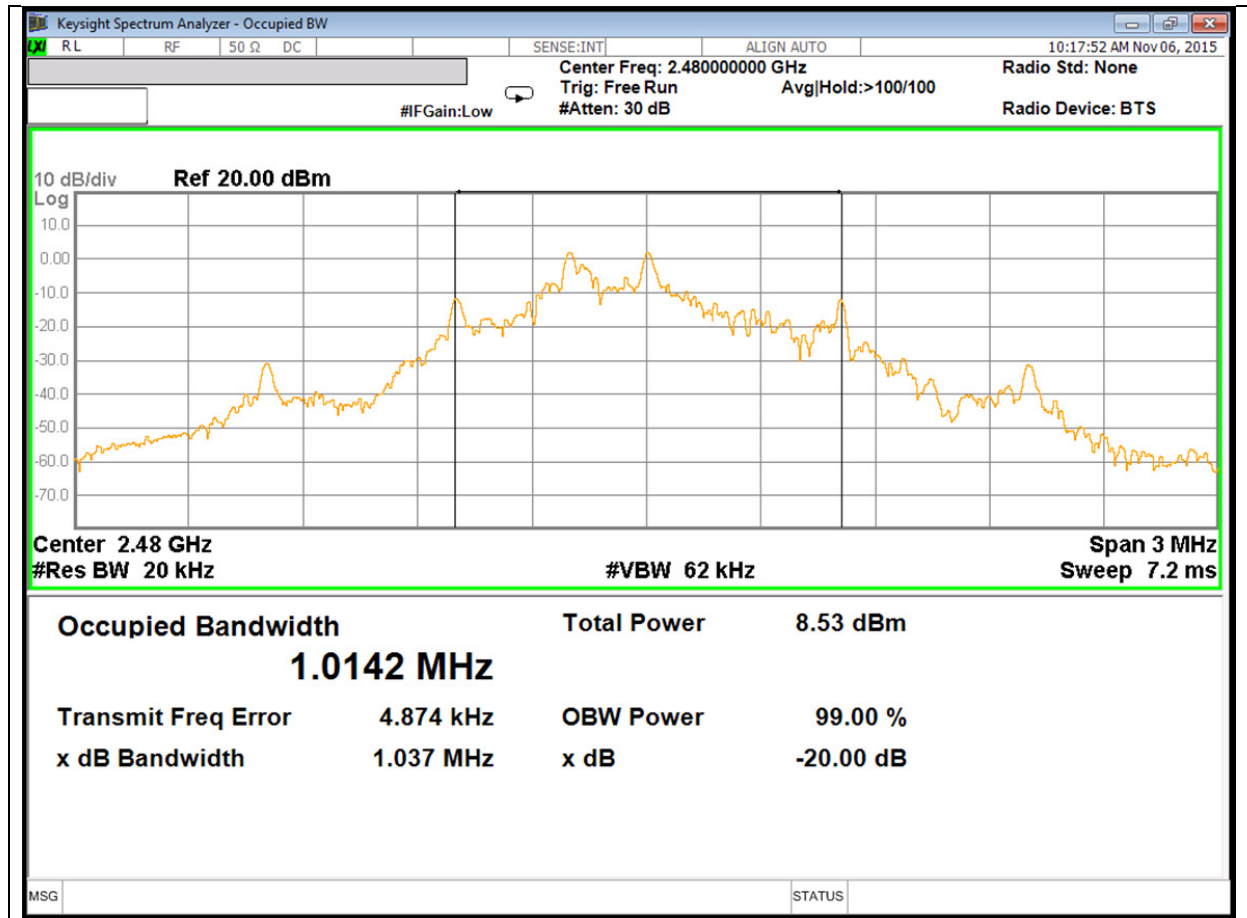

## 7.2. TRANSMITTER RADIATED EMISSIONS

### TEST PROCEDURE

ANSI C63.10: 2009

### LIMIT

FCC 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz .....	50	500
2400–2483.5 MHz .....	50	500
5725–5875 MHz .....	50	500
24.0–24.25 GHz .....	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490 .....	2400/F(kHz)	300
0.490–1.705 .....	24000/F(kHz)	30
1.705–30.0 .....	30	30
30–88 .....	100 **	3
88–216 .....	150 **	3
216–960 .....	200 **	3
Above 960 .....	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.



### 7.2.2. FUNDAMENTAL FREQUENCY RADIATED EMISSION



**FCC**  
**UL SUWON LAB**  
**Chamber 2**

**Project #:** 15K22210  
**Report #:** 15K22210  
**Date & Time:** 2015-11-20  
**Test Engr:** Steven Kim

**Company:** Samsung  
**EUT Description:** GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC  
**Test Configuration:** X POSITION  
**Type of Test:** FCC  
**Mode of Operation:** Transmitting : ANT+ mode

M% = ((t1+t2+t3+...)/T) \* 66.83% = 0.37%


Av Reading = Pk Reading + 20*log(M%)
20 * log (M%) = <span style="background-color: #90EE90; padding: 2px;">-48.64</span>

Freq	Pk Rdg	Av Rdg	AF	Closs	Pre-amp	Pk Level	Av Level	Pk Limit	Av Limit	Pk Margin	Avg Margin	Pol	Az	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	FCC_B	FCC_B	(dB)	(dB)	(H/V)	(Deg)	(Meter)
Low channel														
2402.00	85.45	36.81	32.00	-27.01	0.00	90.44	41.80	114.00	94.00	-23.56	-52.20	3mV	0.00	1.00
2402.00	87.17	38.53	32.00	-27.01	0.00	92.16	43.52	114.00	94.00	-21.84	-50.48	3mH	0.00	2.00
Mid channel														
2442.00	90.36	41.72	32.00	-27.01	0.00	95.35	46.71	114.00	94.00	-18.65	-47.29	3mV	0.00	1.00
2442.00	87.54	38.90	32.00	-27.01	0.00	92.53	43.89	114.00	94.00	-21.47	-50.11	3mH	0.00	2.00
High channel														
2480.00	87.90	39.26	32.00	-27.01	0.00	92.89	44.25	114.00	94.00	-21.11	-49.75	3mV	0.00	1.00
2480.00	88.79	40.15	32.00	-27.01	0.00	93.78	45.14	114.00	94.00	-20.22	-48.86	3mH	0.00	2.00

AVG VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

### 7.2.3. TRANSMITTER RESTRICTED BAND EDGES

#### BANDEDGE (LOW CHANNEL, HORIZONTAL)

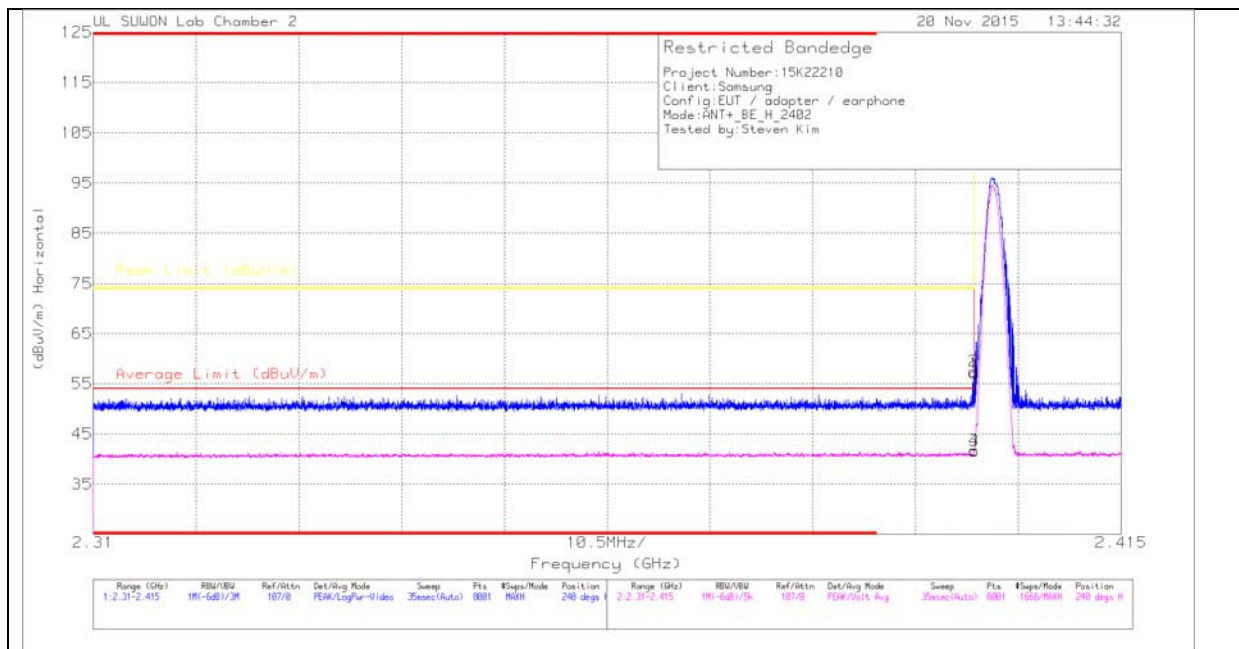


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	44.86	Pk	31.7	-19.5	57.06	-	-	74	-16.94	240	370	H
2	2.4	45.28	Pk	31.7	-19.5	57.48	-	-	74	-16.52	240	370	H
3	2.4	29.46	V1TV	31.7	-19.5	41.66	54	-12.34	-	-	240	370	H
4	2.4	29.51	V1TV	31.7	-19.5	41.71	54	-12.29	-	-	240	370	H

Pk - Peak detector

**VERTICAL PEAK AND AVERAGE PLOT**

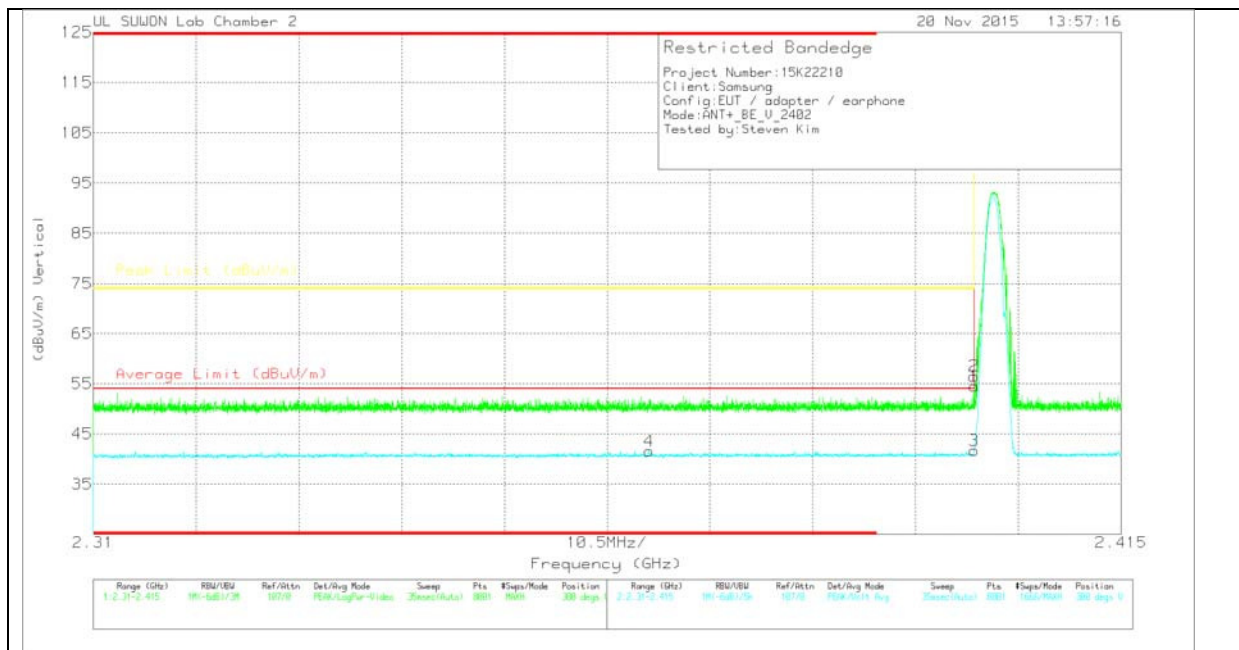

**VERTICAL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8724_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	42.31	Pk	31.7	-19.5	54.51	-	-	74	-19.49	300	380	V
2	2.4	44.3	Pk	31.7	-19.5	56.5	-	-	74	-17.5	300	380	V
3	2.4	29.53	V1TV	31.7	-19.5	41.73	54	-12.27	-	-	300	380	V
4	* 2.367	29.47	V1TV	31.7	-19.6	41.57	54	-12.43	-	-	300	380	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

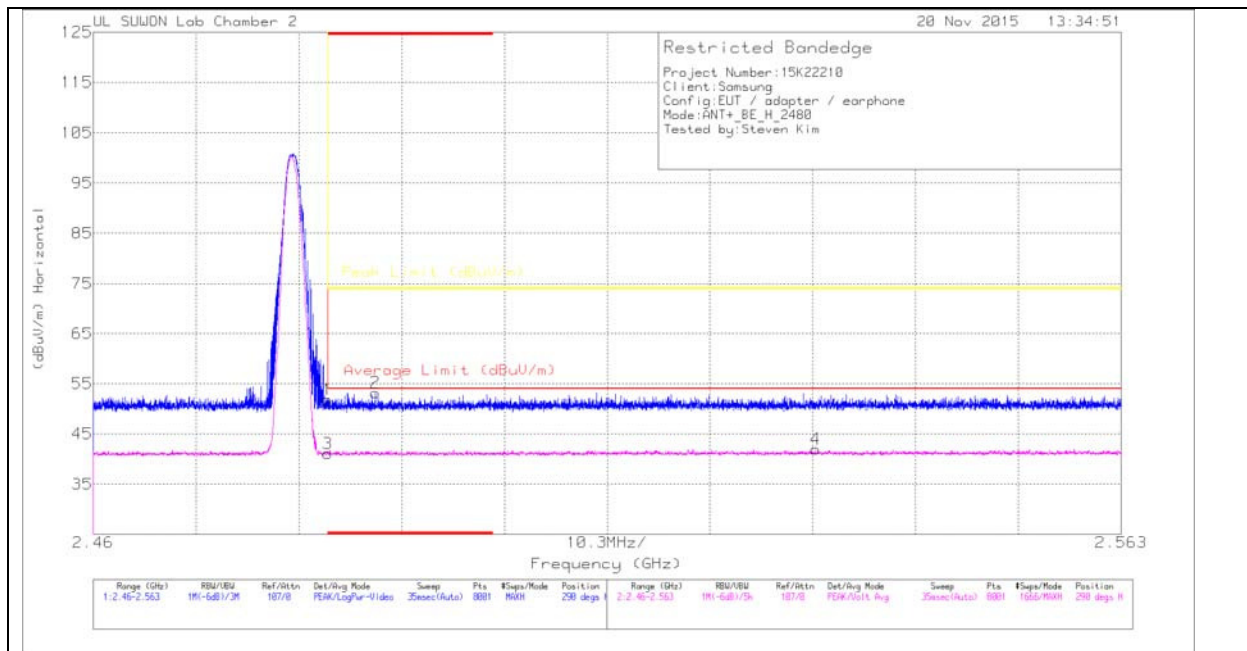

#### HORIZONTAL DATA


##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.38	Pk	31.8	-19.4	51.78	-	-	74	-22.22	290	350	H
2	* 2.488	40.81	Pk	31.8	-19.4	53.21	-	-	74	-20.79	290	350	H
3	* 2.484	28.7	V1TV	31.8	-19.4	41.1	54	-12.9	-	-	290	350	H
4	2.532	29.38	V1TV	31.9	-19.3	41.98	54	-12.02	-	-	290	350	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

**VERTICAL PEAK AND AVERAGE PLOT**

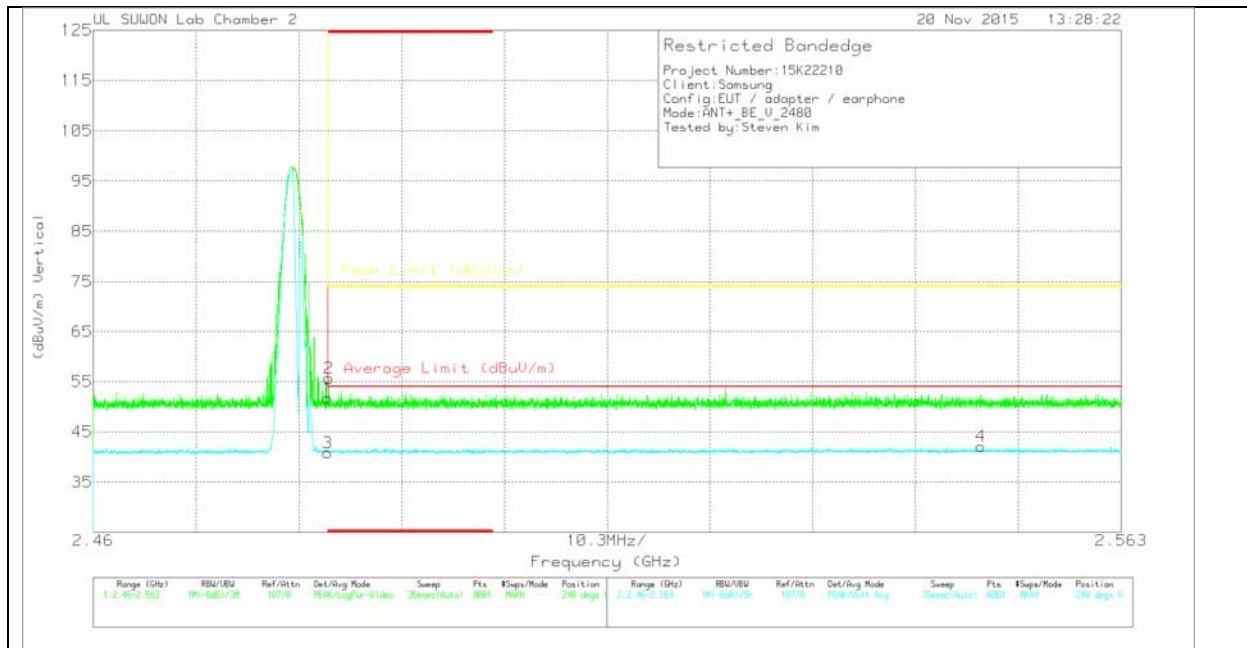

**VERTICAL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8724_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.27	Pk	31.8	-19.4	51.67	-	-	74	-22.33	240	380	V
2	* 2.484	43.28	Pk	31.8	-19.4	55.68	-	-	74	-18.32	240	380	V
3	* 2.484	28.48	V1TV	31.8	-19.4	40.88	54	-13.12	-	-	240	380	V
4	2.549	29.54	V1TV	31.9	-19.3	42.14	54	-11.86	-	-	240	380	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

**HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHZ**

### HARMONICS



**FCC  
UL SUMON LAB  
Chamber 2**

*Project #:* 15K22210  
*Report #:* 15K22210  
*Date & Time:* 2015-11-20  
*Test Engr:* Steven.Kim

*Company:* Samsung

*EUT Description:* GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC

*Test Configuration:* XPOSITION

*Type of Test:* FCC

*Mode of Operation:* Transmitting : ANT+ mode

M% = ((t1+t2+t3+...)/T) \* 66.83% = 0.37%


Av Reading = Pk Reading + 20*log(M%)
20 * log (M%) = <span style="background-color: #e0ffe0; padding: 2px;">-48.64</span>

Freq (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)
Low channel														
4804.00	47.15	35.78	35.00	-25.70	0.00	56.45	45.08	74.00	54.00	-17.55	-8.92	3mV	0.00	1.00
4804.00	47.52	35.65	35.00	-25.70	0.00	56.82	44.95	74.00	54.00	-17.18	-9.05	3mH	0.00	2.00
Mid channel														
4884.00	47.52	35.89	35.00	-25.70	0.00	56.82	45.19	74.00	54.00	-17.18	-8.81	3mV	0.00	1.00
4884.00	47.21	35.48	35.00	-25.70	0.00	56.51	44.78	74.00	54.00	-17.49	-9.22	3mH	0.00	2.00
High channel														
4960.00	47.35	35.62	35.00	-25.70	0.00	56.65	44.92	74.00	54.00	-17.35	-9.08	3mV	0.00	1.00
4960.00	47.68	35.42	35.00	-25.70	0.00	56.98	44.72	74.00	54.00	-17.02	-9.28	3mH	0.00	2.00


AVG VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

### 7.2.4. SPURIOUS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

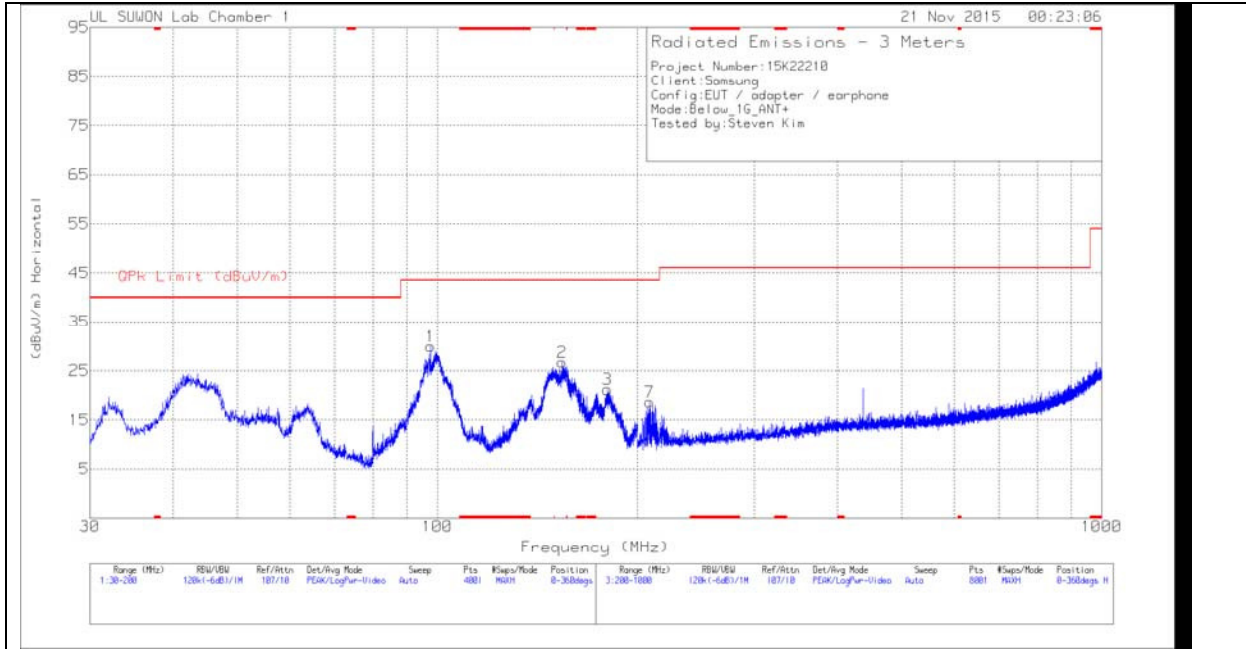

#### VERTICAL PLOT

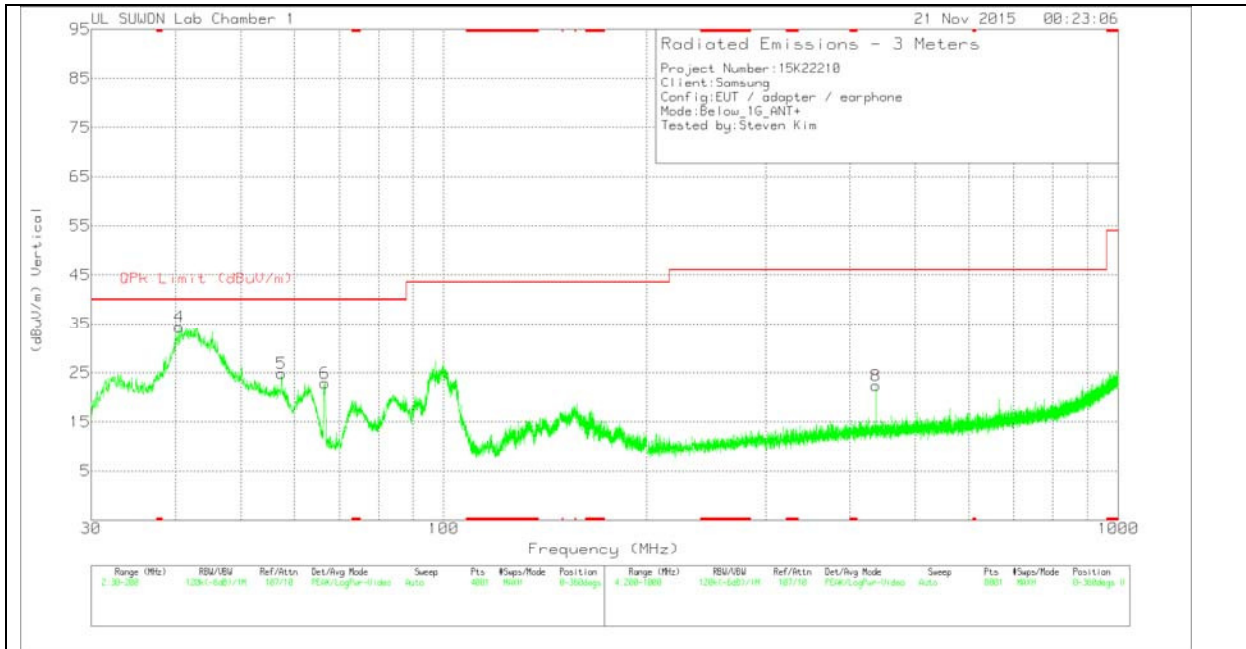

**BELOW 1 GHz TABLE**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-749	Below_1G	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	97.7025	49.46	Pk	11.1	-30.6	29.96	43.52	-13.56	0-360	200	H
2	154.1	48.73	Pk	8.4	-30.4	26.73	43.52	-16.79	0-360	200	H
3	180.28	42	Pk	9.5	-30.3	21.2	43.52	-22.32	0-360	100	H
4	40.54	52.31	Pk	12.9	-30.8	34.41	40	-5.59	0-360	100	V
5	57.4975	42.47	Pk	13.1	-30.7	24.87	40	-15.13	0-360	100	V
6	66.5925	42.84	Pk	10.7	-30.7	22.84	40	-17.16	0-360	100	V
7	208.9	37.32	Pk	11.6	-30.3	18.62	43.52	-24.9	0-360	100	H
8	437.5	36.48	Pk	15.5	-29.6	22.38	46.02	-23.64	0-360	100	V

Pk - Peak detector

## 8. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### TEST PROCEDURE

ANSI C63.10 - 2009

**RESULTS**

**6 WORST EMISSIONS**

**LINE 1 PLOT**

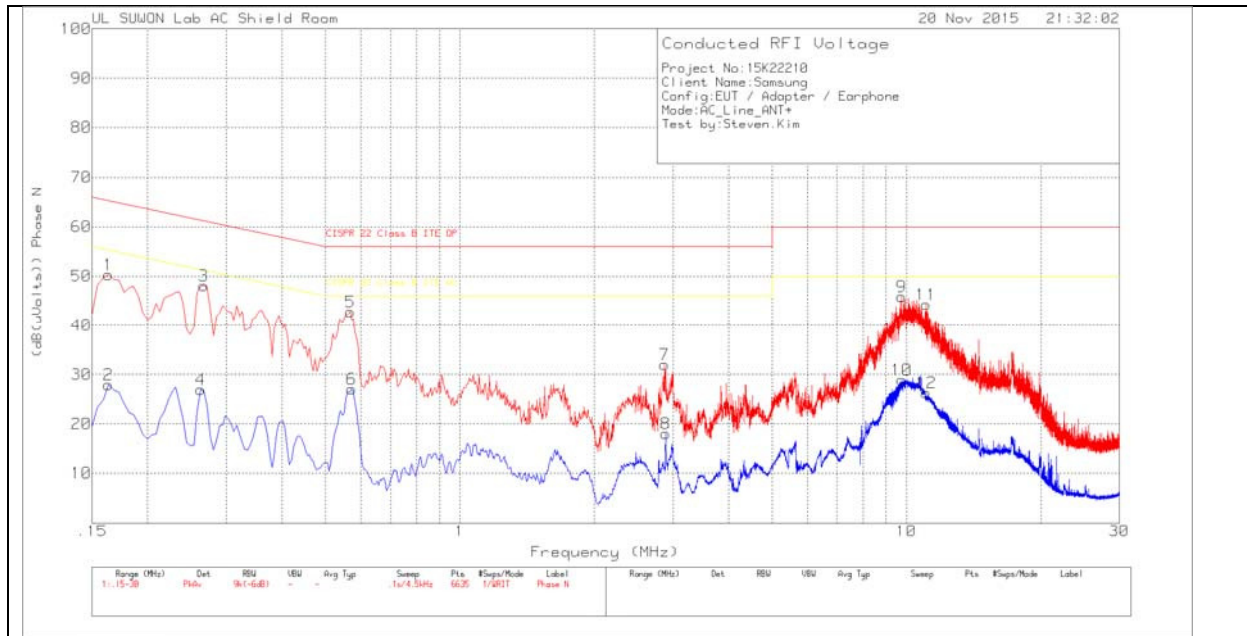

**LINE 1 RESULTS**

Trace Markers


Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.1635	40.18	Pk	10.1	0	50.28	65.28	-15	-	-
2	.1635	17.8	Av	10.1	0	27.9	-	-	55.28	-27.38
3	.267	38.21	Pk	9.9	0	48.11	61.21	-13.1	-	-
4	.2625	16.99	Av	9.9	0	26.89	-	-	51.35	-24.46
5	.5685	32.67	Pk	10.1	0	42.77	56	-13.23	-	-
6	.573	16.94	Av	10.1	0	27.04	-	-	46	-18.96
7	2.8725	22.13	Pk	9.8	.1	32.03	56	-23.97	-	-
8	2.8905	8.08	Av	9.8	.1	17.98	-	-	46	-28.02
9	9.7665	35.94	Pk	9.7	.2	45.84	60	-14.16	-	-
10	9.7665	18.96	Av	9.7	.2	28.86	-	-	50	-21.14
11	11.0625	34.37	Pk	9.7	.2	44.27	60	-15.73	-	-
12	11.0625	16.47	Av	9.7	.2	26.37	-	-	50	-23.63

Pk - Peak detector

Av - Average detection

### LINE 2 PLOT

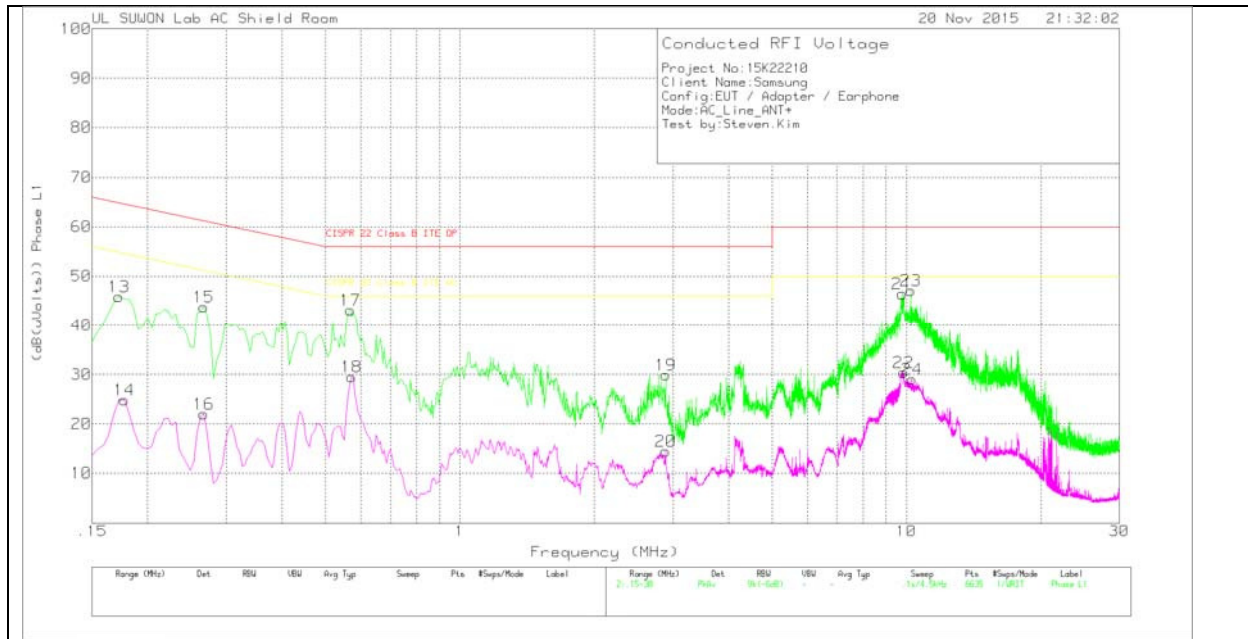

**LINE 2 RESULTS**

Trace Markers

Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L 1	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.1725	36.05	Pk	9.8	0	45.85	64.84	-18.99	-	-
14	.177	15.04	Av	9.8	0	24.84	-	-	54.63	-29.79
15	.267	34	Pk	9.7	0	43.7	61.21	-17.51	-	-
16	.267	12.31	Av	9.7	0	22.01	-	-	51.21	-29.2
17	.5685	33.1	Pk	10	0	43.1	56	-12.9	-	-
18	.573	19.54	Av	10	0	29.54	-	-	46	-16.46
19	2.8905	20.39	Pk	9.4	.1	29.89	56	-26.11	-	-
20	2.8905	4.93	Av	9.4	.1	14.43	-	-	46	-31.57
21	9.807	36.92	Pk	9.3	.2	46.42	60	-13.58	-	-
22	9.861	20.9	Av	9.3	.2	30.4	-	-	50	-19.6
23	10.2255	37.62	Pk	9.3	.2	47.12	60	-12.88	-	-
24	10.3155	19.54	Av	9.3	.2	29.04	-	-	50	-20.96

Pk - Peak detector

Av - Average detection